

Shenzhen Xingqida Technology Co., Ltd.

Room 301, Factory Building 3, No. 149, Industrial Avenue, Tangxiayong Community, Yanluo Street, Bao'an District,
Shenzhen City, Guangdong Province, China.

天线规格书

Antenna Specification

目录

Table of Contents


- * 1. 天线参数概述 / Overview of Antenna Parameters
- * 2. 天线外观及尺寸 / Antenna appearance and size

- * 3. 天线参数详细项 / Antenna parameter details

1. Overview of Antenna Parameters

Frequency	2402~2480MHZ
Effi AVG	40.22%
PK Gain	-1.17dBi
SWR	<3
Antenna Type	PCB Antenna
Antenna polarization	Linear polarization
PART NO	B01
Antenna size	L11.8*W0.5mm

2. Antenna parameter details

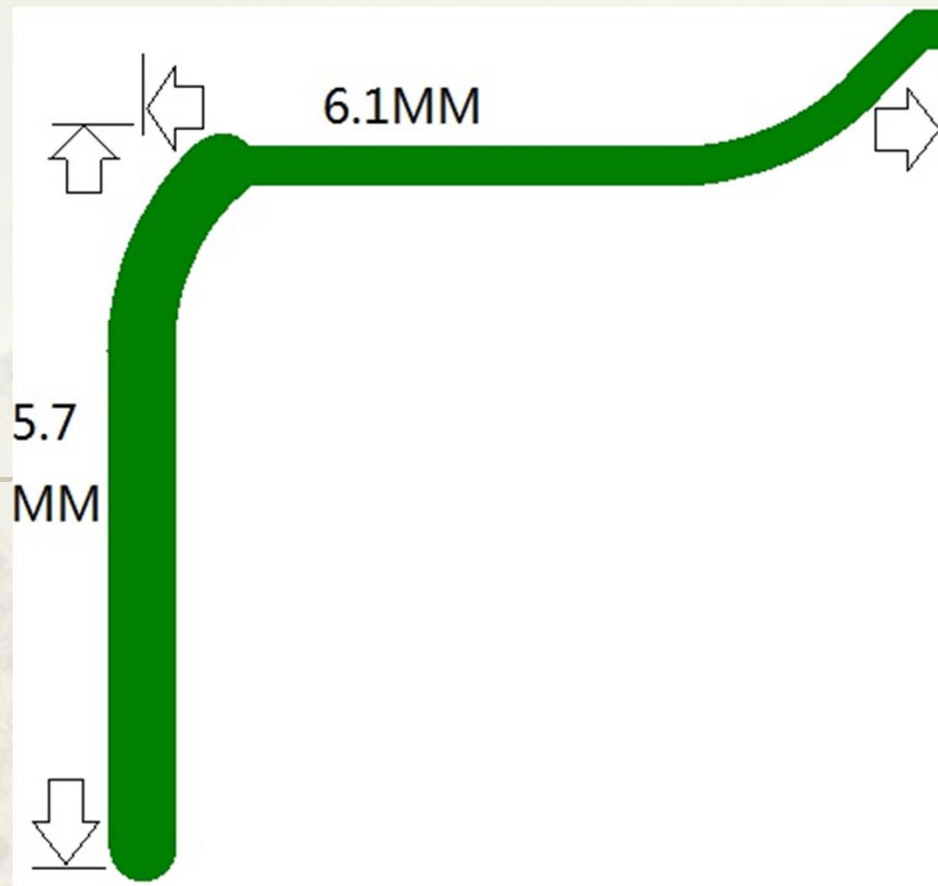


天线型号: B01 尺寸: L11.8*W0.5mm

3. Antenna parameter details


天线效率/Antenna efficiency

自由			
频率 (MHz)	效率(%)	效率(dBi)	增益(dBi)
2400	39.6	-5.02	-1.17
2410	40.36	-4.94	-1.29
2420	40.48	-4.93	-1.31
2430	41.32	-4.84	-1.22
2440	41.63	-4.81	-1.29
2450	40.93	-4.88	-1.33
2460	40.08	-4.97	-1.25
2470	39.19	-5.07	-1.29
2480	38.37	-5.16	-1.83
平均值	40.22	-4.96	-1.33

S11参数/Parameters

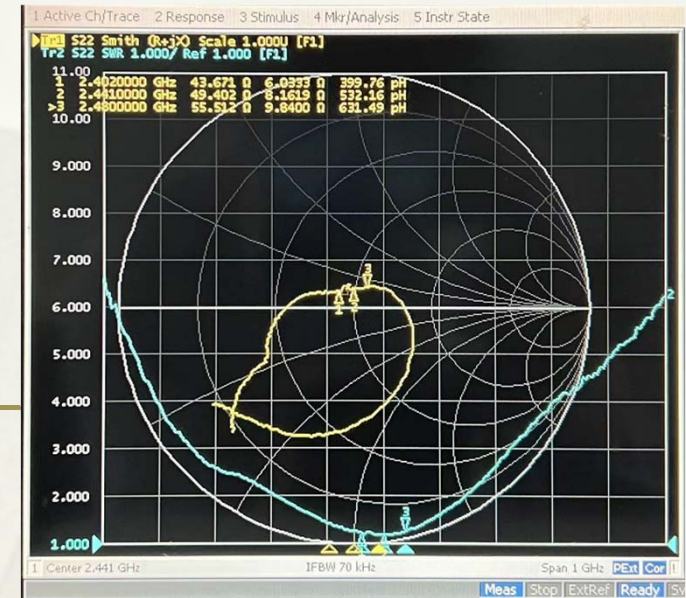

天线方向图/Antenna pattern

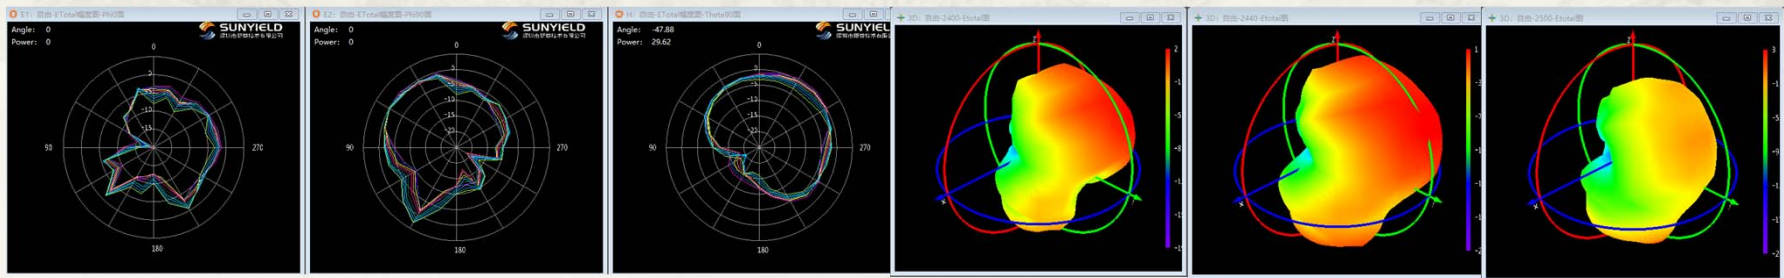

The background of the slide features a large, semi-circular fan. The fan is partially open, revealing a detailed landscape scene. The scene includes mountains, trees, and a body of water. The fan's ribs are visible, and the overall color palette is muted, with shades of green, brown, and grey. A thin horizontal line is positioned above the text.

The End