

TEST REPORT

FCC ID.	2BOY2-WO2	
Test Report No.	TCT251024E047	
Date of issue	Nov. 24, 2025	
Testing laboratory	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name	Shenzhen Yishunxing Technology Co., Ltd	
Address	4/F, Building A2, Tangwei Fuyuan Industrial Zone, Tangwei Community Fuyong Street, Xixiang, Bao an District, Shenzhen, China	
Manufacturer's name ... :	Shenzhen Yishunxing Technology Co., Ltd	
Address	4/F, Building A2, Tangwei Fuyuan Industrial Zone, Tangwei Community Fuyong Street, Xixiang, Bao an District, Shenzhen, China	
Standard(s)	FCC CFR Title 47 Part 15 Subpart E Section 15.407 KDB 662911 D01 Multiple Transmitter Output v02r01 KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Product Name	Smartphone	
Trade Mark	W&O	
Model/Type reference	WO2, S25 Ultra, S26 Ultra, S27 Ultra, I17 Pro Max, I17 Pro, I16 Pro Max, I16 Pro, C25 Ultra, WO1, WO3	
Rating(s)	Rechargeable Li-polymer Battery DC 3.87V	
Date of receipt of test item	Oct. 24, 2025	
Date (s) of performance of test	Oct. 24, 2025 ~ Nov. 24, 2025	
Tested by (+signature) ... :	Rleo LIU	
Check by (+signature) :	Beryl ZHAO	
Approved by (+signature):	Tomsin	

General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	3
1.3. Test Frequency	4
2. Test Result Summary	5
3. General Information.....	6
3.1. Test environment and mode.....	6
3.2. Description of Support Units	7
4. Facilities and Accreditations	8
4.1. Facilities	8
4.2. Location	8
5. Measurement Uncertainty	8
6. Test Results and Measurement Data	9
6.1. Antenna requirement	9
6.2. Conducted Emission.....	10
6.3. Maximum Conducted Output Power	14
6.4. 6dB Emission Bandwidth.....	15
6.5. 26dB Bandwidth and 99% Occupied Bandwidth	16
6.6. Power Spectral Density.....	17
6.7. Band edge	18
6.8. Unwanted Emissions	33
6.9. Frequency Stability Measurement	55

Appendix A: Test Result of Conducted Test

Appendix B: Photographs of Test Setup

Appendix C: Photographs of EUT

1. General Product Information

1.1. EUT description

Product Name.....:	Smartphone
Model/Type reference.....:	WO2
Sample Number.....:	TCT251024E025-0101
Operation Frequency	Band 1: 5180MHz~5240MHz Band 2A: 5260MHz~5320MHz Band 2C: 5500MHz~5700MHz Band 3: 5745MHz~5825MHz
Channel Bandwidth.....:	802.11a: 20MHz 802.11n: 20MHz, 40MHz 802.11ac: 20MHz, 40MHz, 80MHz
Modulation Technology	Orthogonal Frequency Division Multiplexing (OFDM)
Modulation Type	802.11a/n: 64QAM, 16QAM, QPSK, BPSK 802.11ac: 256QAM, 64QAM, 16QAM, QPSK, BPSK
Antenna Type.....:	FPC Antenna
Antenna Gain	Band 1: -1.48dBi Band 2A: -1.41dBi Band 2C: -1.21dBi Band 3: -1.41dBi
Rating(s).....:	Rechargeable Li-polymer Battery DC 3.87V

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

No.	Model No.	Tested with
1	WO2	☒
Other models	S25 Ultra, S26 Ultra, S27 Ultra, I17 Pro Max, I17 Pro, I16 Pro Max, I16 Pro, C25 Ultra, WO1, WO3	☐

Note: WO2 is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names, color and appearance. So the test data of WO2 can represent the remaining models.

1.3. Test Frequency

Band 1

20MHz		40MHz		80MHz	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180	38	5190	42	5210
40	5200	46	5230		
48	5240				

Band 2A

20MHz		40MHz		80MHz	
Channel	Frequency	Channel	Frequency	Channel	Frequency
52	5260	54	5270	58	5290
60	5300	62	5310		
64	5320				

Band 2C

20MHz		40MHz		80MHz	
Channel	Frequency	Channel	Channel	Frequency	Channel
100	5500	102	5510	106	5530
120	5600	118	5590	122	5610
140	5700	134	5670		

Band 3

20MHz		40MHz		80MHz	
Channel	Frequency	Channel	Channel	Frequency	Channel
149	5745	151	5755	155	5775
157	5785	159	5795		
165	5825				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a)	PASS
6dB Emission Bandwidth	§15.407(a)	PASS
26dB Emission Bandwidth& 99% Occupied Bandwidth	§15.407(a)	PASS
Power Spectral Density	§15.407(a)	PASS
Restricted Bands around fundamental frequency	§15.407(b)	PASS
Radiated Emission	§15.407(b)	PASS
Frequency Stability	§15.407(g)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. For the band 5.15-5.25GHz, EUT meet the requirements of 15.407(a)(ii).

3. General Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Software:	
Software Information:	Engineering Mode
Power Level:	Default
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations with max. duty cycle.
The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	6.5 Mbps
802.11n(HT40)	13.5 Mbps
802.11ac(VHT20)	6.5 Mbps
802.11ac(VHT40)	13.5 Mbps
802.11 ac (VHT80)	29.3 Mbps
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	WC065A11JH	J121083BA1003016	/	1+

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- A2LA-No.: 4320.01

SHENZHEN TONGCE TESTING LAB

The testing lab has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

5. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	All emissions, radiated(<1 GHz)	± 4.56 dB
5	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
6	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB

6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:

FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

E.U.T Antenna:

The EUT antenna is FPC antenna which permanently attached, and the best case gain of the antenna is -1.21dBi of UNII-2C.

6.2. Conducted Emission

6.2.1. Test Specification


Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2020														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane 40cm E.U.T AC power 80cm LISN Filter AC power EMI Receiver Test table/Insulation plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Charging + Transmitting Mode														
Test Procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2020 on conducted measurement.														
Test Result:	PASS														

6.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCI3	100898	Jun. 26, 2025	Jun. 25, 2026
LISN	Schwarzbeck	NSLK 8126	8126453	Jan. 21, 2025	Jan. 20, 2026
Attenuator	N/A	10dB	164080	Jun. 26, 2025	Jun. 25, 2026
Line-5	TCT	CE-05	/	Jun. 26, 2025	Jun. 25, 2026
EMI Test Software	EZ EMC	EMEC-3A1	1.1.4.2	/	/

6.2.3. Test data

Please refer to following diagram for individual
Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

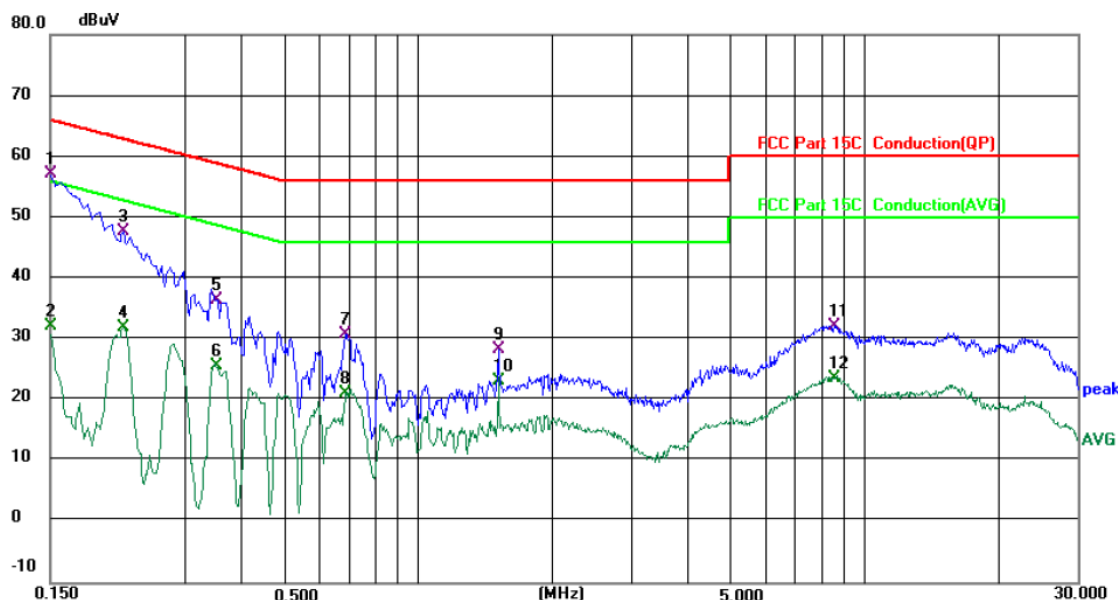

Site 844 Shielding Room

Phase: L1

Temperature: 24.0 (°C)

Humidity: 49 %

Limit: FCC Part 15C Conduction(QP)

Power: DC 5 V(Adapter Input AC 120 V/60 Hz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	48.69	8.55	57.24	66.00	-8.76	QP	
2		0.1500	23.67	8.55	32.22	56.00	-23.78	AVG	
3		0.2179	39.22	8.51	47.73	62.90	-15.17	QP	
4		0.2179	23.46	8.51	31.97	52.90	-20.93	AVG	
5		0.3520	27.90	8.53	36.43	58.92	-22.49	QP	
6		0.3520	17.23	8.53	25.76	48.92	-23.16	AVG	
7		0.6860	22.36	8.50	30.86	56.00	-25.14	QP	
8		0.6860	12.69	8.50	21.19	46.00	-24.81	AVG	
9		1.5180	19.80	8.57	28.37	56.00	-27.63	QP	
10		1.5180	14.54	8.57	23.11	46.00	-22.89	AVG	
11		8.5540	23.49	8.81	32.30	60.00	-27.70	QP	
12		8.5540	14.80	8.81	23.61	50.00	-26.39	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

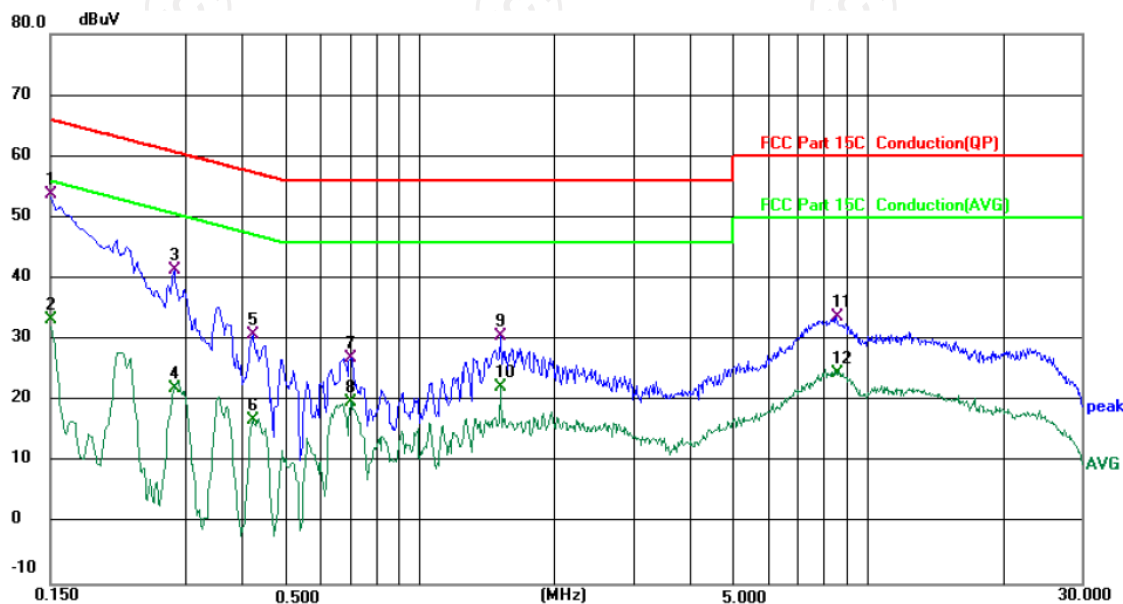

Site 844 Shielding Room

Phase: **N**

Temperature: 24.0 (°C)

Humidity: 49 %

Limit: FCC Part 15C Conduction(QP)

Power: DC 5 V(Adapter Input AC 120 V/60 Hz)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	45.17	8.53	53.70	66.00	-12.30	QP	
2		0.1500	24.86	8.53	33.39	56.00	-22.61	AVG	
3		0.2819	32.84	8.52	41.36	60.76	-19.40	QP	
4		0.2819	13.61	8.52	22.13	50.76	-28.63	AVG	
5		0.4220	22.28	8.54	30.82	57.41	-26.59	QP	
6		0.4220	8.33	8.54	16.87	47.41	-30.54	AVG	
7		0.7019	18.54	8.54	27.08	56.00	-28.92	QP	
8		0.7019	11.23	8.54	19.77	46.00	-26.23	AVG	
9		1.5180	21.95	8.59	30.54	56.00	-25.46	QP	
10		1.5180	13.61	8.59	22.20	46.00	-23.80	AVG	
11		8.5460	24.99	8.86	33.85	60.00	-26.15	QP	
12		8.5460	15.70	8.86	24.56	50.00	-25.44	AVG	

Note: 1. Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

2. Measurements were conducted in all three channels (high, middle, low) and all modulation (802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ac(VHT80)) and the worst case Mode (Middle channel and 802.11ac(VHT40)) was submitted only.

6.3. Maximum Conducted Output Power

6.3.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407(a)& Part 2 J Section 2.1046		
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E		
Limit:	Frequency Band (MHz)	Limit	
	5180 - 5240	24dBm(250mW) for client device	
	5260 - 5320	24dBm(250mW) or 11 dBm + 10 log B, B is the 26 dB emission bandwidth in megahertz	
	5470 - 5725	24dBm(250mW) or 11 dBm + 10 log B, B is the 26 dB emission bandwidth in megahertz	
	5745 - 5825	30dBm(1W)	
Test Setup:	 Spectrum AnalyzerEUT		
Test Mode:	Transmitting mode with modulation		
Test Procedure:	1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 2, b 2. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the conducted output power and record the results in the test report.		
Test Result:	PASS		

6.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 26, 2025	Jun. 25, 2026
Power detector box	MWRFTest	MW100-RFCB	MW210531TCT	Jan. 21, 2025	Jan. 20, 2026

6.4. 6dB Emission Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e)& Part 2 J Section 2.1049
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	>500kHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

6.4.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 26, 2025	Jun. 25, 2026
Power detector box	MWRFTest	MW100-RFCB	MW210531TCT	Jan. 21, 2025	Jan. 20, 2026

6.5. 26dB Bandwidth and 99% Occupied Bandwidth

6.5.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)& Part 2 J Section 2.1049
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D
Limit:	No restriction limits
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW. Set the Video bandwidth (VBW) = 3 *RBW. In order to make an accurate measurement. 4. Measure and record the results in the test report.
Test Result:	PASS

6.5.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 26, 2025	Jun. 25, 2026
Power detector box	MWRFtest	MW100-RFCB	MW210531TCT	Jan. 21, 2025	Jan. 20, 2026

6.6. Power Spectral Density

6.6.1. Test Specification


Test Requirement:	FCC Part15 E Section 15.407 (a)
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F
Limit:	$\leq 11.00\text{dBm/MHz}$ for Band 1 5150MHz-5250MHz(client device) $\leq 11.00\text{dBm/MHz}$ for Band 2A&2C 5250-5350&5470-5725 $\leq 30.00\text{dBm/500KHz}$ for Band 3 5725MHz-5850MHz The e.i.r.p spectral density for Band 1 5150MHz – 5250 MHz should not exceed 10dBm/MHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510 kHz/1 MHz, VBW $\geq 3 \times$ RBW, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level. 4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.
Test Result:	PASS

6.6.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 26, 2025	Jun. 25, 2026
Power detector box	MWRFTest	MW100-RFCB	MW210531TCT	Jan. 21, 2025	Jan. 20, 2026

6.7. Band edge

6.7.1. Test Specification

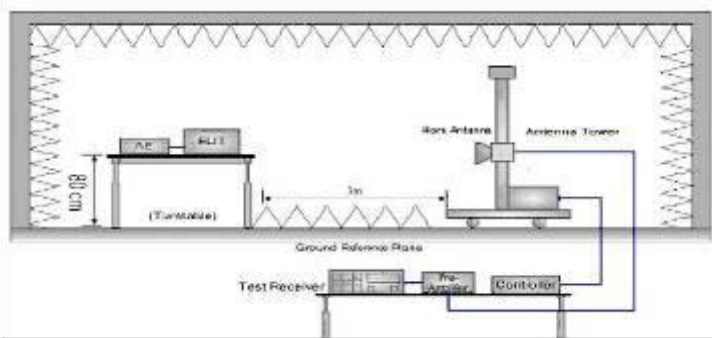Test Requirement:	FCC CFR47 Part 15E Section 15.407																				
Test Method:	ANSI C63.10 2020																				
Limit:	In un-restricted band: For Band 1&2A&2C: -27dBm/MHz For Band 3:																				
	<table><tr><th>Frequency (MHz)</th><th>Limit (dBm/MHz)</th><th>Frequency (MHz)</th><th>Limit (dBm/MHz)</th></tr><tr><td>< 650</td><td>-27</td><td>5850~5855</td><td>27~15.6</td></tr><tr><td>5650~5700</td><td>-27~10</td><td>5855~5875</td><td>15.6~10</td></tr><tr><td>5700~5720</td><td>10~15.6</td><td>5875~5925</td><td>10~-27</td></tr><tr><td>5720~5725</td><td>15.6~27</td><td>> 5925</td><td>-27</td></tr></table>	Frequency (MHz)	Limit (dBm/MHz)	Frequency (MHz)	Limit (dBm/MHz)	< 650	-27	5850~5855	27~15.6	5650~5700	-27~10	5855~5875	15.6~10	5700~5720	10~15.6	5875~5925	10~-27	5720~5725	15.6~27	> 5925	-27
	Frequency (MHz)	Limit (dBm/MHz)	Frequency (MHz)	Limit (dBm/MHz)																	
	< 650	-27	5850~5855	27~15.6																	
	5650~5700	-27~10	5855~5875	15.6~10																	
5700~5720	10~15.6	5875~5925	10~-27																		
5720~5725	15.6~27	> 5925	-27																		
E[dBμV/m] = EIRP[dBm] + 95.2 @3m																					
In restricted band:																					
<table><tr><th>Detector</th><th>Limit@3m</th></tr><tr><td>Peak</td><td>74dBμV/m</td></tr><tr><td>AVG</td><td>54dBμV/m</td></tr></table>		Detector	Limit@3m	Peak	74dBμV/m	AVG	54dBμV/m														
Detector	Limit@3m																				
Peak	74dBμV/m																				
AVG	54dBμV/m																				
Test Setup:																					
Test Mode:	Transmitting mode with modulation																				
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold																				


	Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi peak or average method as specified and then reported in a data sheet.
Test Result:	PASS

6.7.2. Test Instruments

Radiated Emission Test Site (966)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCI7	100529	Jan. 21, 2025	Jan. 20, 2026
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 26, 2025	Jun. 25, 2026
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Jan. 21, 2025	Jan. 20, 2026
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Apr. 11, 2025	Apr. 10, 2026
Pre-amplifier	HP	8447D	2727A05017	Jun. 26, 2025	Jun. 25, 2026
Loop antenna	Schwarzbeck	FMZB1519B	00191	Jun. 30, 2025	Jun. 29, 2026
Broadband Antenna	Schwarzbeck	VULB9163	340	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Jan. 24, 2025	Jan. 23, 2026
Coaxial cable	SKET	RE-03-D	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-03-M	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-03-L	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-D	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-M	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-L	/	Jun. 27, 2025	Jun. 26, 2026
Antenna Mast	Keleto	RE-AM	/	/	/
EMI Test Software	EZ_EMCC	FA-03A2 RE+	1.1.4.2	/	/

6.7.3. Test Data


802.11ac(VHT20)-5180

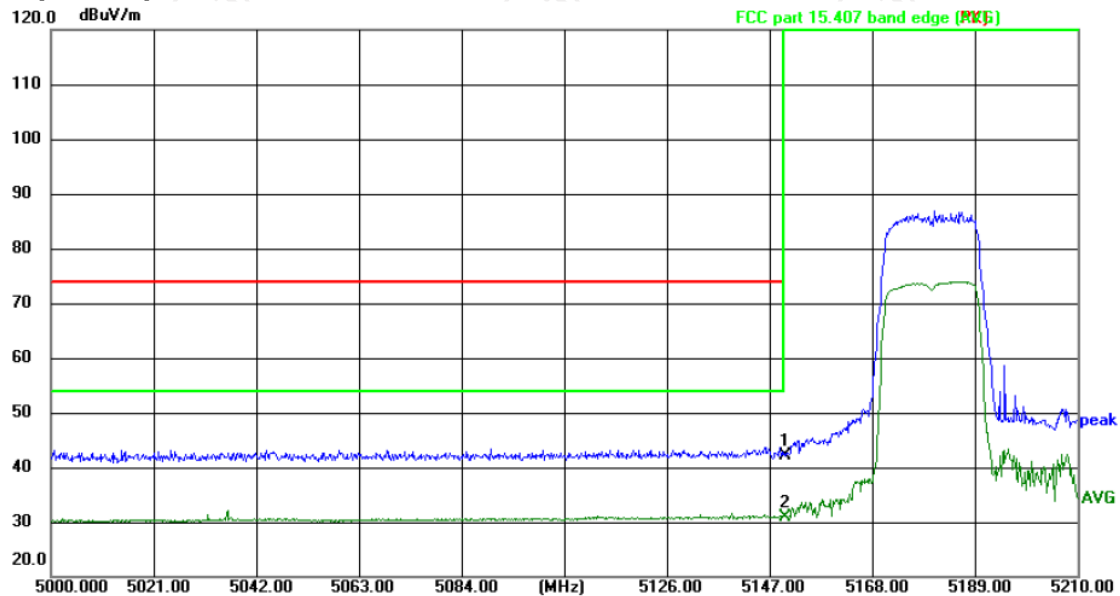

Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK) Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5150.000	51.09	-8.94	42.15	74.00	-31.85	peak	P	
2 *	5150.000	39.87	-8.94	30.93	54.00	-23.07	AVG	P	

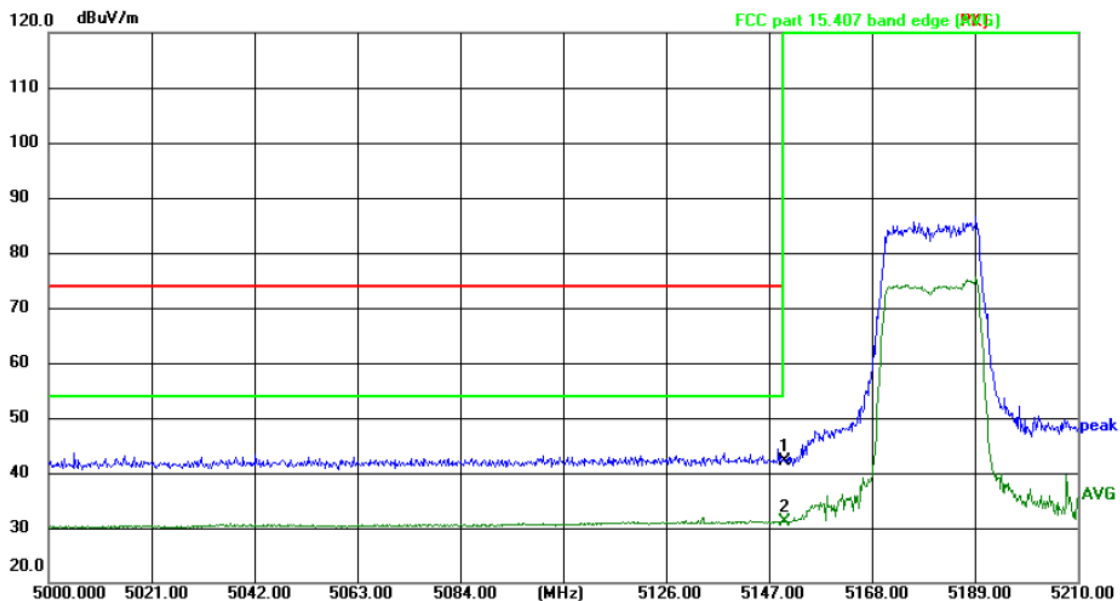


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK) Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5150.000	51.00	-8.94	42.06	74.00	-31.94	peak	P	
2 *	5150.000	40.02	-8.94	31.08	54.00	-22.92	AVG	P	


802.11ac(VHT40)-5190

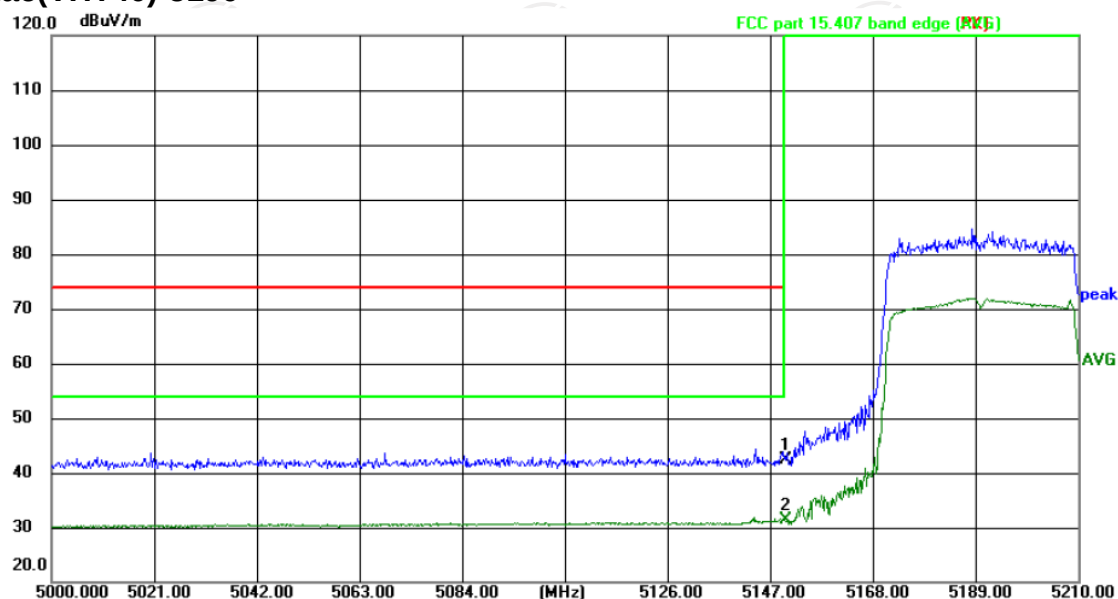

Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK) Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5150.000	51.29	-8.94	42.35	74.00	-31.65	peak	P	
2 *	5150.000	40.22	-8.94	31.28	54.00	-22.72	AVG	P	

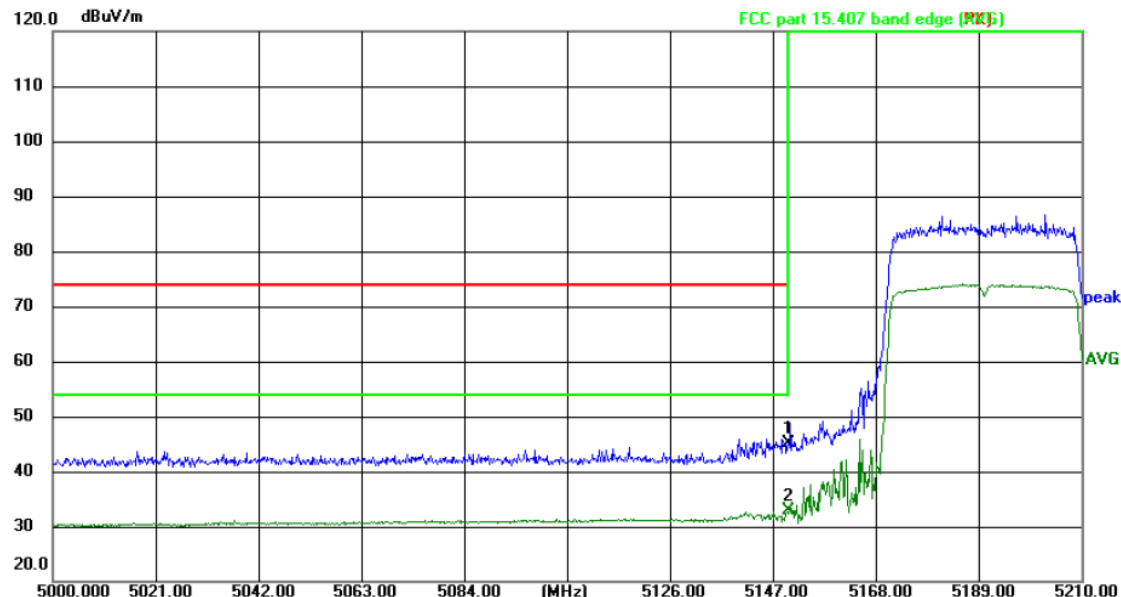


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK) Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5150.000	54.00	-8.94	45.06	74.00	-28.94	peak	P	
2 *	5150.000	41.74	-8.94	32.80	54.00	-21.20	AVG	P	

802.11ac(VHT80)-5210

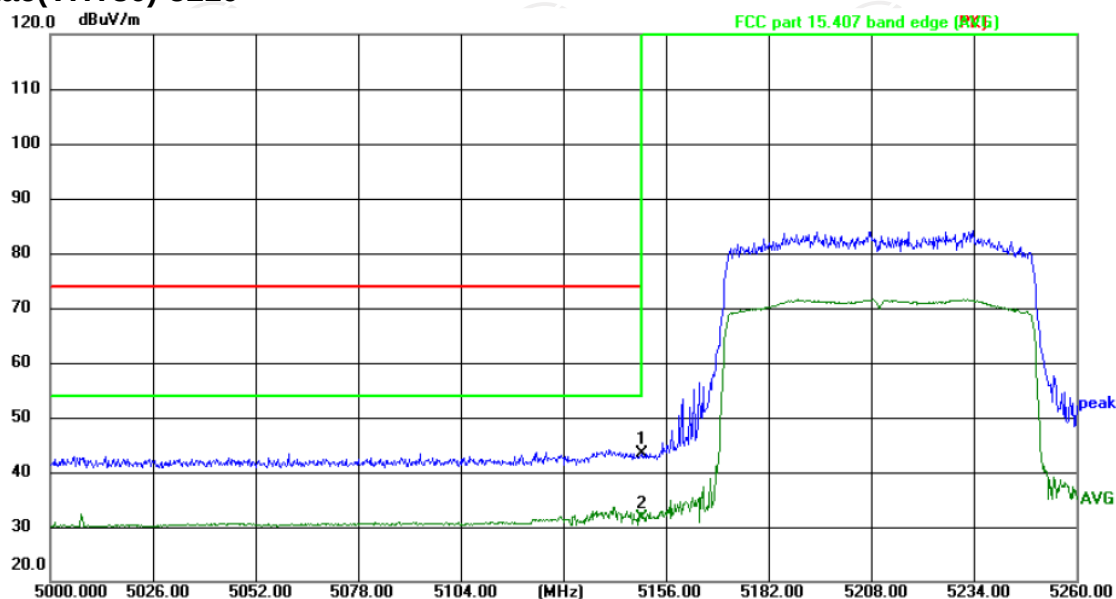


Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5150.000	52.31	-8.94	43.37	74.00	-30.63	peak	P	
2 *	5150.000	40.51	-8.94	31.57	54.00	-22.43	AVG	P	

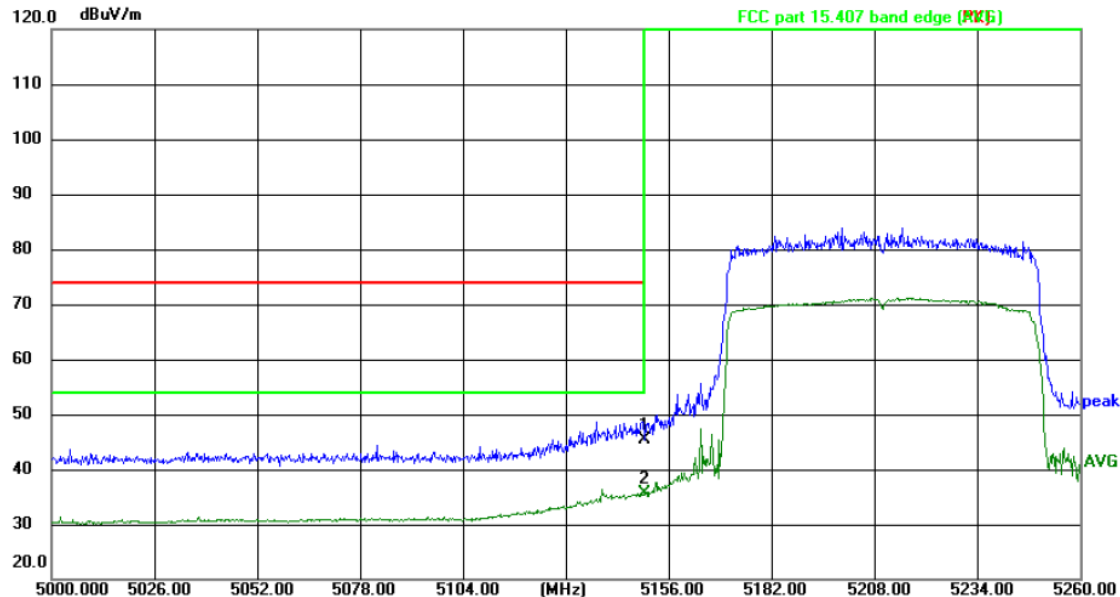


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5150.000	54.30	-8.94	45.36	74.00	-28.64	peak	P	
2 *	5150.000	44.57	-8.94	35.63	54.00	-18.37	AVG	P	


802.11ac(VHT20)-5320

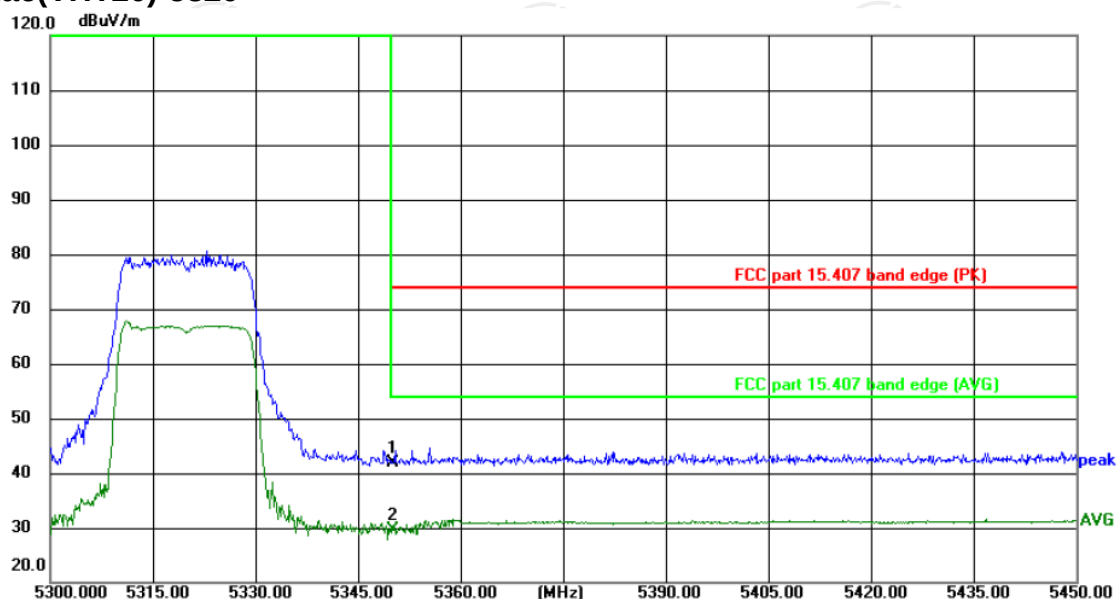

Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK) Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5350.000	50.38	-8.45	41.93	74.00	-32.07	peak	P	
2 *	5350.000	37.98	-8.45	29.53	54.00	-24.47	AVG	P	

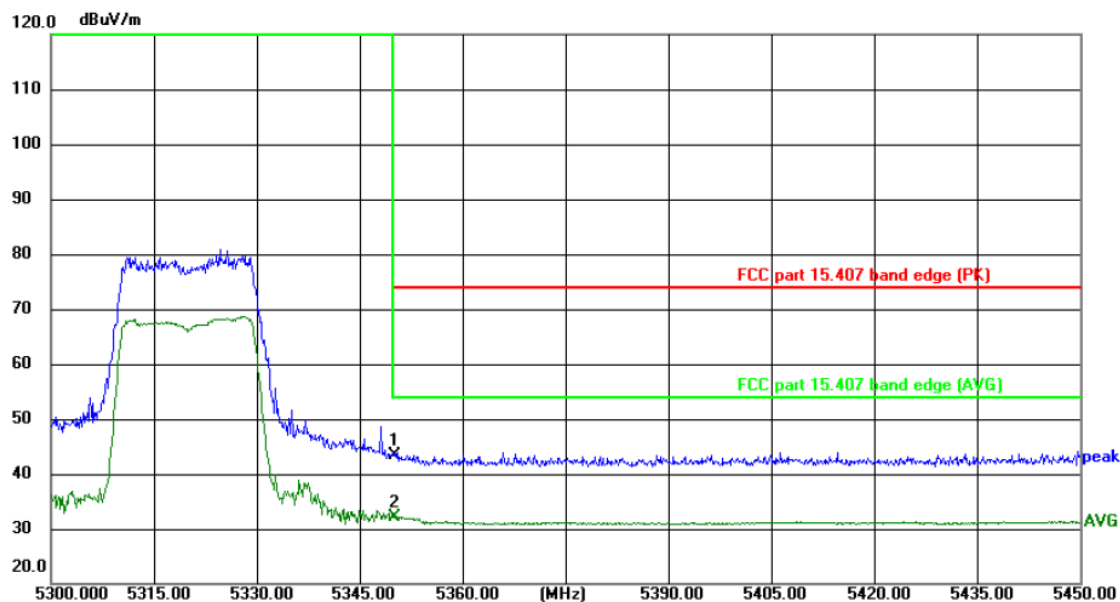


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK) Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5350.000	51.84	-8.45	43.39	74.00	-30.61	peak	P	
2 *	5350.000	40.50	-8.45	32.05	54.00	-21.95	AVG	P	

802.11ac(VHT40)-5310

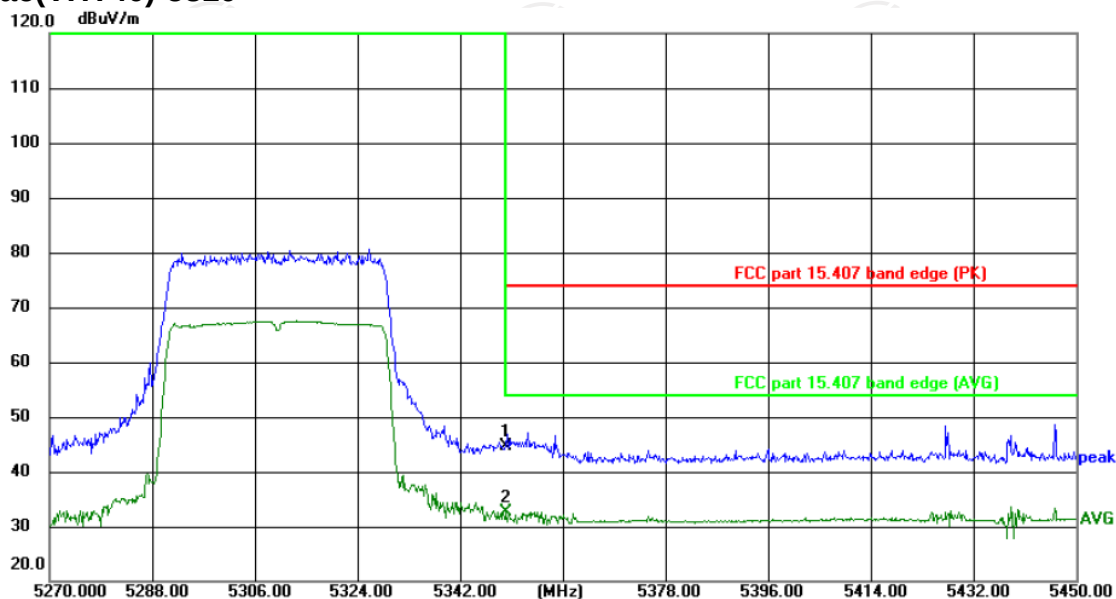


Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5350.000	53.20	-8.45	44.75	74.00	-29.25	peak	P	
2 *	5350.000	41.11	-8.45	32.66	54.00	-21.34	AVG	P	

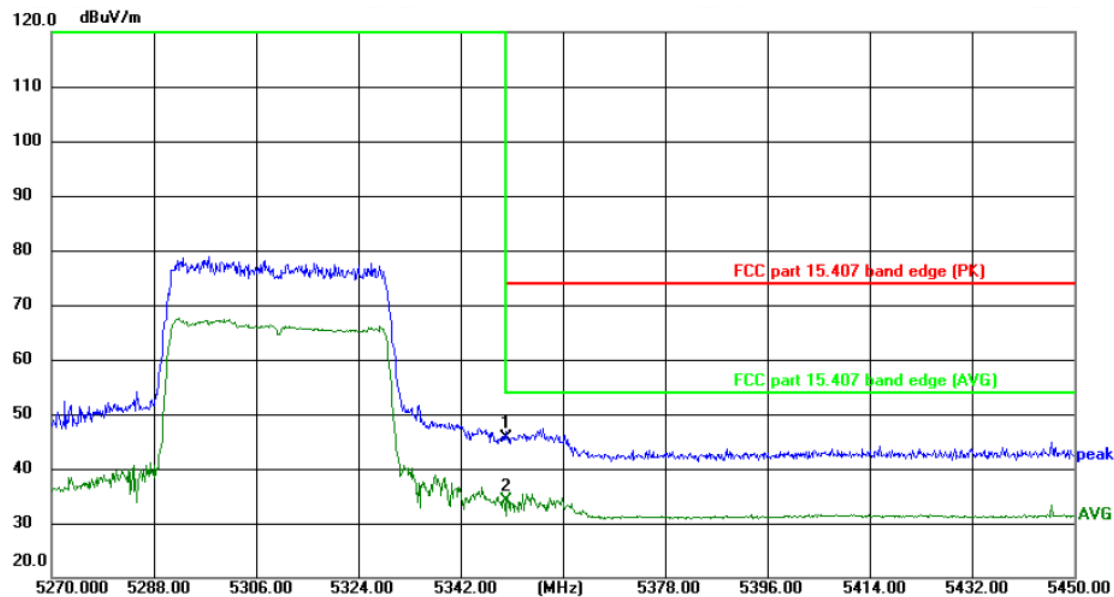


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5350.000	54.00	-8.45	45.55	74.00	-28.45	peak	P	
2 *	5350.000	42.60	-8.45	34.15	54.00	-19.85	AVG	P	

802.11ac(VHT80)-5290

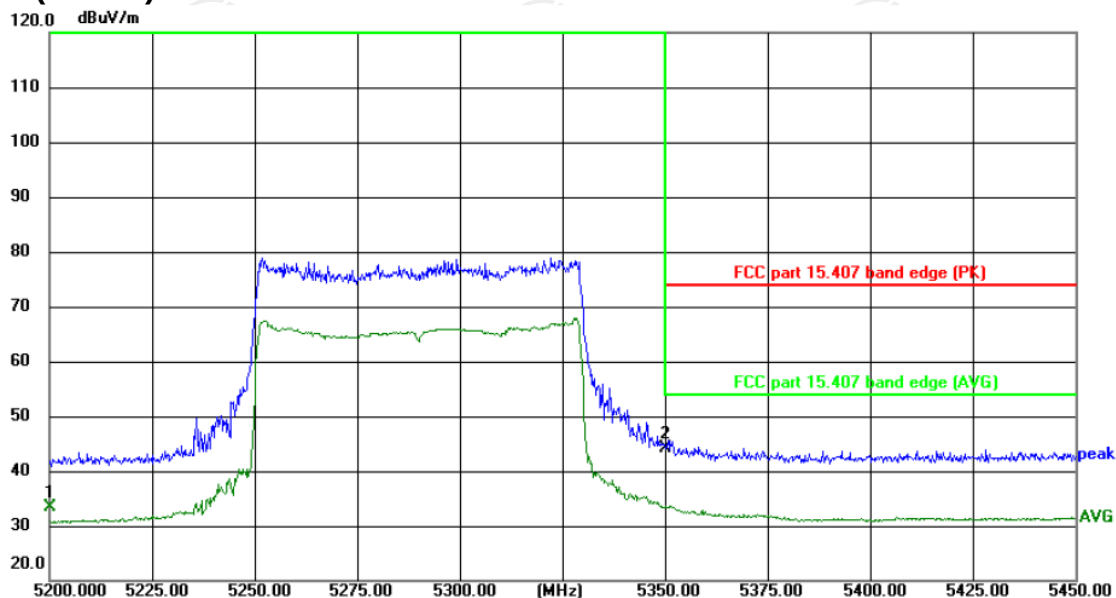


Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK)

Power:DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5150.000	42.40	-8.94	33.46	54.00	-20.54	AVG	P	
2	5350.000	52.65	-8.45	44.20	74.00	-29.80	peak	P	

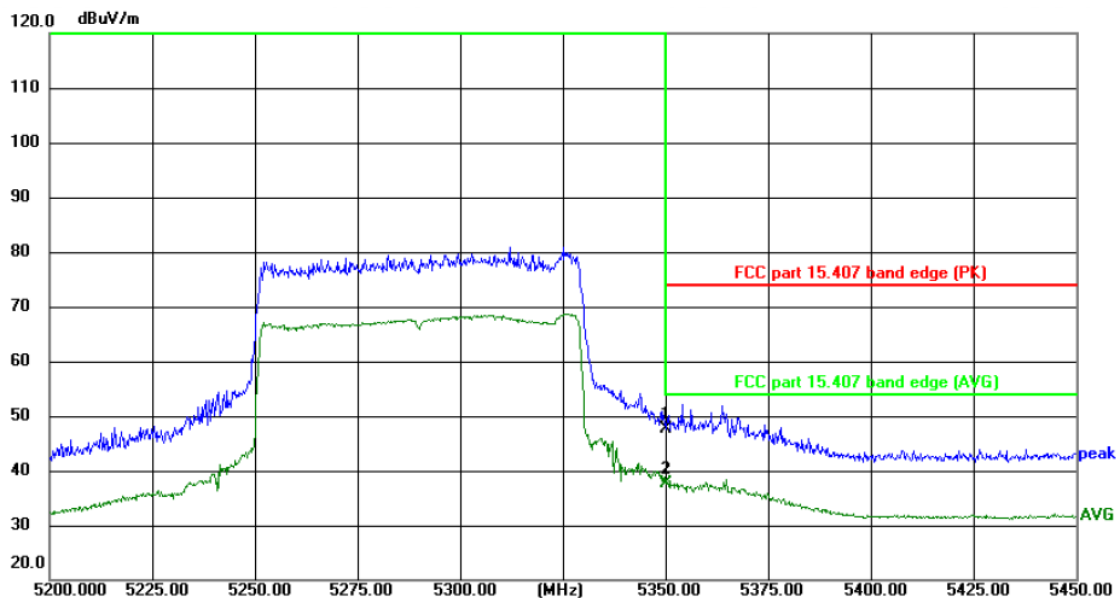


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK)

Power:DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5350.000	56.07	-8.45	47.62	74.00	-26.38	peak	P	
2 *	5350.000	46.03	-8.45	37.58	54.00	-16.42	AVG	P	

802.11ac(VHT20)-5500

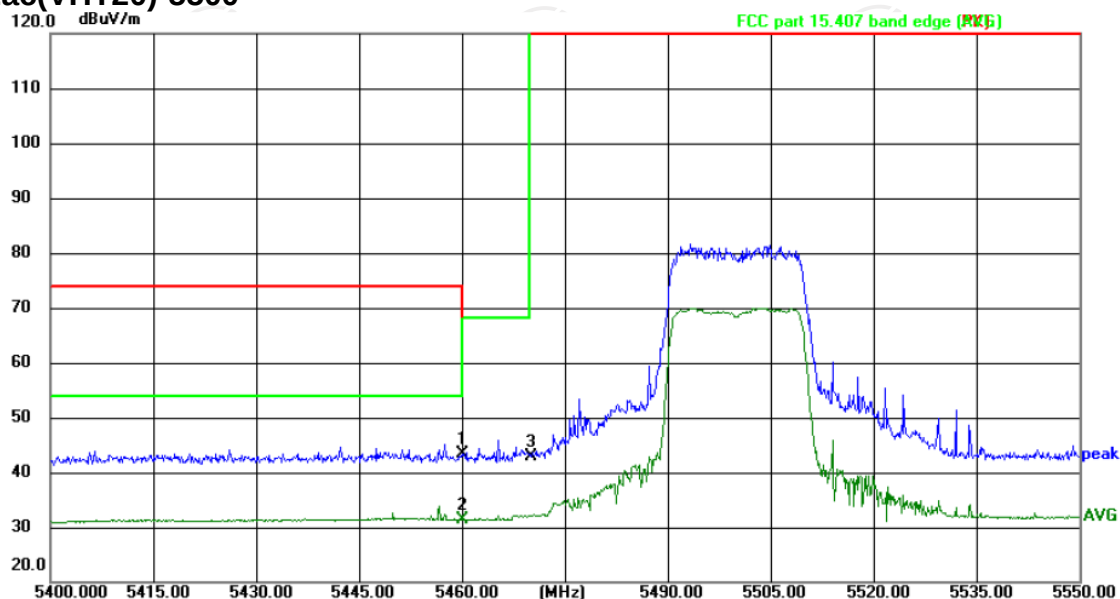


Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5460.000	51.45	-8.04	43.41	68.20	-24.79	peak	P	
2 *	5460.000	39.44	-8.04	31.40	54.00	-22.60	AVG	P	
3	5470.000	51.00	-8.02	42.98	68.20	-25.22	peak	P	

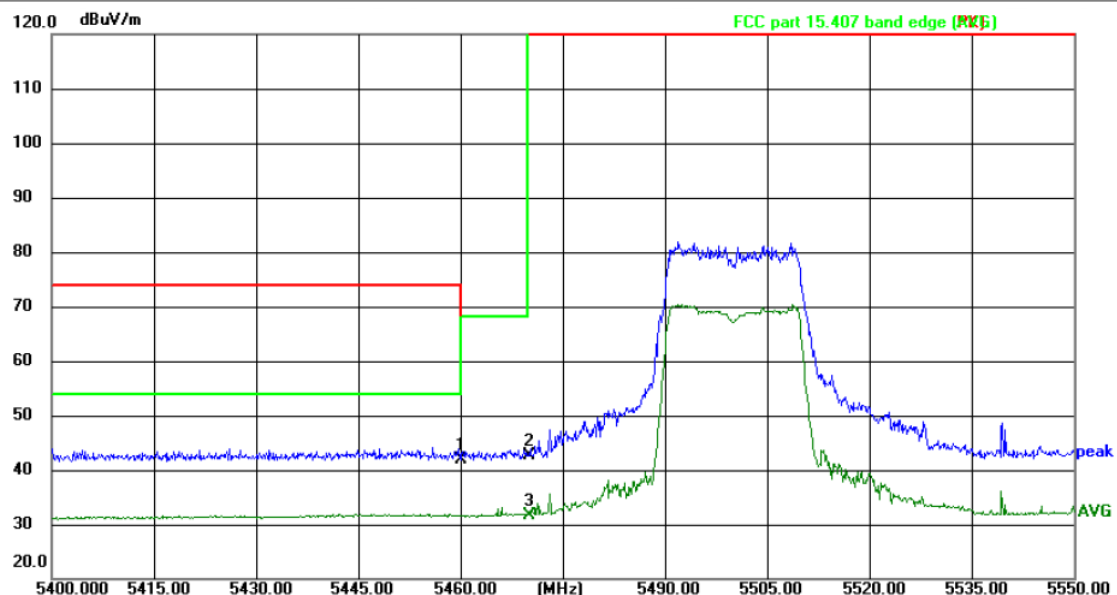


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5460.000	50.02	-8.04	41.98	68.20	-26.22	peak	P	
2 *	5470.000	50.54	-8.02	42.52	68.20	-25.68	peak	P	
3	5470.000	39.60	-8.02	31.58	68.20	-36.62	AVG	P	

802.11ac(VHT40)-5510

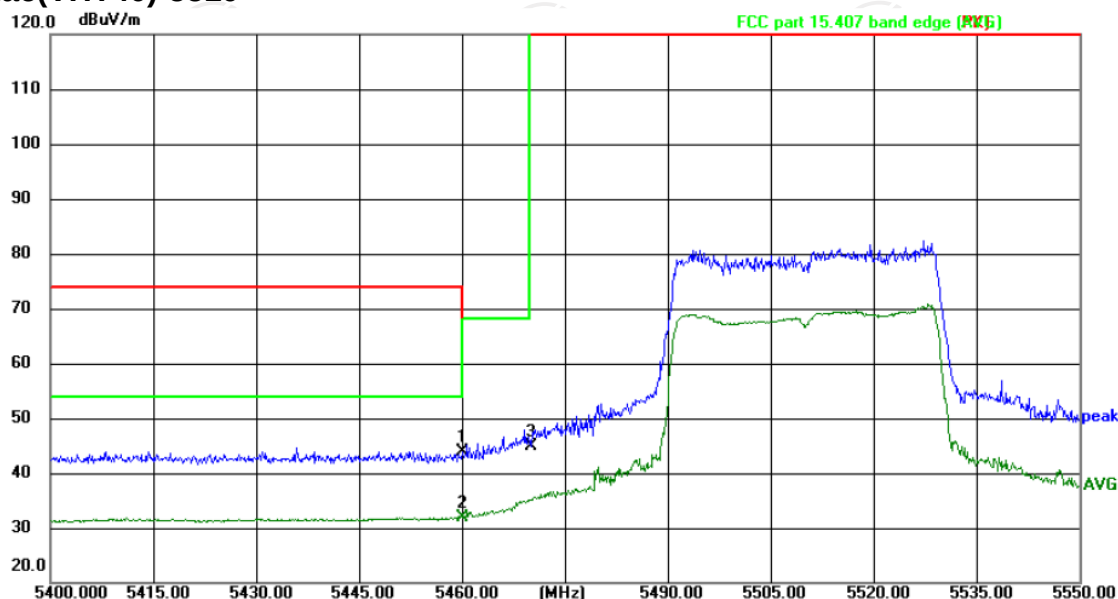

Site: 3m Anechoic Chamber

Polarization: **Horizontal**


Temperature: 22.9(°C)

Humidity: 63 %

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5460.000	51.80	-8.04	43.76	68.20	-24.44	peak	P	
2 *	5460.000	39.83	-8.04	31.79	54.00	-22.21	AVG	P	
3	5470.000	52.98	-8.02	44.96	68.20	-23.24	peak	P	

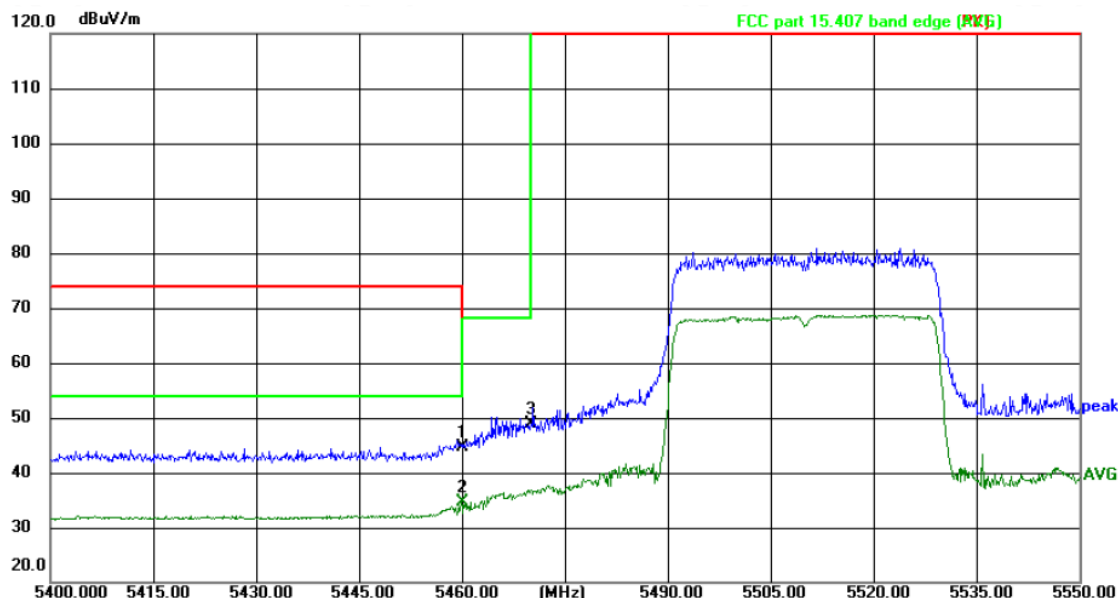

Site: 3m Anechoic Chamber

Polarization: **Vertical**

Temperature: 22.9(°C)


Humidity: 63 %

Limit: FCC part 15.407 band edge (PK)

Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5460.000	52.57	-8.04	44.53	68.20	-23.67	peak	P	
2	5460.000	42.68	-8.04	34.64	54.00	-19.36	AVG	P	
3 *	5470.000	56.93	-8.02	48.91	68.20	-19.29	peak	P	


802.11ac(VHT80)-5530

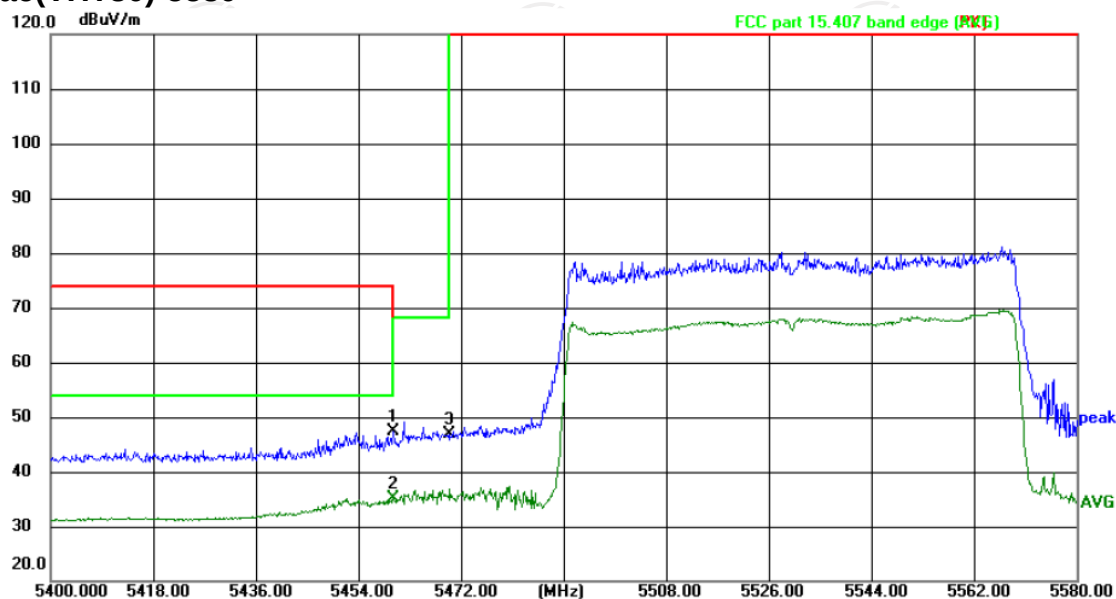

Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK) Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5460.000	55.37	-8.04	47.33	68.20	-20.87	peak	P	
2 *	5460.000	43.08	-8.04	35.04	54.00	-18.96	AVG	P	
3	5470.000	54.85	-8.02	46.83	68.20	-21.37	peak	P	

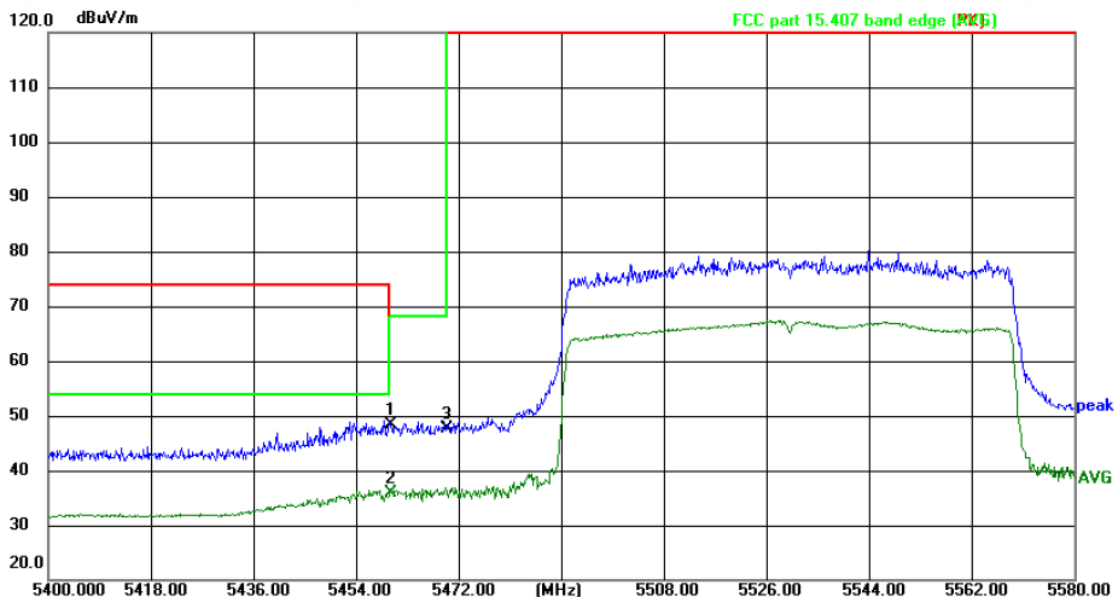


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge (PK) Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5460.000	56.31	-8.04	48.27	68.20	-19.93	peak	P	
2 *	5460.000	44.00	-8.04	35.96	54.00	-18.04	AVG	P	
3	5470.000	55.73	-8.02	47.71	68.20	-20.49	peak	P	


802.11ac(VHT20)-5825

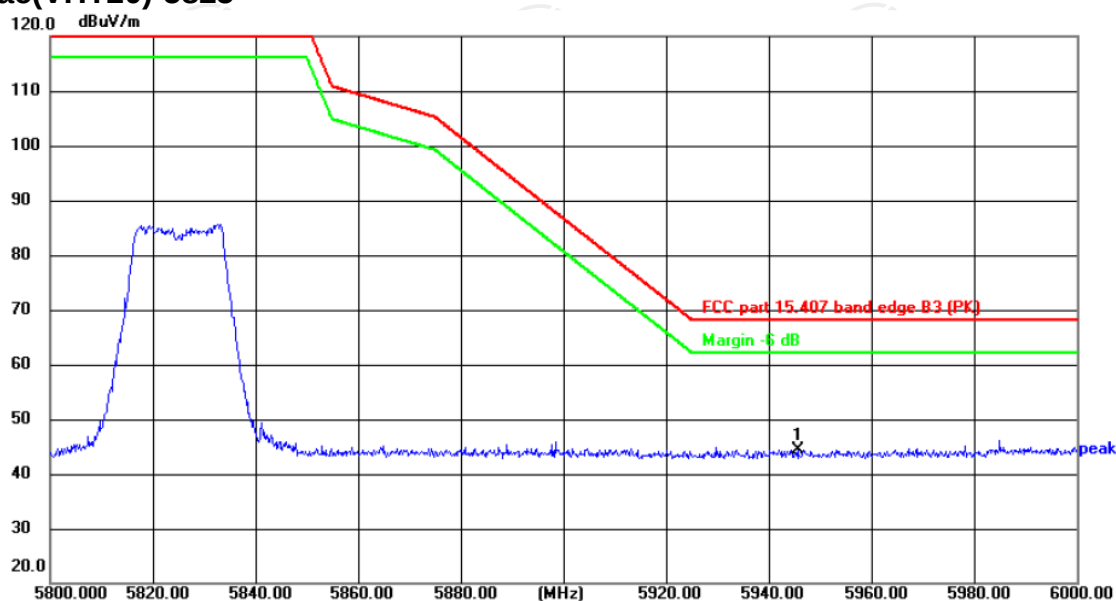

Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge B3 (PK) Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5945.600	50.94	-6.51	44.43	68.20	-23.77	peak	P	

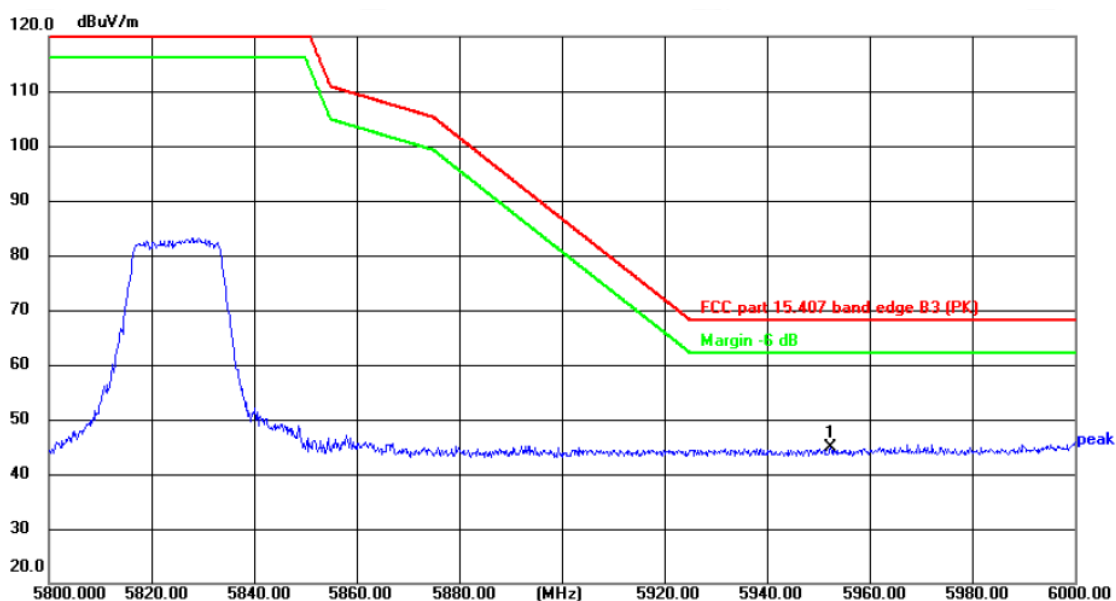


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 22.9(°C) Humidity: 63 %


Limit: FCC part 15.407 band edge B3 (PK) Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5952.400	51.30	-6.49	44.81	68.20	-23.39	peak	P	

802.11ac(VHT40)-5795

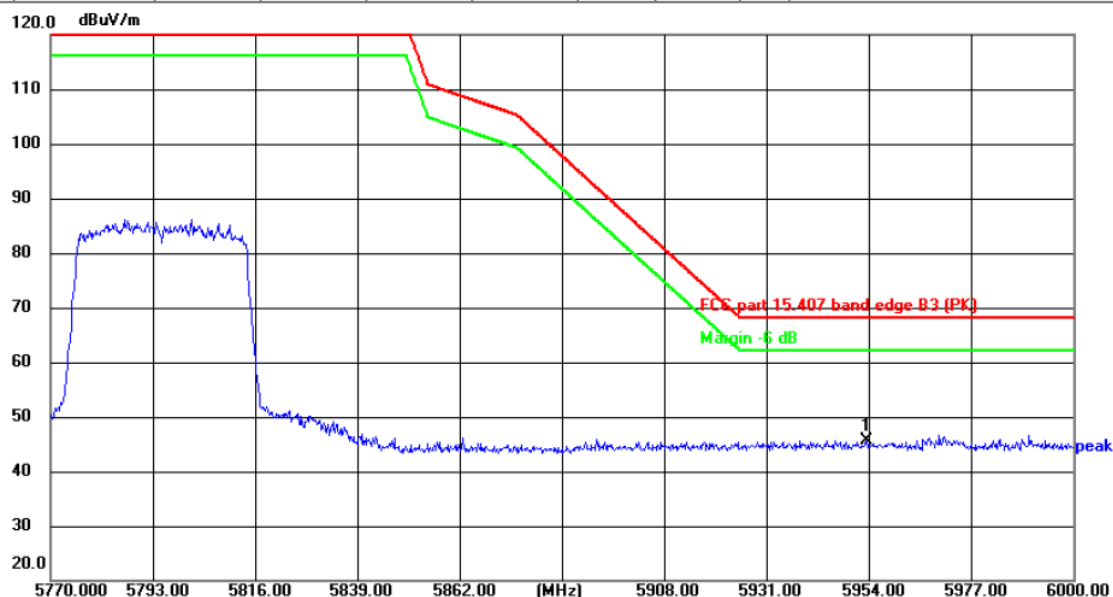

802.11ac(VHT80)-5775

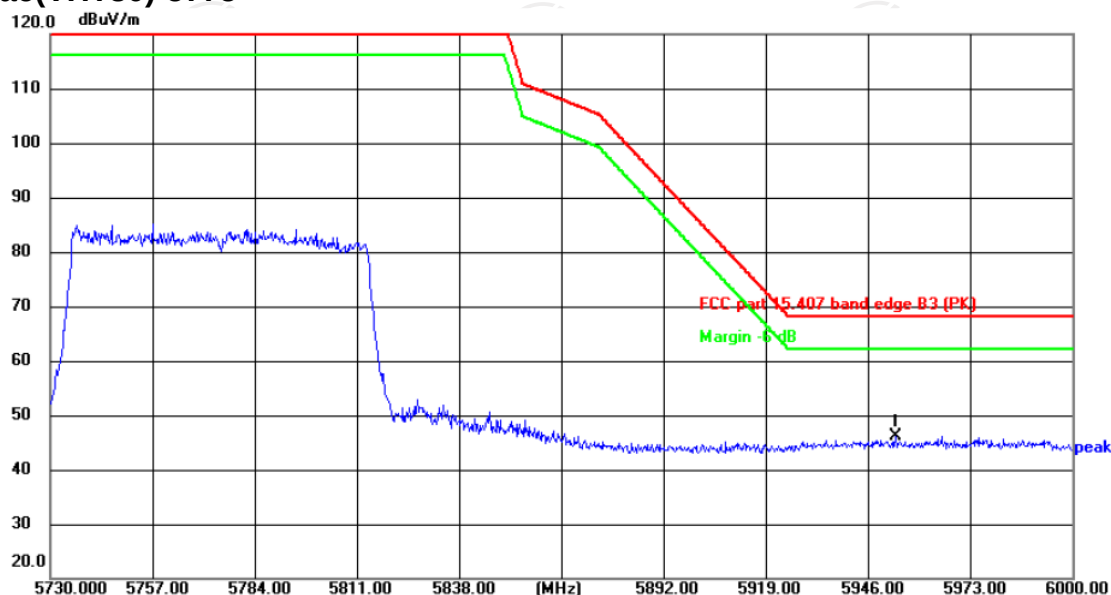

Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 22.9(°C) Humidity: 63 %

Limit: FCC part 15.407 band edge B3 (PK) Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5953.290	52.70	-6.48	46.22	68.20	-21.98	peak	P	



Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 22.9(°C) Humidity: 63 %


Limit: FCC part 15.407 band edge B3 (PK) Power: DC 3.87 V


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5951.940	52.65	-6.49	46.16	68.20	-22.04	peak	P	

Note: All modulation (802.11a, 802.11n, 802.11ac) have been tested, only the worst case in 802.11ac be reported.


6.8. Unwanted Emissions

6.8.1. Test Specification

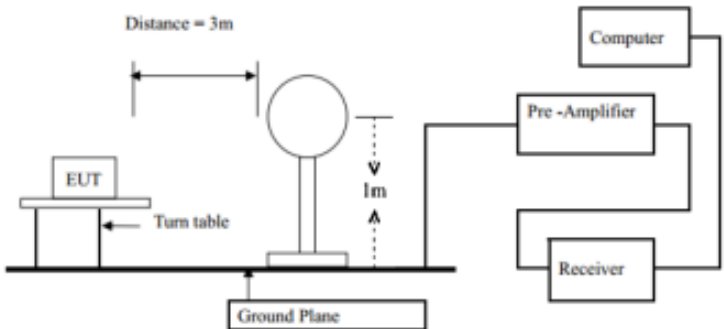
Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
Test Method:	KDB 789033 D02 v02r01				
Frequency Range:	9kHz to 40GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:	Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table, In restricted bands:				
	Frequency		Detector		Limit@3m
	Above 1G		Peak		74dBµV/m
			AVG		54dBµV/m
	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	0.009-0.490		2400/F(KHz)		300
	0.490-1.705		24000/F(KHz)		3
	1.705-30		30		30
	30-88		100		3
	88-216		150		3
	216-960		200		3
	Above 960		500		3
In un-restricted bands: 68.2dBµV/m					
Test setup:	For radiated emissions below 30MHz				
					
30MHz to 1GHz					

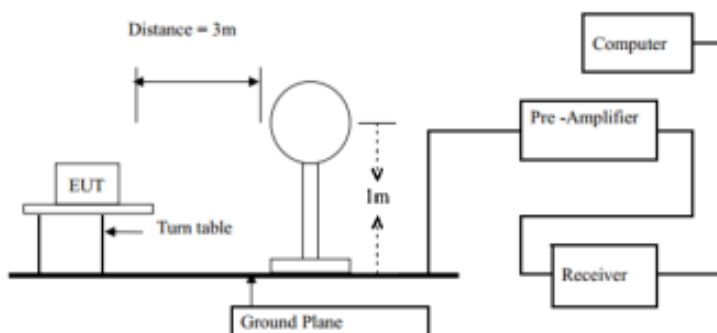

30MHz to 1GHz

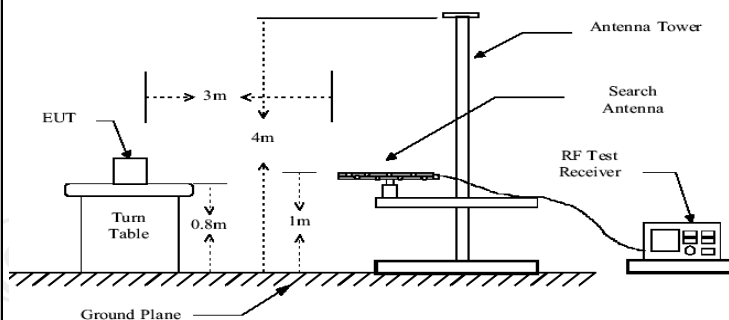

Above 1GHz

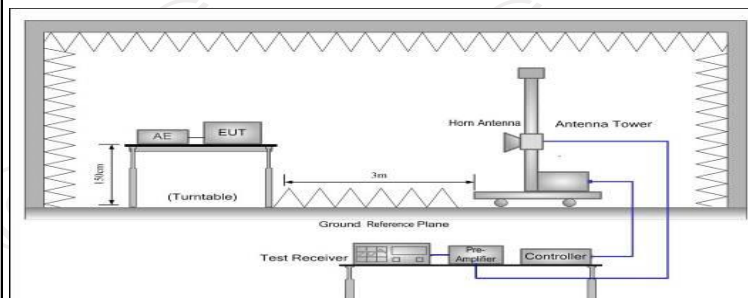

Test Procedure:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test results:

PASS


6.8.2. Test Instruments

Radiated Emission Test Site (966)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCI7	100529	Jan. 21, 2025	Jan. 20, 2026
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 26, 2025	Jun. 25, 2026
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Jan. 21, 2025	Jan. 20, 2026
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Apr. 11, 2025	Apr. 10, 2026
Pre-amplifier	HP	8447D	2727A05017	Jun. 26, 2025	Jun. 25, 2026
Loop antenna	Schwarzbeck	FMZB1519B	00191	Jun. 30, 2025	Jun. 29, 2026
Broadband Antenna	Schwarzbeck	VULB9163	340	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Jan. 24, 2025	Jan. 23, 2026
Coaxial cable	SKET	RE-03-D	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-03-M	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-03-L	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-D	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-M	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-L	/	Jun. 27, 2025	Jun. 26, 2026
Antenna Mast	Keleto	RE-AM	/	/	/
EMI Test Software	EZ EMC	FA-03A2 RE+	1.1.4.2	/	/

6.8.3. Test Data

Please refer to following diagram for individual
Below 1GHz

Horizontal:

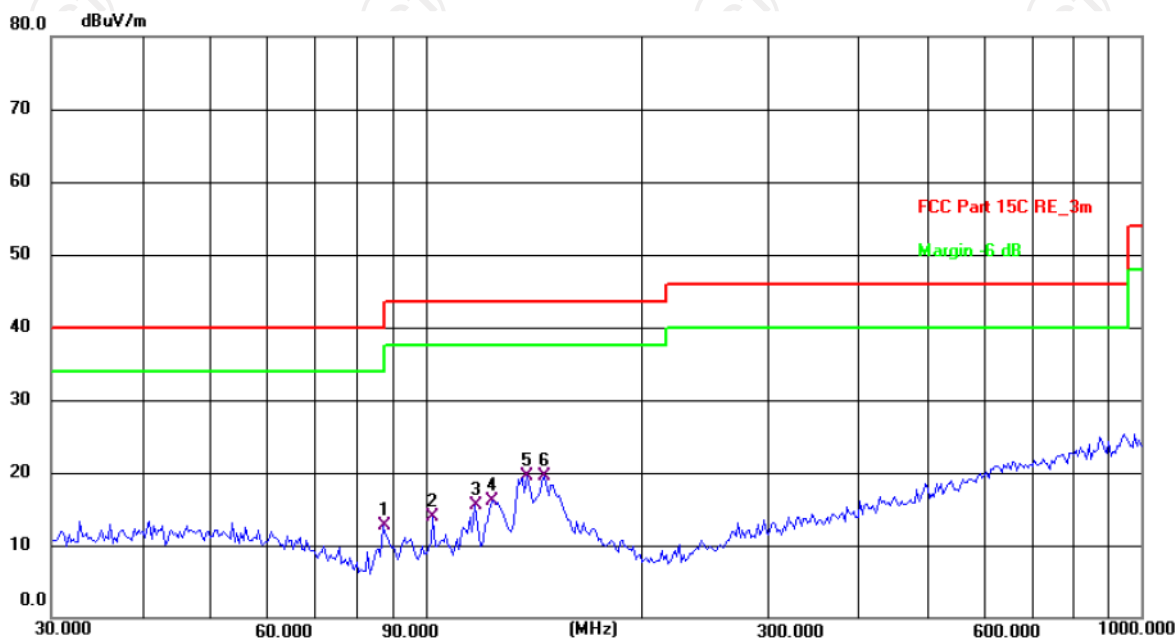

Site: 3m Anechoic Chamber1

Polarization: **Horizontal**


Temperature: 23.8(C) Humidity: 50 %

Limit: FCC Part 15C RE_3m

Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	87.1116	29.35	-16.69	12.66	40.00	-27.34	QP	P	
2	102.3596	28.92	-15.10	13.82	43.50	-29.68	QP	P	
3	116.9494	29.31	-13.72	15.59	43.50	-27.91	QP	P	
4	123.6984	29.25	-13.11	16.14	43.50	-27.36	QP	P	
5 *	138.3873	31.72	-12.16	19.56	43.50	-23.94	QP	P	
6	146.3734	31.26	-11.71	19.55	43.50	-23.95	QP	P	

Vertical:

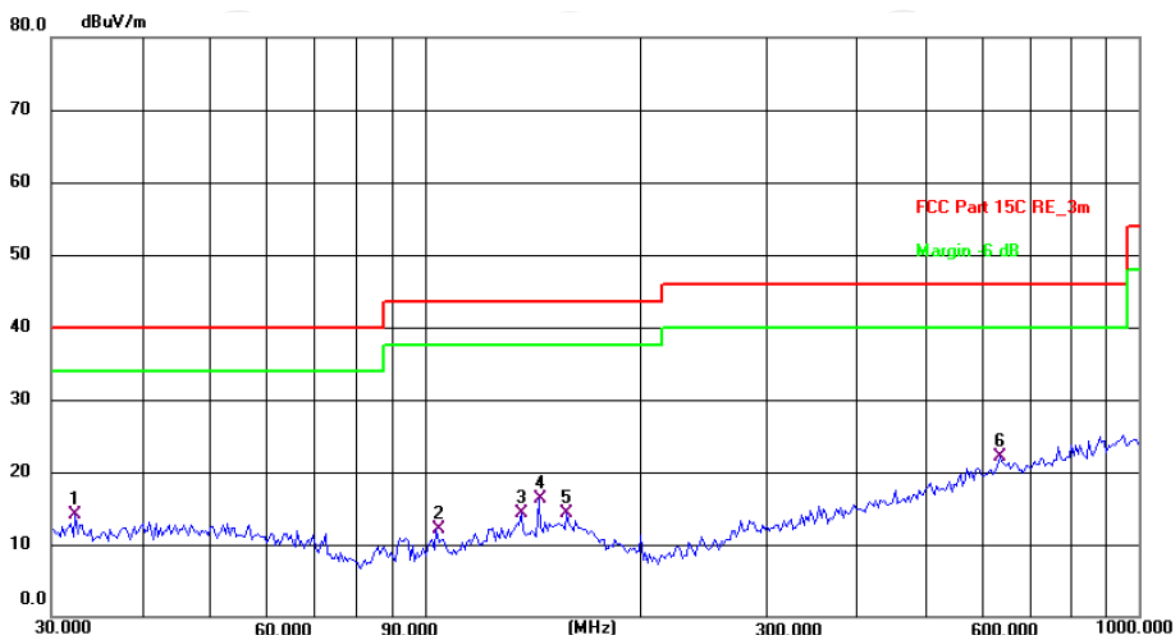

Site: 3m Anechoic Chamber1

Polarization: **Vertical**

Temperature: 23.8(C) Humidity: 50 %

Limit: FCC Part 15C RE_3m

Power: DC 3.87 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	32.4059	26.84	-12.74	14.10	40.00	-25.90	QP	P	
2	103.8055	27.25	-15.09	12.16	43.50	-31.34	QP	P	
3	136.4598	26.57	-12.35	14.22	43.50	-29.28	QP	P	
4	144.3348	28.13	-11.92	16.21	43.50	-27.29	QP	P	
5	158.1123	25.51	-11.19	14.32	43.50	-29.18	QP	P	
6 *	638.3686	26.27	-4.22	22.05	46.00	-23.95	QP	P	

Note: 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) and all modulation (802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ac(VHT80)) and the worst case Mode (Middle Channel and 802.11ac(VHT40)) was submitted only.

3. Measurement (dBμV) = Reading level + Correction Factor, correction Factor= Antenna Factor + Cable loss – Pre-amplifier.

Modulation Type: Band 1									
11a CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10360	H	38.11	---	1.78	39.89	---	68.2	---	-28.31
15540	H	39.43	---	5.21	44.64	---	74	54	-9.36
---	H	---	---	---	---	---	---	---	---
10360	V	38.69	---	1.78	40.47	---	68.2	---	-27.73
15540	V	40.25	---	5.21	45.46	---	74	54	-8.54
---	V	---	---	---	---	---	---	---	---
11a CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10400	H	39.58	---	1.83	41.41	---	68.2	---	-26.79
15600	H	40.08	---	5.23	45.31	---	74	54	-8.69
---	H	---	---	---	---	---	---	---	---
10400	V	40.37	---	1.83	42.20	---	68.2	---	-26.00
15600	V	41.21	---	5.23	46.44	---	74	54	-7.56
---	V	---	---	---	---	---	---	---	---
11a CH48: 5240MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10480	H	38.43	---	1.85	40.28	---	68.2	---	-27.92
15720	H	39.82	---	5.25	45.07	---	74	54	-8.93
---	H	---	---	---	---	---	---	---	---
10480	V	38.26	---	1.85	40.11	---	68.2	---	-28.09
15720	V	40.98	---	5.25	46.23	---	74	54	-7.77
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10360	H	41.90	---	1.78	43.68	---	68.2	---	-24.52
15540	H	40.11	---	5.21	45.32	---	74	54	-8.68
---	H	---	---	---	---	---	---	---	---
10360	V	42.32	---	1.78	44.10	---	68.2	---	-24.10
15540	V	41.55	---	5.21	46.76	---	74	54	-7.24
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10400	H	40.25	---	1.83	42.08	---	68.2	---	-26.12
15600	H	41.41	---	5.23	46.64	---	74	54	-7.36
---	H	---	---	---	---	---	---	---	---
10400	V	40.52	---	1.83	42.35	---	68.2	---	-25.85
15600	V	39.04	---	5.23	44.27	---	74	54	-9.73
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH48: 5240MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10480	H	41.77	---	1.85	43.62	---	68.2	---	-24.58
15720	H	41.16	---	5.25	46.41	---	74	54	-7.59
---	H	---	---	---	---	---	---	---	---
10480	V	40.43	---	1.85	42.28	---	68.2	---	-25.92
15720	V	39.38	---	5.25	44.63	---	74	54	-9.37
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH38: 5190MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10380	H	39.66	---	1.80	41.46	---	68.2	---	-26.74
15570	H	41.21	---	5.22	46.43	---	74	54	-7.57
---	H	---	---	---	---	---	---	---	---
10380	V	40.59	---	1.80	42.39	---	68.2	---	-25.81
15570	V	39.19	---	5.22	44.41	---	74	54	-9.59
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH46: 5230MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10460	H	41.65	---	1.85	43.50	---	68.2	---	-24.70
15690	H	39.12	---	5.08	44.20	---	74	54	-9.80
---	H	---	---	---	---	---	---	---	---
10460	V	41.48	---	1.85	43.33	---	68.2	---	-24.87
15690	V	40.67	---	5.08	45.75	---	74	54	-8.25
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10360	H	40.42	---	1.78	42.20	---	68.2	---	-26.00
15540	H	39.12	---	5.21	44.33	---	74	54	-9.67
---	H	---	---	---	---	---	---	---	---
10360	V	38.63	---	1.78	40.41	---	68.2	---	-27.79
15540	V	39.76	---	5.21	44.97	---	74	54	-9.03
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10400	H	39.19	---	1.83	41.02	---	68.2	---	-27.18
15600	H	40.24	---	5.23	45.47	---	74	54	-8.53
---	H	---	---	---	---	---	---	---	---
10400	V	39.01	---	1.83	40.84	---	68.2	---	-27.36
15600	V	39.45	---	5.23	44.68	---	74	54	-9.32
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH48: 5240MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10480	H	37.47	---	1.85	39.32	---	68.2	---	-28.88
15720	H	38.92	---	5.25	44.17	---	74	54	-9.83
---	H	---	---	---	---	---	---	---	---
10480	V	38.20	---	1.85	40.05	---	68.2	---	-28.15
15720	V	39.63	---	5.25	44.88	---	74	54	-9.12
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH38: 5190MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10380	H	40.66	---	1.80	42.46	---	68.2	---	-25.74
15570	H	39.09	---	5.22	44.31	---	74	54	-9.69
---	H	---	---	---	---	---	---	---	---
10380	V	38.91	---	1.80	40.71	---	68.2	---	-27.49
15570	V	39.24	---	5.22	44.46	---	74	54	-9.54
---	V	---	---	---	---	---	---	---	---

11ac(VHT40) CH46: 5230MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10460	H	38.62	---	1.85	40.47	---	68.2	---	-27.73
15690	H	39.15	---	5.08	44.23	---	74	54	-9.77
---	H	---	---	---	---	---	---	---	---
10460	V	39.76	---	1.85	41.61	---	68.2	---	-26.59
15690	V	40.39	---	5.08	45.47	---	74	54	-8.53
---	V	---	---	---	---	---	---	---	---
11ac(VHT80) CH42: 5210MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10420	H	41.53	---	1.84	43.37	---	68.2	---	-24.83
15630	H	39.64	---	5.17	44.81	---	74	54	-9.19
---	H	---	---	---	---	---	---	---	---
10420	V	41.25	---	1.84	43.09	---	68.2	---	-25.11
15630	V	39.42	---	5.17	44.59	---	74	54	-9.41
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

Modulation Type: Band 2A									
11a CH52: 5260MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10520	H	38.42	---	1.87	40.29	---	68.2	---	-27.91
15780	H	39.03	---	5.01	44.04	---	74	54	-9.96
---	H	---	---	---	---	---	---	---	---
10520	V	41.26	---	1.87	43.13	---	68.2	---	-25.07
15780	V	40.87	---	5.01	45.88	---	74	54	-8.12
---	V	---	---	---	---	---	---	---	---
11a CH60: 5300MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10600	H	44.88	---	1.89	46.77	---	74	54	-7.23
15900	H	40.59	---	4.93	45.52	---	74	54	-8.48
---	H	---	---	---	---	---	---	---	---
10600	V	45.31	---	1.89	47.20	---	74	54	-6.80
15900	V	41.94	---	4.93	46.87	---	74	54	-7.13
---	V	---	---	---	---	---	---	---	---
11a CH64: 5320MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10640	H	44.55	---	1.94	46.49	---	74	54	-7.51
15960	H	39.78	---	4.83	44.61	---	74	54	-9.39
---	H	---	---	---	---	---	---	---	---
10640	V	45.03	---	1.94	46.97	---	74	54	-7.03
15960	V	41.26	---	4.83	46.09	---	74	54	-7.91
---	V	---	---	---	---	---	---	---	---
11n(HT20) C52: 5260MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10520	H	41.84	---	1.87	43.71	---	68.2	---	-24.49
15780	H	40.60	---	5.01	45.61	---	74	54	-8.39
---	H	---	---	---	---	---	---	---	---
10520	V	38.98	---	1.87	40.85	---	68.2	---	-27.35
15780	V	39.15	---	5.01	44.16	---	74	54	-9.84
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH60: 5300MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10600	H	44.94	---	1.89	46.83	---	74	54	-7.17
15900	H	39.25	---	4.93	44.18	---	74	54	-9.82
---	H	---	---	---	---	---	---	---	---
10600	V	45.59	---	1.89	47.48	---	74	54	-6.52
15900	V	41.33	---	4.93	46.26	---	74	54	-7.74
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH64: 5320MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10640	H	46.14	---	1.94	48.08	---	74	54	-5.92
15960	H	42.81	---	4.83	47.64	---	74	54	-6.36
---	H	---	---	---	---	---	---	---	---
10640	V	44.57	---	1.94	46.51	---	74	54	-7.49
15960	V	40.25	---	4.83	45.08	---	74	54	-8.92
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH54: 5270MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10540	H	41.10	---	1.87	42.97	---	68.2	---	-25.23
15810	H	39.32	---	4.99	44.31	---	74	54	-9.69
---	H	---	---	---	---	---	---	---	---
10540	V	37.78	---	1.87	39.65	---	68.2	---	-28.55
15810	V	40.26	---	4.99	45.25	---	74	54	-8.75
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH62: 5310MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10620	H	45.39	---	1.92	47.31	---	74	54	-6.69
15930	H	40.81	---	4.88	45.69	---	74	54	-8.31
---	H	---	---	---	---	---	---	---	---
10620	V	44.03	---	1.92	45.95	---	74	54	-8.05
15930	V	39.93	---	4.88	44.81	---	74	54	-9.19
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) C52: 5260MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10520	H	40.64	---	1.87	42.51	---	68.2	---	-25.69
15780	H	39.11	---	5.01	44.12	---	74	54	-9.88
---	H	---	---	---	---	---	---	---	---
10520	V	40.95	---	1.87	42.82	---	68.2	---	-25.38
15780	V	40.08	---	5.01	45.09	---	74	54	-8.91
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH60: 5300MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10600	H	45.46	---	1.89	47.35	---	74	54	-6.65
15900	H	40.69	---	4.93	45.62	---	74	54	-8.38
---	H	---	---	---	---	---	---	---	---
10600	V	44.30	---	1.89	46.19	---	74	54	-7.81
15900	V	40.84	---	4.93	45.77	---	74	54	-8.23
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH64: 5320MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10640	H	43.51	---	1.94	45.45	---	74	54	-8.55
15960	H	39.22	---	4.83	44.05	---	74	54	-9.95
---	H	---	---	---	---	---	---	---	---
10640	V	44.78	---	1.94	46.72	---	74	54	-7.28
15960	V	39.39	---	4.83	44.22	---	74	54	-9.78
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH54: 5270MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10540	H	40.72	---	1.87	42.59	---	68.2	---	-25.61
15810	H	39.33	---	4.99	44.32	---	74	54	-9.68
---	H	---	---	---	---	---	---	---	---
10540	V	39.97	---	1.87	41.84	---	68.2	---	-26.36
15810	V	39.22	---	4.99	44.21	---	74	54	-9.79
---	V	---	---	---	---	---	---	---	---

11ac(VHT40) CH62: 5310MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10620	H	44.54	---	1.92	46.46	---	74	54	-7.54
15930	H	39.32	---	4.88	44.20	---	74	54	-9.80
---	H	---	---	---	---	---	---	---	---
10620	V	43.86	---	1.92	45.78	---	74	54	-8.22
15930	V	40.03	---	4.88	44.91	---	74	54	-9.09
---	V	---	---	---	---	---	---	---	---
11ac(VHT80) CH58: 5290MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10580	H	45.78	---	1.88	47.66	---	74	54	-6.34
15870	H	42.44	---	4.96	47.40	---	74	54	-6.60
---	H	---	---	---	---	---	---	---	---
10580	V	44.07	---	1.88	45.95	---	74	54	-8.05
15870	V	40.81	---	4.96	45.77	---	74	54	-8.23
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

Modulation Type: Band 2C									
11a CH100: 5500MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11000	H	44.88	---	2.21	47.09	---	74	54	-6.91
16500	H	39.04	---	5.32	44.36	---	68.2	---	-23.84
---	H	---	---	---	---	---	---	---	---
11000	V	45.51	---	2.21	47.72	---	74	54	-6.28
16500	V	40.32	---	5.32	45.64	---	68.2	---	-22.56
---	V	---	---	---	---	---	---	---	---
11a CH120: 5600MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11200	H	45.26	---	2.34	47.60	---	74	54	-6.40
16800	H	40.73	---	5.62	46.35	---	68.2	---	-21.85
---	H	---	---	---	---	---	---	---	---
11200	V	44.38	---	2.34	46.72	---	74	54	-7.28
16800	V	39.45	---	5.62	45.07	---	68.2	---	-23.13
---	V	---	---	---	---	---	---	---	---
11a CH140: 5700MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11400	H	42.19	---	2.47	44.66	---	74	54	-9.34
17100	H	40.76	---	6.00	46.76	---	68.2	---	-21.44
---	H	---	---	---	---	---	---	---	---
11400	V	43.07	---	2.47	45.54	---	74	54	-8.46
17100	V	40.94	---	6.00	46.94	---	68.2	---	-21.26
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH100: 5500MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11000	H	45.45	---	2.21	47.66	---	74	54	-6.34
16500	H	39.52	---	5.32	44.84	---	68.2	---	-23.36
---	H	---	---	---	---	---	---	---	---
11000	V	46.02	---	2.21	48.23	---	74	54	-5.77
16500	V	41.38	---	5.32	46.70	---	68.2	---	-21.50
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH120: 5600MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11200	H	45.74	---	2.34	48.08	---	74	54	-5.92
16800	H	40.28	---	5.62	45.90	---	68.2	---	-22.30
---	H	---	---	---	---	---	---	---	---
11200	V	44.42	---	2.34	46.76	---	74	54	-7.24
16800	V	39.55	---	5.62	45.17	---	68.2	---	-23.03
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH140: 5700MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11400	H	44.66	---	2.47	47.13	---	74	54	-6.87
17100	H	40.38	---	6.00	46.38	---	68.2	---	-21.82
---	H	---	---	---	---	---	---	---	---
11400	V	44.83	---	2.47	47.30	---	74	54	-6.70
17100	V	39.04	---	6.00	45.04	---	68.2	---	-23.16
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH102: 5510MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11020	H	45.26	---	2.21	47.47	---	74	54	-6.53
16530	H	39.59	---	5.34	44.93	---	68.2	---	-23.27
---	H	---	---	---	---	---	---	---	---
11020	V	45.02	---	2.21	47.23	---	74	54	-6.77
16530	V	37.30	---	5.34	42.64	---	68.2	---	-25.56
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH118: 5590MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11180	H	44.24	---	2.32	46.56	---	74	54	-7.44
16770	H	39.51	---	5.60	45.11	---	68.2	---	-23.09
---	H	---	---	---	---	---	---	---	---
11180	V	44.97	---	2.32	47.29	---	74	54	-6.71
16770	V	41.05	---	5.60	46.65	---	68.2	---	-21.55
---	V	---	---	---	---	---	---	---	---

11n(HT40) CH134: 5670MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11340	H	44.44	---	2.40	46.84	---	74	54	-7.16
17010	H	41.38	---	5.96	47.34	---	68.2	---	-20.86
---	H	---	---	---	---	---	---	---	---
11340	V	45.63	---	2.40	48.03	---	74	54	-5.97
17010	V	38.19	---	5.96	44.15	---	68.2	---	-24.05
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH100: 5500MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11000	H	45.50	---	2.21	47.71	---	74	54	-6.29
16500	H	39.75	---	5.32	45.07	---	68.2	---	-23.13
---	H	---	---	---	---	---	---	---	---
11000	V	44.64	---	2.21	46.85	---	74	54	-7.15
16500	V	39.97	---	5.32	45.29	---	68.2	---	-22.91
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH120: 5600MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11200	H	44.86	---	2.34	47.20	---	74	54	-6.80
16800	H	39.53	---	5.62	45.15	---	68.2	---	-23.05
---	H	---	---	---	---	---	---	---	---
11200	V	43.39	---	2.34	45.73	---	74	54	-8.27
16800	V	39.25	---	5.62	44.87	---	68.2	---	-23.33
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH140: 5700MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11400	H	43.08	---	2.47	45.55	---	74	54	-8.45
17100	H	38.11	---	6.00	44.11	---	68.2	---	-24.09
---	H	---	---	---	---	---	---	---	---
11400	V	43.87	---	2.47	46.34	---	74	54	-7.66
17100	V	39.62	---	6.00	45.62	---	68.2	---	-22.58
---	V	---	---	---	---	---	---	---	---

11ac(VHT40) CH102: 5510MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11020	H	44.64	---	2.21	46.85	---	74	54	-7.15
16530	H	39.33	---	5.34	44.67	---	68.2	---	-23.53
---	H	---	---	---	---	---	---	---	---
11020	V	43.86	---	2.21	46.07	---	74	54	-7.93
16530	V	38.24	---	5.34	43.58	---	68.2	---	-24.62
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH118: 5590MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11180	H	45.18	---	2.32	47.50	---	74	54	-6.50
16770	H	36.25	---	5.60	41.85	---	68.2	---	-26.35
---	H	---	---	---	---	---	---	---	---
11180	V	44.36	---	2.32	46.68	---	74	54	-7.32
16770	V	37.24	---	5.60	42.84	---	68.2	---	-25.36
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH134: 5670MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11340	H	45.41	---	2.40	47.81	---	74	54	-6.19
17010	H	36.35	---	5.96	42.31	---	68.2	---	-25.89
---	H	---	---	---	---	---	---	---	---
11340	V	44.28	---	2.40	46.68	---	74	54	-7.32
17010	V	39.57	---	5.96	45.53	---	68.2	---	-22.67
---	V	---	---	---	---	---	---	---	---
11ac(VHT80) CH106: 5530MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11060	H	43.79	---	2.22	46.01	---	74	54	-7.99
16590	H	40.10	---	5.37	45.47	---	68.2	---	-22.73
---	H	---	---	---	---	---	---	---	---
11060	V	42.56	---	2.22	44.78	---	74	54	-9.22
16590	V	41.13	---	5.37	46.50	---	68.2	---	-21.70
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown “---”in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

Modulation Type: Band 3									
11a CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11490	H	44.04	---	2.48	46.52	---	74	54	-7.48
17235	H	37.65	---	6.50	44.15	---	68.2	---	-24.05
---	H	---	---	---	---	---	---	---	---
11490	V	45.76	---	2.48	48.24	---	74	54	-5.76
17235	V	38.53	---	6.50	45.03	---	68.2	---	-23.17
---	V	---	---	---	---	---	---	---	---
11a CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11570	H	43.48	---	2.42	45.90	---	74	54	-8.10
17355	H	38.19	---	7.03	45.22	---	68.2	---	-22.98
---	H	---	---	---	---	---	---	---	---
11570	V	43.80	---	2.42	46.22	---	74	54	-7.78
17355	V	39.37	---	7.03	46.40	---	68.2	---	-21.80
---	V	---	---	---	---	---	---	---	---
11a CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11650	H	43.75	---	2.41	46.16	---	74	54	-7.84
17475	H	36.36	---	7.41	43.77	---	68.2	---	-24.43
---	H	---	---	---	---	---	---	---	---
11650	V	43.63	---	2.41	46.04	---	74	54	-7.96
17475	V	38.22	---	7.41	45.63	---	68.2	---	-22.57
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11490	H	44.84	---	2.48	47.32	---	74	54	-6.68
17235	H	38.21	---	6.50	44.71	---	68.2	---	-23.49
---	H	---	---	---	---	---	---	---	---
11490	V	44.65	---	2.48	47.13	---	74	54	-6.87
17235	V	37.58	---	6.50	44.08	---	68.2	---	-24.12
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11570	H	44.32	---	2.42	46.74	---	74	54	-7.26
17355	H	39.48	---	7.03	46.51	---	68.2	---	-21.69
---	H	---	---	---	---	---	---	---	---
11570	V	44.56	---	2.42	46.98	---	74	54	-7.02
17355	V	39.89	---	7.03	46.92	---	68.2	---	-21.28
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11650	H	45.54	---	2.41	47.95	---	74	54	-6.05
17475	H	37.61	---	7.41	45.02	---	68.2	---	-23.18
---	H	---	---	---	---	---	---	---	---
11650	V	45.38	---	2.41	47.79	---	74	54	-6.21
17475	V	39.05	---	7.41	46.46	---	68.2	---	-21.74
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH151: 5755MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11510	H	44.32	---	2.47	46.79	---	74	54	-7.21
17265	H	37.16	---	6.62	43.78	---	68.2	---	-24.42
---	H	---	---	---	---	---	---	---	---
11510	V	44.09	---	2.47	46.56	---	74	54	-7.44
17265	V	38.56	---	6.62	45.18	---	68.2	---	-23.02
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH159: 5795MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11590	H	44.67	---	2.40	47.07	---	74	54	-6.93
17385	H	38.03	---	7.15	45.18	---	68.2	---	-23.02
---	H	---	---	---	---	---	---	---	---
11590	V	44.50	---	2.40	46.90	---	74	54	-7.10
17385	V	37.42	---	7.15	44.57	---	68.2	---	-23.63
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11490	H	44.94	---	2.48	47.42	---	74	54	-6.58
17235	H	37.05	---	6.50	43.55	---	68.2	---	-24.65
---	H	---	---	---	---	---	---	---	---
11490	V	44.16	---	2.48	46.64	---	74	54	-7.36
17235	V	38.73	---	6.50	45.23	---	68.2	---	-22.97
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11570	H	43.19	---	2.42	45.61	---	74	54	-8.39
17355	H	36.48	---	7.03	43.51	---	68.2	---	-24.69
---	H	---	---	---	---	---	---	---	---
11570	V	43.75	---	2.42	46.17	---	74	54	-7.83
17355	V	38.07	---	7.03	45.10	---	68.2	---	-23.10
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11650	H	44.40	---	2.41	46.81	---	74	54	-7.19
17475	H	38.35	---	7.41	45.76	---	68.2	---	-22.44
---	H	---	---	---	---	---	---	---	---
11650	V	44.06	---	2.41	46.47	---	74	54	-7.53
17475	V	40.23	---	7.41	47.64	---	68.2	---	-20.56
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH151: 5755MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11510	H	44.28	---	2.47	46.75	---	74	54	-7.25
17265	H	37.74	---	6.62	44.36	---	68.2	---	-23.84
---	H	---	---	---	---	---	---	---	---
11510	V	43.61	---	2.47	46.08	---	74	54	-7.92
17265	V	36.42	---	6.62	43.04	---	68.2	---	-25.16
---	V	---	---	---	---	---	---	---	---


11ac(VHT40) CH159: 5795MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11590	H	43.24	---	2.40	45.64	---	74	54	-8.36
17385	H	37.75	---	7.15	44.90	---	68.2	---	-23.30
---	H	---	---	---	---	---	---	---	---
11590	V	42.68	---	2.40	45.08	---	74	54	-8.92
17385	V	38.36	---	7.15	45.51	---	68.2	---	-22.69
---	V	---	---	---	---	---	---	---	---
11ac(VHT80) CH155: 5775MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11550	H	44.73	---	2.44	47.17	---	74	54	-6.83
17325	H	38.29	---	6.89	45.18	---	68.2	---	-23.02
---	H	---	---	---	---	---	---	---	---
11550	V	44.87	---	2.44	47.31	---	74	54	-6.69
17325	V	38.11	---	6.89	45.00	---	68.2	---	-23.20
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

6.9. Frequency Stability Measurement

6.9.1. Test Specification

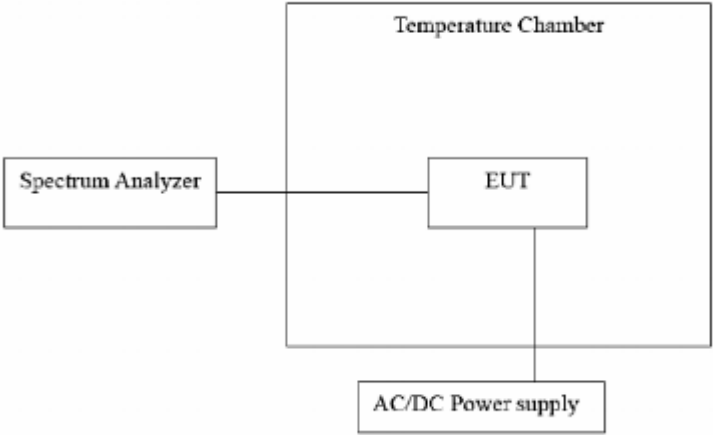Test Requirement:	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
Test Method:	ANSI C63.10: 2020
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 45 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	 <pre> graph LR SA[Spectrum Analyzer] --- EUT[EUT] subgraph TC [Temperature Chamber] EUT end EUT --- P[AC/DC Power supply] </pre>
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	Pre-scan was performed at all models (11a,11n,11ac), the worst case (11ac) was found and test data was shown in this report.

6.9.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 26, 2025	Jun. 25, 2026
DC power supply	Kingrang	KR3005K	/	Jun. 26, 2025	Jun. 25, 2026
Programable temprature and humidity chamber	JQ	JQ-2000	510101234	Jun. 26, 2025	Jun. 25, 2026

Test plots as follows:

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5180
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5179.98	-20000	PASS
35		5179.98	-20000	PASS
25		5180	0	PASS
15		5179.98	-20000	PASS
5		5179.96	-40000	PASS
0		5179.98	-20000	PASS
20	3.29V	5179.98	-20000	PASS
	3.87V	5179.98	-20000	PASS
	4.45V	5180	0	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5200
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5199.96	-40000	PASS
35		5199.98	-20000	PASS
25		5199.96	-40000	PASS
15		5199.98	-20000	PASS
5		5199.98	-20000	PASS
0		5200	0	PASS
20	3.29V	5199.96	-40000	PASS
	3.87V	5200.04	40000	PASS
	4.45V	5200	0	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5240
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5240	0	PASS
35		5240	0	PASS
25		5239.98	-20000	PASS
15		5239.98	-20000	PASS
5		5239.98	-20000	PASS
0		5240	0	PASS
20	3.29V	5239.98	-20000	PASS
	3.87V	5239.98	-20000	PASS
	4.45V	5240.02	20000	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5260
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5259.98	-20000	PASS
35		5260	0	PASS
25		5259.98	-20000	PASS
15		5259.98	-20000	PASS
5		5259.98	-20000	PASS
0		5259.98	-20000	PASS
20	3.29V	5260	0	0
	3.87V	5260	0	0
	4.45V	5260	0	0

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5300
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5300	0	PASS
35		5300	0	PASS
25		5300	0	PASS
15		5300	0	PASS
5		5300.02	20000	PASS
0		5300.02	20000	PASS
20	3.29V	5300	0	PASS
	3.87V	5299.98	-20000	PASS
	4.45V	5299.98	-20000	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5320
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5320.02	20000	PASS
35		5319.98	-20000	PASS
25		5320	0	PASS
15		5320	0	PASS
5		5319.98	-20000	PASS
0		5319.96	-40000	PASS
20	3.29V	5319.98	-20000	PASS
	3.87V	5320	0	PASS
	4.45V	5320.02	20000	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5500
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5500.02	20000	PASS
35		5499.98	-20000	PASS
25		5500	0	PASS
15		5499.98	-20000	PASS
5		5499.98	-20000	PASS
0		5500	0	PASS
20	3.29V	5499.98	-20000	PASS
	3.87V	5499.98	-20000	PASS
	4.45V	5500.02	20000	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5600
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5599.98	-20000	PASS
35		5600	0	PASS
25		5600	0	PASS
15		5600.02	20000	PASS
5		5599.98	-20000	PASS
0		5600	0	PASS
20	3.29V	5600	0	PASS
	3.87V	5600	0	PASS
	4.45V	5600	0	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5700
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5699.98	-20000	PASS
35		5700	0	PASS
25		5699.98	-20000	PASS
15		5700	0	PASS
5		5699.98	-20000	PASS
0		5700	0	PASS
20	3.29V	5699.98	-20000	PASS
	3.87V	5700	0	PASS
	4.45V	5700	0	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5745
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5744.98	-20000	PASS
35		5745	0	PASS
25		5744.98	-20000	PASS
15		5744.98	-20000	PASS
5		5745	0	PASS
0		5744.96	-40000	PASS
20	3.29V	5744.98	-20000	PASS
	3.87V	5745	0	PASS
	4.45V	5745	0	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5785
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5785.02	20000	PASS
35		5784.98	-20000	PASS
25		5784.98	-20000	PASS
15		5784.98	-20000	PASS
5		5784.98	-20000	PASS
0		5784.98	-20000	PASS
20	3.29V	5785.02	20000	PASS
	3.87V	5784.98	-20000	PASS
	4.45V	5785	0	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5825
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5825	0	PASS
35		5824.98	-20000	PASS
25		5825	0	PASS
15		5824.98	-20000	PASS
5		5824.98	-20000	PASS
0		5824.96	-40000	PASS
20	3.29V	5824.96	-40000	PASS
	3.87V	5824.98	-20000	PASS
	4.45V	5824.98	-20000	PASS

Test mode:		802.11ac(VHT40)	Frequency(MHz):	5190
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5189.96	-40000	PASS
35		5189.96	-40000	PASS
25		5189.96	-40000	PASS
15		5189.96	-40000	PASS
5		5189.96	-40000	PASS
0		5189.96	-40000	PASS
20	3.29V	5189.96	-40000	PASS
	3.87V	5189.96	-40000	PASS
	4.45V	5189.96	-40000	PASS

Test mode:		802.11ac(VHT40)	Frequency(MHz):	5230
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5229.96	-40000	PASS
35		5229.96	-40000	PASS
25		5230	0	PASS
15		5229.96	-40000	PASS
5		5230.04	40000	PASS
0		5230	0	PASS
20	3.29V	5230.04	40000	PASS
	3.87V	5229.96	-40000	PASS
	4.45V	5230	0	PASS

Test mode:		802.11ac(VHT40)	Frequency(MHz):	5270
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5269.96	-40000	PASS
35		5269.96	-40000	PASS
25		5270	0	PASS
15		5269.96	-40000	PASS
5		5269.96	-40000	PASS
0		5269.96	-40000	PASS
20	3.29V	5270	0	PASS
	3.87V	5269.96	-40000	PASS
	4.45V	5269.96	-40000	PASS

Test mode:		802.11ac(VHT40)	Frequency(MHz):	5310
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5310	0	PASS
35		5310	0	PASS
25		5310	0	PASS
15		5309.96	-40000	PASS
5		5310	0	PASS
0		5310	0	PASS
20	3.29V	5310	0	PASS
	3.87V	5310	0	PASS
	4.45V	5309.96	-40000	PASS

Test mode:		802.11ac(VHT40)	Frequency(MHz):	5510
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5510	0	PASS
35		5510	0	PASS
25		5510	0	PASS
15		5510.04	40000	PASS
5		5510	0	PASS
0		5510	0	PASS
20	3.29V	5510	0	PASS
	3.87V	5510.04	40000	PASS
	4.45V	5510	0	PASS

Test mode:		802.11ac(VHT40)	Frequency(MHz):	5590
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5590	0	PASS
35		5590	0	PASS
25		5590	0	PASS
15		5590	0	PASS
5		5590	0	PASS
0		5590	0	PASS
20	3.29V	5590	0	PASS
	3.87V	5590	0	PASS
	4.45V	5590	0	PASS

Test mode:		802.11ac(VHT40)	Frequency(MHz):	5670
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5670.04	40000	PASS
35		5670.04	40000	PASS
25		5670.04	40000	PASS
15		5670.04	40000	PASS
5		5670	0	PASS
0		5670	0	PASS
20	3.29V	5670	0	PASS
	3.87V	5670	0	PASS
	4.45V	5670	0	PASS

Test mode:		802.11ac(VHT40)	Frequency(MHz):	5755
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5755	0	PASS
35		5755	0	PASS
25		5754.96	-40000	PASS
15		5755	0	PASS
5		5755	0	PASS
0		5755	0	PASS
20	3.29V	5755	0	PASS
	3.87V	5755	0	PASS
	4.45V	5754.96	-40000	PASS

Test mode:		802.11ac(VHT40)	Frequency(MHz):	5795
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5795	0	PASS
35		5795	0	PASS
25		5795	0	PASS
15		5795	0	PASS
5		5795	0	PASS
0		5795	0	PASS
20	3.29V	5795	0	PASS
	3.87V	5794.96	-40000	PASS
	4.45V	5795	0	PASS

Test mode:		802.11ac(VHT80)	Frequency(MHz):	5210
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5209.92	-80000	PASS
35		5210	0	PASS
25		5210	0	PASS
15		5209.84	-160000	PASS
5		5210	0	PASS
0		5210	0	PASS
20	3.29V	5209.92	-80000	PASS
	3.87V	5209.84	-160000	PASS
	4.45V	5209.92	-80000	PASS

Test mode:		802.11ac(VHT80)	Frequency(MHz):	5290
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5290	0	PASS
35		5290	0	PASS
25		5290	0	PASS
15		5290	0	PASS
5		5209.92	-80000	PASS
0		5290	0	PASS
20	3.29V	5290	0	PASS
	3.87V	5290	0	PASS
	4.45V	5290	0	PASS

Test mode:		802.11ac(VHT80)	Frequency(MHz):	5530
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5530	0	PASS
35		5530	0	PASS
25		5530	0	PASS
15		5530	0	PASS
5		5530	0	PASS
0		5530	0	PASS
20	3.29V	5530	0	PASS
	3.87V	5530	0	PASS
	4.45V	5530	0	PASS

Test mode:		802.11ac(VHT80)	Frequency(MHz):	5610
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5610	0	PASS
35		5610	0	PASS
25		5610.08	80000	PASS
15		5610	0	PASS
5		5610	0	PASS
0		5610	0	PASS
20	3.29V	5610	0	PASS
	3.87V	5610	0	PASS
	4.45V	5610	0	PASS

Test mode:		802.11ac(VHT80)	Frequency(MHz):	5775
Temperature (°C)	Voltage(V _{DC})	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.87V	5775	0	PASS
35		5775	0	PASS
25		5775	0	PASS
15		5775	0	PASS
5		5775	0	PASS
0		5775	0	PASS
20	3.29V	5774.92	-80000	PASS
	3.87V	5775	0	PASS
	4.45V	5775	0	PASS

Appendix A: Test Result of Conducted Test

Duty Cycle

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5180	100	0
NVNT	a	5200	100	0
NVNT	a	5240	100	0
NVNT	n20	5180	100	0
NVNT	n20	5200	100	0
NVNT	n20	5240	100	0
NVNT	n40	5190	100	0
NVNT	n40	5230	100	0
NVNT	ac20	5180	100	0
NVNT	ac20	5200	100	0
NVNT	ac20	5240	100	0
NVNT	ac40	5190	100	0
NVNT	ac40	5230	100	0
NVNT	ac80	5210	100	0
NVNT	a	5260	100	0
NVNT	a	5300	100	0
NVNT	a	5320	100	0
NVNT	n20	5260	100	0
NVNT	n20	5300	100	0
NVNT	n20	5320	100	0
NVNT	n40	5270	100	0
NVNT	n40	5310	100	0
NVNT	ac20	5260	100	0
NVNT	ac20	5300	100	0
NVNT	ac20	5320	100	0
NVNT	ac40	5270	100	0
NVNT	ac40	5310	100	0
NVNT	ac80	5290	100	0
NVNT	a	5500	100	0
NVNT	a	5600	100	0
NVNT	a	5700	100	0
NVNT	n20	5500	100	0
NVNT	n20	5600	100	0
NVNT	n20	5700	100	0
NVNT	n40	5510	100	0
NVNT	n40	5590	100	0
NVNT	n40	5670	100	0
NVNT	ac20	5500	100	0
NVNT	ac20	5600	100	0
NVNT	ac20	5700	100	0
NVNT	ac40	5510	100	0
NVNT	ac40	5590	100	0
NVNT	ac40	5670	100	0

NVNT	ac80	5530	100	0
NVNT	ac80	5610	100	0
NVNT	a	5745	100	0
NVNT	a	5785	100	0
NVNT	a	5825	100	0
NVNT	n20	5745	100	0
NVNT	n20	5785	100	0
NVNT	n20	5825	100	0
NVNT	n40	5755	100	0
NVNT	n40	5795	100	0
NVNT	ac20	5745	100	0
NVNT	ac20	5785	100	0
NVNT	ac20	5825	100	0
NVNT	ac40	5755	100	0
NVNT	ac40	5795	100	0
NVNT	ac80	5775	100	0

