

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:	
CUSTOMER:	
客 戶 料 號:	
CUST P/N:	
淘 軟 料 號:	
BESOFTP/N:	
產 品 型 號:	Apple Watch coil - CLB
DESC:	
日 期:	2021/03/10
DATE:	
版 本:	A.0
Version:	

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
苏燕平	钱立谋	钱立谋	

深圳淘软电子有限公司

Shenzhen Taosou Electronics Co. , Ltd.

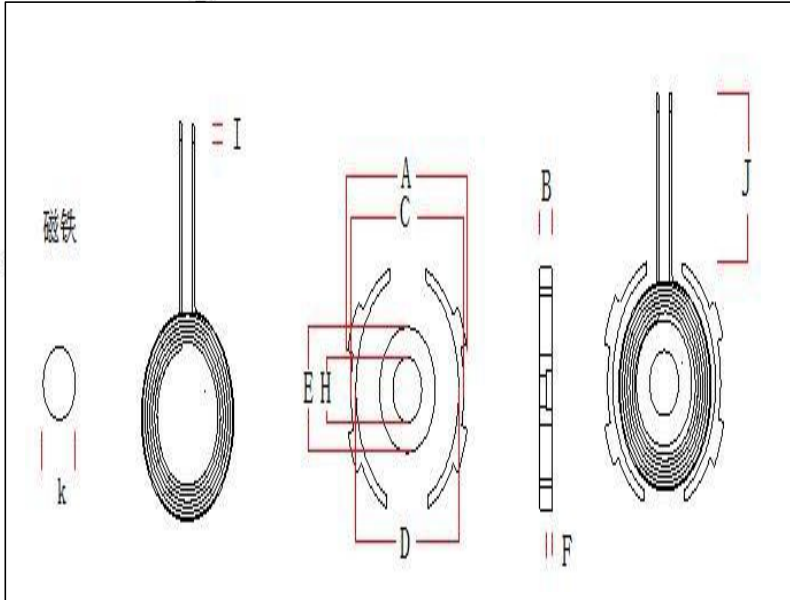

Factory Address: 9th Floor, Building 9, Da Yuan Road, First Industrial Zone, Li Songlang, Gong Ming Street, Guang Ming District, Shenzhen City

TEL: 13824883512/18038013240

Version Change History

[illegible]

SPECIFICATION

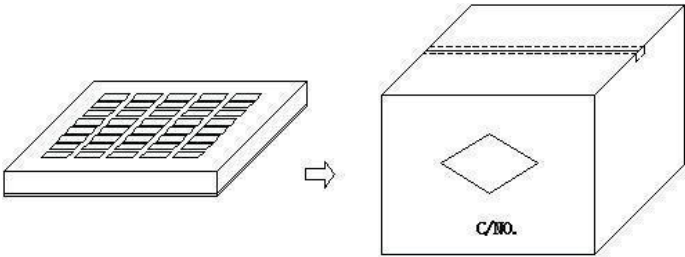
产 品 型 号: DESC		Apple Watch coil - CLB		版本 Rev: A.0		客户 CUST:									
				淘软料号 Fine P/N:											
				客户料号 CUST P/N:											
一、尺寸 DIMENSION:(mm)						A		24±0.5							
						B		2.7±0.5							
						C		23.7±0.25							
						D		20.5±1							
						E		13.5±0.3							
						H		7.5±0.3							
						I		2±1							
						J		10±2							
						K		7.5*2.0							
二、原理图SCHEMATIC DIAGRAM:															
															
三、绕线参数 Winding Specification:															
序号 NO.		端子 TERMINAL		线径 WIRE						圈数 Turns		绕线方向 Winding Direction			
1		S F		Silk braided cable 0.08 * 24P						12TS		Normal			
四、电气特性 ELECTRICAL CHARACTERISTICS:															
温度 TEMPERATURE:25 ±10℃, 湿度 RELATIVE HUMIDITY:65 ±20%															
序号 NO.		项目 ITEM		端子 TERMINAL						标准 SPECIFICATION		测试条件 TEST FREQUENCY		测试仪器 TEST EQUIPMENTS	
1		IND.		S-F						4.3uH ±20%Single coil		100KHz/1V		LCZ METER 1062B	
2		IND.		S-F						6.7uH ±10%Add magnetic chip		100KHz/1V		LCZ METER 1062B	
3		Q 值		S-F		≥35		100KHz/1V		LCZ METER 1062B					
4		DCR		S-F											
拟制/日期 PREPARED BY/DATE						审核/日期 CHECKED BY/DATE									
苏燕平 2020/03/10						钱立谋 2020/03/10									

SPECIFICATION

产 品 型 号: DESC	苹果手表线圈-CLB	版本 Rev: A.0	客 户 CUST:	
			淘软料号 Fine P/N:	
			客户料号 CUST P/N:	

五、包装 PACKONG:

5.1 包装图片Packing pictures:



5.2 包装数量及规格Packing Quantity:

项目 Item	数量 Quantity	材料规格 Material
盒 Box	3500 Pcs	370*265*55mm
箱 Big Carton	1400 Pcs	420*270*310mm

5.3 包装以现有包装盘为参照标准，以实际出货包装为准,如有特要求可以定制。

The packaging shall be based on the existing packing plate and the actual delivery package shall prevail. If there is any requirement, we can customize it.

六、材料清单 Material list:

序号 number	材 料 名 称 Material name	品 名 描 述 Description	制 造 商 Manufacturer
1	Enamel-coated wire, 0.08 inches in diameter, 24 strands	Hot air insulated wire, 0.08 inches in diameter, 24 strands	
2	Lead-free tin rod	Lead-free tin rod	
3	磁片	Φ24*12.7mm manganese-zinc hard magnetic sheet	
4	Glue	201 glue	
5	Magnet	7.5*2mm	
6	Hole-covered double-sided adhesive tape	Circular with a diameter of 20mm (ref) adhesive backing	

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
苏燕平 2020/03/10	钱立谋 2020/03/10