




Duty Cycle

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	92.01	0.36	0.45
NVNT	BLE 1M	2440	92.01	0.36	0.45
NVNT	BLE 1M	2480	92.01	0.36	0.45
NVNT	BLE 2M	2402	47.95	3.19	0.91
NVNT	BLE 2M	2440	48.05	3.18	0.91
NVNT	BLE 2M	2480	48.05	3.18	0.91

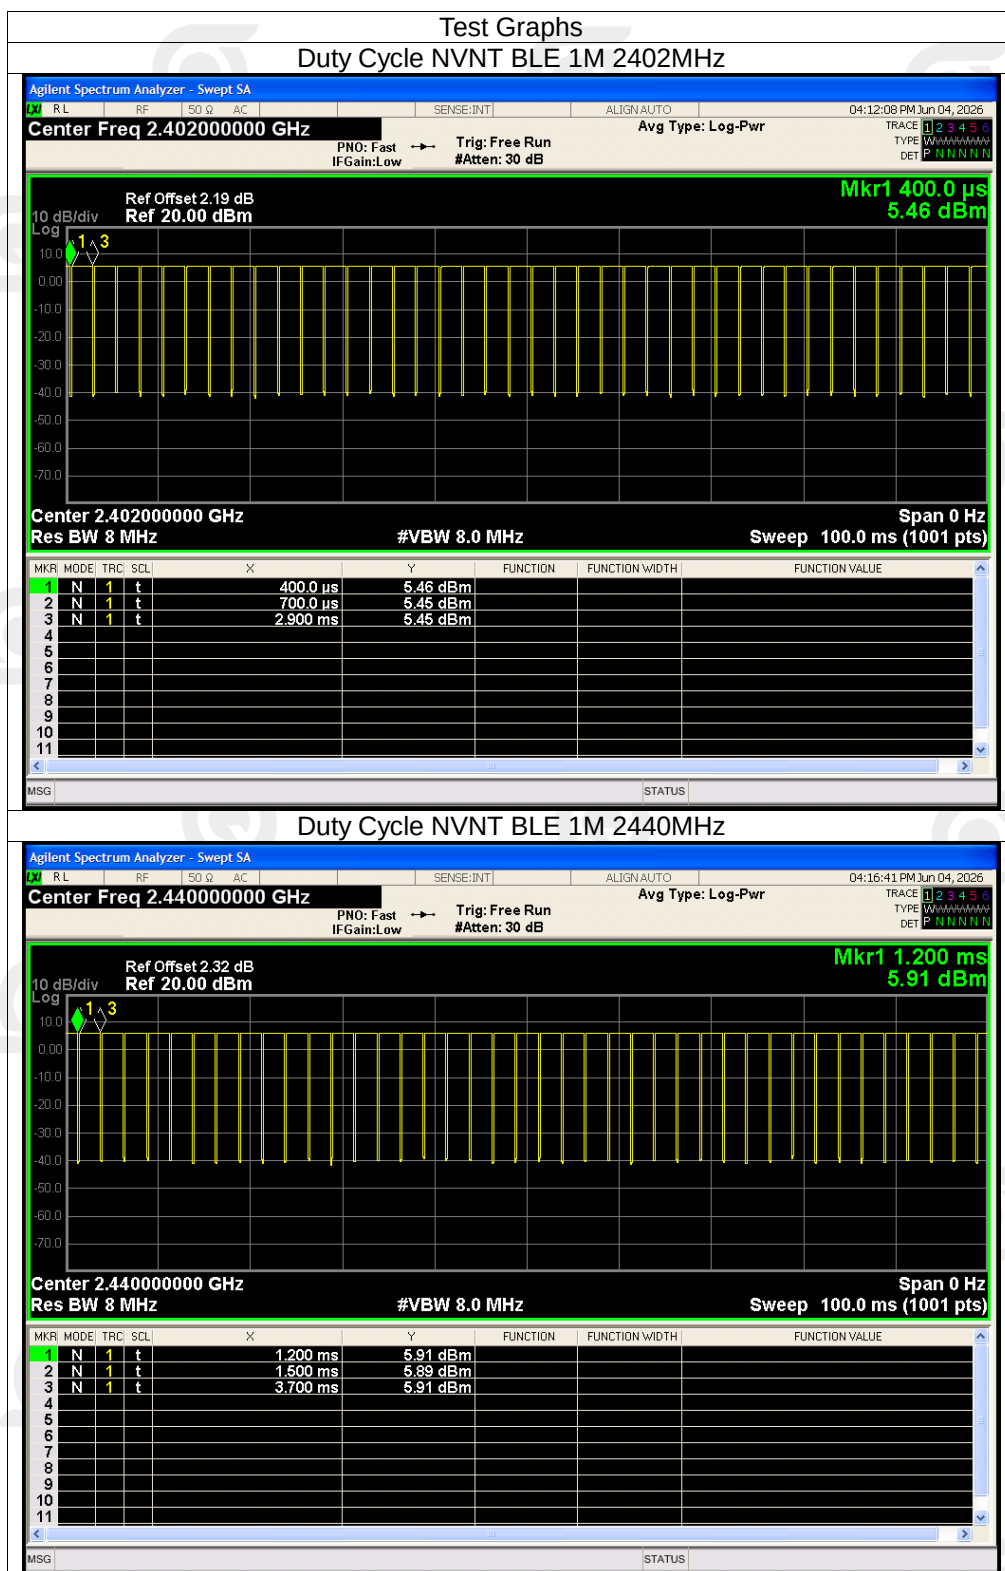


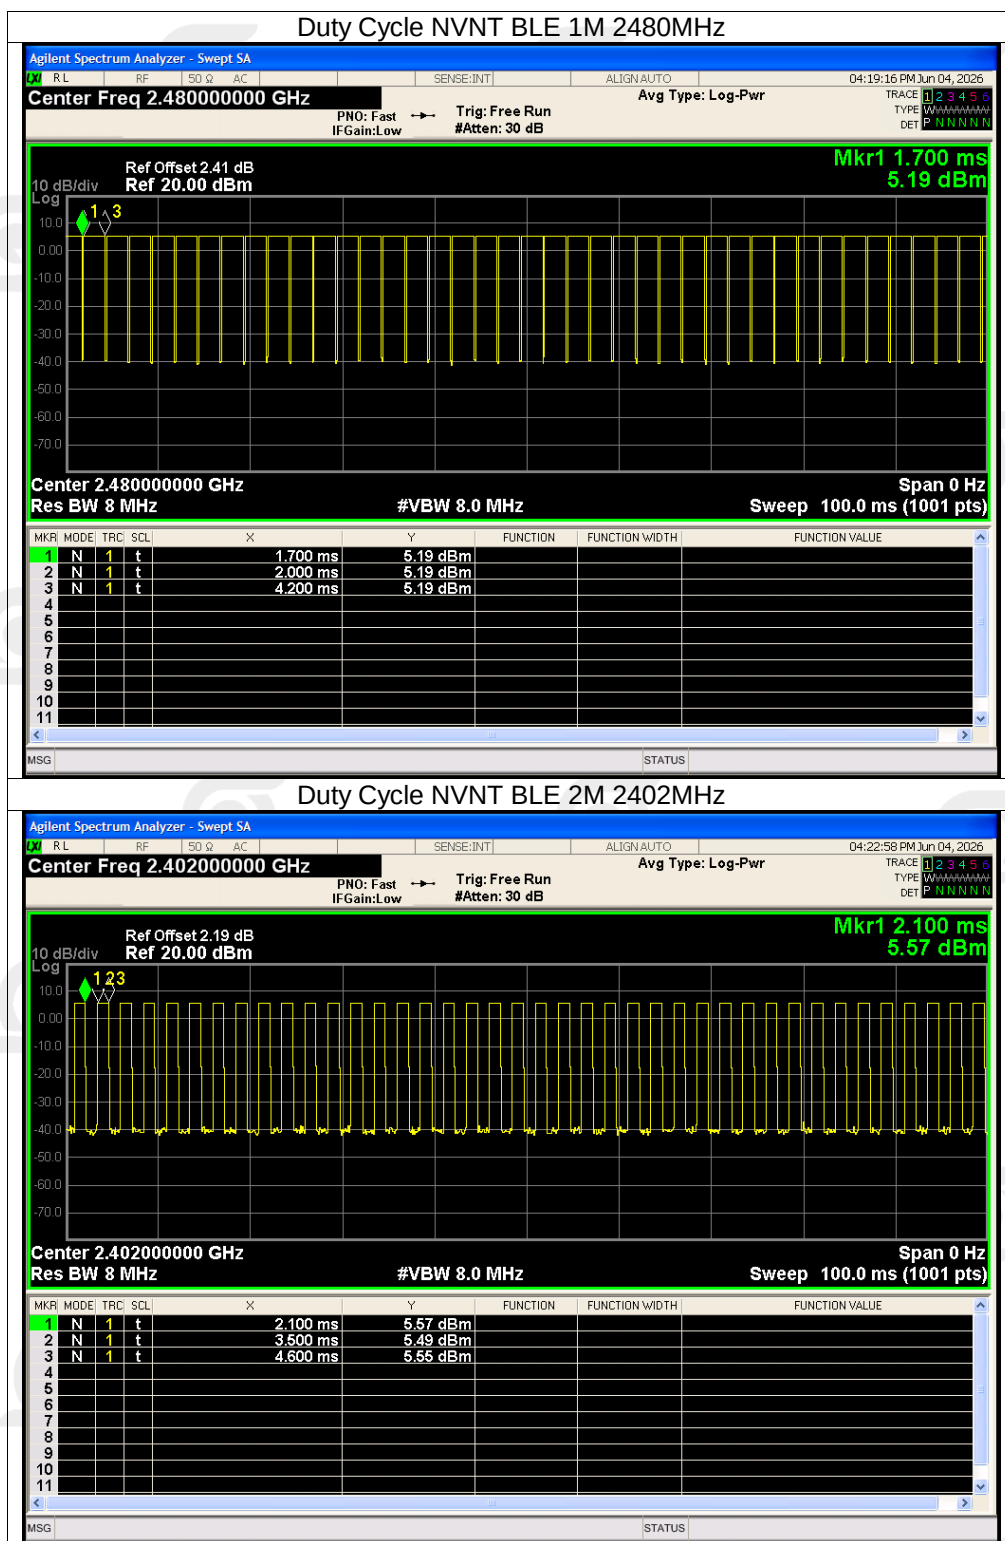


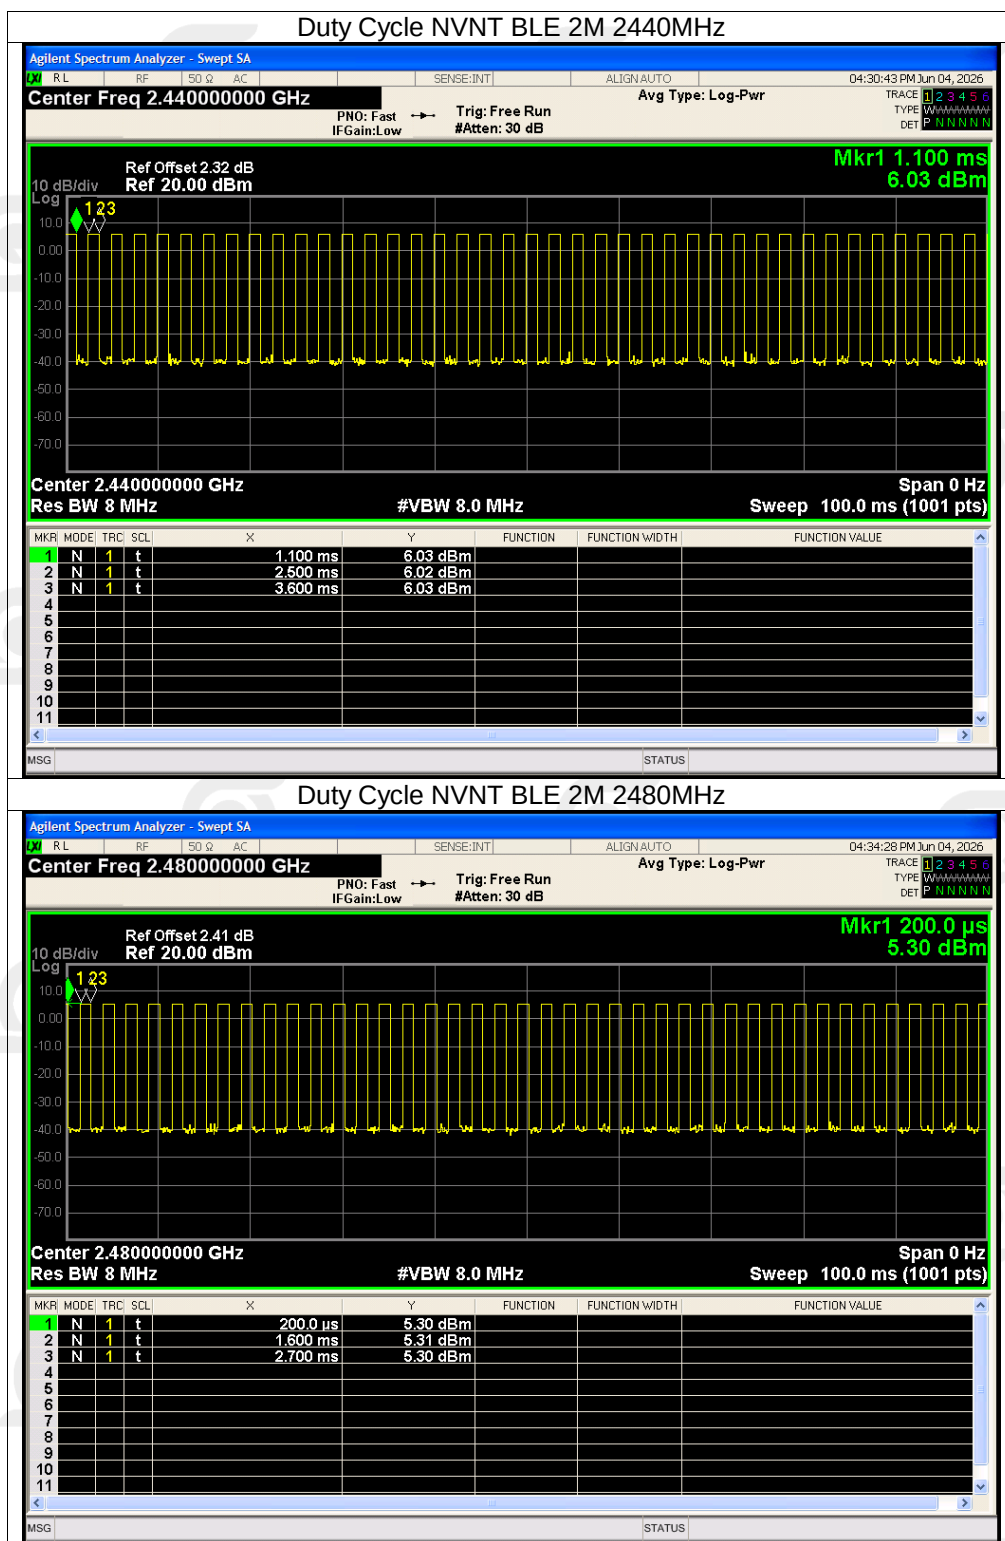


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	5.45	30	Pass
NVNT	BLE 1M	2440	5.87	30	Pass
NVNT	BLE 1M	2480	5.16	30	Pass
NVNT	BLE 2M	2402	5.54	30	Pass
NVNT	BLE 2M	2440	6.02	30	Pass
NVNT	BLE 2M	2480	5.29	30	Pass

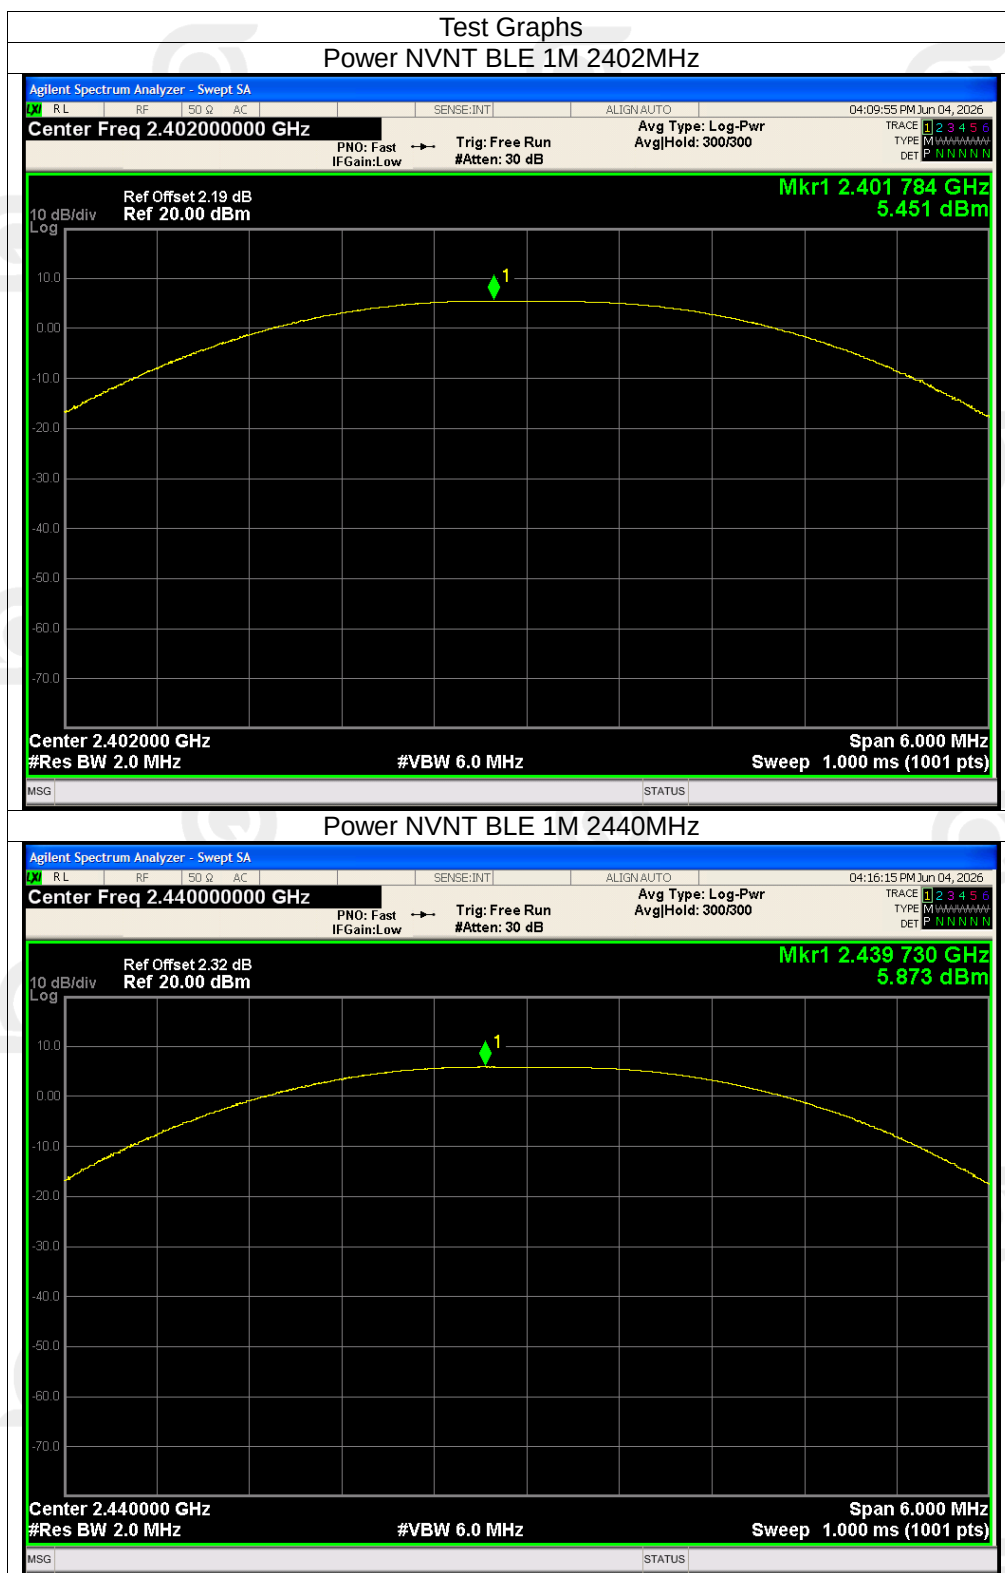

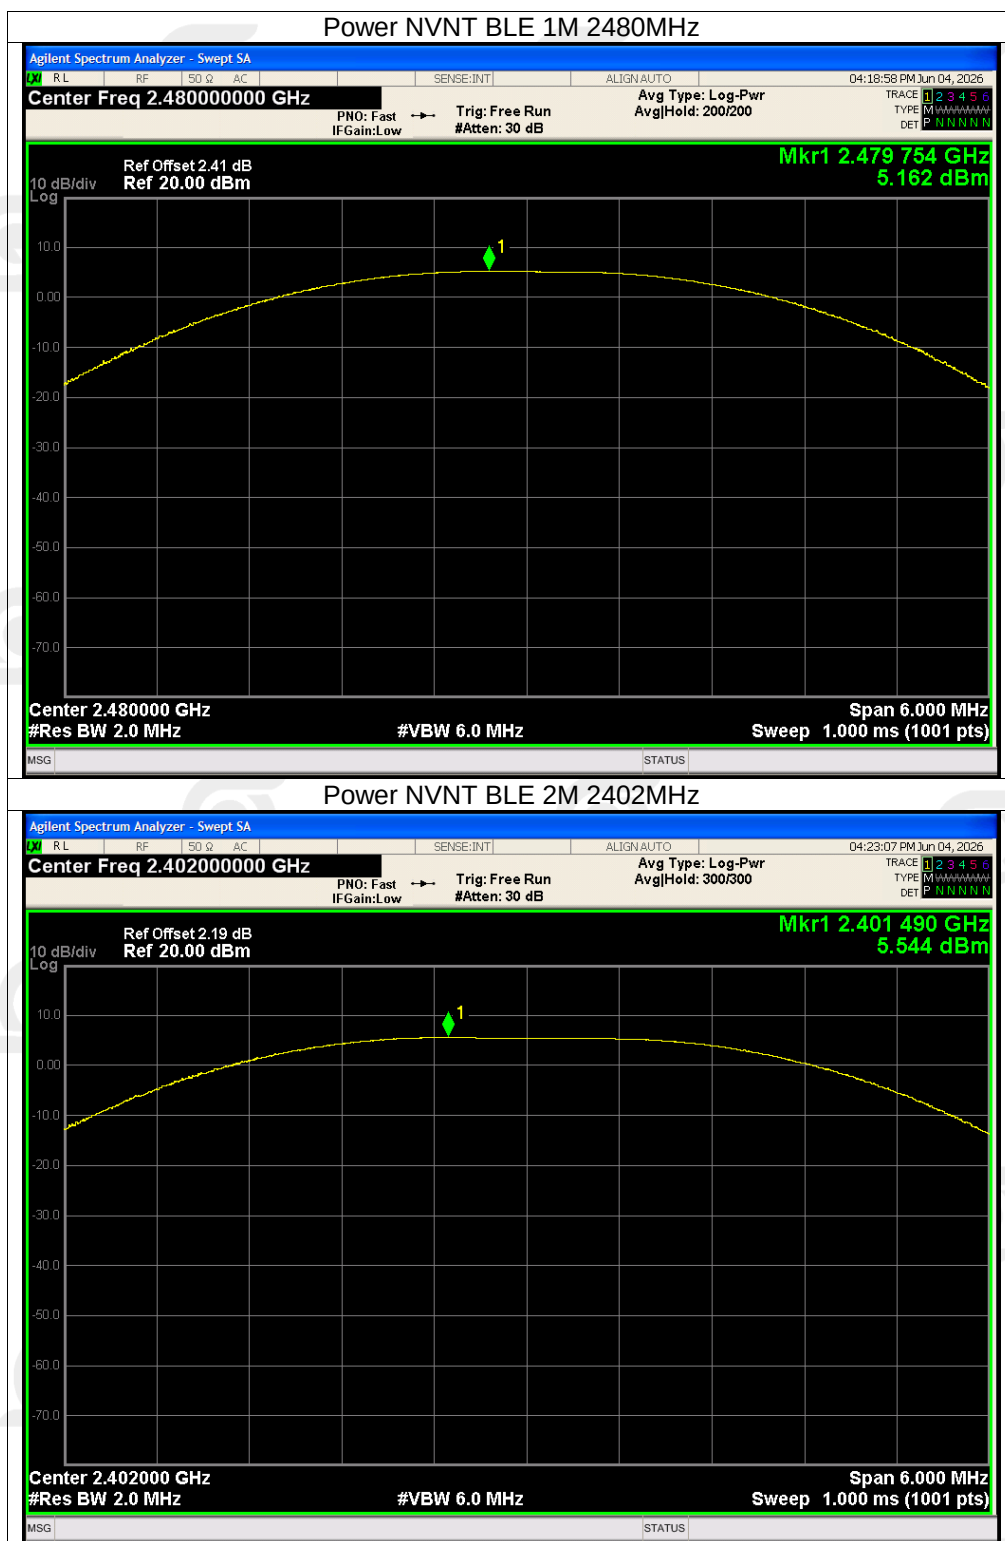

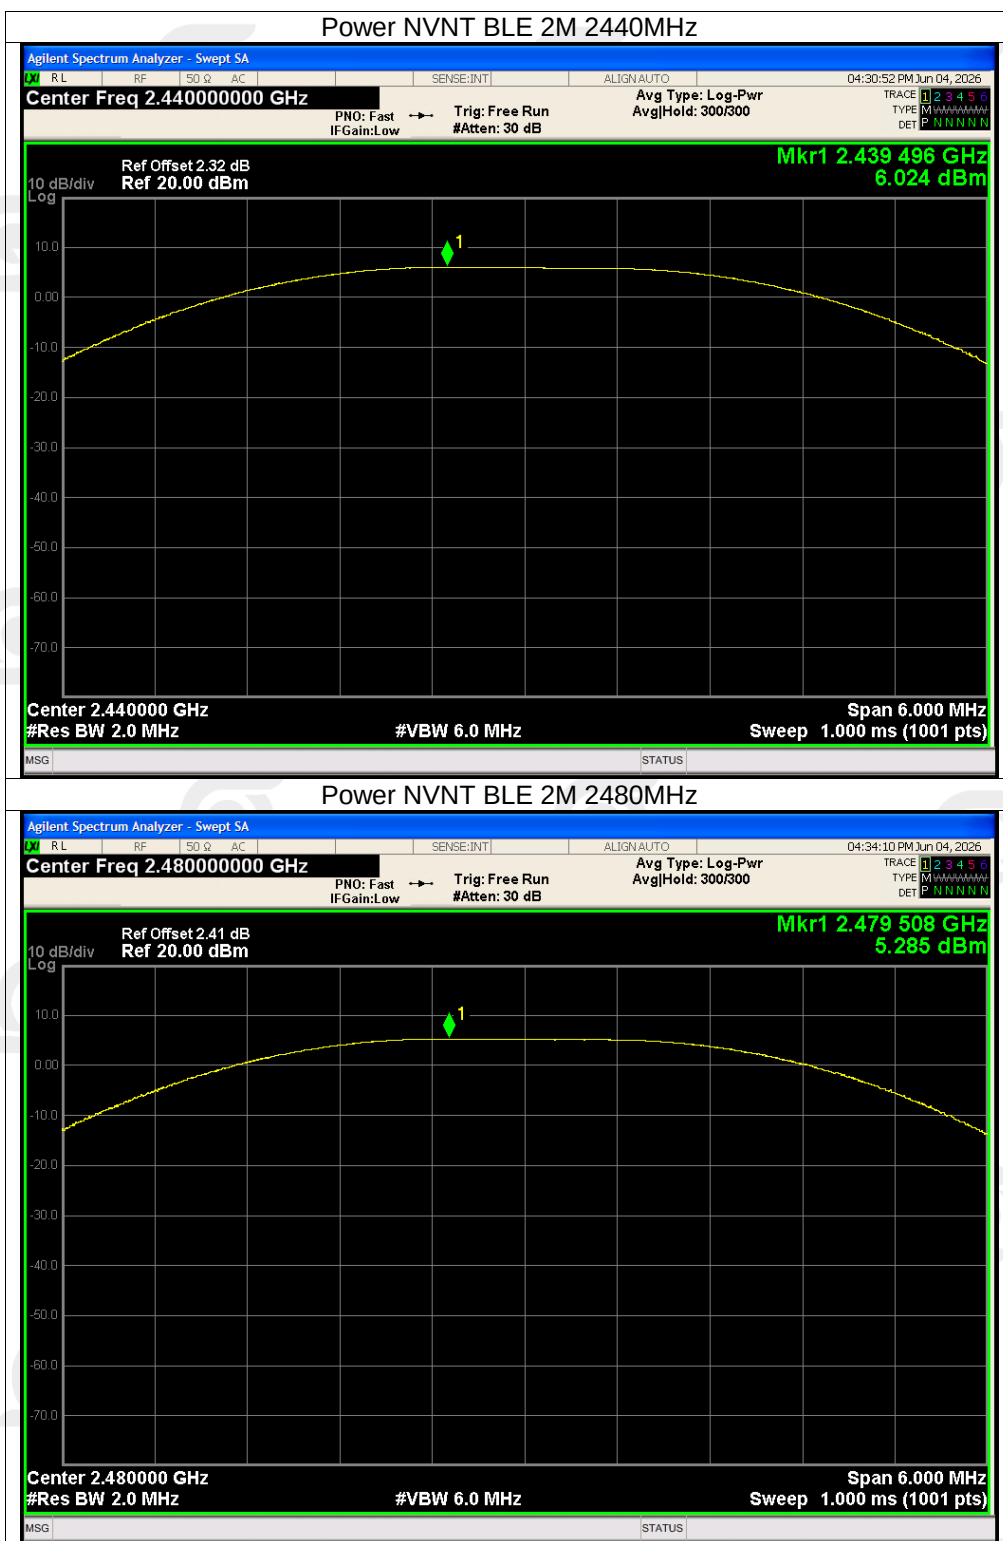


-6dB Bandwidth


Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	0.662	0.5	Pass
NVNT	BLE 1M	2440	0.680	0.5	Pass
NVNT	BLE 1M	2480	0.664	0.5	Pass
NVNT	BLE 2M	2402	1.137	0.5	Pass
NVNT	BLE 2M	2440	1.140	0.5	Pass
NVNT	BLE 2M	2480	1.130	0.5	Pass


Test Graphs



-6dB Bandwidth NVNT BLE 1M 2402MHz

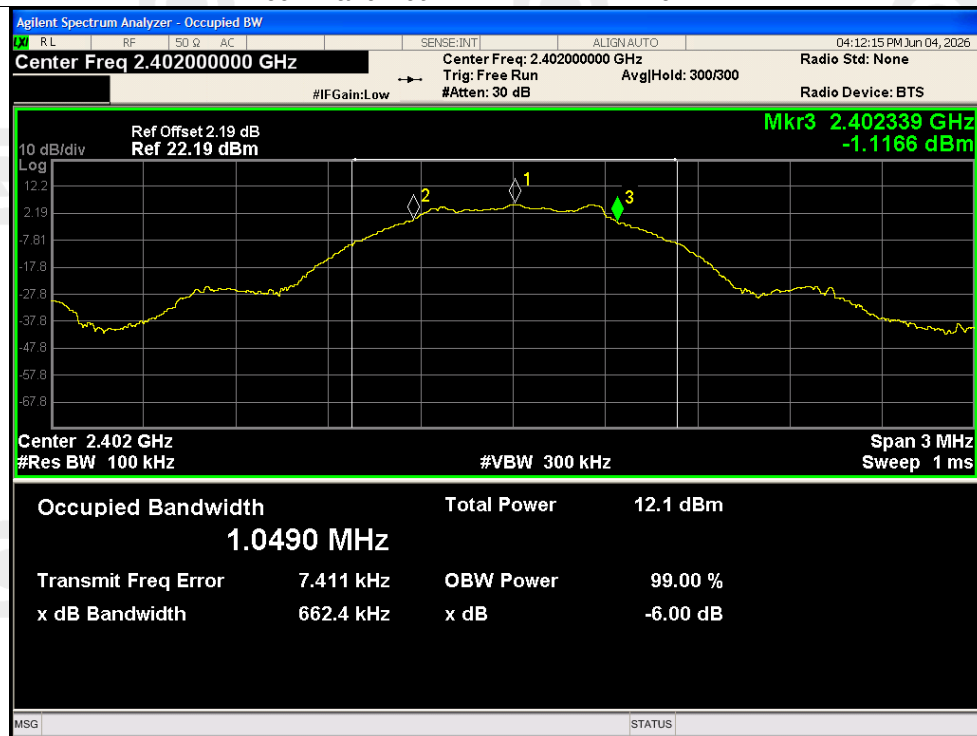

-6dB Bandwidth NVNT BLE 1M 2440MHz

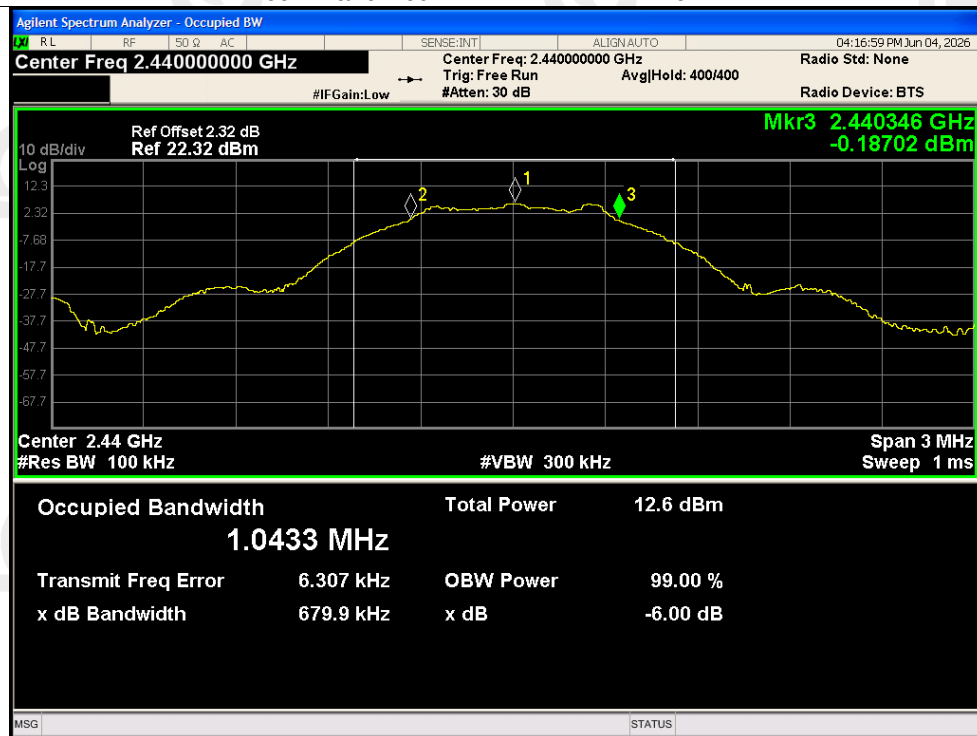


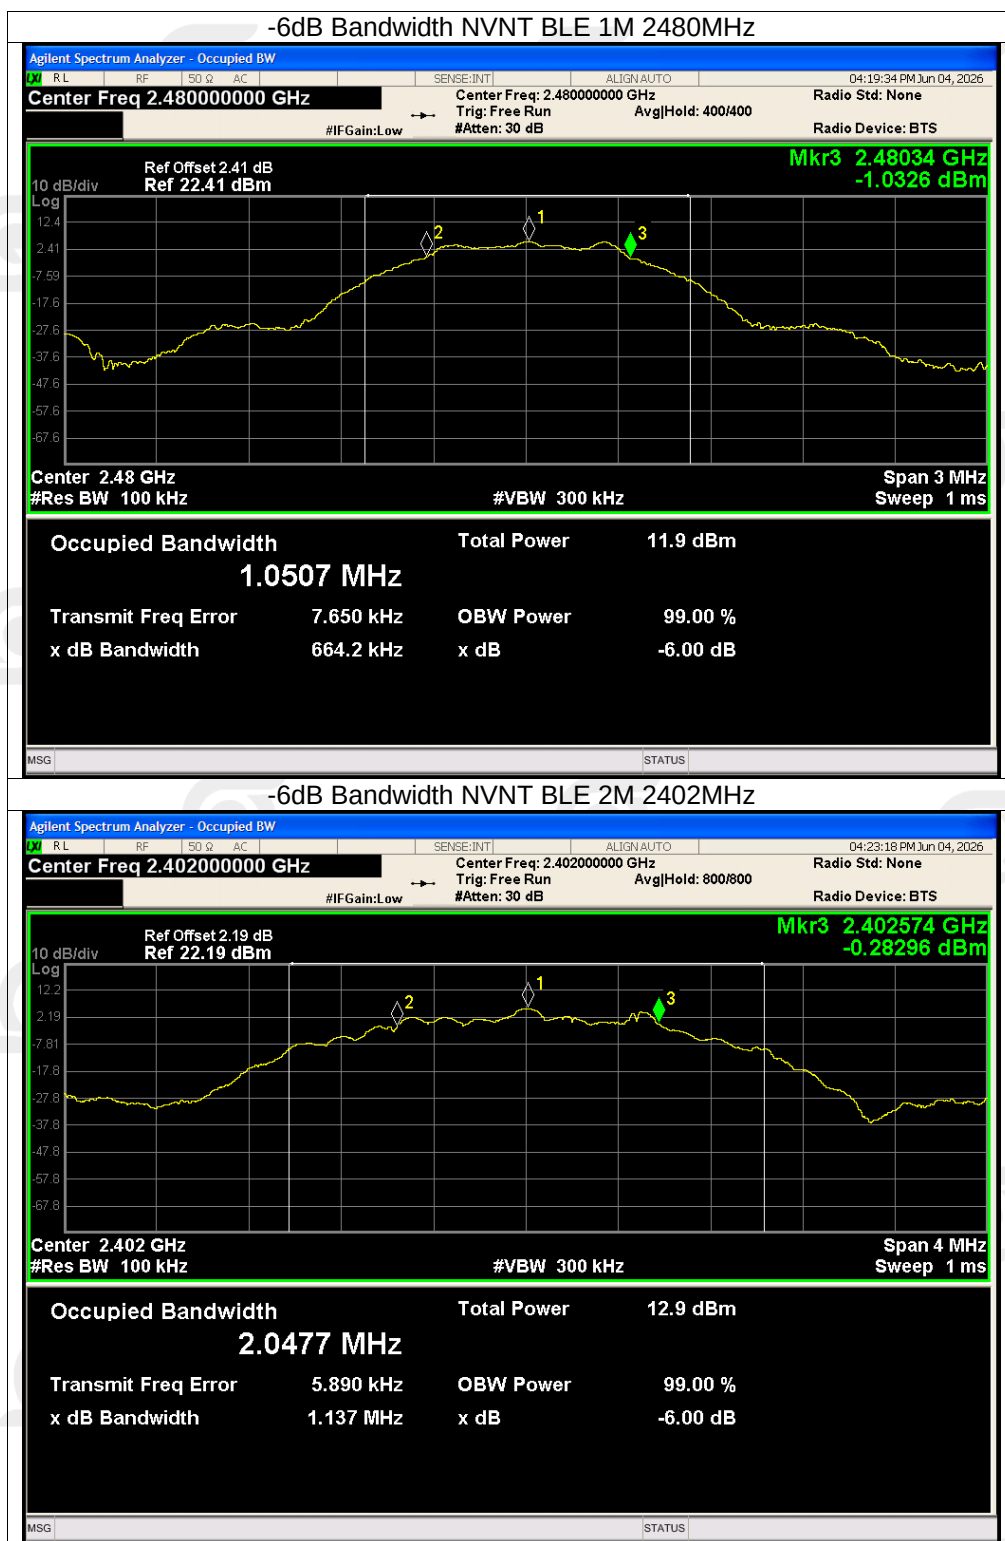


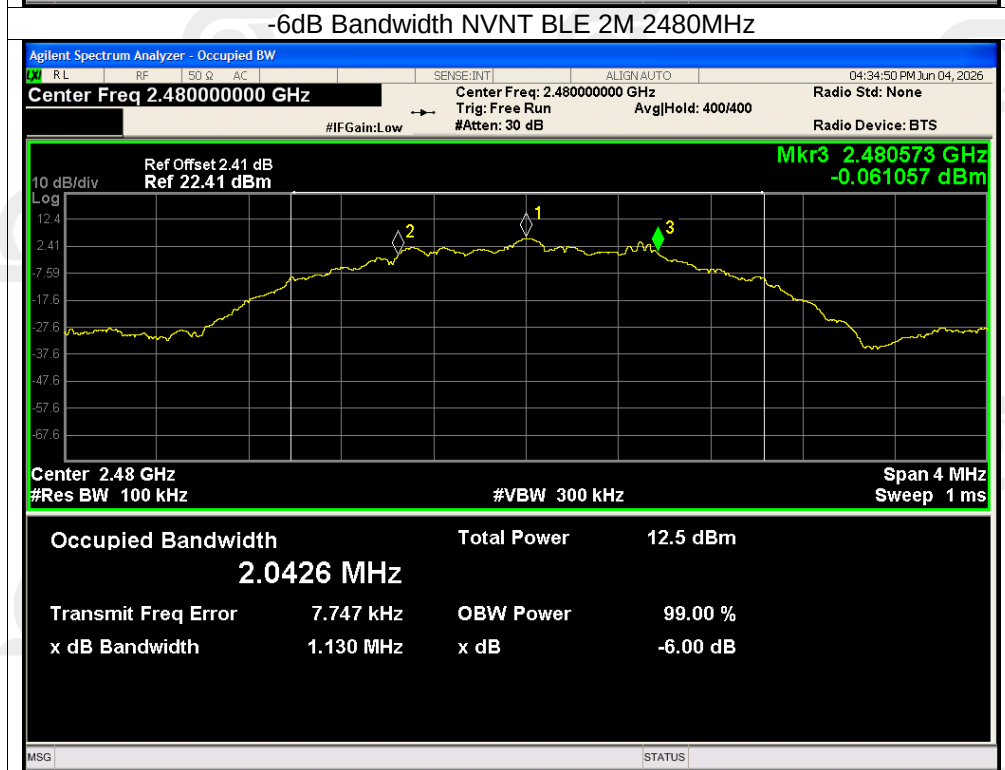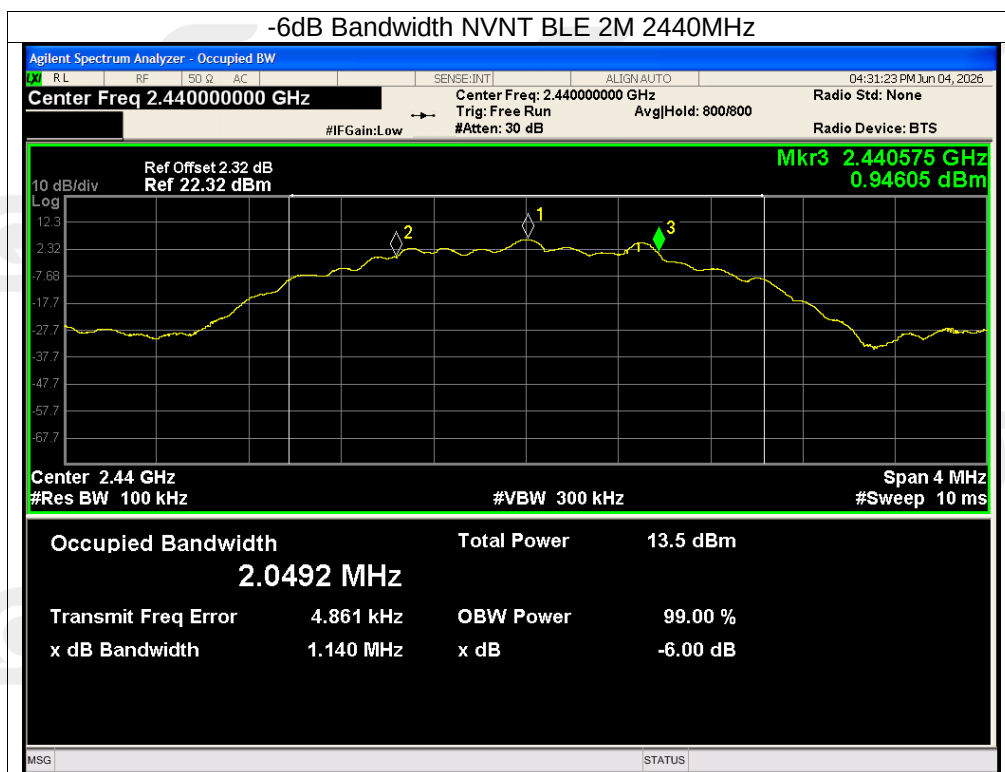


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-5.09	8	Pass
NVNT	BLE 1M	2440	-4.60	8	Pass
NVNT	BLE 1M	2480	-5.22	8	Pass
NVNT	BLE 2M	2402	-5.37	8	Pass
NVNT	BLE 2M	2440	-4.87	8	Pass
NVNT	BLE 2M	2480	-5.63	8	Pass

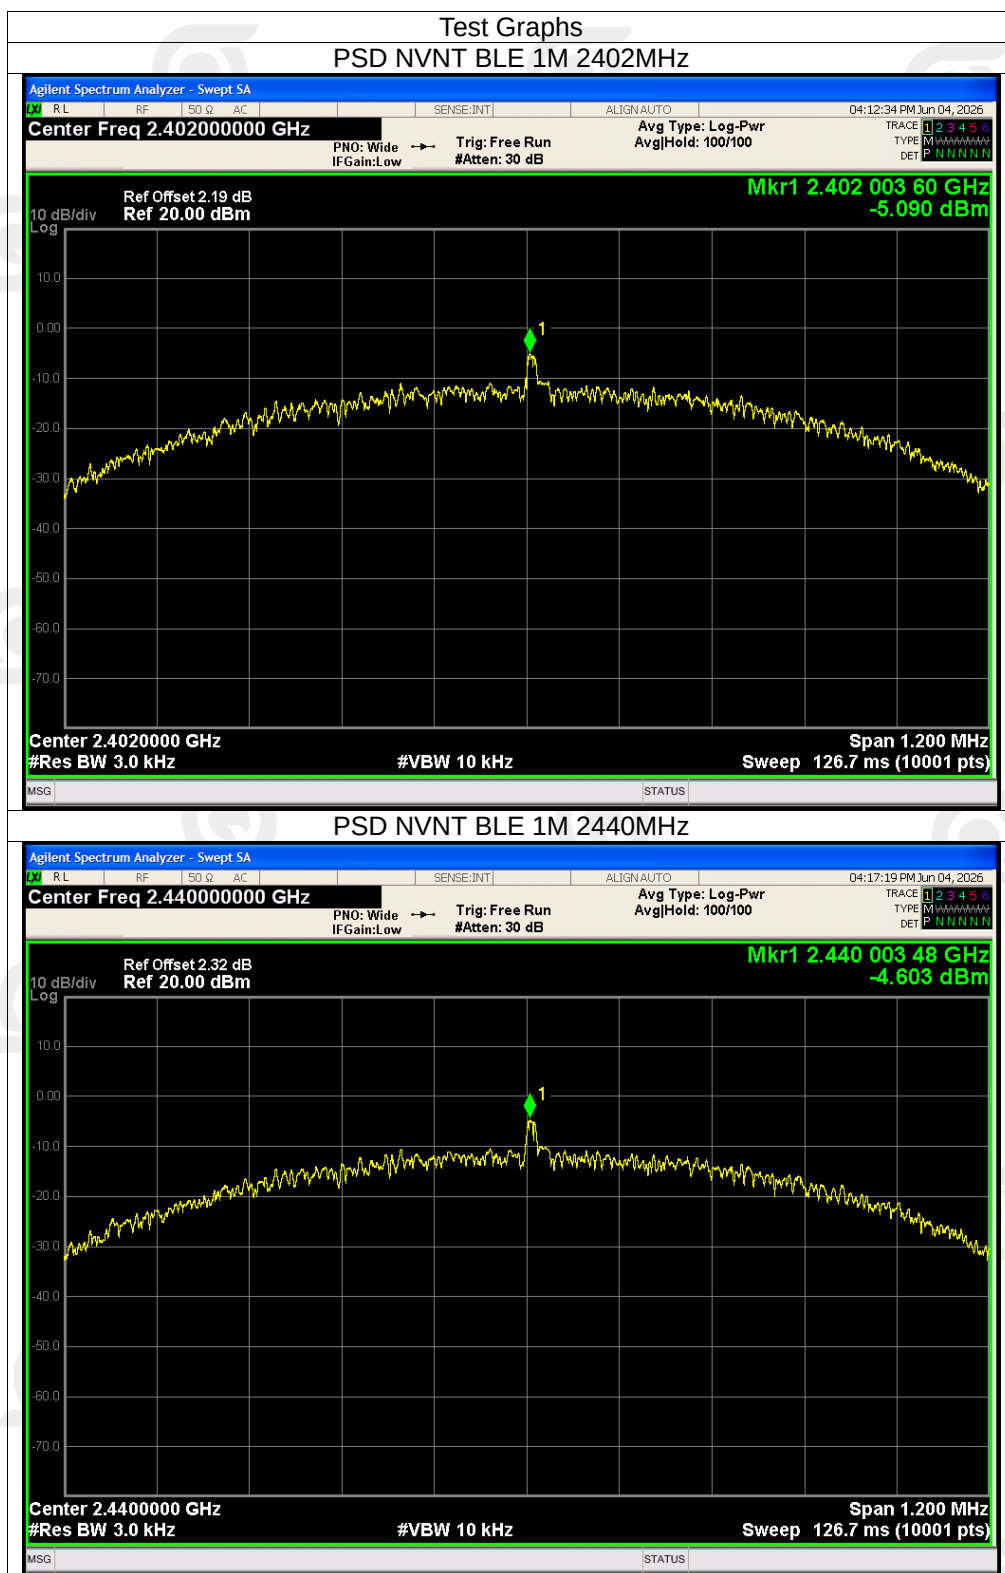


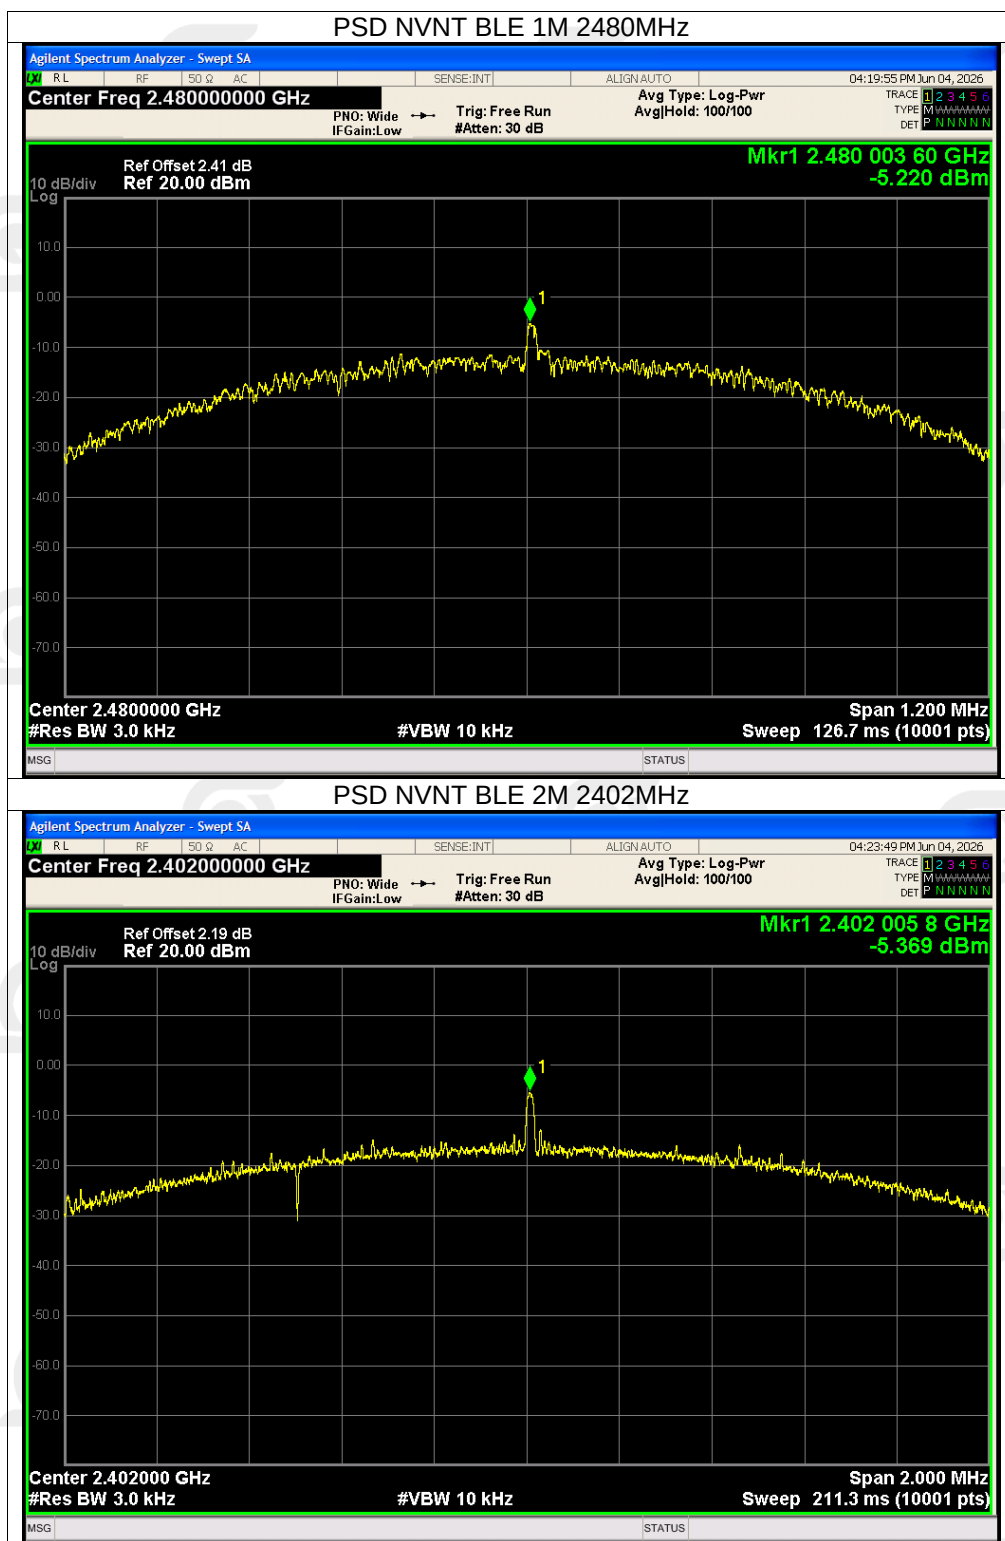


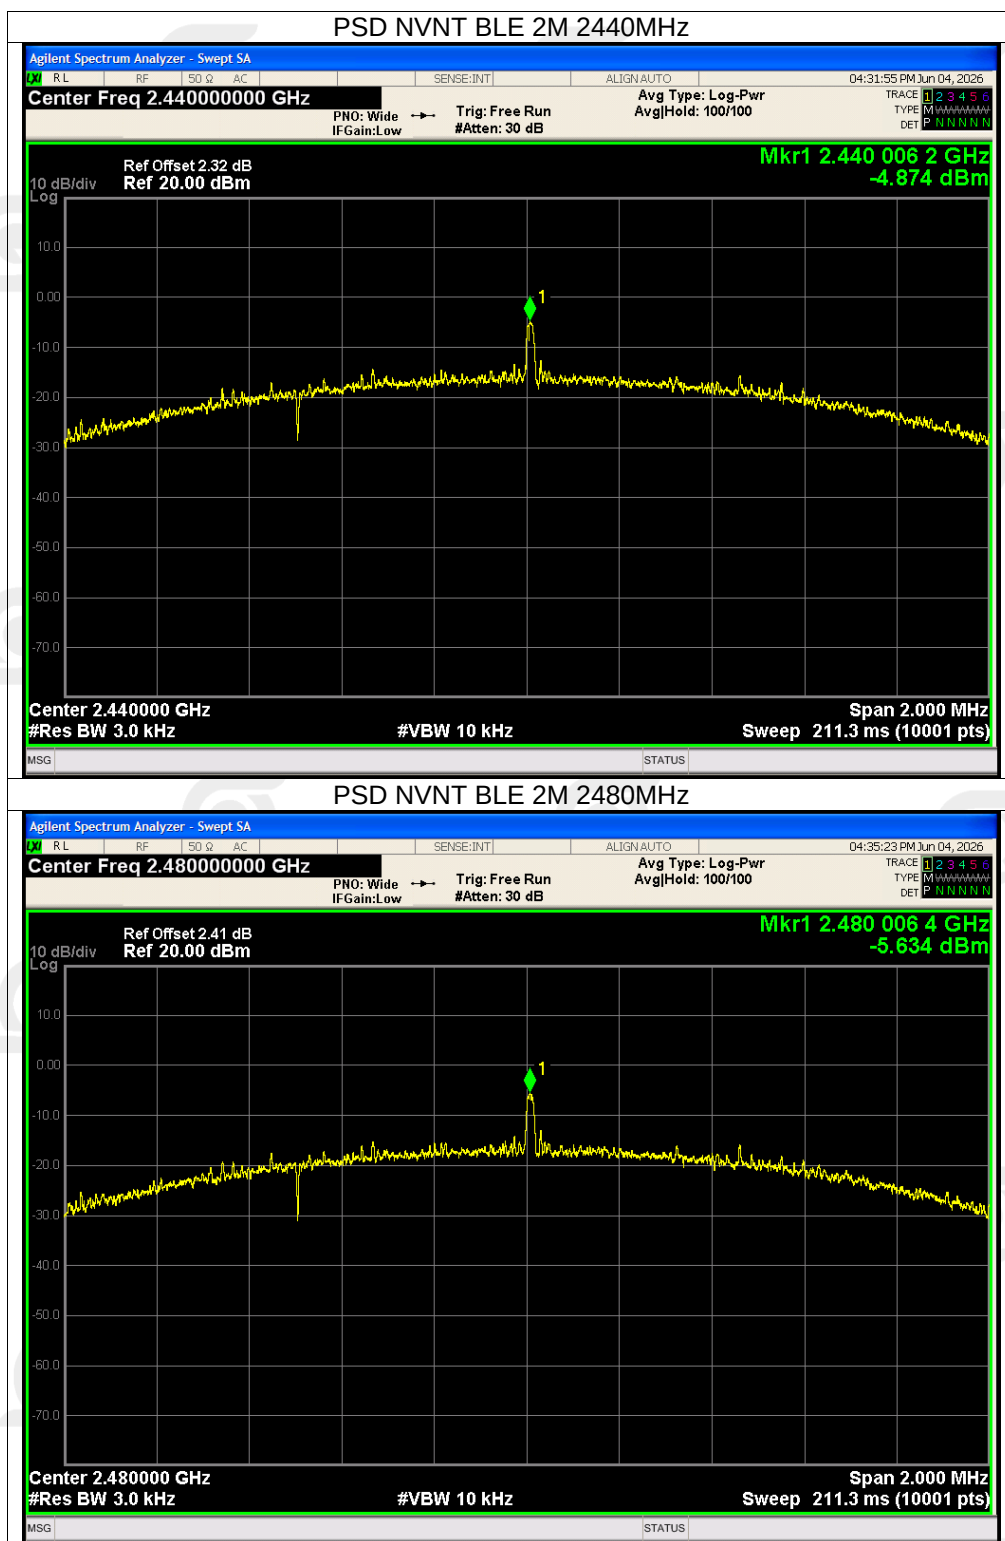


Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-58.98	-20	Pass
NVNT	BLE 1M	2480	-47.62	-20	Pass
NVNT	BLE 2M	2402	-54.33	-20	Pass
NVNT	BLE 2M	2480	-47.38	-20	Pass

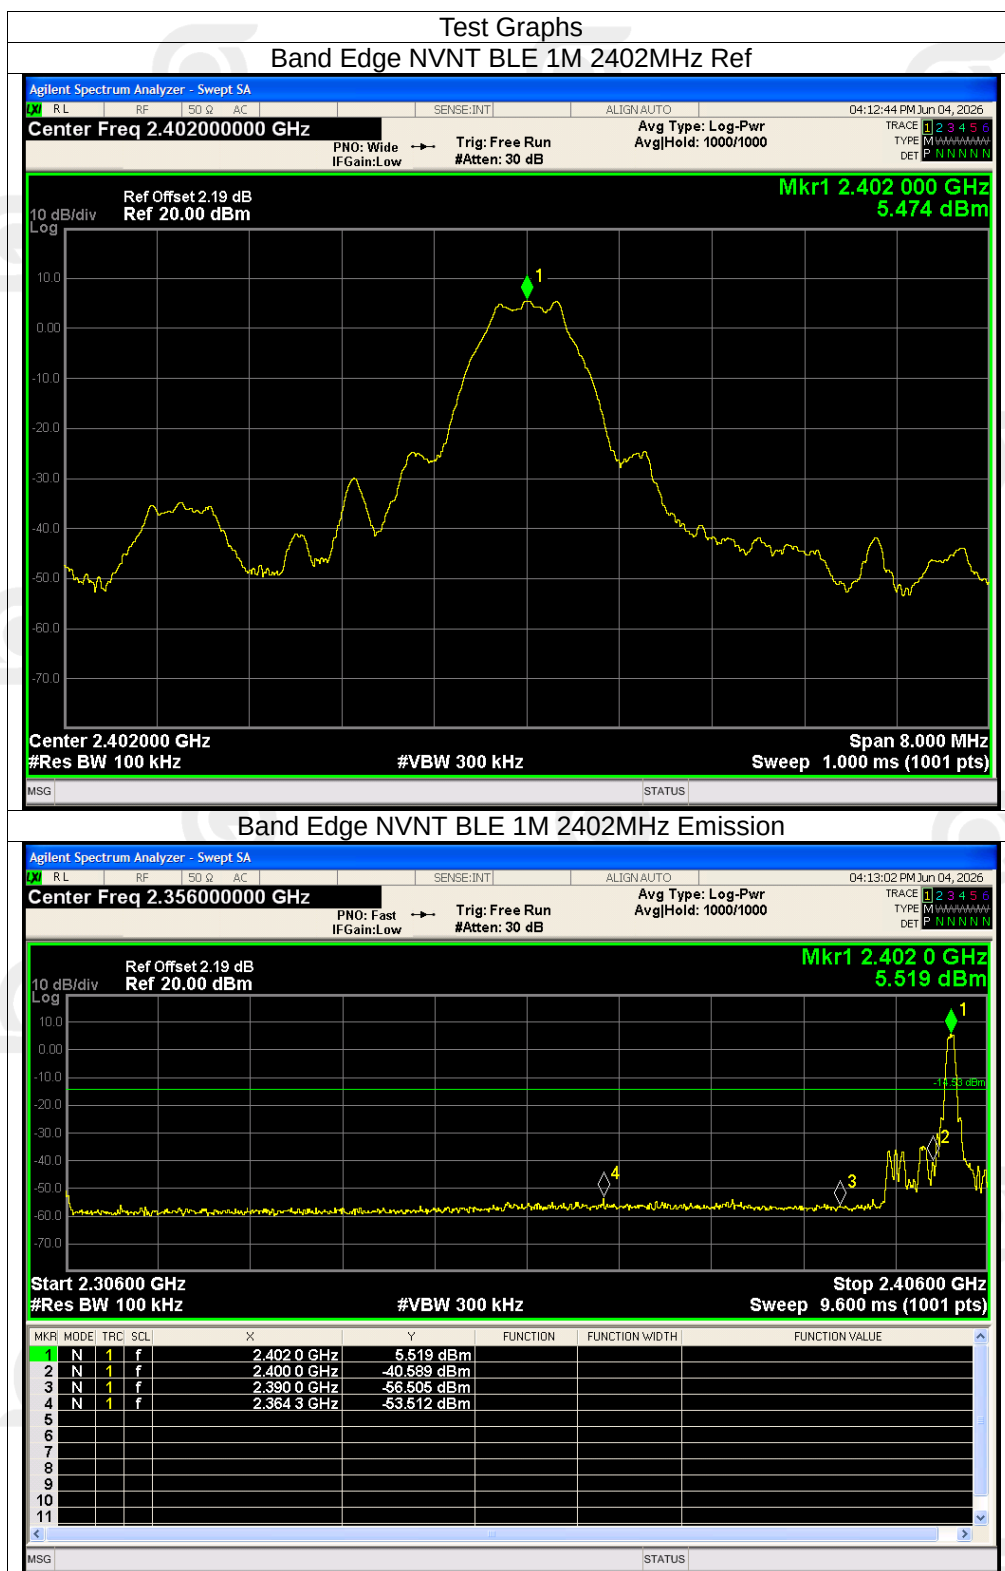

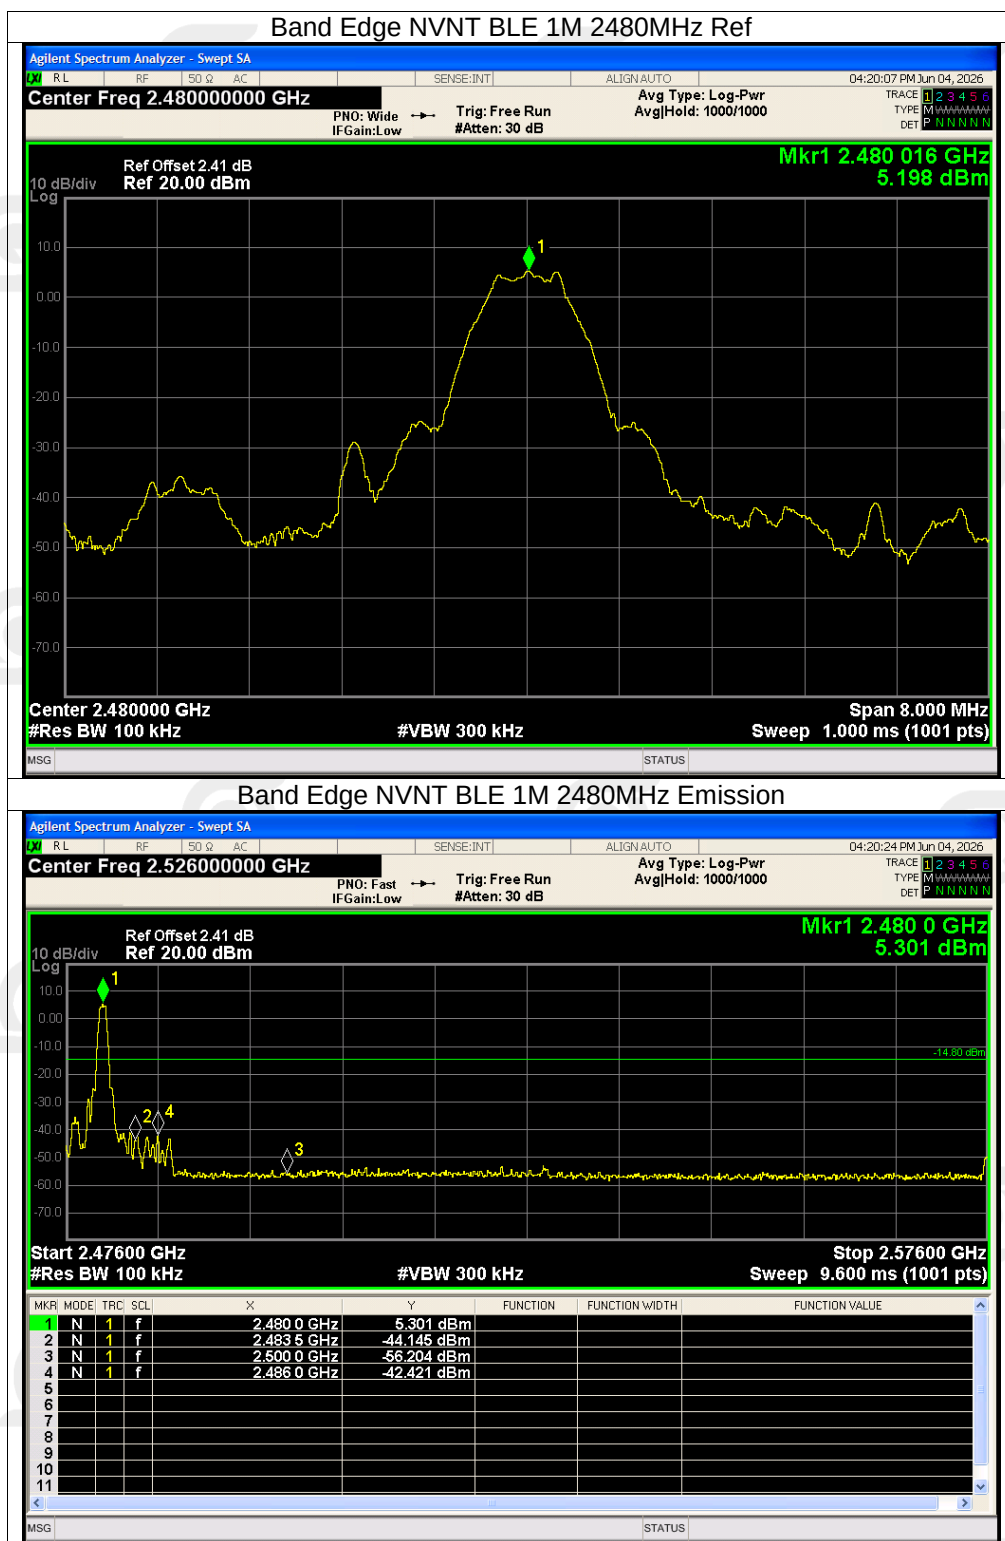





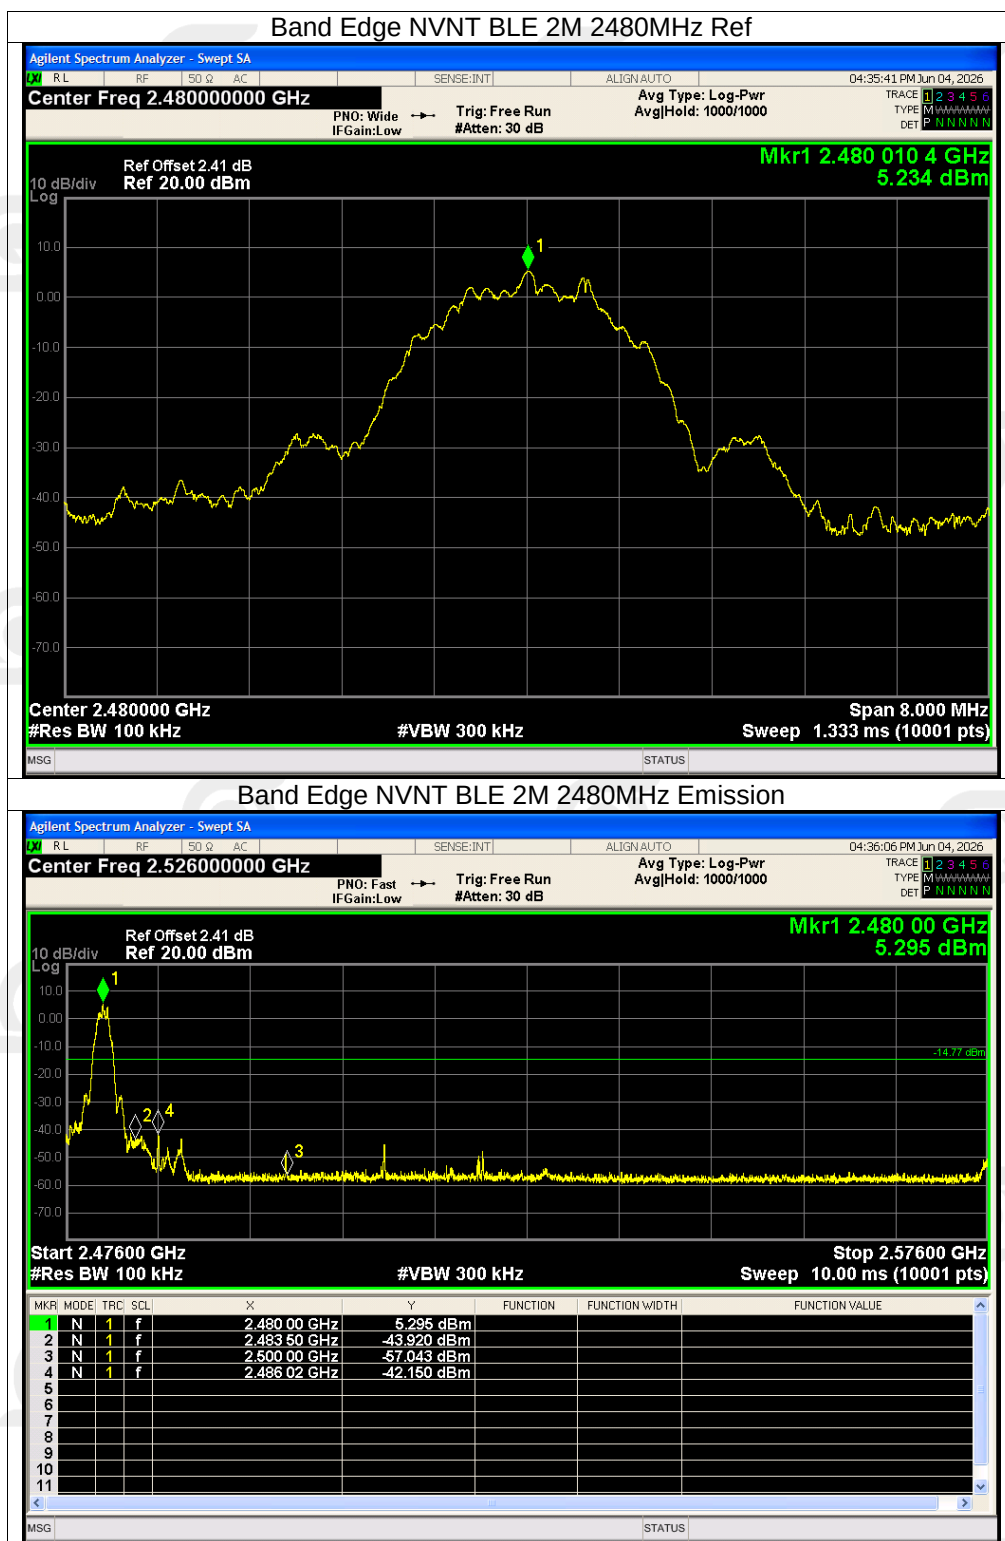



Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-45.97	-20	Pass
NVNT	BLE 1M	2440	-46.02	-20	Pass
NVNT	BLE 1M	2480	-44.97	-20	Pass
NVNT	BLE 2M	2402	-46.05	-20	Pass
NVNT	BLE 2M	2440	-46.10	-20	Pass
NVNT	BLE 2M	2480	-45.04	-20	Pass

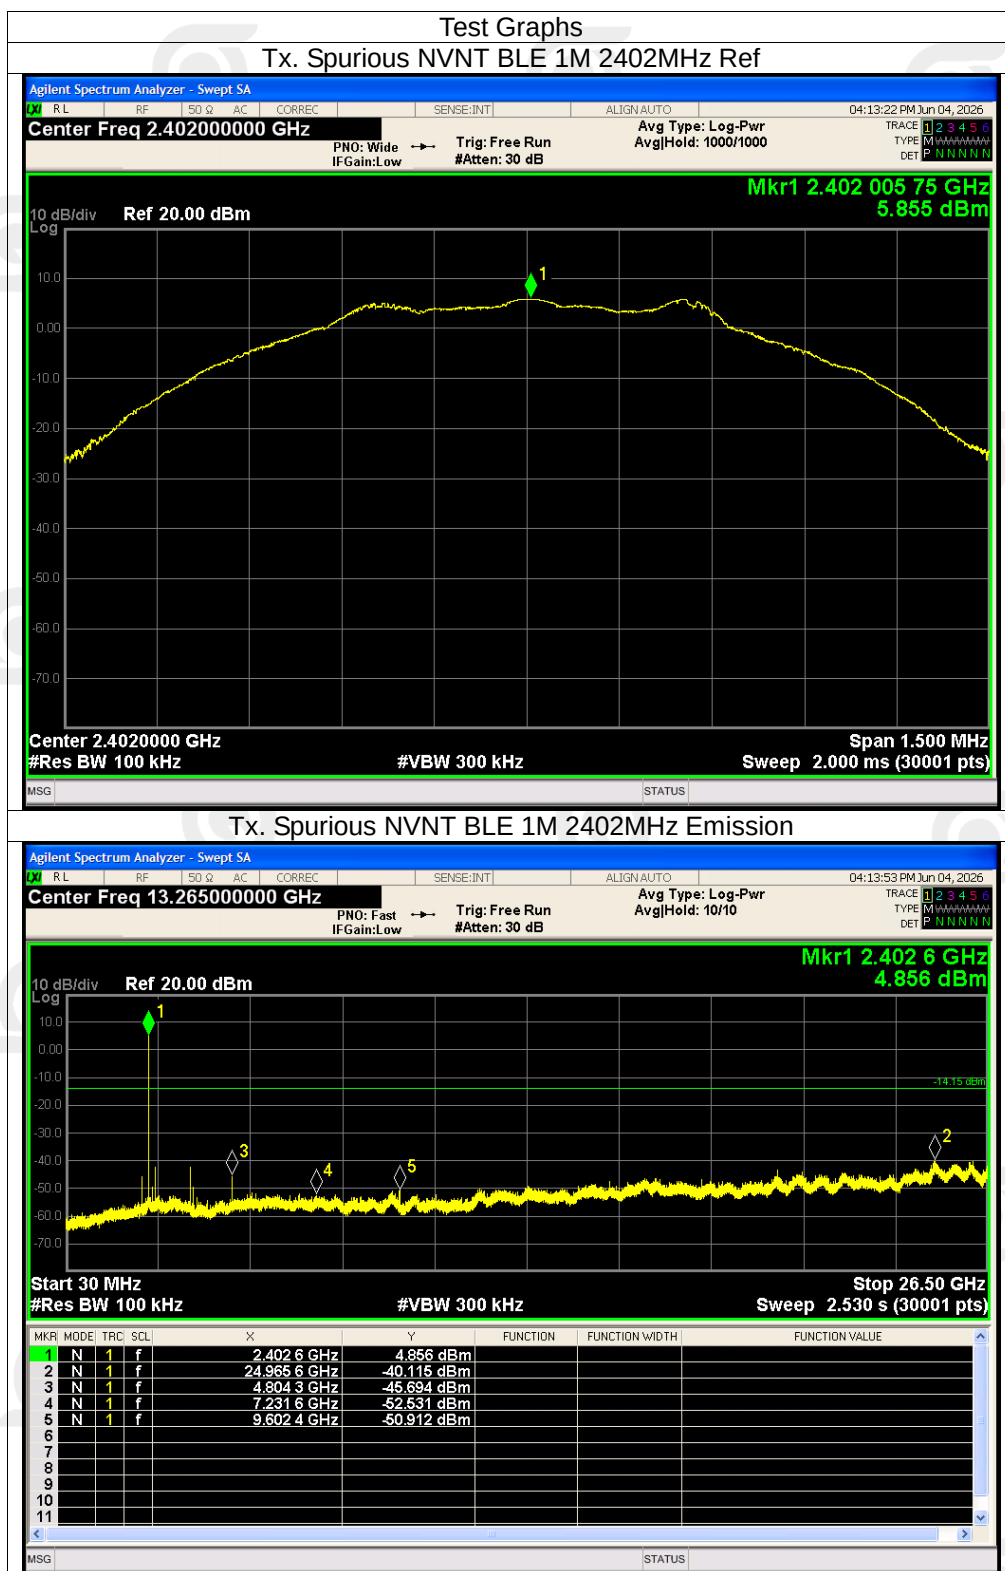


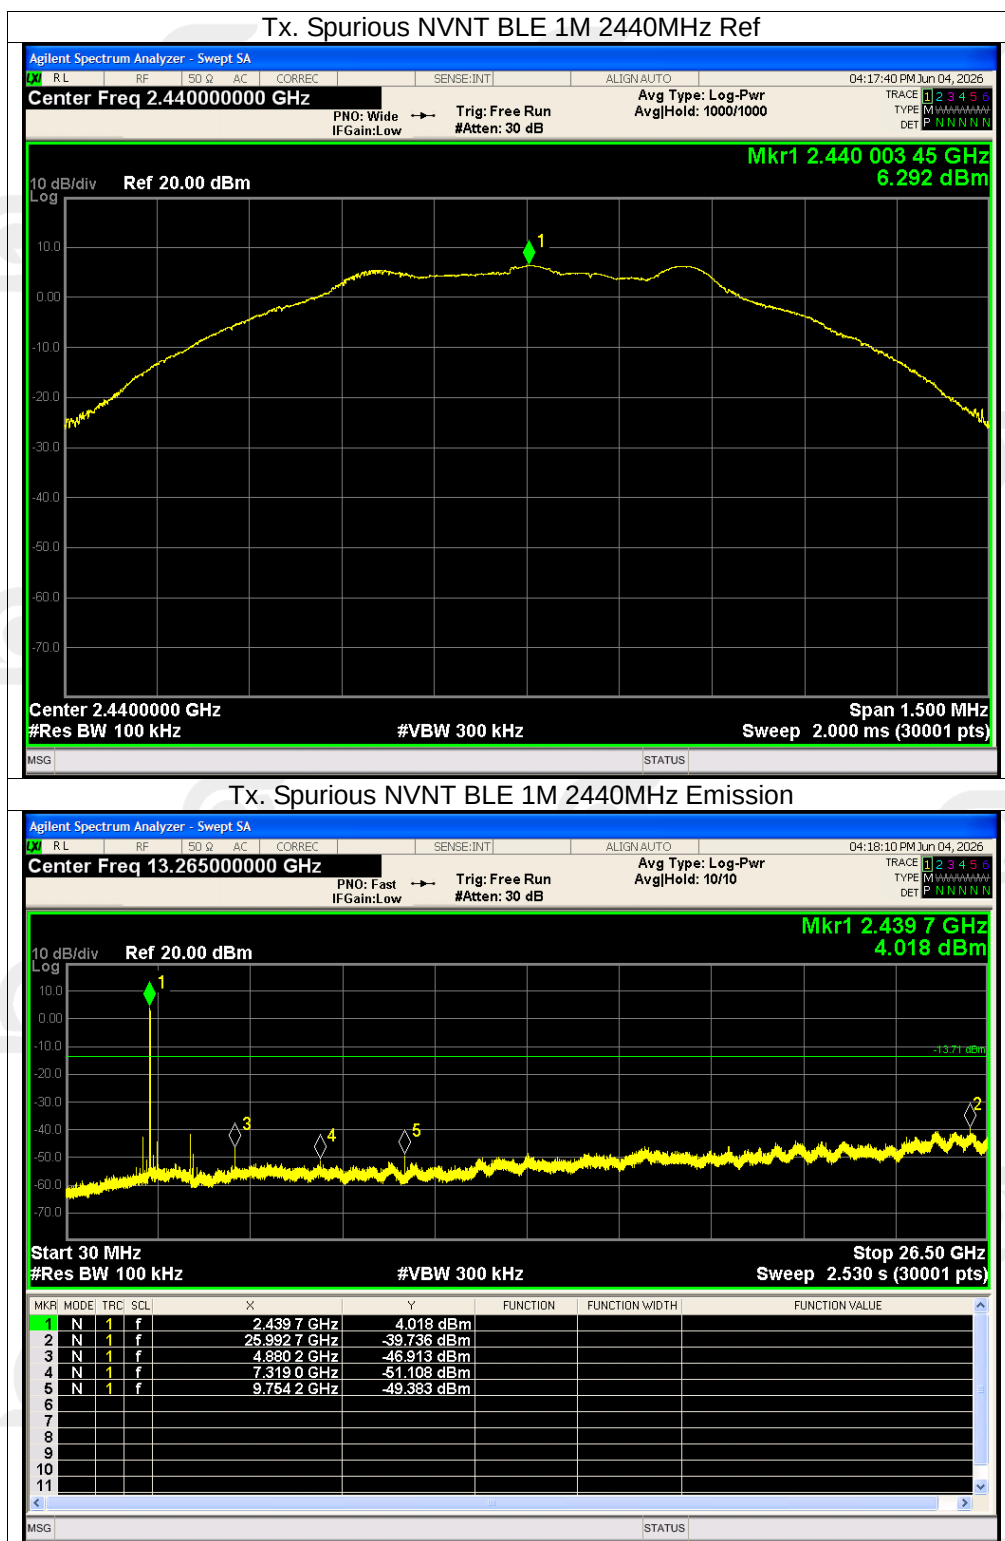

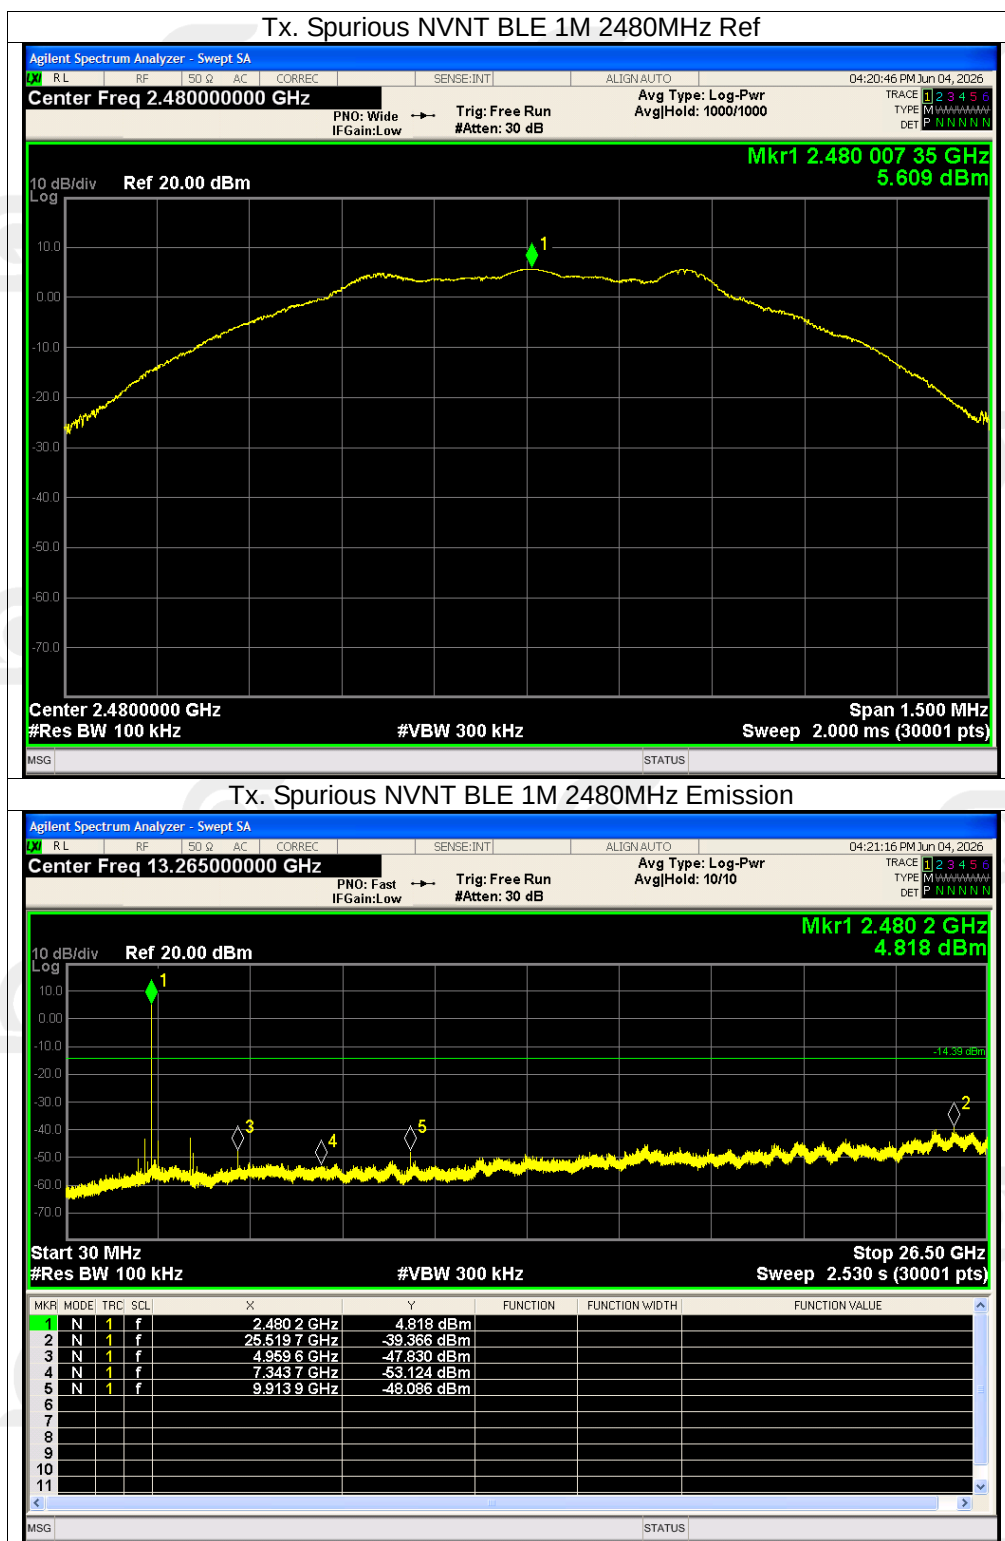

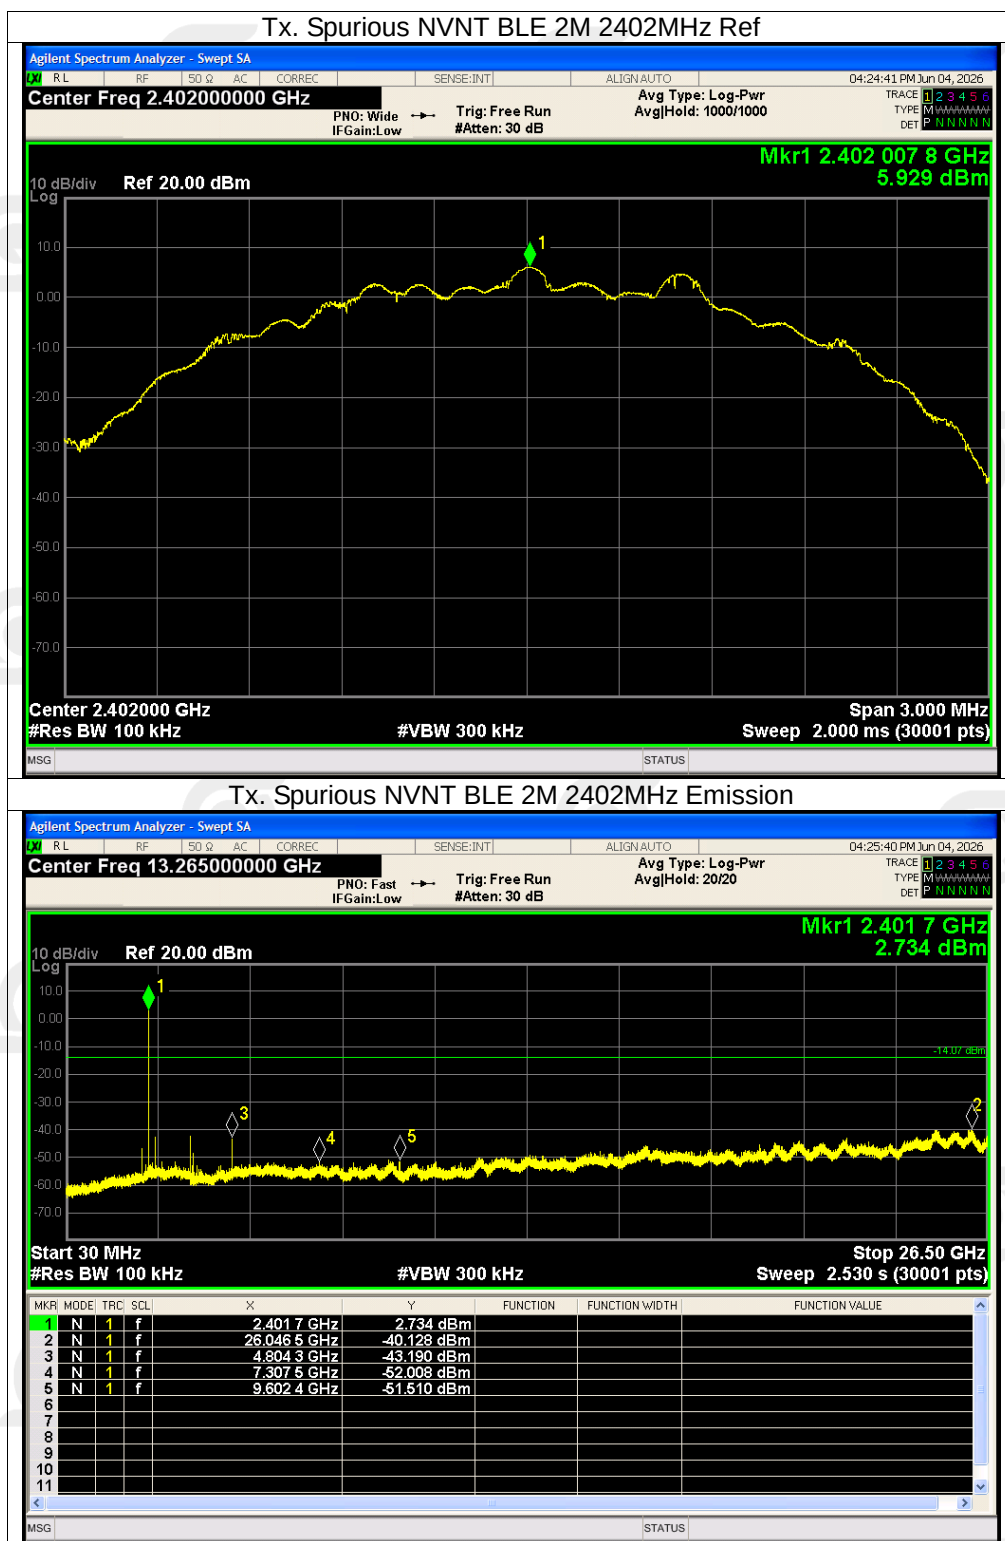

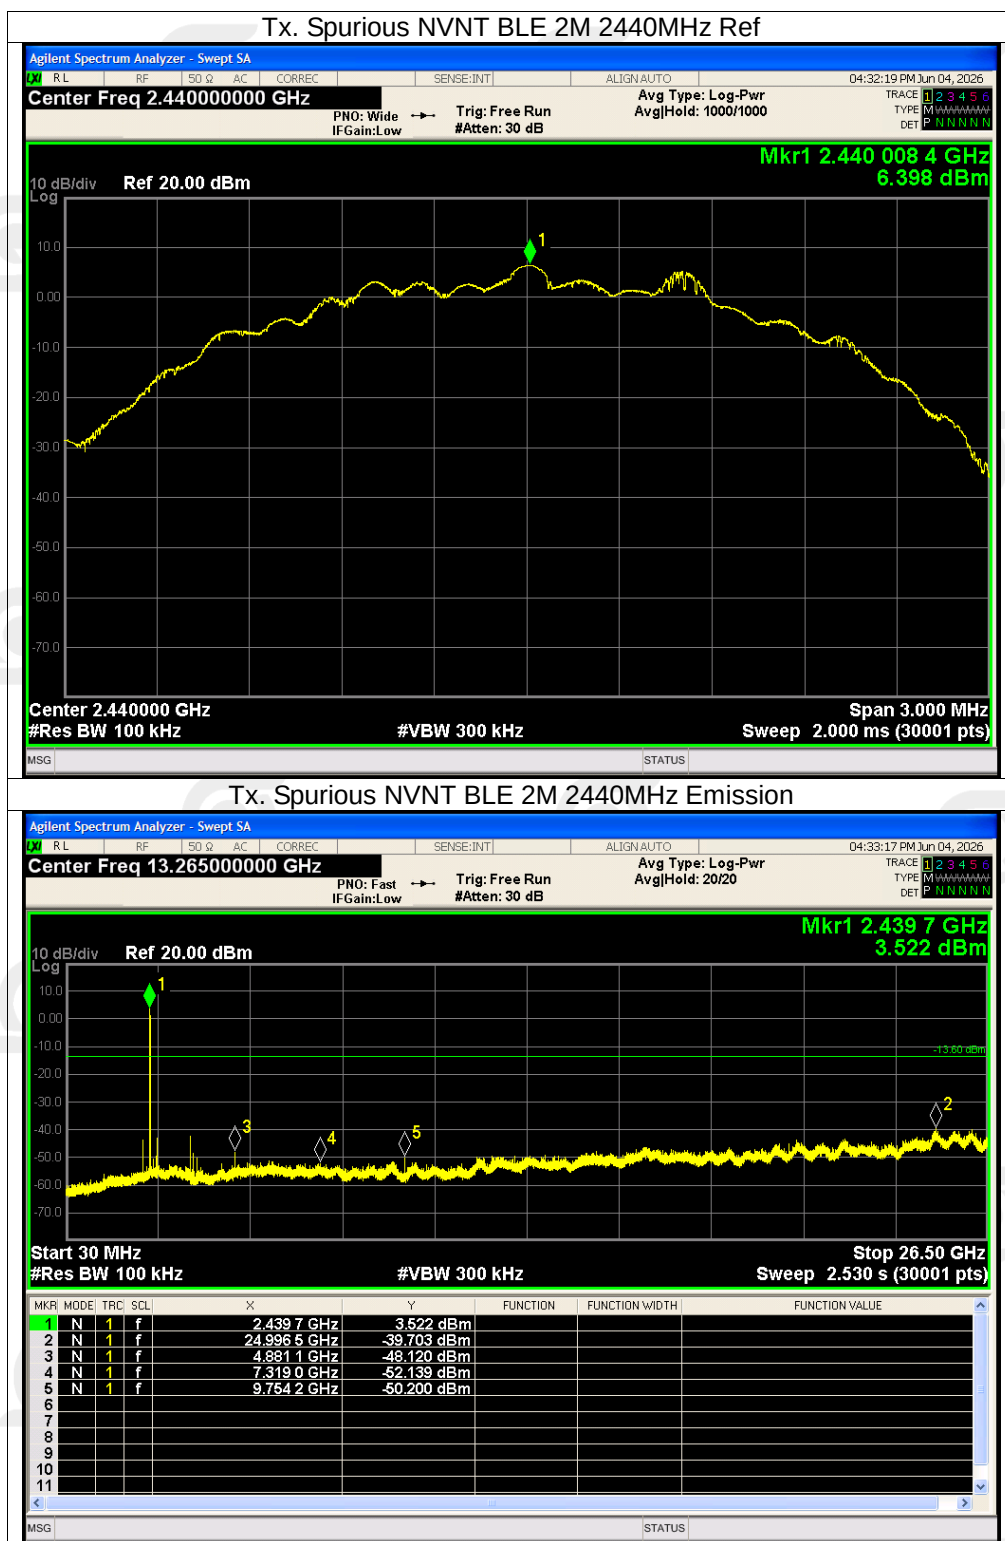

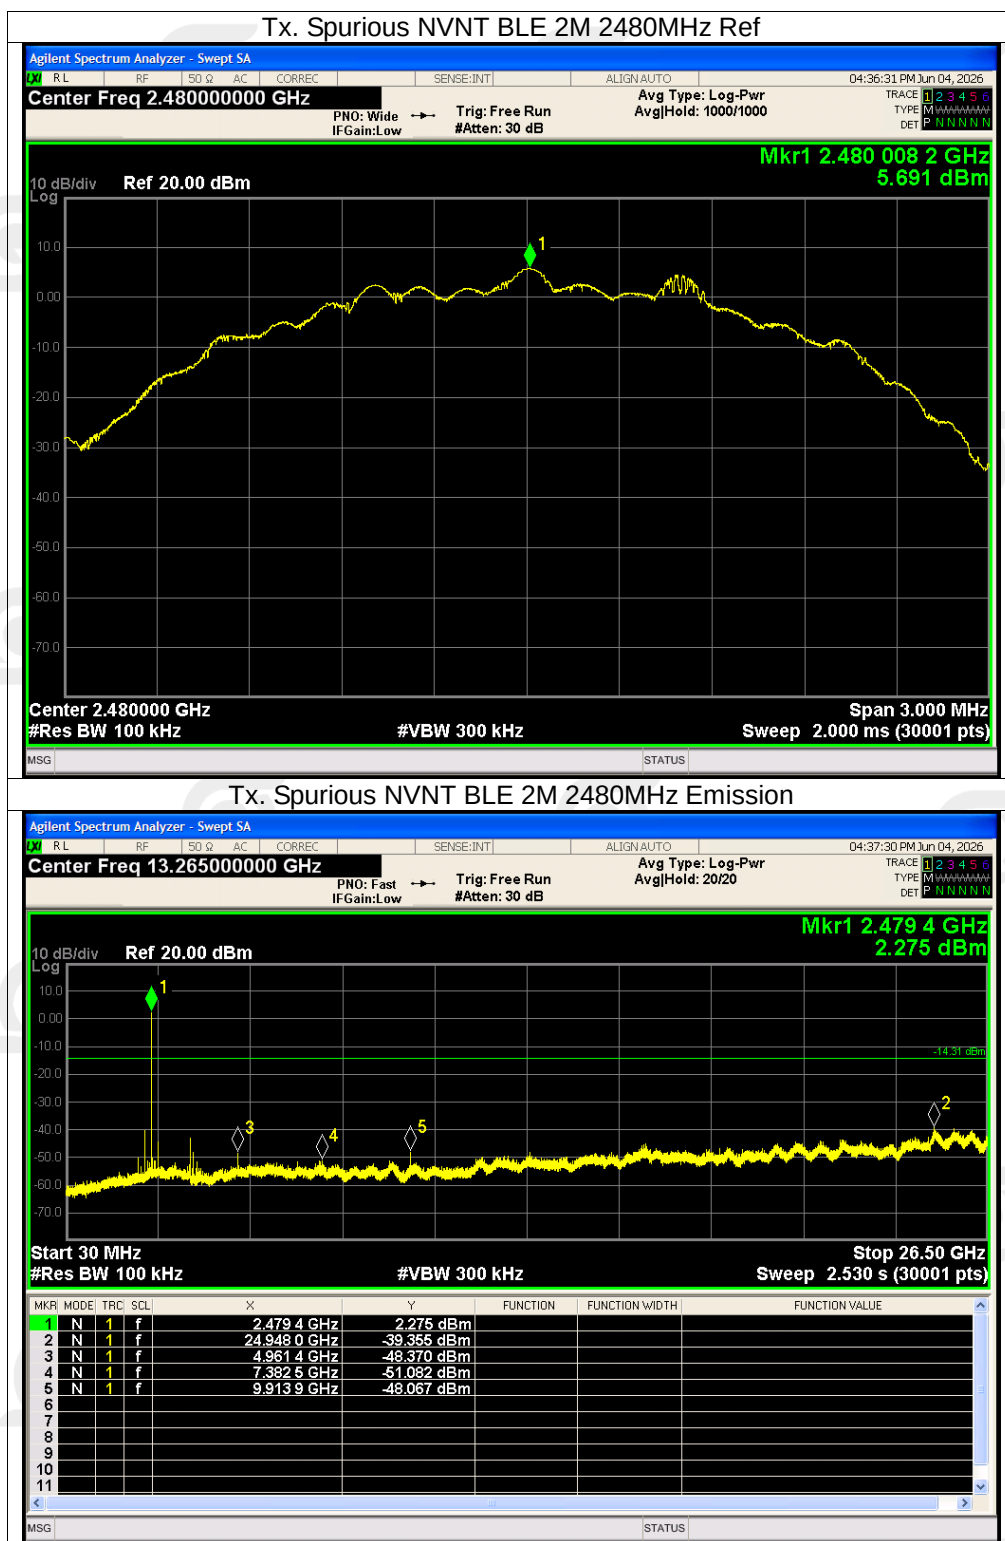

▶▶▶ END ◀◀◀