

Specification for Approval

CONTENTS

Customer:	N/A	Vendor:	N/A
Customer P/N:	N/A	HL P/N:	N/A
Product model:	HSELCQ_03_50MGF_7 2A	HL Device Name:	N/A
Pcb antenna brand:	Xusheng	Approval Date:	2025-9-24

Internal Approval		
Approved By:	Checked By:	Prepared By:
		Zhang Bin
Customer Approval		

Revision:

Date	Rev	Description of Changes
2024-9-22	A	Initial Release


1、Products Electrical

PCB Antenna



1	Antenna Model	PCB IFA Antenna
2	Frequency Range	2400-2500MHz
3	VSWR (or return loss)	<2 (<-9.5dB)
4	Broadband	>100MHz
5	Impedance	50 ohm
6	Gain	-1.2dBi
7	Polarization	LP


2、Antenna Test Data

2.1 VSWR (Return Loss)

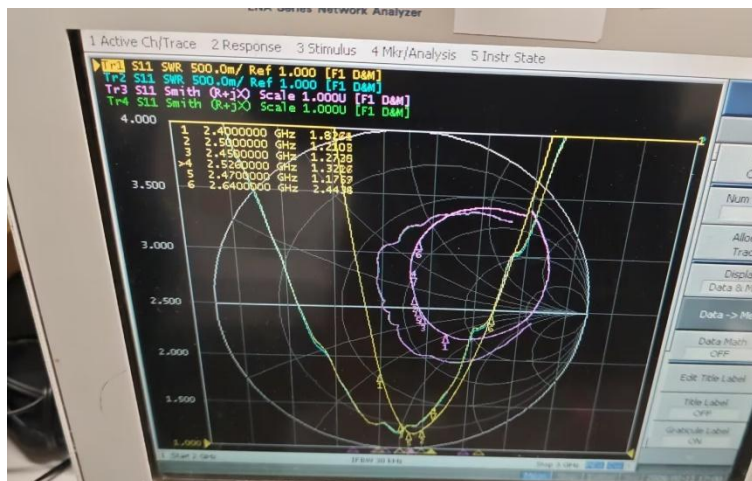

2.2 RADIATION PATTERNS 2450MHz

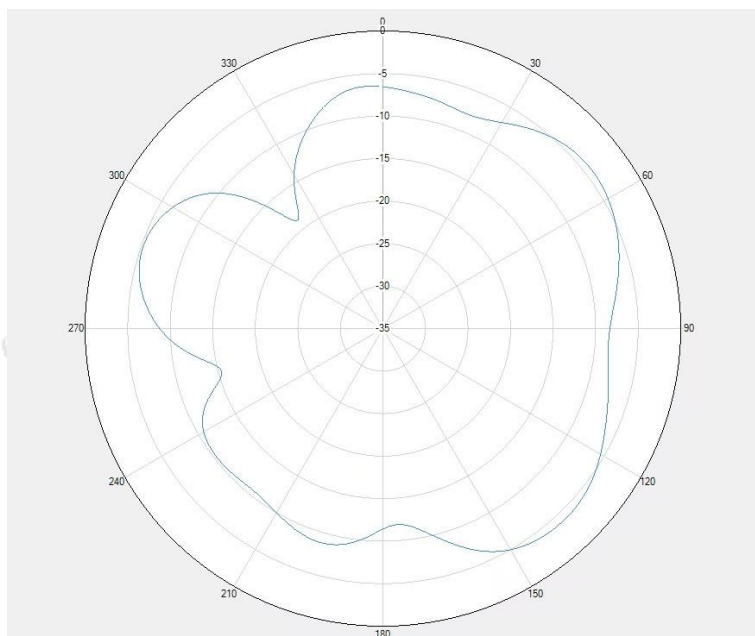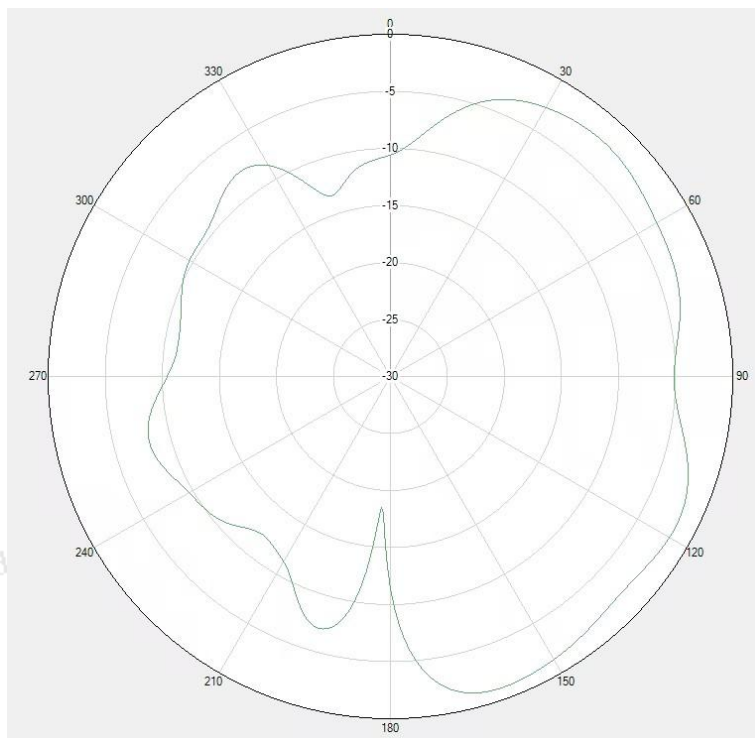

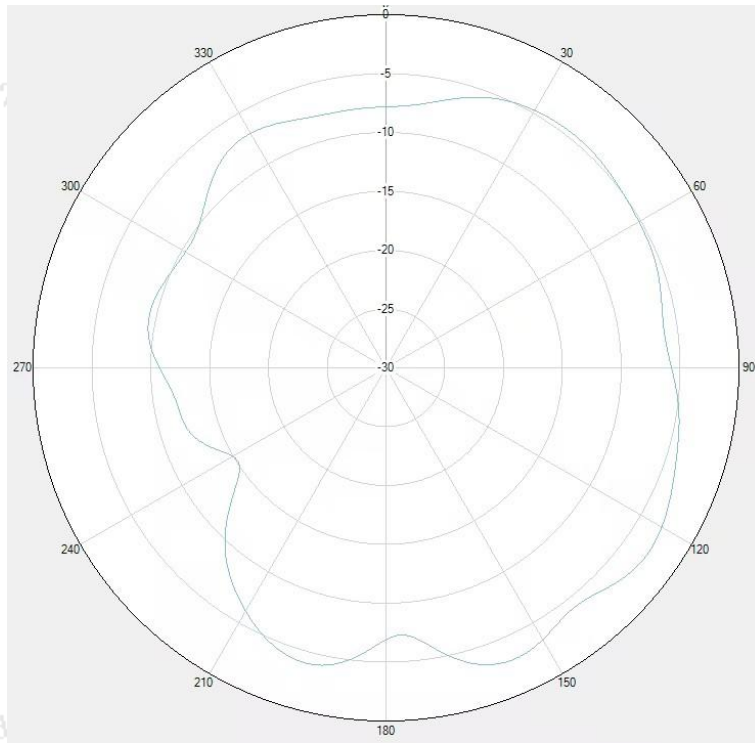

2.3 GAIN AND EFFICIENCY

Frequency (MHz)	Efficiency (%)	Gain (dBi)
2400	31.6	-1.4
2410	31.0	-1.4
2420	31.4	-1.6
2430	31.3	-1.4
2440	31.5	-1.4
2450	34.8	-1.2
2460	32.2	-1.4
2470	31.0	-1.5
2480	31.1	-1.3
2490	30.5	-1.6
2500	32.2	-1.2

3、PCB ANTENNA (MM)

