

HONANT

承 认 书

SPECIFICATION FOR APPROVAL

客户名称 Customer name:

产品机型 Product Model:

客户料號 Risuntek P/N:

版本 Version:

零件名称 Prodcut Name:

产品描述 Description:

日期 Date:

W30

2004-W30020FPCL

A1


W30-BT-FPC

Black W30-FPC-L electrolytic copper, half-to-half,
gold-plated 3M adhesive backing,
14.8*8.31*0.1MM (white silk-screened: LW30-A1)


2025-7-14

Manufacturer: Shenzhen Piesifen Technology Co., Ltd.
Address: Building 1, Factory, Second Floor, Tianxin Residents' Group,
Shangwu Community, Shenzhen Bao'an District

二、产品图纸

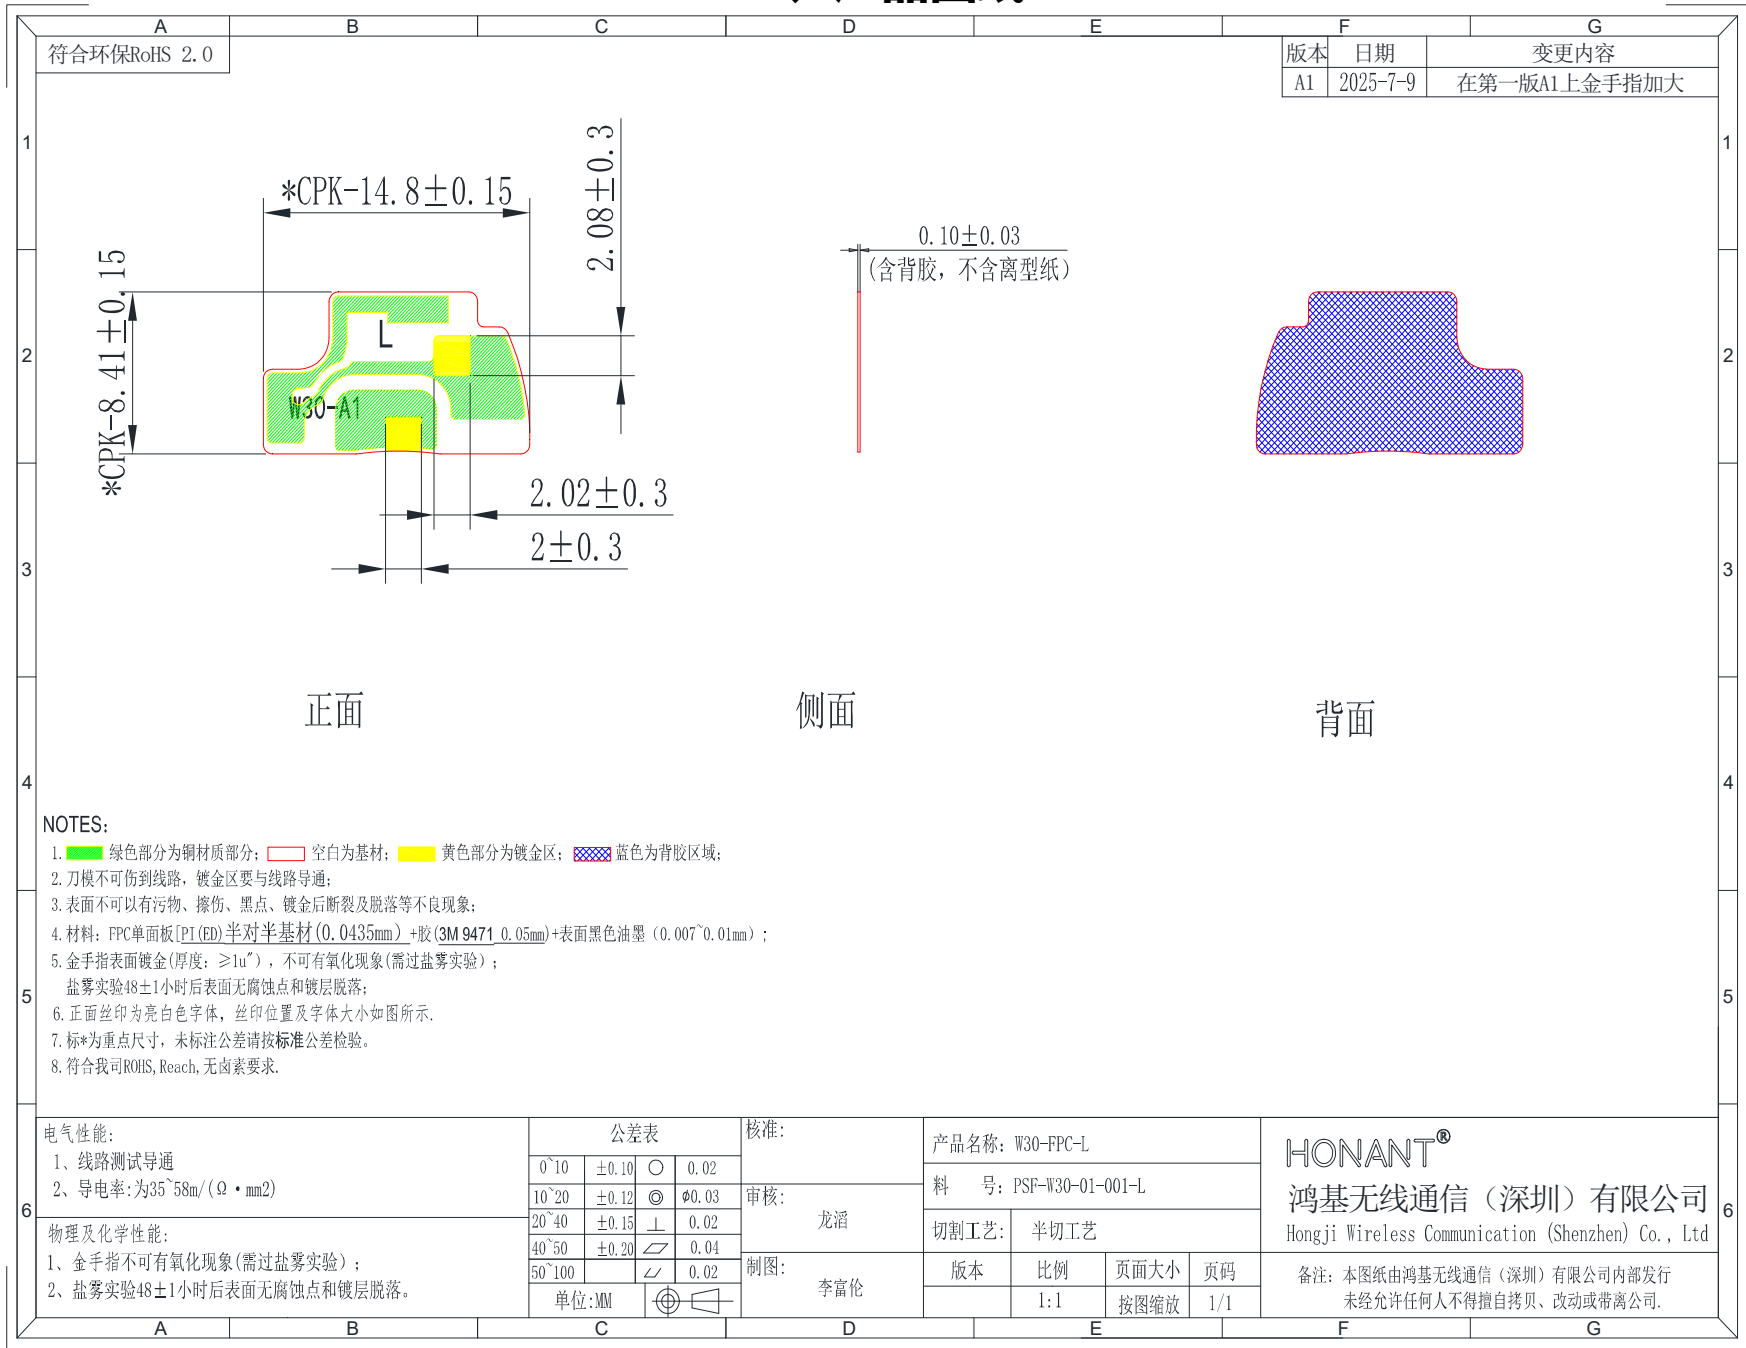


1、Matching circuit diagram

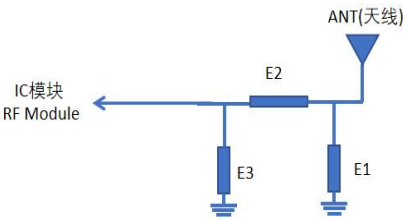

L		
Main Antenna		
Element		
E1(0201)	N/C	
E2(0201)	0Ω	
E3(0201)	3.6PF	

2.S11

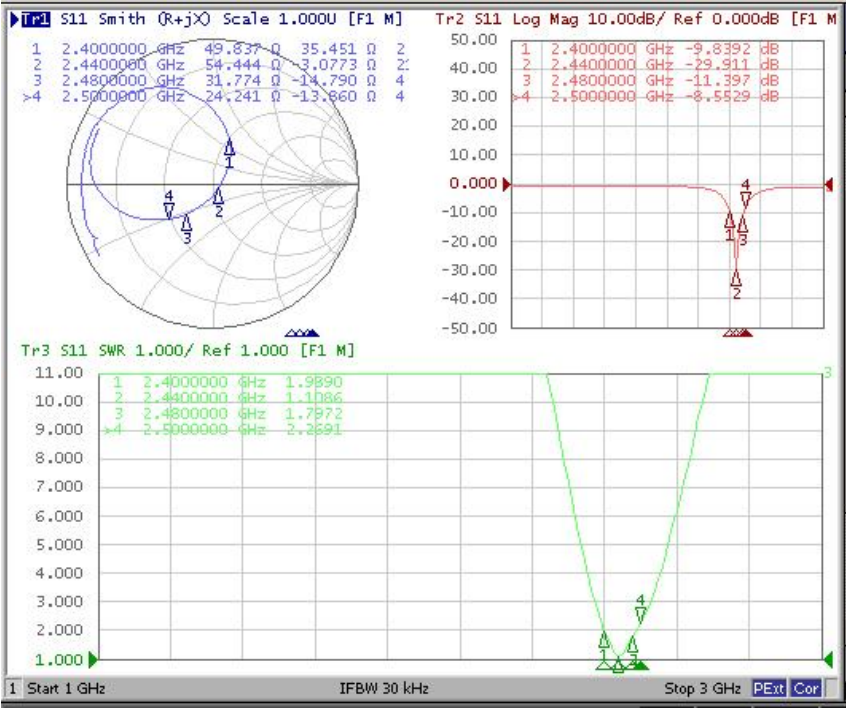

3. Passive efficiency

L-FS			
MHz	dBi	db	Effi
2400	-2.32	-8.17	15.24
2410	-1.91	-7.79	16.63
2420	-1.43	-7.26	18.8
2430	-1.29	-7.21	19.01
2440	-1.19	-7.4	18.19
2450	-0.98	-7.44	18.04
2460	-1.05	-7.63	17.28
2470	-1.14	-7.87	16.32
2480	-1.15	-7.95	16.03

