

	Conducted Emission Test Record	No.:	TR4-02
		Version:	2023.08.15

Work Number	P-CC26070315		
Test Standards	47 CFR Part 15 Subpart B		
EUT Name	Tablet	Model Name	Link 5
Serial Number	S06	Remark	N.A
Lab Name	Shenzhen BALUN Technology Co., Ltd.		
Lab Address	1/F, Building B, Ganghongji High-Tech Intelligent Industrial Park, No.1008, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong Province, P. R. China		

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038B	MY61380132	2025.12.26	2026.12.25	☒
LISN	SCHWARZBECK	NSLK 8127	01009	2026.06.22	2027.06.21	☒
Shielded Room	YiHeng Electronic Co., Ltd	/	235	2024.11.05	2027.11.04	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.4 en	/		☒

Test Data:

Worst Mode:Mode 2


1) AC Ports - L Phase

Project Number: P-CC26070315

Test Time: 2026-07-22_19.49.04

EUT Name:	Tablet	Temp.(°C):	21.9
Model Number:	Link 5	Humidity (%RH):	46
Sample Number:	S06	Pressure(kPa):	100.3
Test Standard:	47 CFR Part 15 Subpart B	Work Mode:	Rear Camear
Test Site:	Conducted Emission Room	Remark1:	120V+Adapte-A06+Cable-A07+ 3.5mm Earphone
Test Engineer:	Zhong Pingqi	Remark2:	N.A

CE Test case_CE_CE_EN 55032_Class B

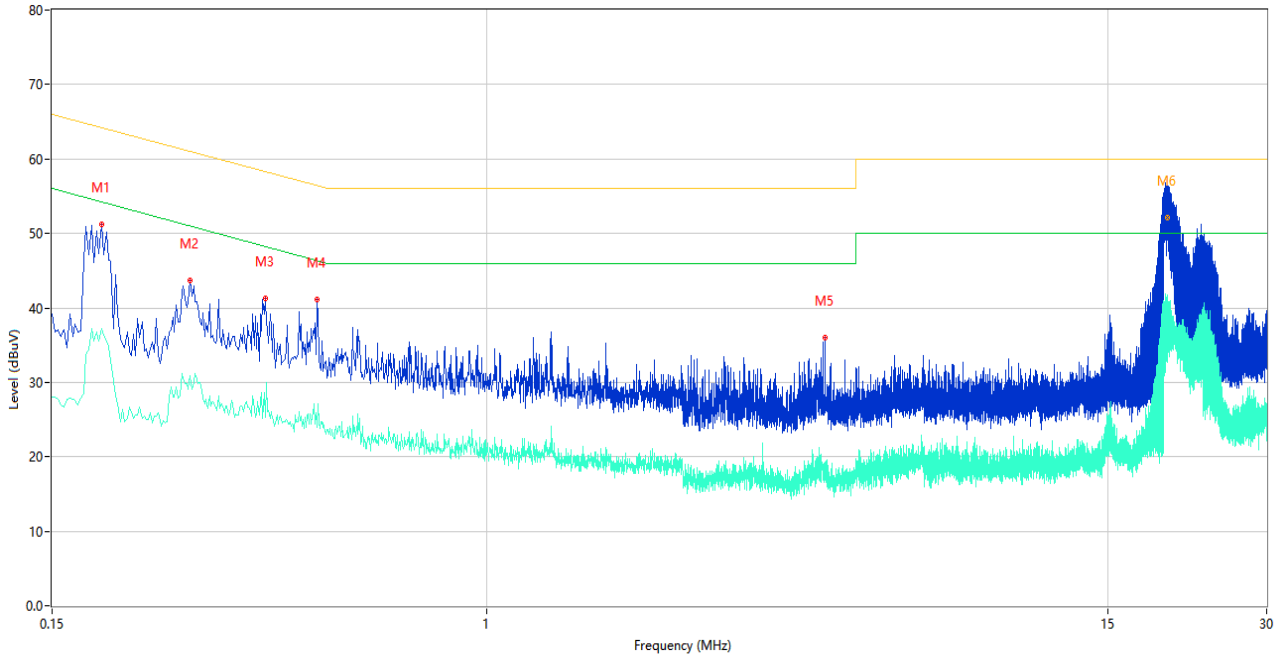

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.186	51.15	10.23	64.21	13.06	Peak	L	Pass
1**	0.186	37.26	10.23	54.21	16.95	AV	L	Pass
2	0.274	43.70	10.23	61.00	17.30	Peak	L	Pass
2**	0.274	30.96	10.23	51.00	20.04	AV	L	Pass
3	0.380	41.32	10.24	58.28	16.96	Peak	L	Pass
3**	0.380	25.26	10.24	48.28	23.02	AV	L	Pass
4	0.476	41.08	10.25	56.41	15.33	Peak	L	Pass
4**	0.476	23.97	10.25	46.41	22.44	AV	L	Pass

	Conducted Emission Test Record	No.:	TR4-02
		Version:	2023.08.15

5	4.376	35.94	10.96	56.00	20.06	Peak	L	Pass
5**	4.376	19.15	10.96	46.00	26.85	AV	L	Pass
6	19.418	58.23	14.93	60.00	1.77	Peak	L	Pass
6*	19.418	52.11	14.93	60.00	7.89	QP	L	Pass
6**	19.418	33.20	14.93	50.00	16.80	AV	L	Pass


2) AC Ports – N Phase

Project Number: P-CC26070315

Test Time: 2026-07-22_19.47.06

EUT Name:	Tablet	Temp.(°C):	21.9
Model Number:	Link 5	Humidity (%RH):	46
Sample Number:	S06	Pressure(kPa):	100.3
Test Standard:	47 CFR Part 15 Subpart B	Work Mode:	Rear Camear
Test Site:	Conducted Emission Room	Remark1:	120V+Adapte-A06+Cable-A07+ 3.5mm Earphone
Test Engineer:	Zhong Pingqi	Remark2:	N.A

CE Test case_CE_CE_EN 55032_Class B

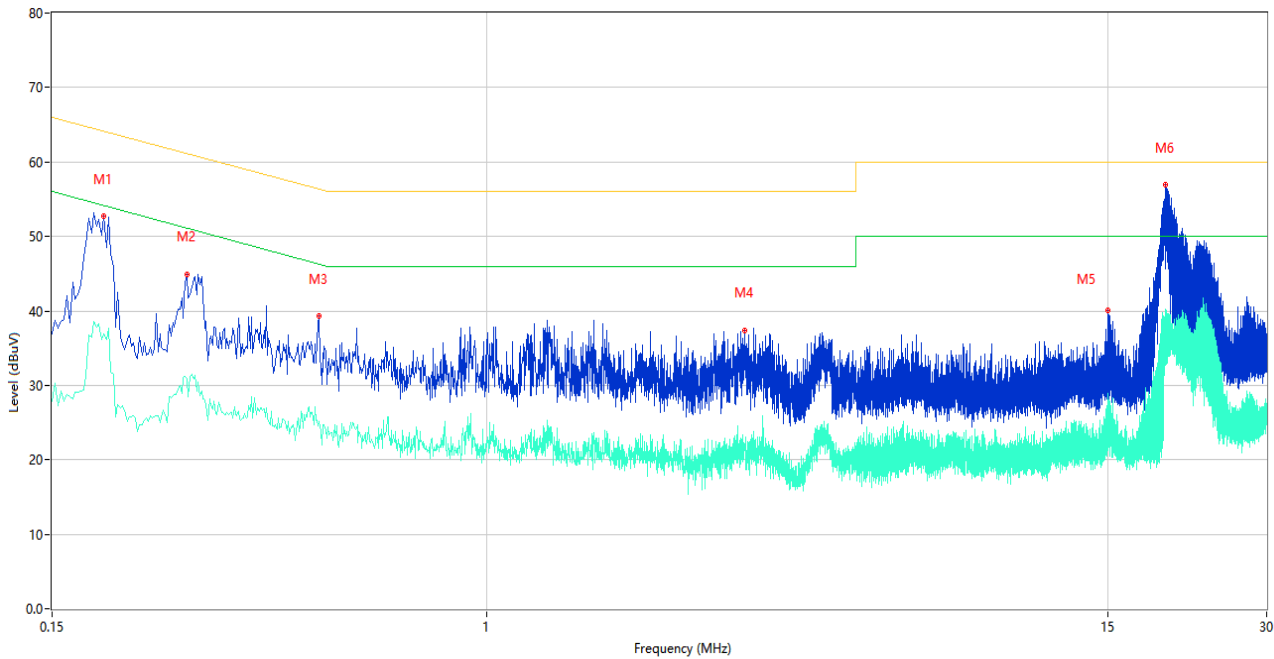

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.188	52.76	10.22	64.12	11.36	Peak	N	Pass
1**	0.188	36.98	10.22	54.12	17.14	AV	N	Pass
2	0.270	44.97	10.22	61.12	16.15	Peak	N	Pass
2**	0.270	30.83	10.22	51.12	20.29	AV	N	Pass
3	0.480	39.39	10.23	56.34	16.95	Peak	N	Pass
3**	0.480	25.18	10.23	46.34	21.16	AV	N	Pass
4	3.076	37.42	10.61	56.00	18.58	Peak	N	Pass
4**	3.076	21.28	10.61	46.00	24.72	AV	N	Pass
5	15.034	40.12	13.87	60.00	19.88	Peak	N	Pass
5**	15.034	28.16	13.87	50.00	21.84	AV	N	Pass
6	19.310	56.94	14.99	60.00	3.06	Peak	N	Pass

	Conducted Emission Test Record	No.:	TR4-02
		Version:	2023.08.15

6**	19.310	36.55	14.99	50.00	13.45	AV	N	Pass
-----	--------	-------	-------	-------	-------	----	---	------

Test Engineer

Zhong Pingqi

Checked By/Date

Li JunFeng

2026.07.22

--BLANK BELOW--