



RF Exposure Evaluation

FCC ID:2BTGC-V2207

Applicant Name..... : Shenzhen Moni Technology Co., LTD

Address..... : Room 201-301, Factory Building A7, Quanbao Industrial Zone, Shiyan
Sub-district, Bao 'an District, Shenzhen City, China

Manufacturer Name..... : Shenzhen Moni Technology Co., LTD

Address..... : Room 201-301, Factory Building A7, Quanbao Industrial Zone, Shiyan
Sub-district, Bao 'an District, Shenzhen City, China

Product..... : Multi Function Wireless Charging Station

Model(s)..... : V2207

Additional Model(s)..... : /

Trademark..... : /

Model Difference..... : The product has different colored shells, and this test used EUT with
silvery white shells. the test data of EUT with silvery white shell can
represent the remaining colors.

Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai
Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Date of Receipt..... : Apr. 1, 2026

Date of Test(s)..... : Apr. 1, 2026-Apr. 21, 2026

Date of Issue..... : Apr. 21, 2026

Test Requested..... : Select test(s) as requested by the client.

Test Standard(s)..... : KDB 680106 D01 Wireless Power Transfer v04

In the configuration tested, the EUT complied with the standards specified above.

Prepared by:

Kimi Lu

Kimi Lu/ Engineer

Reviewed by:

Baret Wu

Baret Wu/ Director

Approved by:

Levi Lee

Levi Lee/ Manager

Note: The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report shall not be reproduced except in full, without prior written approval of ZHT. This document may be altered or revised by ZHT, personnel only, and shall be noted in the revision of the document.



TABLE OF CONTENTS

PAGE

1. GENERAL INFORMATION	3
1.1. GENERAL DESCRIPTION OF EUT	3
1.2. TEST MODES	4
1.3. AUXILIARY EQUIPMENT	4
2. RF EXPOSURE TEST	5
2.1. MEASURING STANDARD	5
2.2. REQUIREMENTS	5
2.3. LIMITS	5
2.4. TEST SETUP	6
2.5. TEST PROCEDURE	6
2.6. MEASUREMENT UNCERTAINTY	6
2.7. TEST INSTRUMENTS LIST	7
2.8. TEST RESULT	7
2.9. TEST PHOTOS	8

1. GENERAL INFORMATION

1.1. GENERAL DESCRIPTION OF EUT

Product Name:	Multi Function Wireless Charging Station
Test Model No.:	V2207
Hardware version:	V1.0
Software version:	V1.0
Operation Frequency:	Phone: 115-247 kHz Earbuds: 115-247 kHz Watch: 320-330 KHz
Modulation type:	ASK
Antenna Type:	Inductive loop coil Antenna
Antenna gain:	0dBi
Power supply:	Input : DC 9 V/2.2 A Phone output: 5 W/7.5 W/10 W/15 W Earbuds output: 5 W Watch: 2.5 W
Sample Number:	260401128YP001
Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Guangdong Zhonghan Testing Technology Co., Ltd. does not assume any responsibility.	

1.2. TEST MODES

Test Modes:	
Mode 1	AC Mains + Phone charging port + Earbuds charging port + Watch charging port -(Battery Status:≤1%)
Mode 2	AC Mains + Phone charging port + Earbuds charging port + Watch charging port -(Battery Status:50%)
Mode 3	AC Mains + Phone charging port + Earbuds charging port + Watch charging port -(Battery Status:≥98%)
Mode 4	AC Mains + Phone charging port(Battery Status:≤1%)
Mode 5	AC Mains + Phone charging port(Battery Status:50%)
Mode 6	AC Mains + Phone charging port(Battery Status:≥98%)
Mode 7	AC Mains + Watch charging port(Battery Status:≤1%)
Mode 8	AC Mains + Watch charging port(Battery Status:50%)
Mode 9	AC Mains + Watch charging port(Battery Status:≥98%)
Mode 10	AC Mains + Earbuds charging port(Battery Status:≤1%)
Mode 11	AC Mains + Earbuds charging port(Battery Status:50%)
Mode 12	AC Mains + Earbuds charging port(Battery Status:≥98%)
Mode 13	Standby
Note: All modes were tested, only the worst-case was recorded in the report. Mode 1 is the worst mode.	

1.3. AUXILIARY EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC Adapter	iforg	191106C	/	AE
2	Mobile phone	Xiaomi Communications Co., Ltd.	Xiaomi 13	/	AE
3	Earphone	Apple Inc.	A2031	/	AE
4	Apple watch	Apple Inc.	ultra 2	/	AE

2. RF EXPOSURE TEST

2.1. MEASURING STANDARD

KDB 680106 D01 Wireless Power Transfer v04

2.2. REQUIREMENTS

According to the item 5 of KDB 680106 D01 v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

Requirements of section 3 of KDB 680106 D01	Yes/ No	Description
Mobile Device and Portable Device Configurations	Yes	Mobile Device
Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz	Yes	The device operate in the frequency range 115-247 kHz, 320-330 kHz.
RF Exposure compliance may be ensured only for a minimum conditions at smaller distances can still be considered unlikely.separation distance that is greater than 20 cm, while use	Yes	The EUT H-field and E-field strengths at 20 cm surrounding the device.

2.3. LIMITS

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)


Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
 * =Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

2.4. TEST SETUP

For mobile exposure conditions:

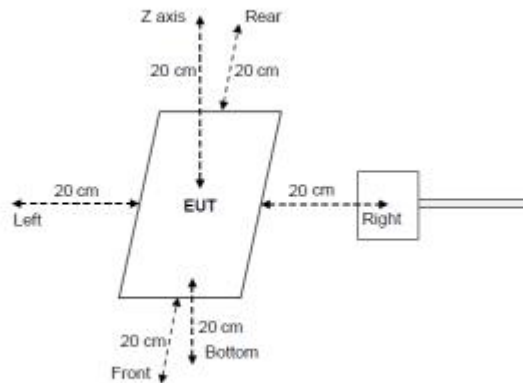

2.5. TEST PROCEDURE

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (20 cm from all sides and 20 cm from the top) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v04.

Remark: The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

2.6. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	H-field	0.7dB
2	E-field	1.06dB

Decision Rule

- ☒ Uncertainty is not included
☐ Uncertainty is included

2.7. TEST INSTRUMENTS LIST



Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
Near-field Electric and Electric Field Sensor System	Schmid & Partner Engineering AG	MAGPy-8H3D+E3D V2	3127	September 09, 2025	September 08, 2026
Near-field Electric and Electric Field Sensor System	Schmid & Partner Engineering AG	MAGPy-DASV2	3121	September 09, 2025	September 08, 2026

2.8. TEST RESULT

We have evaluated mode 1 to mode 13 and the worst mode 1 is showed in this report.

Test Mode	Test Position A (A/m)	Test Position B (A/m)	Test Position C (A/m)	Test Position D (A/m)	Test Position E (A/m)	50% Limits (A/m)	Limits (A/m)	test result
Mode 1	0.02	0.02	0.02	0.02	0.04	0.815	1.63	PASS
Test Mode	Test Position A (V/m)	Test Position B (V/m)	Test Position C (V/m)	Test Position D (V/m)	Test Position E (V/m)	50% Limits (V/m)	Limits (V/m)	test result
Mode 1	0.97	2.37	1.52	1.82	0.70	307	614	PASS

2.9. TEST PHOTOS

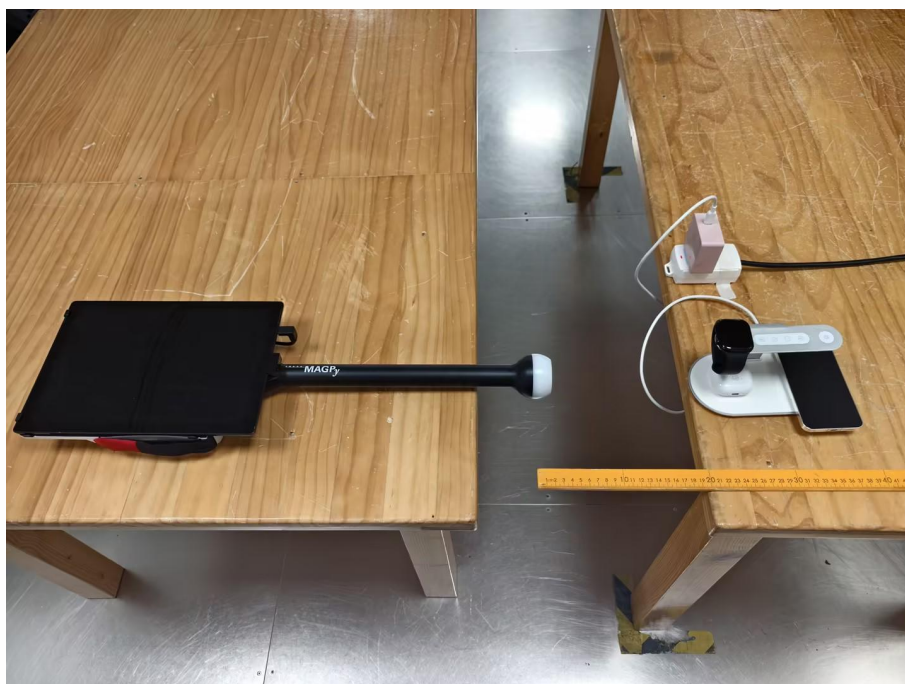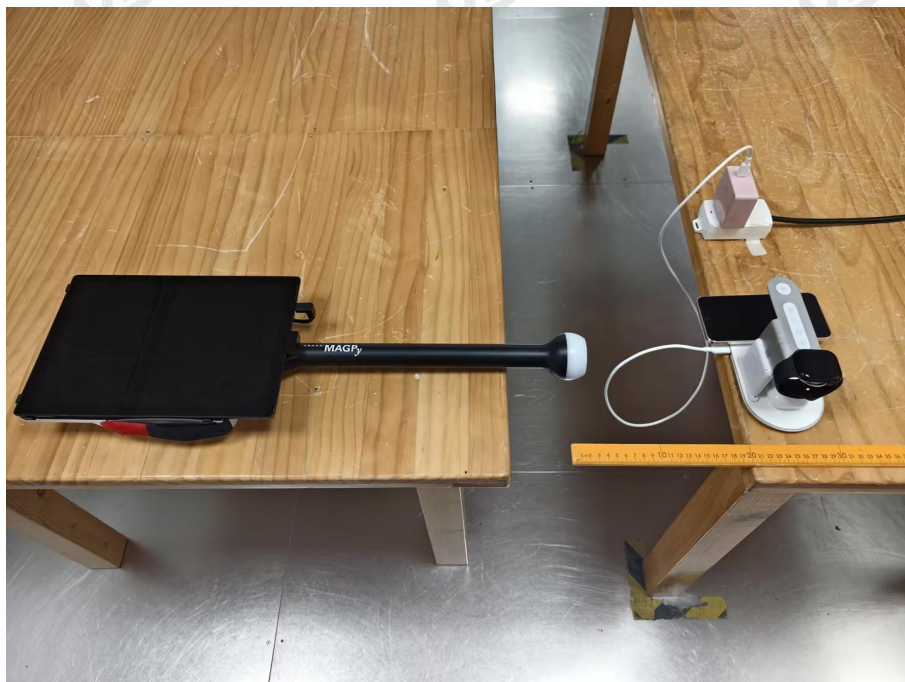





***** END OF REPORT *****