


Inverted FAntenna Specification

Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-1.28	-0.77	-0.59	-5.12	-2.32	-1.89
MAX. Gain	-0.59dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	38.8mm					
Manufacture	SHENZHEN KANGTAISHUO TECHNOLOGY CO.,LTD					


Building 1, Cuiling Huating, Mintai Community, Minzhi Street,
Longhua District, Shenzhen

Antenna Photo & Length

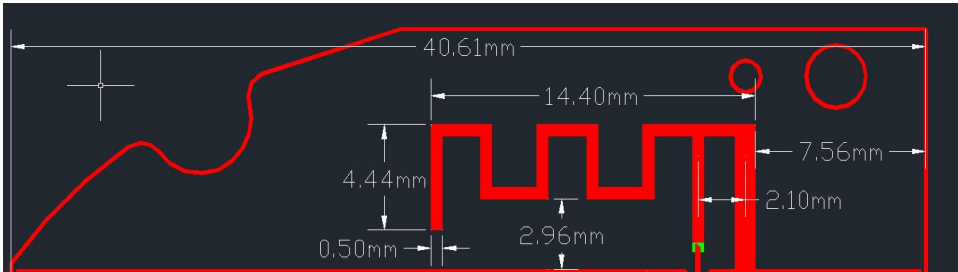

(mm)Horizontal: 2400 MHz 2450 MHz 2500 MHz
Power (dBm)


Max: 0 Min: -40 Scale: 5/div

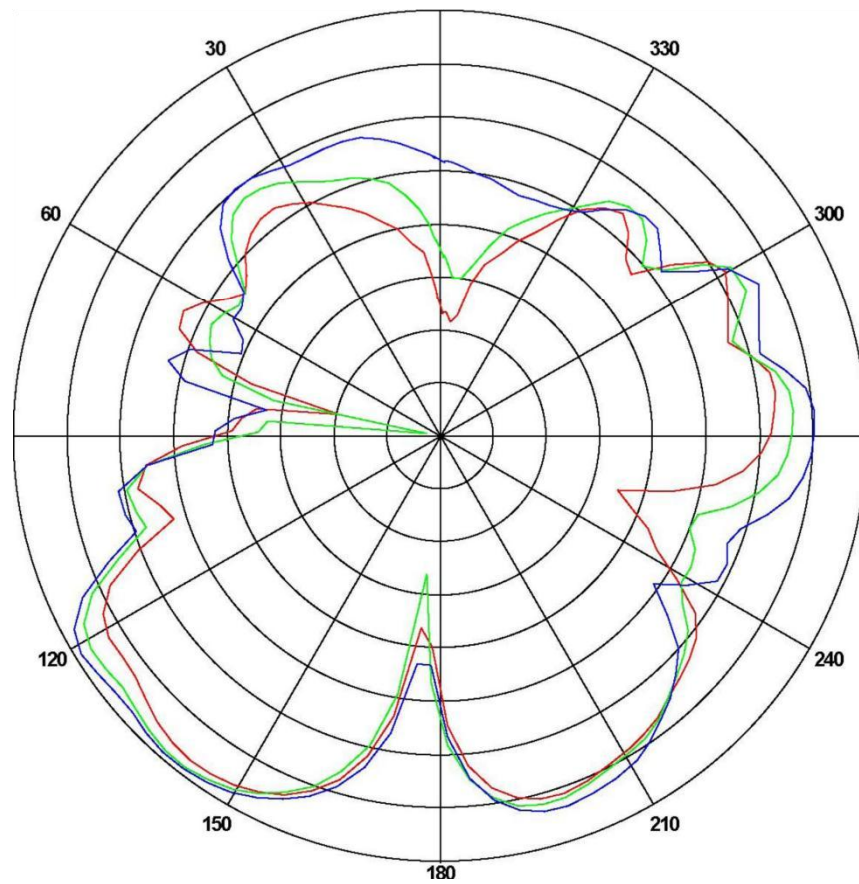

Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-1.261823	-30.0379	-7.18613
2450	-0.766724	-36.5807	-7.482734
2500	-0.587925	-22.0379	-6.590891


Vertical: 2400 MHz 2450 MHz 2500 MHz
Power (dBm)

Max: 0 Min: -30 Scale: 5/div

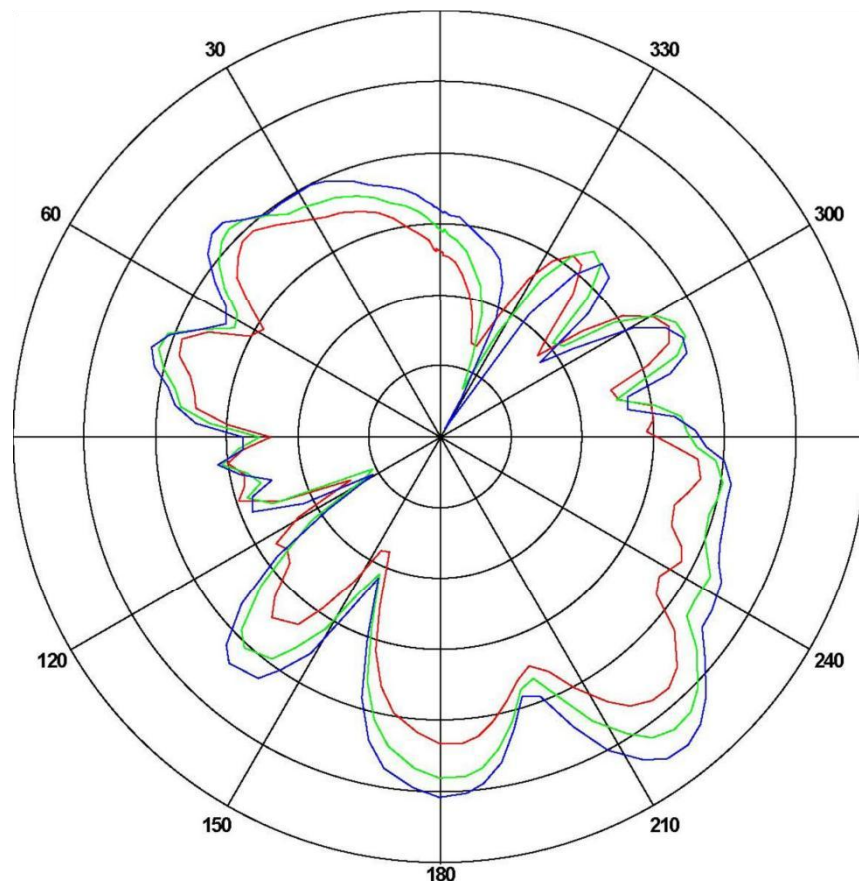


Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-5.2519	-22.1426	-12.4289
2450	-2.4604	-24.5876	-10.4716
2500	-1.86116	-29.5219	-9.2036

1.1 2400MHz

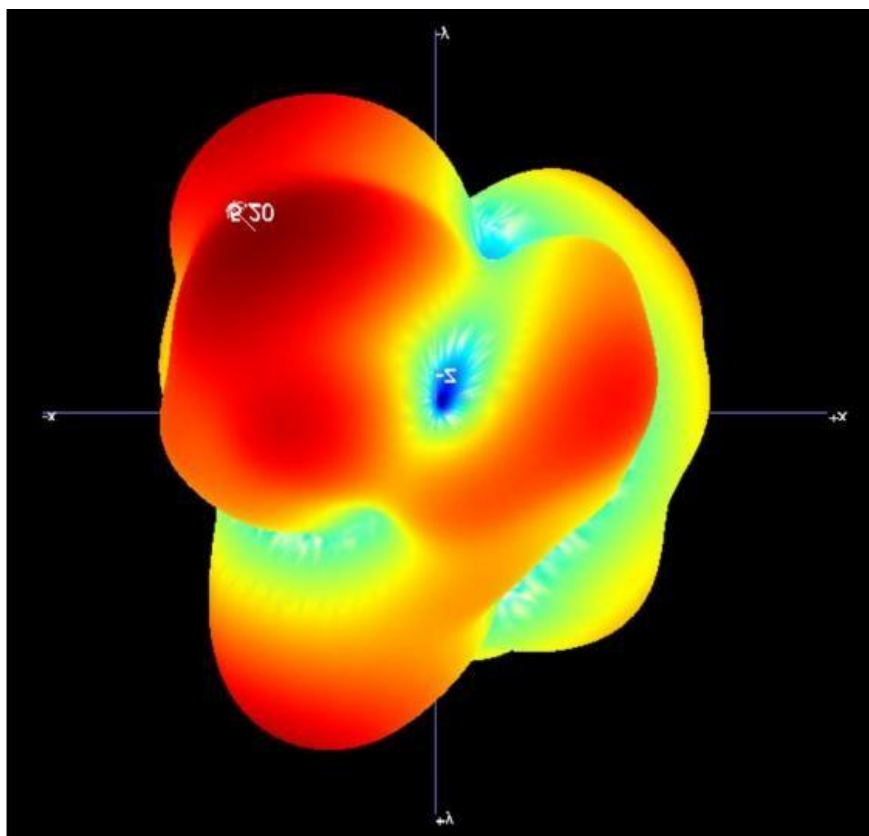

1.2 2440MHz

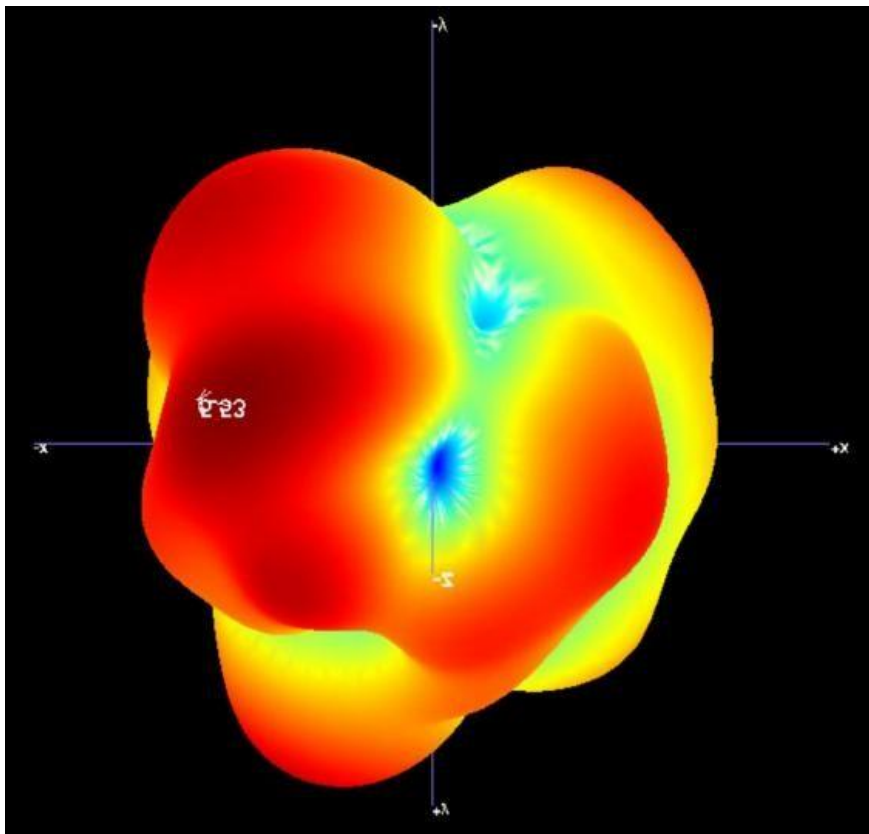

1.3 2483.5MHz

