









Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	1-DH5	2402	0.968
NVNT	1-DH5	2441	0.967
NVNT	1-DH5	2480	0.951
NVNT	2-DH5	2402	1.212
NVNT	2-DH5	2441	1.234
NVNT	2-DH5	2480	1.266
NVNT	3-DH5	2402	1.196
NVNT	3-DH5	2441	1.208
NVNT	3-DH5	2480	1.22

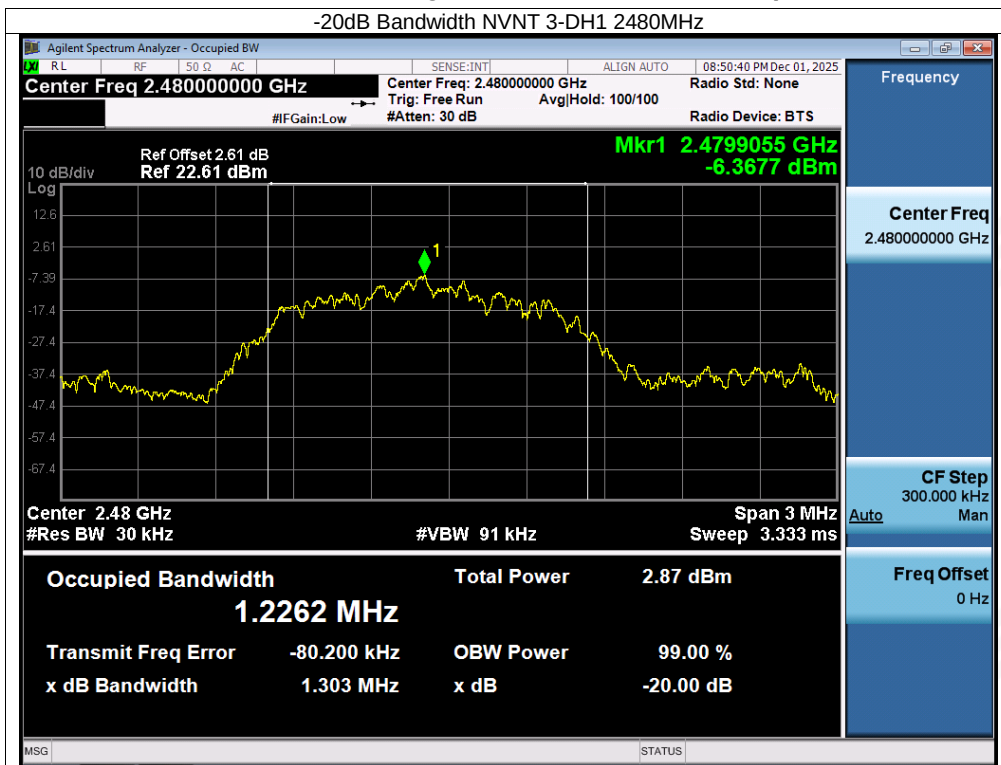

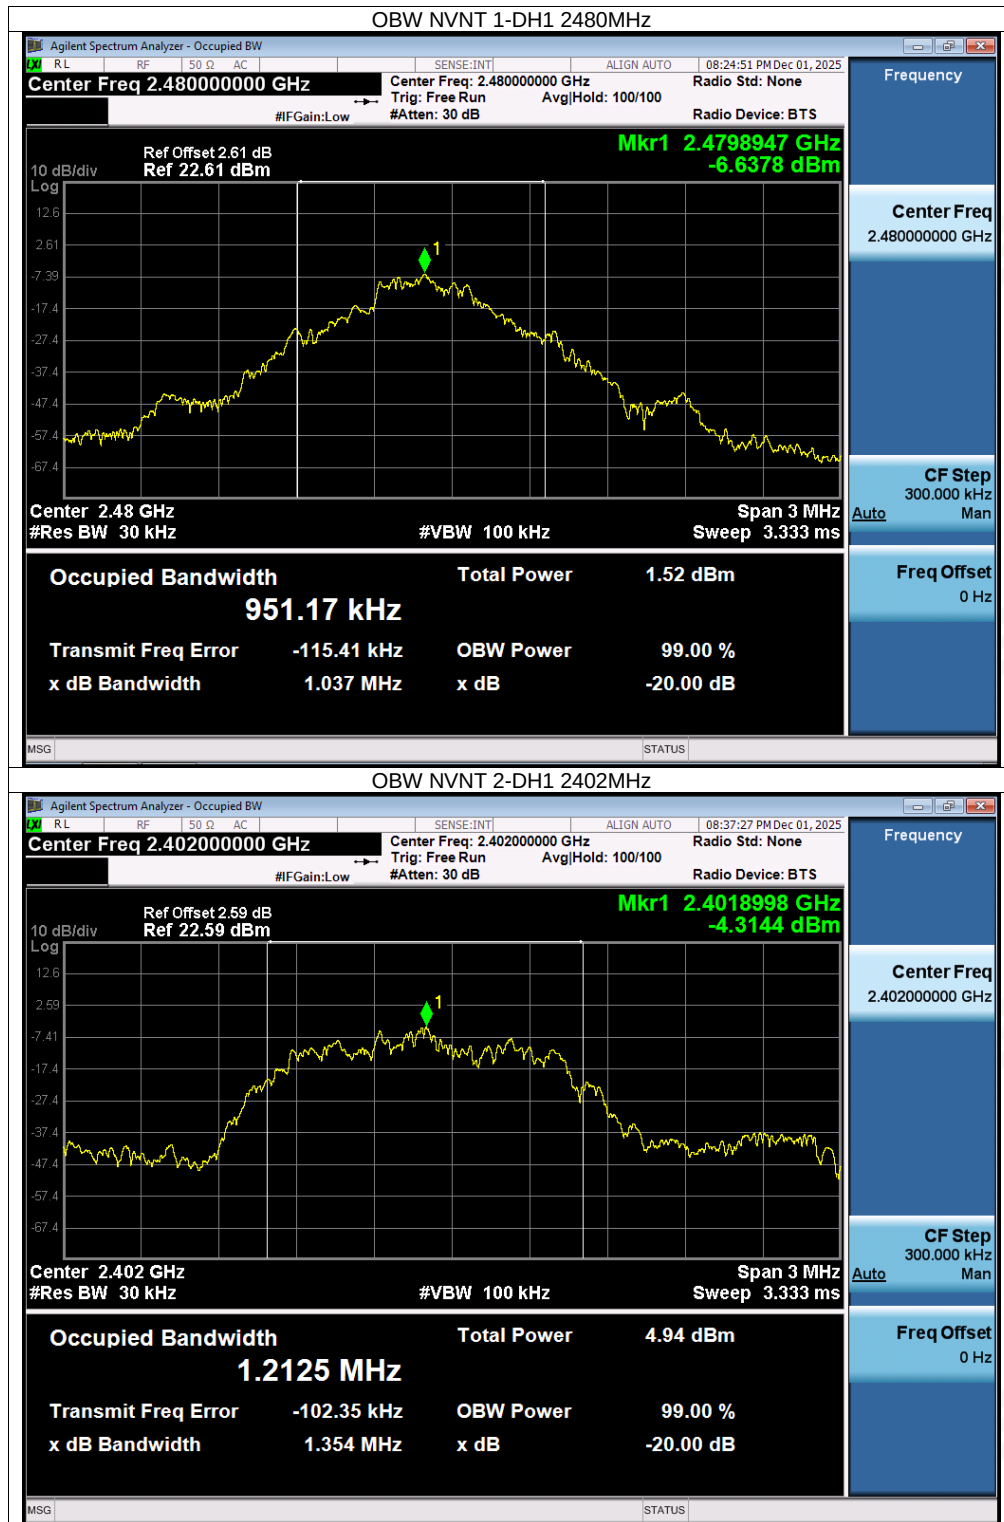

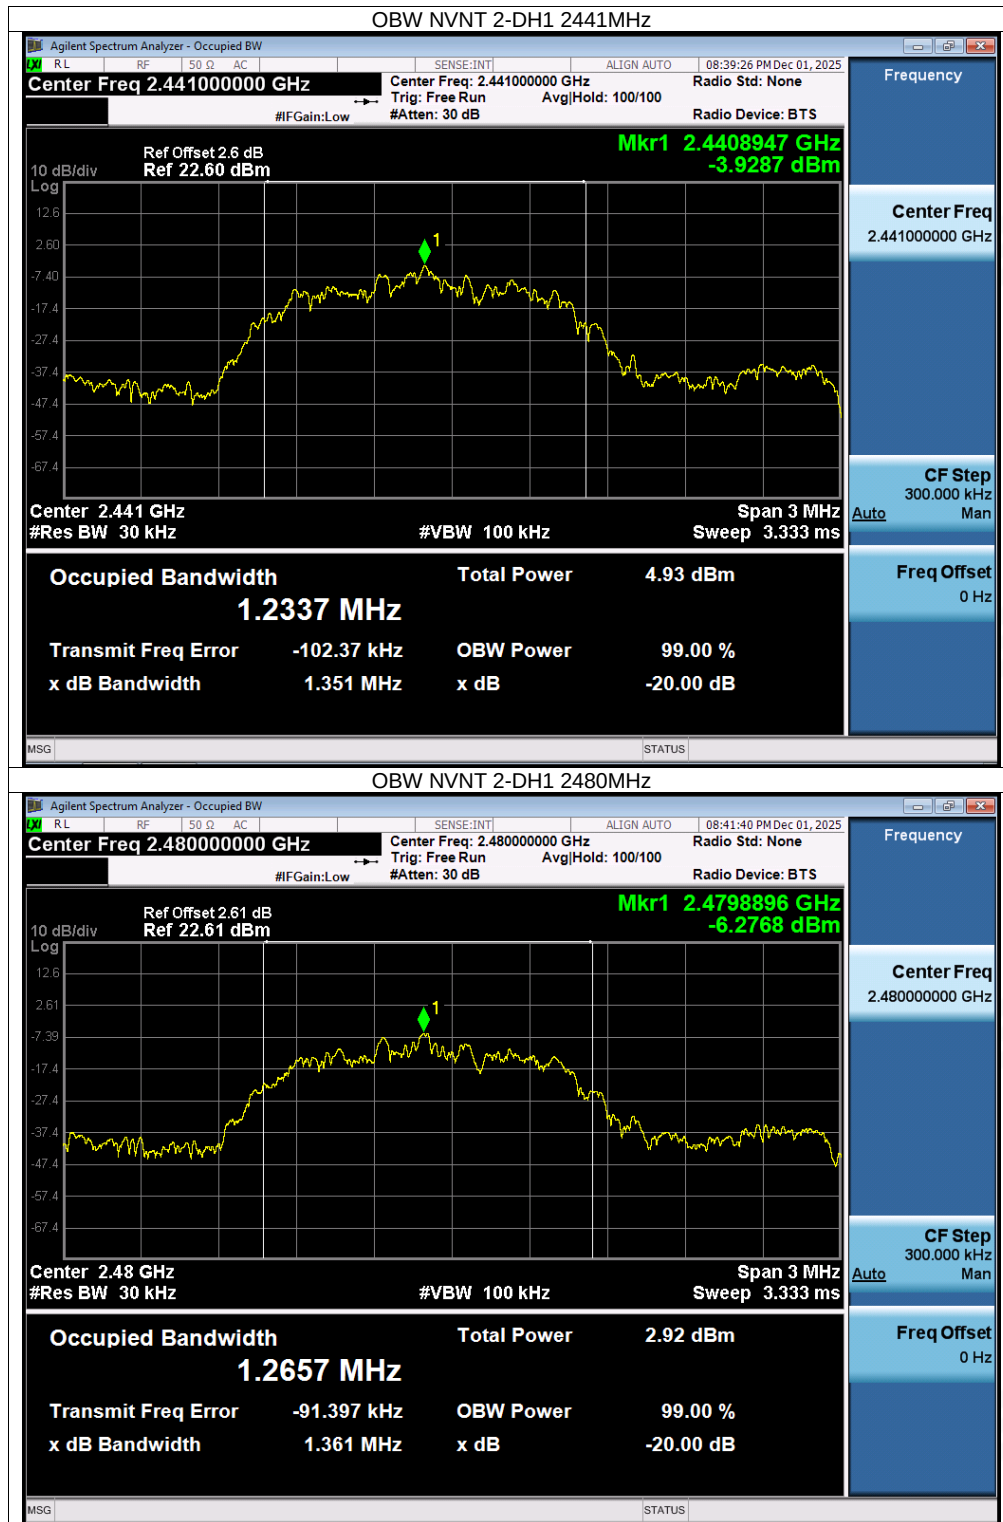

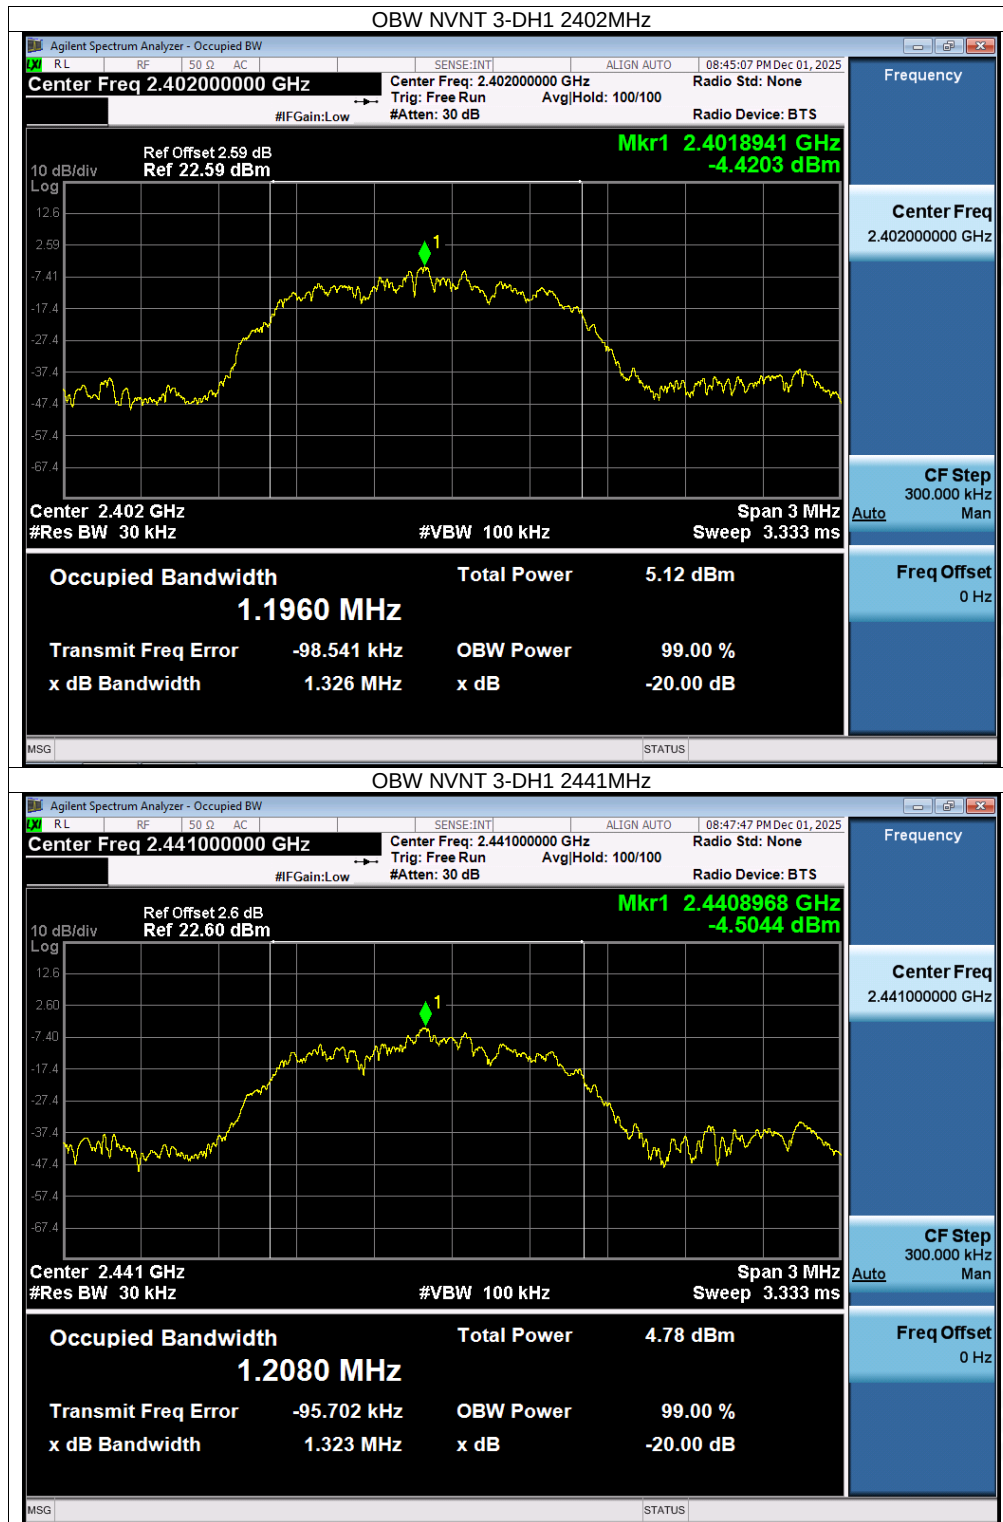

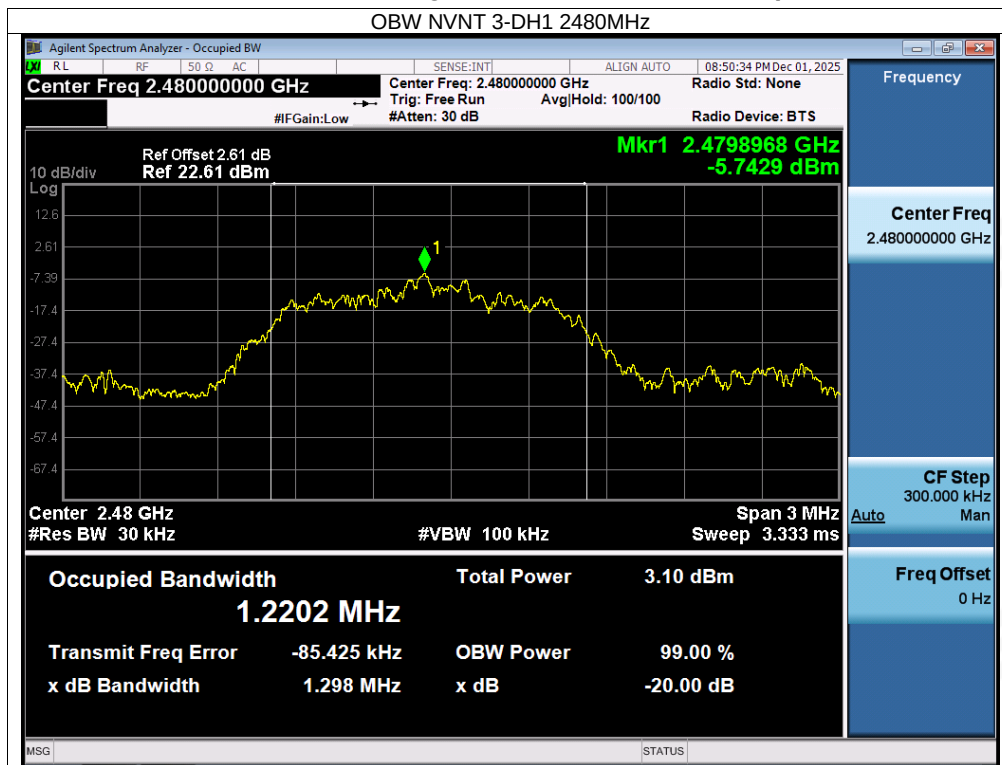





Carrier Frequencies Separation


Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	2401.892	2402.89	0.998	0.696	Pass
NVNT	1-DH5	2440.89	2441.89	1	0.701	Pass
NVNT	1-DH5	2478.896	2479.896	1	0.695	Pass
NVNT	2-DH5	2401.89	2402.89	1	0.895	Pass
NVNT	2-DH5	2440.892	2441.892	1	0.893	Pass
NVNT	2-DH5	2478.894	2479.896	1.002	0.881	Pass
NVNT	3-DH5	2401.888	2402.89	1.002	0.871	Pass
NVNT	3-DH5	2440.892	2441.892	1	0.889	Pass
NVNT	3-DH5	2478.896	2479.894	0.998	0.869	Pass





Test Graphs

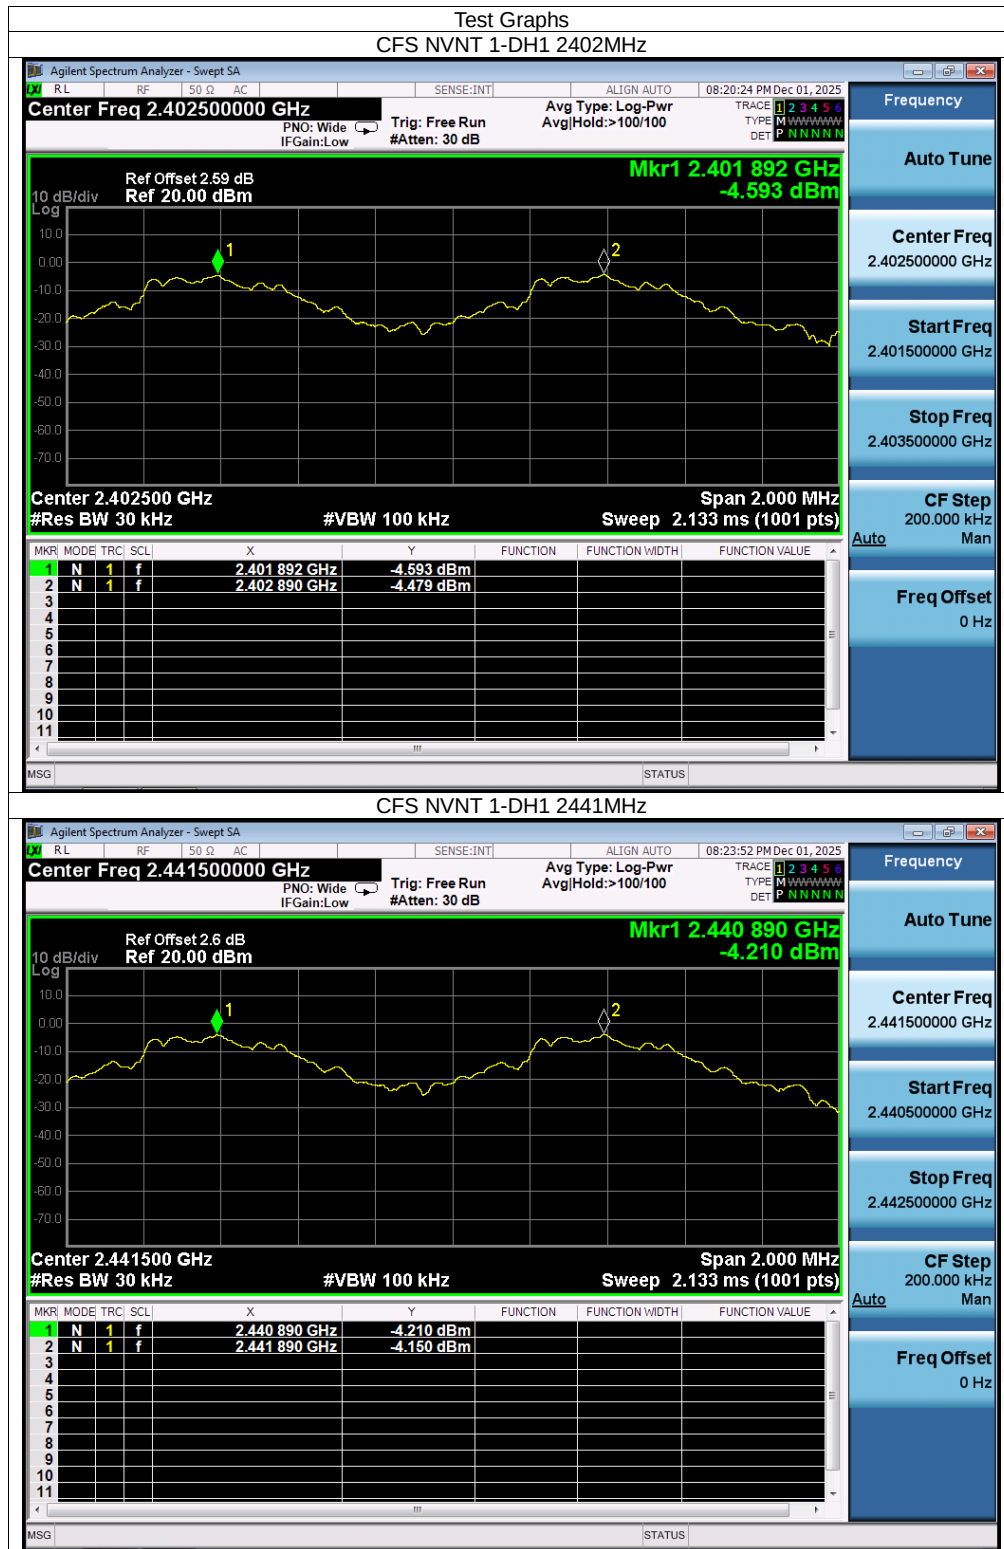

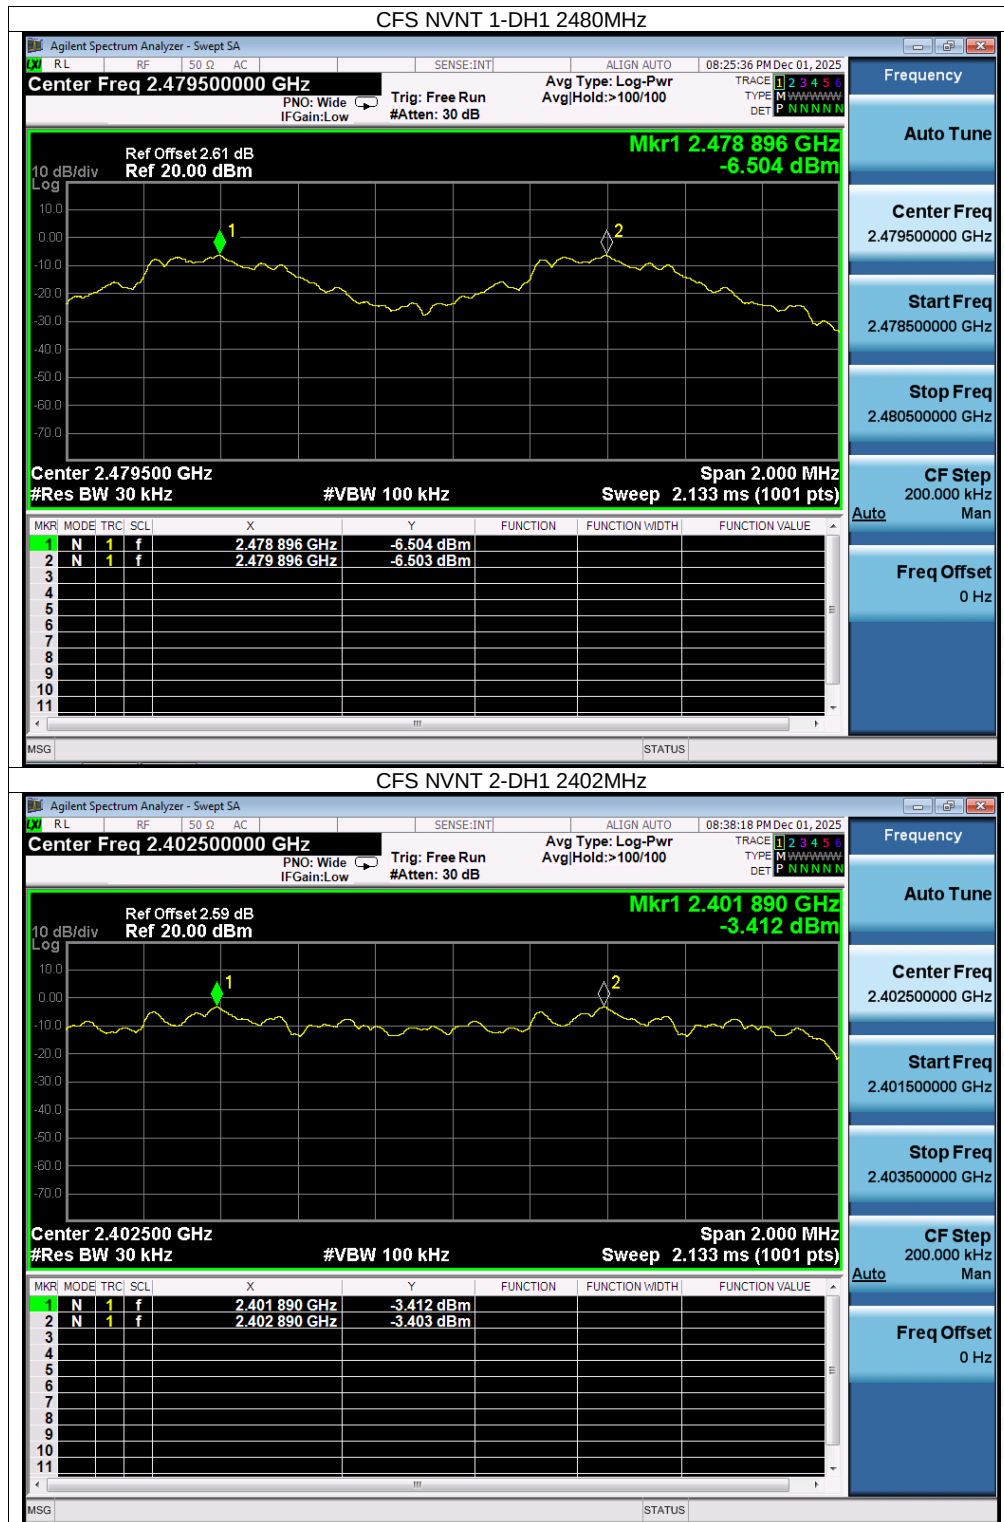

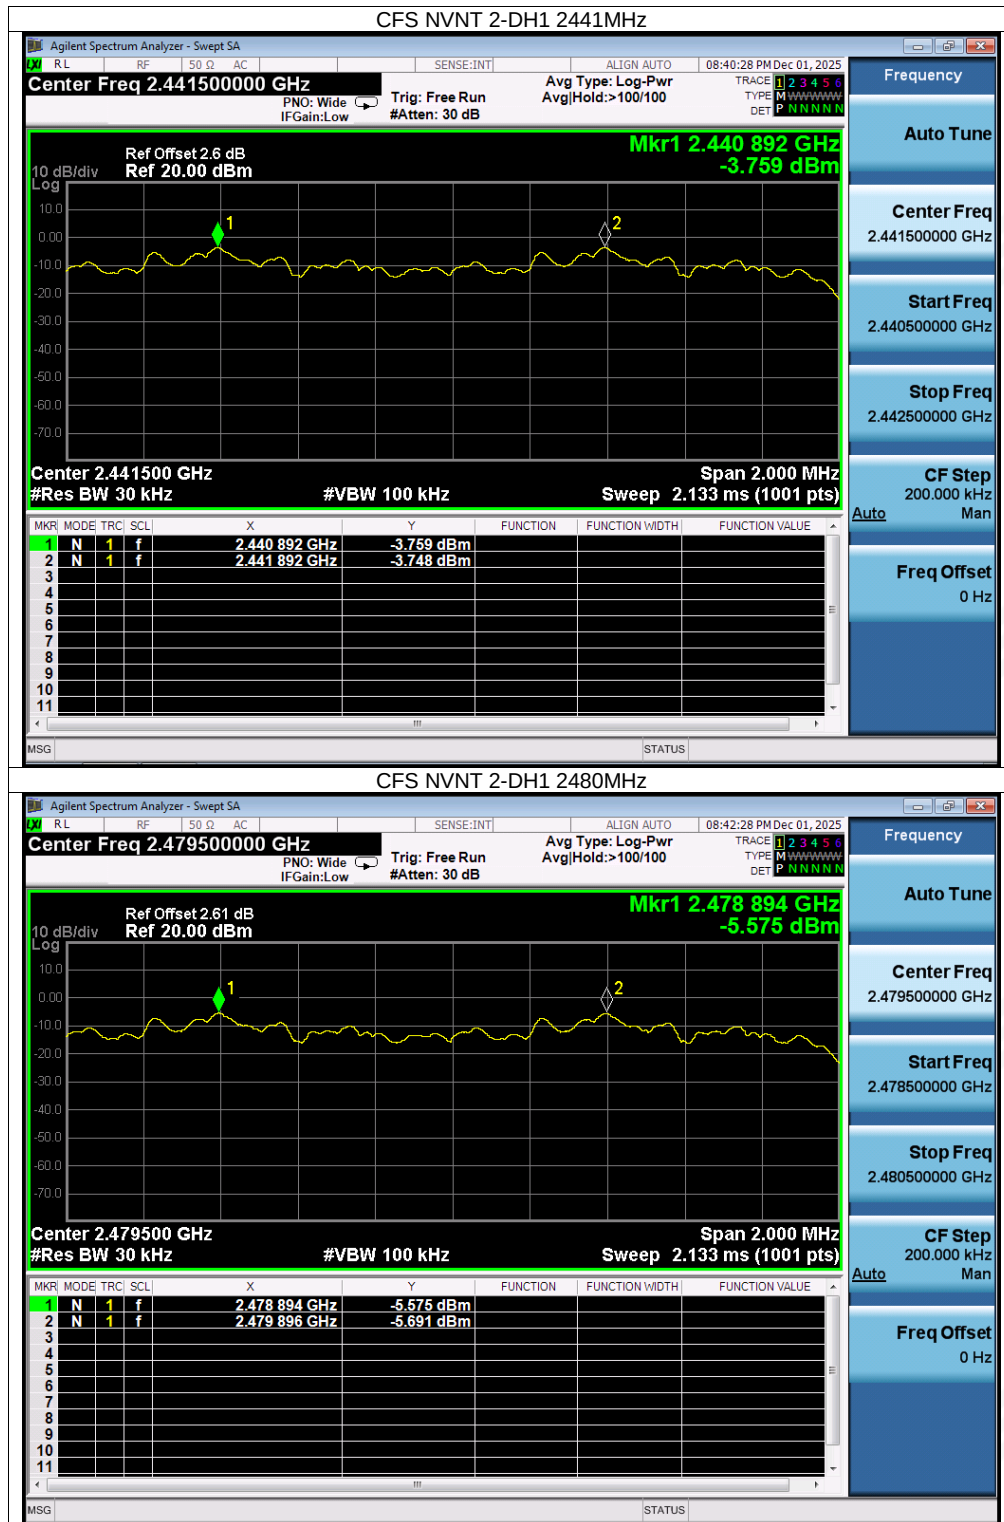

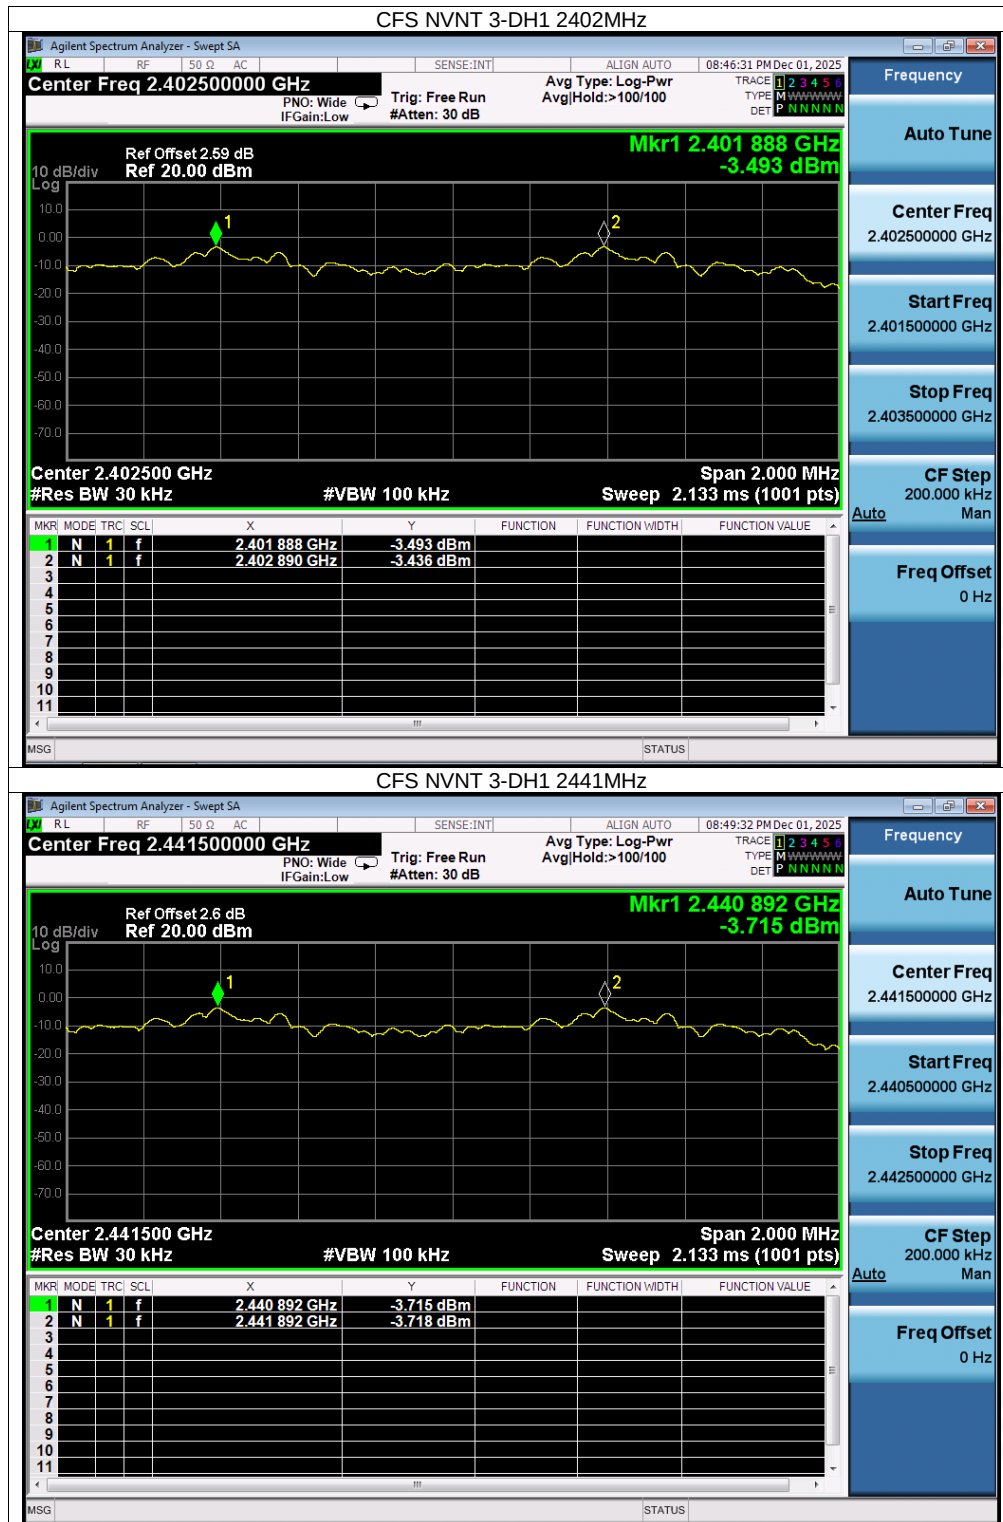


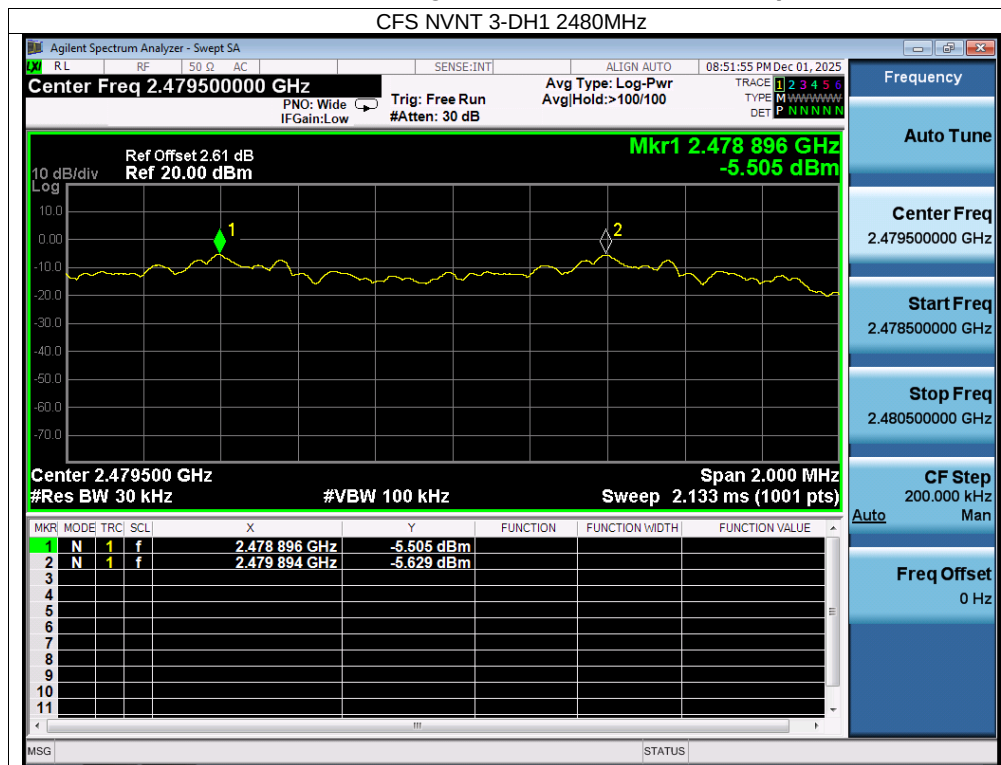




Number of Hopping Channel

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH5	79	≥ 15	Pass
NVNT	2-DH5	79	≥ 15	Pass
NVNT	3-DH5	79	≥ 15	Pass

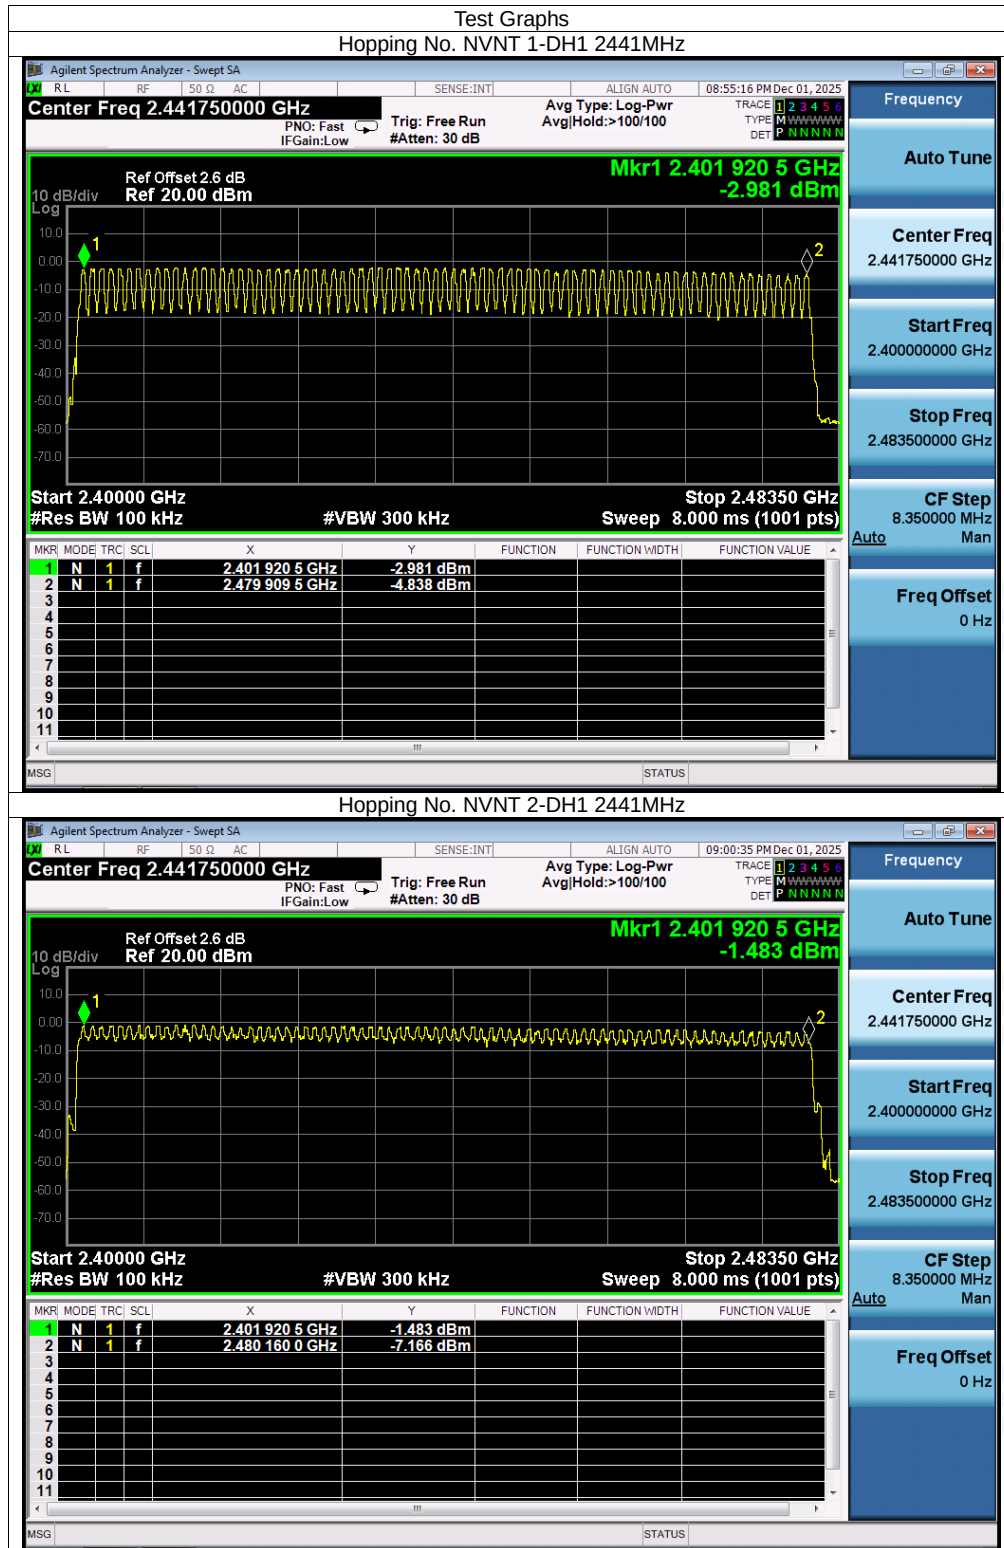


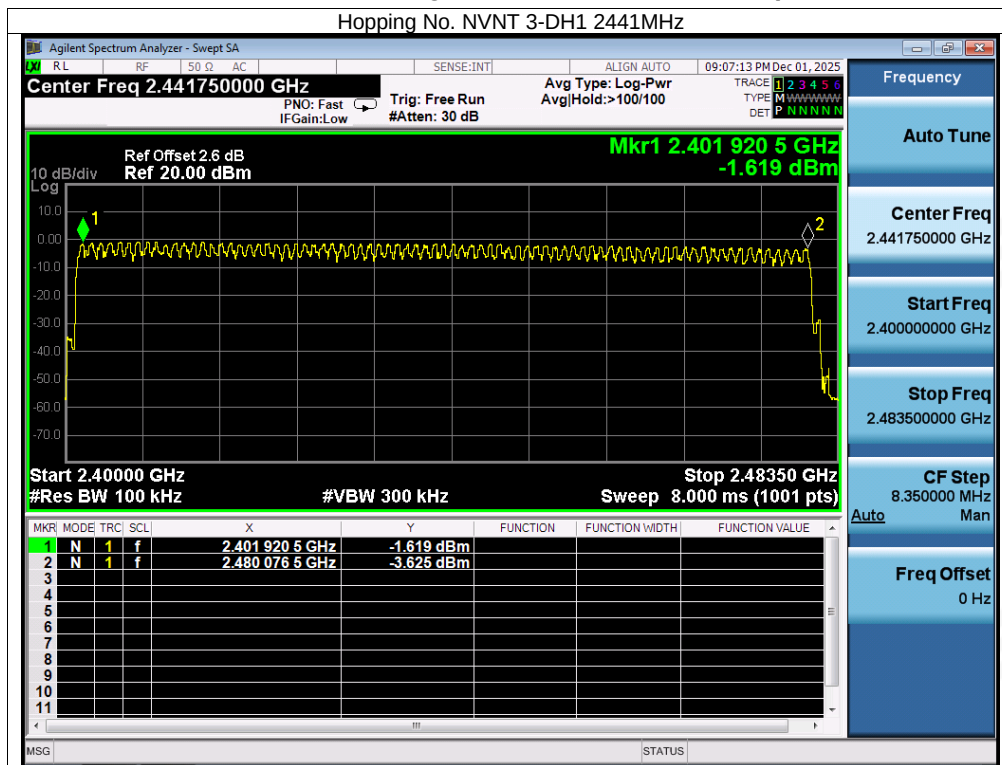





Band Edge


Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	No-Hopping	-54.37	<=-20	Pass
NVNT	1-DH5	2480	No-Hopping	-52.09	<=-20	Pass
NVNT	2-DH5	2402	No-Hopping	-53.07	<=-20	Pass
NVNT	2-DH5	2480	No-Hopping	-52.57	<=-20	Pass
NVNT	3-DH5	2402	No-Hopping	-53.4	<=-20	Pass
NVNT	3-DH5	2480	No-Hopping	-52.55	<=-20	Pass

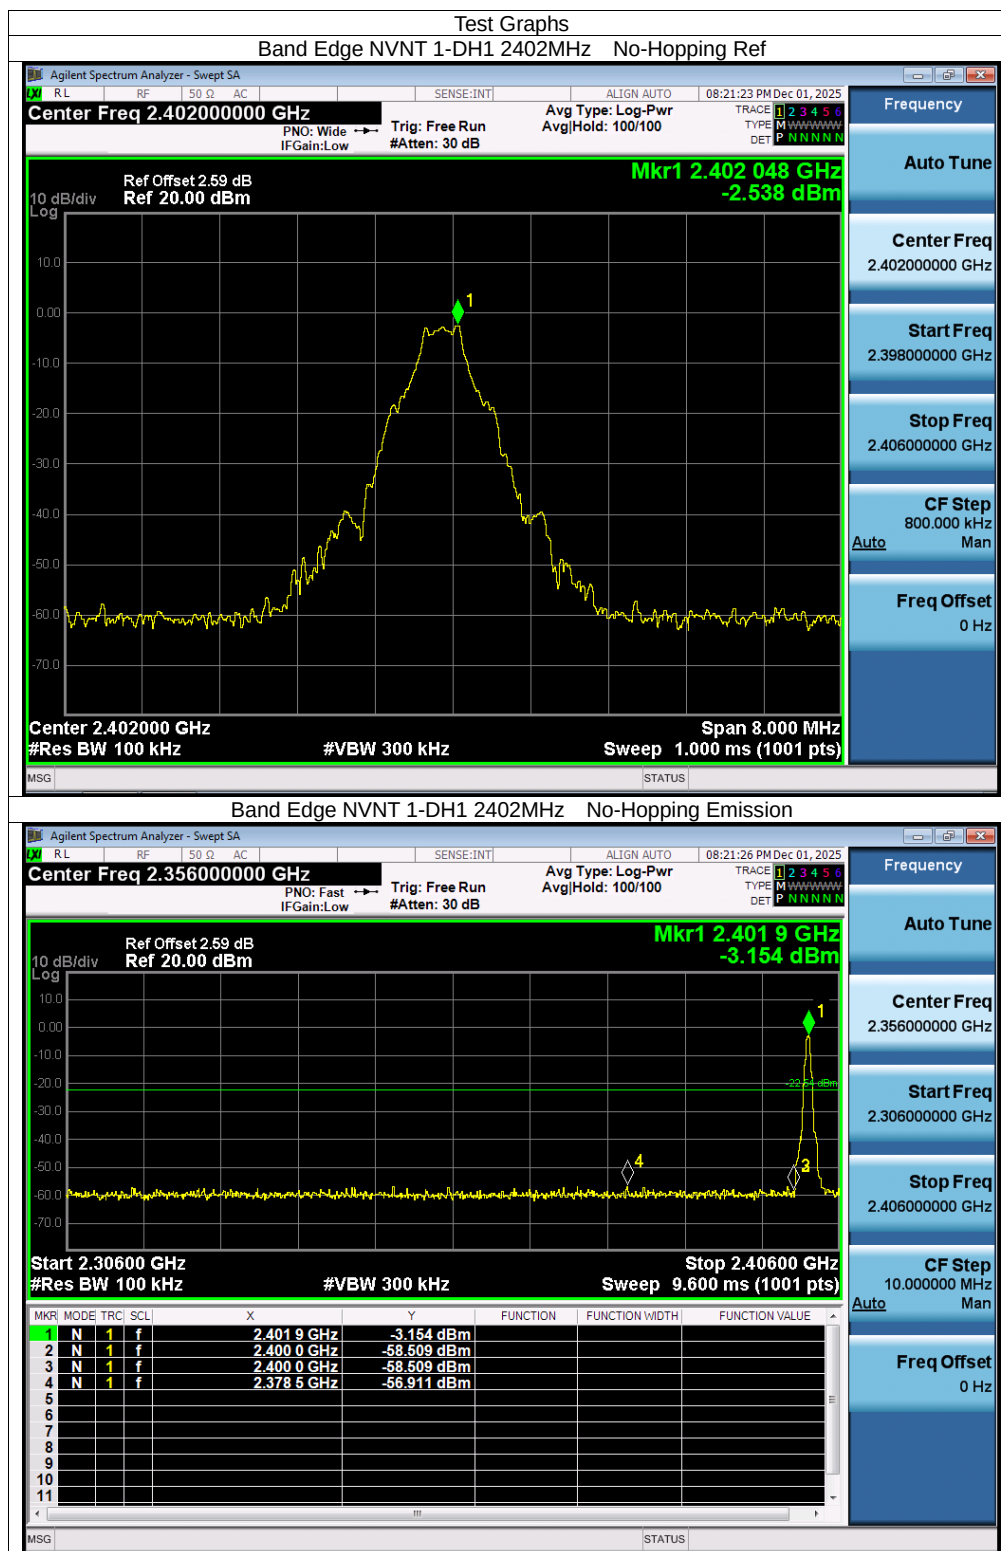

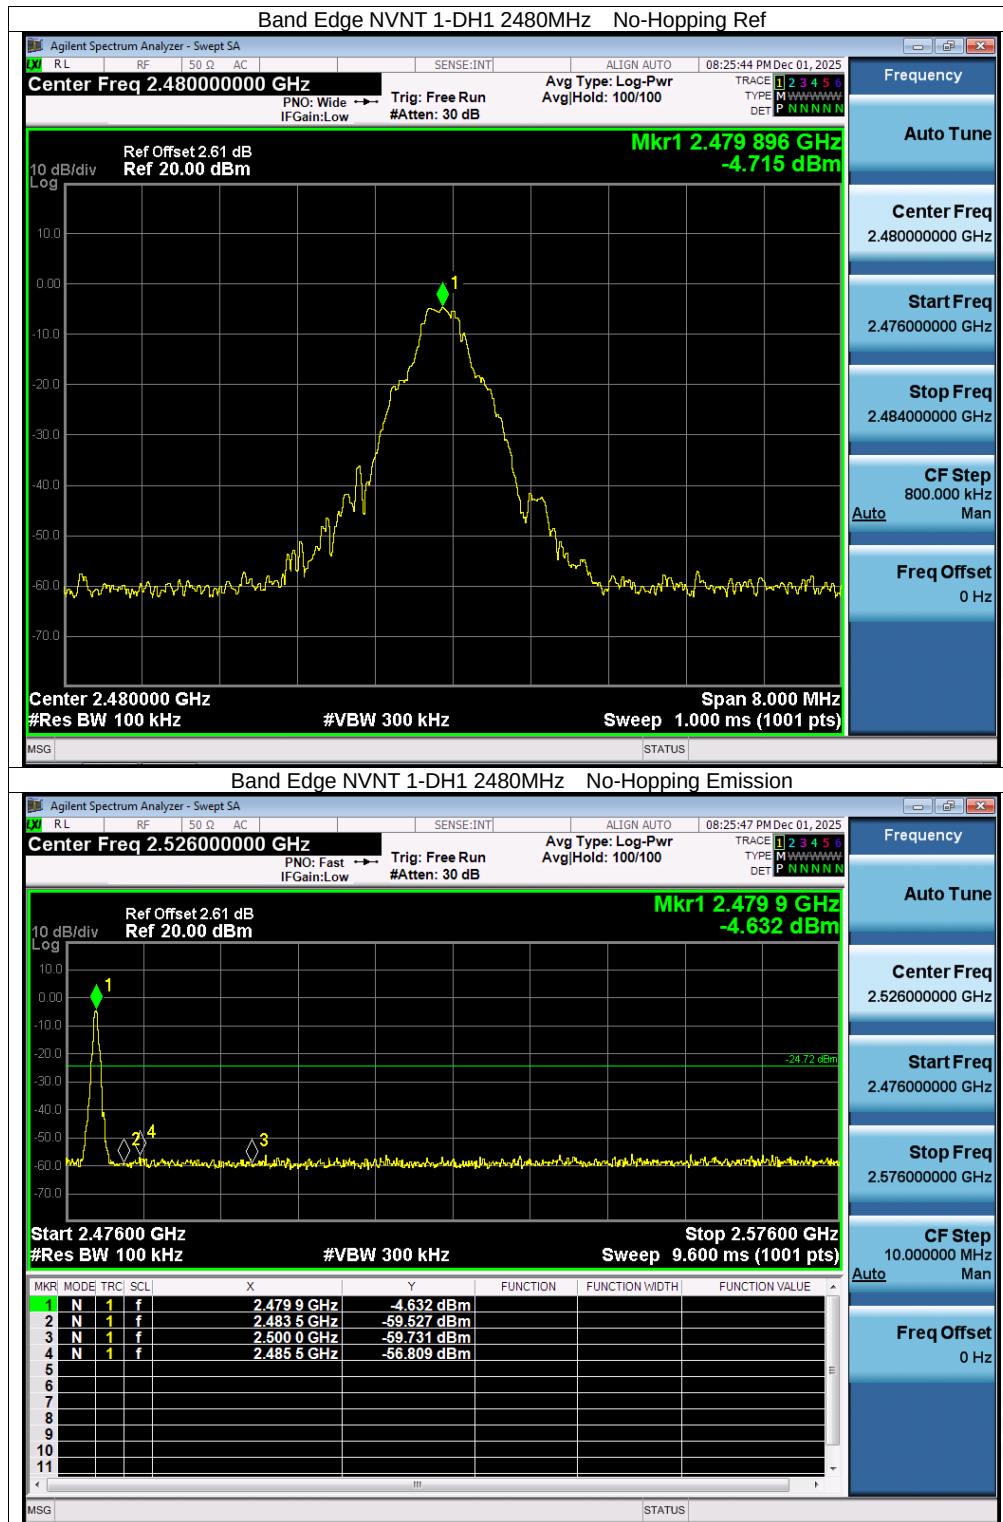

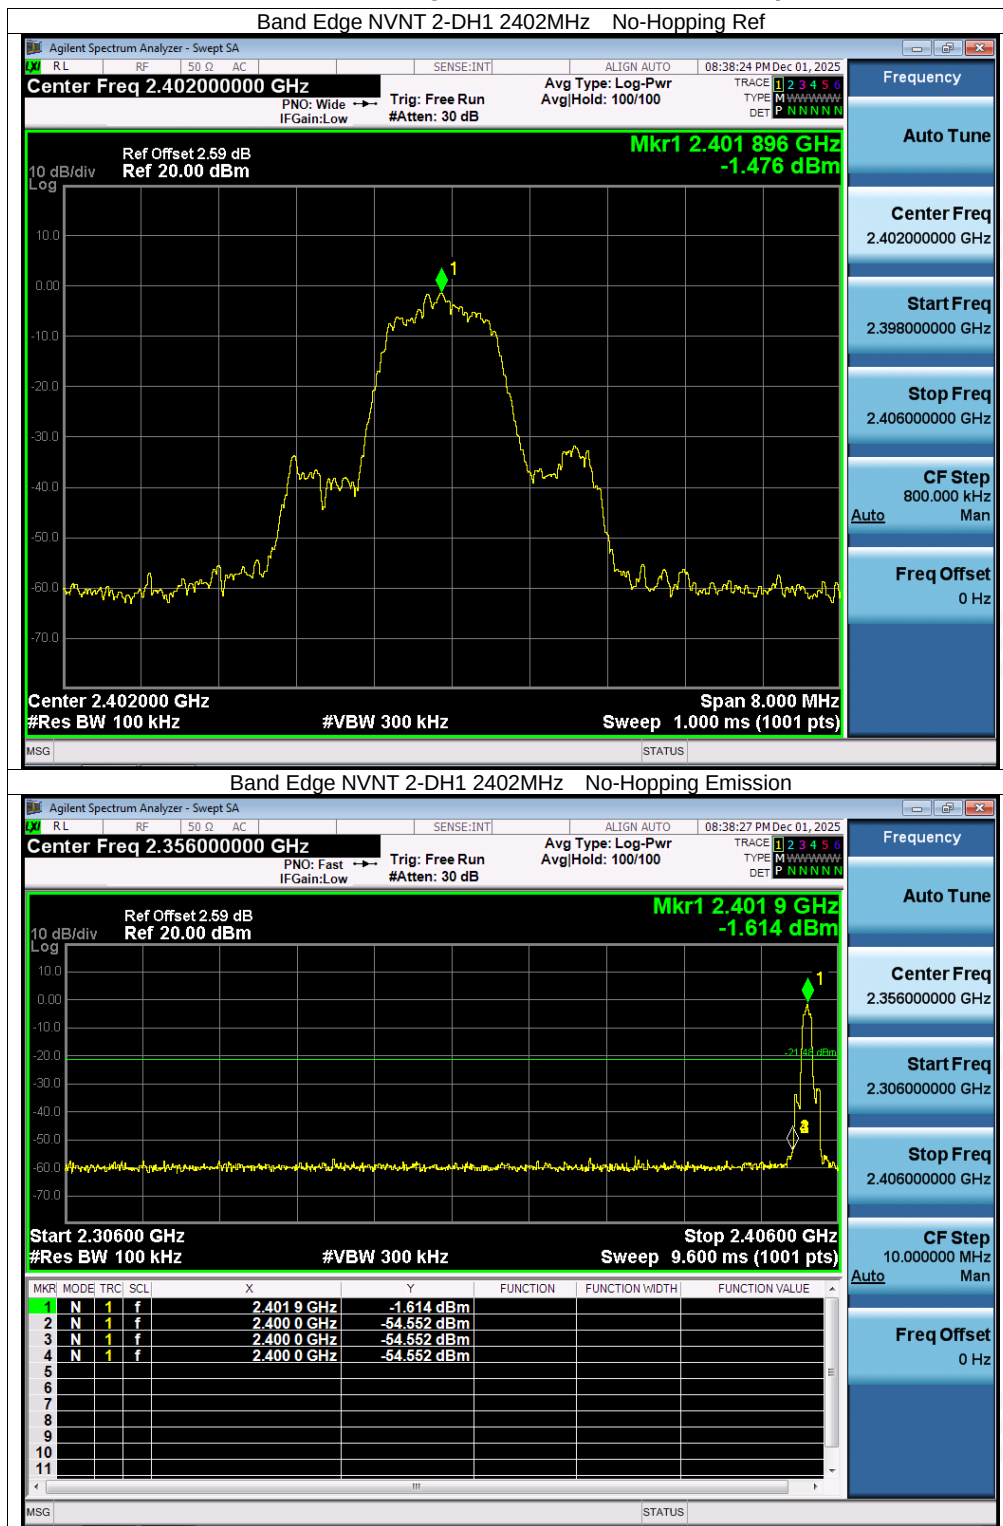



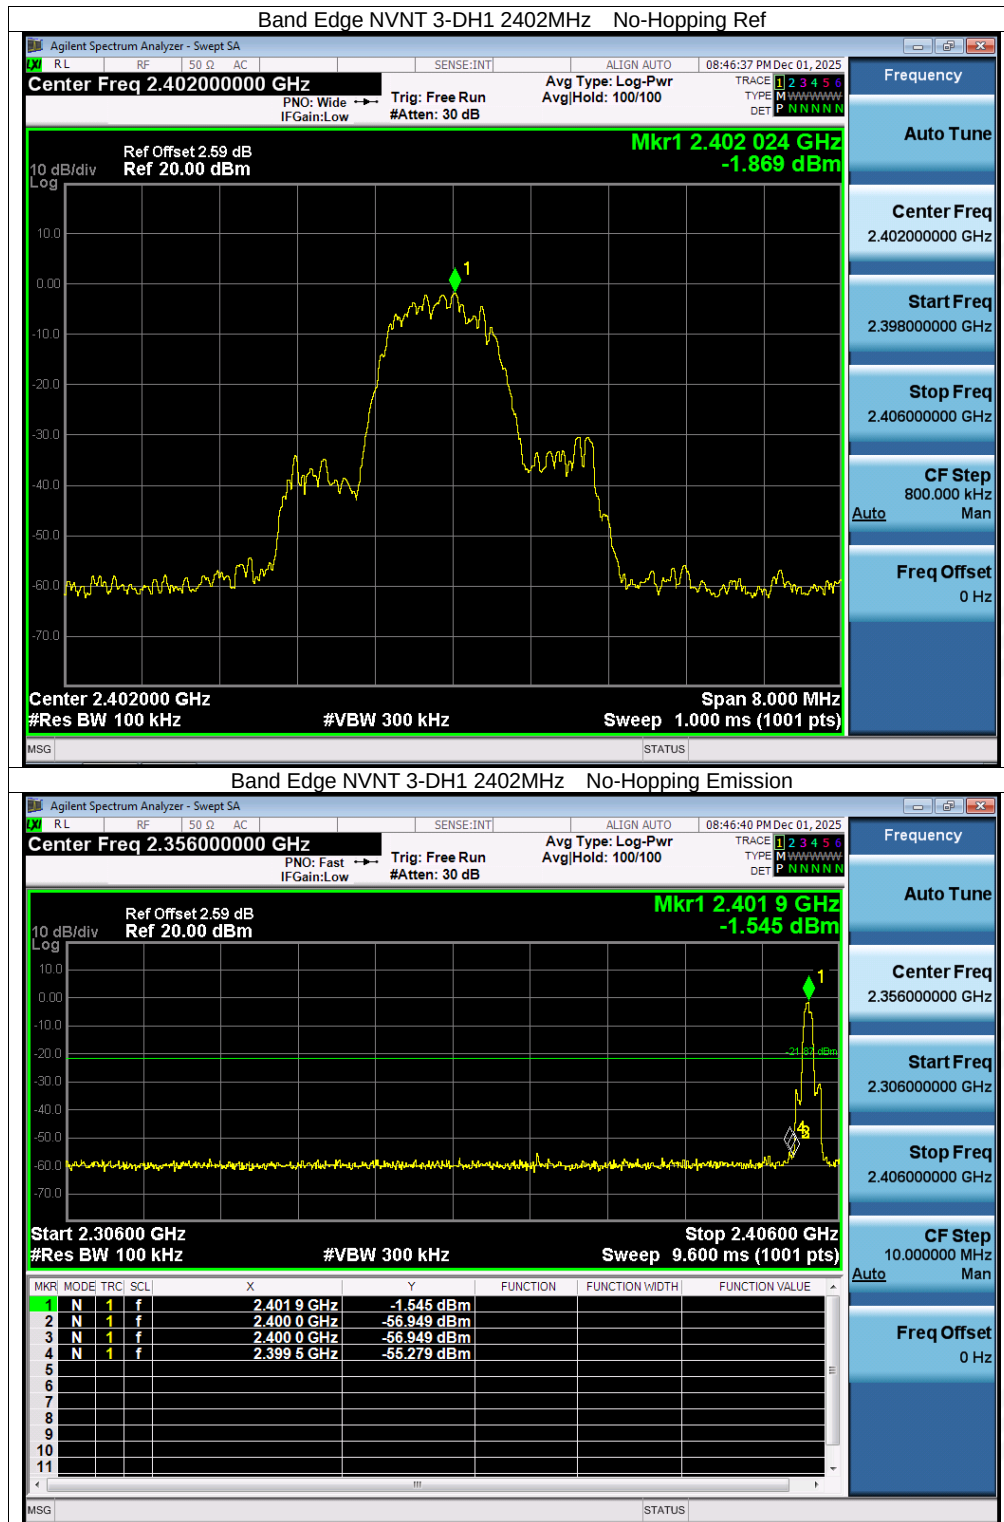






Band Edge(Hopping)


Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Hopping	-53.05	<=-20	Pass
NVNT	1-DH5	2480	Hopping	-50.92	<=-20	Pass
NVNT	2-DH5	2402	Hopping	-54.13	<=-20	Pass
NVNT	2-DH5	2480	Hopping	-52.24	<=-20	Pass
NVNT	3-DH5	2402	Hopping	-54.05	<=-20	Pass
NVNT	3-DH5	2480	Hopping	-52.02	<=-20	Pass

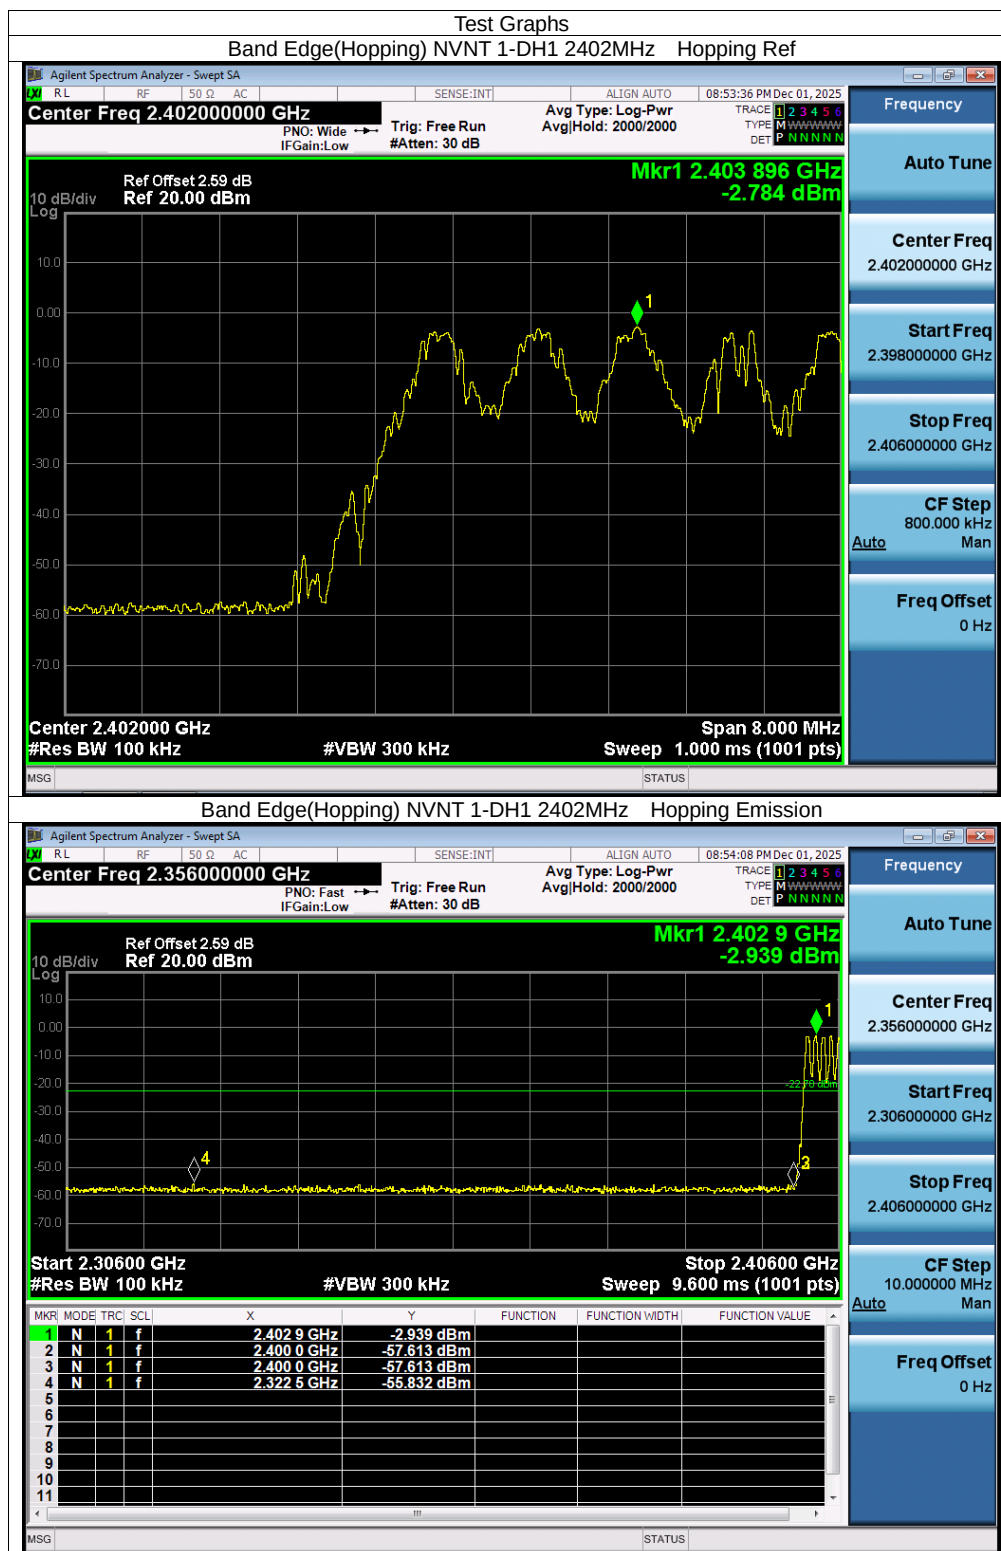







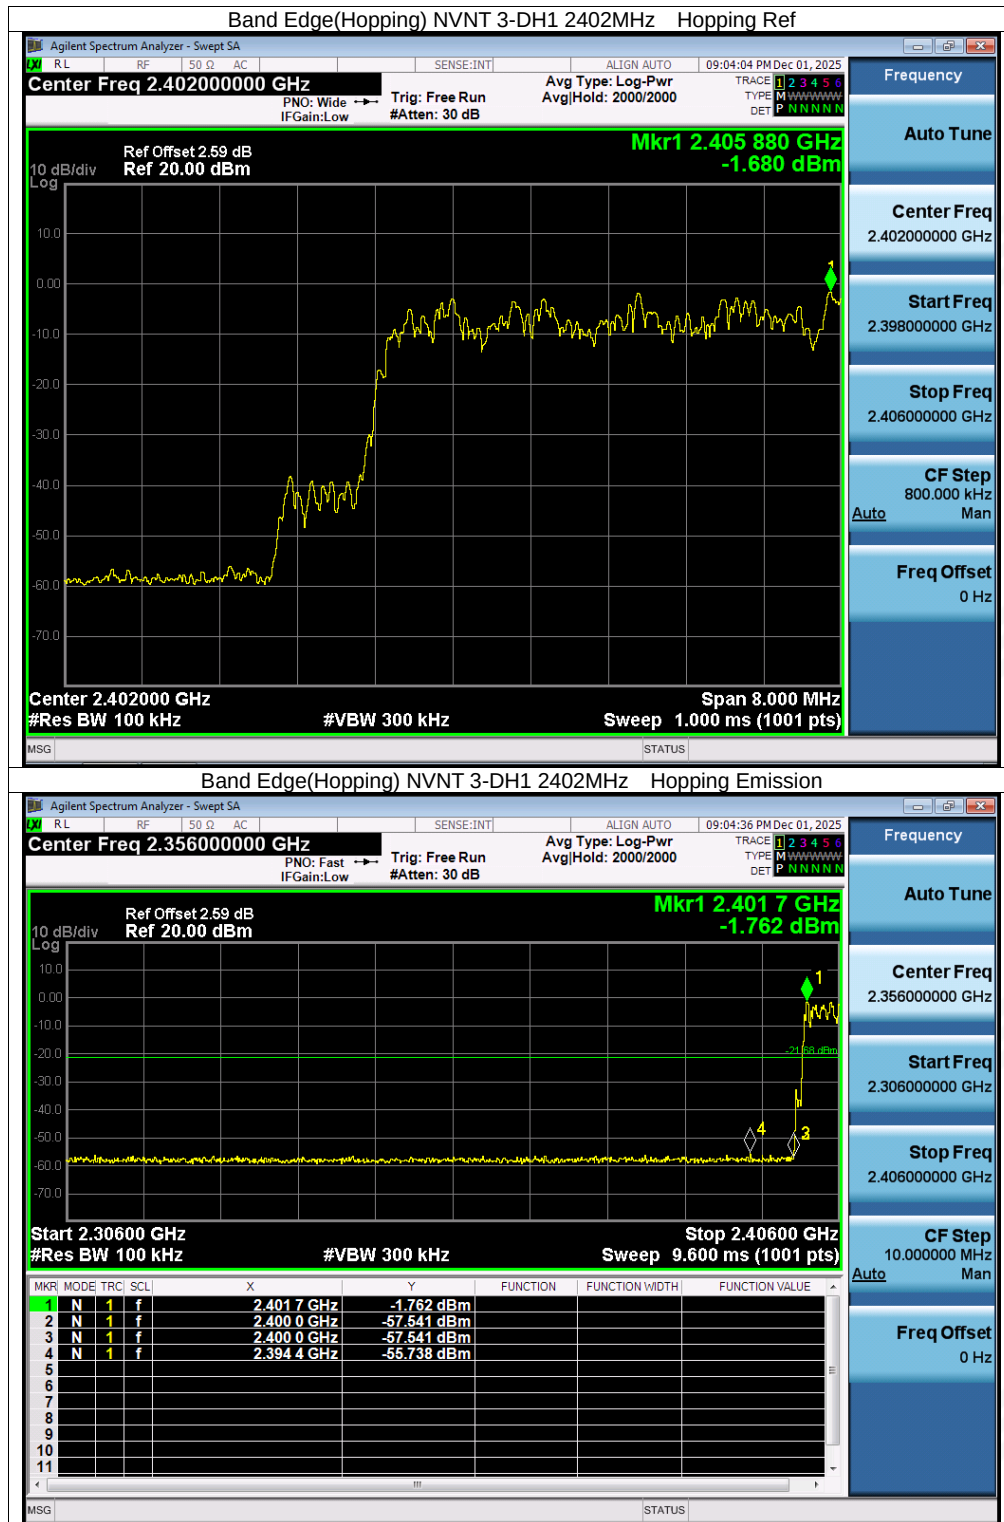







Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	-36.63	<=-20	Pass
NVNT	1-DH5	2480	-36.26	<=-20	Pass
NVNT	1-DH5	2480	-34.75	<=-20	Pass
NVNT	2-DH5	2402	-37.54	<=-20	Pass
NVNT	2-DH5	2441	-37.82	<=-20	Pass
NVNT	2-DH5	2480	-35.1	<=-20	Pass
NVNT	3-DH5	2402	-37.94	<=-20	Pass
NVNT	3-DH5	2441	-36.42	<=-20	Pass
NVNT	3-DH5	2480	-35.45	<=-20	Pass





Test Graphs

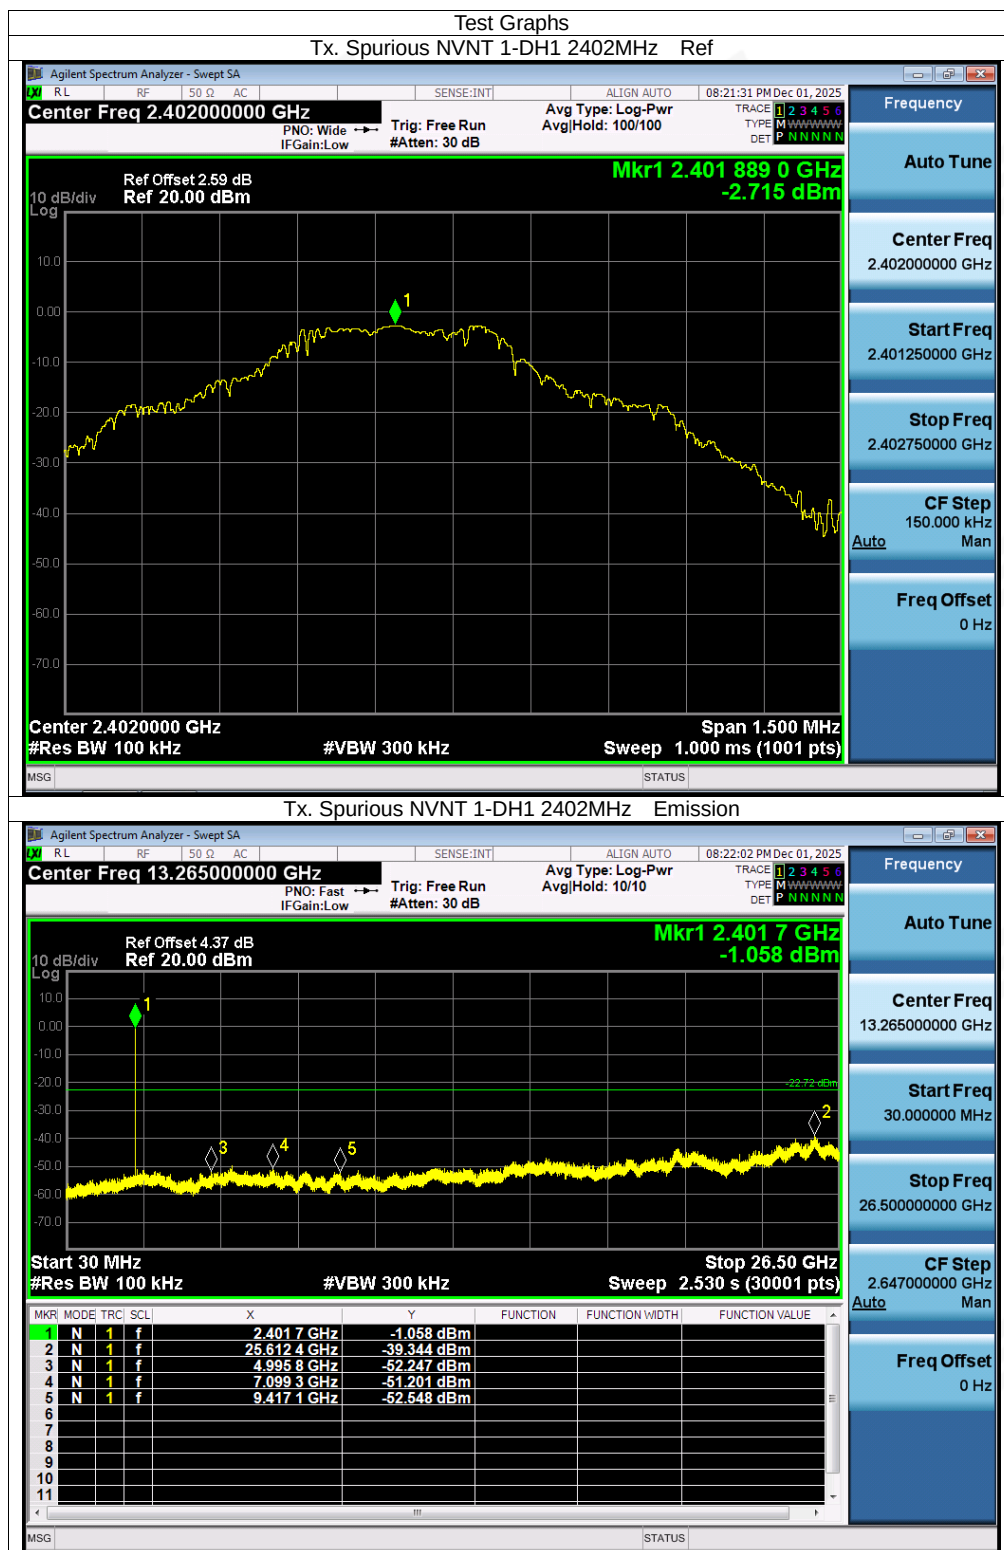


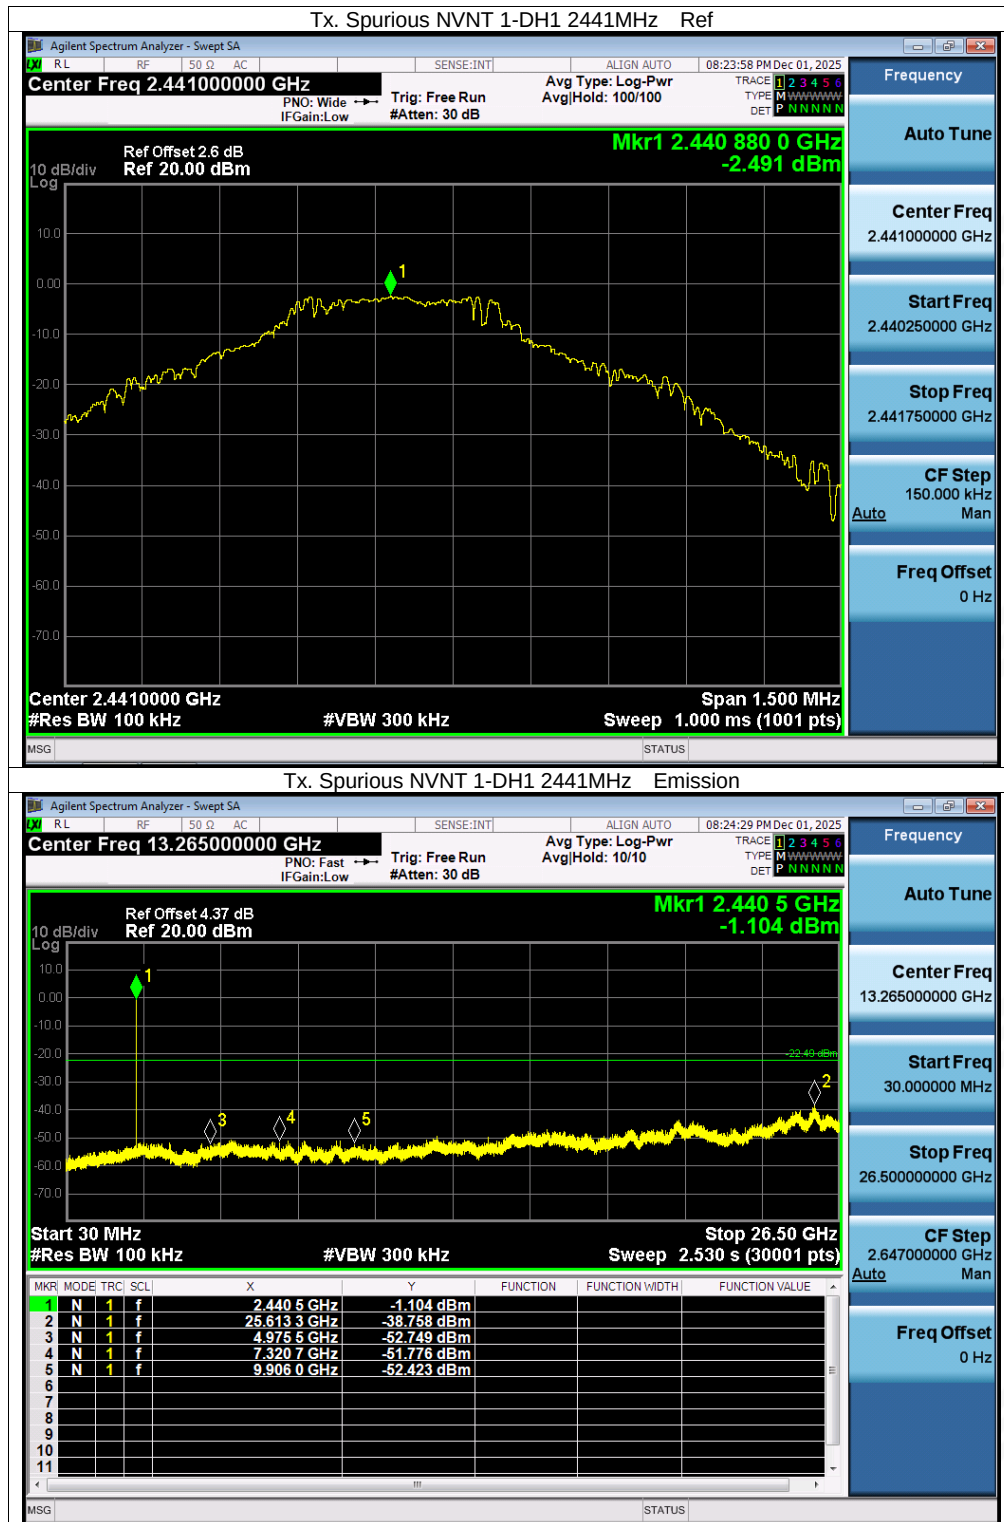


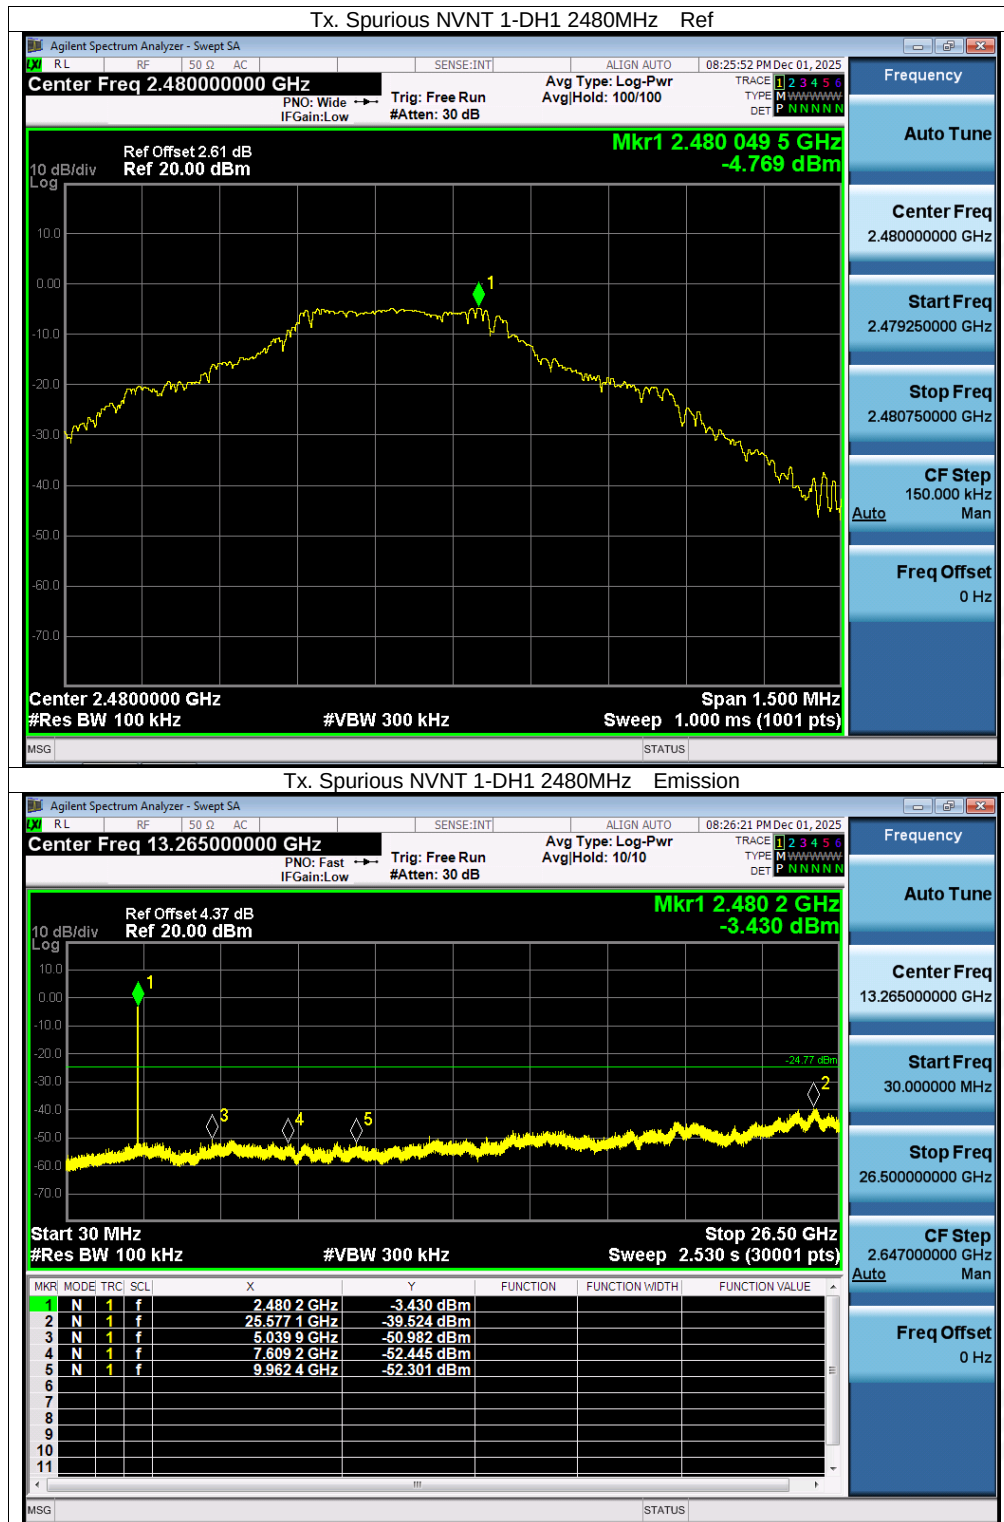


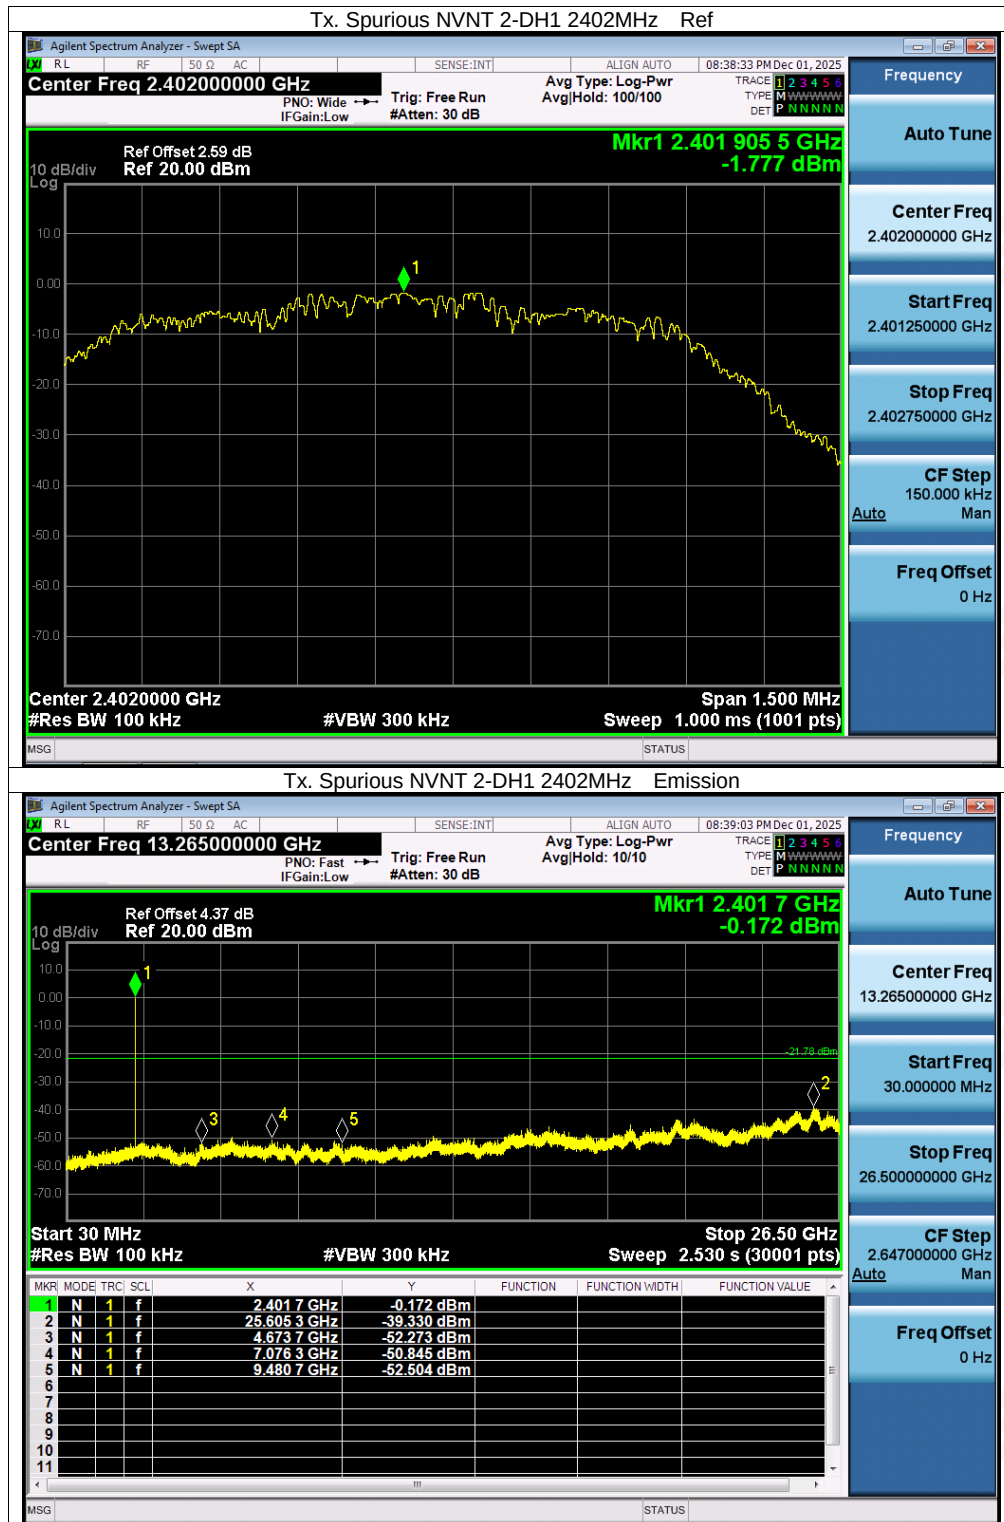


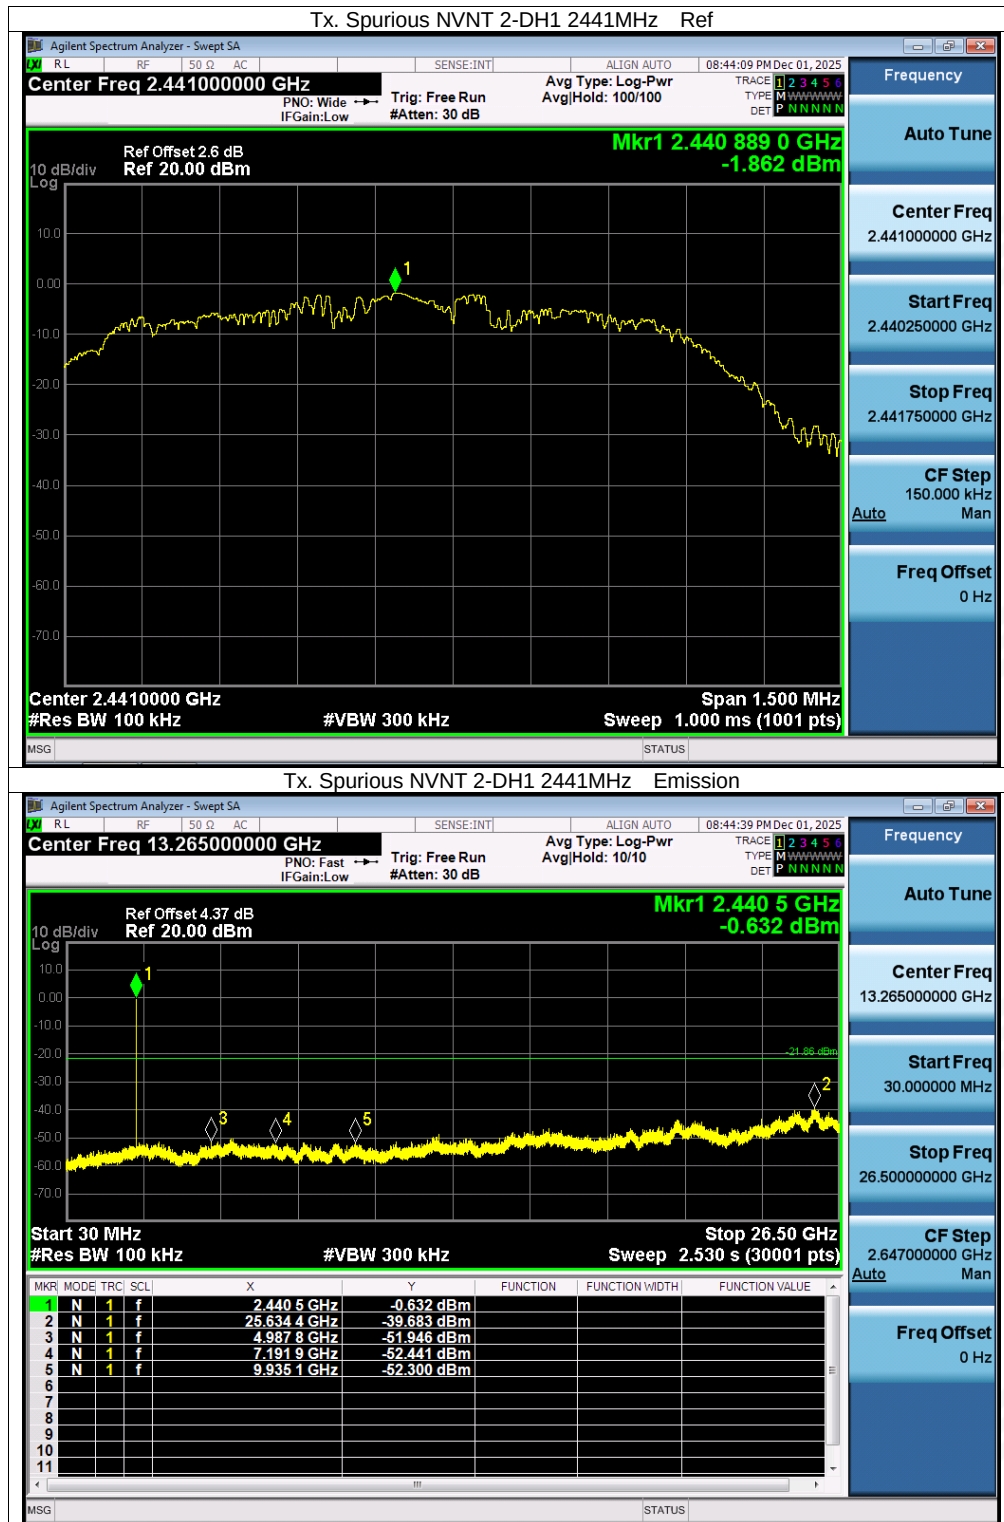

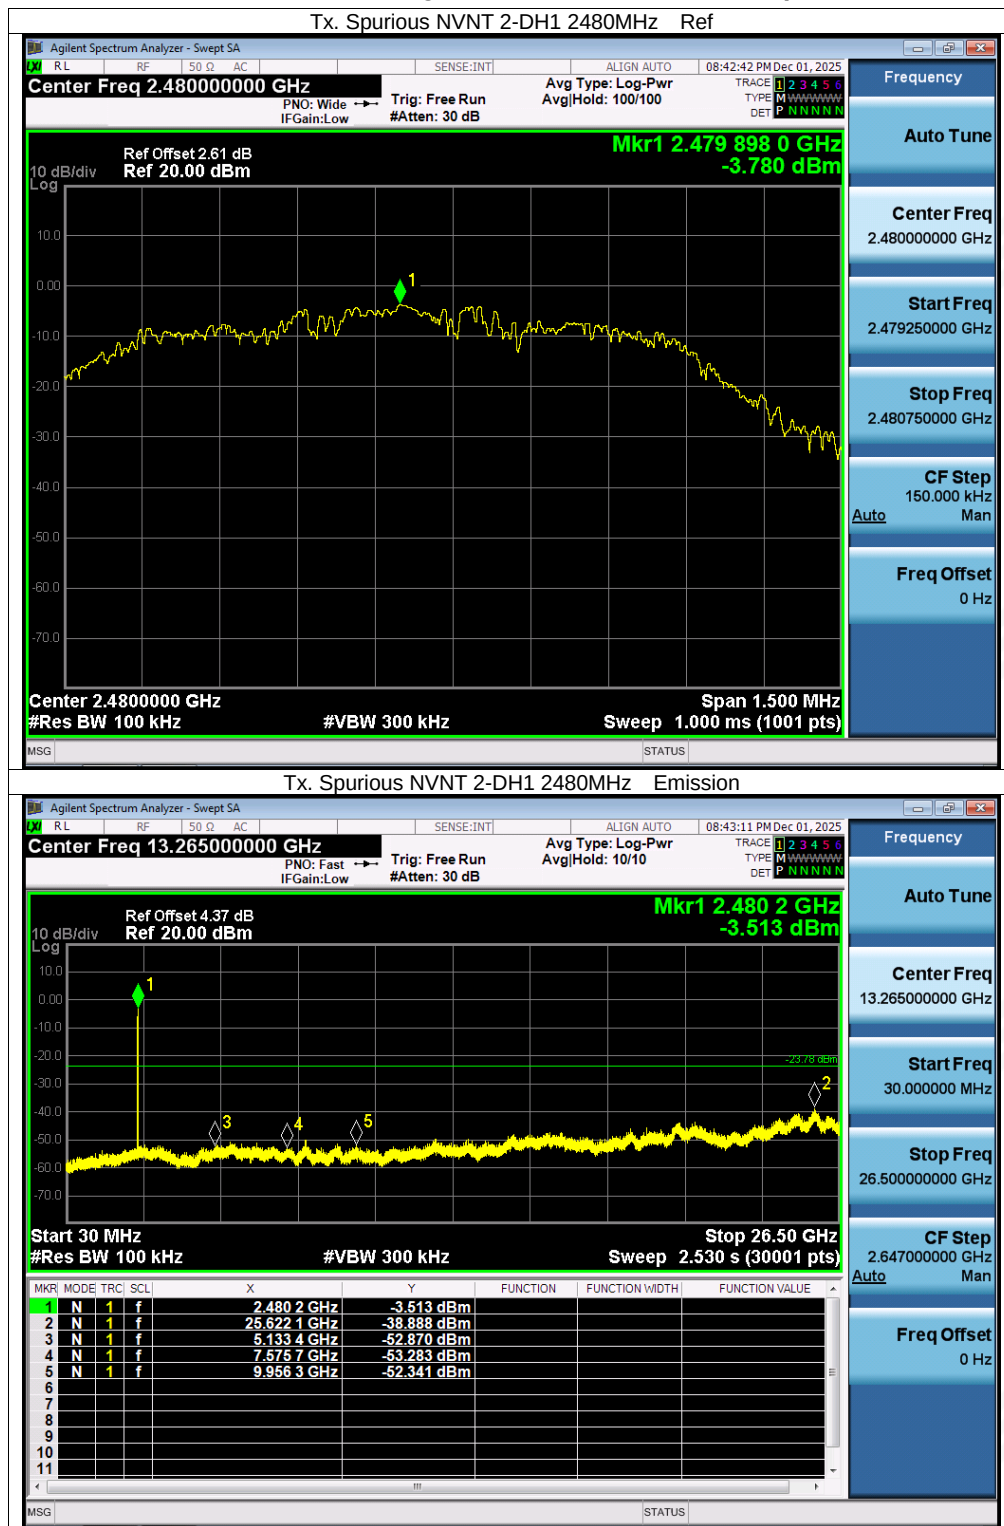

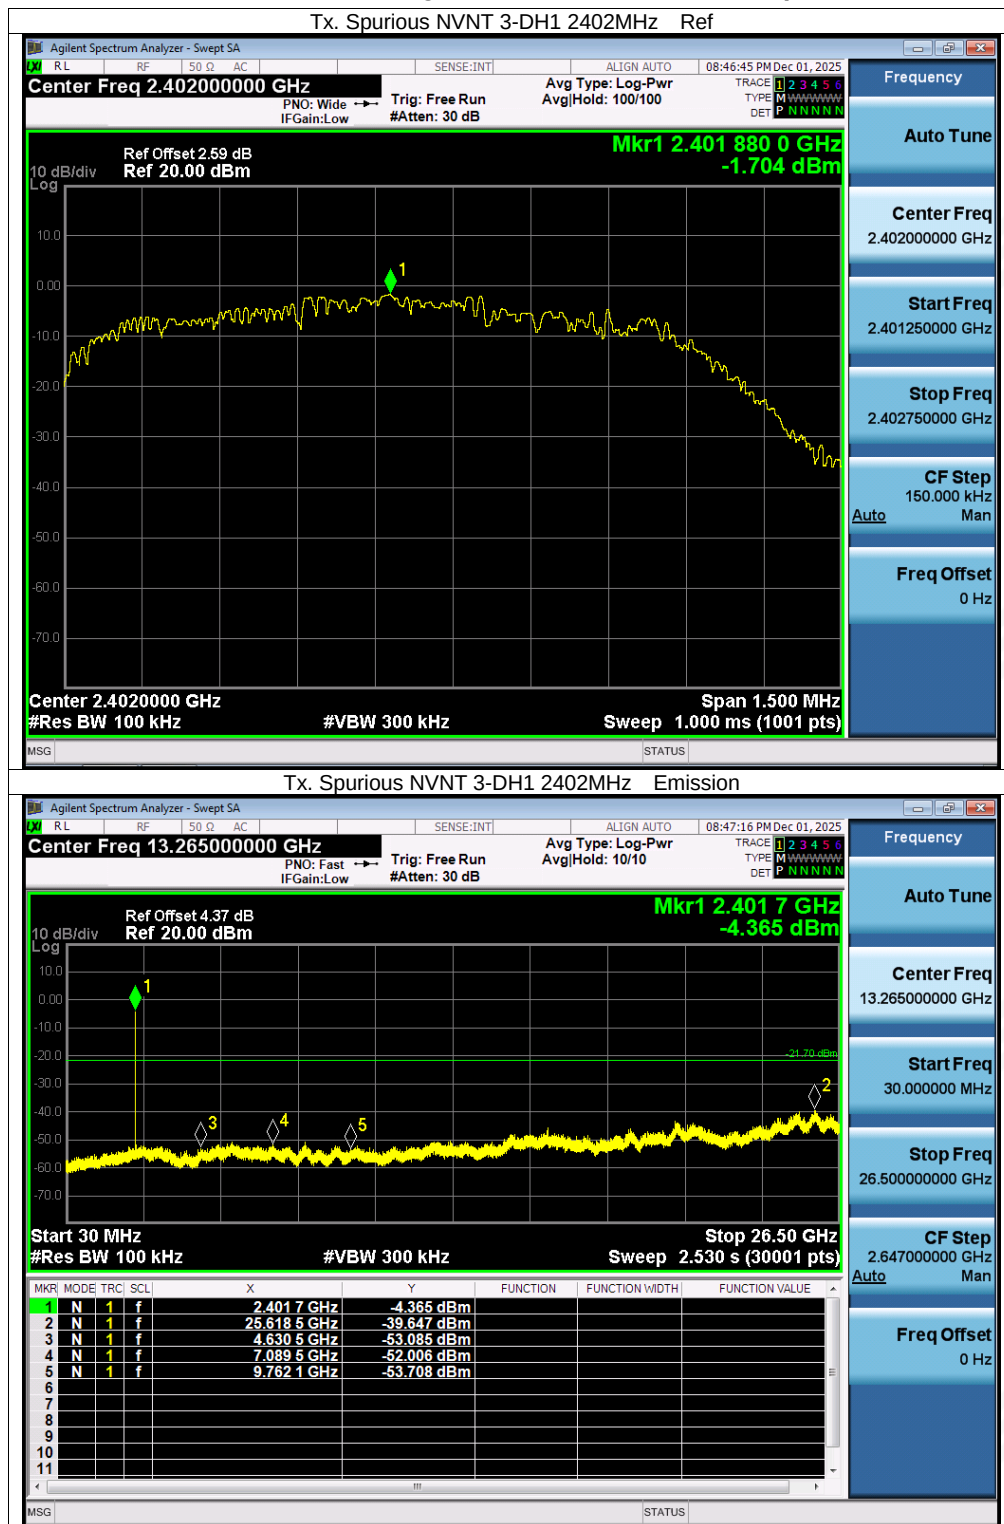

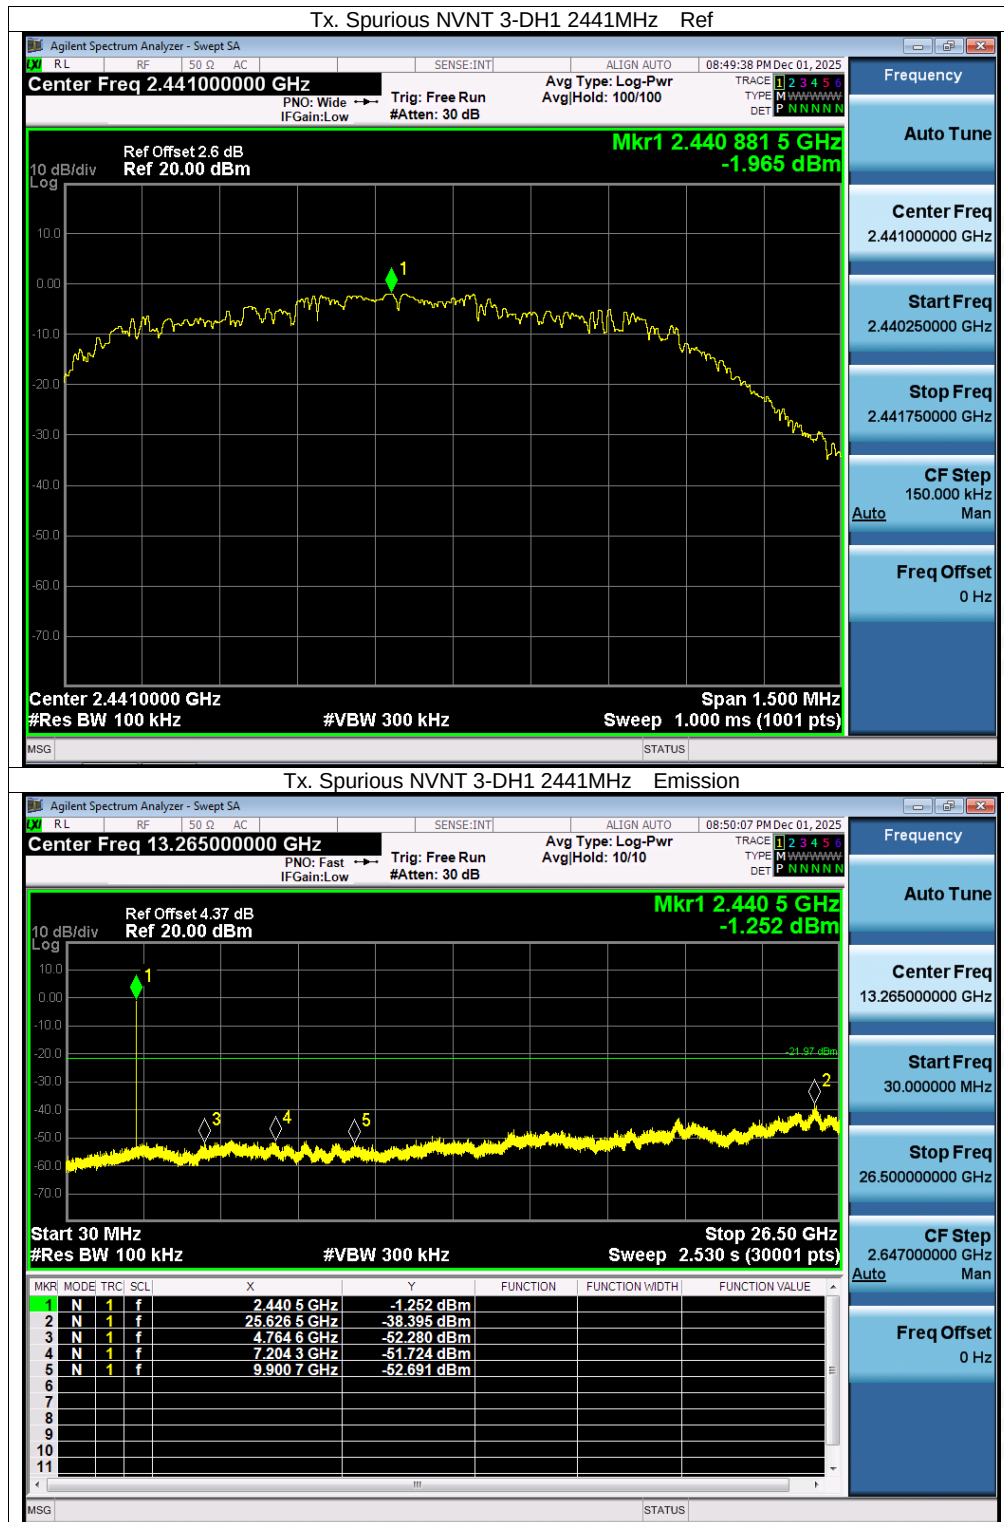

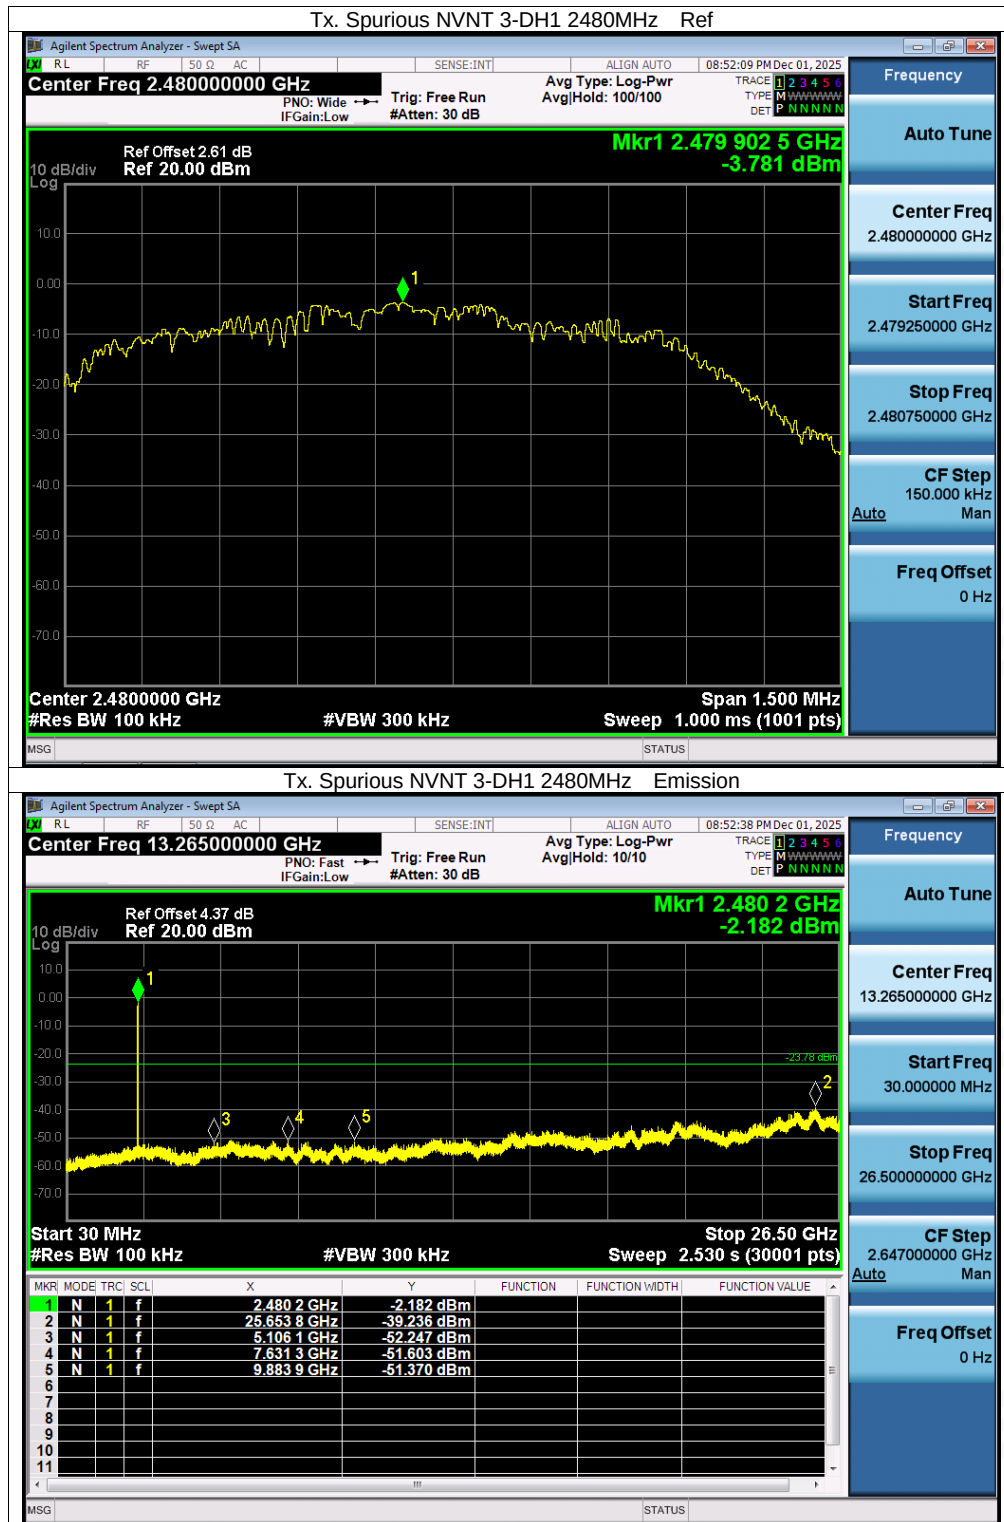



APPENDIX 2-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****