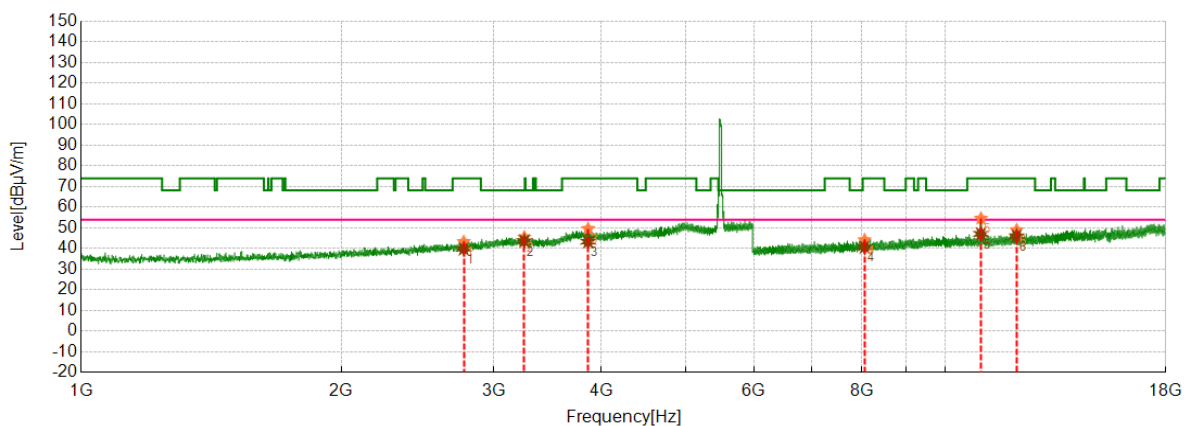


Mode: AX20

Channel: 5500 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

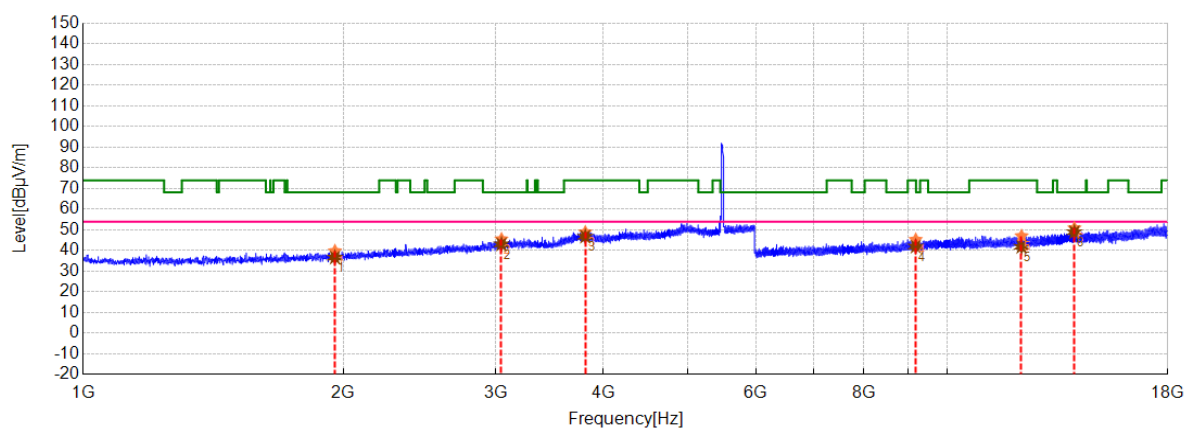
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2770.6250	4.81	38.53	43.34	74.00	30.66	35.07	39.88	54.00	14.12	150	190	Vertical	PASS
2	3256.2500	6.59	38.93	45.52	68.23	22.71	37.05	43.64	54.00	10.36	150	300	Vertical	PASS
3	3860.0000	8.83	40.83	49.66	74.00	24.34	34.53	43.36	54.00	10.64	150	160	Vertical	PASS
4	8064.0000	-8.11	52.27	44.16	74.00	29.84	48.80	40.69	54.00	13.31	150	40	Vertical	PASS
5	10996.800	-3.01	57.61	54.60	74.00	19.40	50.16	47.15	54.00	6.85	150	210	Vertical	PASS
6	12093.000	-1.41	50.41	49.00	74.00	25.00	47.46	46.05	54.00	7.95	150	310	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5500 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

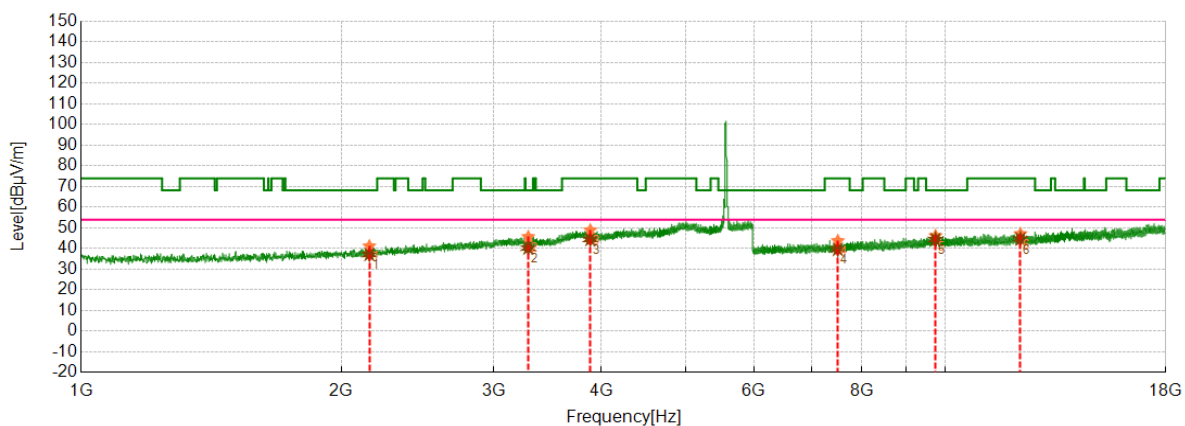
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1955.0000	1.62	38.18	39.80	68.23	28.43	35.03	36.65	54.00	17.35	150	300	Horizontal	PASS
2	3047.5000	6.12	39.43	45.55	68.23	22.68	36.93	43.05	54.00	10.95	150	290	Horizontal	PASS
3	3810.0000	9.02	39.91	48.93	74.00	25.07	37.76	46.78	54.00	7.22	150	250	Horizontal	PASS
4	9192.0000	-5.64	50.96	45.32	74.00	28.68	47.63	41.99	54.00	12.01	150	210	Horizontal	PASS
5	12186.600	-1.48	48.58	47.10	74.00	26.90	43.34	41.86	54.00	12.14	150	70	Horizontal	PASS
6	14029.800	1.77	49.15	50.92	68.23	17.31	47.15	48.92	54.00	5.08	150	200	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5580 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

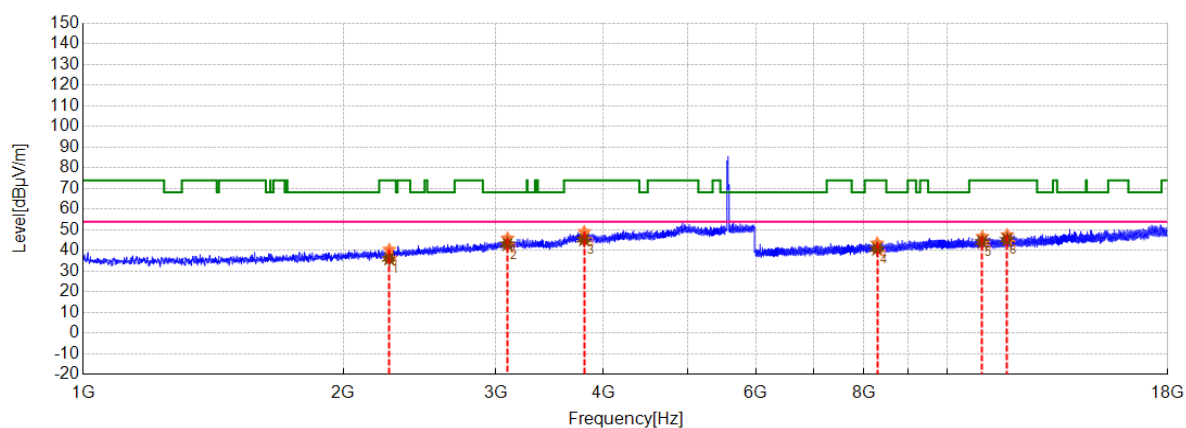
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2154.3750	2.38	38.8	41.18	68.23	27.05	34.80	37.18	54.00	16.82	150	140	Vertical	PASS
2	3290.6250	6.71	38.99	45.70	68.23	22.53	33.56	40.27	54.00	13.73	150	320	Vertical	PASS
3	3881.8750	9.04	39.9	48.94	74.00	25.06	35.40	44.44	54.00	9.56	150	180	Vertical	PASS
4	7508.4000	-8.96	52.73	43.77	74.00	30.23	48.61	39.65	54.00	14.35	150	310	Vertical	PASS
5	9741.6000	-4.56	50.72	46.16	68.23	22.07	48.97	44.41	54.00	9.59	150	310	Vertical	PASS
6	12215.400	-1.39	48.5	47.11	74.00	26.89	46.08	44.69	54.00	9.31	150	120	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5580 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2260.0000	2.86	37.67	40.53	74.00	33.47	33.20	36.06	54.00	17.94	150	60	Horizontal	PASS
2	3096.8750	6.47	39.54	46.01	68.23	22.22	36.60	43.07	54.00	10.93	150	150	Horizontal	PASS
3	3798.7500	8.45	40.68	49.13	74.00	24.87	36.89	45.34	54.00	8.66	150	10	Horizontal	PASS
4	8294.4000	-7.35	50.92	43.57	74.00	30.43	48.18	40.83	54.00	13.17	150	70	Horizontal	PASS
5	10980.600	-3.23	50	46.77	74.00	27.23	47.46	44.23	54.00	9.77	150	270	Horizontal	PASS
6	11730.600	-2.13	49.69	47.56	74.00	26.44	47.42	45.29	54.00	8.71	150	340	Horizontal	PASS

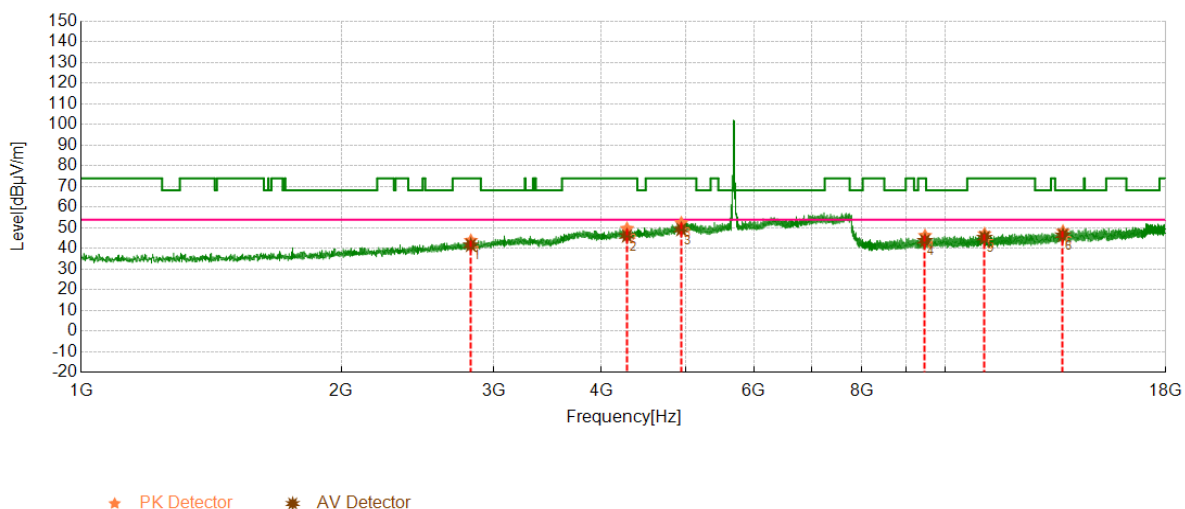
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5700 MHz

Test Graph



Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2823.7600	5.22	38.68	43.90	74.00	30.10	36.44	41.66	54.00	12.34	150	190	Vertical	PASS
2	4281.0000	10.40	39.28	49.68	74.00	24.32	35.75	46.15	54.00	7.85	150	140	Vertical	PASS
3	4947.4000	13.52	38.92	52.44	74.00	21.56	35.74	49.26	54.00	4.74	150	270	Vertical	PASS
4	9472.2900	-5.13	51.43	46.30	74.00	27.70	48.97	43.84	54.00	10.16	150	0	Vertical	PASS
5	11101.740	-2.71	49.82	47.11	74.00	26.89	48.04	45.33	54.00	8.67	150	200	Vertical	PASS
6	13680.300	0.45	47.89	48.34	68.23	19.89	46.02	46.47	54.00	7.53	150	40	Vertical	PASS

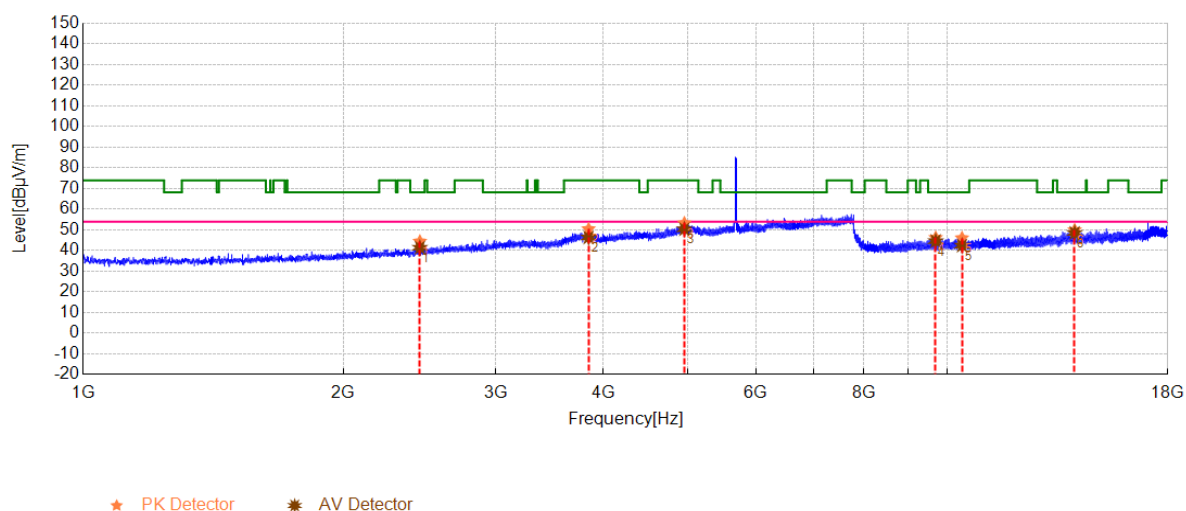
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5700 MHz

Test Graph



Final Data List

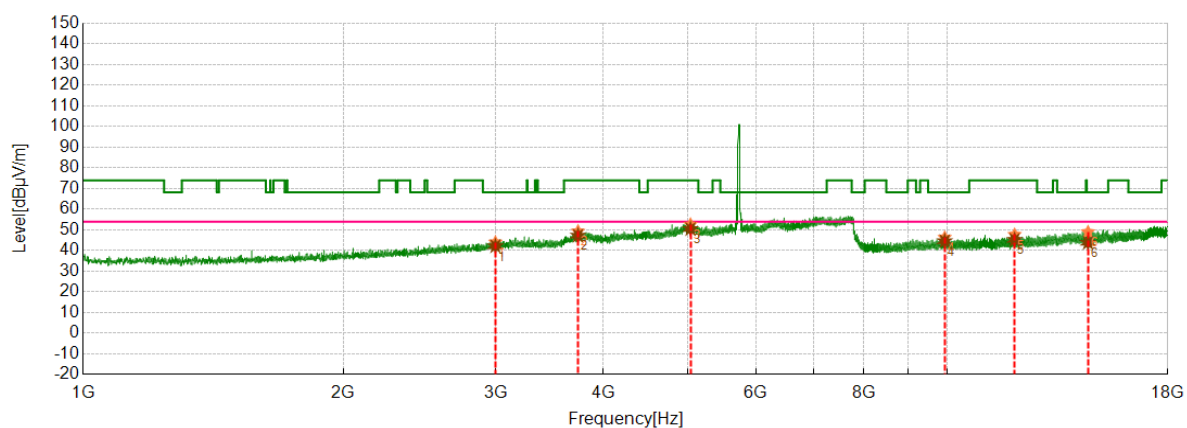
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2451.8000	3.26	41.21	44.47	68.23	23.76	38.17	41.43	54.00	12.57	150	220	Horizontal	PASS
2	3843.7600	9.13	41.35	50.48	74.00	23.52	37.24	46.37	54.00	7.63	150	50	Horizontal	PASS
3	4961.6800	13.24	40.08	53.32	74.00	20.68	37.13	50.37	54.00	3.63	150	50	Horizontal	PASS
4	9693.6300	-4.53	50.79	46.26	68.23	21.97	49.15	44.62	54.00	9.38	150	50	Horizontal	PASS
5	10398.450	-3.64	49.74	46.10	68.23	22.13	46.07	42.43	54.00	11.57	150	50	Horizontal	PASS
6	14039.850	2.14	47.85	49.99	68.23	18.24	46.39	48.53	54.00	5.47	150	350	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5745 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

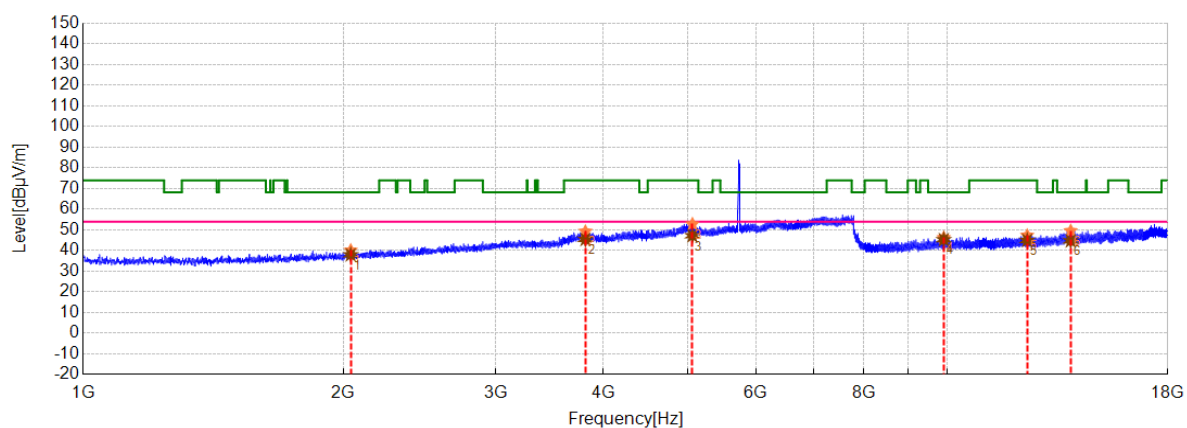
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2998.5200	5.93	38.12	44.05	68.23	24.18	36.20	42.13	54.00	11.87	150	10	Vertical	PASS
2	3737.0000	8.49	40.86	49.35	74.00	24.65	38.78	47.27	54.00	6.73	150	210	Vertical	PASS
3	5043.2800	13.30	39.38	52.68	74.00	21.32	37.17	50.47	54.00	3.53	150	110	Vertical	PASS
4	9930.7800	-4.34	50.7	46.36	68.23	21.87	48.92	44.58	54.00	9.42	150	130	Vertical	PASS
5	11962.620	-1.77	49.52	47.75	74.00	26.25	47.00	45.23	54.00	8.77	150	60	Vertical	PASS
6	14547.300	2.23	46.84	49.07	68.23	19.16	41.56	43.79	54.00	10.21	150	80	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5745 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

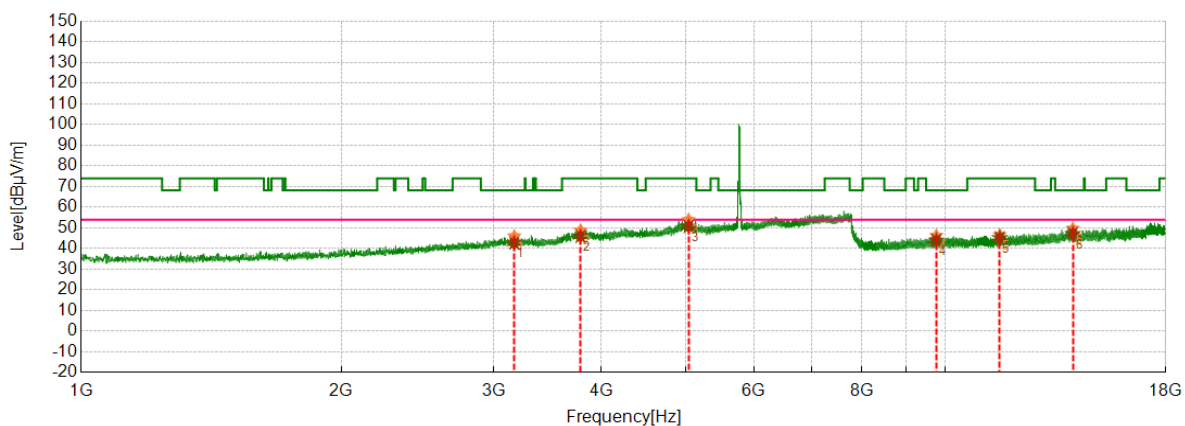
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2039.0400	1.93	38.2	40.13	68.23	28.10	36.05	37.98	54.00	16.02	150	340	Horizontal	PASS
2	3811.1200	8.97	40.35	49.32	74.00	24.68	36.47	45.44	54.00	8.56	150	220	Horizontal	PASS
3	5069.1200	13.22	39.64	52.86	74.00	21.14	33.99	47.21	54.00	6.79	150	240	Horizontal	PASS
4	9905.2800	-4.40	50.68	46.28	68.23	21.95	49.70	45.30	54.00	8.70	150	90	Horizontal	PASS
5	12371.130	-1.08	48.47	47.39	74.00	26.61	46.02	44.94	54.00	9.06	150	310	Horizontal	PASS
6	13891.950	1.03	48.58	49.61	68.23	18.62	43.71	44.74	54.00	9.26	150	290	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5785 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBµV/m]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	AV Reading [dBµV/m]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3169.8800	6.41	39.68	46.09	68.23	22.14	36.26	42.67	54.00	11.33	150	250	Vertical	PASS
2	3782.5600	8.65	40.26	48.91	74.00	25.09	37.27	45.92	54.00	8.08	150	280	Vertical	PASS
3	5045.3200	13.23	40.74	53.97	74.00	20.03	37.50	50.73	54.00	3.27	150	200	Vertical	PASS
4	9762.9900	-4.46	50.78	46.32	68.23	21.91	48.41	43.95	54.00	10.05	150	220	Vertical	PASS
5	11560.740	-1.92	48.57	46.65	74.00	27.35	47.10	45.18	54.00	8.82	150	50	Vertical	PASS
6	14046.480	1.94	47.83	49.77	68.23	18.46	45.27	47.21	54.00	6.79	150	120	Vertical	PASS

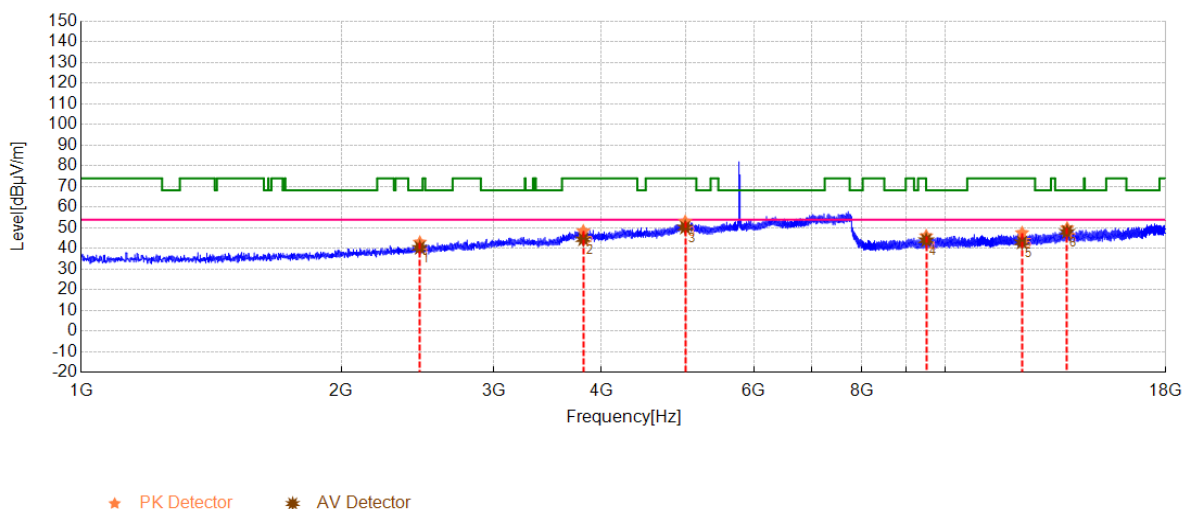
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5785 MHz

Test Graph



Final Data List

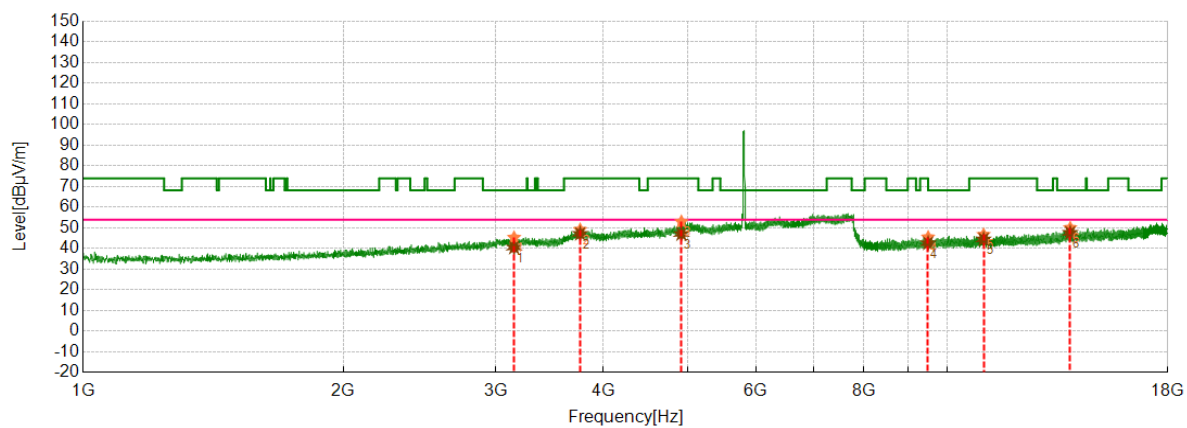
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2464.7200	3.56	39.45	43.01	68.23	25.22	36.85	40.41	54.00	13.59	150	20	Horizontal	PASS
2	3810.4400	9.00	39.48	48.48	74.00	25.52	35.54	44.54	54.00	9.46	150	130	Horizontal	PASS
3	4999.0800	13.19	39.88	53.07	74.00	20.93	37.03	50.22	54.00	3.78	150	240	Horizontal	PASS
4	9502.8900	-4.49	50.59	46.10	68.23	22.13	48.55	44.06	54.00	9.94	150	230	Horizontal	PASS
5	12269.130	-1.19	48.81	47.62	74.00	26.38	44.21	43.02	54.00	10.98	150	190	Horizontal	PASS
6	13834.830	1.48	48.42	49.90	68.23	18.33	46.65	48.13	54.00	5.87	150	10	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5825 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3151.5200	6.45	38.95	45.40	68.23	22.83	34.08	40.53	54.00	13.47	150	210	Vertical	PASS
2	3758.0800	8.31	40.85	49.16	74.00	24.84	38.88	47.19	54.00	6.81	150	260	Vertical	PASS
3	4922.2400	13.16	39.85	53.01	74.00	20.99	33.91	47.07	54.00	6.93	150	120	Vertical	PASS
4	9500.8500	-4.48	50.02	45.54	68.23	22.69	47.10	42.62	54.00	11.38	150	140	Vertical	PASS
5	11015.040	-3.03	49.8	46.77	74.00	27.23	47.54	44.51	54.00	9.49	150	180	Vertical	PASS
6	13874.100	1.43	48.66	50.09	68.23	18.14	46.23	47.66	54.00	6.34	150	80	Vertical	PASS

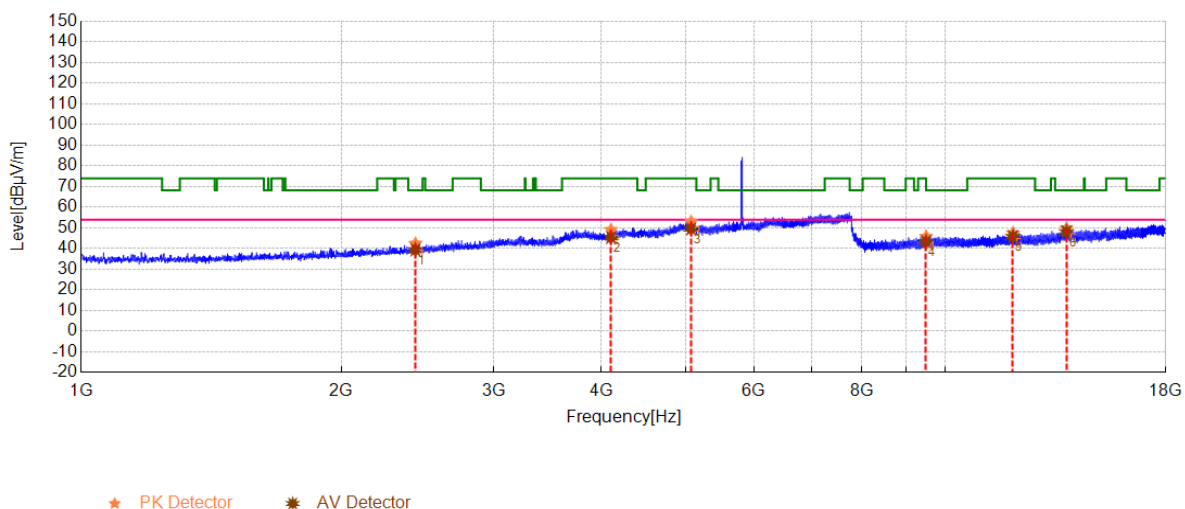
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5825 MHz

Test Graph



Final Data List

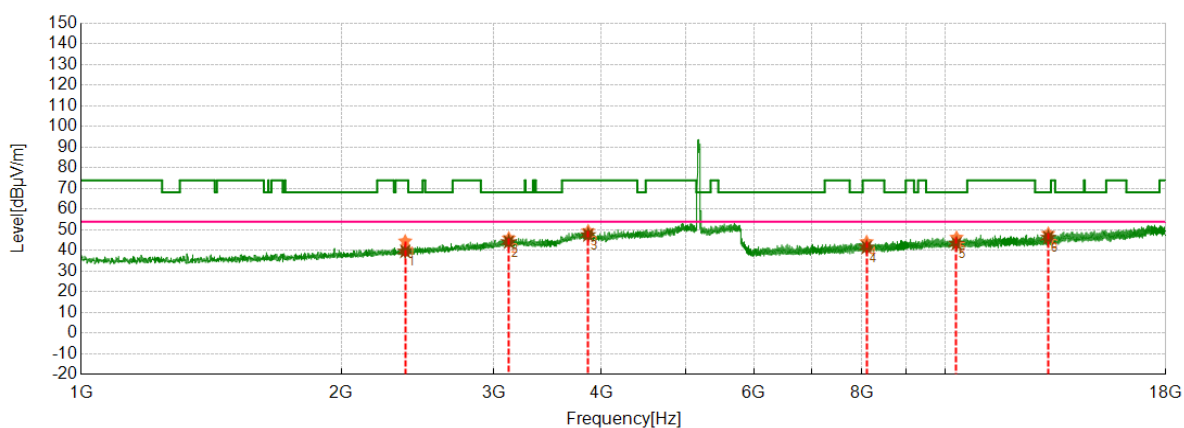
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2436.1600	3.43	39.08	42.51	68.23	25.72	35.99	39.42	54.00	14.58	150	340	Horizontal	PASS
2	4102.8400	9.61	39.56	49.17	74.00	24.83	35.81	45.42	54.00	8.58	150	140	Horizontal	PASS
3	5080.0000	13.28	39.78	53.06	74.00	20.94	36.32	49.60	54.00	4.40	150	340	Horizontal	PASS
4	9499.8300	-4.49	50.31	45.82	74.00	28.18	47.83	43.34	54.00	10.66	150	230	Horizontal	PASS
5	11976.900	-1.59	49.14	47.55	74.00	26.45	47.36	45.77	54.00	8.23	150	200	Horizontal	PASS
6	13811.880	1.24	48.64	49.88	68.23	18.35	46.88	48.12	54.00	5.88	150	190	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40

Channel: 5180 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

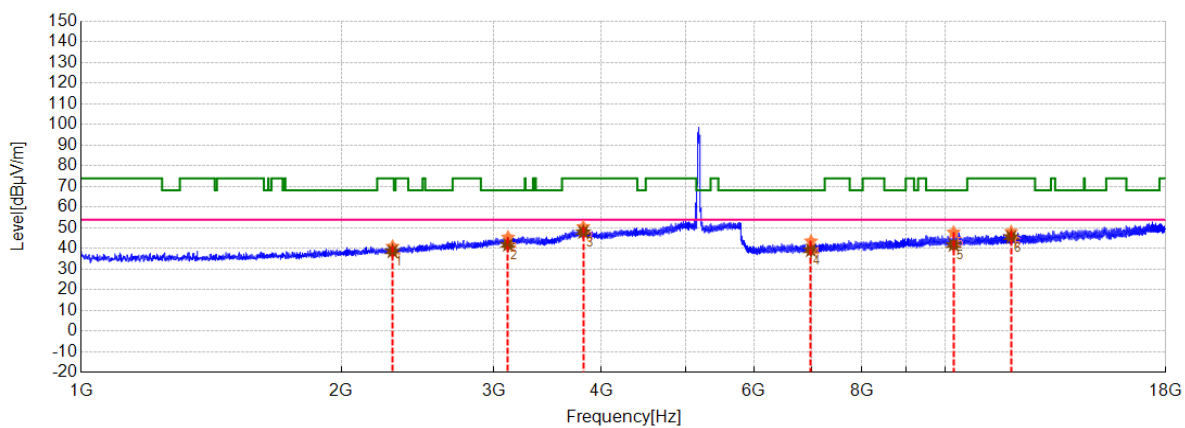
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2370.4000	3.03	41.54	44.57	74.00	29.43	36.63	39.66	54.00	14.34	150	202	Vertical	PASS
2	3124.0000	6.49	39.55	46.04	68.23	22.19	37.67	44.16	54.00	9.84	150	210	Vertical	PASS
3	3860.2000	8.83	40.64	49.47	74.00	24.53	38.75	47.58	54.00	6.42	150	133	Vertical	PASS
4	8107.6300	-7.73	51.93	44.20	74.00	29.80	49.31	41.58	54.00	12.42	150	316	Vertical	PASS
5	10303.630	-3.55	49.89	46.34	68.23	21.89	46.88	43.33	54.00	10.67	150	329	Vertical	PASS
6	13156.600	0.10	48.14	48.24	68.23	19.99	46.20	46.30	54.00	7.70	150	349	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5190 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

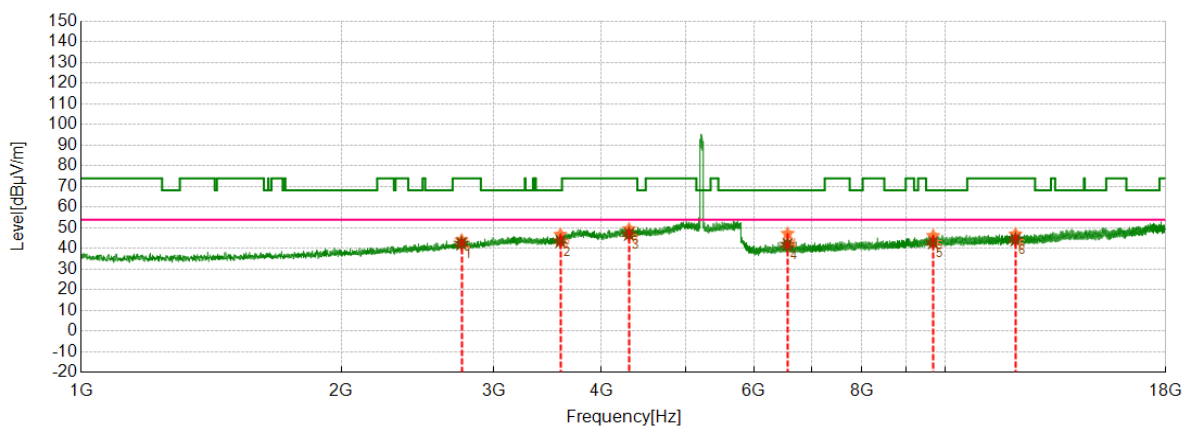
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2291.8000	2.88	38.13	41.01	74.00	32.99	35.77	38.65	54.00	15.35	150	56	Horizontal	PASS
2	3118.0000	6.46	39.04	45.50	68.23	22.73	35.40	41.86	54.00	12.14	150	217	Horizontal	PASS
3	3810.4000	9.00	41.54	50.54	74.00	23.46	38.99	47.99	54.00	6.01	150	4	Horizontal	PASS
4	6990.7200	-8.97	52.55	43.58	68.23	24.65	48.18	39.21	54.00	14.79	150	51	Horizontal	PASS
5	10223.720	-4.02	51.94	47.92	68.23	20.31	45.80	41.78	54.00	12.22	150	356	Horizontal	PASS
6	11917.690	-1.82	50.02	48.20	74.00	25.80	47.43	45.61	54.00	8.39	150	310	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5230 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

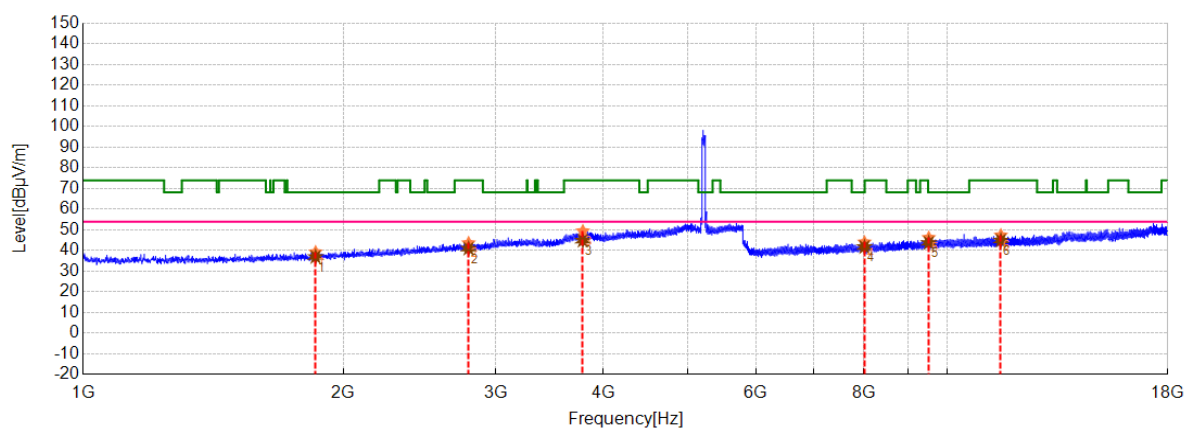
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2754.4000	4.71	39.43	44.14	74.00	29.86	37.67	42.38	54.00	11.62	150	51	Vertical	PASS
2	3584.8000	7.52	39.31	46.83	68.23	21.40	36.10	43.62	54.00	10.38	150	234	Vertical	PASS
3	4304.2000	10.23	39.29	49.52	74.00	24.48	36.74	46.97	54.00	7.03	150	303	Vertical	PASS
4	6567.9900	-10.04	57.33	47.29	68.23	20.94	51.96	41.92	54.00	12.08	150	129	Vertical	PASS
5	9680.8200	-4.14	50.38	46.24	68.23	21.99	47.04	42.90	54.00	11.10	150	239	Vertical	PASS
6	12055.550	-1.64	48.65	47.01	74.00	26.99	45.93	44.29	54.00	9.71	150	265	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40

Channel: 5230 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

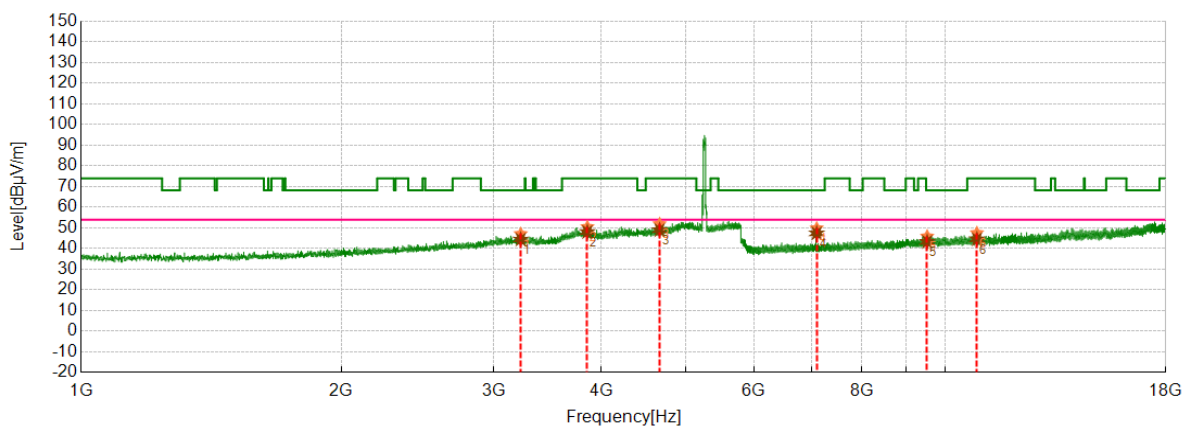
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1856.8000	1.24	38.04	39.28	68.23	28.95	35.71	36.95	54.00	17.05	150	178	Horizontal	PASS
2	2791.6000	5.11	38.57	43.68	74.00	30.32	35.88	40.99	54.00	13.01	150	22	Horizontal	PASS
3	3785.2000	8.55	40.91	49.46	74.00	24.54	36.30	44.85	54.00	9.15	150	195	Horizontal	PASS
4	8018.5700	-7.41	51.48	44.07	68.23	24.16	49.17	41.76	54.00	12.24	150	128	Horizontal	PASS
5	9517.3400	-4.33	50.6	46.27	68.23	21.96	48.11	43.78	54.00	10.22	150	113	Horizontal	PASS
6	11533.390	-2.37	49.81	47.44	74.00	26.56	47.28	44.91	54.00	9.09	150	76	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5270 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3224.8000	6.44	40.73	47.17	68.23	21.06	37.97	44.41	54.00	9.59	150	113	Vertical	PASS
2	3851.8000	9.02	41.49	50.51	74.00	23.49	39.03	48.05	54.00	5.95	150	304	Vertical	PASS
3	4669.6000	11.83	40.12	51.95	74.00	22.05	37.13	48.96	54.00	5.04	150	38	Vertical	PASS
4	7097.4700	-9.64	59.55	49.91	68.23	18.32	57.03	47.39	54.00	6.61	150	130	Vertical	PASS
5	9527.7100	-4.26	50.21	45.95	68.23	22.28	47.56	43.30	54.00	10.70	150	79	Vertical	PASS
6	10878.860	-3.43	51.04	47.61	74.00	26.39	47.98	44.55	54.00	9.45	150	46	Vertical	PASS

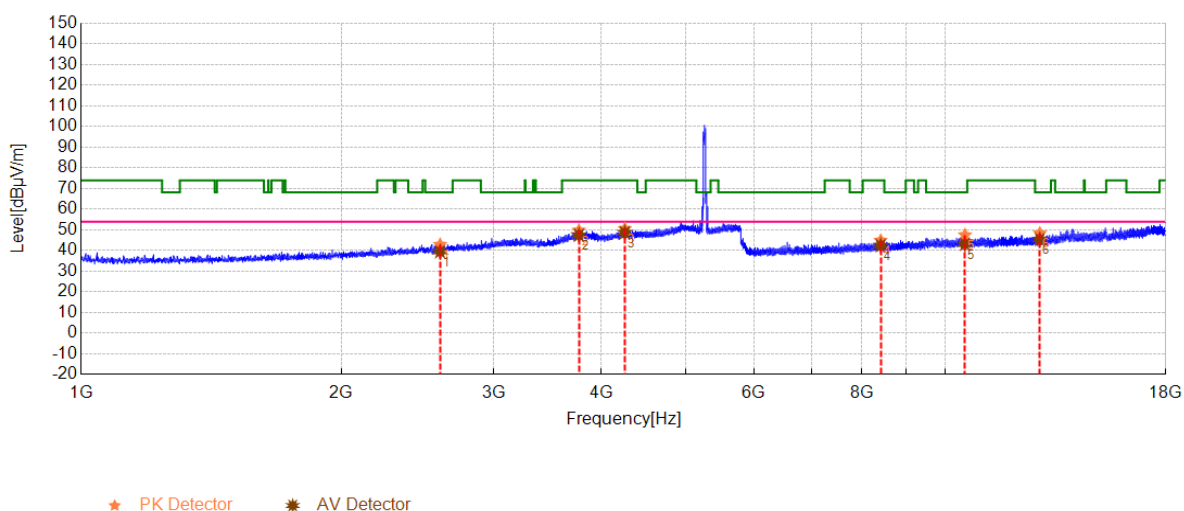
Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40

Channel: 5270 MHz

Test Graph



Final Data List

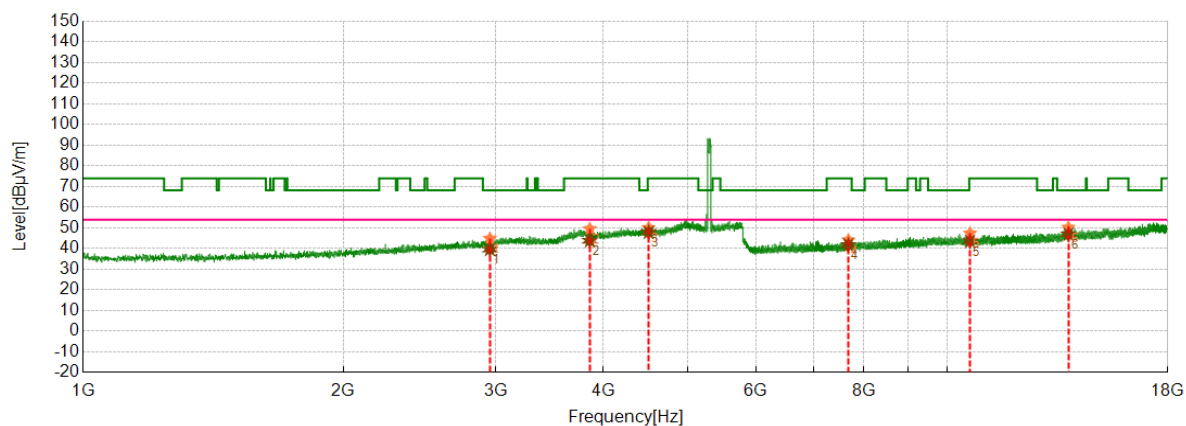
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2601.4000	4.06	38.87	42.93	68.23	25.30	35.44	39.50	54.00	14.50	150	145	Horizontal	PASS
2	3766.0000	8.53	41.27	49.80	74.00	24.20	38.97	47.50	54.00	6.50	150	145	Horizontal	PASS
3	4256.2000	10.27	40.32	50.59	74.00	23.41	38.43	48.70	54.00	5.30	150	312	Horizontal	PASS
4	8416.9000	-7.21	52.13	44.92	74.00	29.08	49.65	42.44	54.00	11.56	150	236	Horizontal	PASS
5	10536.650	-3.67	51.24	47.57	68.23	20.66	46.78	43.11	54.00	10.89	150	82	Horizontal	PASS
6	12863.190	-0.59	48.99	48.40	68.23	19.83	45.98	45.39	54.00	8.61	150	138	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5310 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2954.8000	5.81	39.1	44.91	68.23	23.32	33.76	39.57	54.00	14.43	150	210	Vertical	PASS
2	3856.0000	8.92	40.68	49.60	74.00	24.40	34.89	43.81	54.00	10.19	150	74	Vertical	PASS
3	4511.2000	11.07	38.99	50.06	74.00	23.94	36.80	47.87	54.00	6.13	150	184	Vertical	PASS
4	7682.4600	-8.49	52.64	44.15	74.00	29.85	50.30	41.81	54.00	12.19	150	158	Vertical	PASS
5	10623.880	-3.28	50.74	47.46	74.00	26.54	46.87	43.59	54.00	10.41	150	292	Vertical	PASS
6	13808.080	0.94	49.29	50.23	68.23	18.00	46.02	46.96	54.00	7.04	150	28	Vertical	PASS

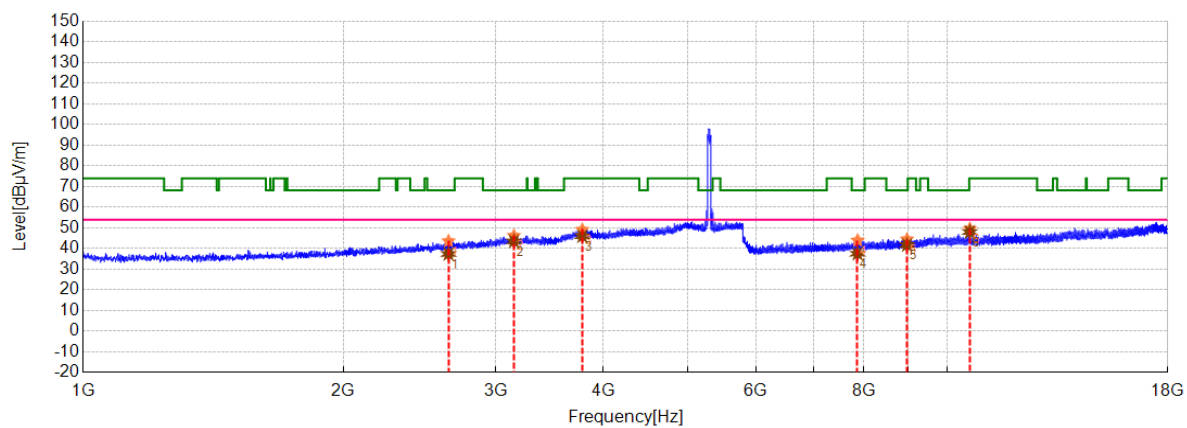
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5310 MHz

Test Graph



★ PK Detector * AV Detector

Final Data List

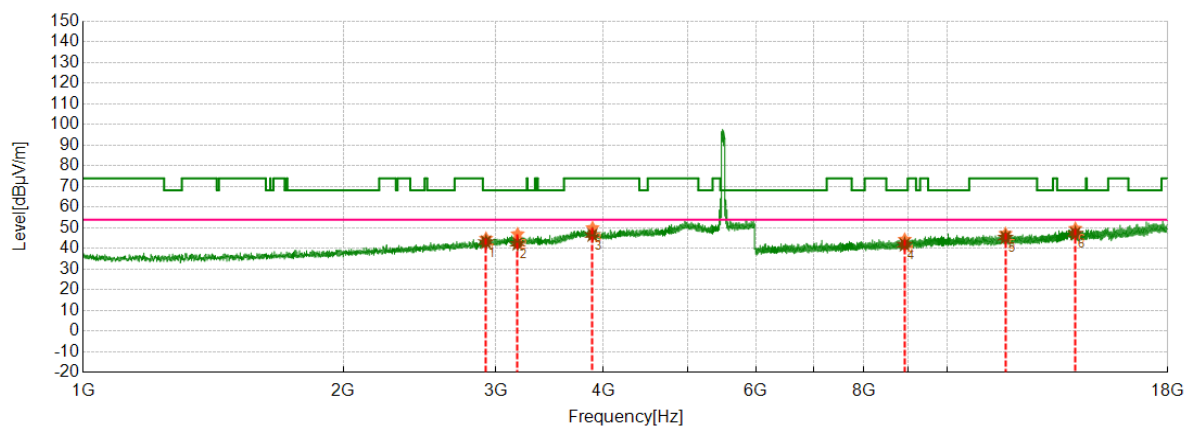
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2646.4000	4.25	39.42	43.67	68.23	24.56	33.16	37.41	54.00	16.59	150	34	Horizontal	PASS
2	3150.4000	6.46	39.81	46.27	68.23	21.96	37.07	43.53	54.00	10.47	150	38	Horizontal	PASS
3	3779.8000	8.74	40.47	49.21	74.00	24.79	37.28	46.02	54.00	7.98	150	222	Horizontal	PASS
4	7872.7800	-8.41	52.4	43.99	68.23	24.24	45.97	37.56	54.00	16.44	150	15	Horizontal	PASS
5	8981.1500	-6.52	51.07	44.55	68.23	23.68	48.28	41.76	54.00	12.24	150	283	Horizontal	PASS
6	10617.780	-3.20	52.82	49.62	74.00	24.38	51.25	48.05	54.00	5.95	150	261	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40

Channel: 5510 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

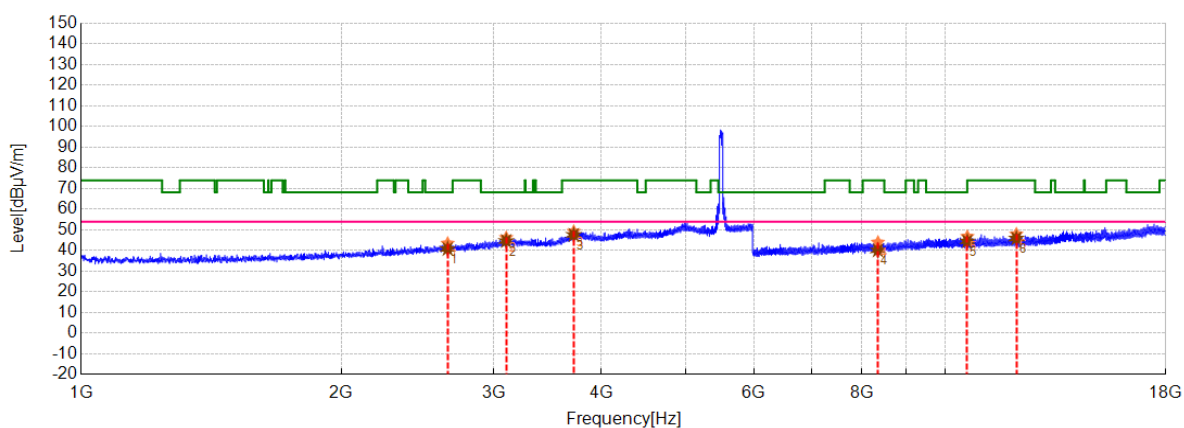
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2924.3750	5.59	39.3	44.89	68.23	23.34	37.55	43.14	54.00	10.86	150	88	Vertical	PASS
2	3181.2500	6.46	40.59	47.05	68.23	21.18	35.89	42.35	54.00	11.65	150	346	Vertical	PASS
3	3884.3750	9.10	40.91	50.01	74.00	23.99	37.50	46.60	54.00	7.40	150	154	Vertical	PASS
4	8925.6000	-6.14	50.53	44.39	68.23	23.84	48.04	41.90	54.00	12.10	150	36	Vertical	PASS
5	11677.200	-1.99	49.24	47.25	74.00	26.75	47.38	45.39	54.00	8.61	150	309	Vertical	PASS
6	14065.800	1.51	48.18	49.69	68.23	18.54	45.80	47.31	54.00	6.69	150	222	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5510 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2654.3750	4.35	39.16	43.51	68.23	24.72	36.47	40.82	54.00	13.18	150	52	Horizontal	PASS
2	3102.5000	6.40	39.85	46.25	68.23	21.98	38.28	44.68	54.00	9.32	150	140	Horizontal	PASS
3	3714.3750	8.22	41.04	49.26	74.00	24.74	39.41	47.63	54.00	6.37	150	316	Horizontal	PASS
4	8356.2000	-7.49	51.51	44.02	74.00	29.98	47.63	40.14	54.00	13.86	150	192	Horizontal	PASS
5	10603.800	-2.97	49.77	46.80	74.00	27.20	47.49	44.52	54.00	9.48	150	60	Horizontal	PASS
6	12084.600	-1.53	49.47	47.94	74.00	26.06	47.42	45.89	54.00	8.11	150	308	Horizontal	PASS

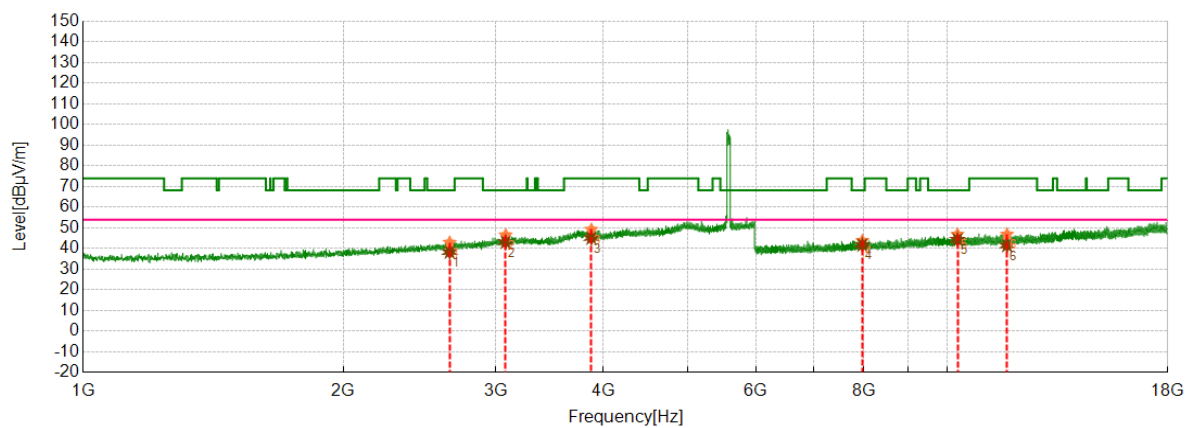
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5590 MHz

Test Graph



★ PK Detector ★ AV Detector

Final Data List

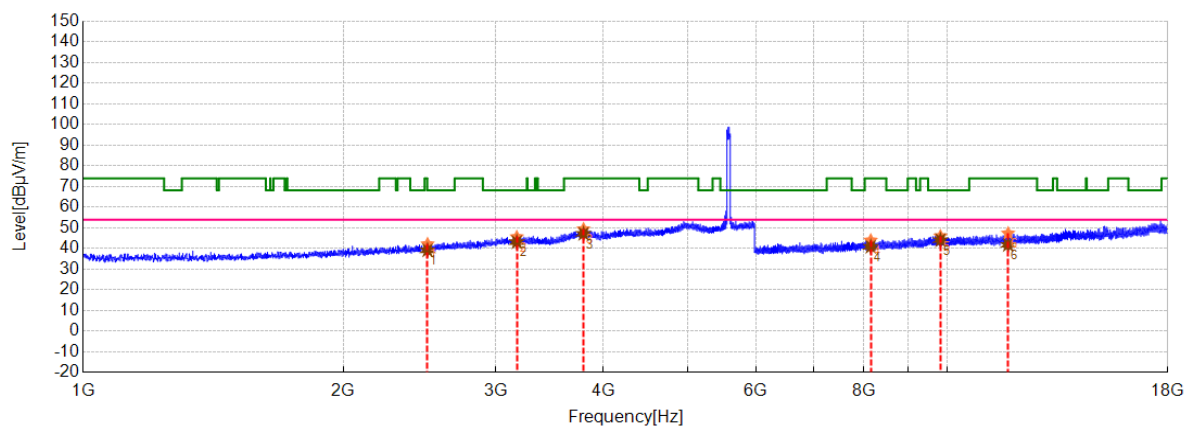
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2654.3750	4.35	38.62	42.97	68.23	25.26	33.98	38.33	54.00	15.67	150	341	Vertical	PASS
2	3081.8750	6.17	40.41	46.58	68.23	21.65	36.97	43.14	54.00	10.86	150	201	Vertical	PASS
3	3872.5000	8.97	40.28	49.25	74.00	24.75	36.16	45.13	54.00	8.87	150	358	Vertical	PASS
4	7973.4000	-7.45	51.22	43.77	68.23	24.46	49.20	41.75	54.00	12.25	150	94	Vertical	PASS
5	10274.400	-3.55	50.42	46.87	68.23	21.36	47.87	44.32	54.00	9.68	150	184	Vertical	PASS
6	11725.800	-2.06	48.96	46.90	74.00	27.10	43.56	41.50	54.00	12.50	150	216	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40

Channel: 5590 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2502.5000	3.43	38.79	42.22	68.23	26.01	35.79	39.22	54.00	14.78	150	75	Horizonta	PASS
2	3174.3750	6.43	39.23	45.66	68.23	22.57	36.73	43.16	54.00	10.84	150	288	Horizonta	PASS
3	3792.5000	8.39	41.02	49.41	74.00	24.59	38.81	47.20	54.00	6.80	150	40	Horizonta	PASS
4	8152.8000	-7.78	51.79	44.01	74.00	29.99	48.69	40.91	54.00	13.09	150	205	Horizonta	PASS
5	9817.8000	-3.98	50.03	46.05	68.23	22.18	48.11	44.13	54.00	9.87	150	257	Horizonta	PASS
6	11758.200	-1.84	49.26	47.42	74.00	26.58	43.67	41.83	54.00	12.17	150	199	Horizonta	PASS

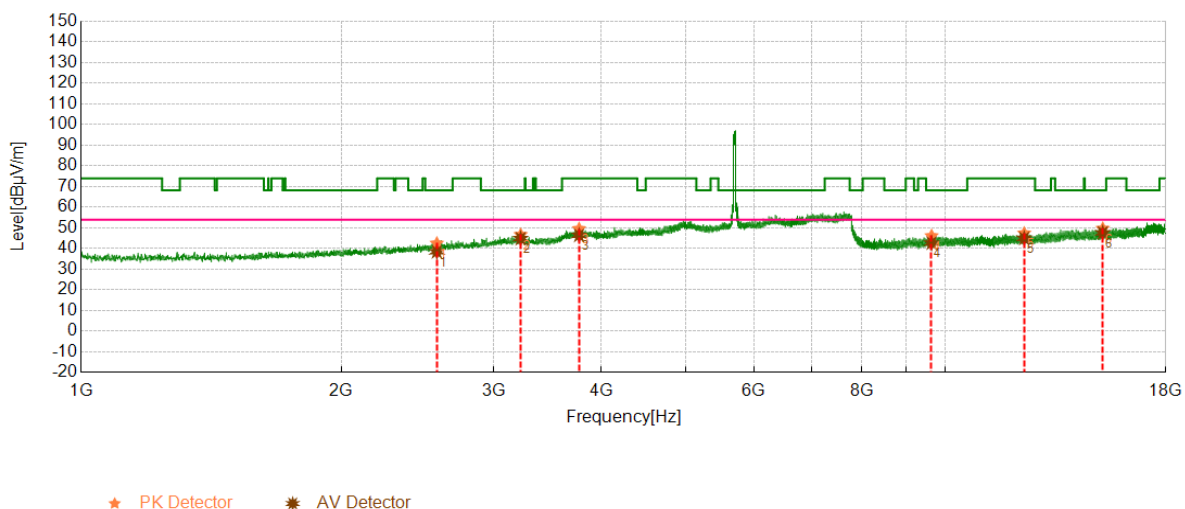
Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40

Channel: 5710 MHz

Test Graph



Final Data List

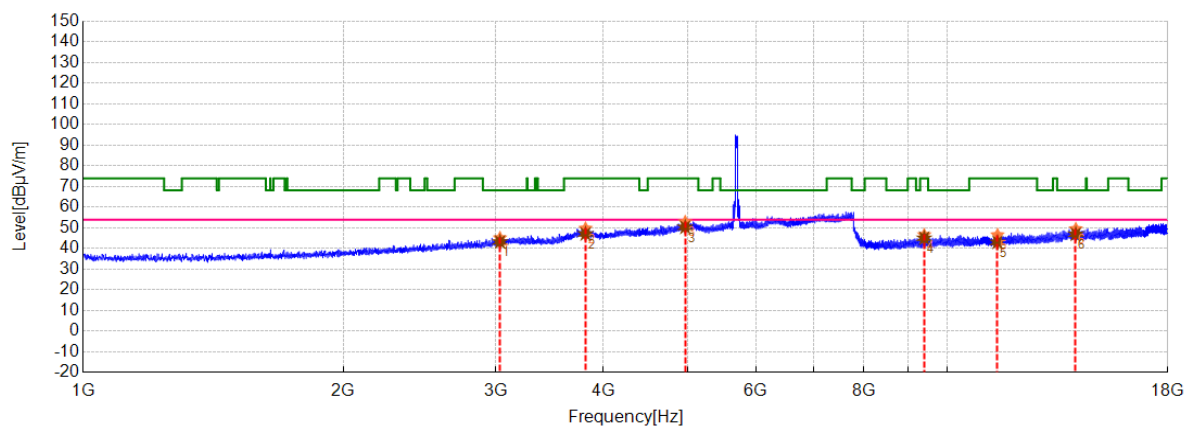
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2578.9600	4.21	38.35	42.56	68.23	25.67	34.26	38.47	54.00	15.53	150	184	Vertical	PASS
2	3224.2800	6.44	40.29	46.73	68.23	21.50	38.43	44.87	54.00	9.13	150	116	Vertical	PASS
3	3767.6000	8.61	41.02	49.63	74.00	24.37	37.82	46.43	54.00	7.57	150	13	Vertical	PASS
4	9640.0800	-4.72	50.87	46.15	68.23	22.08	47.42	42.70	54.00	11.30	150	212	Vertical	PASS
5	12339.000	-1.26	48.72	47.46	74.00	26.54	46.21	44.95	54.00	9.05	150	149	Vertical	PASS
6	15212.340	2.29	47.43	49.72	68.23	18.51	45.35	47.64	54.00	6.36	150	199	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5710 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

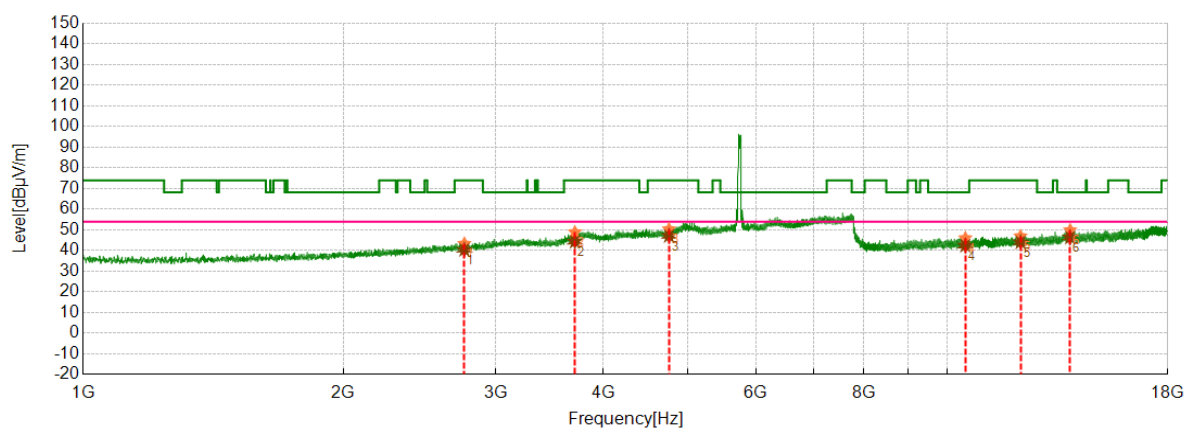
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3035.2400	6.09	39.05	45.14	68.23	23.09	37.13	43.22	54.00	10.78	150	4	Horizontal	PASS
2	3812.4800	8.92	40.87	49.79	74.00	24.21	38.18	47.10	54.00	6.90	150	198	Horizontal	PASS
3	4972.5600	13.84	39.07	52.91	74.00	21.09	36.49	50.33	54.00	3.67	150	266	Horizontal	PASS
4	9402.4200	-4.80	51.44	46.64	74.00	27.36	49.84	45.04	54.00	8.96	150	48	Horizontal	PASS
5	11431.200	-2.40	49.01	46.61	74.00	27.39	45.46	43.06	54.00	10.94	150	237	Horizontal	PASS
6	14081.670	1.77	47.77	49.54	68.23	18.69	45.20	46.97	54.00	7.03	150	198	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5755 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2760.5200	4.96	38.44	43.40	74.00	30.60	35.43	40.39	54.00	13.61	150	261	Vertical	PASS
2	3705.7200	8.44	40.53	48.97	74.00	25.03	35.91	44.35	54.00	9.65	150	331	Vertical	PASS
3	4762.4400	12.29	38.17	50.46	74.00	23.54	34.82	47.11	54.00	6.89	150	57	Vertical	PASS
4	10491.780	-3.84	49.93	46.09	68.23	22.14	46.23	42.39	54.00	11.61	150	254	Vertical	PASS
5	12154.890	-0.90	47.93	47.03	74.00	26.97	44.92	44.02	54.00	9.98	150	247	Vertical	PASS
6	13872.060	1.42	48.53	49.95	68.23	18.28	44.95	46.37	54.00	7.63	150	208	Vertical	PASS

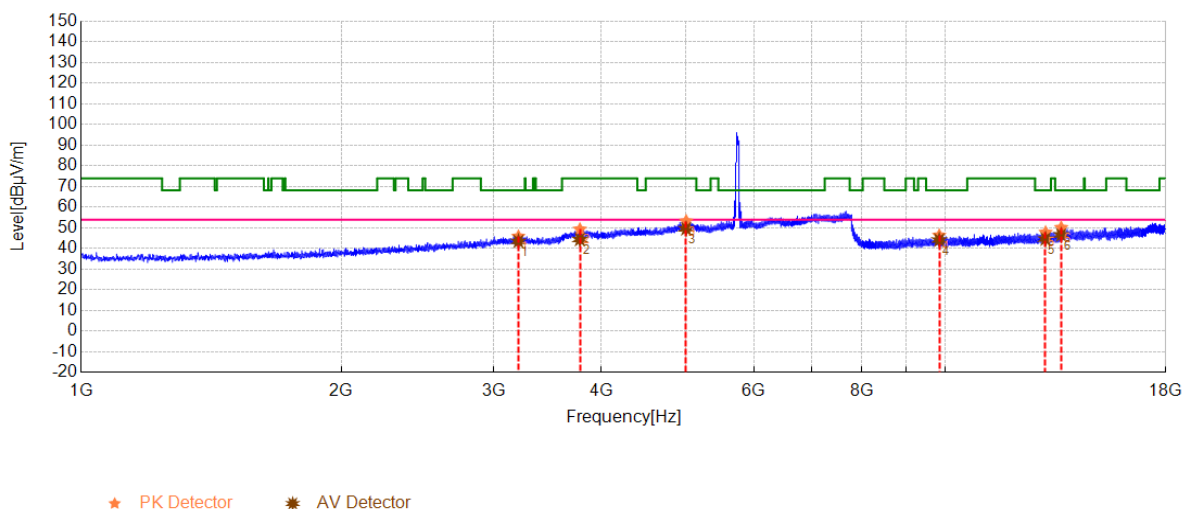
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5755 MHz

Test Graph



Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3205.2400	6.50	39.4	45.90	68.23	22.33	37.01	43.51	54.00	10.49	150	9	Horizontal	PASS
2	3775.7600	8.74	40.64	49.38	74.00	24.62	35.69	44.43	54.00	9.57	150	62	Horizontal	PASS
3	5012.0000	13.55	39.74	53.29	74.00	20.71	36.04	49.59	54.00	4.41	150	258	Horizontal	PASS
4	9837.9600	-3.94	50.36	46.42	68.23	21.81	48.09	44.15	54.00	9.85	150	220	Horizontal	PASS
5	13062.180	0.46	47.4	47.86	68.23	20.37	44.18	44.64	54.00	9.36	150	326	Horizontal	PASS
6	13618.080	0.54	49.63	50.17	68.23	18.06	46.08	46.62	54.00	7.38	150	12	Horizontal	PASS

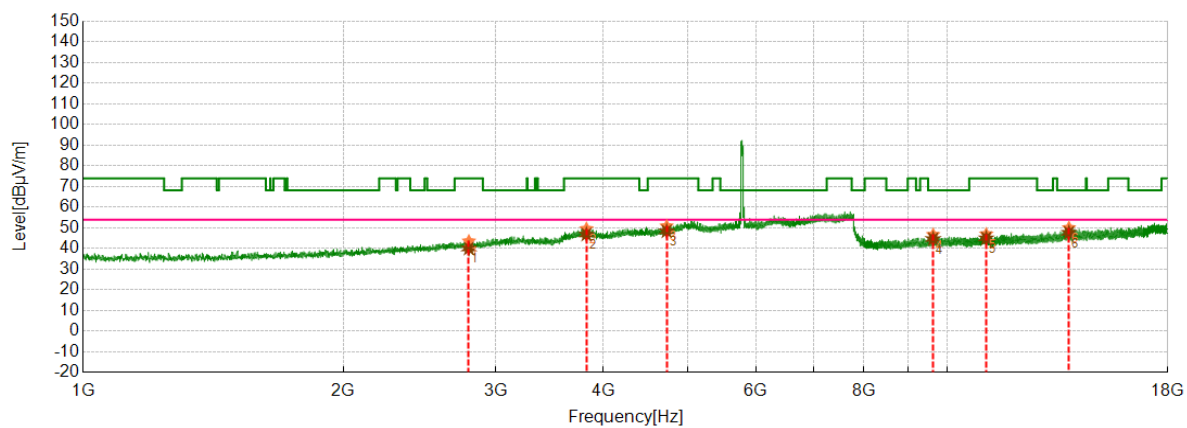
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5795 MHz

Test Graph



★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2793.8400	5.14	38.47	43.61	74.00	30.39	34.95	40.09	54.00	13.91	150	312	Vertical	PASS
2	3822.0000	8.63	40.97	49.60	74.00	24.40	38.21	46.84	54.00	7.16	150	286	Vertical	PASS
3	4733.2000	12.28	38.62	50.90	74.00	23.10	36.13	48.41	54.00	5.59	150	182	Vertical	PASS
4	9628.3500	-4.84	51.57	46.73	68.23	21.50	49.51	44.67	54.00	9.33	150	117	Vertical	PASS
5	11093.070	-2.70	49.73	47.03	74.00	26.97	47.71	45.01	54.00	8.99	150	56	Vertical	PASS
6	13828.200	1.48	48.57	50.05	68.23	18.18	46.21	47.69	54.00	6.31	150	318	Vertical	PASS

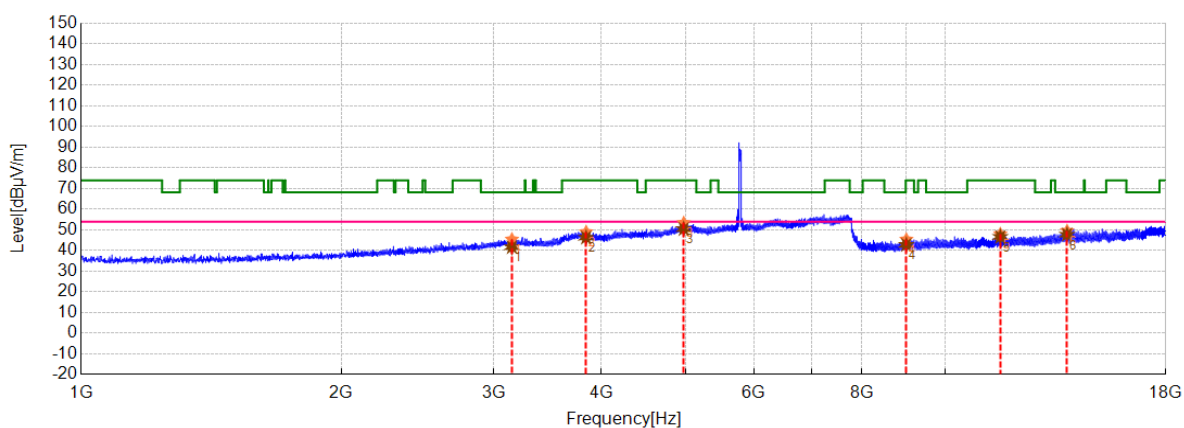
Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40

Channel: 5795 MHz

Test Graph



★ PK Detector ★ AV Detector

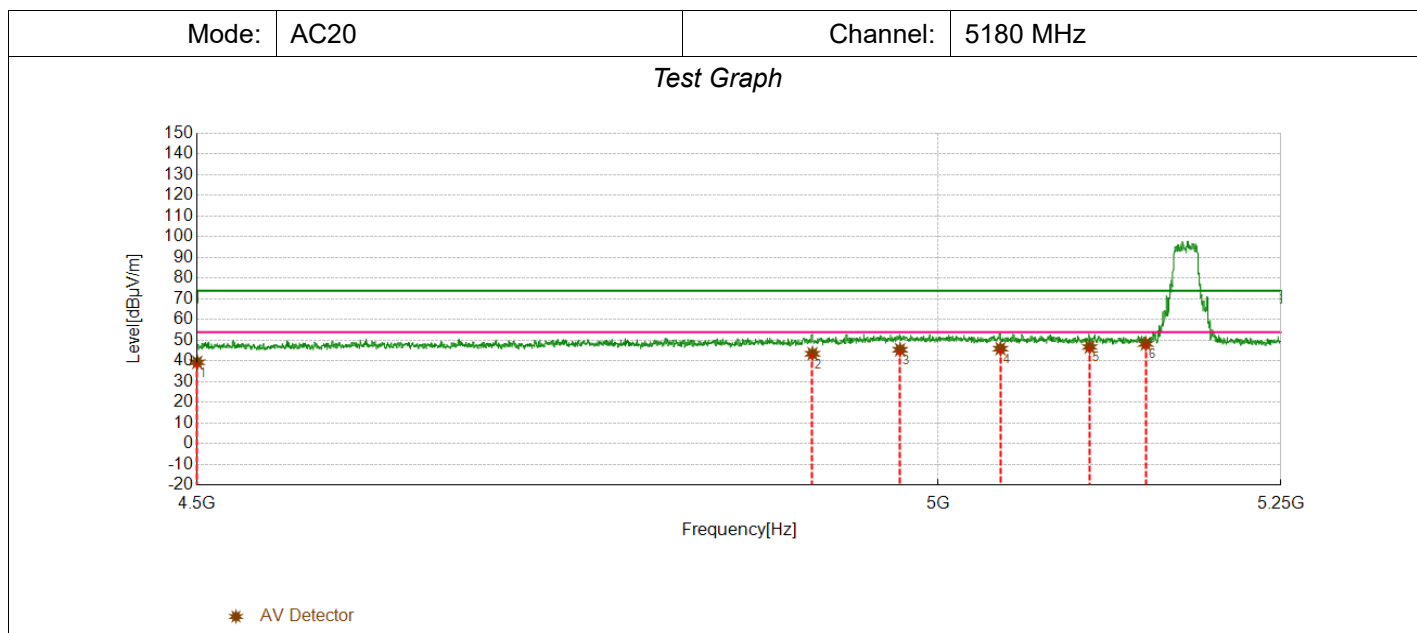
Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3150.1600	6.47	39	45.47	68.23	22.76	35.22	41.69	54.00	12.31	150	26	Horizontal	PASS
2	3839.0000	9.14	39.9	49.04	74.00	24.96	37.15	46.29	54.00	7.71	150	212	Horizontal	PASS
3	4979.3600	13.64	39.83	53.47	74.00	20.53	36.82	50.46	54.00	3.54	150	203	Horizontal	PASS
4	9012.7800	-6.13	51.57	45.44	74.00	28.56	48.94	42.81	54.00	11.19	150	188	Horizontal	PASS
5	11578.080	-1.88	49.91	48.03	74.00	25.97	48.55	46.67	54.00	7.33	150	283	Horizontal	PASS
6	13832.280	1.48	48.13	49.61	68.23	18.62	46.26	47.74	54.00	6.26	150	202	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Out of Band



Final Data List

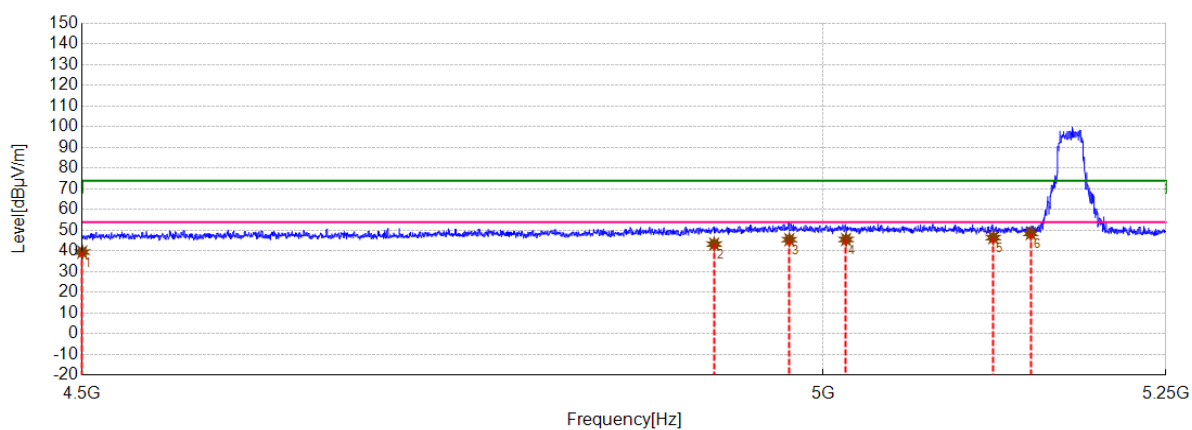
NO.	Frequency [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500.0000	11.09	28.32	39.41	54.00	14.59	150	183	Vertical	PASS
2	4911.5707	12.84	30.74	43.58	54.00	10.42	150	303	Vertical	PASS
3	4973.1715	13.83	31.67	45.50	54.00	8.50	150	15	Vertical	PASS
4	5044.6643	13.25	32.76	46.01	54.00	7.99	150	107	Vertical	PASS
5	5109.1127	13.52	33.31	46.83	54.00	7.17	150	331	Vertical	PASS
6	5150.0000	13.64	34.67	48.31	54.00	5.69	150	204	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5180 MHz

Test Graph


* AV Detector

Final Data List

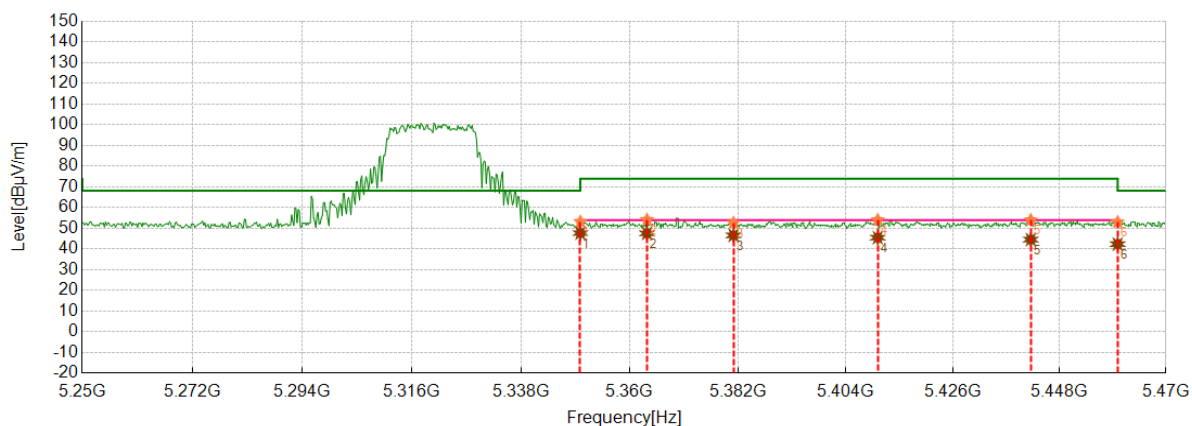
NO.	Frequency [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500.0000	11.09	28.45	39.54	54.00	14.46	150	323	Horizontal	PASS
2	4923.2614	13.10	30.29	43.39	54.00	10.61	150	113	Horizontal	PASS
3	4976.1691	13.76	31.78	45.54	54.00	8.46	150	116	Horizontal	PASS
4	5016.4868	13.46	32.14	45.60	54.00	8.40	150	14	Horizontal	PASS
5	5122.6019	13.24	33.26	46.50	54.00	7.50	150	293	Horizontal	PASS
6	5150.0000	13.64	34.85	48.49	54.00	5.51	150	341	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5320 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

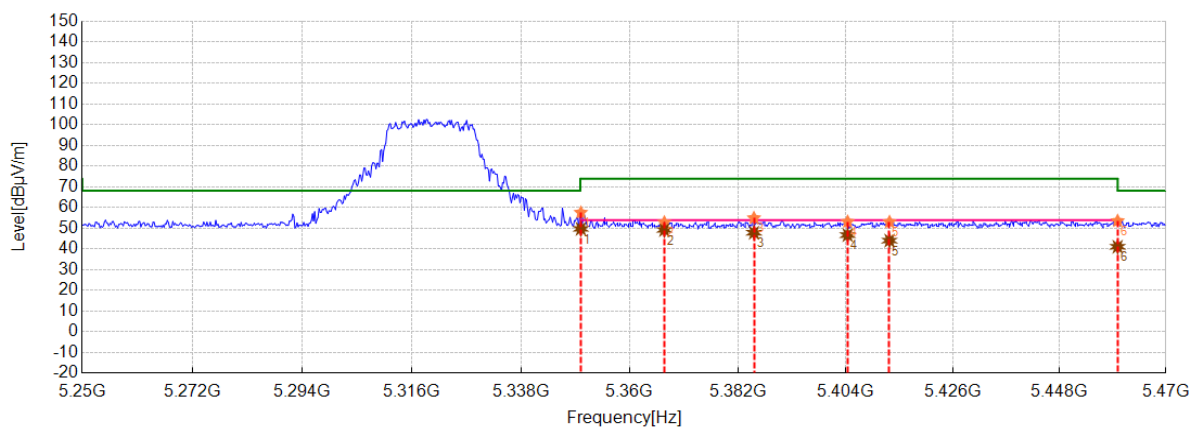
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	37.54	53.25	68.23	14.98	32.02	47.73	54.00	6.27	150	0	Vertical	PASS
2	5363.5200	16.09	38.12	54.21	74.00	19.79	31.55	47.64	54.00	6.36	150	293	Vertical	PASS
3	5381.1200	15.94	36.79	52.73	74.00	21.27	30.72	46.66	54.00	7.34	150	28	Vertical	PASS
4	5410.6000	16.07	38.02	54.09	74.00	19.91	29.46	45.53	54.00	8.47	150	208	Vertical	PASS
5	5442.0600	15.92	38.11	54.03	74.00	19.97	28.68	44.60	54.00	9.40	150	278	Vertical	PASS
6	5460.0000	15.84	37.17	53.01	74.00	20.99	26.57	42.41	54.00	11.59	150	103	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5320 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

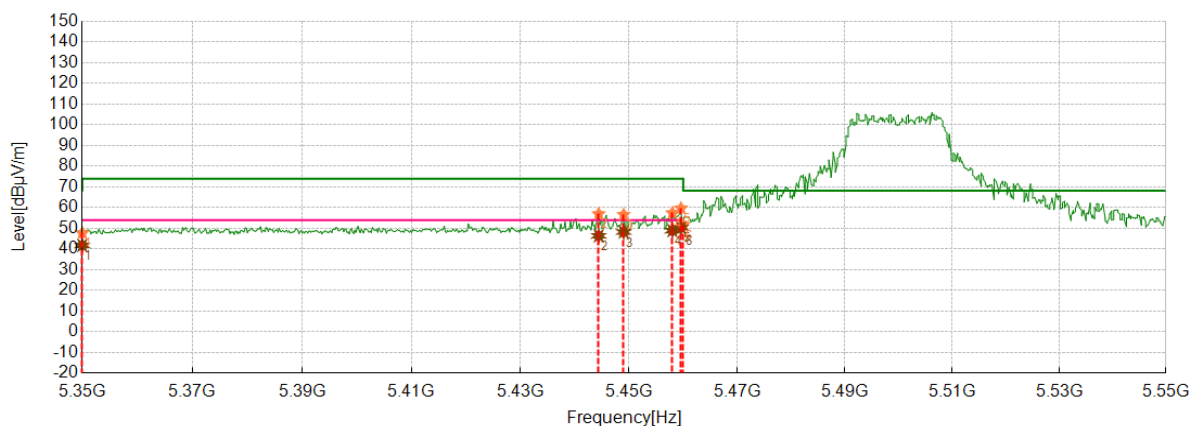
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.1000	15.71	41.95	57.66	74.00	16.34	34.08	49.79	54.00	4.21	150	89	Horizontal	PASS
2	5367.0400	15.83	37.08	52.91	74.00	21.09	33.43	49.26	54.00	4.74	150	137	Horizontal	PASS
3	5385.3000	15.91	39.13	55.04	74.00	18.96	32.01	47.92	54.00	6.08	150	98	Horizontal	PASS
4	5404.4400	16.00	37.23	53.23	74.00	20.77	30.77	46.77	54.00	7.23	150	137	Horizontal	PASS
5	5413.0200	16.02	37.11	53.13	74.00	20.87	28.10	44.12	54.00	9.88	150	86	Horizontal	PASS
6	5460.0000	15.84	37.79	53.63	74.00	20.37	25.31	41.15	54.00	12.85	150	243	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC20

Channel: 5500 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

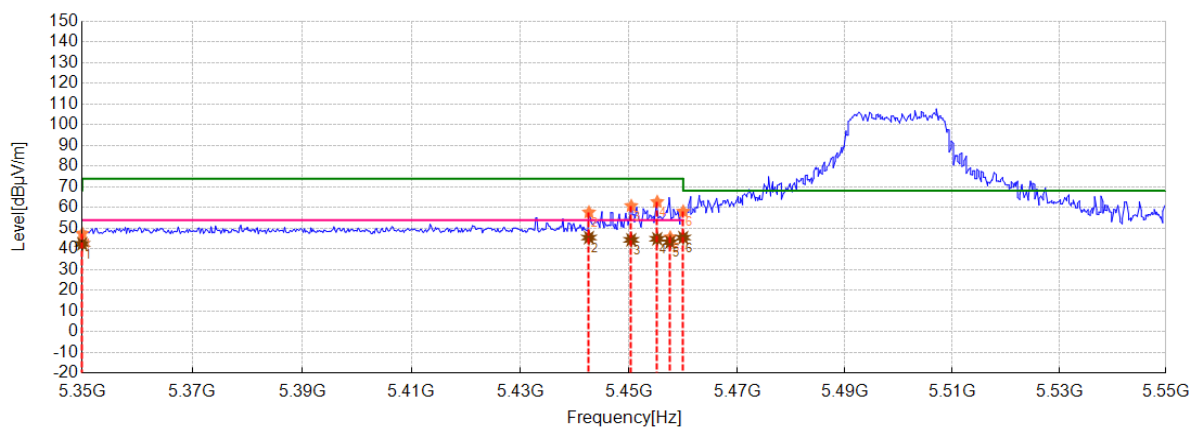
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	32.11	47.82	68.23	20.41	26.09	41.80	54.00	12.20	150	42	Vertical	PASS
2	5444.4000	15.96	41.06	57.02	74.00	16.98	30.47	46.43	54.00	7.57	150	54	Vertical	PASS
3	5449.0000	15.97	40.7	56.67	74.00	17.33	32.31	48.28	54.00	5.72	150	347	Vertical	PASS
4	5458.0000	15.83	41.66	57.49	74.00	16.51	33.12	48.95	54.00	5.05	150	61	Vertical	PASS
5	5459.6000	15.84	43.9	59.74	74.00	14.26	34.55	50.39	54.00	3.61	150	360	Vertical	PASS
6	5460.0000	15.84	35.84	51.68	74.00	22.32	32.96	48.80	54.00	5.20	150	128	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC20

Channel: 5500 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

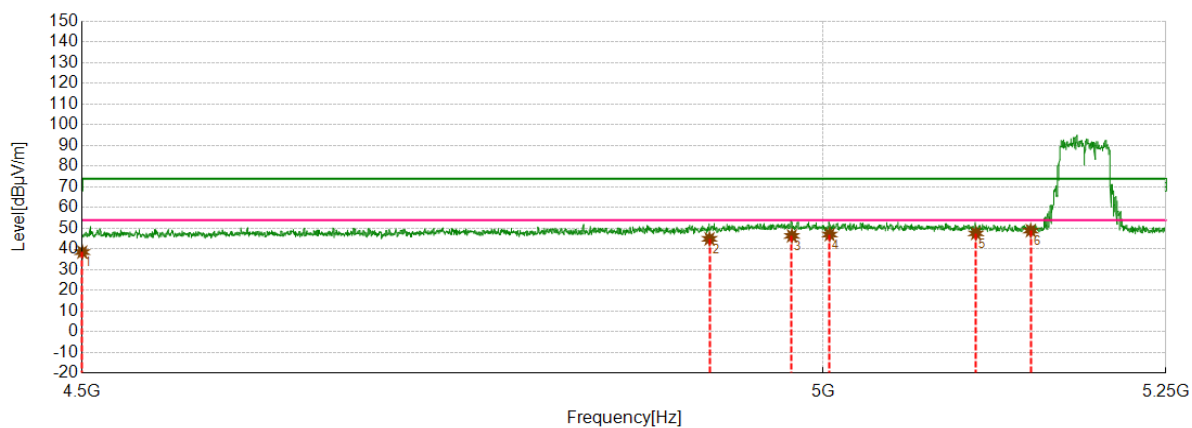
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	31.81	47.52	68.23	20.71	26.83	42.54	54.00	11.46	150	258	Horizontal	PASS
2	5442.6000	15.94	41.85	57.79	74.00	16.21	29.63	45.57	54.00	8.43	150	173	Horizontal	PASS
3	5450.4000	15.96	44.95	60.91	74.00	13.09	28.50	44.46	54.00	9.54	150	138	Horizontal	PASS
4	5455.2000	15.84	46.99	62.83	74.00	11.17	29.14	44.98	54.00	9.02	150	93	Horizontal	PASS
5	5457.6056	15.83	29.84	45.67	74.00	28.33	27.53	43.36	54.00	10.64	150	159.4	Horizontal	PASS
6	5460.0000	15.84	42.34	58.18	74.00	15.82	29.72	45.56	54.00	8.44	150	103	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5190 MHz

Test Graph


* AV Detector

Final Data List

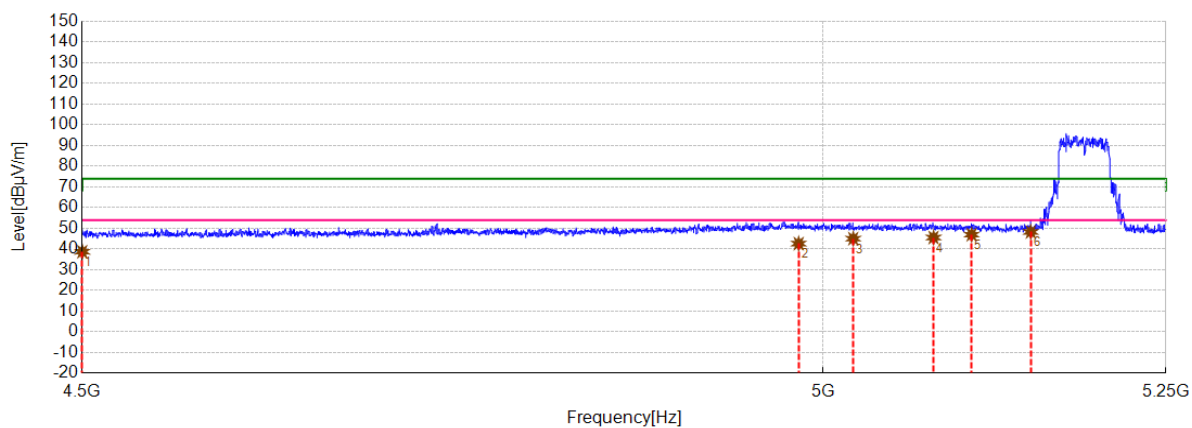
NO.	Frequency [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500.0000	11.09	27.48	38.57	54.00	15.43	150	270	Vertical	PASS
2	4919.9640	13.12	31.83	44.95	54.00	9.05	150	182	Vertical	PASS
3	4977.9676	13.69	32.72	46.41	54.00	7.59	150	360	Vertical	PASS
4	5004.7962	13.36	33.67	47.03	54.00	6.97	150	142	Vertical	PASS
5	5110.0120	13.54	34.04	47.58	54.00	6.42	150	289	Vertical	PASS
6	5150.0000	13.64	35.28	48.92	54.00	5.08	150	245	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5190 MHz

Test Graph


* AV Detector

Final Data List

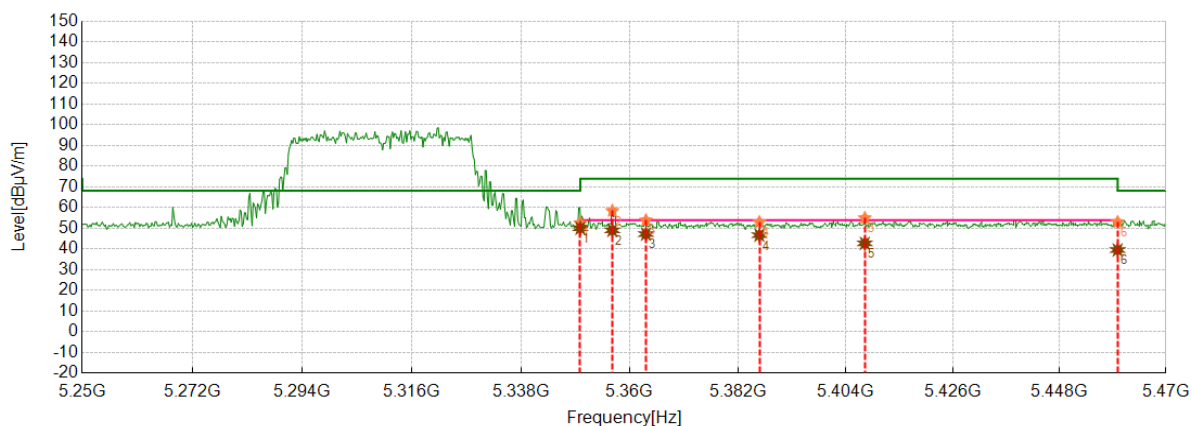
NO.	Frequency [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500.0000	11.09	27.65	38.74	54.00	15.26	150	353	Horizontal	PASS
2	4982.7638	13.45	29.21	42.66	54.00	11.34	150	48	Horizontal	PASS
3	5021.5827	13.30	31.75	45.05	54.00	8.95	150	191	Horizontal	PASS
4	5079.2866	13.27	32.32	45.59	54.00	8.41	150	320	Horizontal	PASS
5	5106.8645	13.47	33.51	46.98	54.00	7.02	150	317	Horizontal	PASS
6	5150.0000	13.64	34.65	48.29	54.00	5.71	150	58	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5310 MHz

Test Graph


★ PK Detector ✱ AV Detector

Final Data List

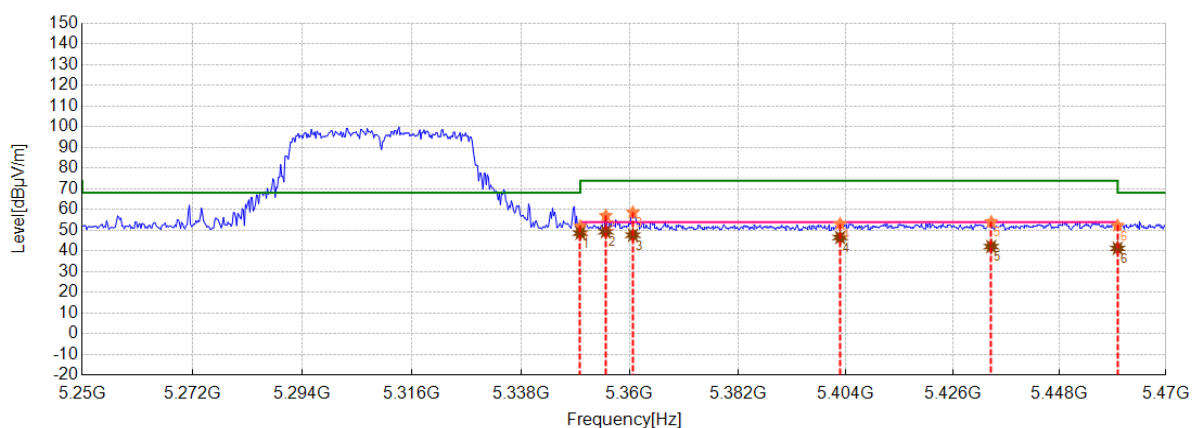
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	36.9	52.61	68.23	15.62	34.37	50.08	54.00	3.92	150	60	Vertical	PASS
2	5356.4800	16.11	42.42	58.53	74.00	15.47	32.97	49.08	54.00	4.92	150	4	Vertical	PASS
3	5363.3000	16.12	37.81	53.93	74.00	20.07	31.16	47.28	54.00	6.72	150	36	Vertical	PASS
4	5386.4000	15.92	37.13	53.05	74.00	20.95	30.82	46.74	54.00	7.26	150	11	Vertical	PASS
5	5407.9600	16.08	38.95	55.03	74.00	18.97	26.69	42.77	54.00	11.23	150	4	Vertical	PASS
6	5460.0000	15.84	37.26	53.10	74.00	20.90	23.73	39.57	54.00	14.43	150	248	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC40

Channel: 5310 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

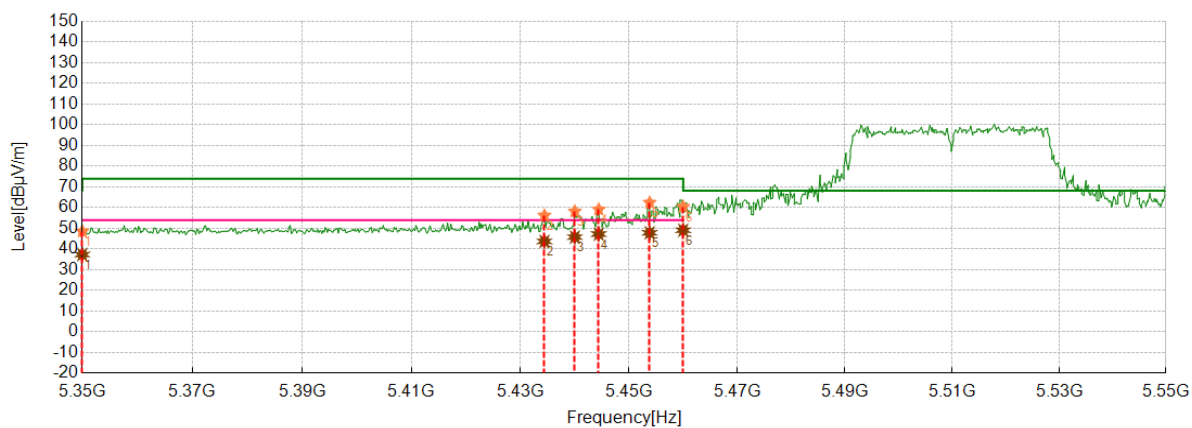
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	36.22	51.93	68.23	16.30	32.96	48.67	54.00	5.33	150	152	Horizontal	PASS
2	5355.1600	15.99	41.13	57.12	74.00	16.88	33.39	49.38	54.00	4.62	150	69	Horizontal	PASS
3	5360.6600	16.30	42.43	58.73	74.00	15.27	31.42	47.72	54.00	6.28	150	152	Horizontal	PASS
4	5402.9000	15.94	37.25	53.19	74.00	20.81	30.62	46.56	54.00	7.44	150	149	Horizontal	PASS
5	5433.9200	15.63	38.5	54.13	74.00	19.87	26.56	42.19	54.00	11.81	150	0	Horizontal	PASS
6	5460.0000	15.84	36.51	52.35	74.00	21.65	25.51	41.35	54.00	12.65	150	110	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5510 MHz

Test Graph


★ PK Detector * AV Detector

Final Data List

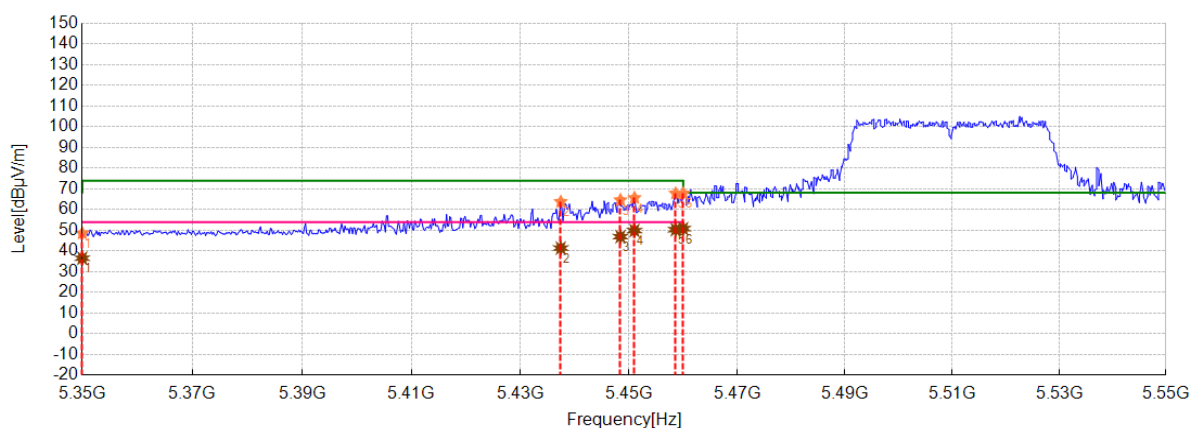
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	32.89	48.60	68.23	19.63	21.65	37.36	54.00	16.64	150	284	Vertical	PASS
2	5434.4000	15.63	40.66	56.29	74.00	17.71	28.11	43.74	54.00	10.26	150	69	Vertical	PASS
3	5440.0000	15.82	42.43	58.25	74.00	15.75	29.99	45.81	54.00	8.19	150	77	Vertical	PASS
4	5444.4000	15.96	43.21	59.17	74.00	14.83	31.30	47.26	54.00	6.74	150	252	Vertical	PASS
5	5453.8000	15.87	46.65	62.52	74.00	11.48	32.00	47.87	54.00	6.13	150	252	Vertical	PASS
6	5460.0000	15.84	44.63	60.47	74.00	13.53	33.27	49.11	54.00	4.89	150	22	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5510 MHz

Test Graph


★ PK Detector ✱ AV Detector

Final Data List

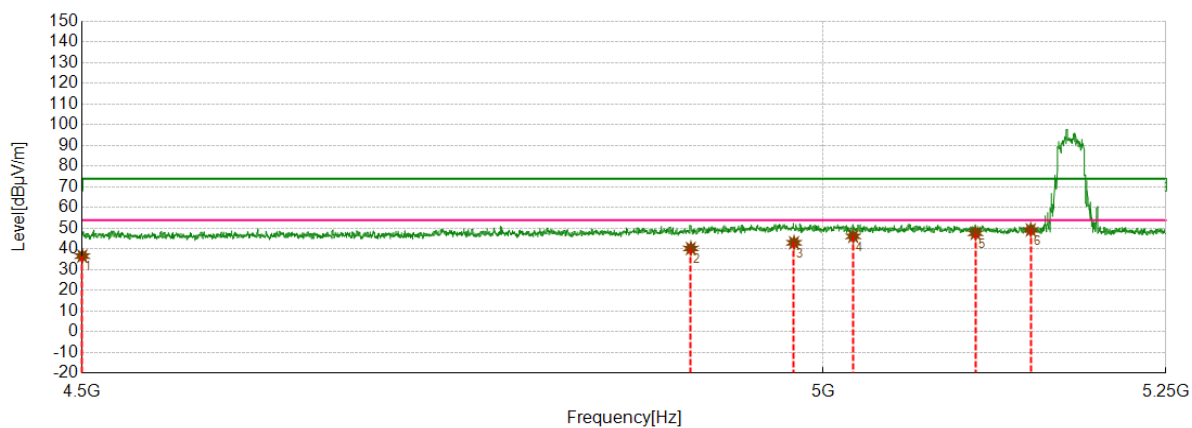
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	32.91	48.62	68.23	19.61	20.87	36.58	54.00	17.42	150	45	Horizontal	PASS
2	5437.4000	15.75	48.11	63.86	74.00	10.14	25.72	41.47	54.00	12.53	150	149	Horizontal	PASS
3	5448.4000	15.98	48.69	64.67	74.00	9.33	31.00	46.98	54.00	7.02	150	136	Horizontal	PASS
4	5451.0000	15.95	49.77	65.72	74.00	8.28	33.99	49.94	54.00	4.06	150	149	Horizontal	PASS
5	5458.6000	15.83	52.08	67.91	74.00	6.09	34.53	50.36	54.00	3.64	150	162	Horizontal	PASS
6	5460.0000	15.84	52.08	67.92	74.00	6.08	35.01	50.85	54.00	3.15	150	139	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5180 MHz

Test Graph


* AV Detector

Final Data List

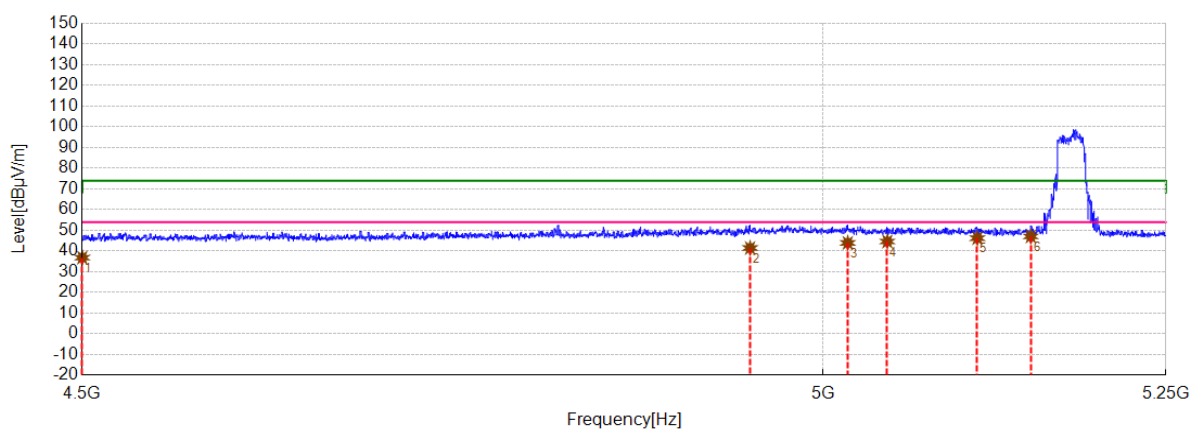
NO.	Frequency [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500.0000	11.09	25.55	36.64	54.00	17.36	150	176	Vertical	PASS
2	4906.9245	12.78	27.54	40.32	54.00	13.68	150	182	Vertical	PASS
3	4979.4664	13.64	29.43	43.07	54.00	10.93	150	0	Vertical	PASS
4	5021.5827	13.30	32.87	46.17	54.00	7.83	150	339	Vertical	PASS
5	5109.7122	13.53	34.12	47.65	54.00	6.35	150	264	Vertical	PASS
6	5150.0000	13.64	35.65	49.29	54.00	4.71	150	182	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX20

Channel: 5180 MHz

Test Graph


* AV Detector

Final Data List

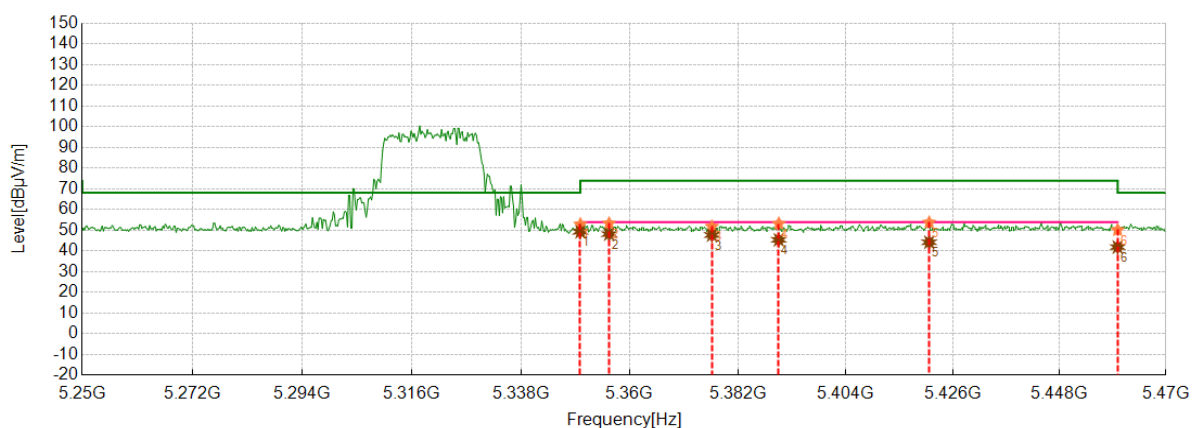
NO.	Frequency [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500.0000	11.09	25.76	36.85	54.00	17.15	150	9	Horizontal	PASS
2	4948.4412	13.51	27.98	41.49	54.00	12.51	150	192	Horizontal	PASS
3	5017.6859	13.40	30.56	43.96	54.00	10.04	150	219	Horizontal	PASS
4	5046.0132	13.20	31.45	44.65	54.00	9.35	150	258	Horizontal	PASS
5	5111.0612	13.50	32.76	46.26	54.00	7.74	150	145	Horizontal	PASS
6	5150.0000	13.64	33.45	47.09	54.00	6.91	150	291	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5320 MHz

Test Graph


★ PK Detector ✱ AV Detector

Final Data List

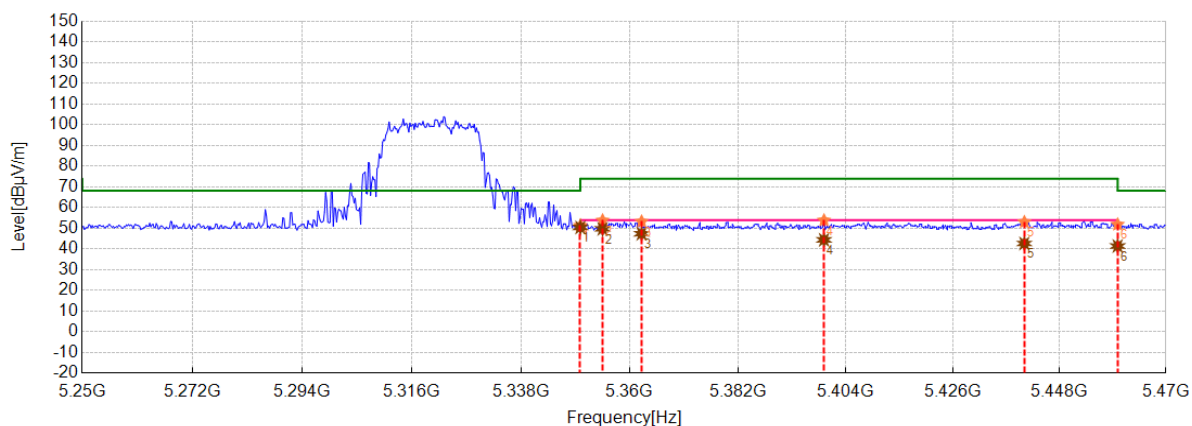
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	37.24	52.95	68.23	15.28	33.65	49.36	54.00	4.64	150	285	Vertical	PASS
2	5355.8200	16.05	37.34	53.39	74.00	20.61	32.17	48.22	54.00	5.78	150	0	Vertical	PASS
3	5376.7200	15.84	36.04	51.88	74.00	22.12	31.93	47.77	54.00	6.23	150	0	Vertical	PASS
4	5390.3600	15.91	37.35	53.26	74.00	20.74	29.54	45.45	54.00	8.55	150	274	Vertical	PASS
5	5421.1600	15.85	37.99	53.84	74.00	20.16	28.44	44.29	54.00	9.71	150	171	Vertical	PASS
6	5460.0000	15.84	34.38	50.22	74.00	23.78	26.12	41.96	54.00	12.04	150	324	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX20

Channel: 5320 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

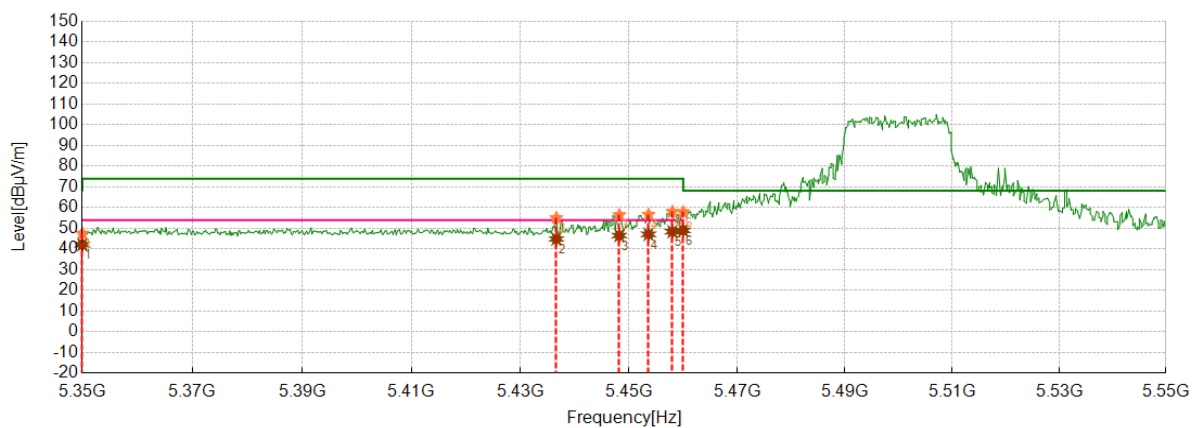
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	35.69	51.40	68.23	16.83	34.76	50.47	54.00	3.53	150	185	Horizontal	PASS
2	5354.5000	15.94	37.91	53.85	74.00	20.15	33.87	49.81	54.00	4.19	150	197	Horizontal	PASS
3	5362.4200	16.20	37.11	53.31	74.00	20.69	31.24	47.44	54.00	6.56	150	37	Horizontal	PASS
4	5399.6000	15.82	38.08	53.90	74.00	20.10	28.65	44.47	54.00	9.53	150	283	Horizontal	PASS
5	5440.7400	15.86	37.25	53.11	74.00	20.89	26.86	42.72	54.00	11.28	150	121	Horizontal	PASS
6	5460.0000	15.84	36.07	51.91	74.00	22.09	25.64	41.48	54.00	12.52	150	110	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5500 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

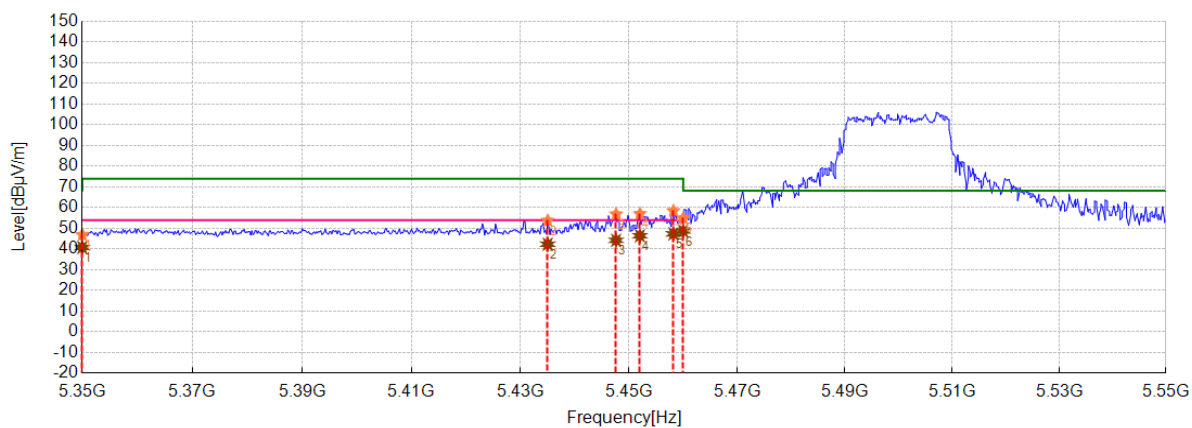
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	31.9	47.61	68.23	20.62	26.47	42.18	54.00	11.82	150	114	Vertical	PASS
2	5436.6000	15.71	39.37	55.08	74.00	18.92	29.20	44.91	54.00	9.09	150	312	Vertical	PASS
3	5448.2000	15.98	40.53	56.51	74.00	17.49	30.57	46.55	54.00	7.45	150	294	Vertical	PASS
4	5453.6000	15.88	40.82	56.70	74.00	17.30	31.25	47.13	54.00	6.87	150	312	Vertical	PASS
5	5458.0000	15.83	42.25	58.08	74.00	15.92	32.61	48.44	54.00	5.56	150	64	Vertical	PASS
6	5460.0000	15.84	42.11	57.95	74.00	16.05	33.21	49.05	54.00	4.95	150	312	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5500 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

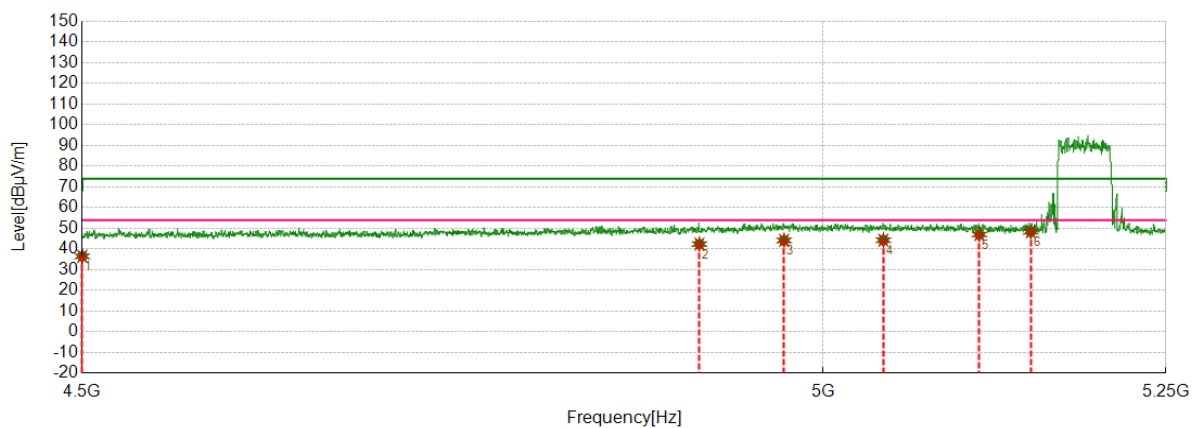
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	31.22	46.93	68.23	21.30	25.07	40.78	54.00	13.22	150	294	Horizontal	PASS
2	5435.0000	15.64	38.2	53.84	74.00	20.16	26.73	42.37	54.00	11.63	150	104	Horizontal	PASS
3	5447.6000	15.98	40.95	56.93	74.00	17.07	28.28	44.26	54.00	9.74	150	26	Horizontal	PASS
4	5452.0000	15.92	41.16	57.08	74.00	16.92	30.52	46.44	54.00	7.56	150	276	Horizontal	PASS
5	5458.2000	15.83	42.67	58.50	74.00	15.50	31.55	47.38	54.00	6.62	150	201	Horizontal	PASS
6	5460.0000	15.84	39.12	54.96	74.00	19.04	32.91	48.75	54.00	5.25	150	39	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40

Channel: 5190 MHz

Test Graph

Final Data List

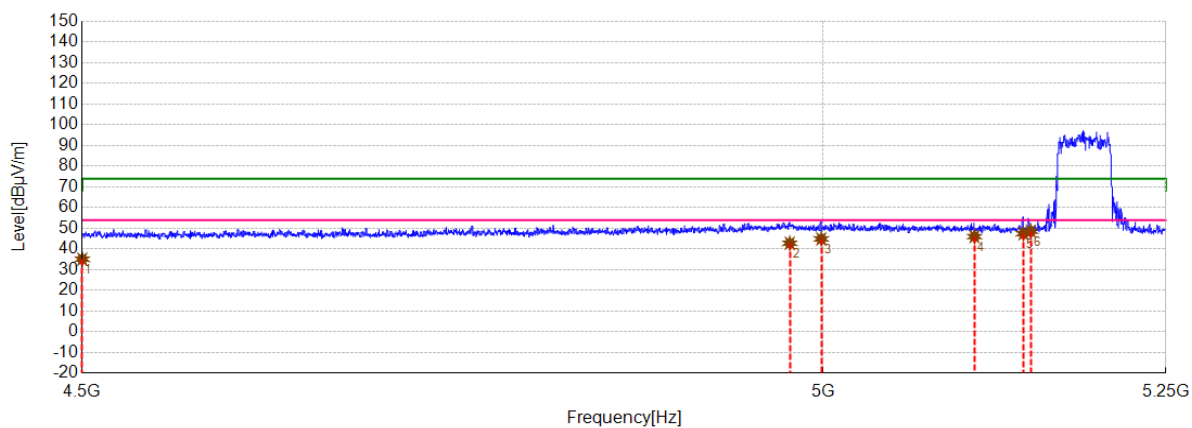
NO.	Frequency [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500.0000	11.09	25.45	36.54	54.00	17.46	150	82	Vertical	PASS
2	4912.9197	12.85	29.59	42.44	54.00	11.56	150	120	Vertical	PASS
3	4972.4221	13.84	30.37	44.21	54.00	9.79	150	101	Vertical	PASS
4	5043.1655	13.30	31.03	44.33	54.00	9.67	150	82	Vertical	PASS
5	5112.5600	13.45	33.61	47.06	54.00	6.94	150	293	Vertical	PASS
6	5150.0000	13.64	34.72	48.36	54.00	5.64	150	11	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5190 MHz

Test Graph


* AV Detector

Final Data List

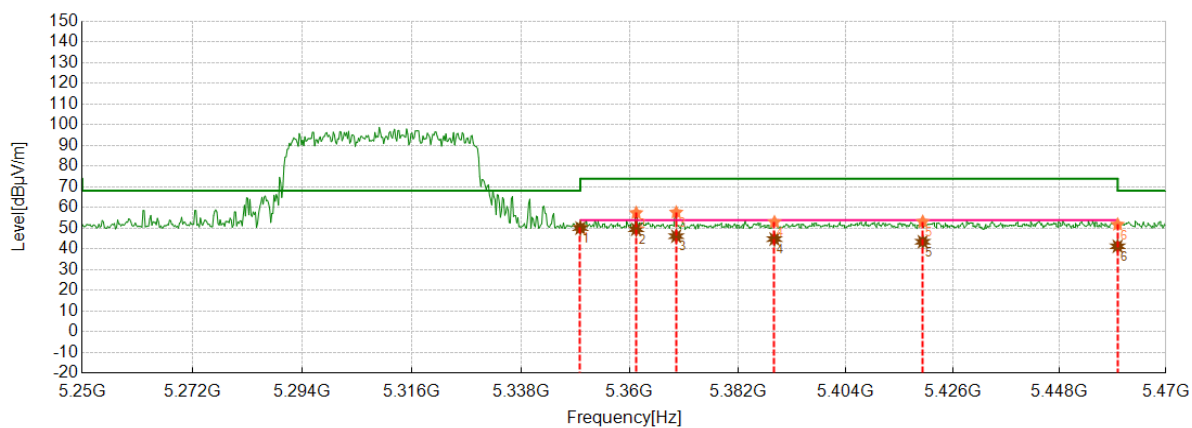
NO.	Frequency [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4500.0000	11.09	24.04	35.13	54.00	18.87	150	251	Horizontal	PASS
2	4976.4688	13.75	29.09	42.84	54.00	11.16	150	138	Horizontal	PASS
3	4998.8010	13.19	31.74	44.93	54.00	9.07	150	22	Horizontal	PASS
4	5108.9628	13.52	32.55	46.07	54.00	7.93	150	312	Horizontal	PASS
5	5144.6343	13.52	33.94	47.46	54.00	6.54	150	66	Horizontal	PASS
6	5150.0000	13.64	34.99	48.63	54.00	5.37	150	344	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5310 MHz

Test Graph


★ PK Detector * AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	34.7	50.41	68.23	17.82	34.43	50.14	54.00	3.86	150	36	Vertical	PASS
2	5361.3200	16.27	41.22	57.49	74.00	16.51	33.34	49.61	54.00	4.39	150	293	Vertical	PASS
3	5369.4600	15.70	42.07	57.77	74.00	16.23	30.54	46.24	54.00	7.76	150	301	Vertical	PASS
4	5389.4800	15.92	37.16	53.08	74.00	20.92	28.95	44.87	54.00	9.13	150	100	Vertical	PASS
5	5419.8400	15.89	37.36	53.25	74.00	20.75	27.66	43.55	54.00	10.45	150	148	Vertical	PASS
6	5460.0000	15.84	36.03	51.87	74.00	22.13	25.54	41.38	54.00	12.62	150	13	Vertical	PASS

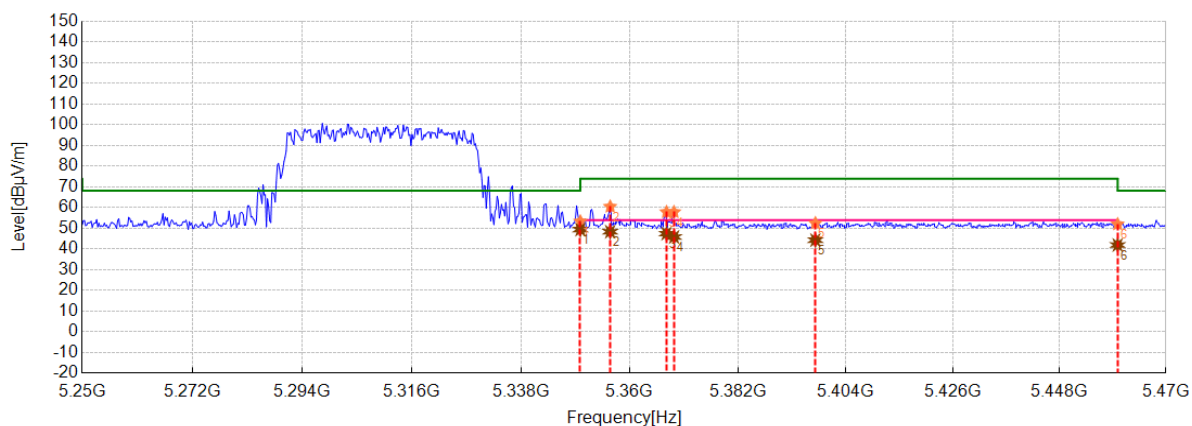
Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40

Channel: 5310 MHz

Test Graph



★ PK Detector ★ AV Detector

Final Data List

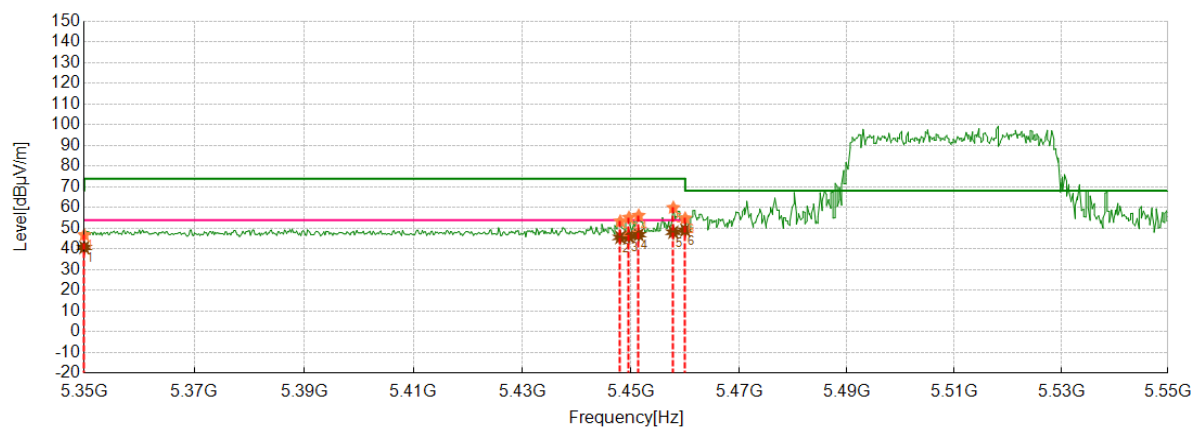
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	37.7	53.41	68.23	14.82	33.75	49.46	54.00	4.54	150	119	Horizontal	PASS
2	5356.0400	16.07	44.49	60.56	74.00	13.44	32.34	48.41	54.00	5.59	150	108	Horizontal	PASS
3	5367.4800	15.80	42.12	57.92	74.00	16.08	31.68	47.48	54.00	6.52	150	99	Horizontal	PASS
4	5369.0200	15.72	42.21	57.93	74.00	16.07	30.12	45.84	54.00	8.16	150	99	Horizontal	PASS
5	5397.8400	15.80	36.73	52.53	74.00	21.47	28.55	44.35	54.00	9.65	150	37	Horizontal	PASS
6	5460.0000	15.84	36.22	52.06	74.00	21.94	26.14	41.98	54.00	12.02	150	160	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5510 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

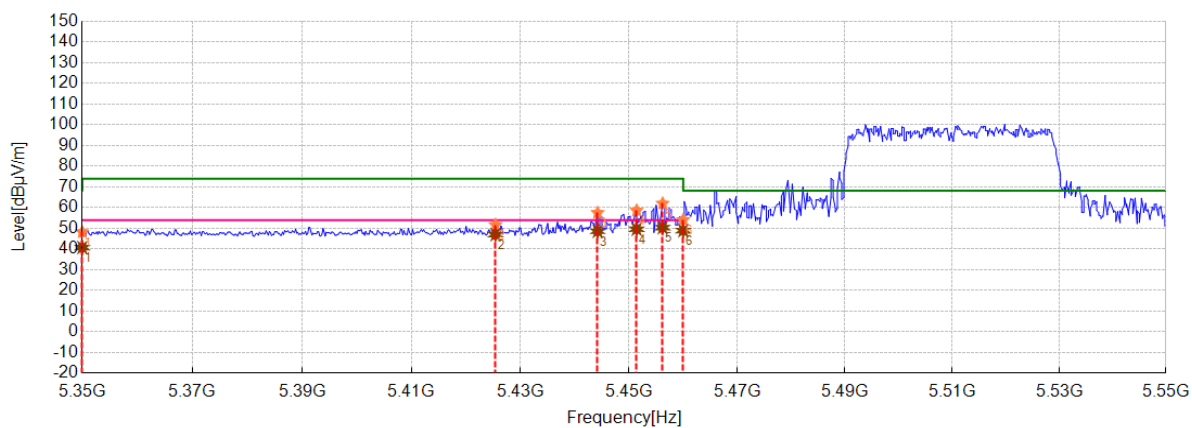
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	31.16	46.87	68.23	21.36	25.10	40.81	54.00	13.19	150	313	Vertical	PASS
2	5448.0000	15.98	37.42	53.40	74.00	20.60	29.68	45.66	54.00	8.34	150	0	Vertical	PASS
3	5449.6000	15.97	39.27	55.24	74.00	18.76	30.14	46.11	54.00	7.89	150	343	Vertical	PASS
4	5451.4000	15.94	40.27	56.21	74.00	17.79	31.02	46.96	54.00	7.04	150	333	Vertical	PASS
5	5457.8000	15.83	44.16	59.99	74.00	14.01	32.36	48.19	54.00	5.81	150	63	Vertical	PASS
6	5460.0000	15.84	39.05	54.89	74.00	19.11	33.31	49.15	54.00	4.85	150	213	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX40

Channel: 5510 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	5350.0000	15.71	32.56	48.27	68.23	19.96	25.05	40.76	54.00	13.24	150	343	Horizontal	PASS
2	5425.4000	15.73	36	51.73	74.00	22.27	31.29	47.02	54.00	6.98	150	87	Horizontal	PASS
3	5444.2000	15.96	41.64	57.60	74.00	16.40	32.67	48.63	54.00	5.37	150	87	Horizontal	PASS
4	5451.4000	15.94	42.71	58.65	74.00	15.35	33.68	49.62	54.00	4.38	150	82	Horizontal	PASS
5	5456.2000	15.84	46.23	62.07	74.00	11.93	34.53	50.37	54.00	3.63	150	87	Horizontal	PASS
6	5460.0000	15.84	38.29	54.13	74.00	19.87	33.10	48.94	54.00	5.06	150	82	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level