

承 认 书

SPECIFICATION FOR APPROVAL

客户名称 (CUSTOMER): 好斯美科技有限公司 HRSW ELECTRONICS CO., LTD

客户料号 (CUSTOMER P/N) : A.02.026.0068

品名 (DESCRIPTION) : p604 coil

规格 (SPECIFICATION) : Migun coil/41.5/0.3 thick/with 20 * 0.8 magnetic sheets

42+2/-1MM

日期 (DATE): 2026-3-6

深圳市鸿日昇威科技有限公司

HRSW ELECTRONICS CO.,LTD


ADD: 深圳市龙华新区观澜环观中路48号1栋2楼

TEL: 15112254520 / 13682412162



SPECIFICATION FOR APPROVAL

1.结构图 MECHANICAL DIMENSION (UNIT:mm)

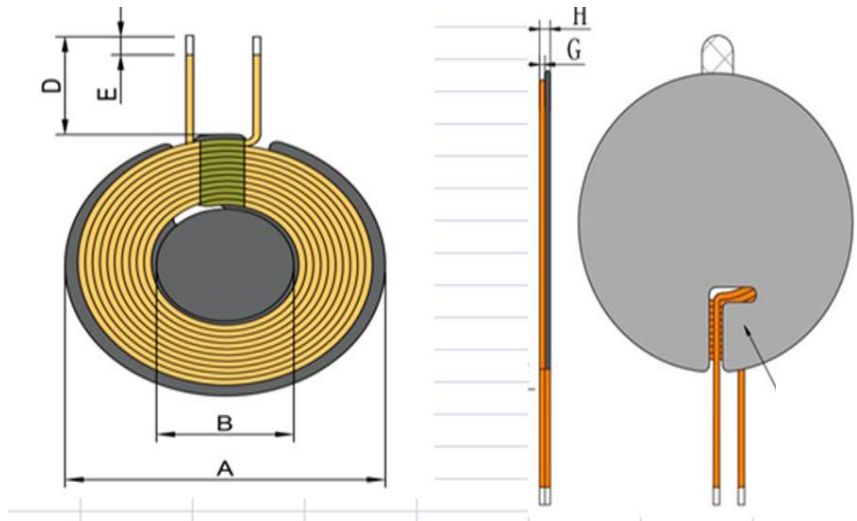


Note:

1. Add a 20*0.8MM small sheet in the middle.
2. Remove the backing tape within a thickness of 1.2MM (the position of the wire exit is 1.5MM).
3. Add the backing tape on the coil surface.

A	B	G	D	E	H		
41.5±0.5	21.5±0.5	0.3±0.2	42+2/-1	2MM-4MM	1.25MAX		

2. 原理图 SCHEMATICS:



START WINDING

3. WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	热风线 0.08*65 2UEW	11TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR		工作温度	HI-POT
TEST	线圈加磁片	S-F		常温下	
COND	100KHz, 0. 25V	AT 25℃		常温下	
SPEC	8. 1uH±5%	70mΩ Max		0-80℃	

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	热风线0.08*65股	热风线0.08*65股	NANJINGJINNINGCO,LTD	
2	无铅锡条	无铅锡条	QIAODO	
3	磁片	41.5*0.3纳米晶磁片开L槽	TAIYI CO.,LTD	
4	胶水	自带3M胶	LIANCHENG CO.,LTD	
5	高温胶纸	3mm宽高温胶纸	CUDAK CO.,LTD	
6	背胶	40*0.05	CUDAK CO.,LTD	
7				

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	
DRAWN BY	CHECKED BY		APPROVED BY
何伟华	韦立红		韦立红