




Test Graphs

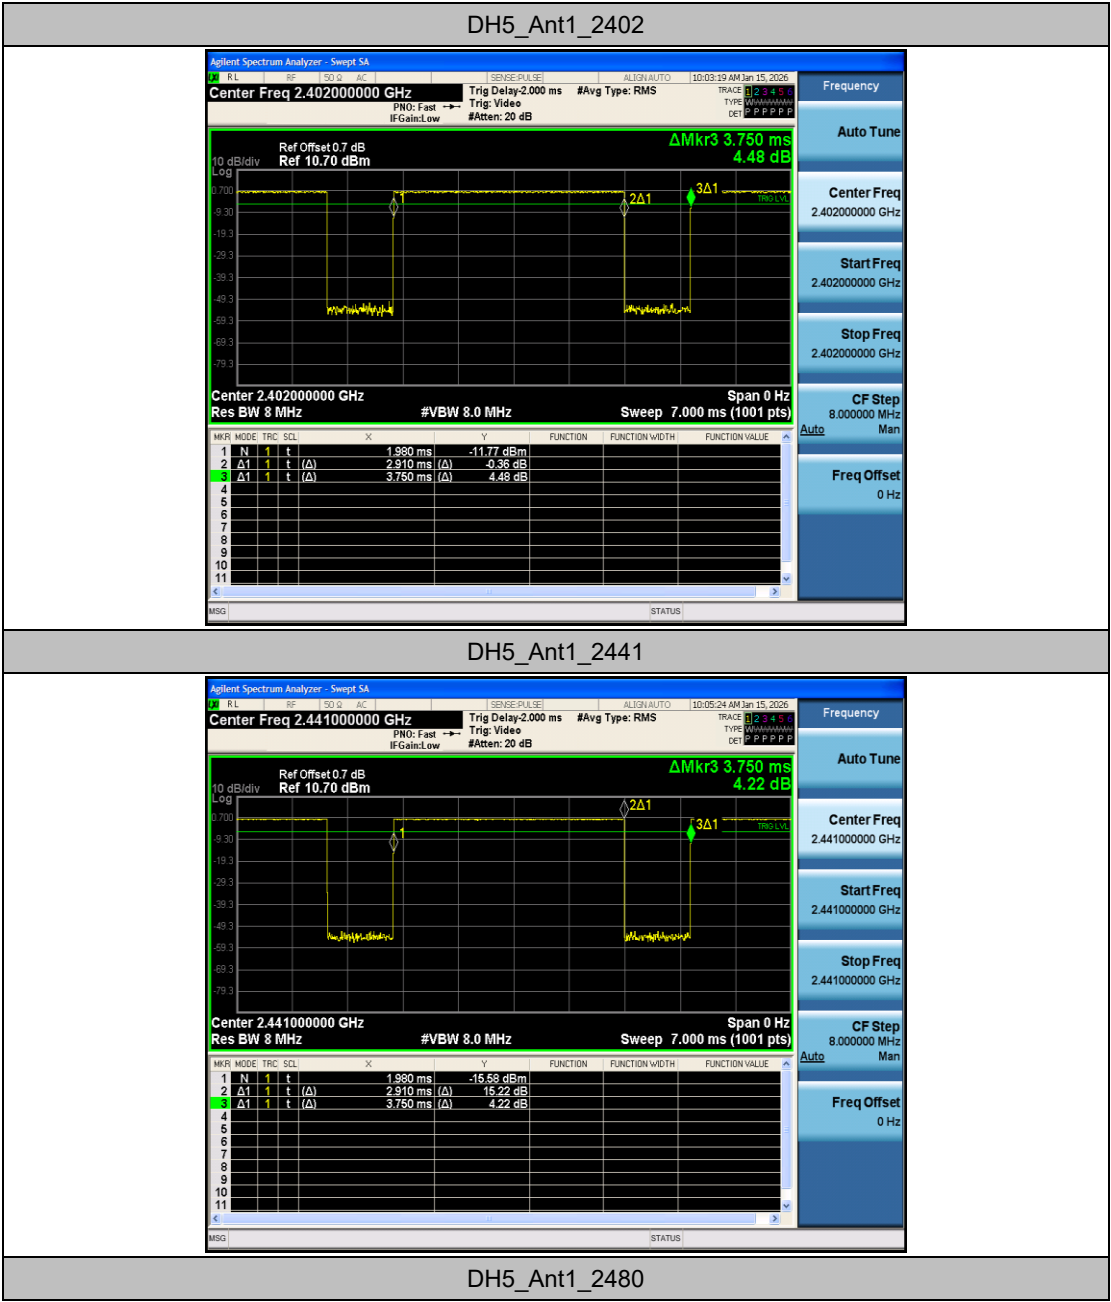


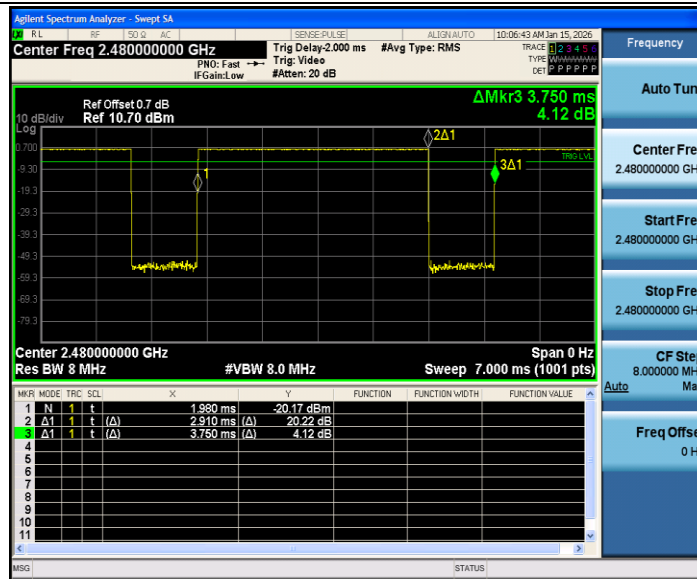


2DH5_Ant1_2402

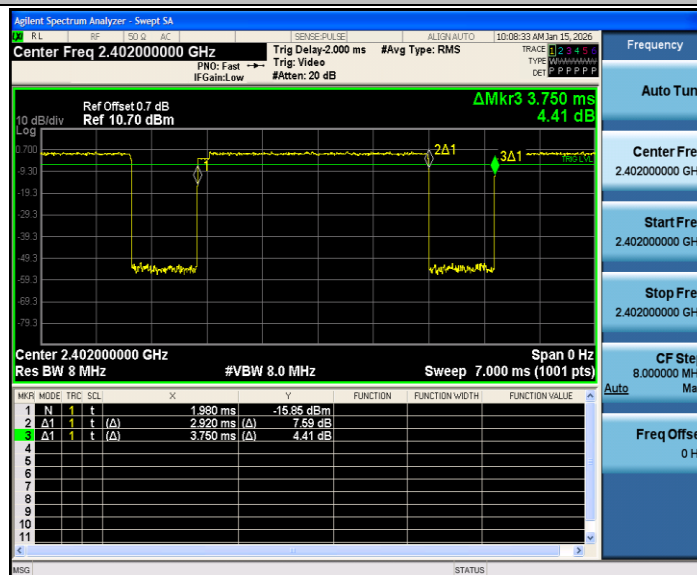

2DH5_Ant1_2441

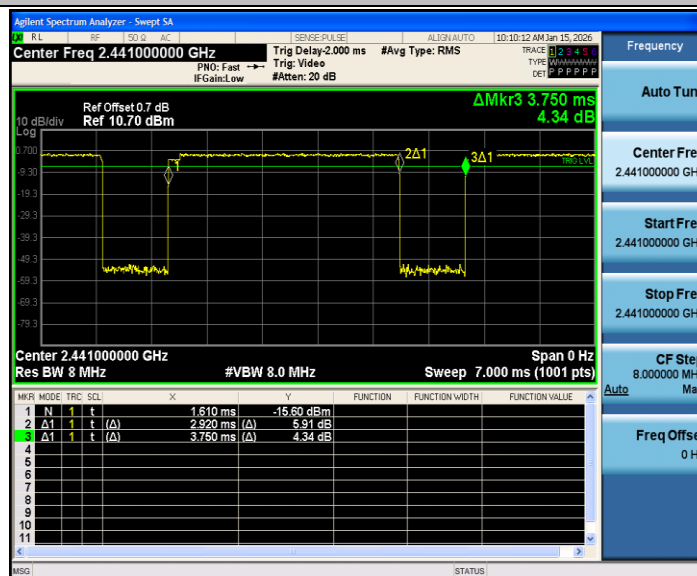

2DH5_Ant1_2480

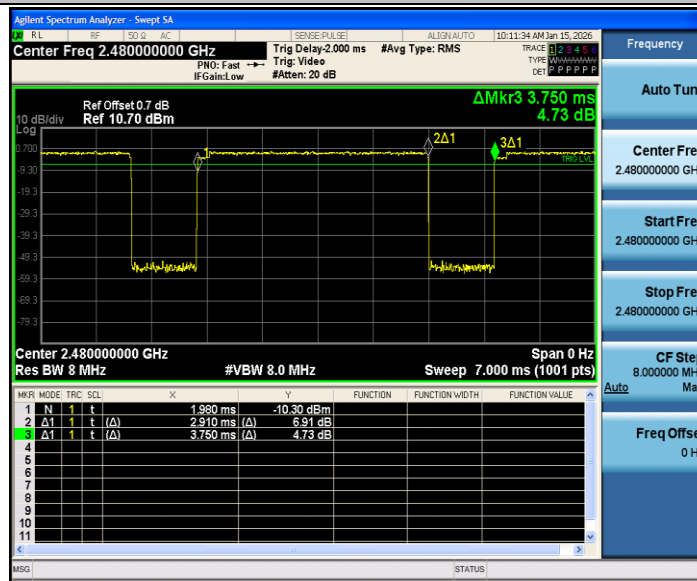


Appendix J: Emissions in Restricted Bands


Test Result

TestMod e	Antenn a	ChNam e	Freq(MH z)	Detector	Freq [MHz]	Result [dBm]	Gain [dB]	DC Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
DH5	Ant1	Low	2402	AV	2310.000	-60.25	2.00	1.10	38.05	≤54	PASS
				AV	2372.240	-58.2	2.00	1.10	40.10	≤54	PASS
				AV	2390.000	-59.57	2.00	1.10	38.73	≤54	PASS
				Peak	2310.000	-51.21	2.00	0.00	45.99	≤74	PASS
				Peak	2387.045	-48.48	2.00	0.00	48.72	≤74	PASS
				Peak	2390.000	-50.74	2.00	0.00	46.46	≤74	PASS
		High	2480	AV	2483.500	-57.74	2.00	1.10	40.56	≤54	PASS
				AV	2484.560	-57.71	2.00	1.10	40.59	≤54	PASS
				AV	2500.000	-59.1	2.00	1.10	39.20	≤54	PASS
				Peak	2483.500	-50.85	2.00	0.00	46.35	≤74	PASS
				Peak	2483.920	-47.42	2.00	0.00	49.78	≤74	PASS
				Peak	2500.000	-50.59	2.00	0.00	46.61	≤74	PASS
2DH5	Ant1	Low	2402	AV	2310.000	-59.56	2.00	1.09	38.73	≤54	PASS
				AV	2366.780	-58.56	2.00	1.09	39.73	≤54	PASS
				AV	2390.000	-58.86	2.00	1.09	39.43	≤54	PASS
				Peak	2310.000	-52.37	2.00	0.00	44.83	≤74	PASS
				Peak	2373.290	-48.71	2.00	0.00	48.49	≤74	PASS
				Peak	2390.000	-52.13	2.00	0.00	45.07	≤74	PASS
		High	2480	AV	2483.500	-58.1	2.00	1.10	40.20	≤54	PASS
				AV	2483.840	-57.89	2.00	1.10	40.41	≤54	PASS
				AV	2500.000	-58.93	2.00	1.10	39.37	≤54	PASS
				Peak	2483.500	-49.31	2.00	0.00	47.89	≤74	PASS
				Peak	2490.000	-47.62	2.00	0.00	49.58	≤74	PASS
				Peak	2500.000	-51.26	2.00	0.00	45.94	≤74	PASS


Note: The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

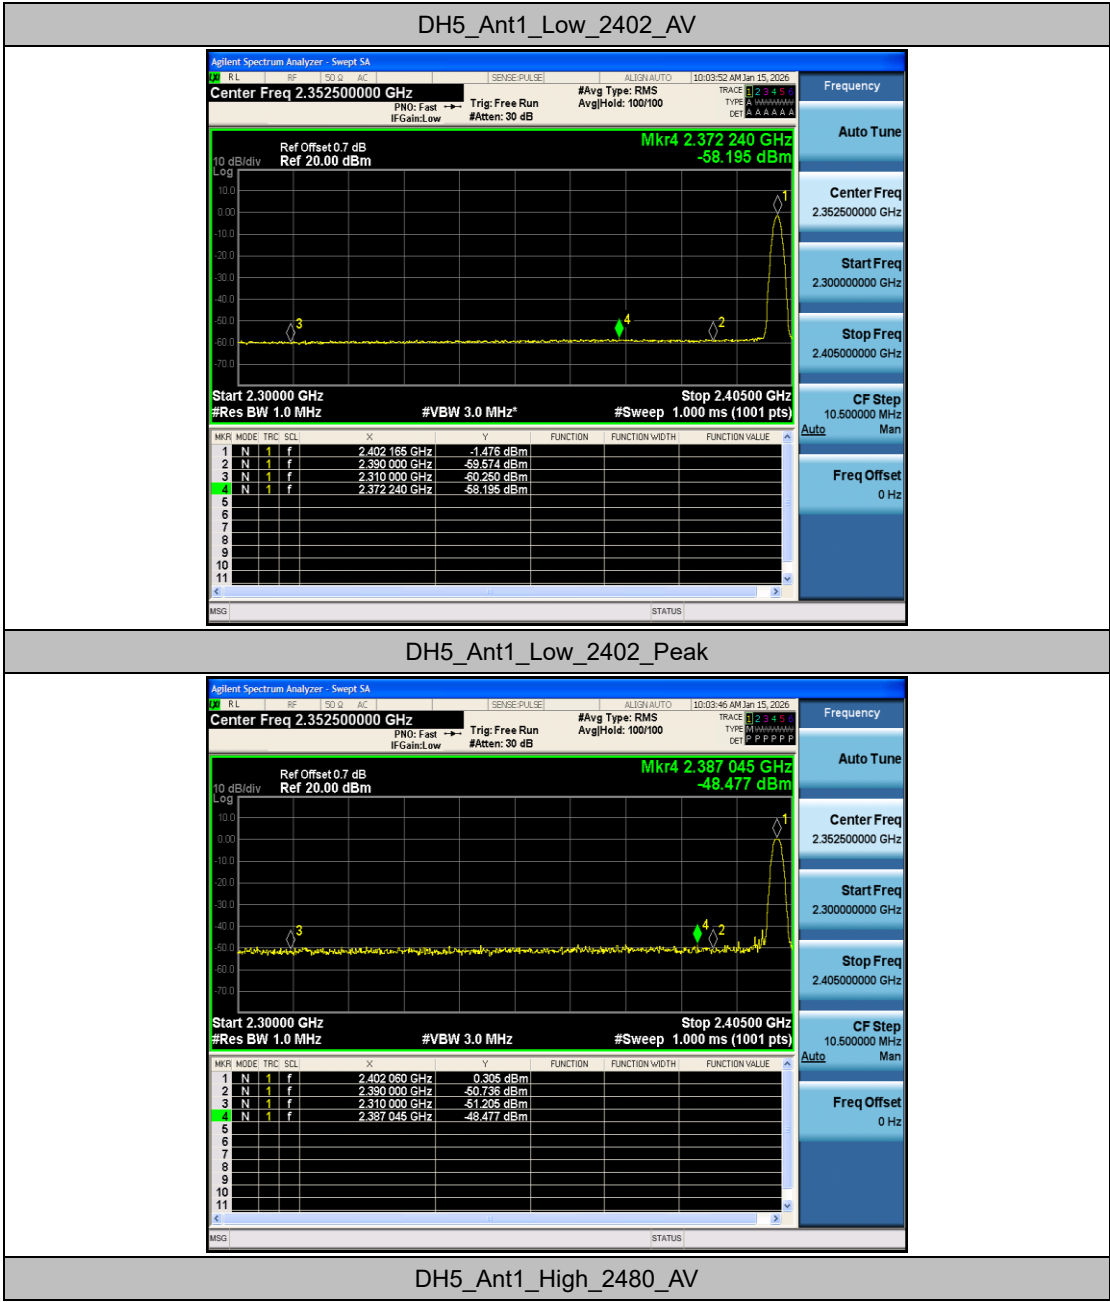


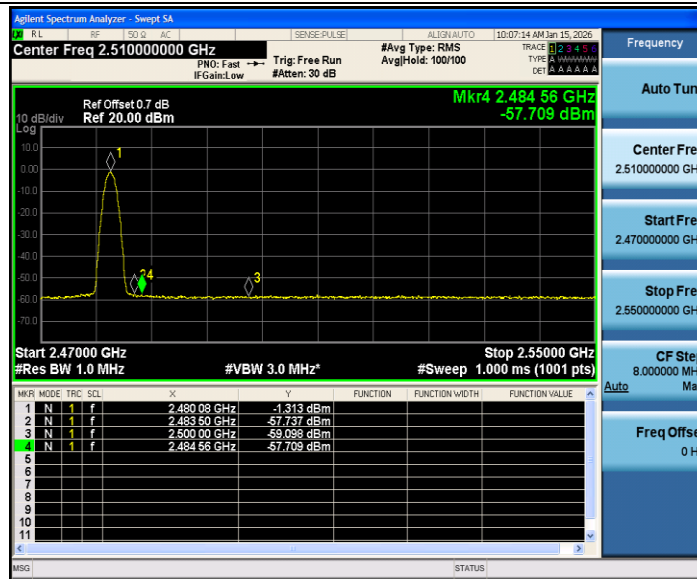


DH5_Ant1_High_2480_Peak

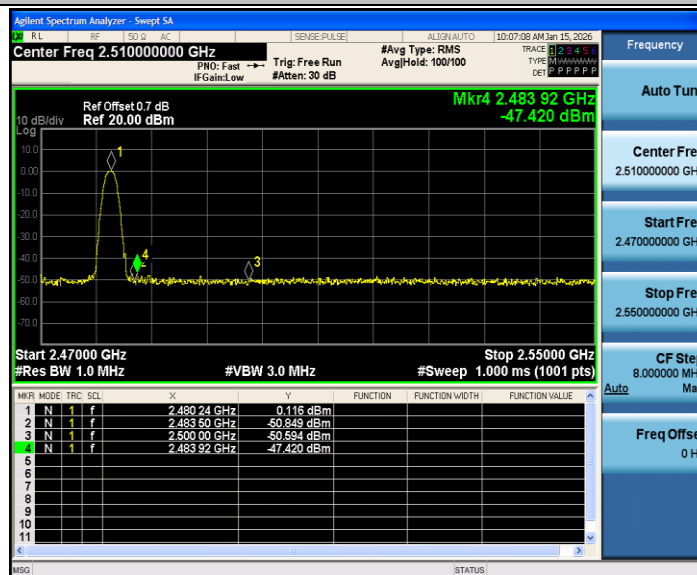


2DH5_Ant1_Low_2402_AV

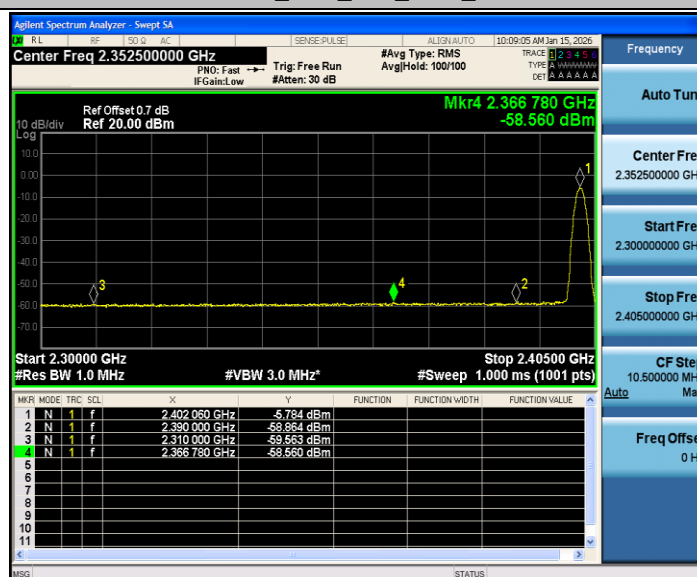

2DH5_Ant1_Low_2402_Peak

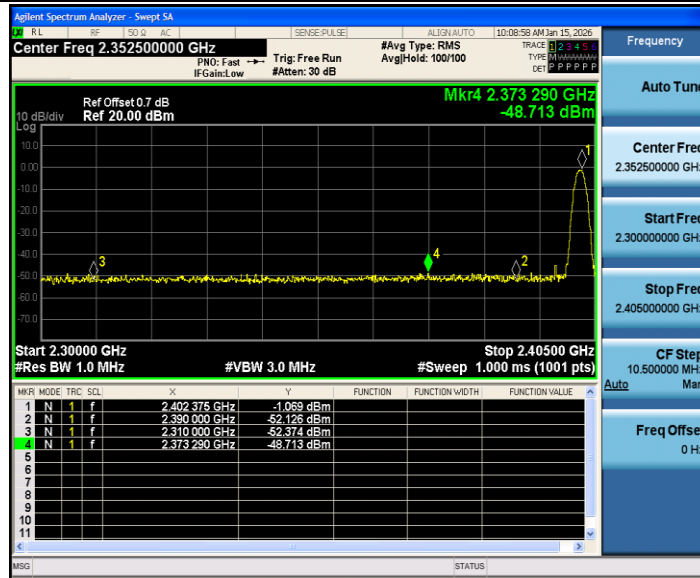

2DH5_Ant1_High_2480_AV

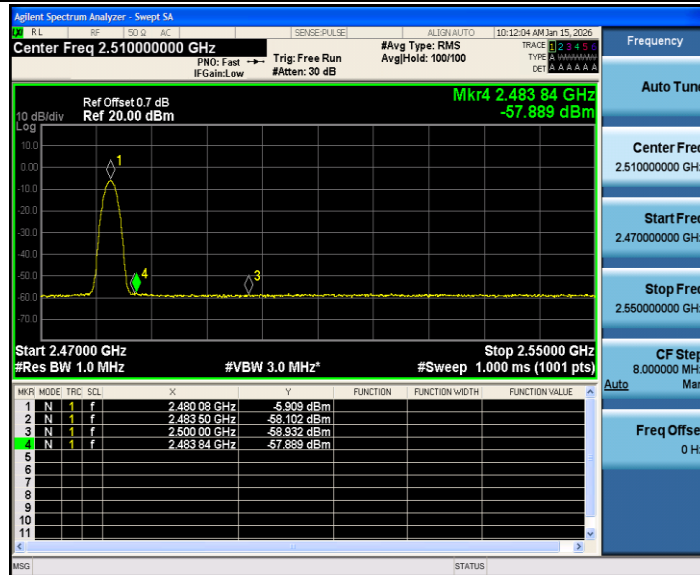

2DH5_Ant1_High_2480_Peak

