


承认书项目表

NO.	内 容 (Contents)	页数 (Number ofPage)	页码 (Page Code)
1	承认书封面 (Spec Cover)	1	1
2	承认书项目表 (Spec Item)	1	2
3	工程成品图 (Drawing)	1	3
4	电性测试报告 (Test Reports)	1	4
5	S 参数测试 (S Parameter)	1	5
6	增益测试 (Gain Test)	1	6
7			
8			
9			
10	-	-	-
11	-	-	-
12	-	-	-

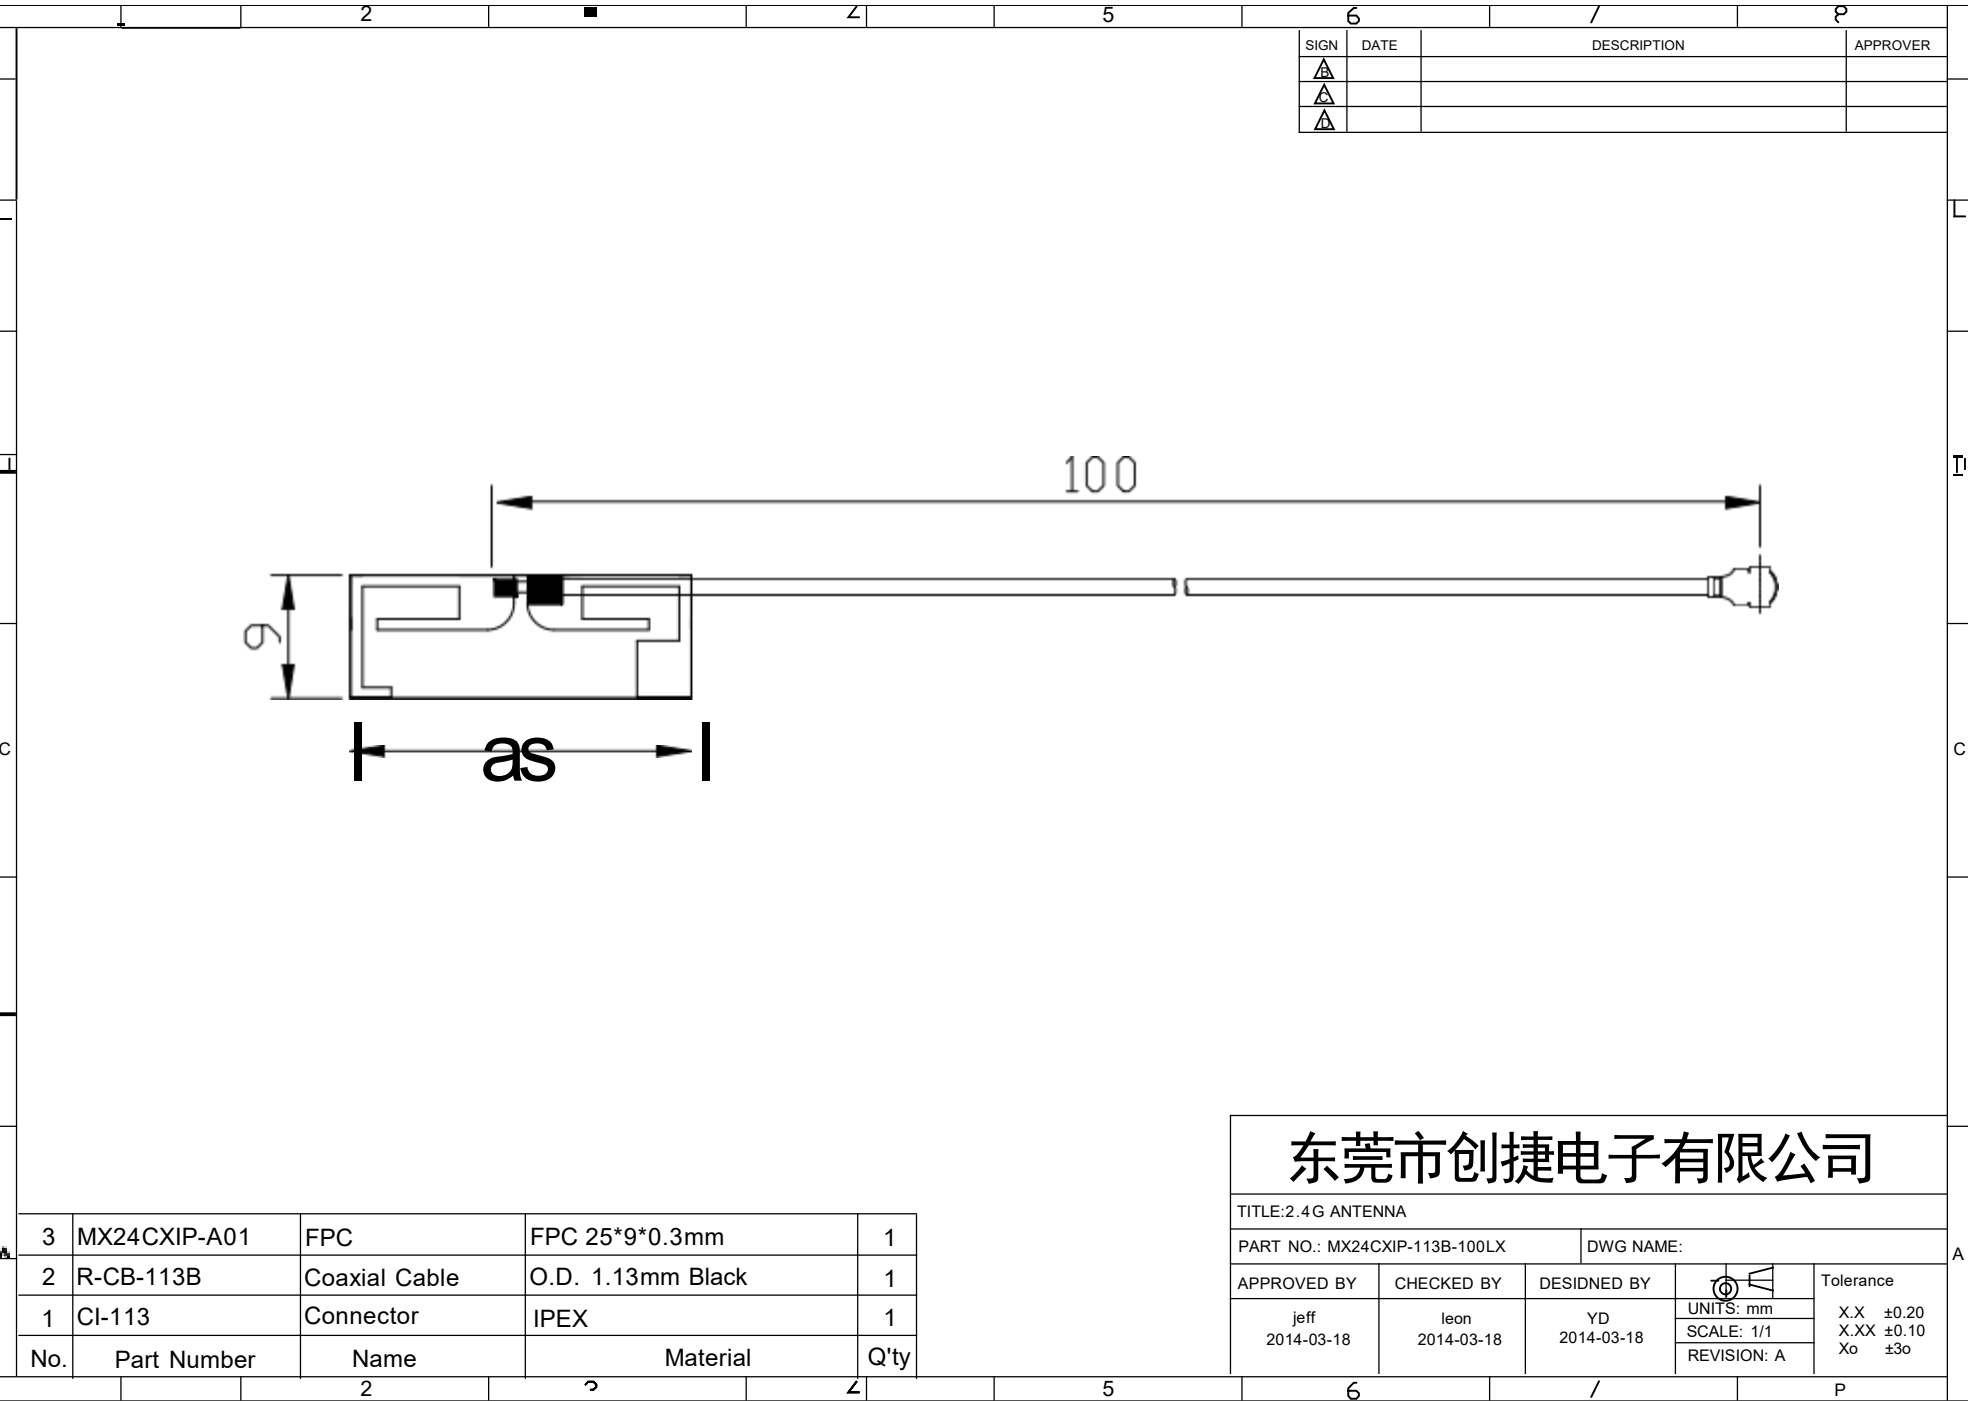

电性测试报告



Test Reports

Electrical Properties	
Frequency	2.4 5 5.8GHz
Impedance	50 Ohm Nominal
V.S.W.R	1.92 : 1 Max
Return Loss	-10 dB Max
Radiation	Omni-directional
Gain (Peak)	3dBi
Cable Loss	3.2 dB / m Max @ 2450 MHz
Polarization	Linear, Vertical
Admitted Power	1 W
Connector	ipex
Physical Properties	
Antenna Material	FPCB
Cable Type	O.D. 1.13mm // 120 mm
Operating Temp.	-10 ~ +60 。 C
Storage Temp.	-10 ~ +70 。 C
Cable Color	Black

S 参数测试

S Parameter Test


AgilentE5071C

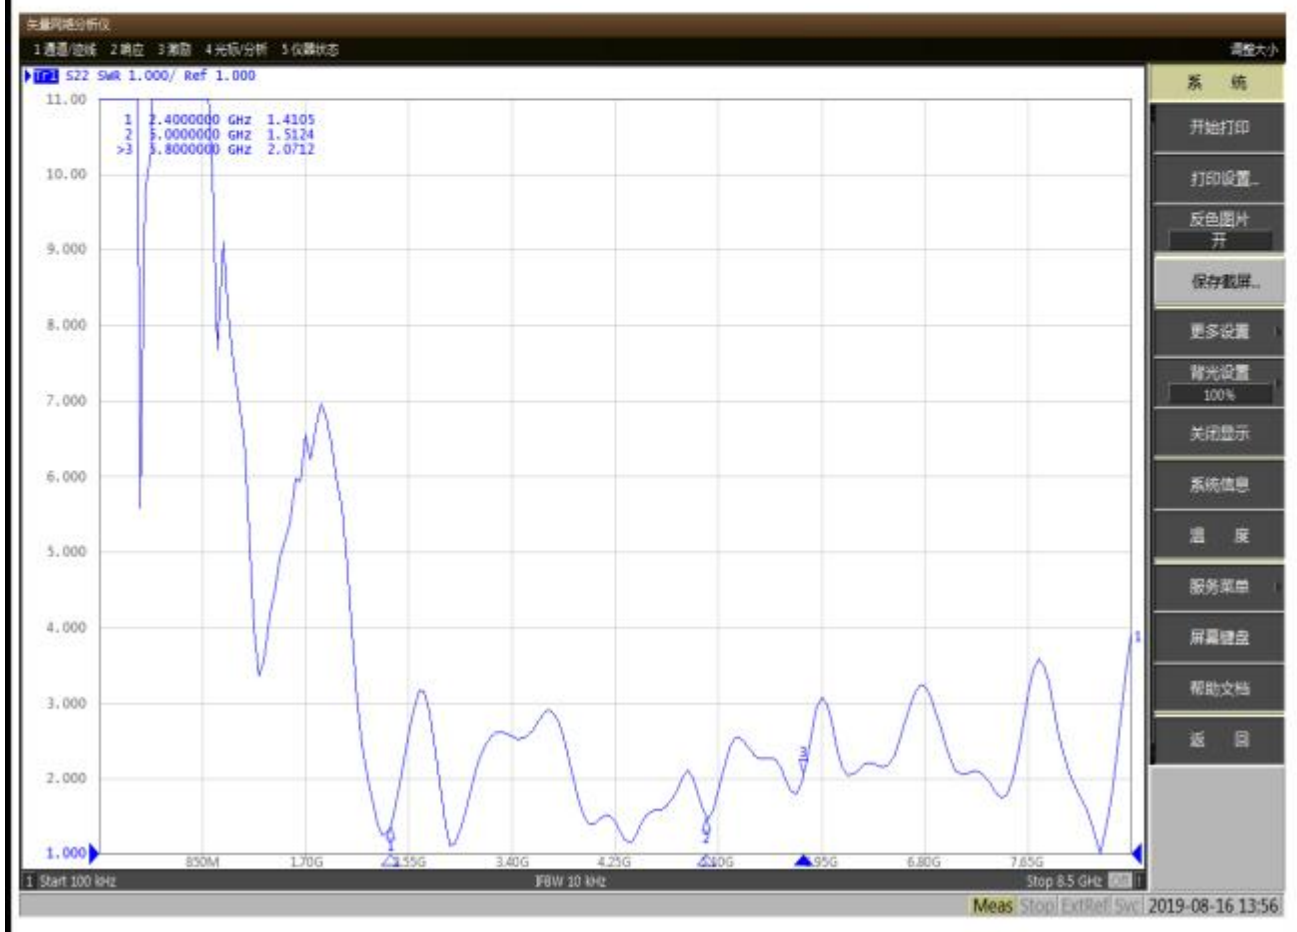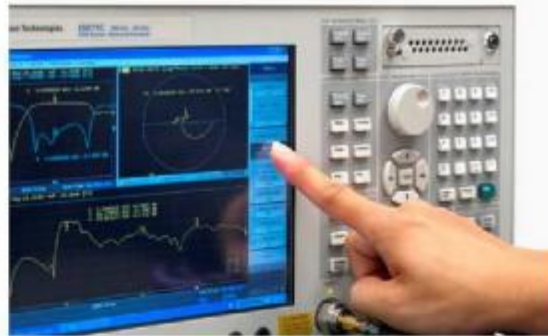

增益测试

Gain Test

*Antenna
Radiation
Pattern
VS
Gain*

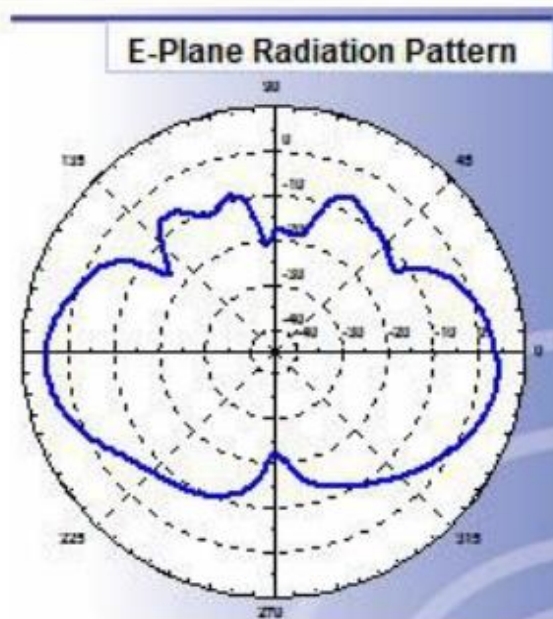

Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	5.05	-22.52	-11.35
2450	2.35	-25.58	-10.50
2500	-0.42	-28.52	-9.47