




Ant. Pol.	Horizontal
Test Mode:	7# BLE 2Mbps Mode 2440MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

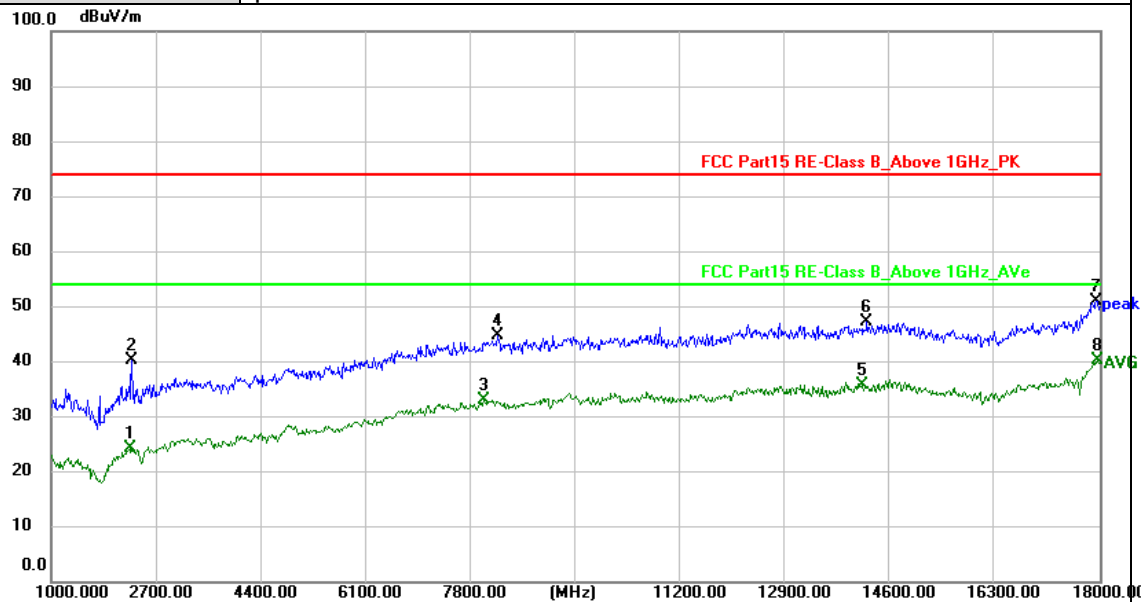


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2275.000	41.71	-17.44	24.27	54.00	-29.73	AVG
2	2309.000	57.58	-17.42	40.16	74.00	-33.84	peak
3	8021.000	35.24	-2.12	33.12	54.00	-20.88	AVG
4	8242.000	46.85	-2.18	44.67	74.00	-29.33	peak
5	14158.000	32.61	3.07	35.68	54.00	-18.32	AVG
6	14226.000	44.28	2.93	47.21	74.00	-26.79	peak
7	17949.000	42.80	8.29	51.09	74.00	-22.91	peak
8 *	17966.000	31.98	8.32	40.30	54.00	-13.70	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value




Ant. Pol.	Vertical
Test Mode:	7# BLE 2Mbps Mode 2440MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

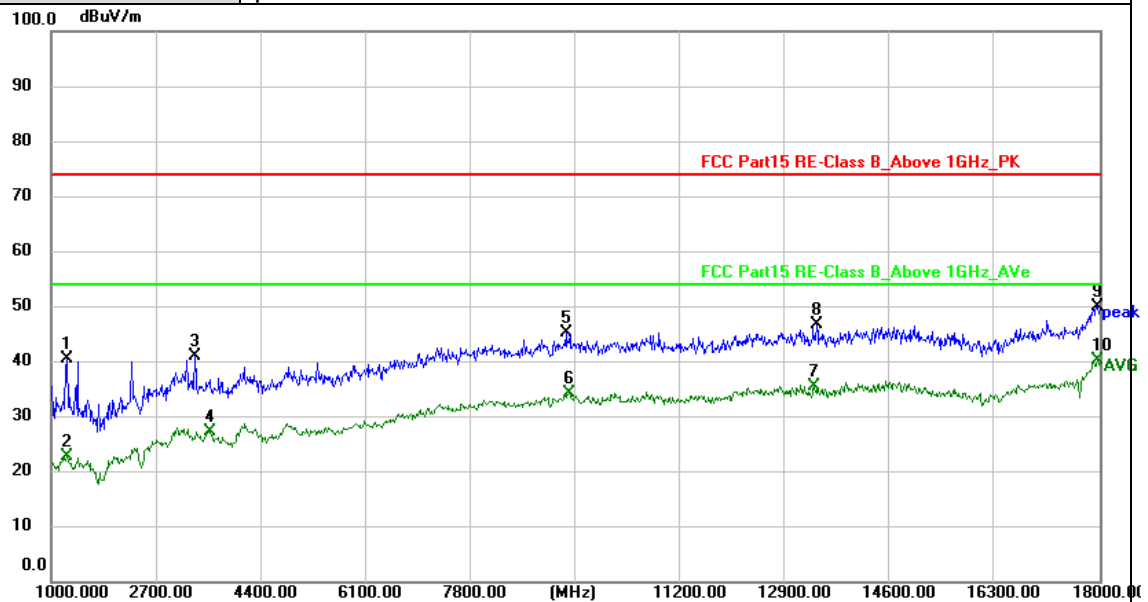

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1255.000	60.91	-20.27	40.64	74.00	-33.36	peak
2	1255.000	42.99	-20.27	22.72	54.00	-31.28	AVG
3	3329.000	54.40	-13.37	41.03	74.00	-32.97	peak
4	3584.000	40.28	-12.87	27.41	54.00	-26.59	AVG
5	9347.000	46.16	-0.92	45.24	74.00	-28.76	peak
6	9398.000	34.69	-0.39	34.30	54.00	-19.70	AVG
7	13376.000	33.88	1.55	35.43	54.00	-18.57	AVG
8	13410.000	45.08	1.65	46.73	74.00	-27.27	peak
9	17966.000	41.79	8.32	50.11	74.00	-23.89	peak
10 *	17966.000	31.92	8.32	40.24	54.00	-13.76	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

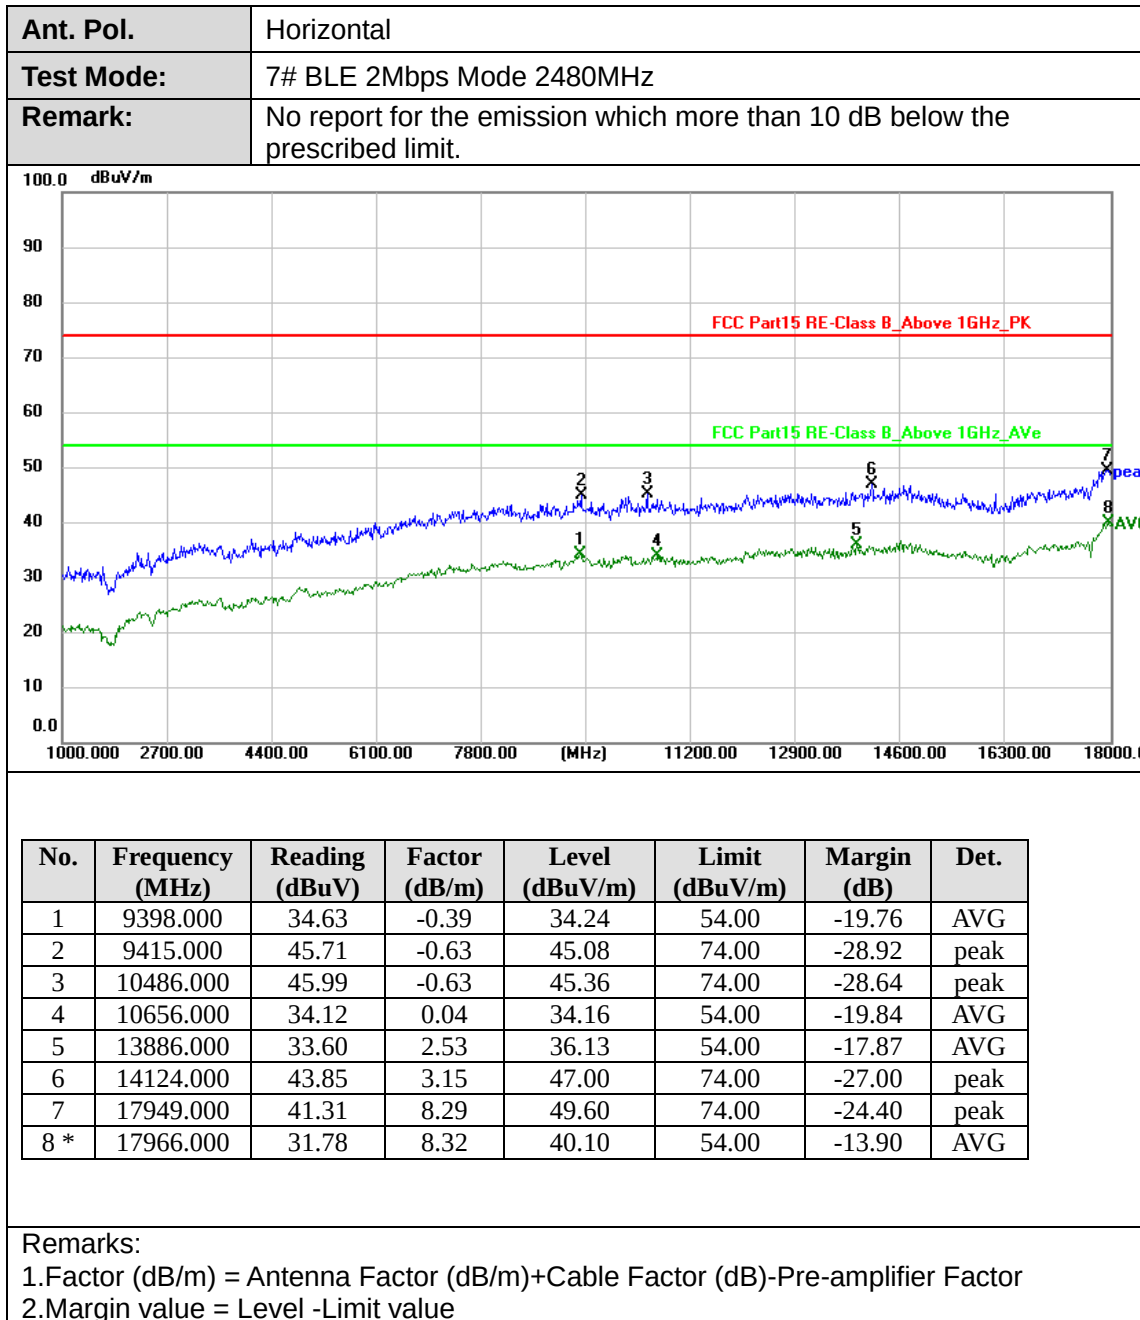



Ant. Pol.	Vertical
Test Mode:	7# BLE 2Mbps Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

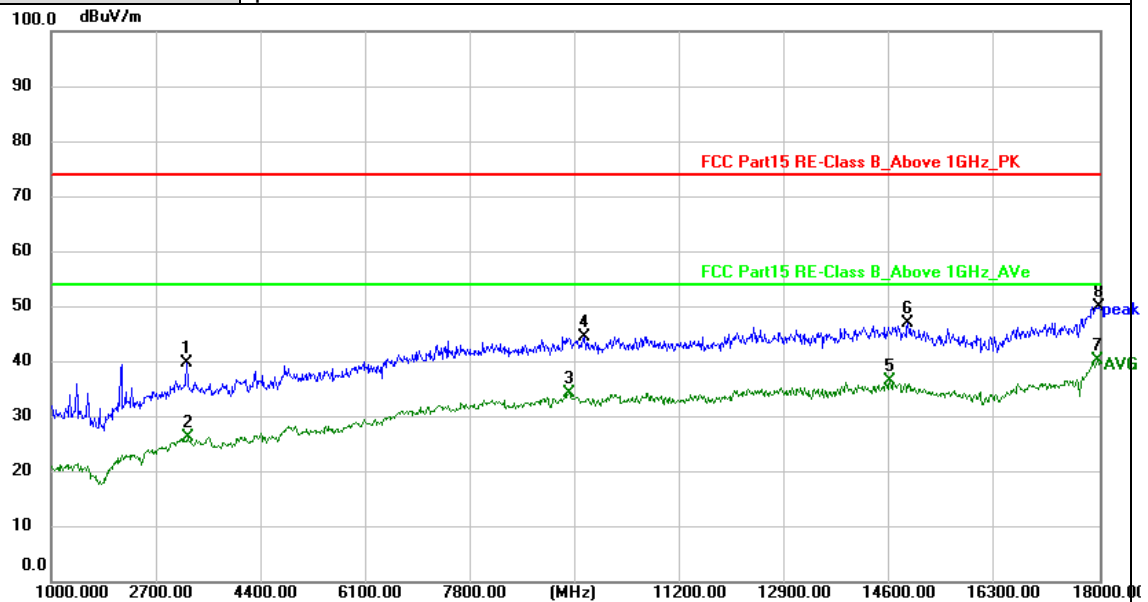


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3193.000	53.29	-13.43	39.86	74.00	-34.14	peak
2	3210.000	39.62	-13.43	26.19	54.00	-27.81	AVG
3	9398.000	34.74	-0.39	34.35	54.00	-19.65	AVG
4	9653.000	45.59	-0.97	44.62	74.00	-29.38	peak
5	14600.000	32.84	3.57	36.41	54.00	-17.59	AVG
6	14889.000	43.57	3.41	46.98	74.00	-27.02	peak
7 *	17966.000	31.93	8.32	40.25	54.00	-13.75	AVG
8	17983.000	41.78	8.33	50.11	74.00	-23.89	peak

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	8# BLE 1Mbps Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

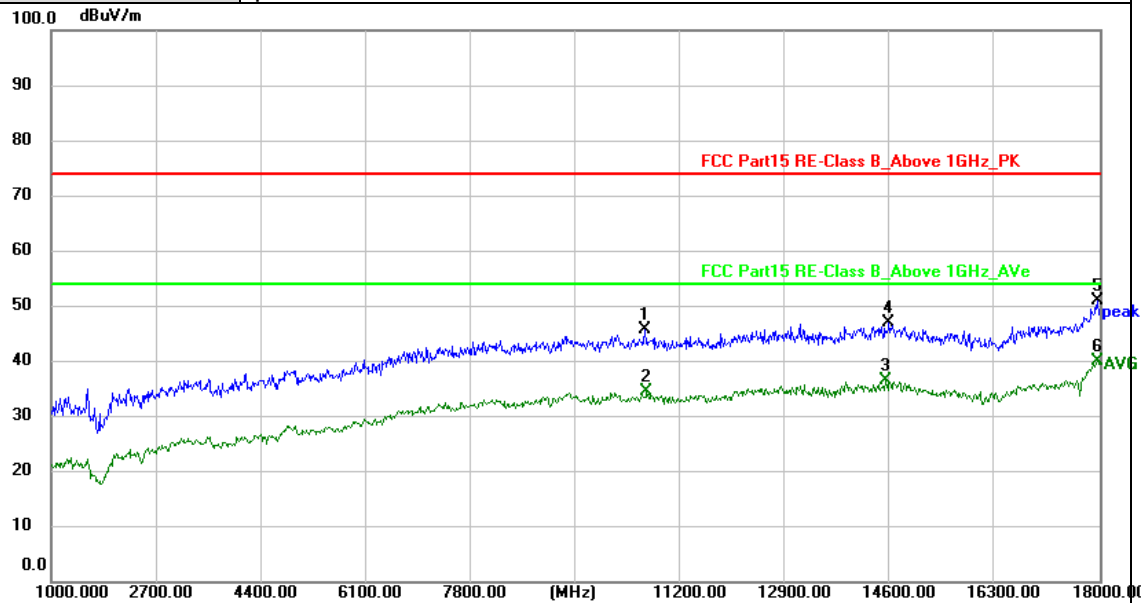


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	10622.000	45.77	-0.03	45.74	74.00	-28.26	peak
2	10656.000	34.41	0.04	34.45	54.00	-19.55	AVG
3	14532.000	33.04	3.42	36.46	54.00	-17.54	AVG
4	14583.000	43.53	3.53	47.06	74.00	-26.94	peak
5	17966.000	42.63	8.32	50.95	74.00	-23.05	peak
6 *	17966.000	31.75	8.32	40.07	54.00	-13.93	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	8# BLE 1Mbps Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

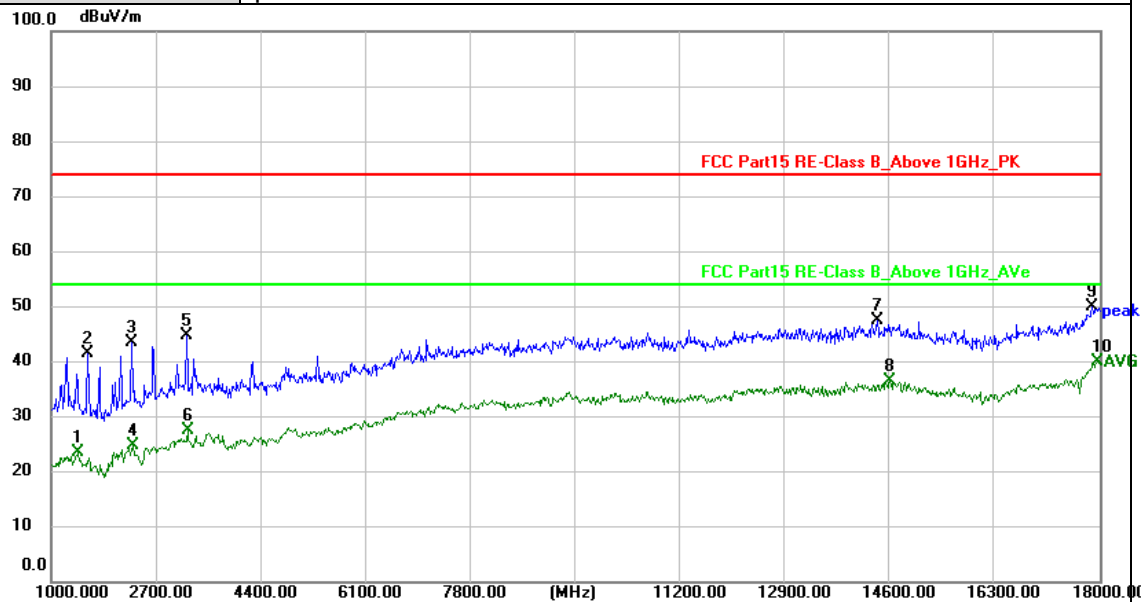


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1442.000	43.71	-20.17	23.54	54.00	-30.46	AVG
2	1595.000	61.36	-19.74	41.62	74.00	-32.38	peak
3	2309.000	60.96	-17.42	43.54	74.00	-30.46	peak
4	2326.000	42.33	-17.44	24.89	54.00	-29.11	AVG
5	3193.000	58.19	-13.43	44.76	74.00	-29.24	peak
6	3210.000	40.92	-13.43	27.49	54.00	-26.51	AVG
7	14396.000	44.06	3.39	47.45	74.00	-26.55	peak
8	14600.000	32.93	3.57	36.50	54.00	-17.50	AVG
9	17881.000	42.04	8.01	50.05	74.00	-23.95	peak
10 *	17966.000	31.77	8.32	40.09	54.00	-13.91	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant. Pol.	Horizontal
Test Mode:	8# BLE 1Mbps Mode 2440MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

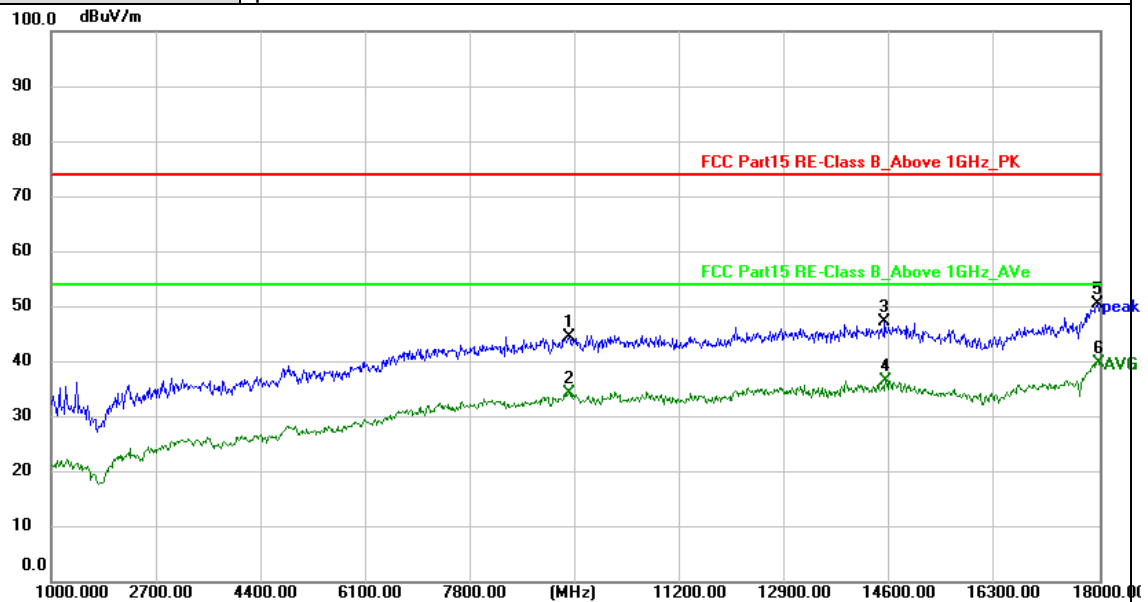


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	9398.000	44.94	-0.39	44.55	74.00	-29.45	peak
2	9398.000	34.77	-0.39	34.38	54.00	-19.62	AVG
3	14515.000	43.89	3.37	47.26	74.00	-26.74	peak
4	14532.000	33.01	3.42	36.43	54.00	-17.57	AVG
5	17966.000	42.26	8.32	50.58	74.00	-23.42	peak
6 *	17983.000	31.38	8.33	39.71	54.00	-14.29	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	8# BLE 1Mbps Mode 2440MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

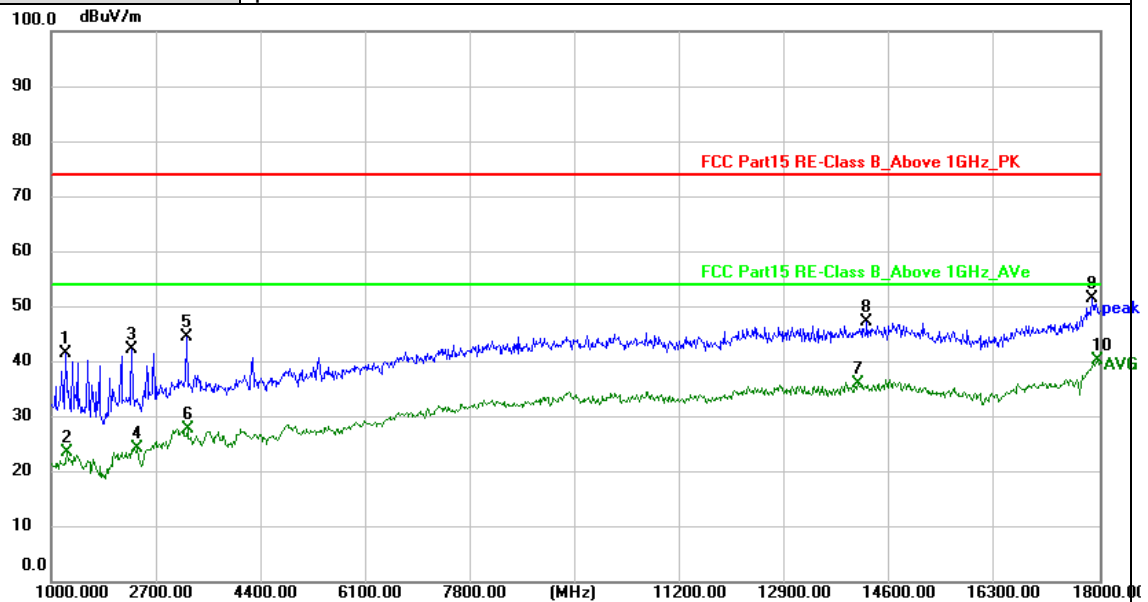


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1238.000	61.91	-20.38	41.53	74.00	-32.47	peak
2	1255.000	43.85	-20.27	23.58	54.00	-30.42	AVG
3	2309.000	59.62	-17.42	42.20	74.00	-31.80	peak
4	2394.000	41.71	-17.31	24.40	54.00	-29.60	AVG
5	3193.000	57.83	-13.43	44.40	74.00	-29.60	peak
6	3210.000	41.36	-13.43	27.93	54.00	-26.07	AVG
7	14090.000	32.95	3.09	36.04	54.00	-17.96	AVG
8	14226.000	44.36	2.93	47.29	74.00	-26.71	peak
9	17881.000	43.43	8.01	51.44	74.00	-22.56	peak
10 *	17966.000	31.87	8.32	40.19	54.00	-13.81	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value




Ant. Pol.	Horizontal
Test Mode:	8# BLE 1Mbps Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

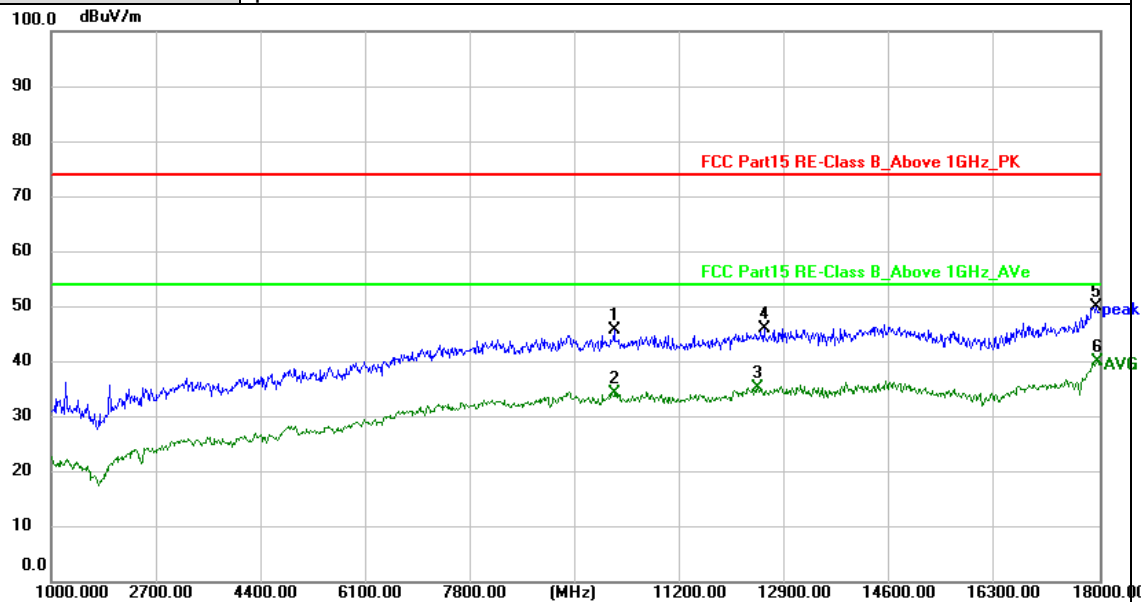

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	10129.000	45.98	-0.16	45.82	74.00	-28.18	peak
2	10146.000	34.51	-0.20	34.31	54.00	-19.69	AVG
3	12458.000	34.64	0.77	35.41	54.00	-18.59	AVG
4	12560.000	45.18	0.80	45.98	74.00	-28.02	peak
5	17949.000	41.59	8.29	49.88	74.00	-24.12	peak
6 *	17966.000	31.74	8.32	40.06	54.00	-13.94	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

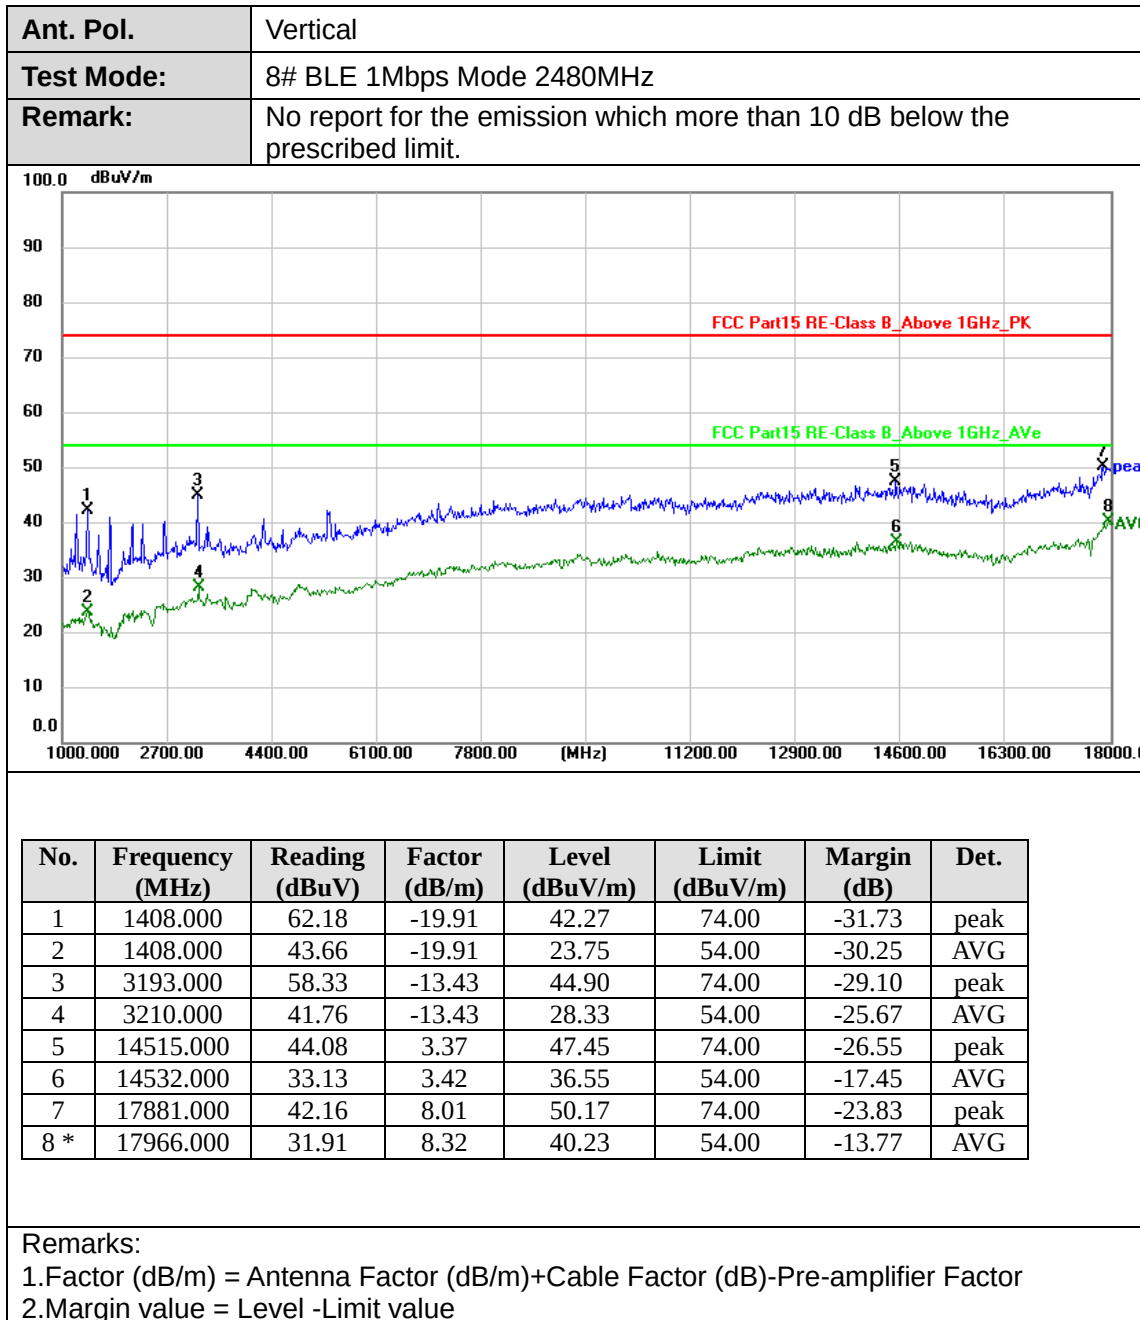




Ant. Pol.	Horizontal
Test Mode:	8# BLE 2Mbps Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

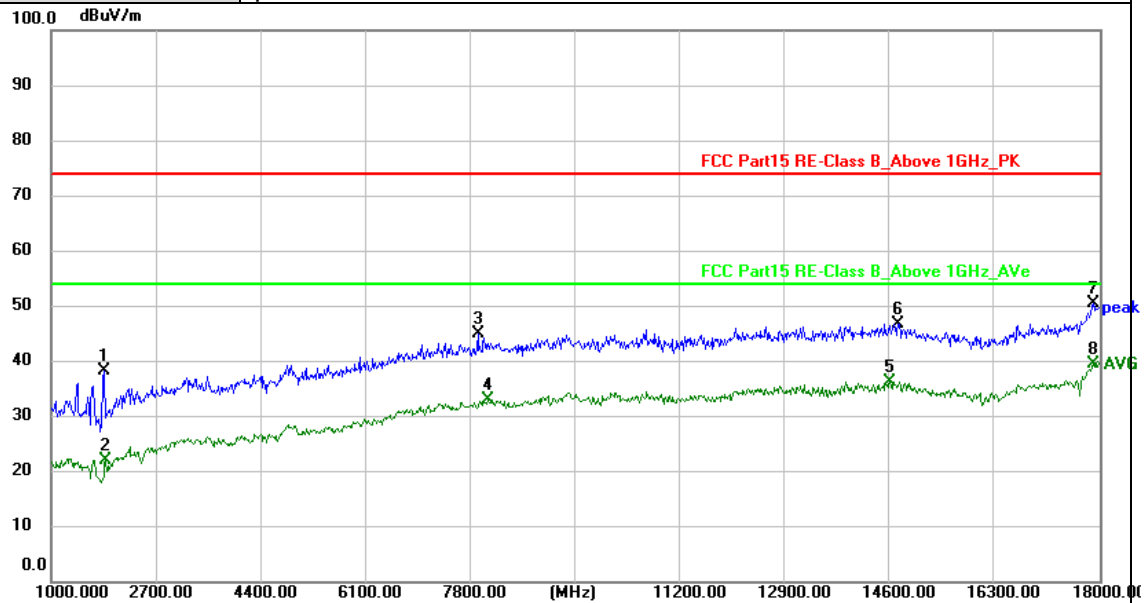

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1850.000	58.42	-20.22	38.20	74.00	-35.80	peak
2	1884.000	41.53	-19.51	22.02	54.00	-31.98	AVG
3	7919.000	47.97	-3.04	44.93	74.00	-29.07	peak
4	8089.000	35.36	-2.35	33.01	54.00	-20.99	AVG
5	14600.000	32.83	3.57	36.40	54.00	-17.60	AVG
6	14736.000	43.45	3.27	46.72	74.00	-27.28	peak
7	17898.000	42.23	8.19	50.42	74.00	-23.58	peak
8 *	17898.000	31.44	8.19	39.63	54.00	-14.37	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value

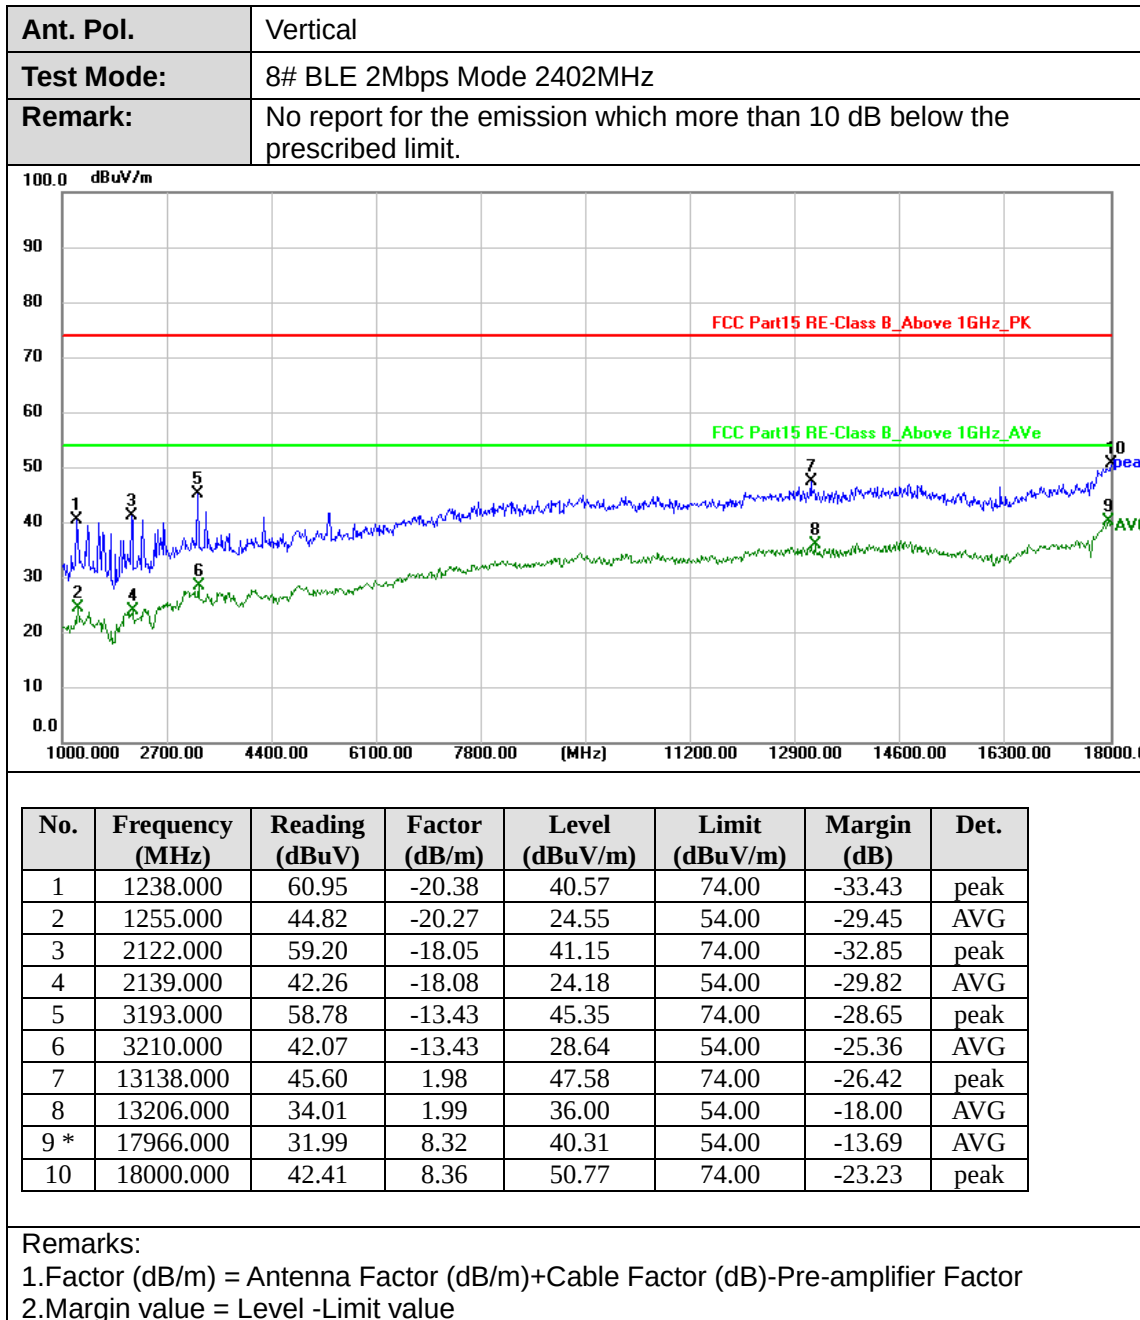



Ant. Pol.	Horizontal
Test Mode:	8# BLE 2Mbps Mode 2440MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

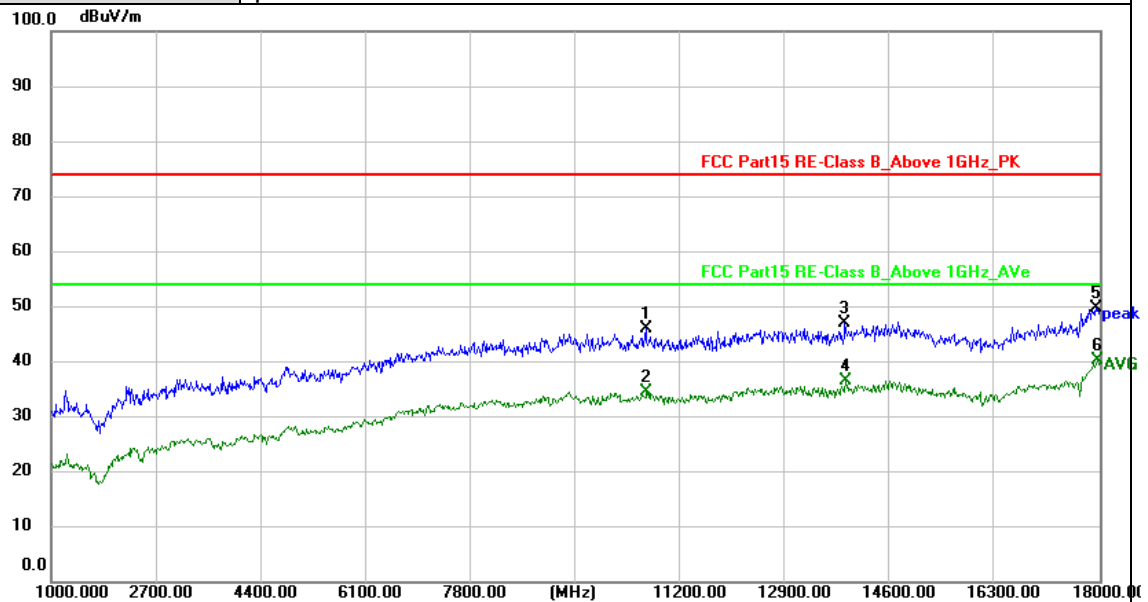


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	10639.000	46.01	0.00	46.01	74.00	-27.99	peak
2	10656.000	34.43	0.04	34.47	54.00	-19.53	AVG
3	13869.000	44.51	2.45	46.96	74.00	-27.04	peak
4	13886.000	33.92	2.53	36.45	54.00	-17.55	AVG
5	17949.000	41.49	8.29	49.78	74.00	-24.22	peak
6 *	17966.000	31.85	8.32	40.17	54.00	-13.83	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value




Ant. Pol.	Vertical
Test Mode:	8# BLE 2Mbps Mode 2440MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

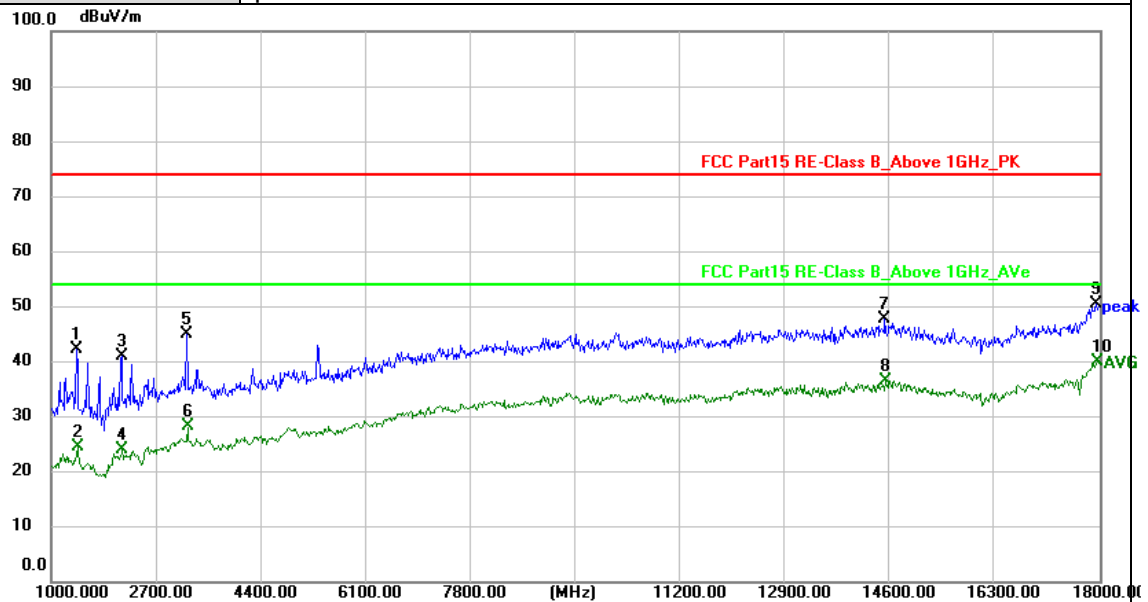

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1408.000	62.25	-19.91	42.34	74.00	-31.66	peak
2	1425.000	44.52	-20.04	24.48	54.00	-29.52	AVG
3	2139.000	59.03	-18.08	40.95	74.00	-33.05	peak
4	2156.000	42.09	-18.03	24.06	54.00	-29.94	AVG
5	3193.000	58.49	-13.43	45.06	74.00	-28.94	peak
6	3210.000	41.61	-13.43	28.18	54.00	-25.82	AVG
7	14515.000	44.31	3.37	47.68	74.00	-26.32	peak
8	14532.000	33.23	3.42	36.65	54.00	-17.35	AVG
9	17949.000	42.25	8.29	50.54	74.00	-23.46	peak
10 *	17966.000	31.79	8.32	40.11	54.00	-13.89	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

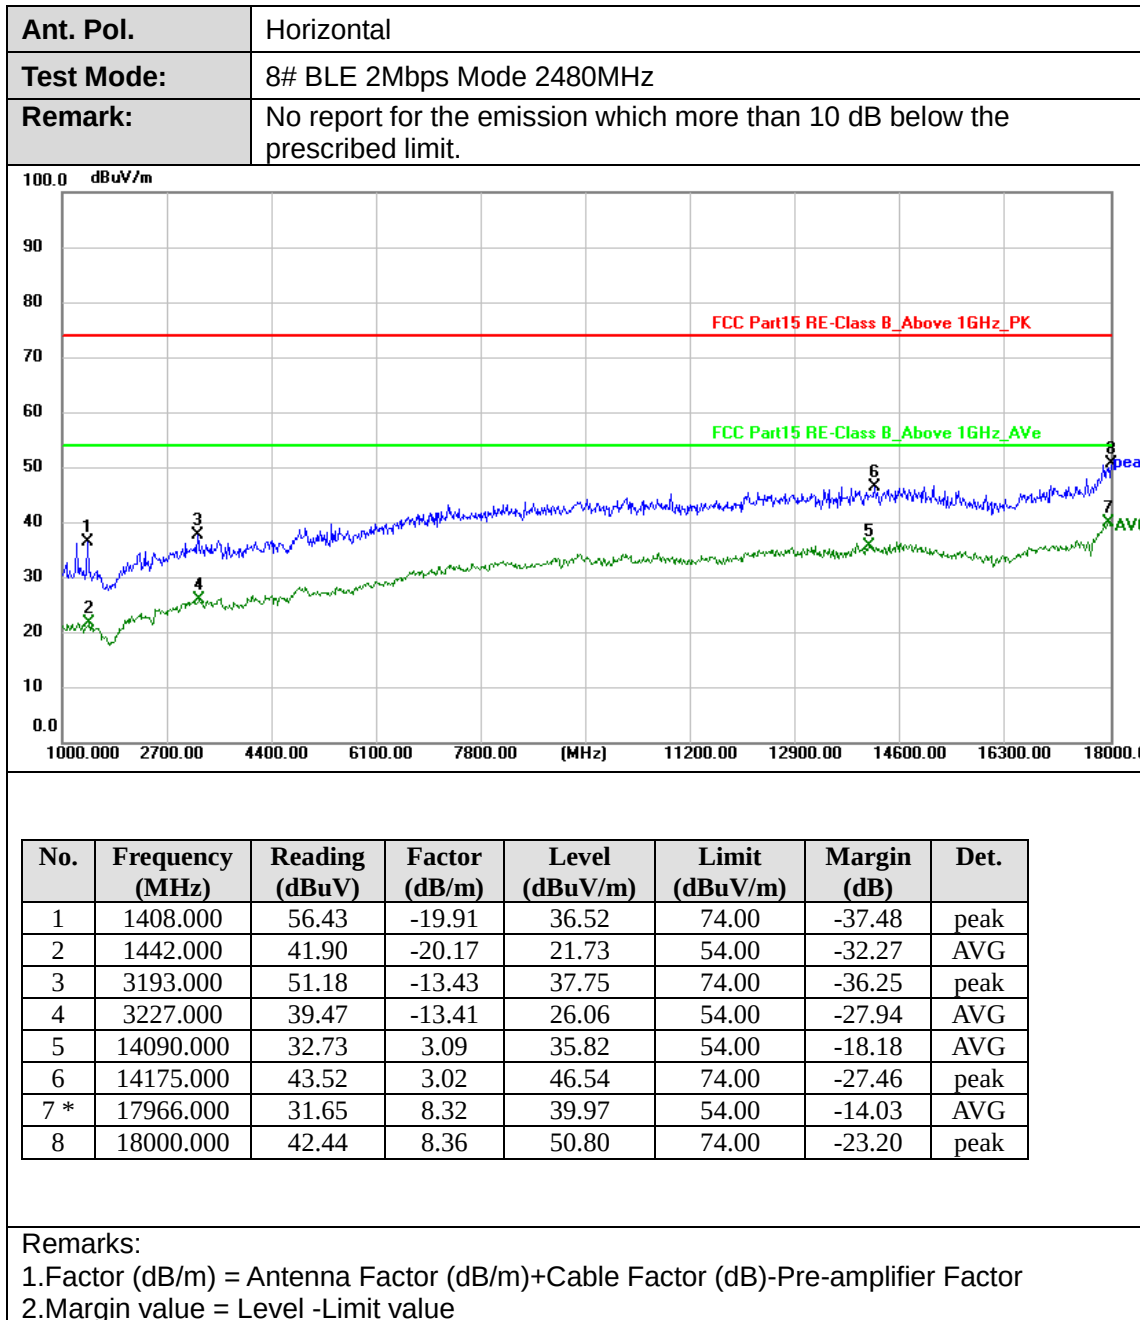



Ant. Pol.	Vertical
Test Mode:	8# BLE 2Mbps Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

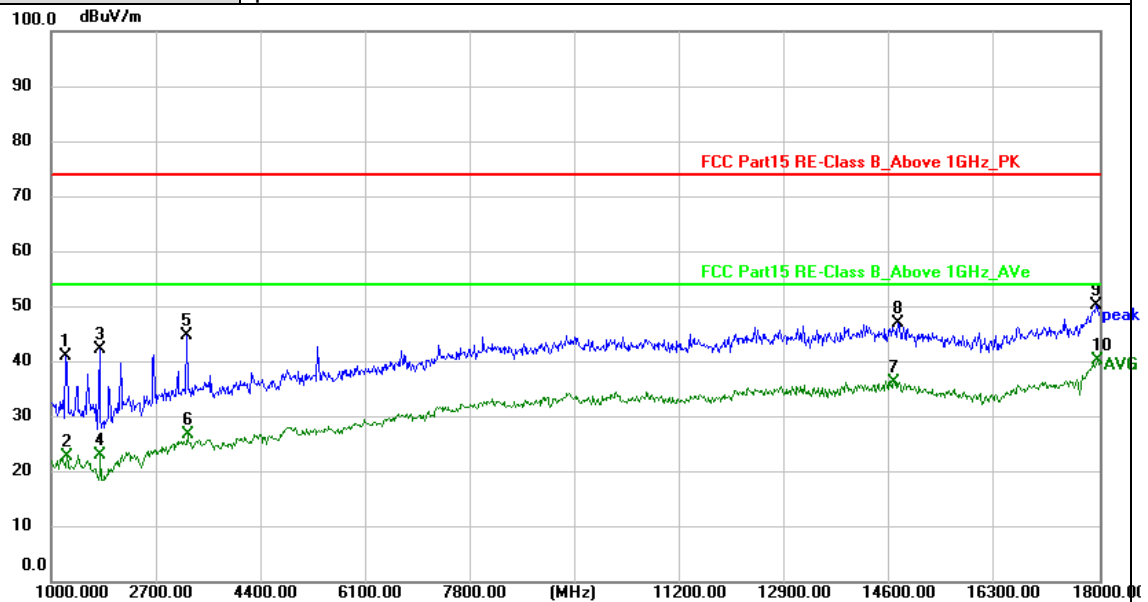


No.	Frequenc y (MHz)	Readin g (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1238.000	61.43	-20.38	41.05	74.00	-32.95	peak
2	1255.000	43.18	-20.27	22.91	54.00	-31.09	AVG
3	1782.000	62.05	-19.75	42.30	74.00	-31.70	peak
4	1799.000	42.67	-19.57	23.10	54.00	-30.90	AVG
5	3193.000	58.14	-13.43	44.71	74.00	-29.29	peak
6	3210.000	40.30	-13.43	26.87	54.00	-27.13	AVG
7	14668.000	32.94	3.45	36.39	54.00	-17.61	AVG
8	14736.000	43.68	3.27	46.95	74.00	-27.05	peak
9	17949.000	41.90	8.29	50.19	74.00	-23.81	peak
10 *	17966.000	31.83	8.32	40.15	54.00	-13.85	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value




Ant. Pol.	Horizontal
Test Mode:	9# BLE 1Mbps Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

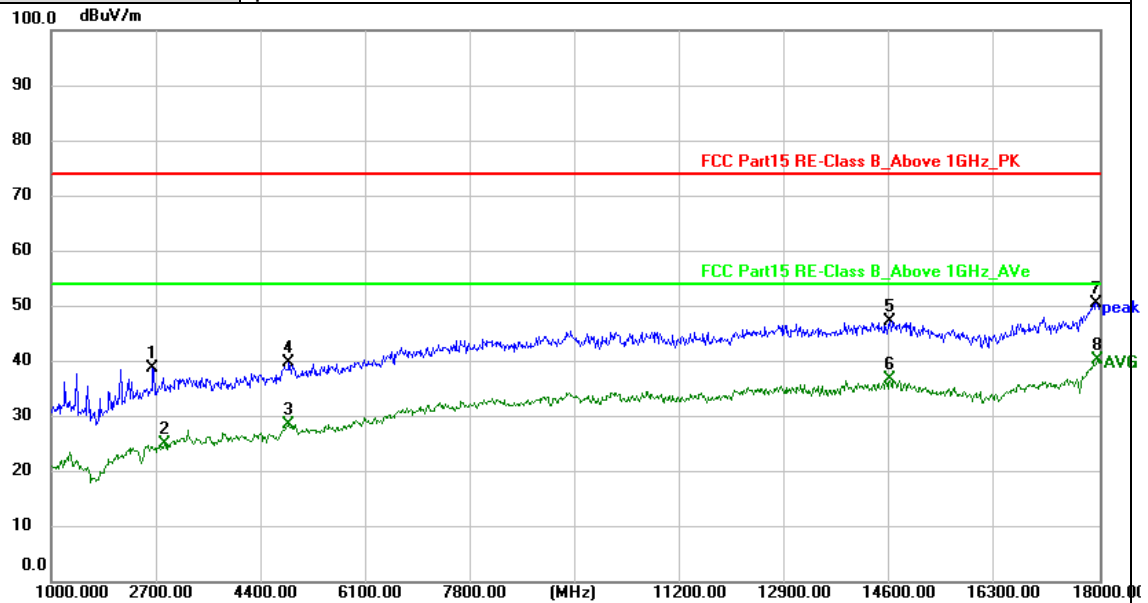

No.	Frequenc y (MHz)	Readin g (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2649.000	54.58	-15.89	38.69	74.00	-35.31	peak
2	2836.000	40.25	-15.20	25.05	54.00	-28.95	AVG
3	4842.000	37.66	-9.05	28.61	54.00	-25.39	AVG
4	4859.000	48.58	-8.90	39.68	74.00	-34.32	peak
5	14600.000	43.73	3.57	47.30	74.00	-26.70	peak
6	14600.000	33.09	3.57	36.66	54.00	-17.34	AVG
7	17949.000	42.33	8.29	50.62	74.00	-23.38	peak
8 *	17966.000	31.93	8.32	40.25	54.00	-13.75	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

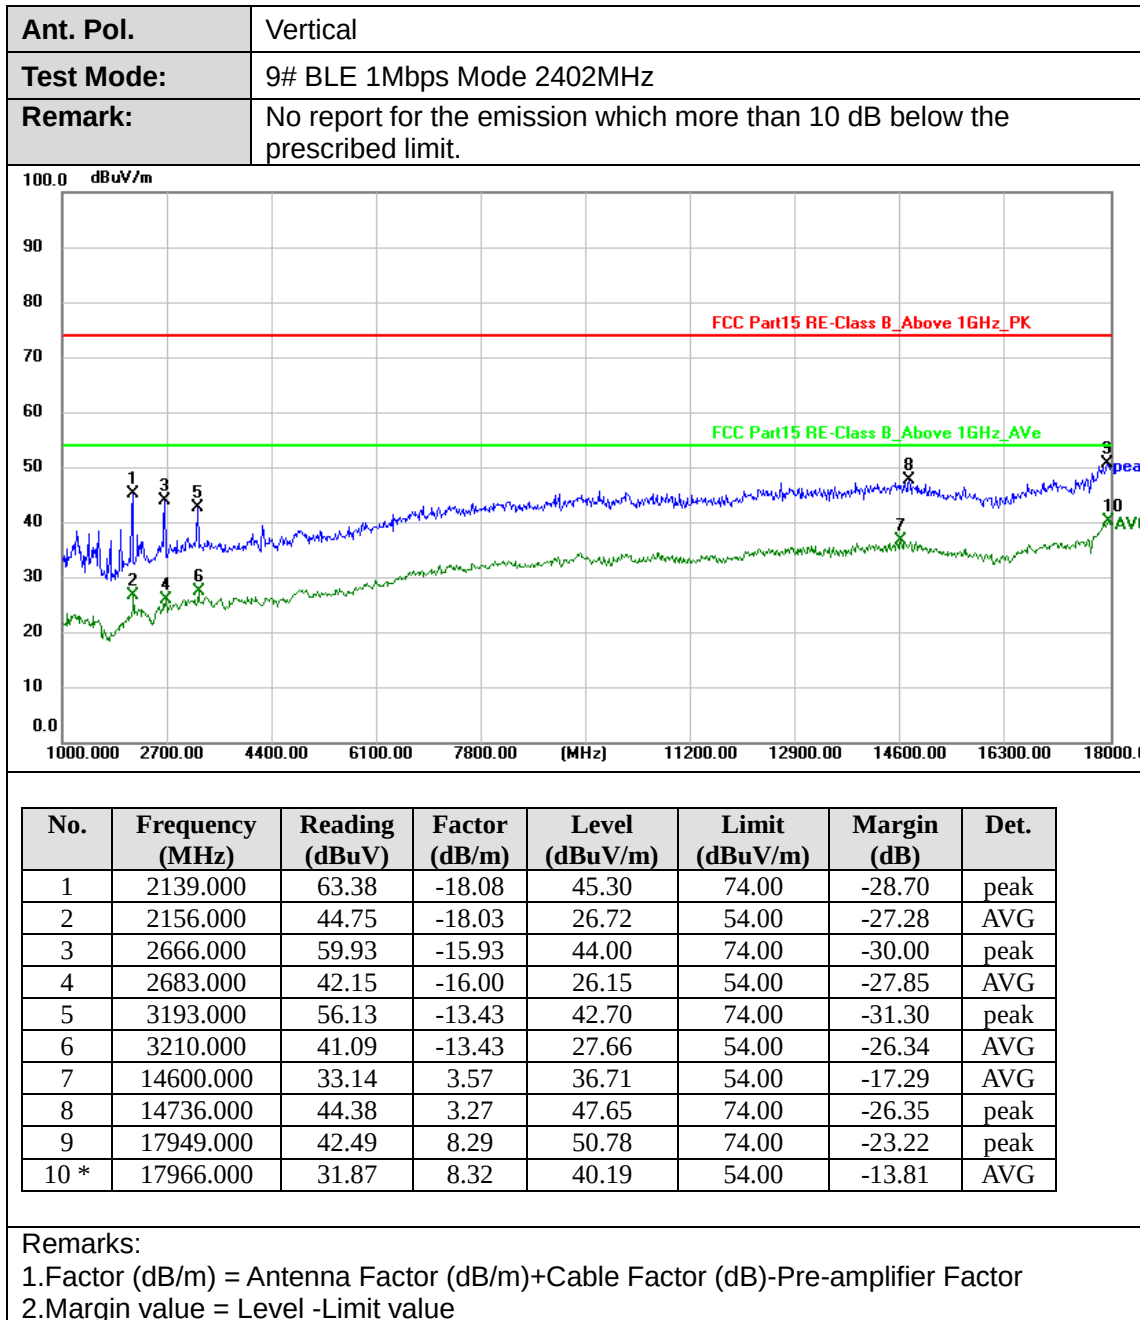



Ant. Pol.	Horizontal
Test Mode:	9# BLE 1Mbps Mode 2440MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

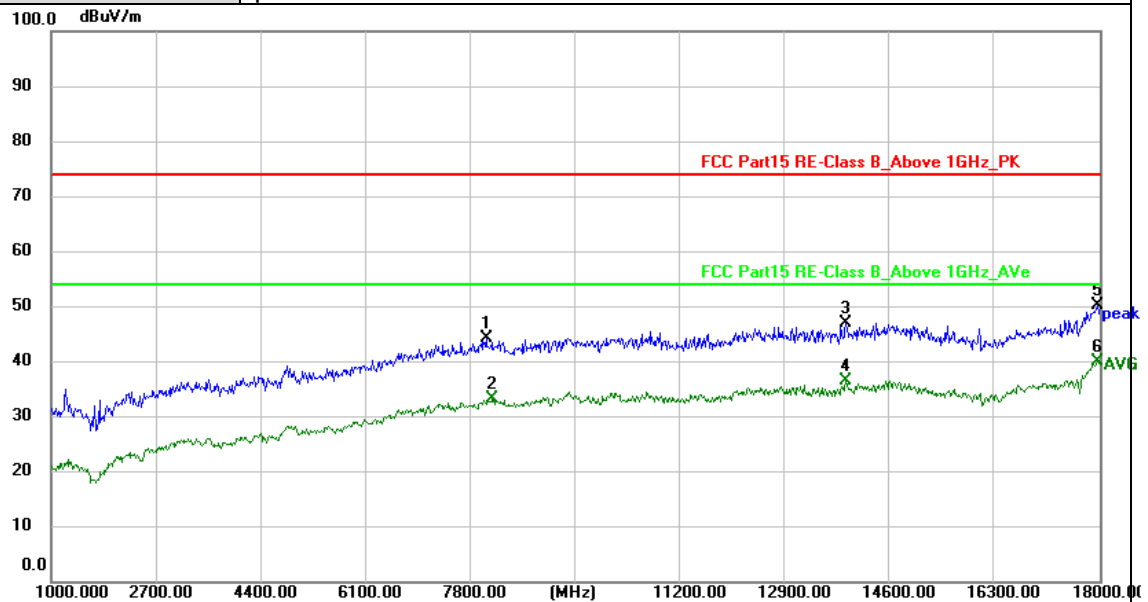


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	8055.000	46.42	-2.21	44.21	74.00	-29.79	peak
2	8157.000	35.36	-2.07	33.29	54.00	-20.71	AVG
3	13886.000	44.54	2.53	47.07	74.00	-26.93	peak
4	13886.000	33.88	2.53	36.41	54.00	-17.59	AVG
5	17966.000	42.01	8.32	50.33	74.00	-23.67	peak
6 *	17966.000	31.72	8.32	40.04	54.00	-13.96	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value




Ant. Pol.	Vertical
Test Mode:	9# BLE 1Mbps Mode 2440MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

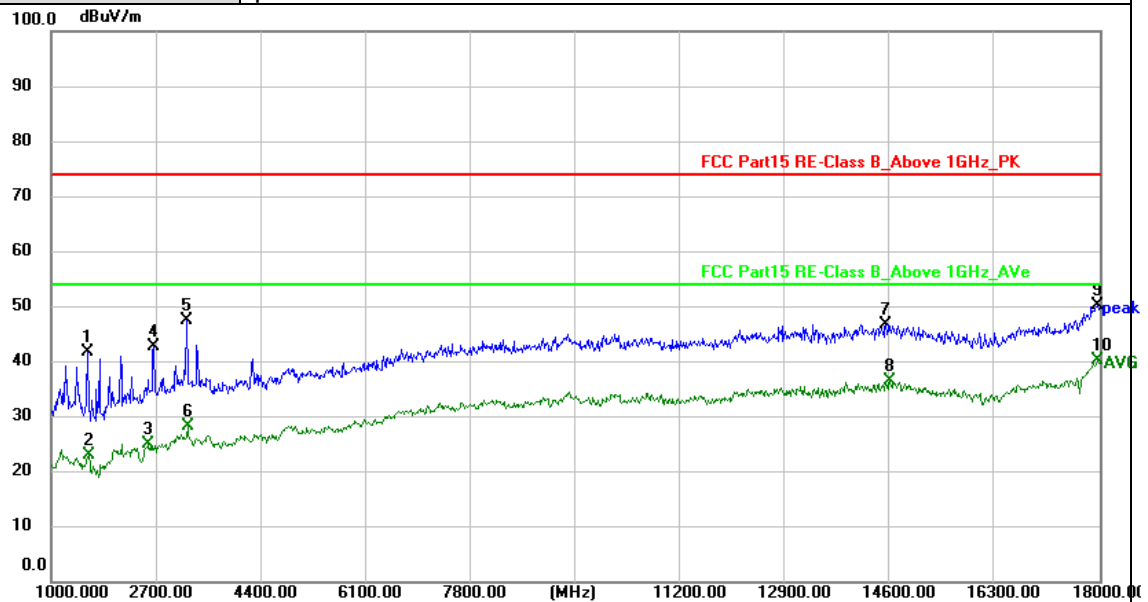

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1595.000	61.62	-19.74	41.88	74.00	-32.12	peak
2	1612.000	43.08	-20.01	23.07	54.00	-30.93	AVG
3	2581.000	41.08	-16.12	24.96	54.00	-29.04	AVG
4	2666.000	58.78	-15.93	42.85	74.00	-31.15	peak
5	3193.000	60.92	-13.43	47.49	74.00	-26.51	peak
6	3210.000	41.81	-13.43	28.38	54.00	-25.62	AVG
7	14532.000	43.42	3.42	46.84	74.00	-27.16	peak
8	14600.000	33.05	3.57	36.62	54.00	-17.38	AVG
9	17966.000	41.88	8.32	50.20	74.00	-23.80	peak
10 *	17966.000	31.98	8.32	40.30	54.00	-13.70	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

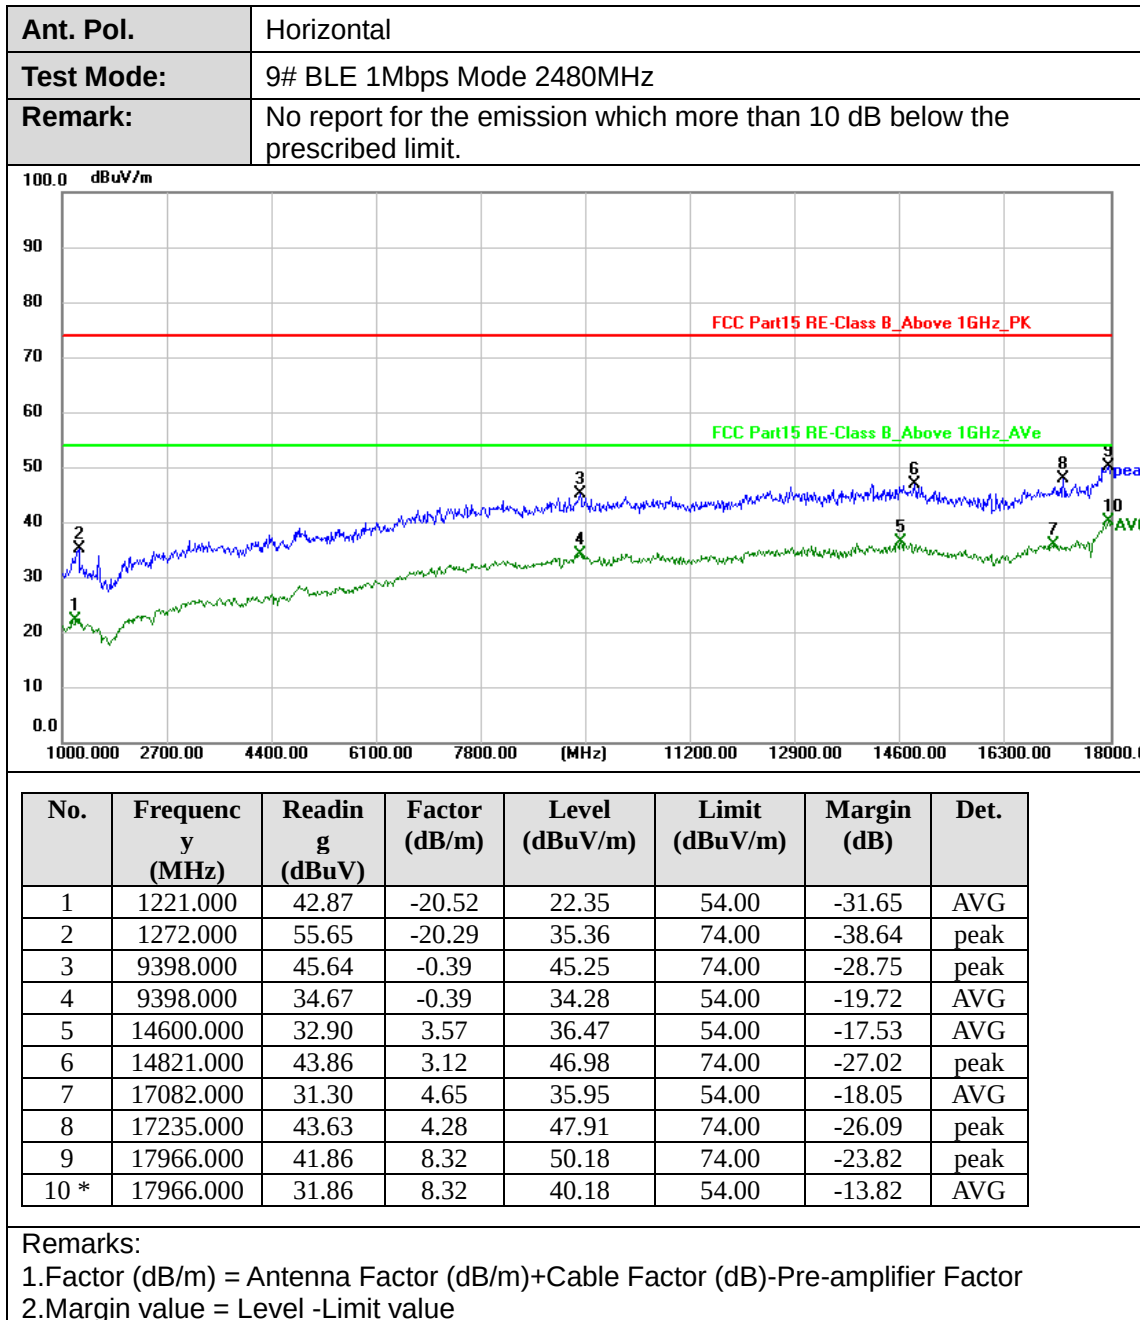



Ant. Pol.	Vertical
Test Mode:	9# BLE 1Mbps Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

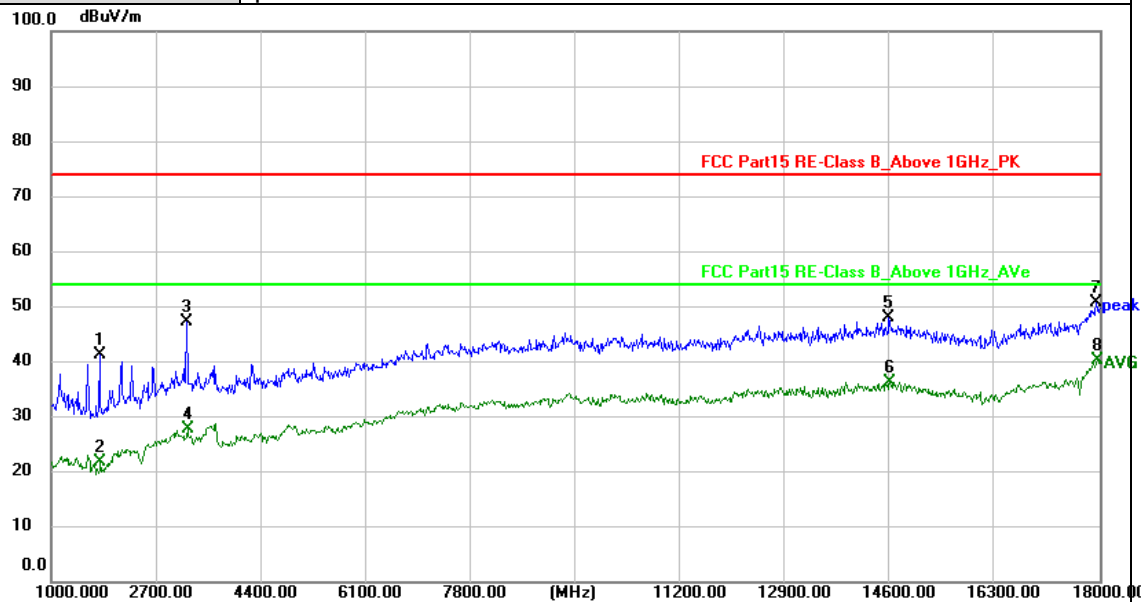


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1782.000	60.92	-19.75	41.17	74.00	-32.83	peak
2	1799.000	41.50	-19.57	21.93	54.00	-32.07	AVG
3	3193.000	60.65	-13.43	47.22	74.00	-26.78	peak
4	3210.000	41.12	-13.43	27.69	54.00	-26.31	AVG
5	14583.000	44.38	3.53	47.91	74.00	-26.09	peak
6	14600.000	32.83	3.57	36.40	54.00	-17.60	AVG
7	17949.000	42.52	8.29	50.81	74.00	-23.19	peak
8 *	17966.000	32.03	8.32	40.35	54.00	-13.65	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	9# BLE 2Mbps Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

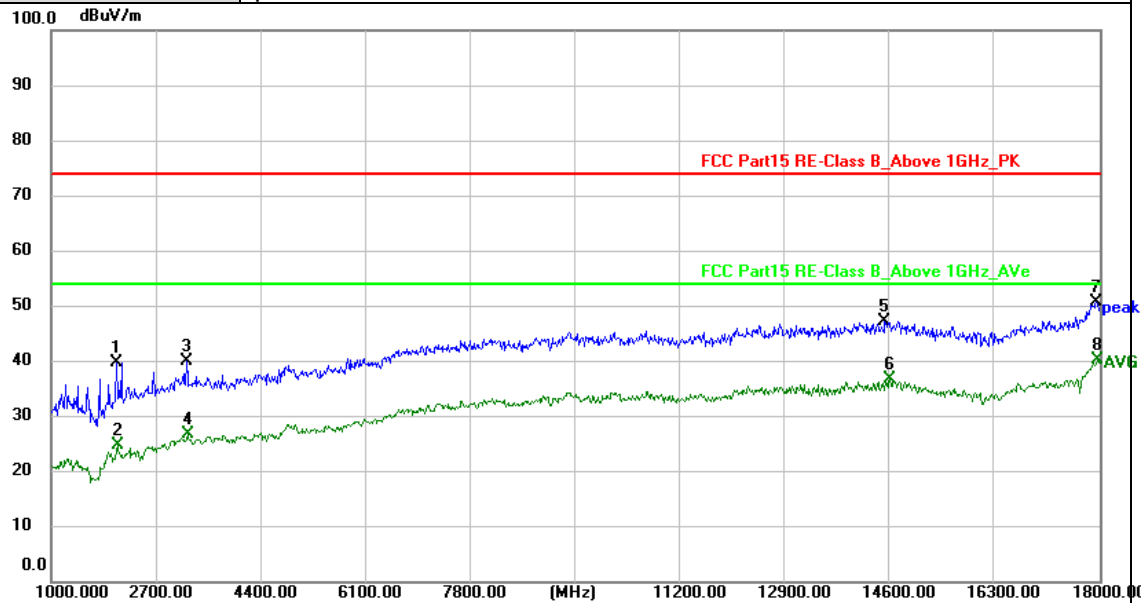


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2054.000	57.80	-18.10	39.70	74.00	-34.30	peak
2	2071.000	42.81	-18.07	24.74	54.00	-29.26	AVG
3	3193.000	53.47	-13.43	40.04	74.00	-33.96	peak
4	3210.000	40.29	-13.43	26.86	54.00	-27.14	AVG
5	14515.000	43.90	3.37	47.27	74.00	-26.73	peak
6	14600.000	33.19	3.57	36.76	54.00	-17.24	AVG
7	17949.000	42.41	8.29	50.70	74.00	-23.30	peak
8 *	17966.000	31.83	8.32	40.15	54.00	-13.85	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value




Ant. Pol.	Vertical
Test Mode:	9# BLE 2Mbps Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

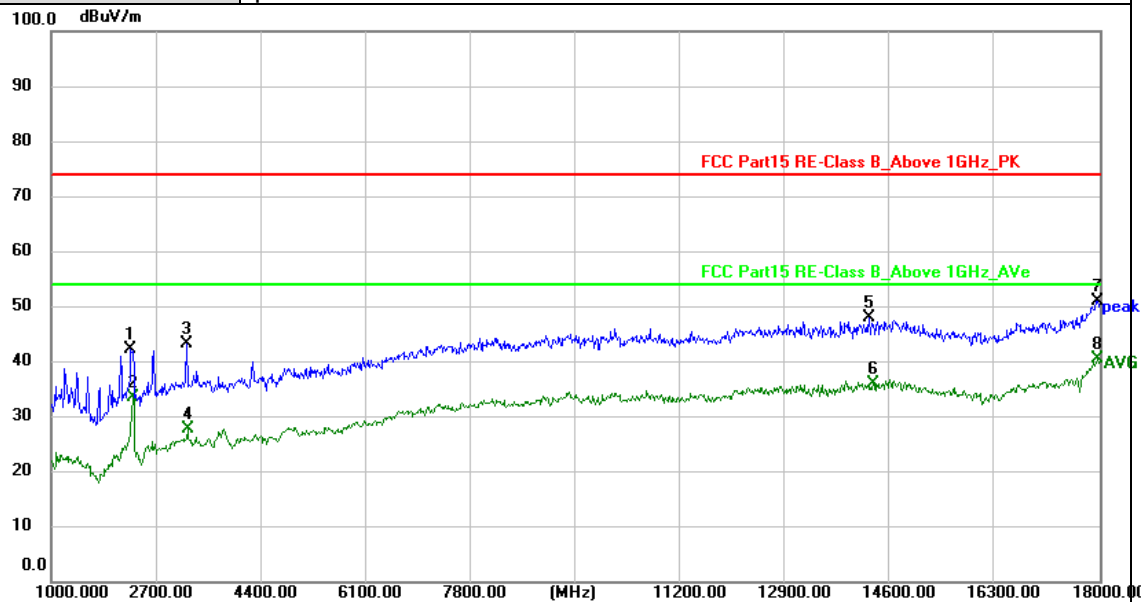

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2292.000	59.63	-17.41	42.22	74.00	-31.78	peak
2	2326.000	50.96	-17.44	33.52	54.00	-20.48	AVG
3	3193.000	56.60	-13.43	43.17	74.00	-30.83	peak
4	3210.000	41.34	-13.43	27.91	54.00	-26.09	AVG
5	14260.000	45.02	2.91	47.93	74.00	-26.07	peak
6	14328.000	32.90	3.02	35.92	54.00	-18.08	AVG
7	17966.000	42.72	8.32	51.04	74.00	-22.96	peak
8 *	17966.000	32.15	8.32	40.47	54.00	-13.53	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value

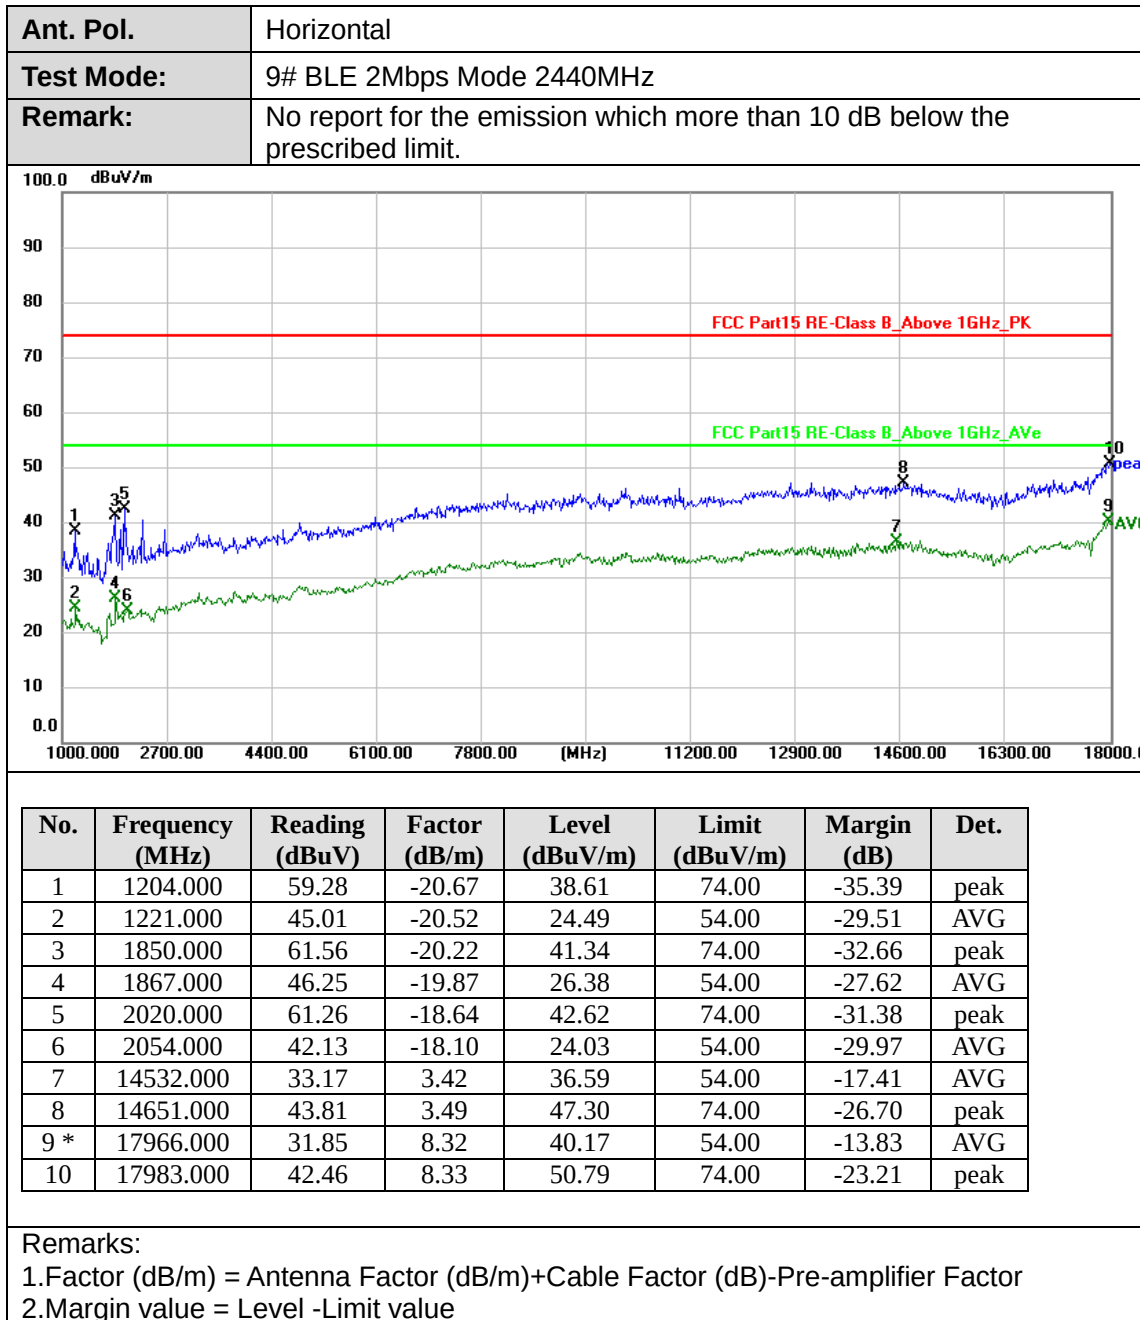



Ant. Pol.	Vertical
Test Mode:	9# BLE 2Mbps Mode 2440MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

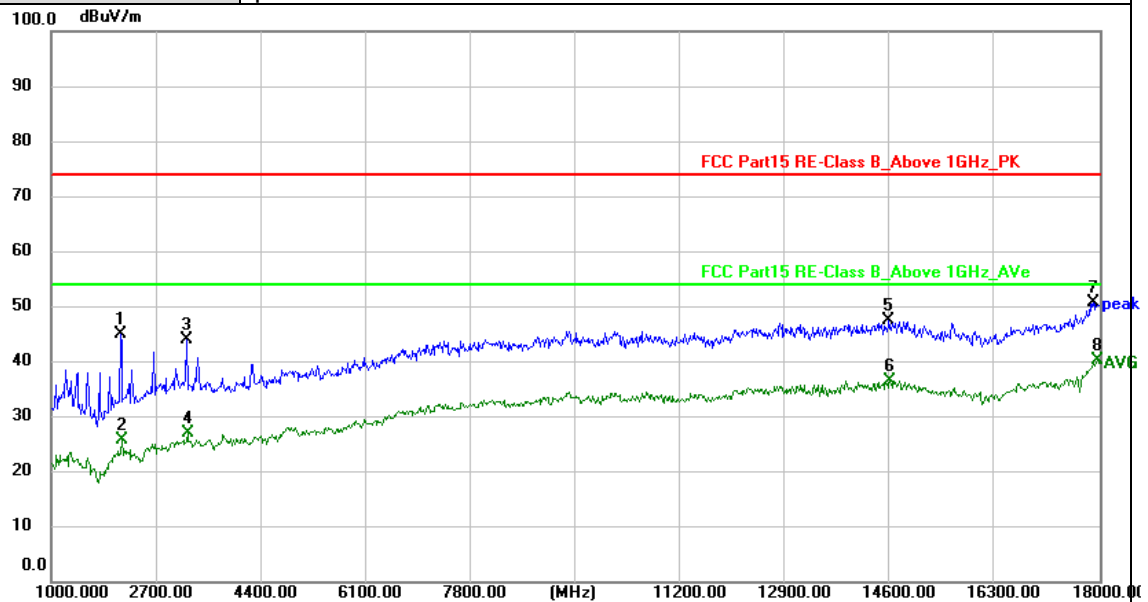


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2122.000	63.01	-18.05	44.96	74.00	-29.04	peak
2	2139.000	43.79	-18.08	25.71	54.00	-28.29	AVG
3	3193.000	57.43	-13.43	44.00	74.00	-30.00	peak
4	3210.000	40.53	-13.43	27.10	54.00	-26.90	AVG
5	14583.000	44.08	3.53	47.61	74.00	-26.39	peak
6	14600.000	33.08	3.57	36.65	54.00	-17.35	AVG
7	17898.000	42.62	8.19	50.81	74.00	-23.19	peak
8 *	17966.000	31.92	8.32	40.24	54.00	-13.76	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value




Ant. Pol.	Horizontal
Test Mode:	9# BLE 2Mbps Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

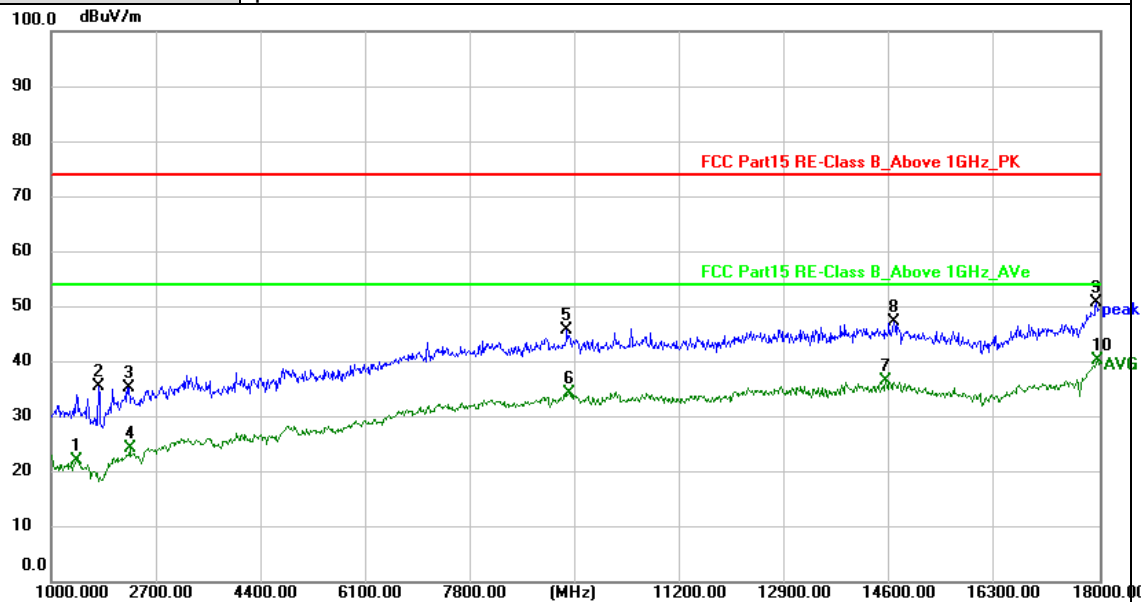

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1408.000	41.87	-19.91	21.96	54.00	-32.04	AVG
2	1765.000	55.59	-19.93	35.66	74.00	-38.34	peak
3	2258.000	52.84	-17.47	35.37	74.00	-38.63	peak
4	2275.000	41.73	-17.44	24.29	54.00	-29.71	AVG
5	9364.000	46.44	-0.76	45.68	74.00	-28.32	peak
6	9398.000	34.76	-0.39	34.37	54.00	-19.63	AVG
7	14532.000	33.20	3.42	36.62	54.00	-17.38	AVG
8	14668.000	43.69	3.45	47.14	74.00	-26.86	peak
9	17949.000	42.41	8.29	50.70	74.00	-23.30	peak
10 *	17966.000	31.83	8.32	40.15	54.00	-13.85	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

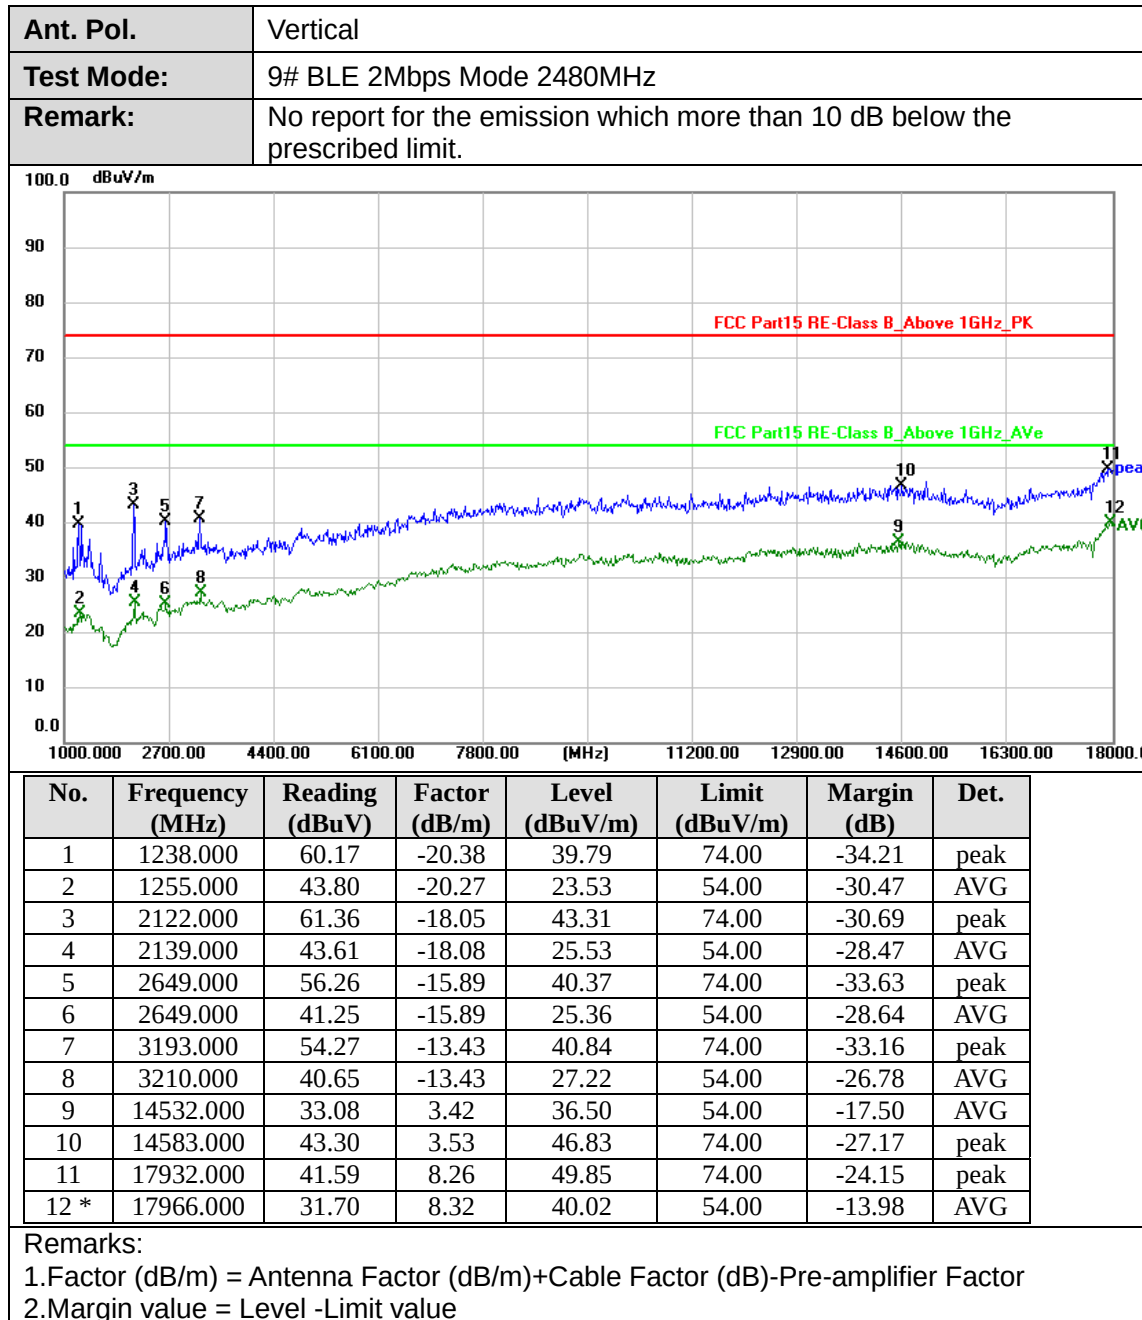




Ant. Pol.	Horizontal
Test Mode:	10# BLE 1Mbps Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

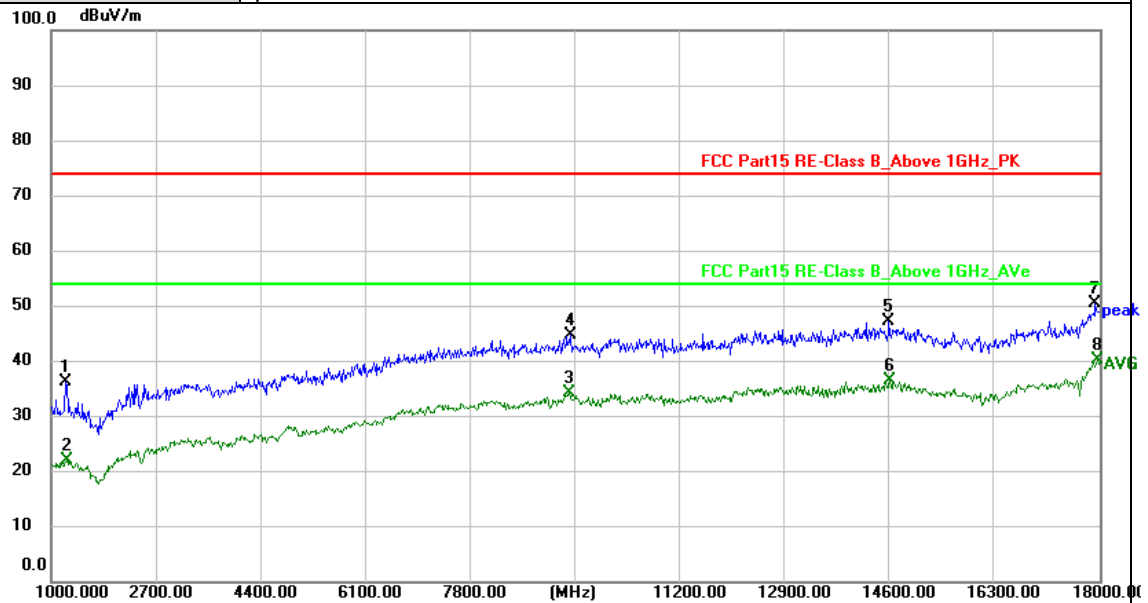



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1238.000	56.78	-20.38	36.40	74.00	-37.60	peak
2	1255.000	42.45	-20.27	22.18	54.00	-31.82	AVG
3	9398.000	34.65	-0.39	34.26	54.00	-19.74	AVG
4	9415.000	45.35	-0.63	44.72	74.00	-29.28	peak
5	14583.000	43.64	3.53	47.17	74.00	-26.83	peak
6	14600.000	32.88	3.57	36.45	54.00	-17.55	AVG
7	17932.000	42.15	8.26	50.41	74.00	-23.59	peak
8 *	17966.000	31.90	8.32	40.22	54.00	-13.78	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value

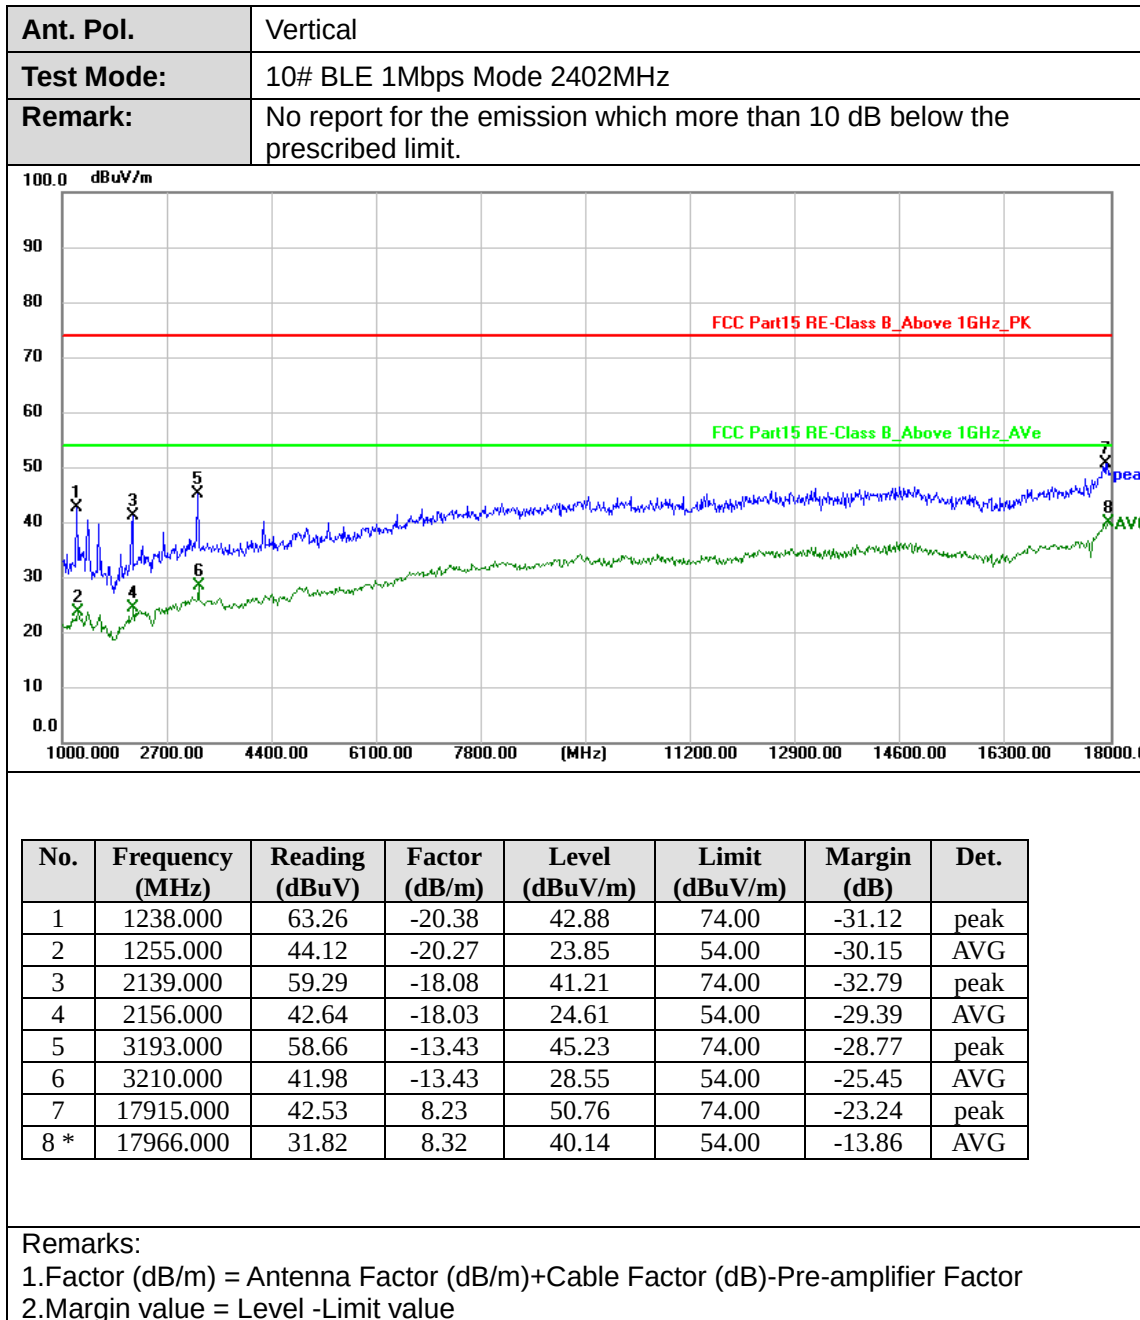


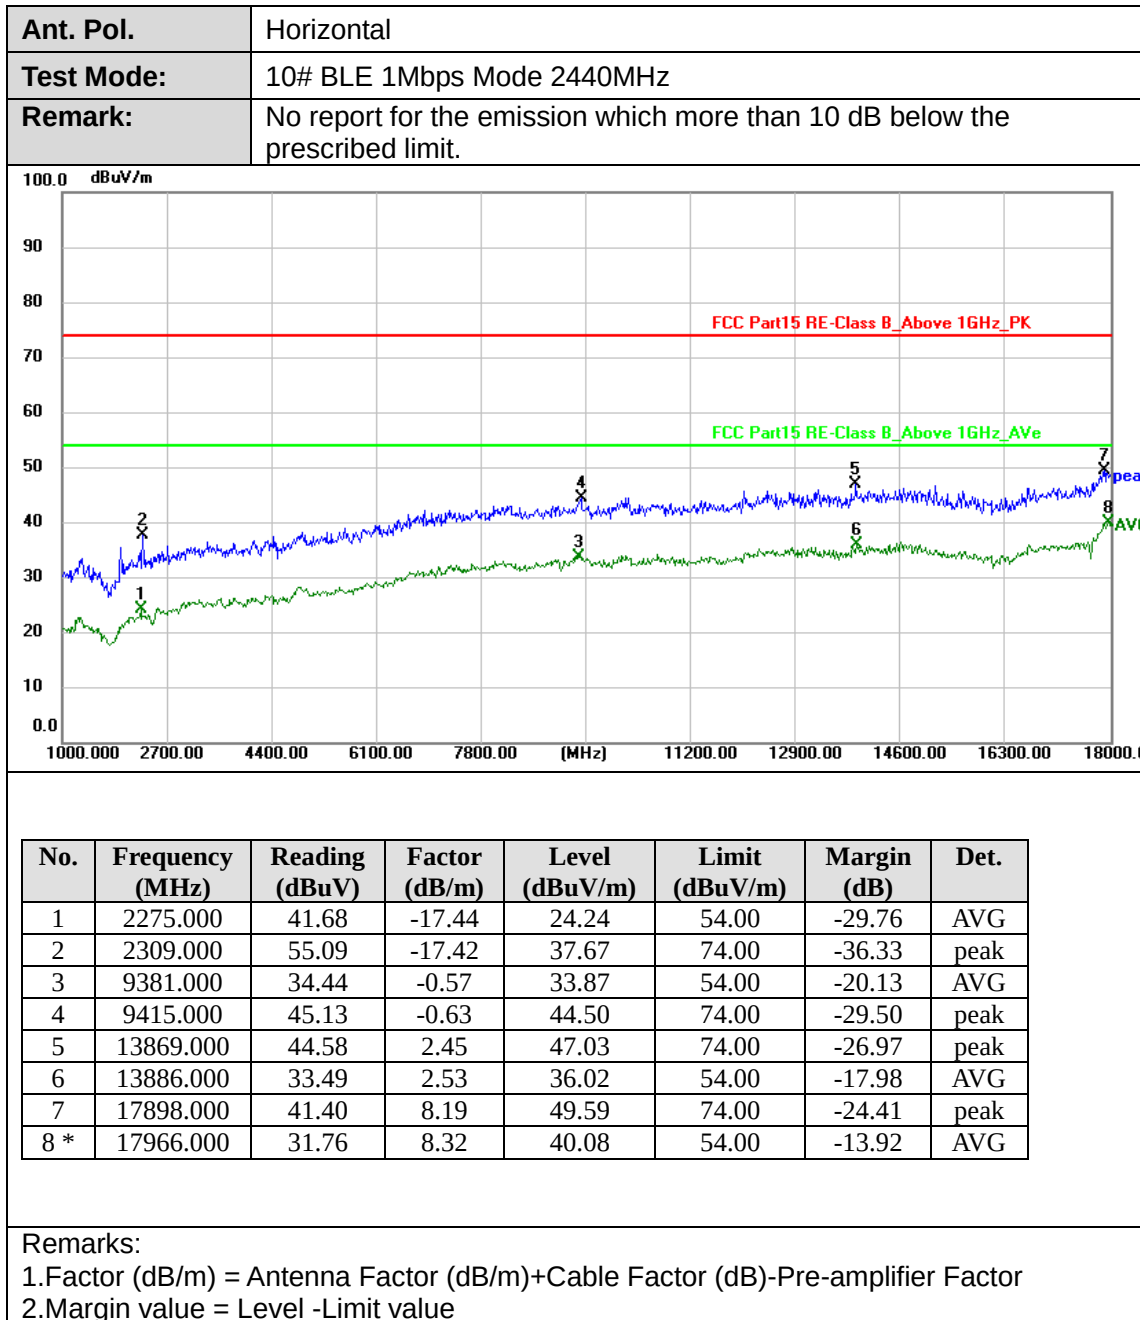

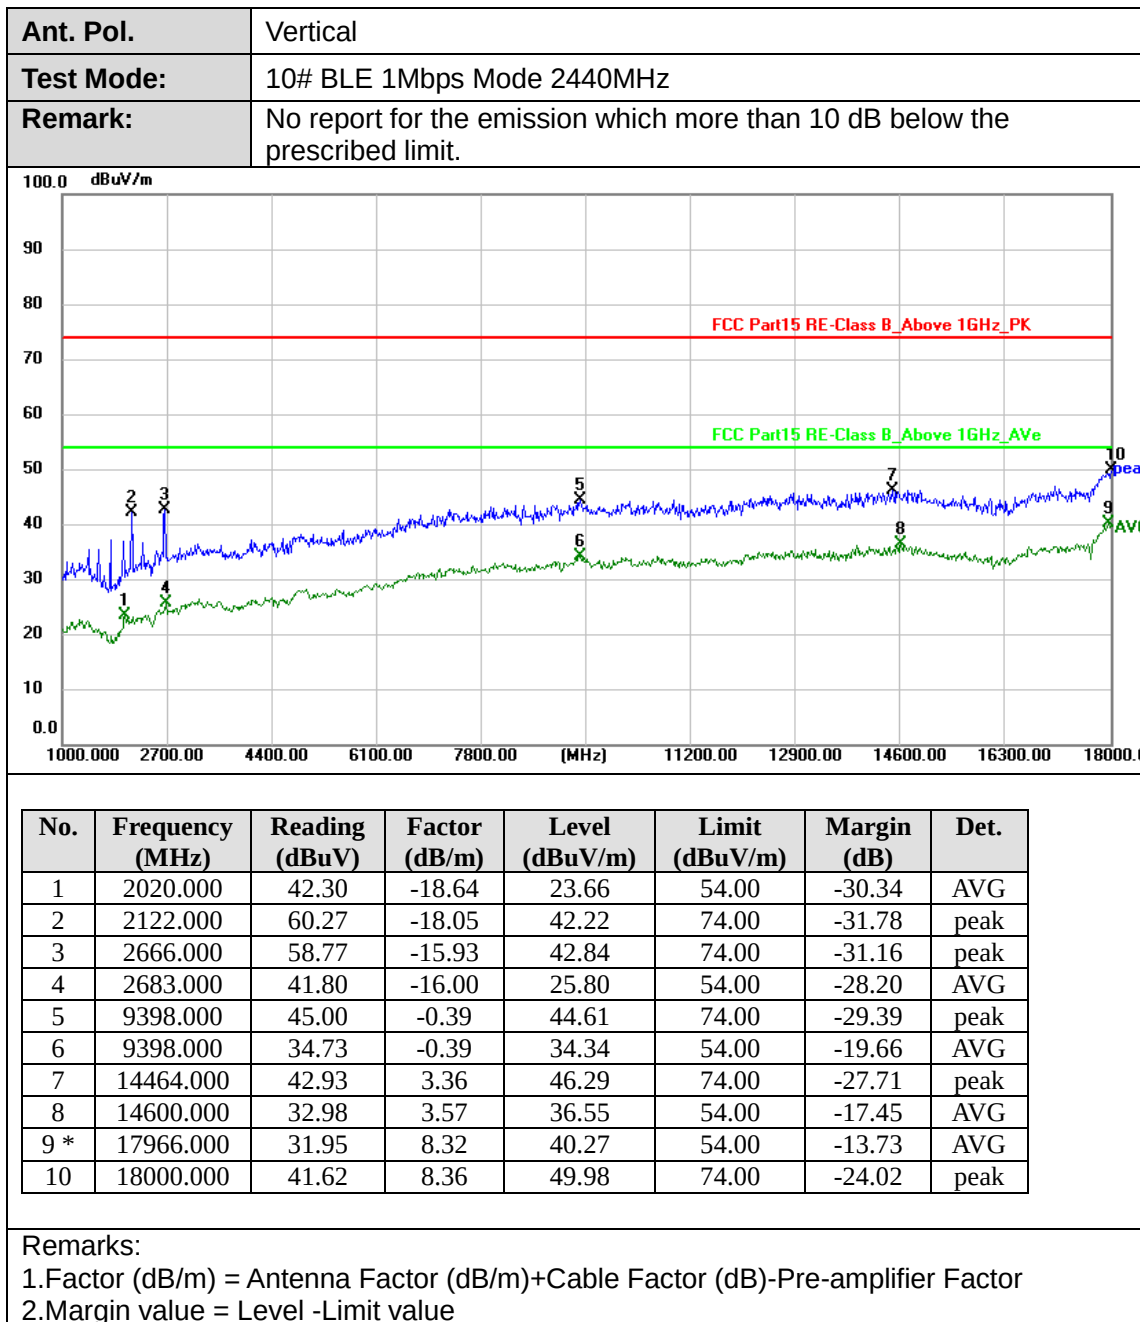




Ant. Pol.	Horizontal
Test Mode:	10# BLE 1Mbps Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

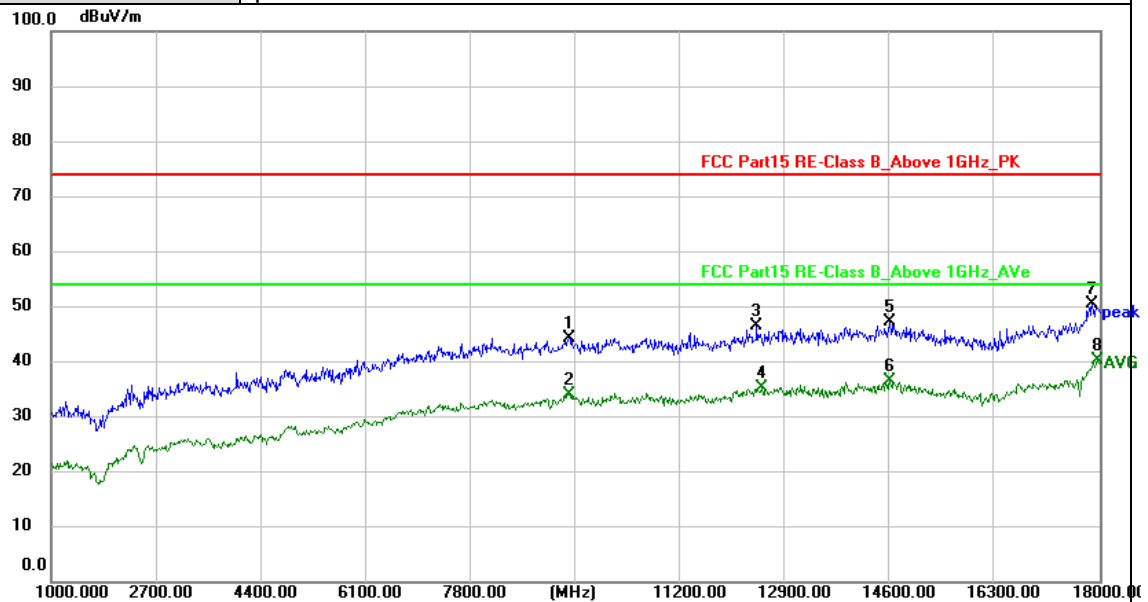

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	9398.000	44.67	-0.39	44.28	74.00	-29.72	peak
2	9398.000	34.47	-0.39	34.08	54.00	-19.92	AVG
3	12441.000	45.66	0.77	46.43	74.00	-27.57	peak
4	12526.000	34.39	0.80	35.19	54.00	-18.81	AVG
5	14600.000	43.60	3.57	47.17	74.00	-26.83	peak
6	14600.000	32.89	3.57	36.46	54.00	-17.54	AVG
7	17881.000	42.59	8.01	50.60	74.00	-23.40	peak
8 *	17966.000	31.87	8.32	40.19	54.00	-13.81	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

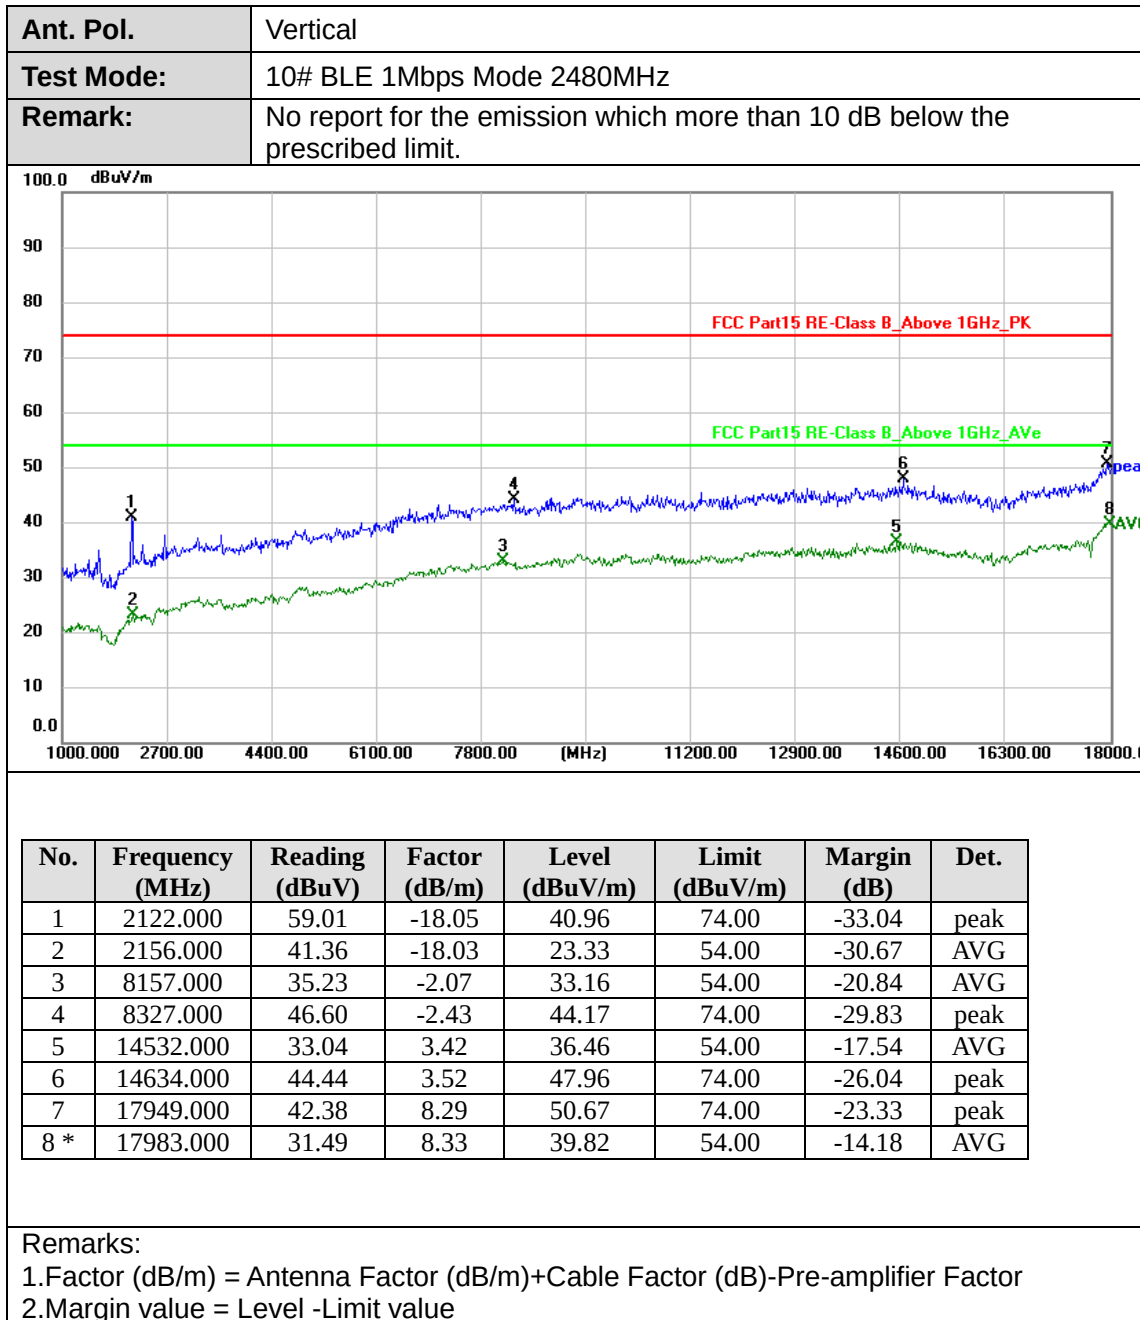




Ant. Pol.	Horizontal
Test Mode:	10# BLE 2Mbps Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

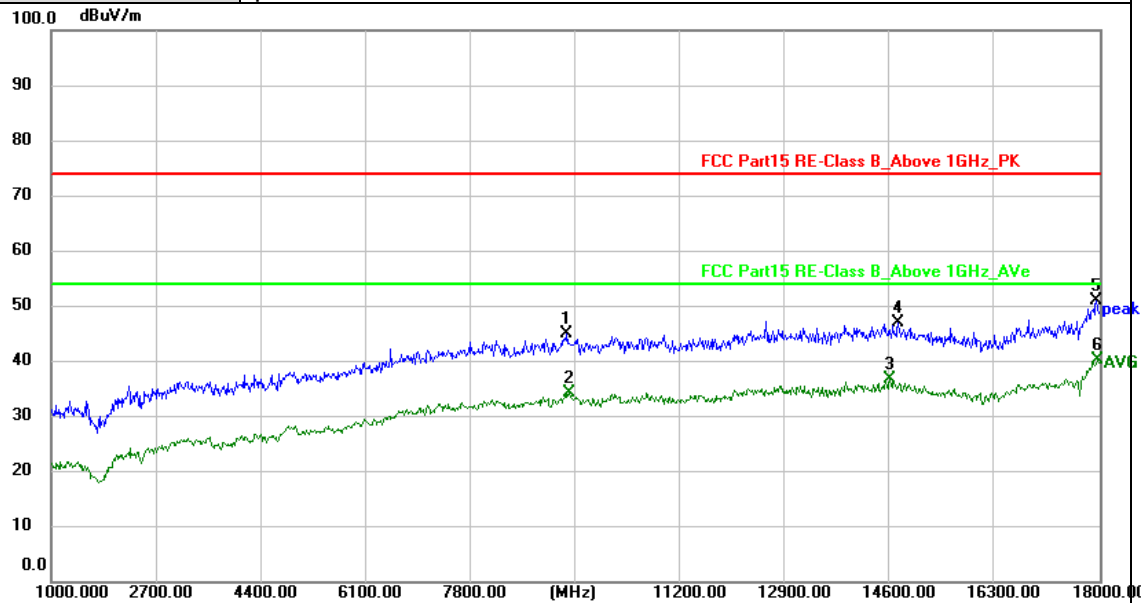

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	9364.000	45.83	-0.76	45.07	74.00	-28.93	peak
2	9398.000	34.58	-0.39	34.19	54.00	-19.81	AVG
3	14600.000	33.10	3.57	36.67	54.00	-17.33	AVG
4	14736.000	43.79	3.27	47.06	74.00	-26.94	peak
5	17949.000	42.64	8.29	50.93	74.00	-23.07	peak
6 *	17966.000	31.98	8.32	40.30	54.00	-13.70	AVG


Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value

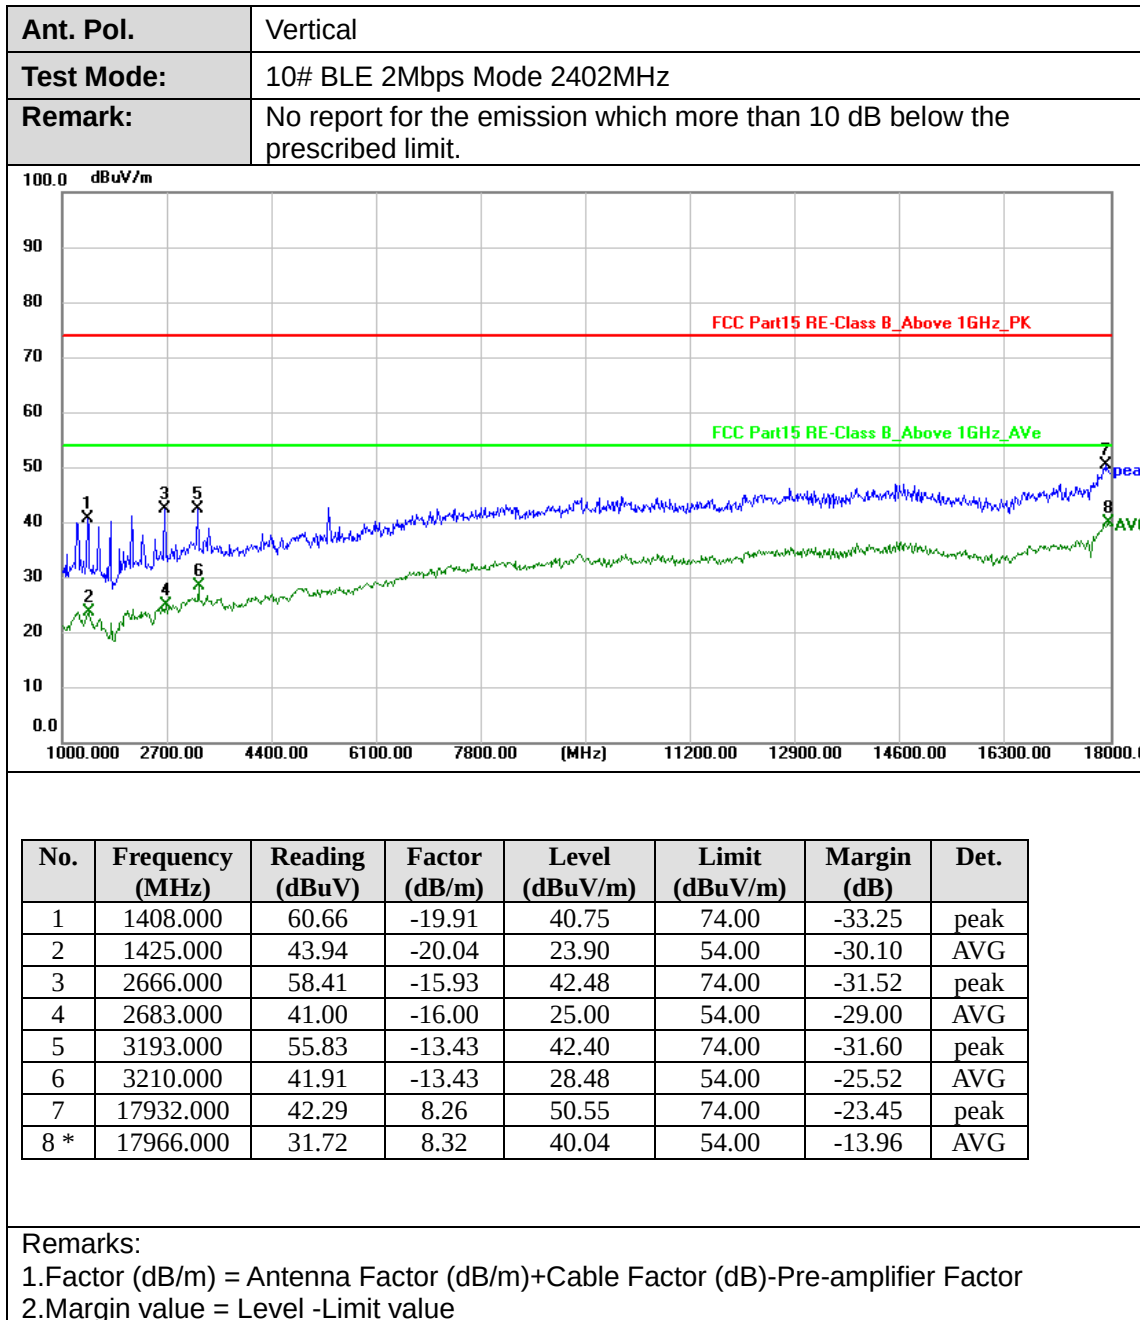



Ant. Pol.	Horizontal
Test Mode:	10# BLE 2Mbps Mode 2440MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

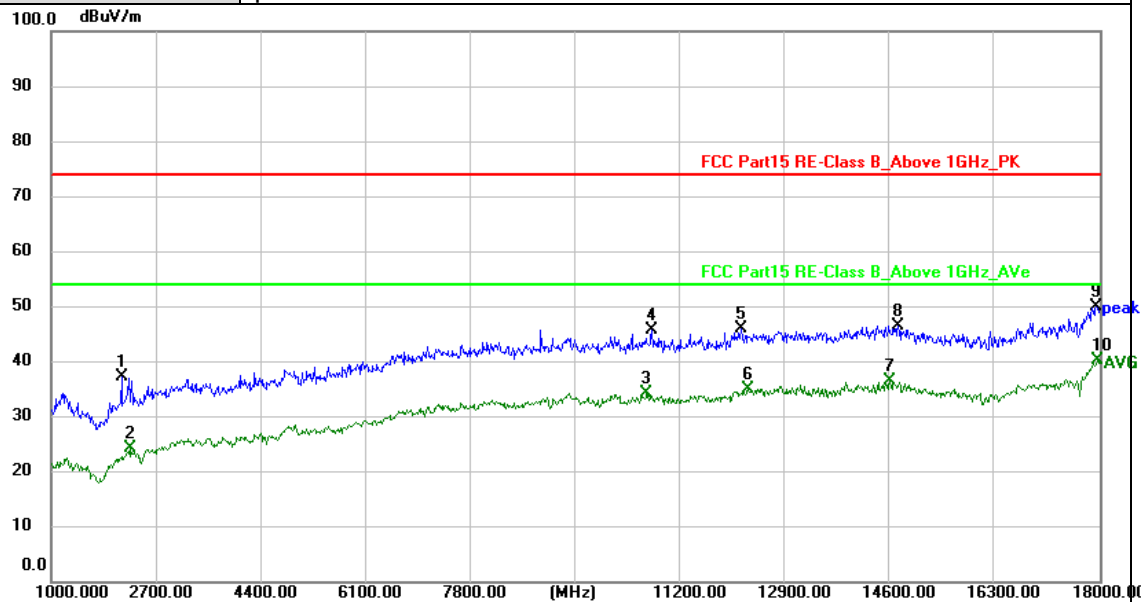


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2139.000	55.31	-18.08	37.23	74.00	-36.77	peak
2	2275.000	41.69	-17.44	24.25	54.00	-29.75	AVG
3	10656.000	34.19	0.04	34.23	54.00	-19.77	AVG
4	10741.000	45.84	-0.04	45.80	74.00	-28.20	peak
5	12186.000	45.66	0.26	45.92	74.00	-28.08	peak
6	12305.000	34.12	0.91	35.03	54.00	-18.97	AVG
7	14600.000	33.01	3.57	36.58	54.00	-17.42	AVG
8	14736.000	43.36	3.27	46.63	74.00	-27.37	peak
9	17949.000	41.76	8.29	50.05	74.00	-23.95	peak
10 *	17966.000	31.96	8.32	40.28	54.00	-13.72	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	10# BLE 2Mbps Mode 2440MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

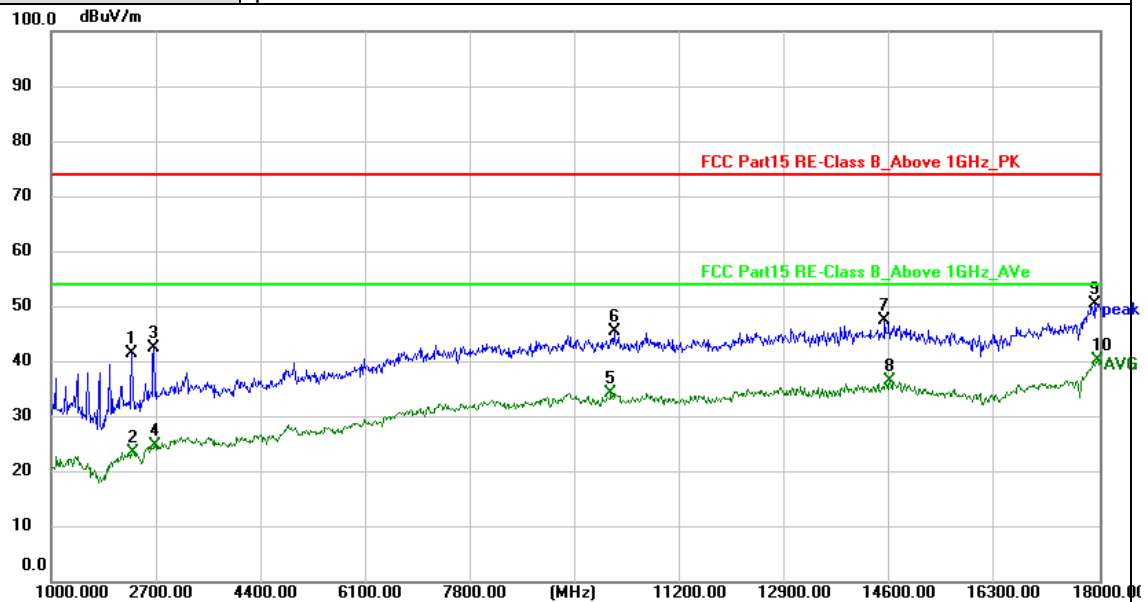


No.	Frequen cy (MHz)	Readin g (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2309.000	58.89	-17.42	41.47	74.00	-32.53	peak
2	2326.000	41.13	-17.44	23.69	54.00	-30.31	AVG
3	2666.000	58.49	-15.93	42.56	74.00	-31.44	peak
4	2683.000	40.75	-16.00	24.75	54.00	-29.25	AVG
5	10078.000	34.43	-0.21	34.22	54.00	-19.78	AVG
6	10129.000	45.63	-0.16	45.47	74.00	-28.53	peak
7	14515.000	44.02	3.37	47.39	74.00	-26.61	peak
8	14600.000	32.87	3.57	36.44	54.00	-17.56	AVG
9	17932.000	42.25	8.26	50.51	74.00	-23.49	peak
10 *	17966.000	32.05	8.32	40.37	54.00	-13.63	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value




Ant. Pol.	Horizontal
Test Mode:	10# BLE 2Mbps Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

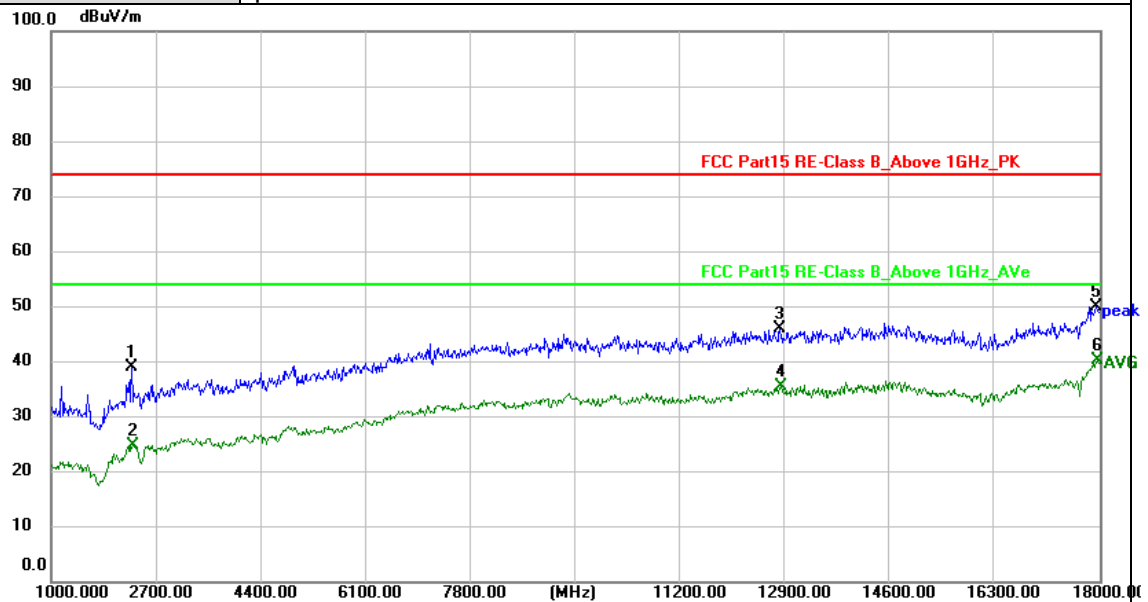

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2309.000	56.50	-17.42	39.08	74.00	-34.92	peak
2	2326.000	42.25	-17.44	24.81	54.00	-29.19	AVG
3	12815.000	44.45	1.48	45.93	74.00	-28.07	peak
4	12832.000	33.98	1.47	35.45	54.00	-18.55	AVG
5	17949.000	41.72	8.29	50.01	74.00	-23.99	peak
6 *	17966.000	31.92	8.32	40.24	54.00	-13.76	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

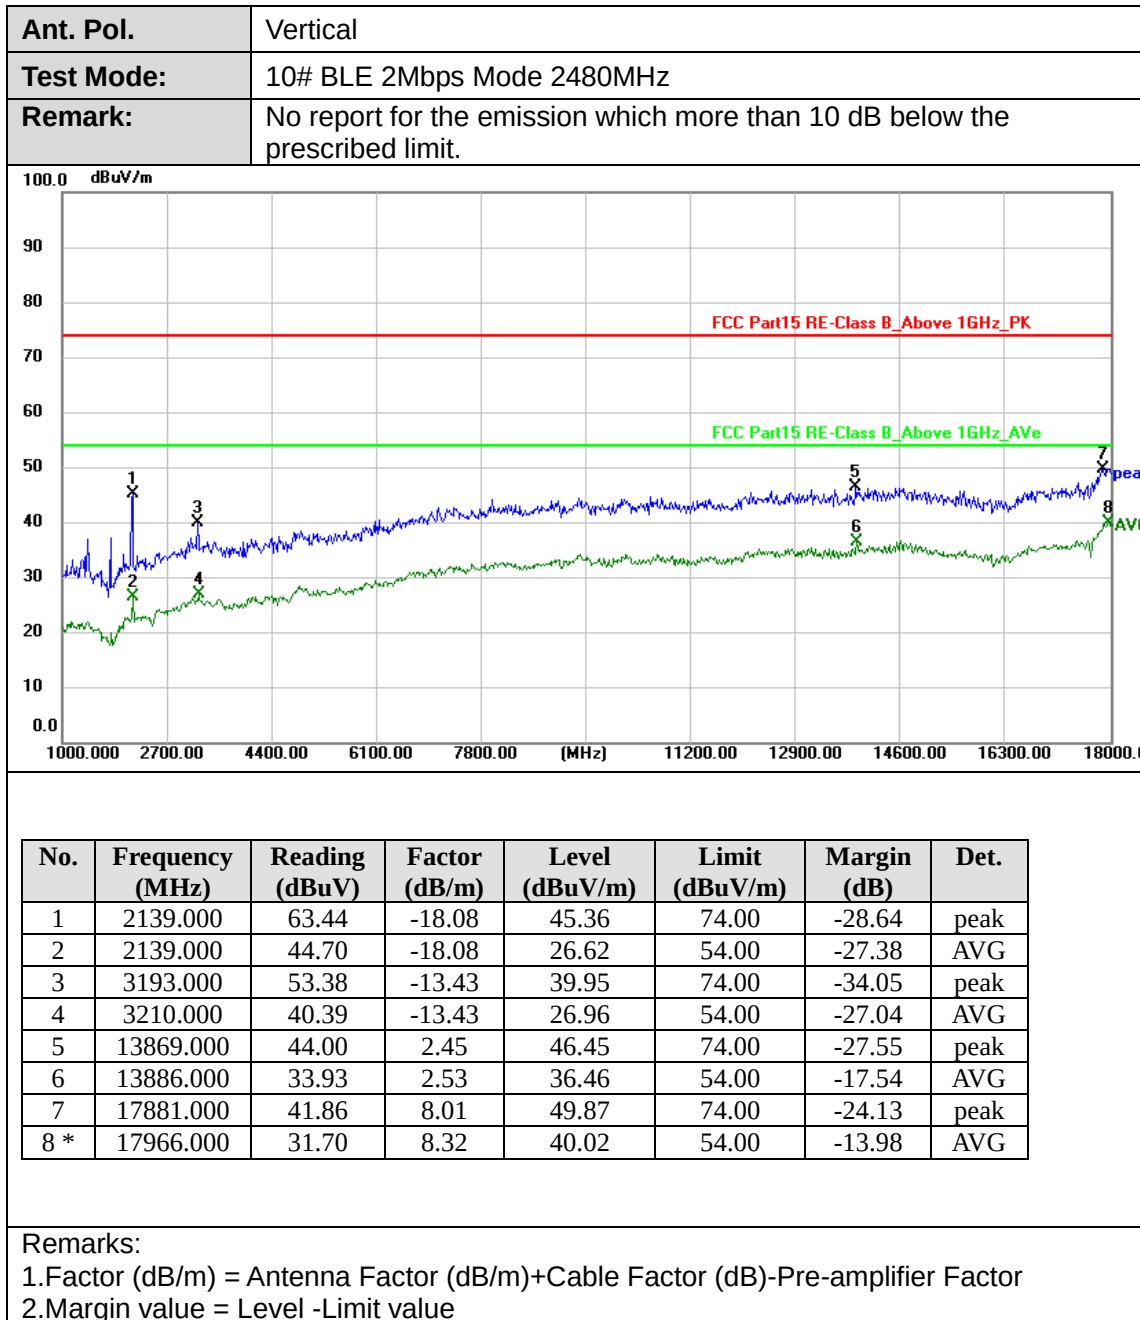




Ant. Pol.	Horizontal
Test Mode:	11# BLE 1Mbps Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

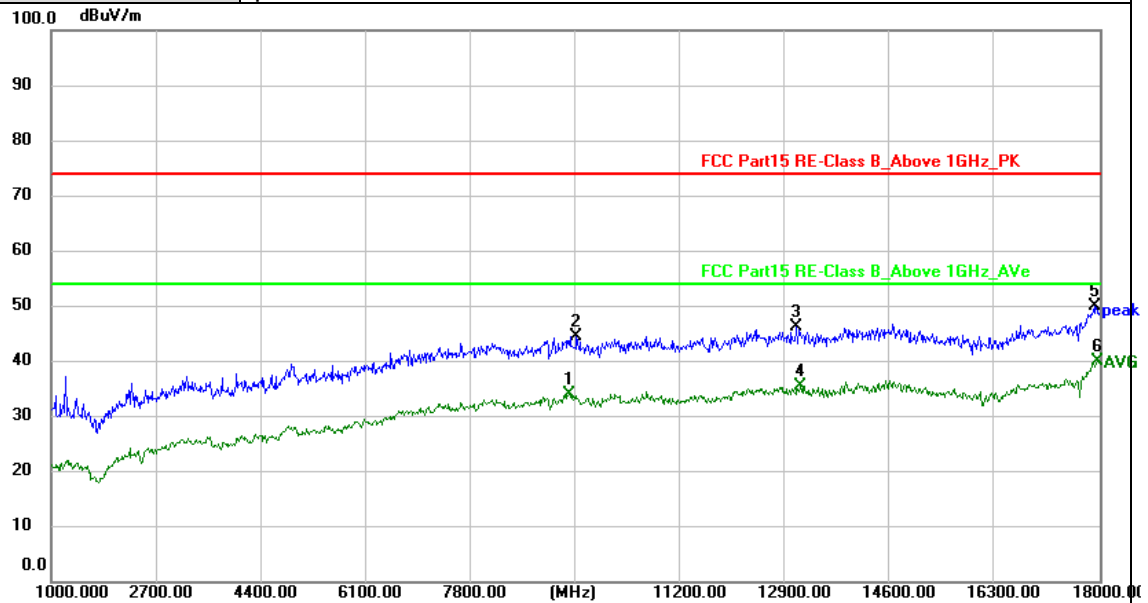


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	9398.000	34.46	-0.39	34.07	54.00	-19.93	AVG
2	9517.000	45.08	-0.63	44.45	74.00	-29.55	peak
3	13087.000	44.49	1.89	46.38	74.00	-27.62	peak
4	13155.000	33.62	2.00	35.62	54.00	-18.38	AVG
5	17915.000	41.86	8.23	50.09	74.00	-23.91	peak
6 *	17966.000	31.82	8.32	40.14	54.00	-13.86	AVG

Remarks:


- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value

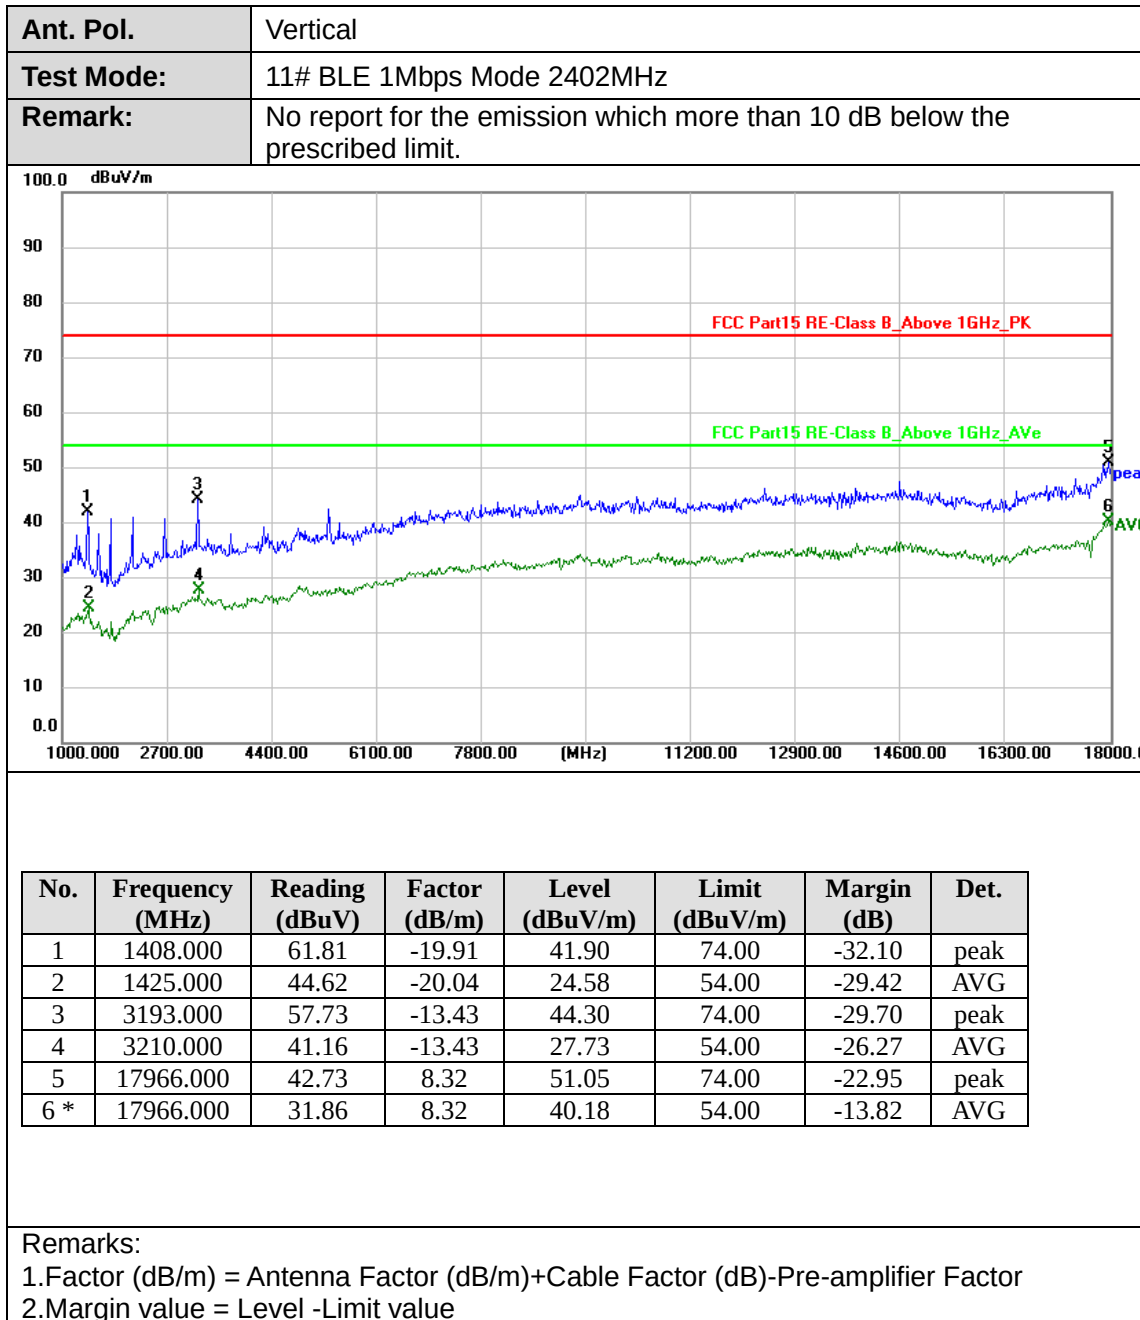

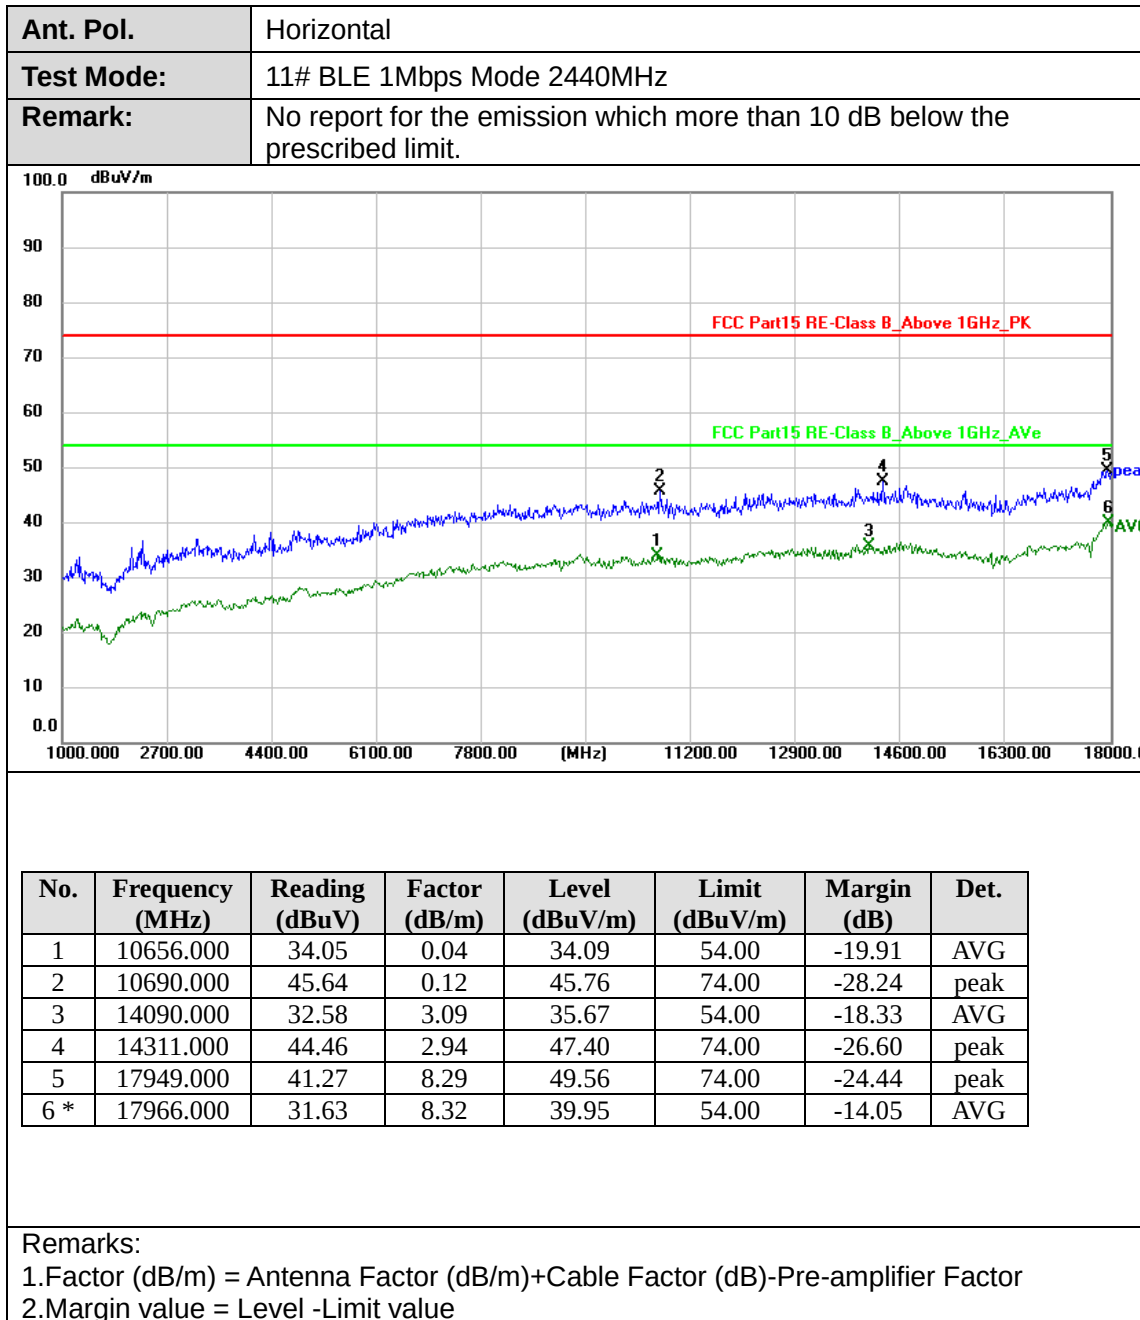



Ant. Pol.	Vertical
Test Mode:	11# BLE 1Mbps Mode 2440MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

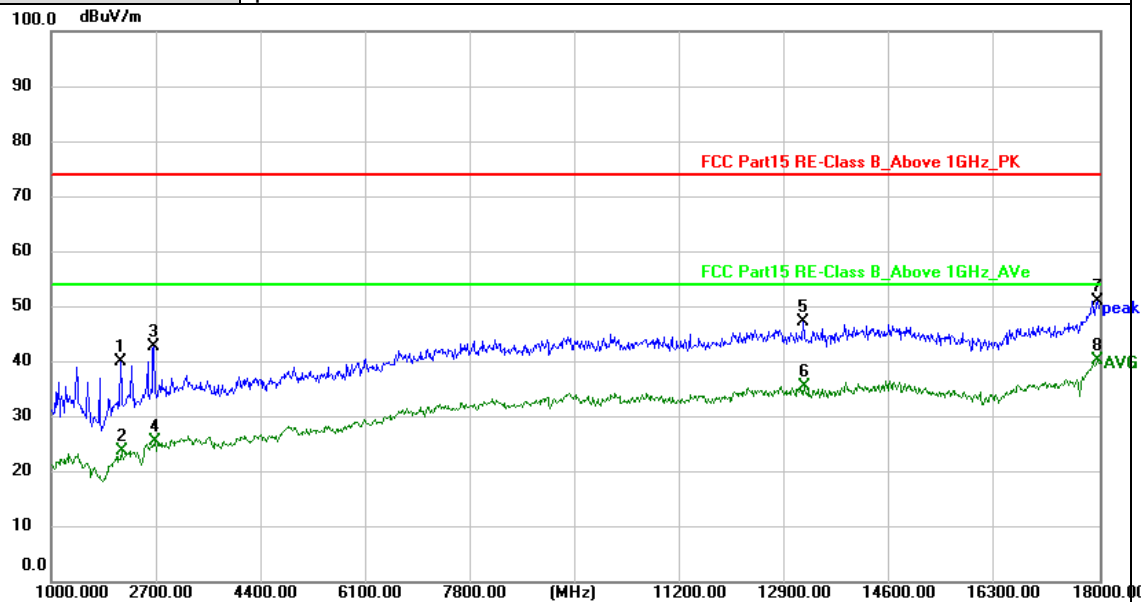


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2122.000	58.03	-18.05	39.98	74.00	-34.02	peak
2	2139.000	41.97	-18.08	23.89	54.00	-30.11	AVG
3	2666.000	58.63	-15.93	42.70	74.00	-31.30	peak
4	2683.000	41.47	-16.00	25.47	54.00	-28.53	AVG
5	13189.000	45.20	2.03	47.23	74.00	-26.77	peak
6	13206.000	33.54	1.99	35.53	54.00	-18.47	AVG
7	17966.000	42.68	8.32	51.00	74.00	-23.00	peak
8 *	17966.000	31.85	8.32	40.17	54.00	-13.83	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value




Ant. Pol.	Horizontal
Test Mode:	11# BLE 1Mbps Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

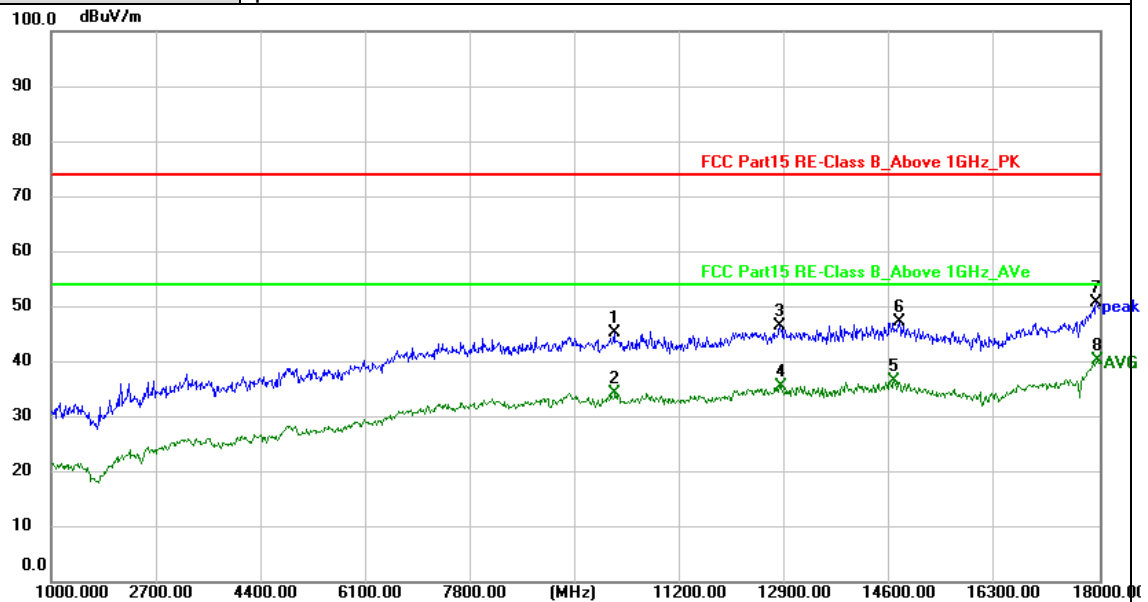

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	10129.000	45.38	-0.16	45.22	74.00	-28.78	peak
2	10146.000	34.37	-0.20	34.17	54.00	-19.83	AVG
3	12815.000	44.91	1.48	46.39	74.00	-27.61	peak
4	12832.000	34.06	1.47	35.53	54.00	-18.47	AVG
5	14668.000	33.00	3.45	36.45	54.00	-17.55	AVG
6	14753.000	43.94	3.21	47.15	74.00	-26.85	peak
7	17949.000	42.34	8.29	50.63	74.00	-23.37	peak
8 *	17966.000	32.06	8.32	40.38	54.00	-13.62	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

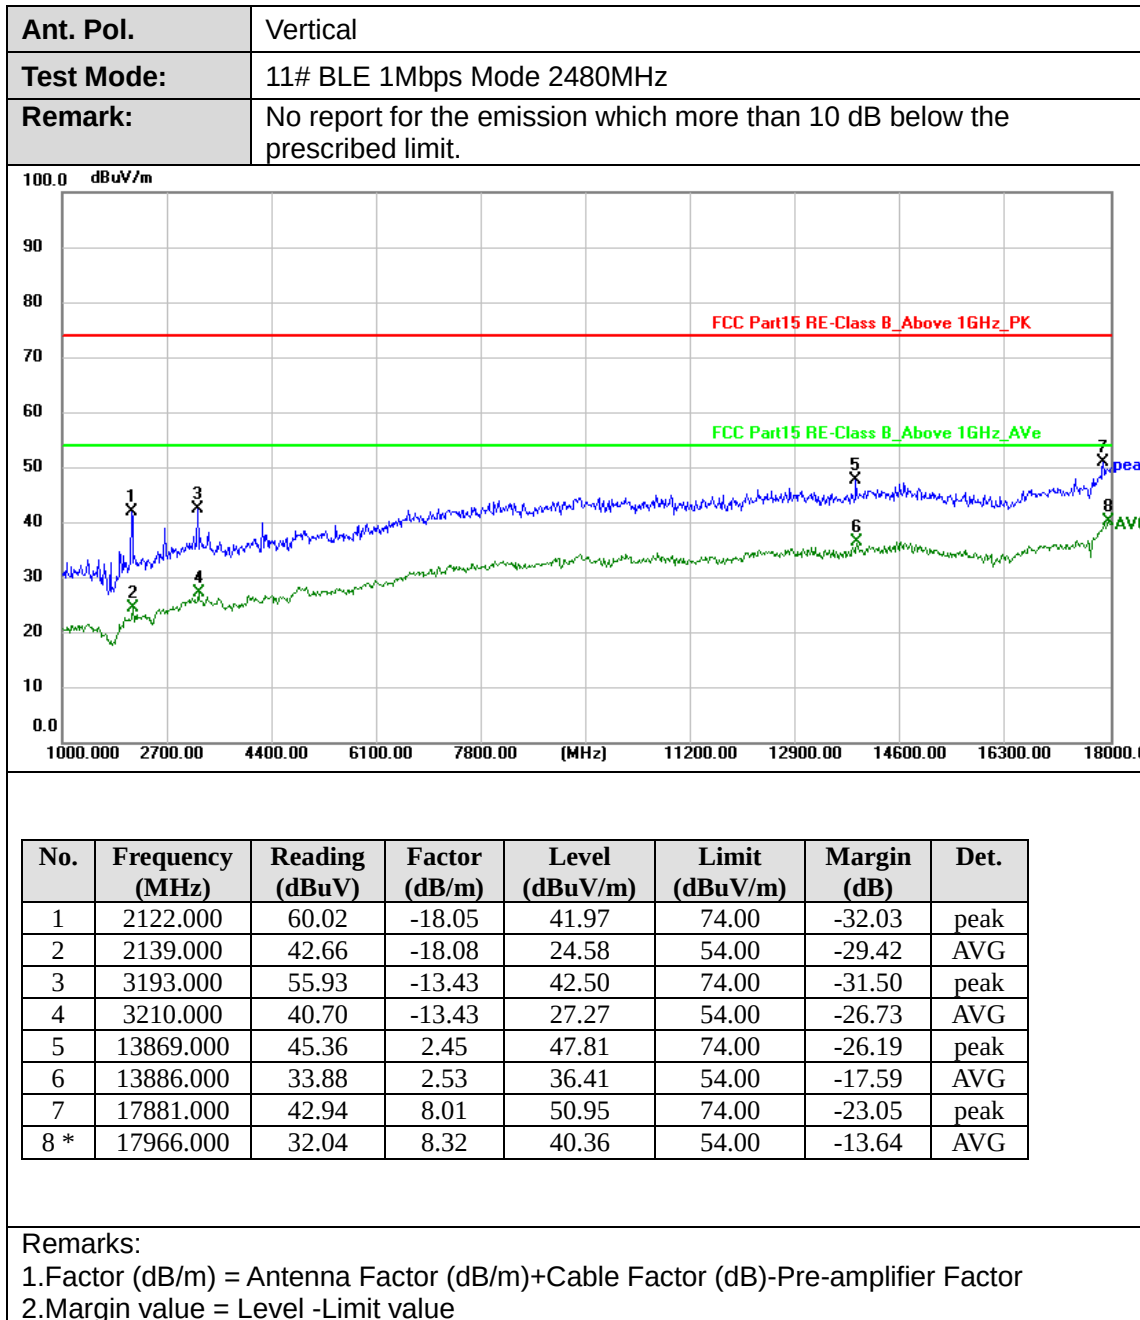



Ant. Pol.	Horizontal
Test Mode:	11# BLE 2Mbps Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

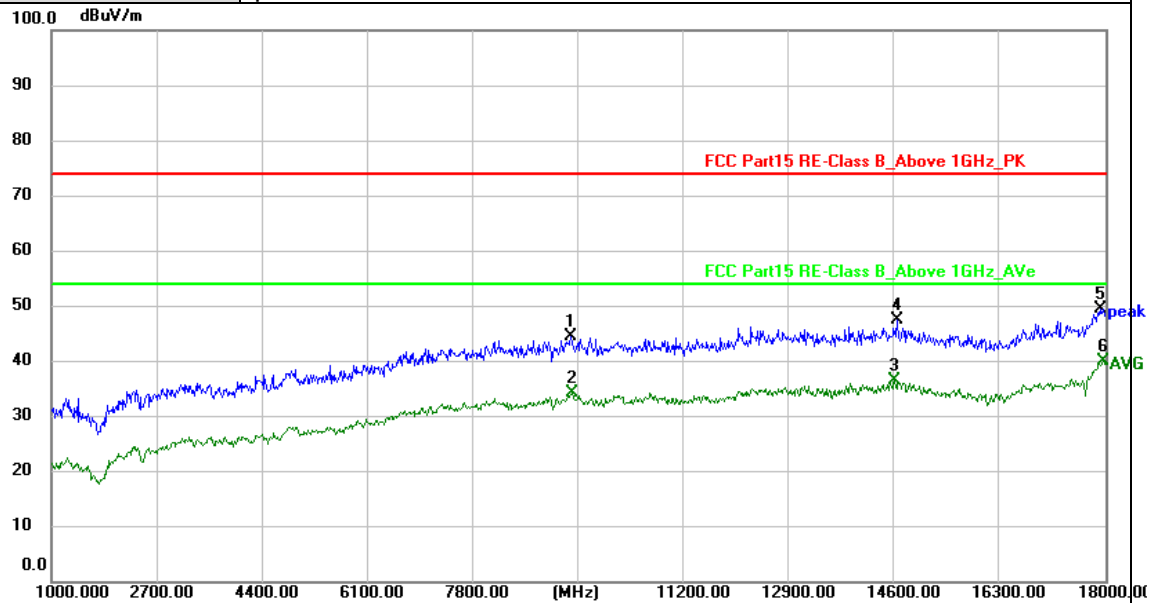


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1442.000	44.02	-20.17	23.85	54.00	-30.15	AVG
2	1595.000	62.71	-19.74	42.97	74.00	-31.03	peak
3	3193.000	58.75	-13.43	45.32	74.00	-28.68	peak
4	3210.000	41.96	-13.43	28.53	54.00	-25.47	AVG
5	17949.000	41.84	8.29	50.13	74.00	-23.87	peak
6 *	17966.000	31.79	8.32	40.11	54.00	-13.89	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant. Pol.	Vertical
Test Mode:	11# BLE 2Mbps Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

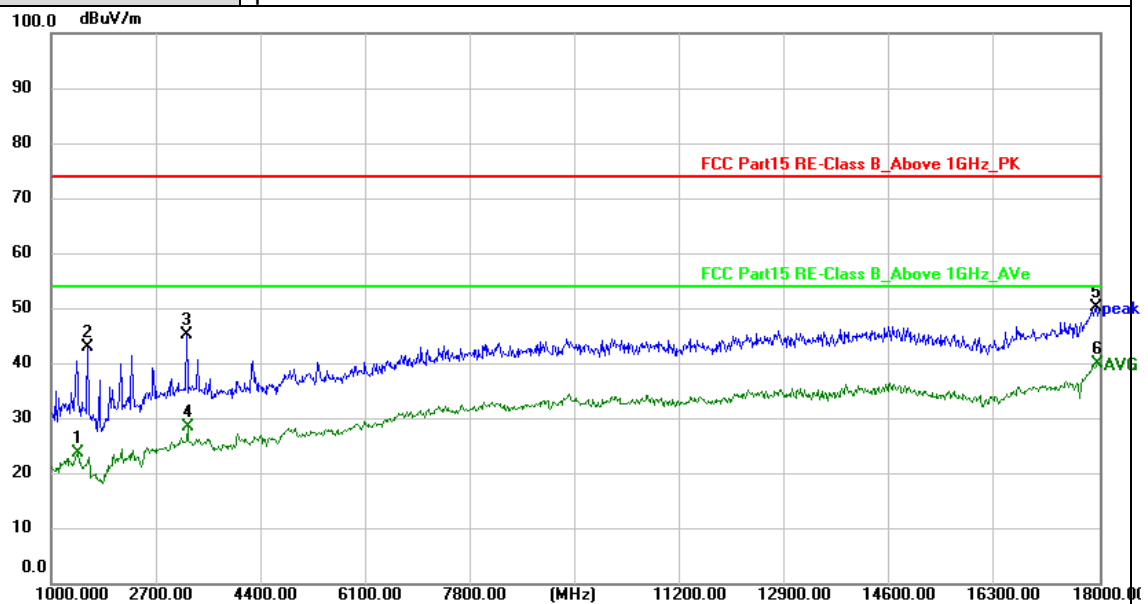


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	9381.000	44.97	-0.57	44.40	74.00	-29.60	peak
2	9398.000	34.58	-0.39	34.19	54.00	-19.81	AVG
3	14600.000	32.88	3.57	36.45	54.00	-17.55	AVG
4	14634.000	44.03	3.52	47.55	74.00	-26.45	peak
5	17915.000	41.38	8.23	49.61	74.00	-24.39	peak
6 *	17966.000	31.78	8.32	40.10	54.00	-13.90	AVG

Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

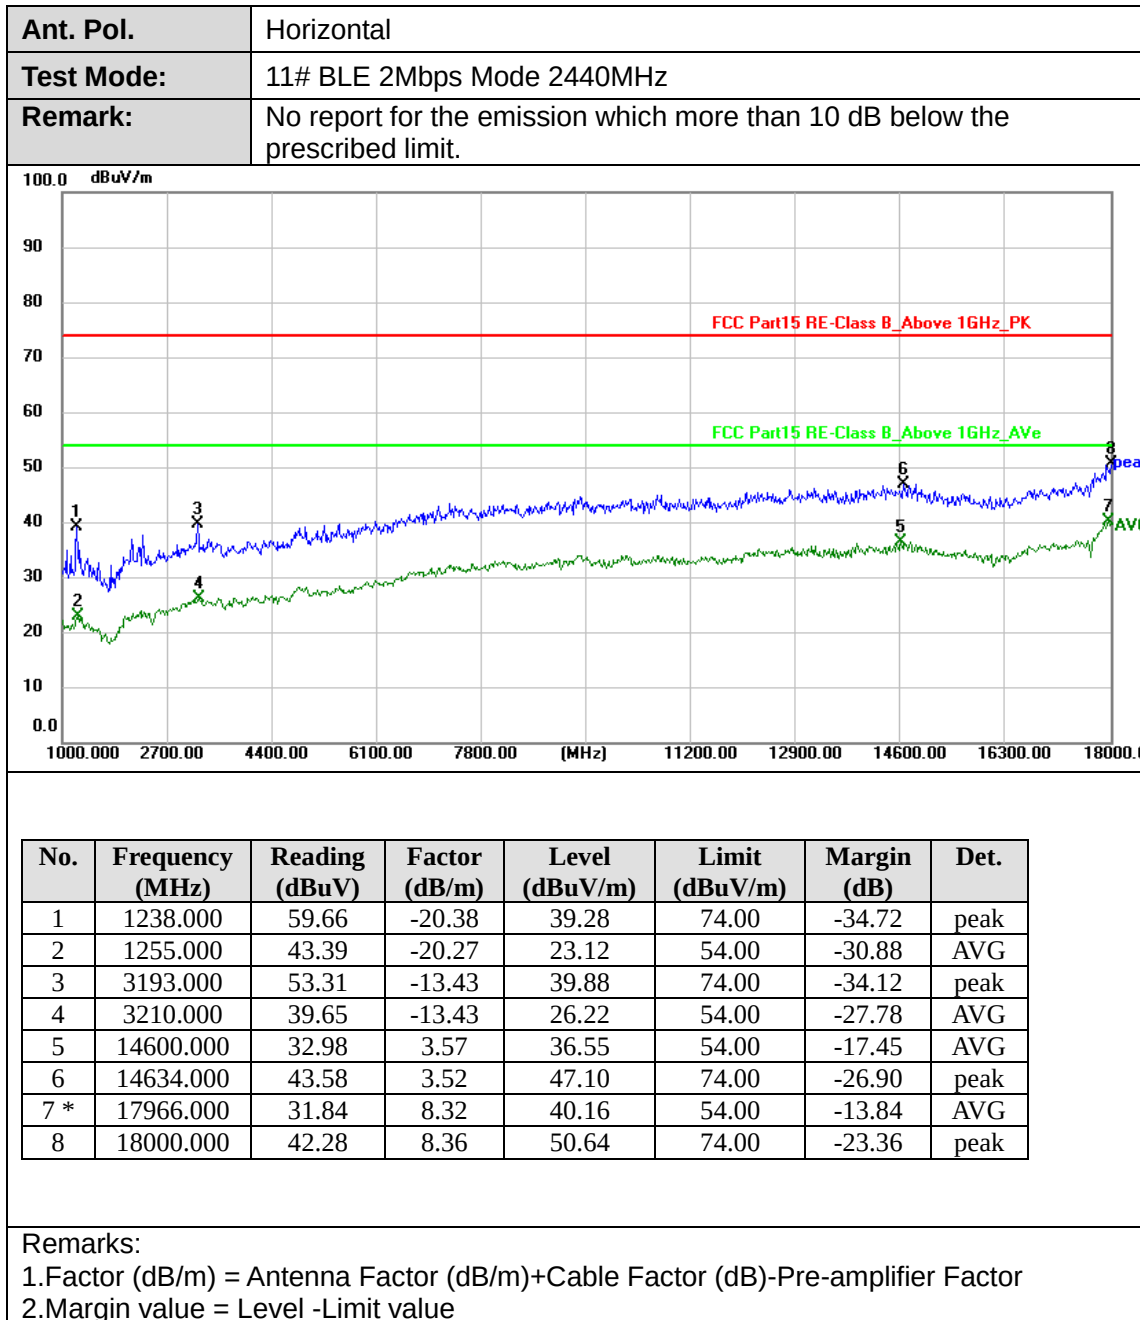



Ant. Pol.	Vertical
Test Mode:	11# BLE 2Mbps Mode 2440MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

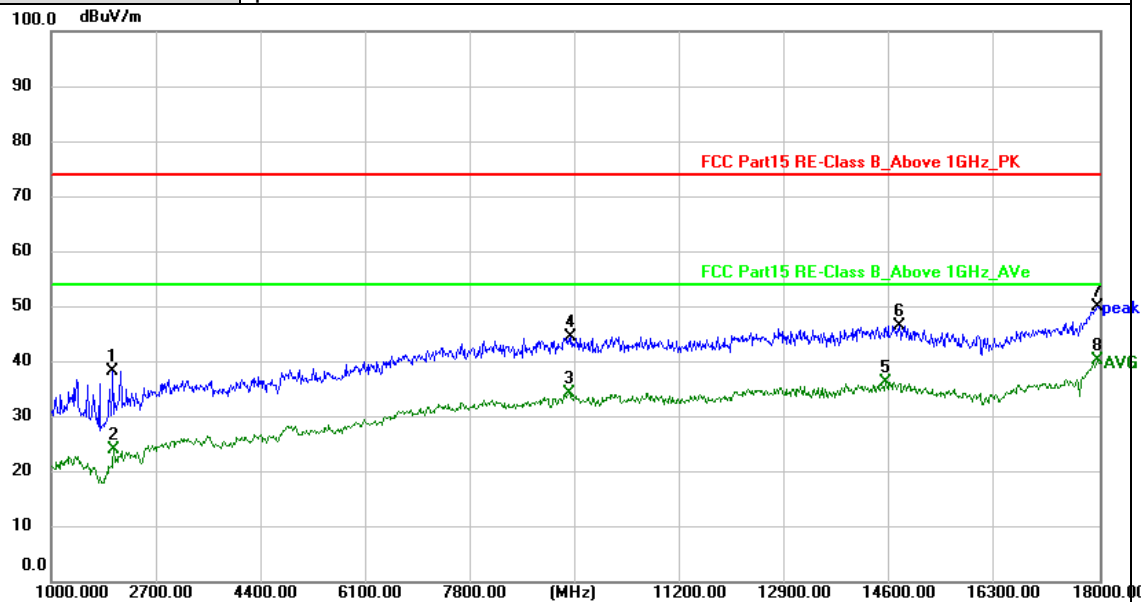


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2003.000	57.30	-18.96	38.34	74.00	-35.66	peak
2	2020.000	42.76	-18.64	24.12	54.00	-29.88	AVG
3	9398.000	34.66	-0.39	34.27	54.00	-19.73	AVG
4	9432.000	45.46	-0.92	44.54	74.00	-29.46	peak
5	14532.000	32.93	3.42	36.35	54.00	-17.65	AVG
6	14753.000	43.34	3.21	46.55	74.00	-27.45	peak
7	17966.000	41.77	8.32	50.09	74.00	-23.91	peak
8 *	17966.000	31.83	8.32	40.15	54.00	-13.85	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value




Ant. Pol.	Horizontal
Test Mode:	11# BLE 2Mbps Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

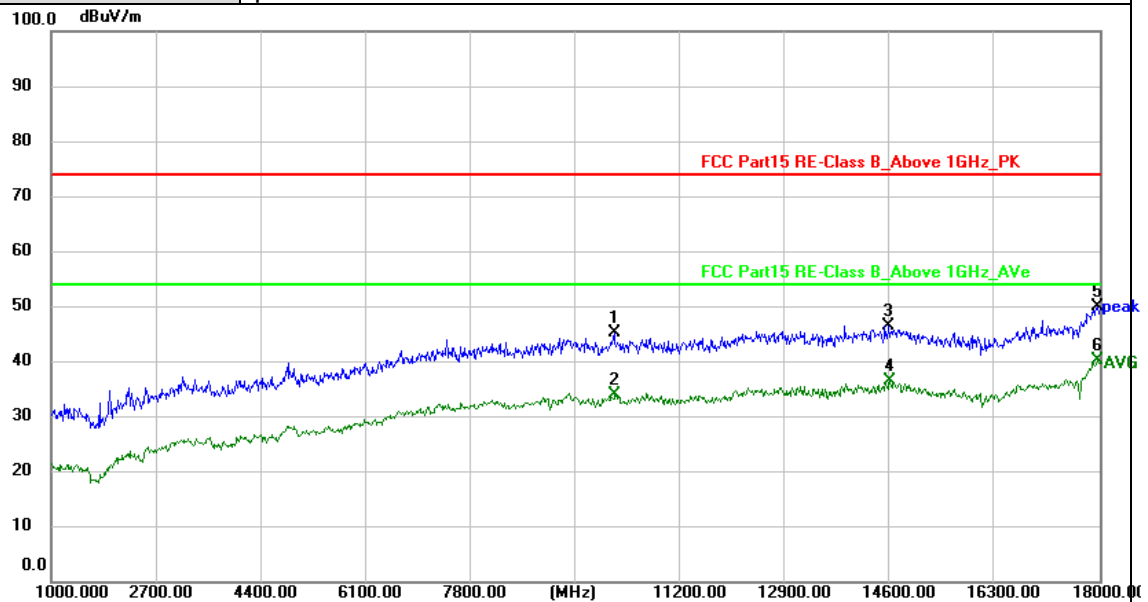

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	10129.000	45.49	-0.16	45.33	74.00	-28.67	peak
2	10146.000	34.17	-0.20	33.97	54.00	-20.03	AVG
3	14583.000	43.06	3.53	46.59	74.00	-27.41	peak
4	14600.000	33.06	3.57	36.63	54.00	-17.37	AVG
5	17966.000	41.68	8.32	50.00	74.00	-24.00	peak
6 *	17966.000	31.96	8.32	40.28	54.00	-13.72	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

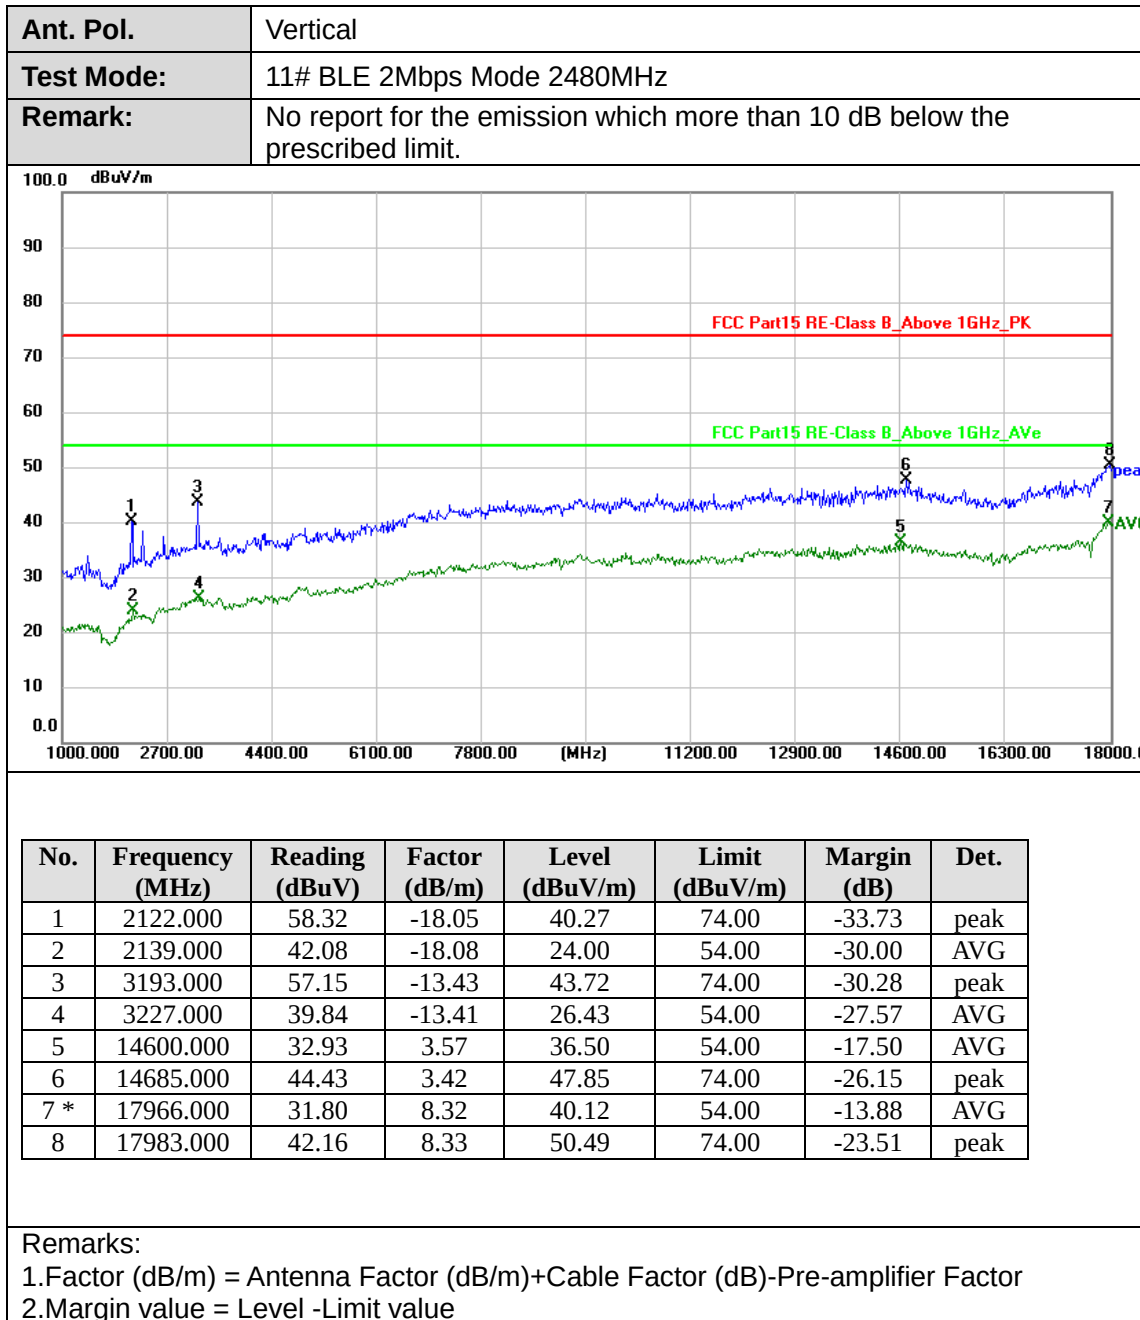



Ant. Pol.	Horizontal
Test Mode:	12# BLE 1Mbps Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

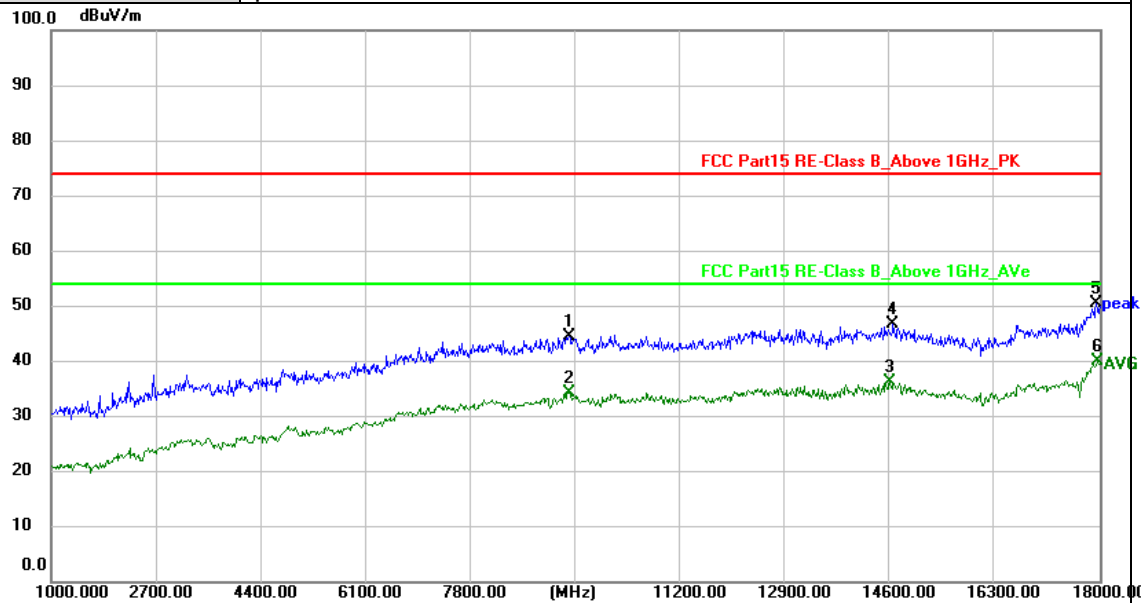

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	9398.000	44.92	-0.39	44.53	74.00	-29.47	peak
2	9398.000	34.80	-0.39	34.41	54.00	-19.59	AVG
3	14600.000	32.77	3.57	36.34	54.00	-17.66	AVG
4	14651.000	43.20	3.49	46.69	74.00	-27.31	peak
5	17949.000	42.31	8.29	50.60	74.00	-23.40	peak
6 *	17966.000	31.61	8.32	39.93	54.00	-14.07	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value

