

Antenna Specification for Approval

Manufacturer : Dongzhen Electronics Factory, Longhu District, Shantou City

Company address: Building 2, Upper Lane 1, Jinfeng North Street, Jinfeng Neighborhood Committee, Xinjin Street, Longhu District, Shantou City

Customer Name: _____

Product Name: 2.4G antenna


PRODUCT MODEL: 19PIN*0.12*1.4PVC

Write By: Mr. zhou

Issued Date: 2025-7-2

This Specifications is received

SIGN: 王悦波




Yuebo wang

2025/07/1

DATE:

July 1, 2025

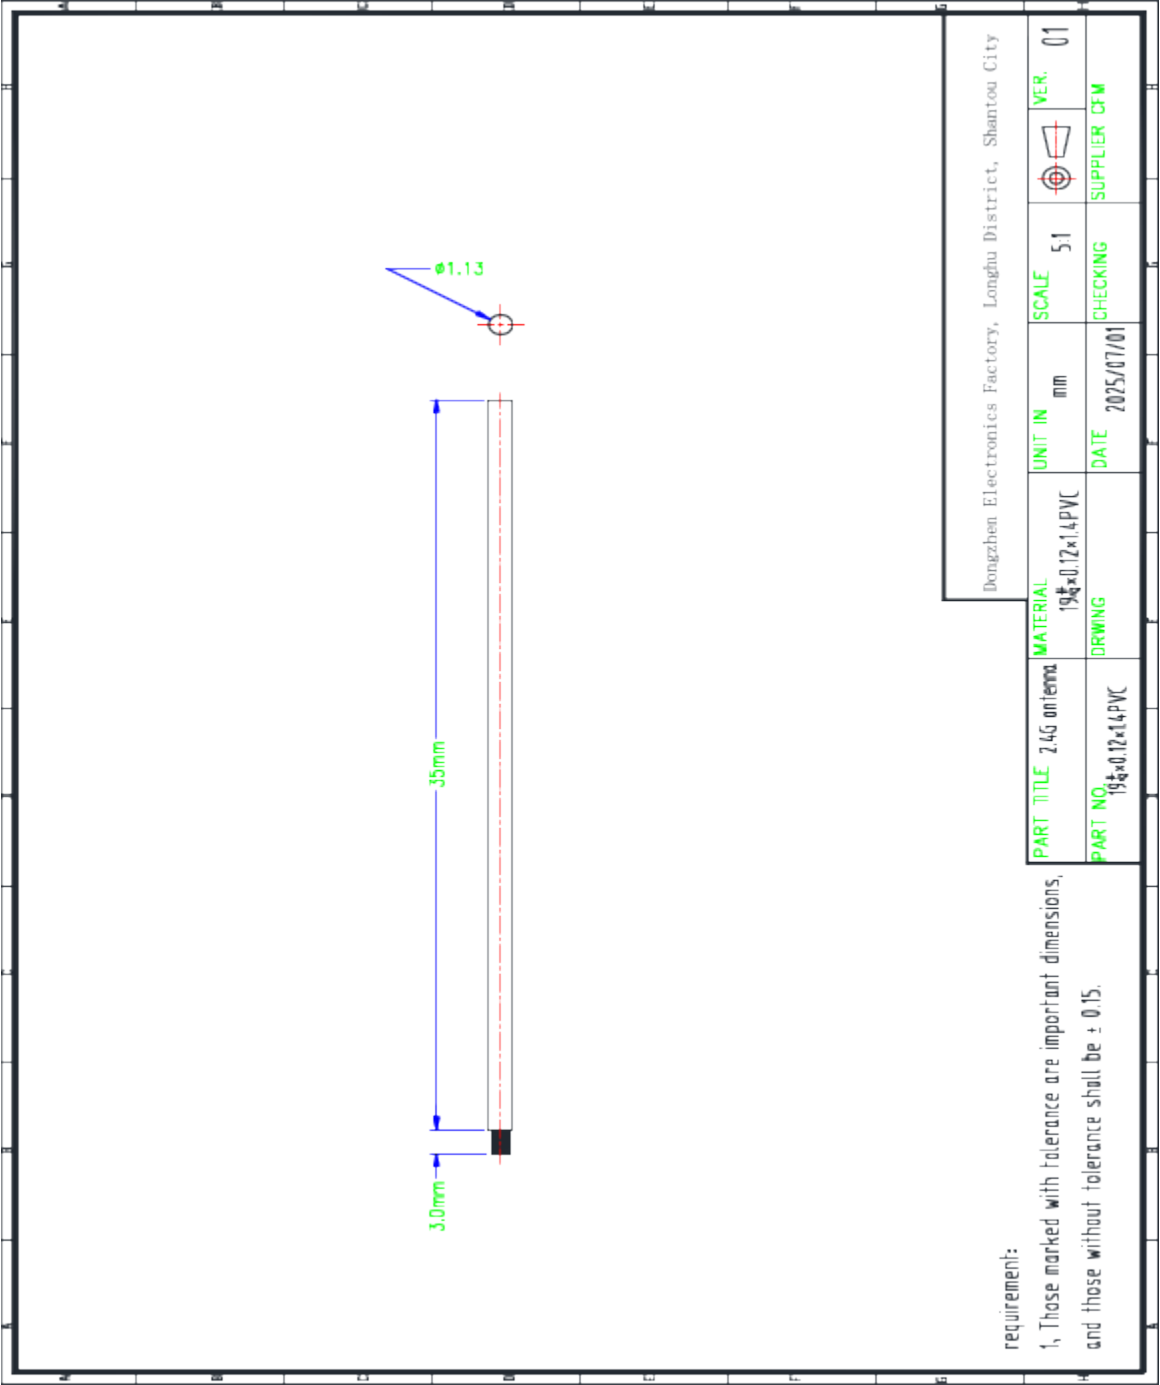



Product Specification

A. Electrical Characteristics

Frequency: 2400MHz ~2500MHz

VSWR: <3.0

Efficiency: >20%

Impedance: 50 Ohm

Gain: 0Dbiv

Antenna type: Internal Antenna

Polarization mode: linear polarization

B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.13 white

Connector Type : NO

Dimension

C. Environmental

Operation Temperature - 30 °C ~ + 80 °C

Storage Temperature - 30 °C ~ + 85 °C

Test Equipment & Conditions


1. Network Analyzers :

Agilent 8753D 5071B

2. Communications Test Set:

Agilent E5515C


3 . 3D Chamber Test System

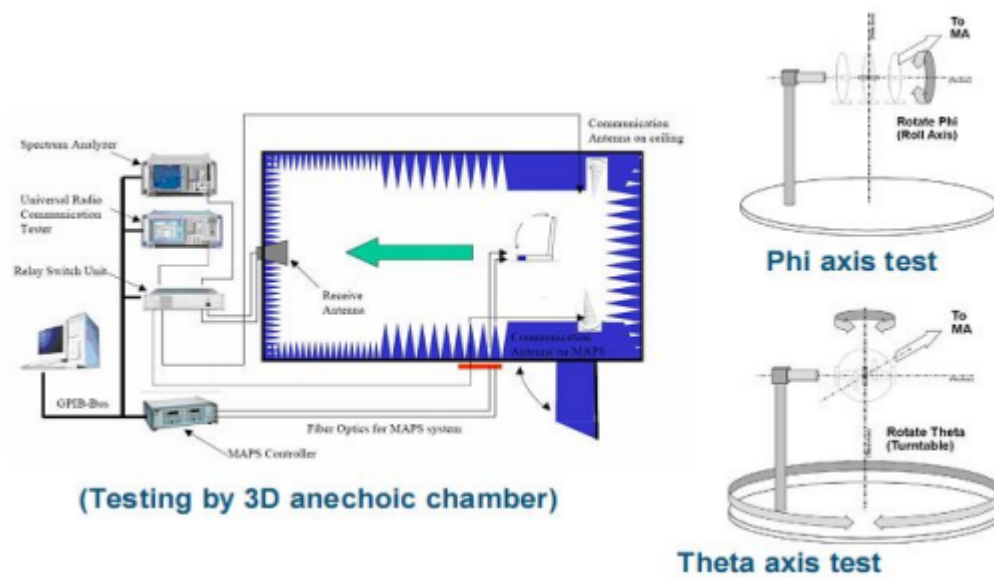


Efficiency & Gain

Freq (MHz)	Effi (%)	Gain (dBi)
2400	23.66	-1.03
2450	20.24	-0.00
2500	25.73	-0.46


Radiation Pattern

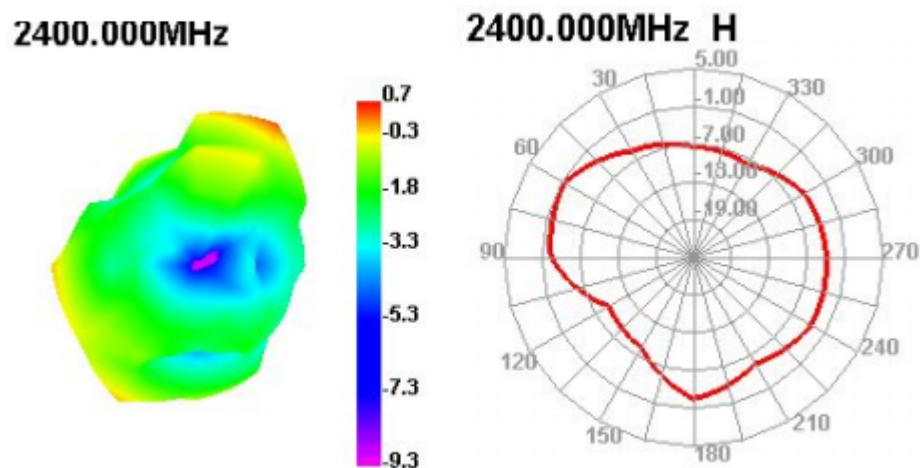


2400.000MHz E1

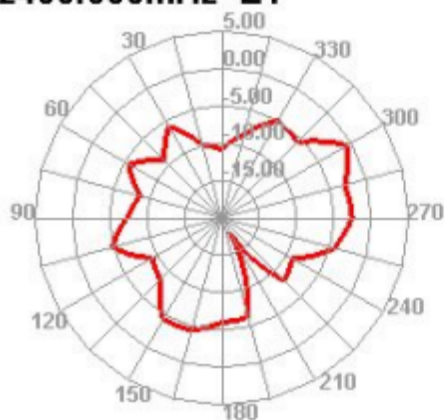


2400.000MHz E2

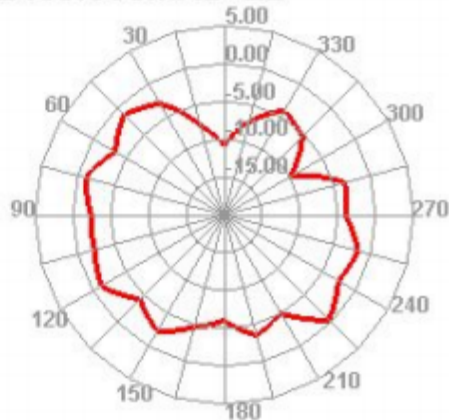


2450.000MHz

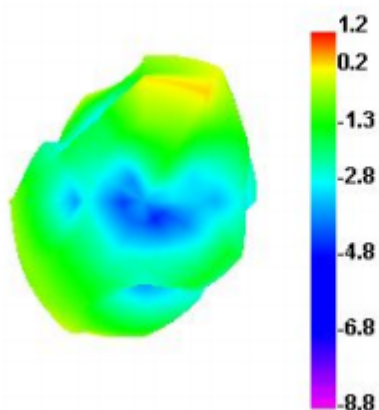


2450.000MHz H

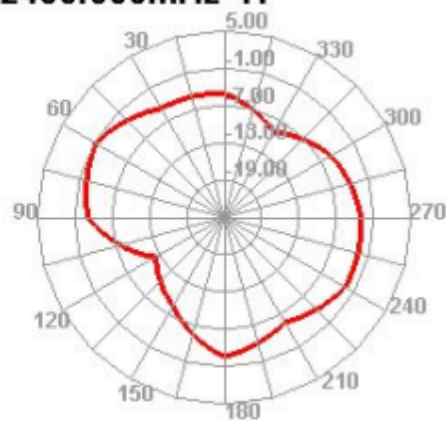


2450.000MHz E1

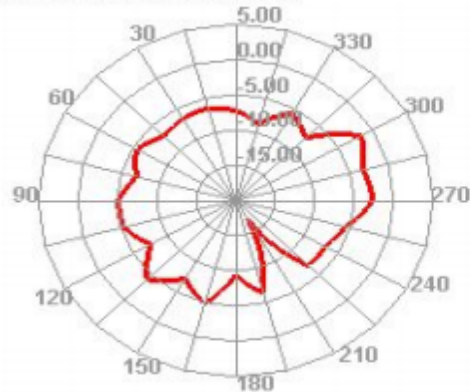


2450.000MHz E2

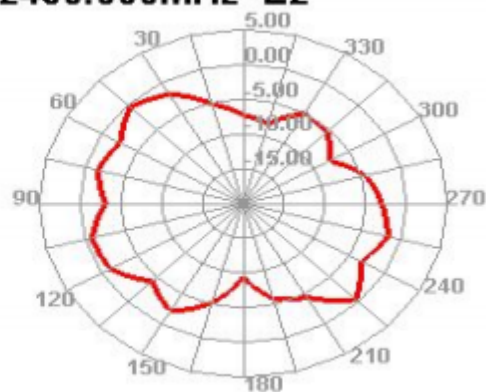


2500.000MHz

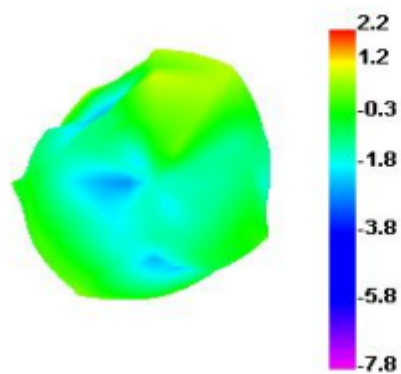

2500.000MHz H

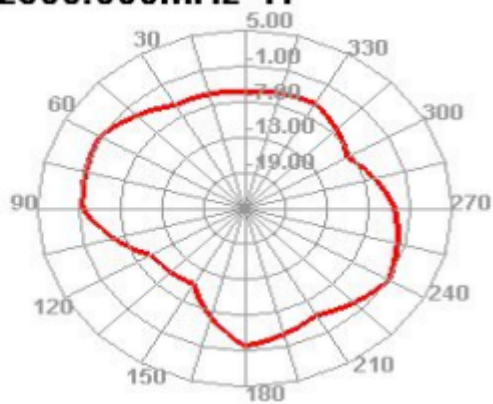

2500.000MHz E1

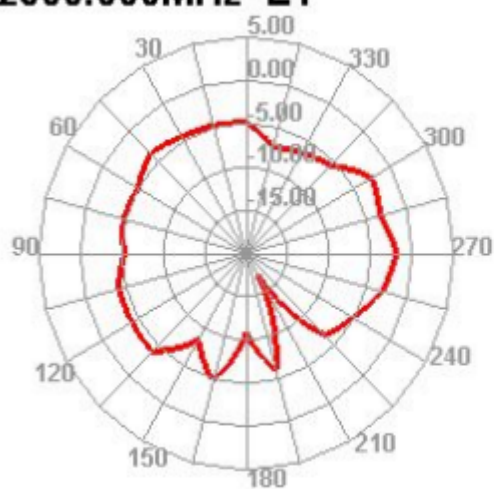

2500.000MHz E2

