

TEST REPORT

Applicant : Jiangxi krovi Information Technology Co., Ltd.
Address : Room 702-703, Century Asia-Pacific Center Building, No. 318
Hongcheng Road, Xihu District, Nanchang City, Jiangxi Province, China
Manufacturer : Jiangxi krovi Information Technology Co., Ltd.
Address : 7th floor, Century Asia-Pacific Center Building, No. 318 Hongcheng
Road, Xihu District, Nanchang City, Jiangxi Province, China
Product Name : Smart fingerprint lock
Model Number : G07,G-X, BF-X, B-X, DZ-X, F-X, XC-X, BZ-X, QX-X, DS-X, BR-X, NT-X,
GZ-X, GH-X, SX-X, U-X
Trademark : KROVI
FCC ID : 2BV7Z-G07
Test Date : May 09, 2026 – May 22, 2026
Date of Report : May 22, 2026

Test Result : This device described above has been tested by NTT, and the test results show that the equipment under test (EUT) is in compliance with the Standard requirements. And it is applicable only to the tested sample identified in the report.

Test Procedure Used:

Standards : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10-2020+Cor 1-2023

Prepared by(Test Engineer):
Cindy Qin



Reviewer(Supervisor):
Ken Wu



Approved(Manager):
Abel Yu



TABLE OF CONTENT

1. General Information	5
1.1. Description of Device (EUT)	5
1.2. Channel List	5
1.3. Test configuration	5
1.4. Summary of test result	6
1.5. Special Accessories and Auxiliary Equipment	6
1.6. Test mode	6
1.7. Block Diagram	7
1.8. Test Conditions	7
1.9. Measurement Uncertainty (95% confidence levels, k=2)	7
1.10. Test Facility	8
1.11. Test Equipment	8
2. Conducted emission at the mains terminals test	10
2.1. Limit	10
2.2. Test Setup	10
2.3. Test Procedure	10
2.4. Test Result	10
3. Radiated Spurious Emissions	11
3.1. Limit	11
3.2. Test Setup	12
3.3. Test Procedure	14
3.4. Test Result	15
4. Duty cycle	22
4.1. Limit	22
4.2. Test Setup	22
4.3. Test Procedure	22
4.4. Test Result	22
5. Conducted Spurious Emissions	23
5.1. Limit	23
5.2. Test Setup	23
5.3. Test Procedure	23
5.4. Test Result	23
6. Band Edge Measurement	24
6.1. Limit	24
6.2. Test setup	24
6.3. Test Procedure	24
6.4. Test Result	24
7. -6 dB Bandwidth and 99% Bandwidth Measurement	25
7.1. Limit	25
7.2. Test Setup	25
7.3. Test Procedure	25
7.4. Test Result	25
8. Maximum Output Power	26
8.1. Limit	26
8.2. Test Setup	26
8.3. Test Procedure	26
8.4. Test Result	26
9. Power Spectral density	27
9.1. Limit	27
9.2. Test Setup	27
9.3. Test Procedure	27

9.4. Test Result.....	27
10. Antenna Requirement	28
11. TEST SETUP & EUT PHOTOGRAPH	29

[illegible]

1. General Information

1.1. Description of Device (EUT)

EUT Name	: Smart fingerprint lock
Model No.	: G07
Serial Model	: G-X, BF-X, B-X, DZ-X, F-X, XC-X, BZ-X, QX-X, DS-X, BR-X, NT-X, GZ-X, GH-X, SX-X, U-X
Model Difference	: All the same except the model number
Power supply	: DC 6V from 4*AAA Battery
Operation frequency	: 2412-2462MHz for 802.11b/g/n20/40
Modulation	: 802.11b:(DQPSK, DBPSK, CCK) DSSS 802.11g/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM
Antenna Type	: PCB antenna, Maximum Gain is 2.54dBi
Intend use environment	: Residential, commercial and light industrial environment

1.2. Channel List

Frequency and Channel list for 802.11 b/g/n (HT20/40):

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

Test Frequency and Channel for 802.11 b/g/n (HT20/40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	6	2437	11	2462
3	2422	6	2437	9	2452

1.3. Test configuration

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	
Test Software	ImageTool_v2.2.0
Power level setup	42

1.4.Summary of test result

RF PART		
Test Items	Test Requirement	Result
Antenna requirement	FCC part 15.203/15.247 (b)	PASS
Duty cycle		PASS
AC Power Line Conducted Emission	FCC part 15.207	N/A
Conducted Peak Output Power	FCC part 15.247 (b)(3)	PASS
Channel Bandwidth& 99% OCB	FCC part 15.247 (a)(2)	PASS
Power Spectral Density	FCC part 15.247 (e)	PASS
Band Edge	FCC part 15.247(d)	PASS
Spurious Emission	FCC part 15.205/15.209	PASS
Remark: N/A is an abbreviation for Not Applicable. Measurement Uncertainty is not taken into account for conformity statement		

1.5.Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Hardware Version	Software Version
USB serial port	/	AML6001G	/	/
PC	ASUS	U1	/	/


1.6.Test mode

The special RF test software was used to control EUT work in Continuous WIFI TX mode, and select test channel, wireless mode.


Test mode	Low channel	Middle channel	High channel
802.11b	2412MHz	2437MHz	2462MHz
802.11g	2412MHz	2437MHz	2462MHz
802.11n20	2412MHz	2437MHz	2462MHz
802.11n40	2422MHz	2437MHz	2452MHz
Note: Only the worst Data 1Mbps/6Mbps/6.5Mbps Record in the report			

1.7.Block Diagram


Radiated Emission



Conducted Spurious



RF Conducted Test



1.8.Test Conditions

Category	Normal Conditions	Extreme Conditions
Temperature range	15-35℃	N/A
Humidity range	20-75%	N/A
Pressure range	86-106kPa	N/A
Power supply	DC 5V	N/A

Note: N/A is an abbreviation for Not Applicable.

1.9.Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for radio frequency	$\pm 7 \times 10^{-8}$	
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$	
Radiated Emission(9KHz~30MHz)	$\pm 4.51\text{dB}$	
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$	
Radiated Emission(1GHz~6GHz)	$\pm 3.92\text{dB}$	
Radiated Emission(6GHz~18GHz)	$\pm 4.33\text{dB}$	
Radiated Emission(18GHz~40GHz)	$\pm 3.38\text{dB}$	
Uncertainty for conducted RF Power	$\pm 0.20\text{dB}$	
Conducted spurious emissions	$\pm 0.24\text{dB}$	
Uncertainty for temperature	0.6℃	
Uncertainty for humidity	1%	
Bandwidth	$\pm 1.5 \times 10^{-6}$	
Time	$\pm 2\%$	
Duty Cycle	$\pm 2\%$	

Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%

1.10.Test Facility

Site Description		
Name of Firm	:	Shenzhen NTT Testing Technology Co.,Ltd.
Site Location	:	1B, Building 2, Factory Building & 103, Building 3, Factory Building, Dayang Industrial Park, No.4, Industrial Avenue, Tangwei Community, Fuhai Sub-district, Bao 'an District, Shenzhen City, Guangdong, China
FCC Designation Number	:	CN3446
FCC Test Firm Registration Number	:	129414

1.11.Test Equipment

Conducted Test Site

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	HSRCE944	/	HTEC	2025/4/30	2028/4/29
EMI Test Receiver	ESPI	/	RS	2025/9/8	2026/9/7
LISN	NNLK 8129	00603	Schwarzbeck	2025/9/8	2026/9/7
LISN	NNHV 8123-400	00694	Schwarzbeck	2025/9/8	2026/9/7
LISN	NNHV 8123-400	00680	Schwarzbeck	2025/9/8	2026/9/7
Cable	RG223-1500MM	NA	RG	2025/9/8	2026/9/7

Radiated Test Site(Below 1G and Above 1G)&RF Test Site

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/7/24	2028/7/23
EMI Test Receiver	ESCI	101018	RS	2025/9/8	2026/9/7
Amplifi (30MHz-1GHz)	BBV 9718D	00042	SCHWARZBECK	2025/9/8	2026/9/7
Bilog Antenna (30MHz-1GHz)	VULB9168	1858	SCHWARZBECK	2025/9/9	2026/9/8
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHWARZBECK	2025/9/9	2026/9/8
Pream plifier (1GHz-18GHz)	BBV 9718D	0024	SCHWARZBECK	2025/9/8	2026/9/7
Spectrum Analyze (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2025/9/8	2026/9/7
Pream plifier (18GHz-40GHz)	BBV 9721	0056	SCHWARZBECK	2025/9/8	2026/9/7

Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2025/9/8	2026/9/7
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHWARZBECK	2025/9/8	2026/9/7
Amplifier (9KHz-30MHz)	CVP 9222 C	00109	SCHWARZBECK	2025/9/8	2026/9/7
MXG Signal Analyzer	N9020A	MY50510202	Agilent	2025/9/8	2026/9/7
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2025/9/8	2026/9/7
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2025/9/8	2026/9/7
Power Sensor	TR1029-2	512364	Techoy	2025/9/8	2026/9/7
RF Swith	TR1029-1	512364	Techoy	2025/9/8	2026/9/7
Cable	DA800-4000MM	NA	DA	2025/9/8	2026/9/7
Cable	DA800-11000MM	NA	DA	2025/9/8	2026/9/7

Test software

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

2. Conducted emission at the mains terminals test


2.1.Limit

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020+Cor 1-2023
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

2.2.Test Setup

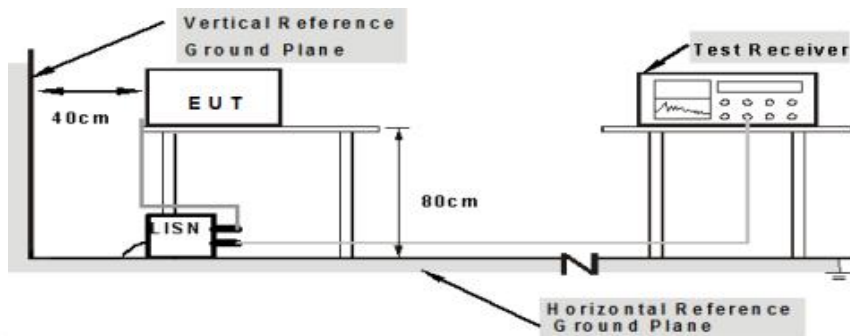

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

2.3.Test Procedure

1. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. LISN at least 80 cm from nearest part of EUT chassis.
- 5.For the actual test configuration, please refer to the related Item - EUT Test Photos.

2.4.Test Result

N/A

3. Radiated Spurious Emissions

3.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: KDB 558074 D01 15.247 MeasGuidance v05r02 April 2, 2019;
 ANSI C63.10-2020+Cor 1-2023
 Test Result: PASS
 Measurement Distance: 3m

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log(2400/F(kHz)) + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log(24000/F(kHz)) + 40
1.705 ~ 30	30	30	100 * 30	20log(30) + 40
30 ~ 88	100	3	100	20log(100)
88 ~ 216	150	3	150	20log(150)
216 ~ 960	200	3	200	20log(200)
Above 960	500	3	500	20log(500)


3.2.Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10-2020+Cor 1-2023.



The test setup for emission measurement below 30MHz.

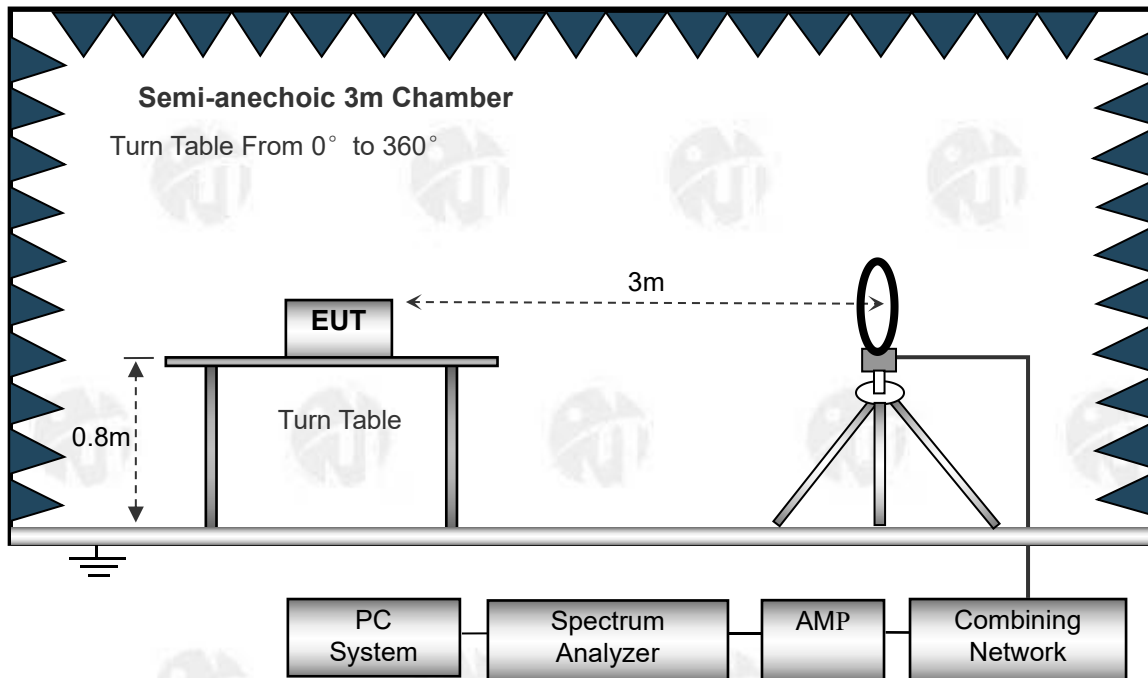

The test setup for emission measurement from 30 MHz to 1 GHz.

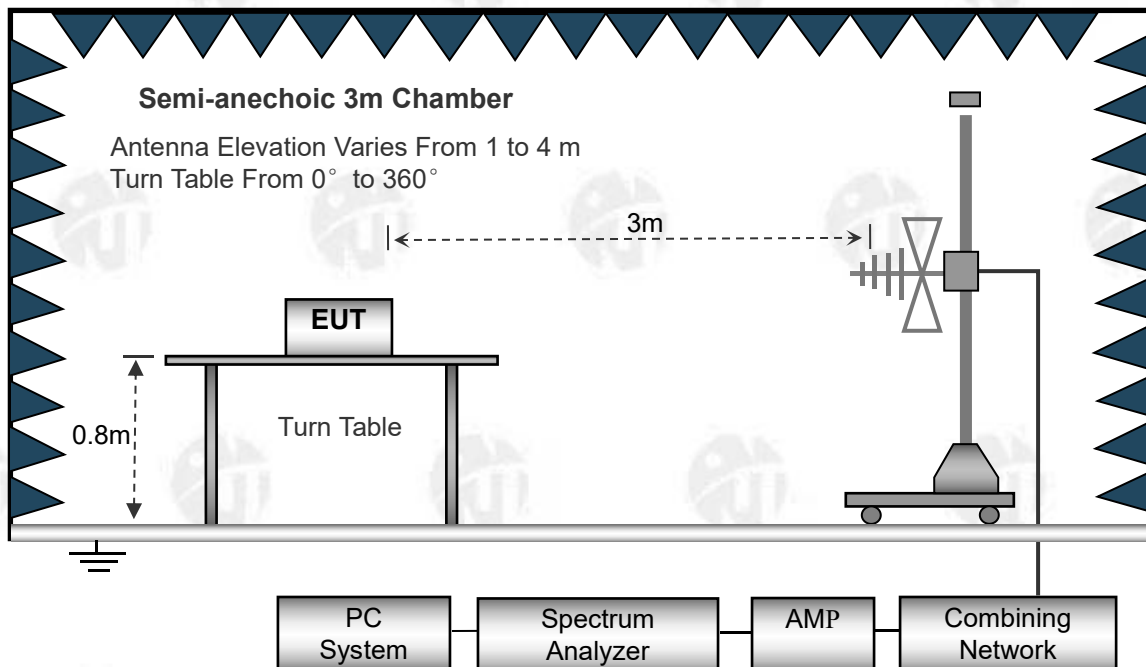

The test setup for emission measurement above 1 GHz.

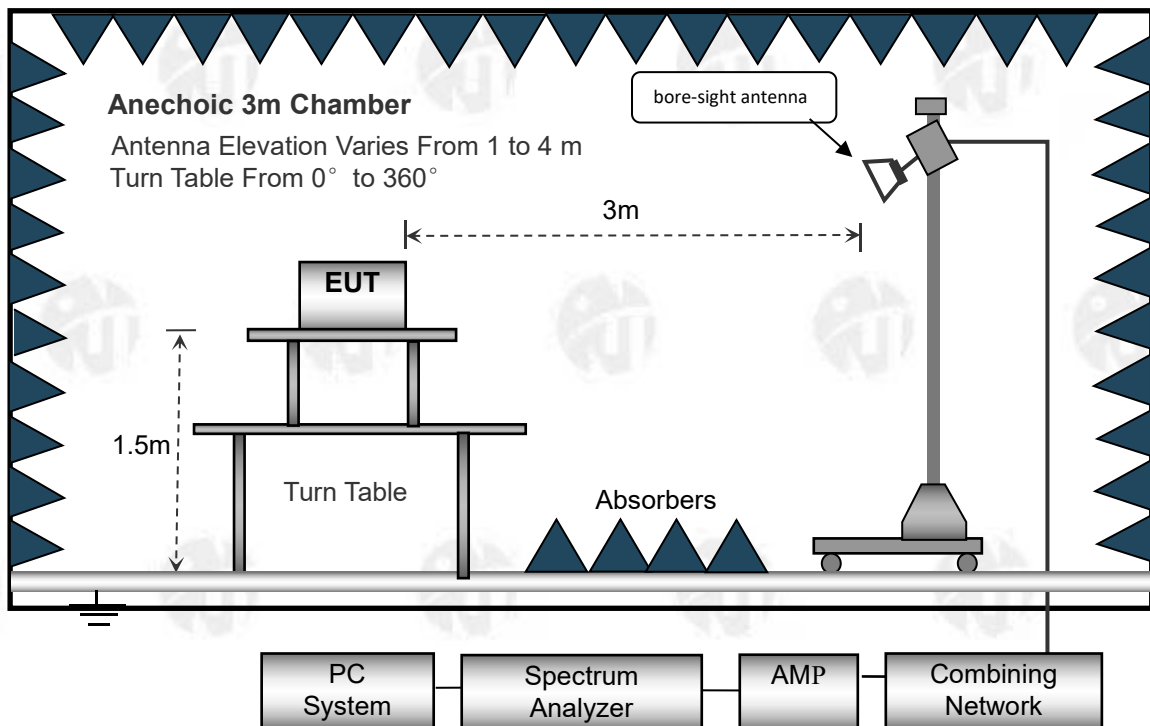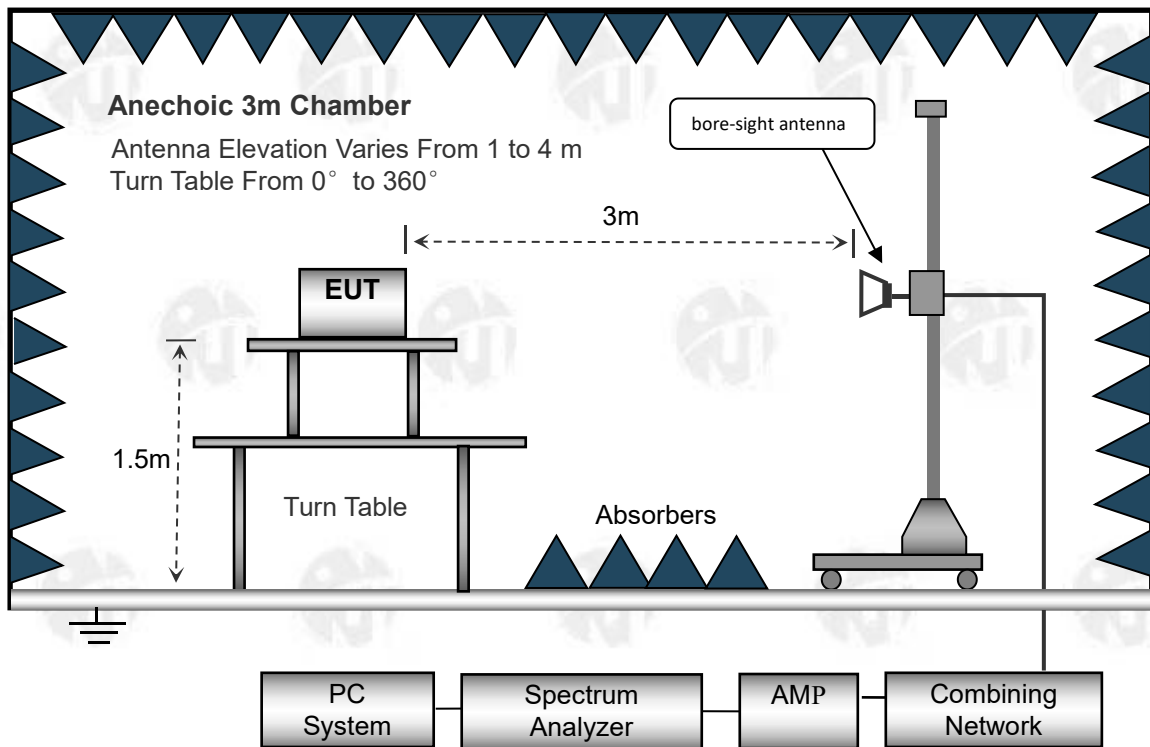

3.3.Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high - pass filter is used during radiated emissions above 1GHz measurement.

3.4.Test Result

Test Frequency: 9KHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 1GHz

Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	DC 6V	Test Mode :	802.11b(2462.00MHz)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	110.9571	37.11	-15.84	21.27	43.50	-22.23	QP
2	142.3243	43.65	-19.41	24.24	43.50	-19.26	QP
3	149.4857	44.68	-19.33	25.35	43.50	-18.15	QP
4	171.3926	41.30	-18.51	22.79	43.50	-20.71	QP
5	191.7450	39.60	-16.79	22.81	43.50	-20.69	QP
6	224.5193	37.45	-15.50	21.95	46.00	-24.05	QP

Note:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

2. All the modes have tested and recorded the worst mode(802.11b) in the report

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	DC 6V	Test Mode :	802.11b(2462.00MHz)

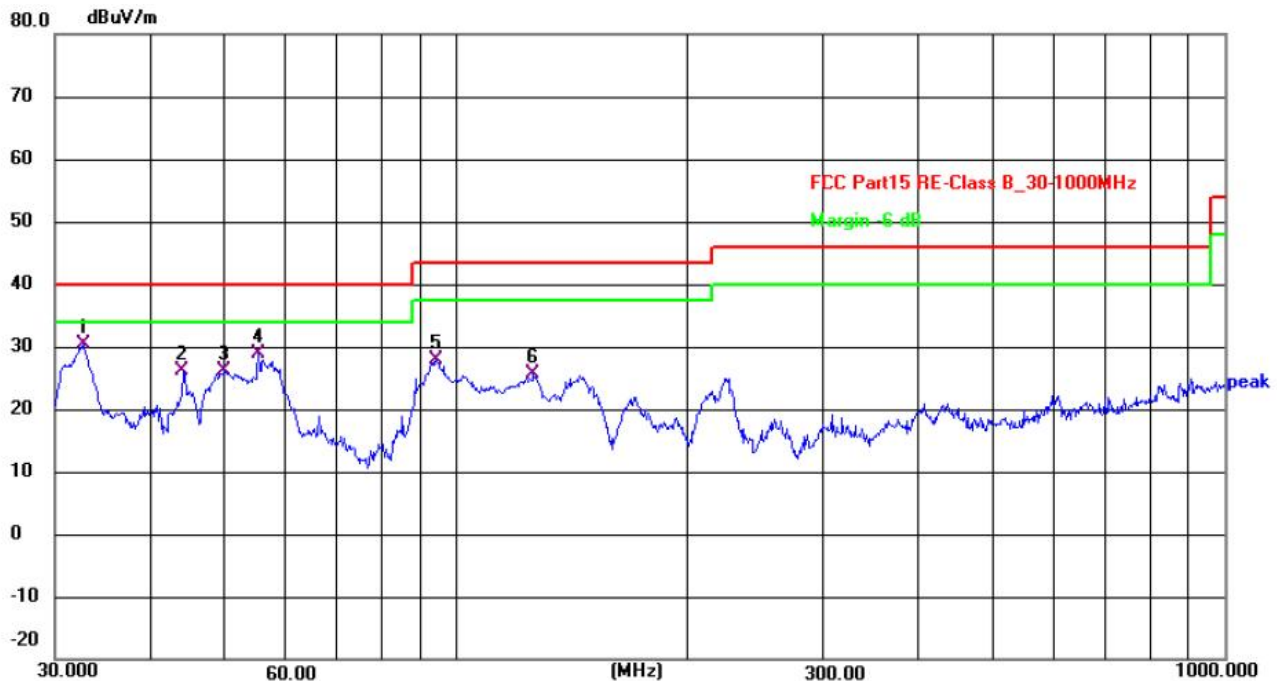

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.6340	46.80	-16.35	30.45	40.00	-9.55	QP
2	44.1200	40.66	-14.45	26.21	40.00	-13.79	QP
3	49.8813	40.43	-14.22	26.21	40.00	-13.79	QP
4	55.2207	43.61	-14.64	28.97	40.00	-11.03	QP
5	94.0979	45.25	-17.29	27.96	43.50	-15.54	QP
6	125.8863	43.92	-18.29	25.63	43.50	-17.87	QP

Note:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

2. All the modes have tested and recorded the worst mode(802.11b) in the report

Test Frequency 1GHz-25GHz

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2412MHz									
V	4824	46.60	34.11	5.04	32.44	49.97	74.00	-24.03	Pk
V	4824	38.98	34.11	5.04	32.44	42.35	54.00	-11.65	AV
V	7236	44.01	32.57	6.30	35.89	53.63	74.00	-20.37	Pk
V	7236	31.41	32.57	6.30	35.89	41.03	54.00	-12.97	AV
V	9648	36.11	32.96	7.56	38.40	49.11	74.00	-24.89	Pk
V	9648	23.29	32.96	7.56	38.40	36.29	54.00	-17.71	AV
V	12060	35.42	32.06	8.92	39.01	51.29	74.00	-22.71	Pk
V	12060	24.34	32.06	8.92	39.01	40.21	54.00	-13.79	AV
H	4824	45.36	34.11	5.04	32.44	48.73	74.00	-25.27	Pk
H	4824	33.37	34.11	5.04	32.44	36.74	54.00	-17.26	AV
H	7236	42.48	32.57	6.30	35.89	52.10	74.00	-21.90	Pk
H	7236	27.29	32.57	6.30	35.89	36.91	54.00	-17.09	AV
H	9648	38.09	32.96	7.56	38.40	51.09	74.00	-22.91	Pk
H	9648	27.77	32.96	7.56	38.40	40.77	54.00	-13.23	AV
H	12060	37.97	32.06	8.92	39.01	53.84	74.00	-20.16	Pk
H	12060	28.28	32.06	8.92	39.01	44.15	54.00	-9.85	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874	51.18	34.08	5.08	32.57	54.75	74.00	-19.25	Pk
V	4874	37.60	34.08	5.08	32.57	41.17	54.00	-12.83	AV
V	7311	43.11	32.62	6.34	35.95	52.78	74.00	-21.22	Pk
V	7311	33.59	32.62	6.34	35.95	43.26	54.00	-10.74	AV
V	9748	40.62	32.93	7.58	38.40	53.67	74.00	-20.33	Pk
V	9748	31.29	32.93	7.58	38.40	44.34	54.00	-9.66	AV
V	12185	43.50	31.97	8.89	39.04	59.46	74.00	-14.54	Pk
V	12185	29.38	31.97	8.89	39.04	45.34	54.00	-8.66	AV
H	4874	48.44	34.08	5.08	32.57	52.01	74.00	-21.99	Pk
H	4874	32.81	34.08	5.08	32.57	36.38	54.00	-17.62	AV
H	7311	43.81	32.62	6.34	35.95	53.48	74.00	-20.52	Pk
H	7311	31.22	32.62	6.34	35.95	40.89	54.00	-13.11	AV
H	9748	43.40	32.93	7.58	38.40	56.45	74.00	-17.55	Pk
H	9748	28.51	32.93	7.58	38.40	41.56	54.00	-12.44	AV
H	12185	35.65	31.97	8.89	39.04	51.61	74.00	-22.39	Pk
H	12185	26.02	31.97	8.89	39.04	41.98	54.00	-12.02	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462MHz									
V	4924	48.67	34.05	5.14	32.79	52.55	74.00	-21.45	Pk
V	4924	33.91	34.05	5.14	32.79	37.79	54.00	-16.21	AV
V	7386	37.05	32.67	6.36	35.99	46.73	74.00	-27.27	Pk
V	7386	28.89	32.67	6.36	35.99	38.57	54.00	-15.43	AV
V	9848	41.32	32.89	7.59	38.37	54.39	74.00	-19.61	Pk
V	9848	27.02	32.89	7.59	38.37	40.09	54.00	-13.91	AV
V	12310	38.53	31.88	8.82	39.06	54.53	74.00	-19.47	Pk
V	12310	27.09	31.88	8.82	39.06	43.09	54.00	-10.91	AV
H	4924	43.87	34.05	5.14	32.79	47.75	74.00	-26.25	Pk
H	4924	34.51	34.05	5.14	32.79	38.39	54.00	-15.61	AV
H	7386	45.33	32.67	6.36	35.99	55.01	74.00	-18.99	Pk
H	7386	29.94	32.67	6.36	35.99	39.62	54.00	-14.38	AV
H	9848	36.92	32.89	7.59	38.37	49.99	74.00	-24.01	Pk
H	9848	26.97	32.89	7.59	38.37	40.04	54.00	-13.96	AV
H	12310	35.42	31.88	8.82	39.06	51.42	74.00	-22.58	Pk
H	12310	25.61	31.88	8.82	39.06	41.61	54.00	-12.39	AV

- Note: 1. The testing has been conformed to 10*2462MHz=24620MHz.
 2. All other emissions more than 30dB below the limit.
 3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
 Emission Level = Reading + Factor
 Margin=Emission Level-Limit
 4. All the modes have tested and recorded the worst mode(802.11b) in the report

Radiated Band Emission Measurement:

	Polar (H/V)	Frequenc y (MHz)	Meter Readin g (dBuV)	Pre- amplifie r (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detecto r Type
802.11b	Low Channel: 2412MHz									
	H	2390	57.85	35.17	3.48	27.49	53.65	74.00	-20.35	PK
	H	2390	50.78	35.17	3.48	27.49	46.58	54.00	-7.42	AV
	H	2400	61.03	35.16	3.49	27.52	56.88	74.00	-17.12	PK
	H	2400	50.48	35.16	3.49	27.52	46.33	54.00	-7.67	AV
	V	2390	58.29	35.17	3.48	27.49	54.09	74.00	-19.91	PK
	V	2390	50.74	35.17	3.48	27.49	46.54	54.00	-7.46	AV
	V	2400	59.83	35.16	3.49	27.52	55.68	74.00	-18.32	PK
	V	2400	50.19	35.16	3.49	27.52	46.04	54.00	-7.96	AV
	High Channel: 2462MHz									
	H	2483.5	58.32	35.11	3.56	27.75	54.52	74.00	-19.48	PK
	H	2483.5	48.98	35.11	3.56	27.75	45.18	54.00	-8.82	AV
	H	2500	59.14	35.10	3.57	27.80	55.41	74.00	-18.59	PK
	H	2500	50.21	35.10	3.57	27.80	46.48	54.00	-7.52	AV
	V	2483.5	58.98	35.11	3.56	27.75	55.18	74.00	-18.82	PK
	V	2483.5	50.41	35.11	3.56	27.75	46.61	54.00	-7.39	AV
	V	2500	58.21	35.10	3.57	27.80	54.48	74.00	-19.52	PK
	V	2500	50.70	35.10	3.57	27.80	46.97	54.00	-7.03	AV
802.11g	Low Channel: 2412MHz									
	H	2390	57.34	35.17	3.48	27.49	53.14	74.00	-20.86	PK
	H	2390	48.71	35.17	3.48	27.49	44.51	54.00	-9.49	AV
	H	2400	58.32	35.16	3.49	27.52	54.17	74.00	-19.83	PK
	H	2400	50.54	35.16	3.49	27.52	46.39	54.00	-7.61	AV
	V	2390	57.39	35.17	3.48	27.49	53.19	74.00	-20.81	PK
	V	2390	48.63	35.17	3.48	27.49	44.43	54.00	-9.57	AV
	V	2400	58.84	35.16	3.49	27.52	54.69	74.00	-19.31	PK
	V	2400	48.45	35.16	3.49	27.52	44.30	54.00	-9.70	AV
	High Channel: 2462MHz									
	H	2483.5	56.94	35.11	3.56	27.75	53.14	74.00	-20.86	PK
	H	2483.5	48.43	35.11	3.56	27.75	44.63	54.00	-9.37	AV
	H	2500	58.37	35.10	3.57	27.80	54.64	74.00	-19.36	PK
	H	2500	48.77	35.10	3.57	27.80	45.04	54.00	-8.96	AV
	V	2483.5	57.54	35.11	3.56	27.75	53.74	74.00	-20.26	PK
	V	2483.5	49.48	35.11	3.56	27.75	45.68	54.00	-8.32	AV
	V	2500	58.11	35.10	3.57	27.80	54.38	74.00	-19.62	PK
	V	2500	49.12	35.10	3.57	27.80	45.39	54.00	-8.61	AV
802.11 n20	Low Channel: 2412MHz									
	H	2390	57.46	35.17	3.48	27.49	53.26	74.00	-20.74	PK
	H	2390	49.83	35.17	3.48	27.49	45.63	54.00	-8.37	AV
	H	2400	59.79	35.16	3.49	27.52	55.64	74.00	-18.36	PK
	H	2400	48.79	35.16	3.49	27.52	44.64	54.00	-9.36	AV
	V	2390	57.18	35.17	3.48	27.49	52.98	74.00	-21.02	PK
	V	2390	50.74	35.17	3.48	27.49	46.54	54.00	-7.46	AV
	V	2400	59.52	35.16	3.49	27.52	55.37	74.00	-18.63	PK
	V	2400	49.48	35.16	3.49	27.52	45.33	54.00	-8.67	AV
	High Channel: 2462MHz									
	H	2483.5	57.67	35.11	3.56	27.75	53.87	74.00	-20.13	PK
	H	2483.5	48.35	35.11	3.56	27.75	44.55	54.00	-9.45	AV

802.11 n40	H	2500	58.80	35.10	3.57	27.80	55.07	74.00	-18.93	PK
	H	2500	50.36	35.10	3.57	27.80	46.63	54.00	-7.37	AV
	V	2483.5	57.70	35.11	3.56	27.75	53.90	74.00	-20.10	PK
	V	2483.5	49.90	35.11	3.56	27.75	46.10	54.00	-7.90	AV
	V	2500	58.15	35.10	3.57	27.80	54.42	74.00	-19.58	PK
	V	2500	49.50	35.10	3.57	27.80	45.77	54.00	-8.23	AV
	Low Channel: 2422MHz									
	H	2390	58.08	35.17	3.48	27.49	53.88	74.00	-20.12	PK
	H	2390	49.88	35.17	3.48	27.49	45.68	54.00	-8.32	AV
	H	2400	59.15	35.16	3.49	27.52	55.00	74.00	-19.00	PK
	H	2400	49.82	35.16	3.49	27.52	45.67	54.00	-8.33	AV
	V	2390	57.12	35.17	3.48	27.49	52.92	74.00	-21.08	PK
	V	2390	49.18	35.17	3.48	27.49	44.98	54.00	-9.02	AV
	V	2400	58.47	35.16	3.49	27.52	54.32	74.00	-19.68	PK
	V	2400	48.84	35.16	3.49	27.52	44.69	54.00	-9.31	AV
	High Channel: 2452MHz									
	H	2483.5	57.31	35.11	3.56	27.75	53.51	74.00	-20.49	PK
	H	2483.5	48.21	35.11	3.56	27.75	44.41	54.00	-9.59	AV
	H	2500	59.26	35.10	3.57	27.80	55.53	74.00	-18.47	PK
	H	2500	49.14	35.10	3.57	27.80	45.41	54.00	-8.59	AV
	V	2483.5	57.91	35.11	3.56	27.75	54.11	74.00	-19.89	PK
	V	2483.5	49.98	35.11	3.56	27.75	46.18	54.00	-7.82	AV
	V	2500	58.76	35.10	3.57	27.80	55.03	74.00	-18.97	PK
	V	2500	49.10	35.10	3.57	27.80	45.37	54.00	-8.63	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss - Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. Duty cycle

4.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: KDB 558074 D01 15.247 MeasGuidance v05r02 April 2, 2019;
ANSI C63.10-2020+Cor 1-2023
Test Result: PASS

4.2.Test Setup



4.3.Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set the center frequency of the instrument to the center frequency of the transmission.
 - b) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - c) Set $VBW \geq RBW$. Detector = peak or average.
 - d) Sweep time = auto couple.
 - e) Trace mode = max hold.
 - f) Allow trace to fully stabilize.

4.4.Test Result

Please see the attachment for data.

5. Conducted Spurious Emissions

5.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: KDB 558074 D01 15.247 MeasGuidance v05r02 April 2, 2019;
ANSI C63.10-2020+Cor 1-2023
Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.2.Test Setup



5.3.Test Procedure

- Set instrument center frequency to DTS channel center frequency.
 - Set the span to ≥ 1.5 times the DTS bandwidth.
 - Set the RBW = 100 kHz.
 - Set the VBW $\geq [3 \times \text{RBW}]$.
 - Detector = peak.
 - Sweep time = No faster than coupled (auto) time.
 - Trace mode = max-hold.
 - Allow trace to fully stabilize.
 - Use the peak marker function to determine the maximum PSD level.
- Note that the channel found to contain the maximum PSD level can be used to establish the reference level
Establish an emission level by using the following procedure:

- Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

5.4.Test Result

Please see the attachment for data.

6. Band Edge Measurement

6.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247


Test Method: KDB 558074 D01 15.247 MeasGuidance v05r02 April 2, 2019;

ANSI C63.10-2020+Cor 1-2023

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting

6.2.Test setup



6.3.Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
3. Establish a reference level by using the following procedure
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to ≈ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW $\approx [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = No faster than coupled (auto) time.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
4. Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = No faster than coupled (auto) time.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

6.4.Test Result

Please see the attachment for data.

7. -6 dB Bandwidth and 99% Bandwidth Measurement

7.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 MeasGuidance v05r02 April 2, 2019; ANSI C63.10-2020+Cor 1-2023

7.2.Test Setup



7.3.Test Procedure

DTS Bandwidth

- a) Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
- b) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Trace mode = max-hold.
- f) Sweep = No faster than coupled (auto) time.
- g) Allow the trace to stabilize.

99% Bandwidth

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.

7.4.Test Result

Please see the attachment for data.

8. Maximum Output Power


8.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 MeasGuidance v05r02 April 2, 2019;ANSI C63.10-2020+Cor 1-2023

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2.Test Setup



8.3.Test Procedure

8.3.1 The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

8.3.2 Set to the maximum power setting and enable the EUT transmit continuously.

8.3.3 Measure the conducted output power and record the results in the test report.

8.4.Test Result

Please see the attachment for data.

9. Power Spectral density

9.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 MeasGuidance v05r02 April 2, 2019; ANSI C63.10-2020+Cor 1-2023

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

9.2.Test Setup



9.3.Test Procedure

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set instrument center frequency to DTS channel center frequency
3. Set span to > 1.5 times the OBW.
4. Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
5. Set VBW $\geq [3 \times \text{RBW}]$
6. Detector = power averaging (rms) or sample detector (when rms not available).
7. Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
8. Sweep time = auto couple.
9. Employ trace averaging (rms) mode over a minimum of 100 traces.
10. Use the peak marker function to determine the maximum amplitude level.
11. If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat(note that this might require zooming in on the emission of interest and reducing the span to meetthe minimum measurement point requirement as the RBW is reduced).
12. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.4.Test Result

Please see the attachment for data.

10. Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an PCB antenna fulfill the requirement of this section.

11. TEST SETUP & EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----