

Acknowledgment Letter

company name: Shenzhen Kexin Wireless Technology Co., Ltd.

company address: Building H, Hong Yongli Industrial Zone,
Shabei Li, Bao Long Sub-district, Longgang District, Shenzhen City

Serial number of the equipment: JB*** _____

Specification Description: 2.4G ultra-short and compact folding
adhesive stick, L=7cm / SMA male connector with inner pin /
semi-plastic nickel-plated

Production date : April 18, 2025

Factory confirmation:

D e p a r t m e n t	Review	Approval
Radio Frequency Department	Xiaoxiong Liu	Xiao Liu
Structural Department	Zhi Xiao Li	Bin Li
Quality Department	Liu Chunyu	Pengfei Zeng


Customer confirmation:

Check	Review	A p p r o v a l

1. Product performance parameters


Electrical Specifications	
Frequency Range (MHz)	2400-2500MHz
Input Impedence (Ω)	50
V.S.W.R(MAX)	< 2.5
Gain (dbi)	0.94dBi
Polarization Type	Ver tical
Radiation Direction	Omni-Directional
Mechanical Specifications	
Connect Type	SMA plug-in needle / semi-plastic nickel plating
Antenna Size	Φ 10*70mm
Material	Plastic, RP-SMA-J, RF cable, copper parts
Color	black
Mounting	Knob
Operating Temp	-25 ~ +70 °C

2. Product dimensions diagram

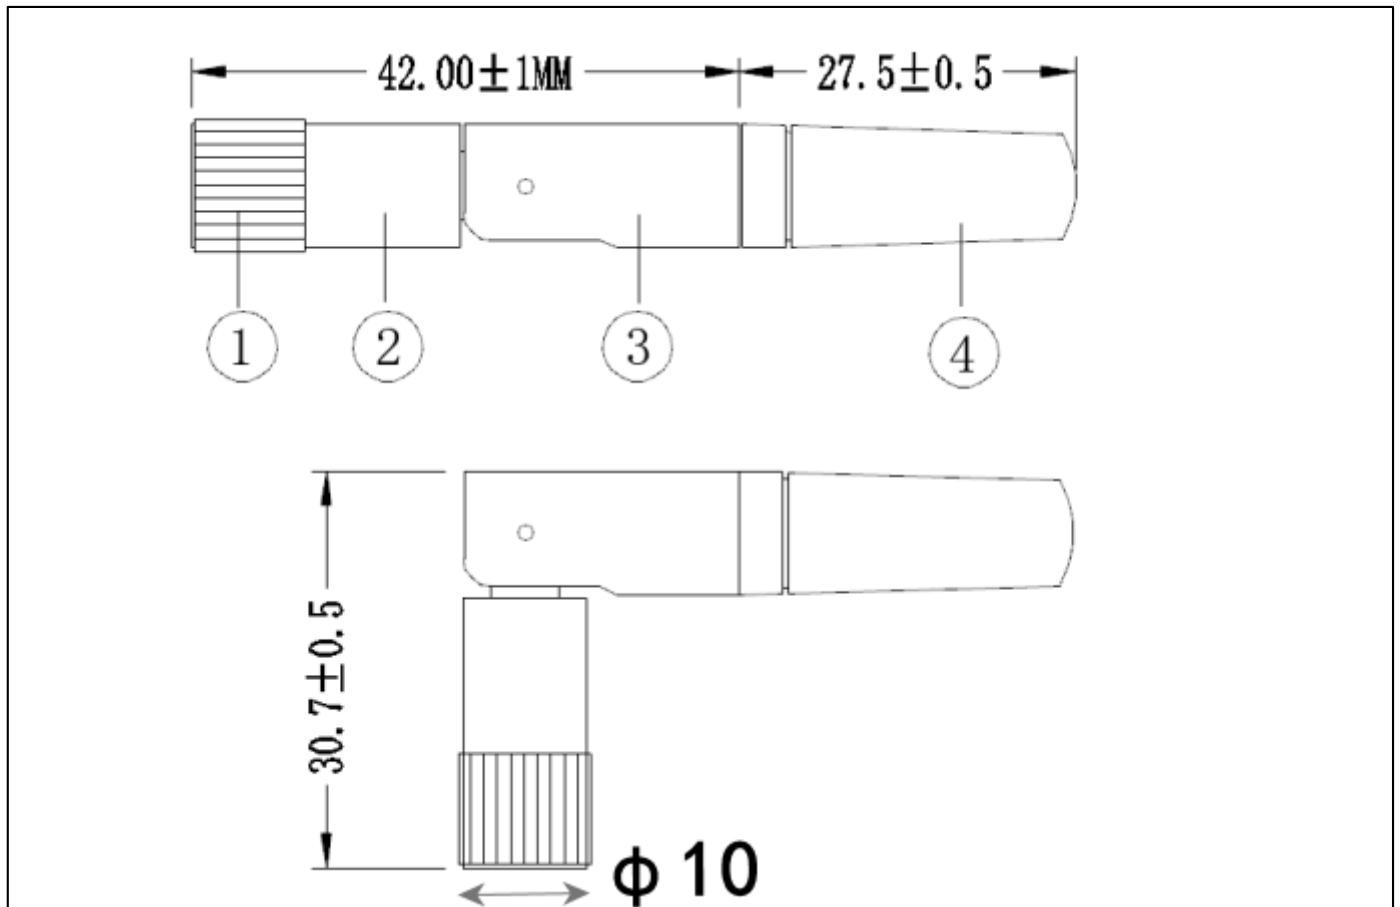


3. Electrical Performance Test Report: VSWR (Single-antenna test)

Electrical performance test report: VSWR (single antenna test)

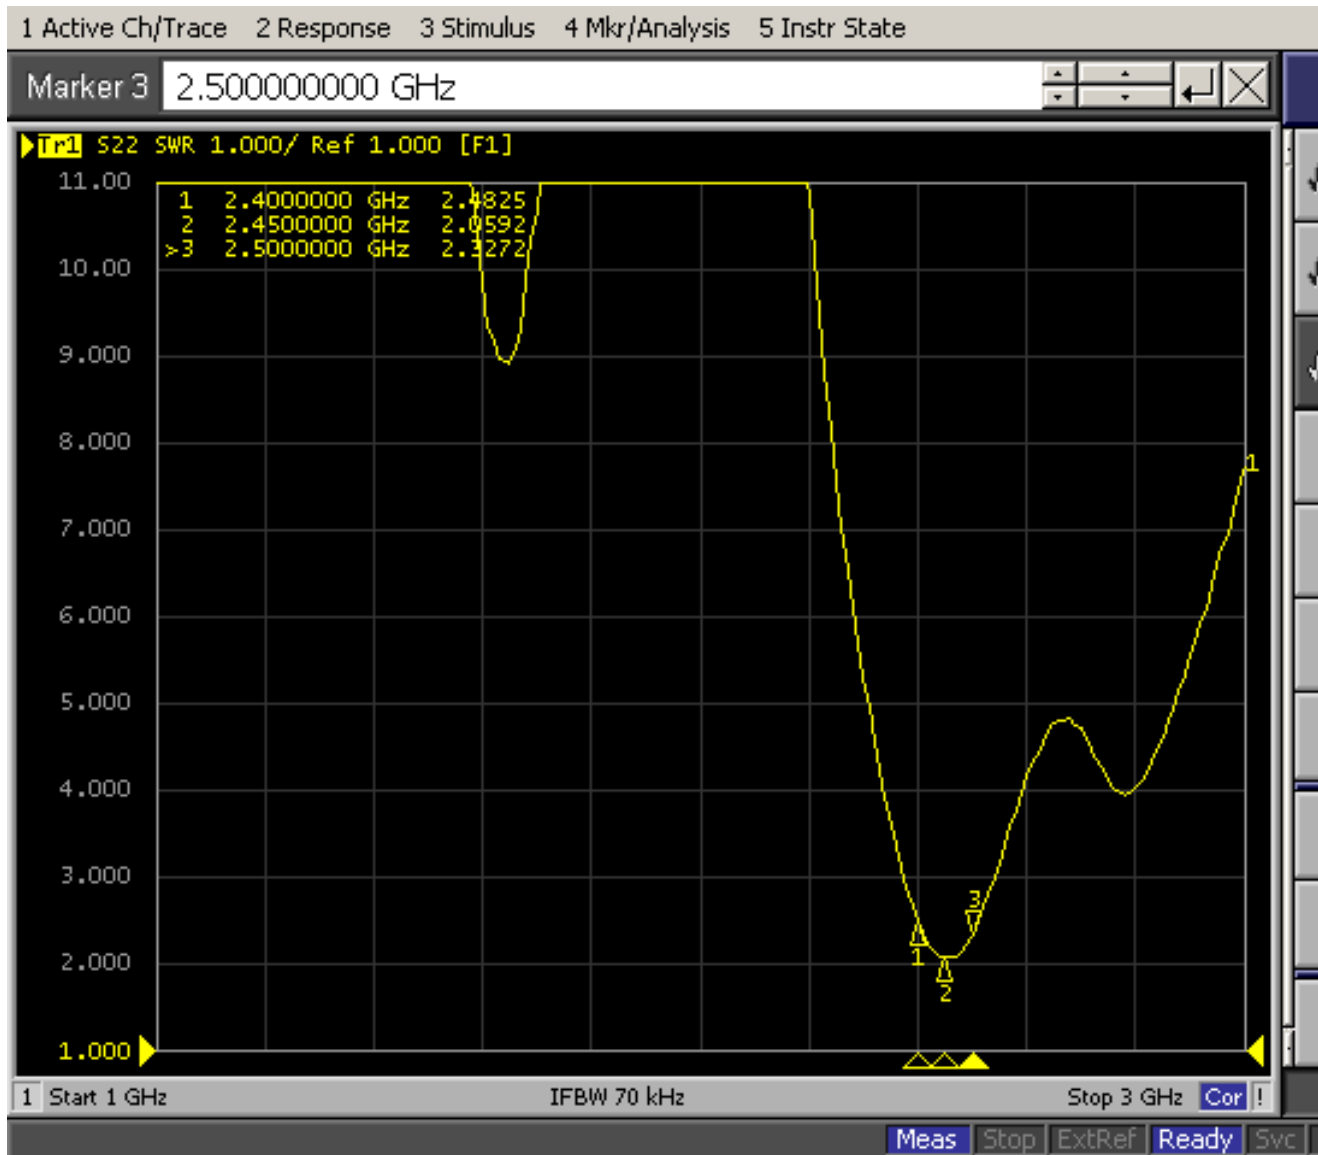

4. Efficiency & Gain (Single Antenna Test)

Freq (MHz)	Effi (%)	Gain (dBi)
2400	46.64	-0.10
2450	52.74	0.24
2500	62.60	0.94

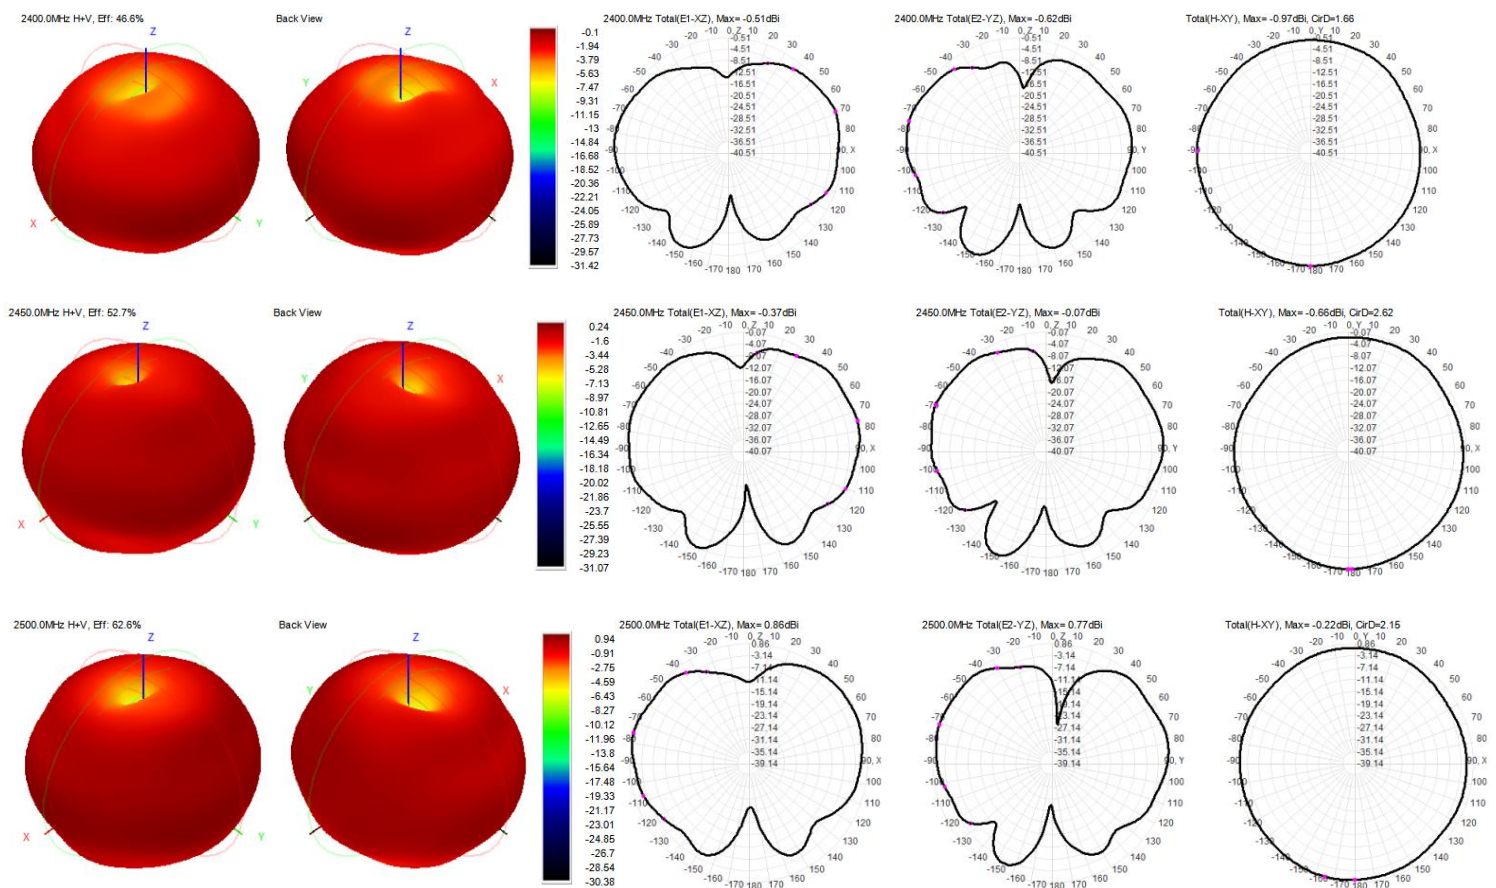

5. Real photos of the product

