

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:	
CUSTOMER:	
客 戶 料 號:	
CUST P/N:	
音 澤 料 號:	G43.5*0.75-13.8-0.08*48-12T-7.1UH-W38-L30MM+BJ
FINE P/N:	
產 品 型 號:	Φ 43.5MMX0.75MM
DESC:	
日 期:	2025/06/05
DATE:	
版 本:	A.0
Version:	

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
刘梦丽	唐杰	唐峰峰	

Shenzhen Jingzhu Industrial Co., Ltd.

Factory Address: Room 502, Building B, Weihua Daodian Industrial Park,
Huaning Road, Dalong Subdistrict, Longhua District, Guangdong Province
Tang Fengfeng Tel: 13641428606


Version Change History

[illegible]

SPECIFICATION


產品型號: DESC	G43.5*0.75-13.8-0.08*48-12T- 7.1UH-W38-L30MM+BJ	版本 Rev: A.0	客戶 CUST:	
			客戶料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

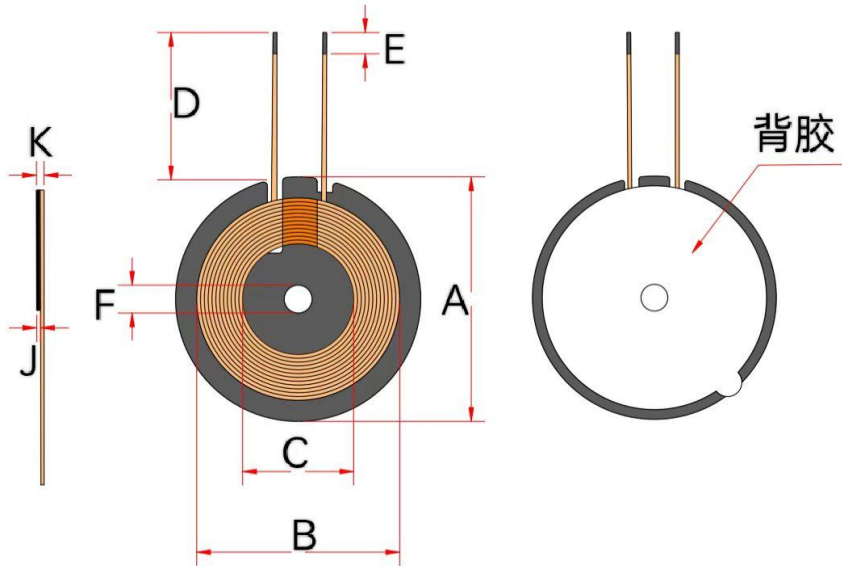

A	43.5±0.5mm
B	38±0.5mm
C	13.8±0.5mm
D	30 ±2mm
E	3±2mm
F	5.3±0.2mm
K	1.6±0.15mm
J	0.75±0.05mm
I	

二、原理图 SCHEMATIC DIAGRAM:

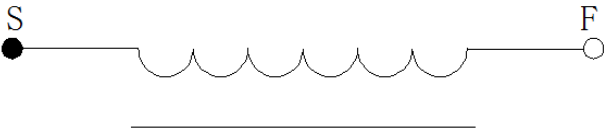

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	热风线 0.08*48	12Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	4.0uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	7.1uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤130mΩ	100KHz/1.0V	LCZ METER 1062B

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
何立成 2025.06.05	