

TEST REPORT

Applicant : Shenzhen Ruishang Times Technology Co., Ltd
Address : 4/F, Building B, Yinfeng Industry Park, Hangkong road, Hangcheng street, Bao'an, Shenzhen
Manufacturer : Shenzhen Ruishang Times Technology Co., Ltd
Address : 4/F, Building B, Yinfeng Industry Park, Hangkong road, Hangcheng street, Bao'an, Shenzhen

Product Name : Digital Calendar

Model Number : 1010, 2610, 1561, 1562, 1563, 2616, 2150, 2700

Trademark : /

FCC ID : 2BWNE-1010

Test Date : May 31, 2026 to Jun. 04, 2026

Date of Report : Jun. 04, 2026

Test Result : This device described above has been tested by BKC, and the test results show that the equipment under test (EUT) is in compliance with the Standard requirements. And it is applicable only to the tested sample identified in the report.

Test Procedure Used:

Standards : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10-2020+Cor.1-2023
RSS-247 Issue 3 August 2023
RSS-Gen Issue 5, Amendment 2 (February 2021)

Prepared by (Test Engineer):
Sten Huang

Sten Huang
Casey Wang

Approved (Manager):
Casey Wang

Approved (Manager):
Jerry Liao



TABLE OF CONTENT

1. General Information	4
1.1. Description of Device (EUT)	4
1.2. Channel List	4
1.3. Summary of test result	4
1.4. Special Accessories and Auxiliary Equipment	5
1.5. Test mode	5
1.6. Block Diagram	5
1.7. Test Conditions	6
1.8. Measurement Uncertainty (95% confidence levels, k=2)	6
1.9. Test Facility	6
1.10. Test Equipment	7
2. Conducted emission at the mains terminals test	9
2.1. Limit	9
2.2. Test Setup	9
2.3. Test Procedure	9
2.4. Test Result	10
3. Radiated Spurious Emissions	26
3.1. Limit	26
3.2. Test Setup	27
3.3. Test Procedure	29
3.4. Test Result	30
4. Conducted Spurious Emissions	49
4.1. Limit	49
4.2. Test Setup	49
4.3. Test Procedure	49
4.4. Test Result	49
5. Band Edge Measurement	50
5.1. Limit	50
5.2. Test setup	50
5.3. Test Procedure	50
5.4. Test Result	50
6. -6 dB Bandwidth and 99% Bandwidth Measurement	51
6.1. Limit	51
6.2. Test Setup	51
6.3. Test Procedure	51
6.4. Test Result	51
7. Maximum Output Power& E.I.R.P	52
7.1. Limit	52
7.2. Test Setup	52
7.3. Test Procedure	52
7.4. Test Result	53
8. Power Spectral density	54
8.1. Limit	54
8.2. Test Setup	54
8.3. Test Procedure	54
8.4. Test Result	54
9. Antenna Requirement	55
10. Test Photographs	56



1. General Information

1.1. Description of Device (EUT)

EUT Name	:	Digital Calendar
Model No.	:	1010, 2610, 1561,1562, 1563, 2616, 2150, 2700
Model Difference	:	The product is different for model name and screen size.The mains test model is 1010
Power supply	:	Rating(s): 5V=== 2A
Adapter	:	N/A
Operation frequency	:	2.412-2.462GHz
Max. RF output power:	:	11.32dBm
Modulation	:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(H20)/802.11n(H40): Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type	:	FPC antenna, Maximum Gain is 1.55dBi
Hardware Version	:	V1.0
Software Version	:	V1.0.0
Intend use environment	:	Residential, commercial and light industrial environment

1.2. Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

1.3. Summary of test result

RF PART		
Test Items	Test Requirement	Result
Antenna requirement	FCC part 15.203/15.247(b)(4) RSS-Gen Section 6.8	PASS
AC Power Line Conducted Emission	FCC part 15.207 RSS-Gen 8.8	PASS
Conducted Peak Output Power	FCC part 15.247 (b)(3) RSS-247 5.4(d)	PASS
Channel Bandwidth& 99% OCB	FCC part 15.247 (a)(2) RSS-247 5.2(a)	PASS
Power Spectral Density	FCC part 15.247 (e) RSS-247 5.2(b)	PASS

Band Edge	FCC part 15.247(d), 15.205, 15.209 RSS-Gen 8.9 RSS-247 5.5	PASS
Spurious Emission	FCC part 15.247(d), 15.205, 15.209 RSS-247 5.5 RSS-Gen 8.9	PASS
Remark: N/A is an abbreviation for Not Applicable. Measurement Uncertainty is not taken into account for conformity statement		

1.4.Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Hardware Version	Software Version
ADAPTER	VOOC	VC54HBCH	/	/

1.5.Test mode

The special RF test software was used to control EUT work in Continuous WIFI TX mode, and select test channel, wireless mode.

Test mode	Low channel	Middle channel	High channel
802.11b	2412MHz	2437MHz	2462MHz
802.11g	2412MHz	2437MHz	2462MHz
802.11n20	2412MHz	2437MHz	2462MHz
802.11n40	2422MHz	2437MHz	2452MHz
Note: Only the worst Data 1Mbps/6Mbps/6.5Mbps Record in the report			

1.6.Block Diagram


Conducted Emission



Radiated Emission



RF Conducted Test

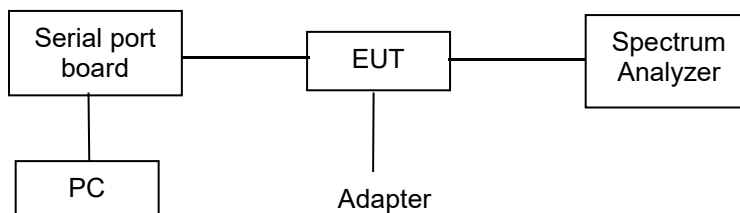

1.7. Test Conditions

Category	Normal Conditions	Extreme Conditions
Temperature range	15-35°C	N/A
Humidity range	20-75%	N/A
Pressure range	86-106kPa	N/A
Power supply	DC 5V	N/A
Note: N/A is an abbreviation for Not Applicable.		

1.8. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for radio frequency	$\pm 7 \times 10^{-8}$	
Conducted Emissions (150kHz~30MHz)	$\pm 2.54\text{dB}$	
Radiated Emission(9KHz~30MHz)	$\pm 1.6\text{ dB}$	
Radiated Emission(30MHz~1GHz)	Vertical: $\pm 4.14\text{dB}$ Horizontal: $\pm 4.25\text{dB}$	
Radiated Emission(1GHz~6GHz)	$\pm 3.9\text{dB}$	
Radiated Emission(6GHz~18GHz)	$\pm 4.3\text{dB}$	
Radiated Emission(18GHz~40GHz)	$\pm 3.38\text{dB}$	
Uncertainty for conducted RF Power	$\pm 0.20\text{dB}$	
Conducted spurious emissions	$\pm 0.24\text{dB}$	
Uncertainty for temperature	0.6°C	
Uncertainty for humidity	1%	
Bandwidth	$\pm 1.5 \times 10^{-6}$	
Time	$\pm 2\%$	
Duty Cycle	$\pm 2\%$	
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%		

1.9. Test Facility

Site Description		
Name of Firm	:	Shenzhen BKC Testing Co., Ltd.
Site Location	:	Room 103, 1/F, Huaya Building, Huaya Industrial Park, Longhua Community, Longhua District, Shenzhen, Guangdong, China.
ISED CAB identifier	:	CN0188
ISED Company Number	:	34333
FCC Designation Number	:	CN1416
FCC Test Firm Registration Number	:	701543

1.10. Test Equipment

Conducted Test Site

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	102762	Mar. 11. 2026	Mar. 10. 2027
2	EMI Test Receiver	R&S	ESCI	101424	Mar. 11. 2026	Mar. 10. 2027
3	Rf cables	HTEC	HCE 2M-CE	N/A	Mar. 11. 2026	Mar. 10. 2027
4	Coupling/ Decoupling Network	Diamond	CX210	N/A	Mar. 11. 2026	Mar. 10. 2027
5	CE Testing software	EZ	EZ-EMC	/	/	/

Radiated Test Site(Below 1G and Above 1G)

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Antenna	Schwarzbeck	VULB 9168	01321	Mar. 20. 2025	Mar. 19. 2028
2	EMI Test Receiver	R&S	ESRP	101478	Mar. 11. 2026	Mar. 10. 2027
3	Preamplifier	HP	8447D	2727A05345	Mar. 11. 2026	Mar. 10. 2027
4	Double Ridged Broadband	SCHWARZBECK	BBHA 9120D	02621	Mar. 11. 2026	Mar. 19. 2028
5	Preamplifier	Schwarzbeck	BBV 9718D	00041	Mar. 11. 2026	Mar. 10. 2027
6	Rf cables	HUBER+SUHNER	8M-RE	N/A	Mar. 11. 2026	Mar. 10. 2027
7	Rf cables	HUBER+SUHNER	1.5M-RE	N/A	Mar. 11. 2026	Mar. 10. 2027
8	Rf cables	HUBER+SUHNER	1.5M-AP-RE	N/A	Mar. 11. 2026	Mar. 10. 2027
9	Loop antenna	ANRF	ANRF-6603	091802	Mar. 09. 2025	Mar. 10. 2027
10	Spectrum analyzer	R&S	FSP40	200061	Mar. 11. 2026	Mar. 10. 2027
11	Double Ridged Broadband Horn Antenna	COM-POWER	AH-1840	10100009	Mar. 11. 2026	Mar. 10. 2027
12	Spectrum	Agilent	N9020A	MY50510311	Mar. 11. 2026	Mar. 10. 2027
13	Band Stop Filter	Bafang	BSF5G	2024052610	Mar. 11. 2026	Mar. 10. 2027
14	RE Testing software	EZ	EZ-EMC	/		/

RF Test Site

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum	Agilent	N9020A	MY50510311	Mar. 11. 2026	Mar. 10. 2027
2	Vector source	Agilent	N5182A	MY47420223	Mar. 11. 2026	Mar. 10. 2027
3	All instrument	Rohde & Schwarz	CMW 500	101131	Mar. 11. 2026	Mar. 10. 2027
4	control unit	MW	MW100-RFCB	MW200411B K-34	/	Mar. 10. 2027
5	RF Testing software	MW	MTS 8310	/	/	/
6	Spectrum analyzer	R&S	FSP40	200061	Mar. 11. 2026	Mar. 10. 2027

Test software

Software name	RF Testing software
Software version	2.0.0.0
Software name	RE Testing software
Software version	EMEC-03A2 RE+
Software name	CE Testing software
Software version	EMEC-3A1+



2. Conducted emission at the mains terminals test


2.1.Limit

Test Requirement:	FCC Part15 C Section 15.207, RSS-Gen 8.8
Test Method:	ANSI C63.10-2020+Cor.1-2023
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

2.2.Test Setup

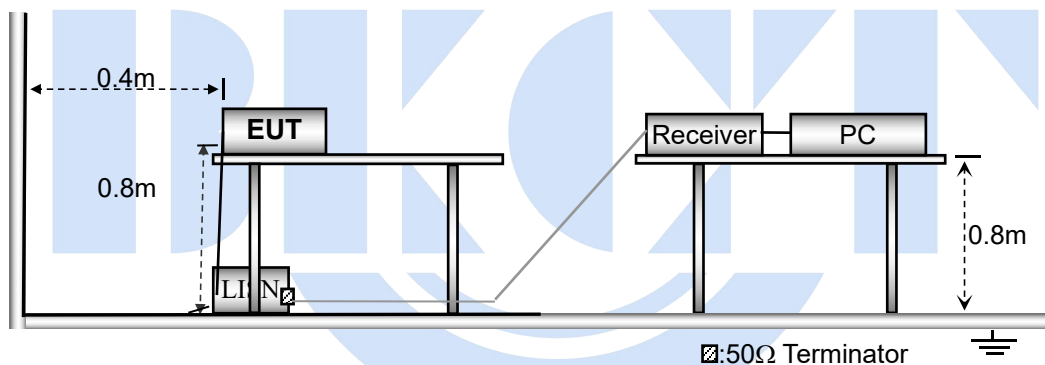


2.3.Test Procedure

1. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. LISN at least 80 cm from nearest part of EUT chassis.
5. For the actual test configuration, please refer to the related Item - EUT Test Photos.

2.4. Test Result

Model:1010


Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

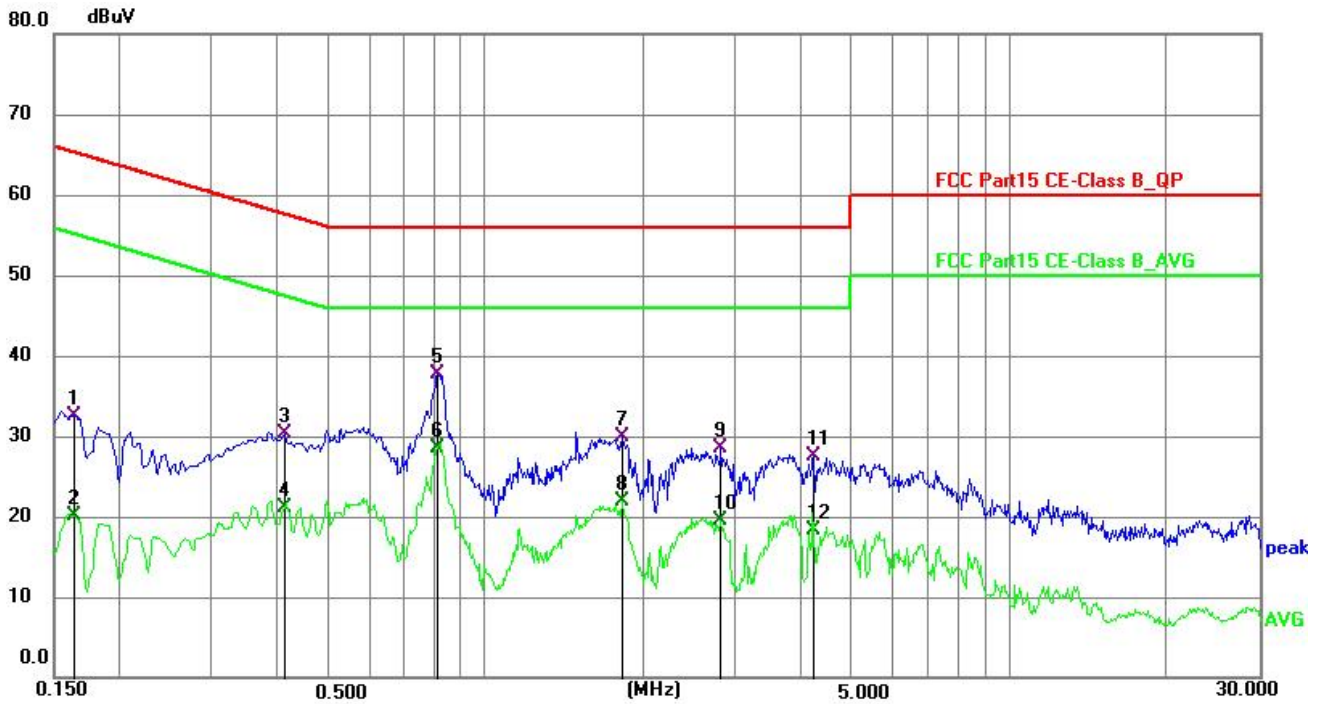

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1635	22.81	9.78	32.59	65.28	-32.69	QP	P	
2	0.1635	10.32	9.78	20.10	55.28	-35.18	AVG	P	
3	0.4109	20.48	9.77	30.25	57.63	-27.38	QP	P	
4	0.4109	11.26	9.77	21.03	47.63	-26.60	AVG	P	
5	0.8114	27.89	9.76	37.65	56.00	-18.35	QP	P	
6 *	0.8114	18.81	9.76	28.57	46.00	-17.43	AVG	P	
7	1.8240	20.19	9.76	29.95	56.00	-26.05	QP	P	
8	1.8240	12.16	9.76	21.92	46.00	-24.08	AVG	P	
9	2.8184	18.67	9.78	28.45	56.00	-27.55	QP	P	
10	2.8184	9.75	9.78	19.53	46.00	-26.47	AVG	P	
11	4.2270	17.60	9.81	27.41	56.00	-28.59	QP	P	
12	4.2270	8.56	9.81	18.37	46.00	-27.63	AVG	P	

Conducted Emission At The Mains Terminals Test Data


Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

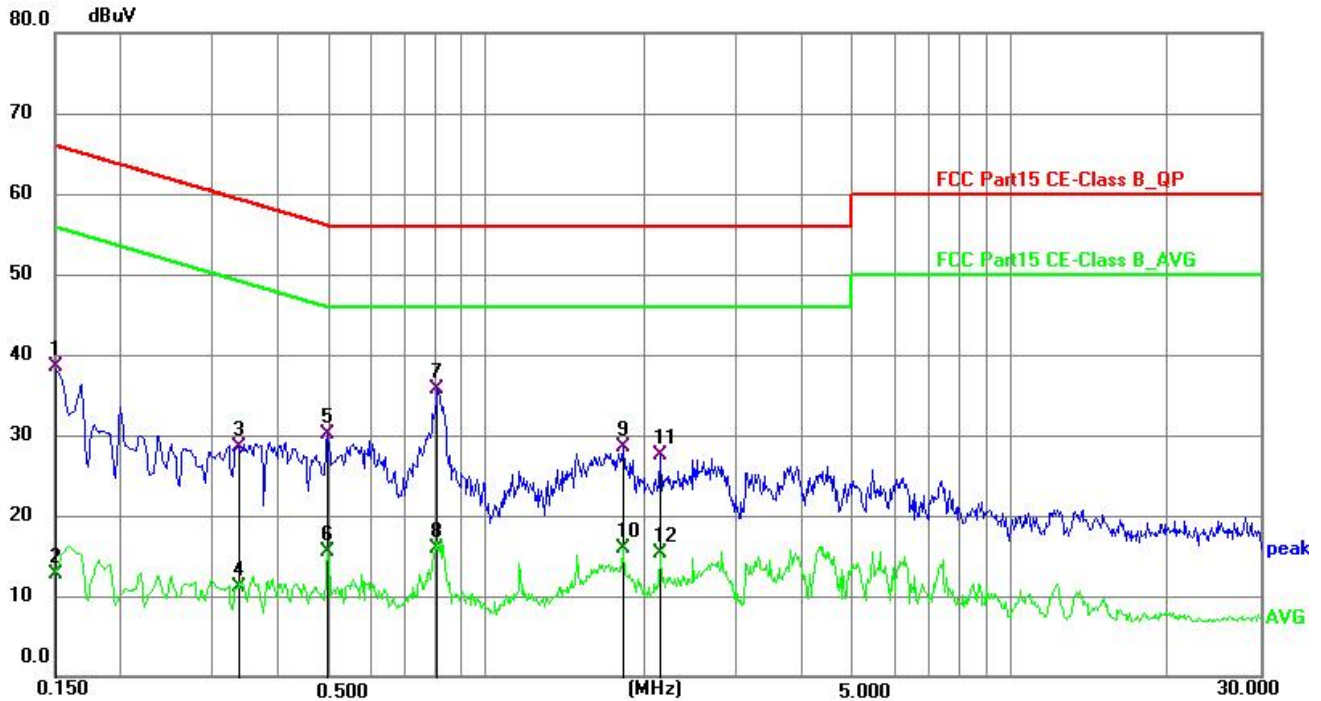

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	28.79	9.68	38.47	66.00	-27.53	QP	P	
2	0.1500	3.00	9.68	12.68	56.00	-43.32	AVG	P	
3	0.3345	18.74	9.70	28.44	59.34	-30.90	QP	P	
4	0.3345	1.40	9.70	11.10	49.34	-38.24	AVG	P	
5	0.4965	20.35	9.70	30.05	56.06	-26.01	QP	P	
6	0.4965	5.81	9.70	15.51	46.06	-30.55	AVG	P	
7 *	0.8070	26.09	9.69	35.78	56.00	-20.22	QP	P	
8	0.8070	6.27	9.69	15.96	46.00	-30.04	AVG	P	
9	1.8195	18.83	9.69	28.52	56.00	-27.48	QP	P	
10	1.8195	6.21	9.69	15.90	46.00	-30.10	AVG	P	
11	2.1525	17.87	9.69	27.56	56.00	-28.44	QP	P	
12	2.1525	5.61	9.69	15.30	46.00	-30.70	AVG	P	

Model:2610


Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

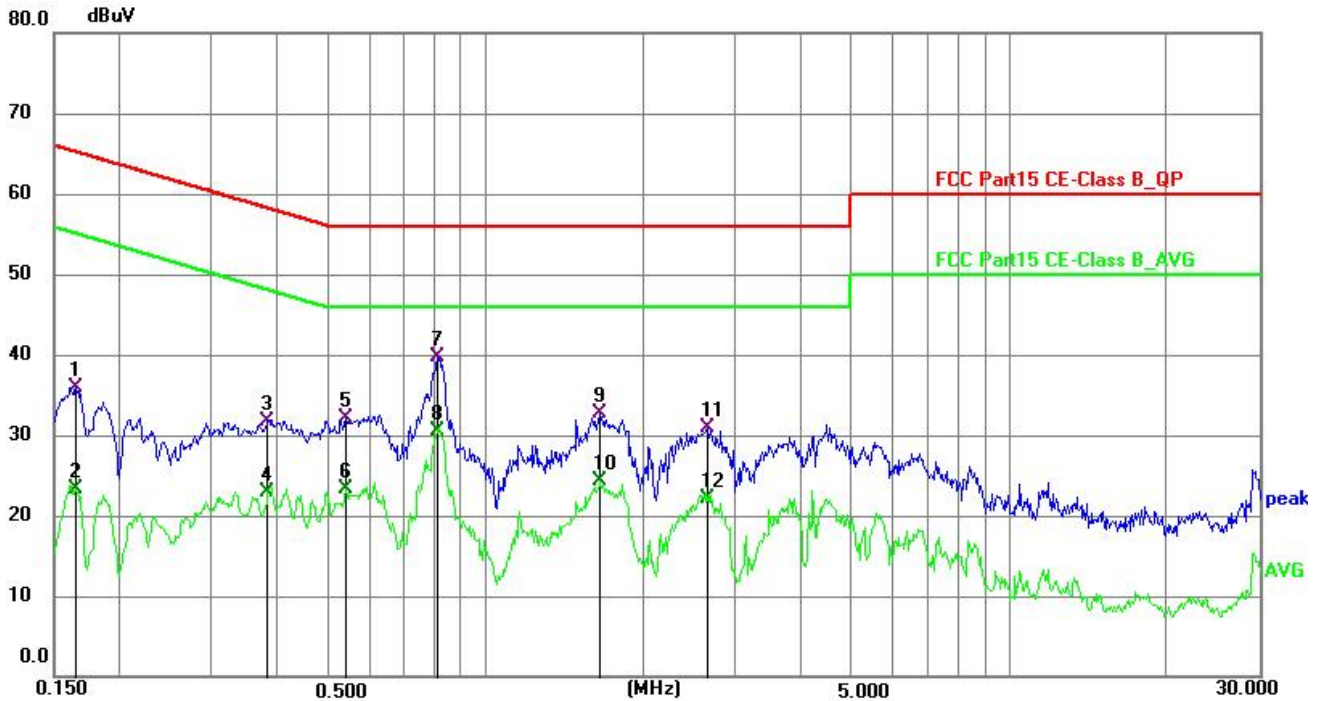

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1650	26.15	9.78	35.93	65.21	-29.28	QP	P	
2	0.1650	13.54	9.78	23.32	55.21	-31.89	AVG	P	
3	0.3830	22.00	9.77	31.77	58.21	-26.44	QP	P	
4	0.3830	13.12	9.77	22.89	48.21	-25.32	AVG	P	
5	0.5413	22.36	9.77	32.13	56.00	-23.87	QP	P	
6	0.5413	13.48	9.77	23.25	46.00	-22.75	AVG	P	
7	0.8114	29.89	9.76	39.65	56.00	-16.35	QP	P	
8 *	0.8114	20.81	9.76	30.57	46.00	-15.43	AVG	P	
9	1.6616	23.02	9.75	32.77	56.00	-23.23	QP	P	
10	1.6616	14.51	9.75	24.26	46.00	-21.74	AVG	P	
11	2.6564	21.11	9.78	30.89	56.00	-25.11	QP	P	
12	2.6564	12.37	9.78	22.15	46.00	-23.85	AVG	P	

Conducted Emission At The Mains Terminals Test Data


Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

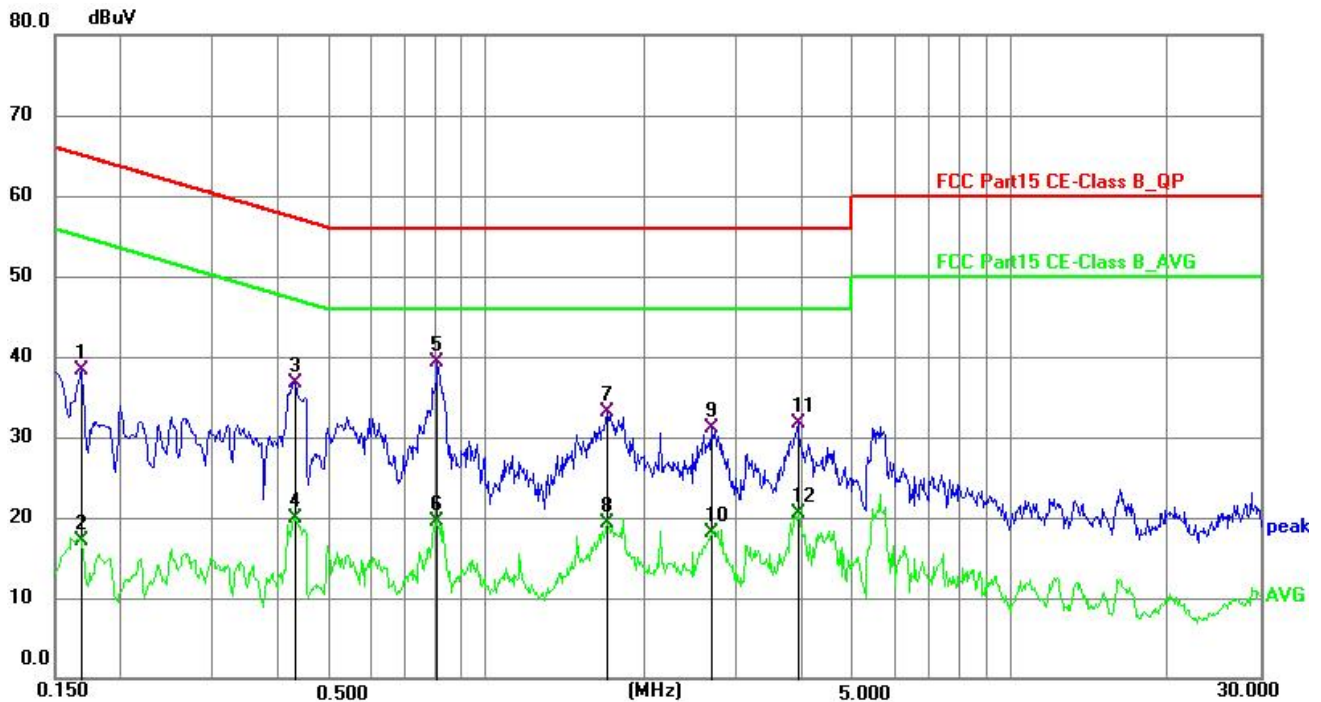

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1680	28.71	9.69	38.40	65.06	-26.66	QP	P	
2	0.1680	7.50	9.69	17.19	55.06	-37.87	AVG	P	
3	0.4289	27.04	9.70	36.74	57.27	-20.53	QP	P	
4	0.4289	10.26	9.70	19.96	47.27	-27.31	AVG	P	
5 *	0.8070	29.59	9.69	39.28	56.00	-16.72	QP	P	
6	0.8070	9.76	9.69	19.45	46.00	-26.55	AVG	P	
7	1.7070	23.39	9.69	33.08	56.00	-22.92	QP	P	
8	1.7070	9.58	9.69	19.27	46.00	-26.73	AVG	P	
9	2.6880	21.37	9.71	31.08	56.00	-24.92	QP	P	
10	2.6880	8.31	9.71	18.02	46.00	-27.98	AVG	P	
11	3.9390	21.92	9.73	31.65	56.00	-24.35	QP	P	
12	3.9390	10.75	9.73	20.48	46.00	-25.52	AVG	P	

Model:1561


Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

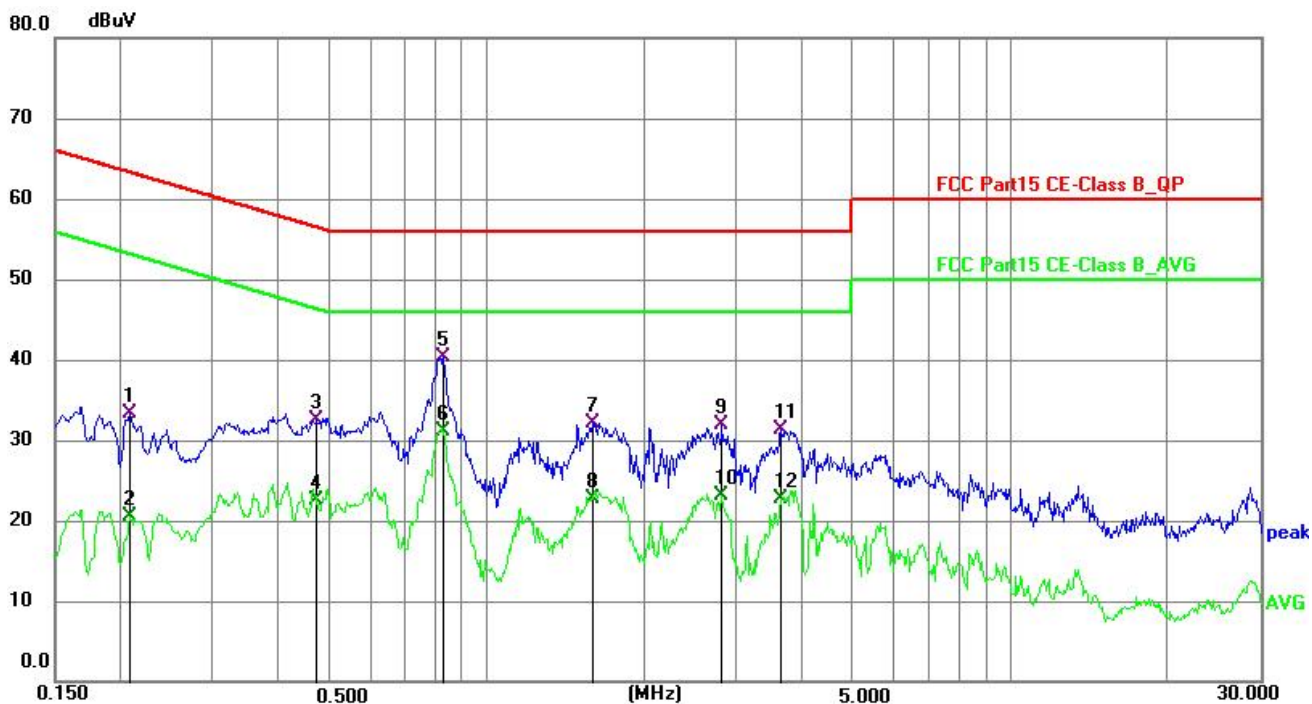

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2083	23.59	9.81	33.40	63.27	-29.87	QP	P	
2	0.2083	10.76	9.81	20.57	53.27	-32.70	AVG	P	
3	0.4737	22.79	9.77	32.56	56.45	-23.89	QP	P	
4	0.4737	12.70	9.77	22.47	46.45	-23.98	AVG	P	
5	0.8295	30.48	9.76	40.24	56.00	-15.76	QP	P	
6 *	0.8295	21.35	9.76	31.11	46.00	-14.89	AVG	P	
7	1.5987	22.32	9.75	32.07	56.00	-23.93	QP	P	
8	1.5987	12.92	9.75	22.67	46.00	-23.33	AVG	P	
9	2.8184	22.17	9.78	31.95	56.00	-24.05	QP	P	
10	2.8184	13.25	9.78	23.03	46.00	-22.97	AVG	P	
11	3.6419	21.46	9.80	31.26	56.00	-24.74	QP	P	
12	3.6419	13.00	9.80	22.80	46.00	-23.20	AVG	P	

Conducted Emission At The Mains Terminals Test Data


Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

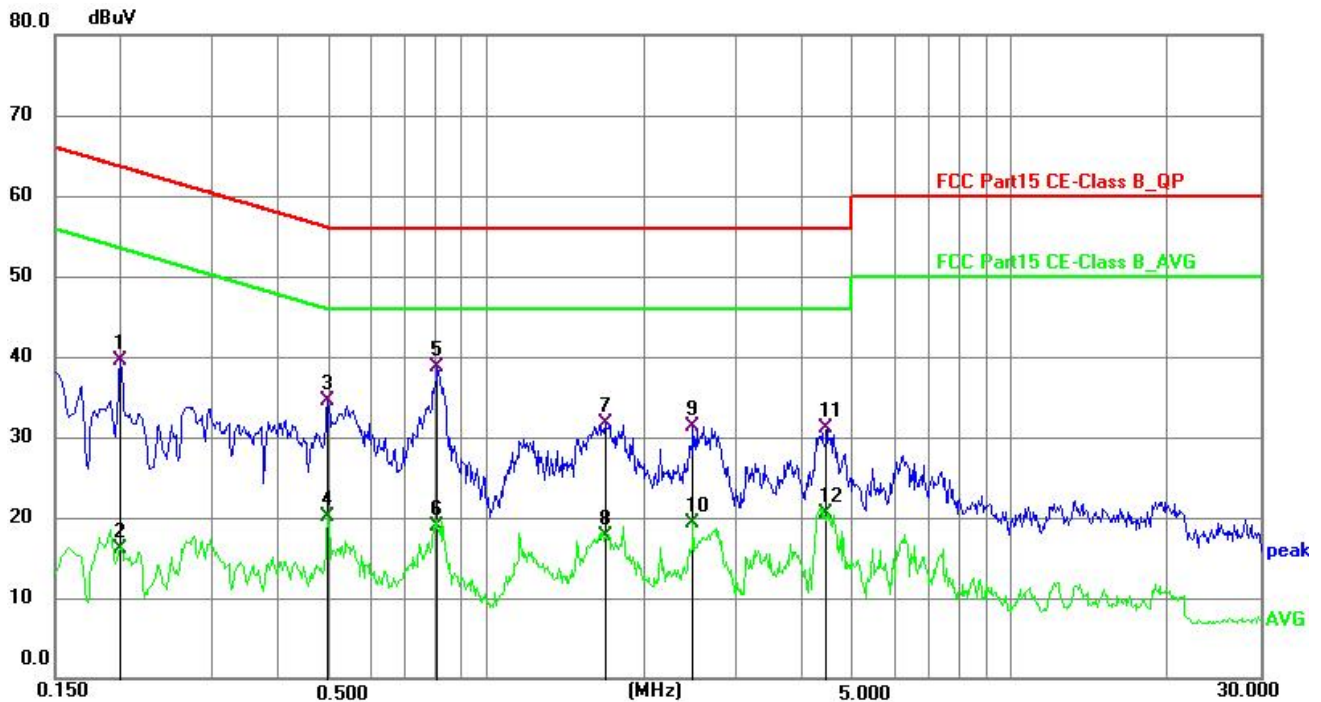

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1995	29.77	9.71	39.48	63.63	-24.15	QP	P	
2	0.1995	6.44	9.71	16.15	53.63	-37.48	AVG	P	
3	0.4964	24.85	9.70	34.55	56.06	-21.51	QP	P	
4	0.4964	10.31	9.70	20.01	46.06	-26.05	AVG	P	
5 *	0.8070	29.09	9.69	38.78	56.00	-17.22	QP	P	
6	0.8070	9.26	9.69	18.95	46.00	-27.05	AVG	P	
7	1.6890	22.06	9.69	31.75	56.00	-24.25	QP	P	
8	1.6890	8.06	9.69	17.75	46.00	-28.25	AVG	P	
9	2.4809	21.71	9.69	31.40	56.00	-24.60	QP	P	
10	2.4809	9.57	9.69	19.26	46.00	-26.74	AVG	P	
11	4.4699	21.47	9.72	31.19	56.00	-24.81	QP	P	
12	4.4699	10.76	9.72	20.48	46.00	-25.52	AVG	P	

Model:1562


Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

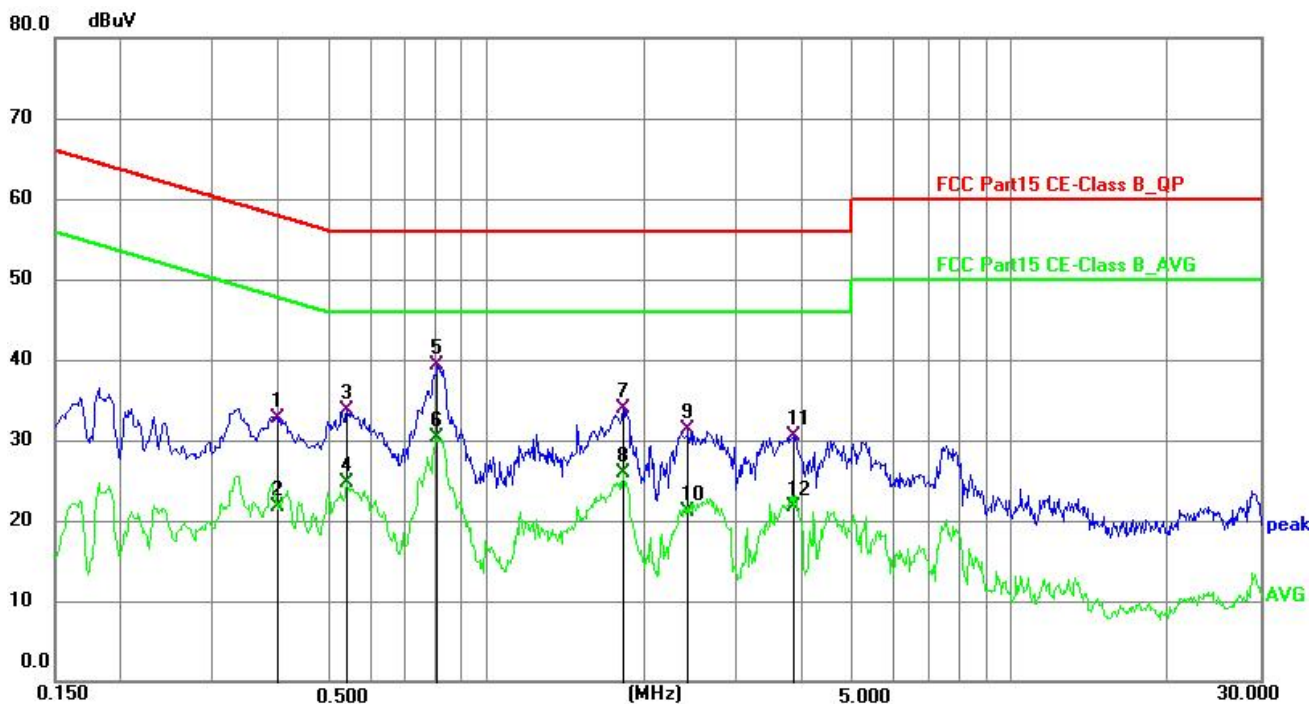

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3975	22.96	9.77	32.73	57.91	-25.18	QP	P	
2	0.3975	12.00	9.77	21.77	47.91	-26.14	AVG	P	
3	0.5413	23.86	9.77	33.63	56.00	-22.37	QP	P	
4	0.5413	14.98	9.77	24.75	46.00	-21.25	AVG	P	
5	0.8070	29.53	9.76	39.29	56.00	-16.71	QP	P	
6 *	0.8070	20.54	9.76	30.30	46.00	-15.70	AVG	P	
7	1.8240	24.19	9.76	33.95	56.00	-22.05	QP	P	
8	1.8240	16.16	9.76	25.92	46.00	-20.08	AVG	P	
9	2.4270	21.52	9.77	31.29	56.00	-24.71	QP	P	
10	2.4270	11.39	9.77	21.16	46.00	-24.84	AVG	P	
11	3.8580	20.66	9.81	30.47	56.00	-25.53	QP	P	
12	3.8580	11.91	9.81	21.72	46.00	-24.28	AVG	P	

Conducted Emission At The Mains Terminals Test Data


Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

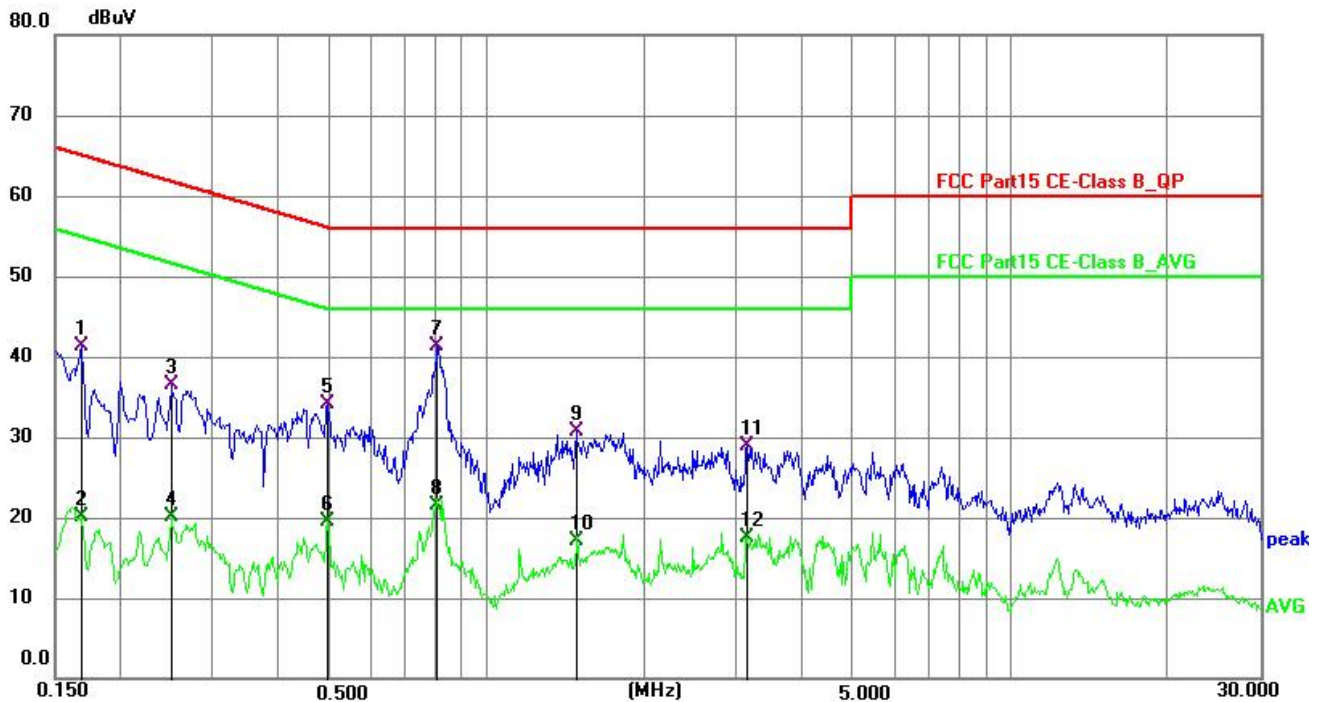

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1680	31.71	9.69	41.40	65.06	-23.66	QP	P	
2	0.1680	10.50	9.69	20.19	55.06	-34.87	AVG	P	
3	0.2489	26.76	9.71	36.47	61.79	-25.32	QP	P	
4	0.2489	10.38	9.71	20.09	51.79	-31.70	AVG	P	
5	0.4964	24.35	9.70	34.05	56.06	-22.01	QP	P	
6	0.4964	9.81	9.70	19.51	46.06	-26.55	AVG	P	
7 *	0.8070	31.59	9.69	41.28	56.00	-14.72	QP	P	
8	0.8070	11.76	9.69	21.45	46.00	-24.55	AVG	P	
9	1.4860	21.03	9.68	30.71	56.00	-25.29	QP	P	
10	1.4860	7.44	9.68	17.12	46.00	-28.88	AVG	P	
11	3.1469	19.13	9.71	28.84	56.00	-27.16	QP	P	
12	3.1469	7.77	9.71	17.48	46.00	-28.52	AVG	P	

Model:1563


Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

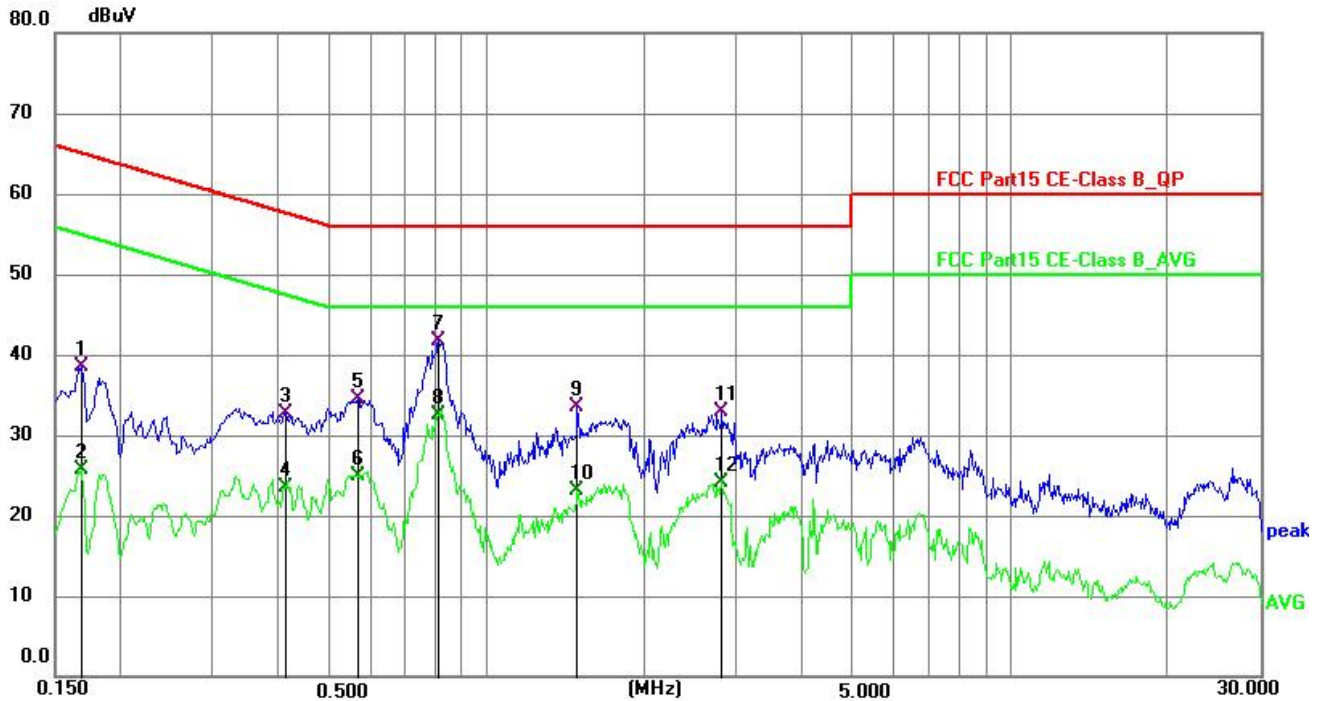

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1680	28.82	9.78	38.60	65.06	-26.46	QP	P	
2	0.1680	15.99	9.78	25.77	55.06	-29.29	AVG	P	
3	0.4107	22.98	9.77	32.75	57.63	-24.88	QP	P	
4	0.4107	13.76	9.77	23.53	47.63	-24.10	AVG	P	
5	0.5685	24.73	9.76	34.49	56.00	-21.51	QP	P	
6	0.5685	15.20	9.76	24.96	46.00	-21.04	AVG	P	
7	0.8114	31.89	9.76	41.65	56.00	-14.35	QP	P	
8 *	0.8114	22.80	9.76	32.56	46.00	-13.44	AVG	P	
9	1.4910	23.69	9.75	33.44	56.00	-22.56	QP	P	
10	1.4910	13.39	9.75	23.14	46.00	-22.86	AVG	P	
11	2.8184	23.17	9.78	32.95	56.00	-23.05	QP	P	
12	2.8184	14.25	9.78	24.03	46.00	-21.97	AVG	P	

Conducted Emission At The Mains Terminals Test Data

Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

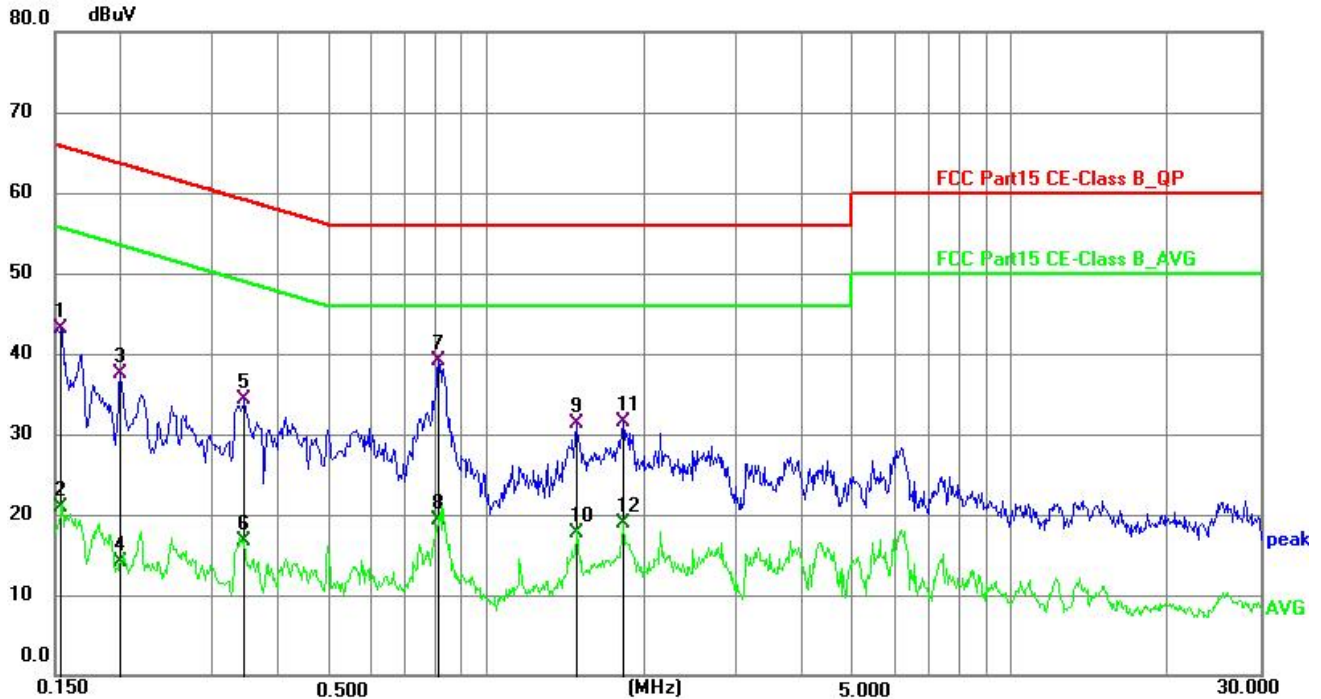


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1539	33.39	9.68	43.07	65.79	-22.72	QP	P	
2	0.1539	11.29	9.68	20.97	55.79	-34.82	AVG	P	
3	0.1995	27.77	9.71	37.48	63.63	-26.15	QP	P	
4	0.1995	4.44	9.71	14.15	53.63	-39.48	AVG	P	
5	0.3435	24.63	9.70	34.33	59.12	-24.79	QP	P	
6	0.3435	7.02	9.70	16.72	49.12	-32.40	AVG	P	
7 *	0.8114	29.38	9.69	39.07	56.00	-16.93	QP	P	
8	0.8114	9.54	9.69	19.23	46.00	-26.77	AVG	P	
9	1.4859	21.53	9.68	31.21	56.00	-24.79	QP	P	
10	1.4859	7.94	9.68	17.62	46.00	-28.38	AVG	P	
11	1.8189	21.83	9.69	31.52	56.00	-24.48	QP	P	
12	1.8189	9.21	9.69	18.90	46.00	-27.10	AVG	P	

Model:2616

Conducted Emission At The Mains Terminals Test Data


Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

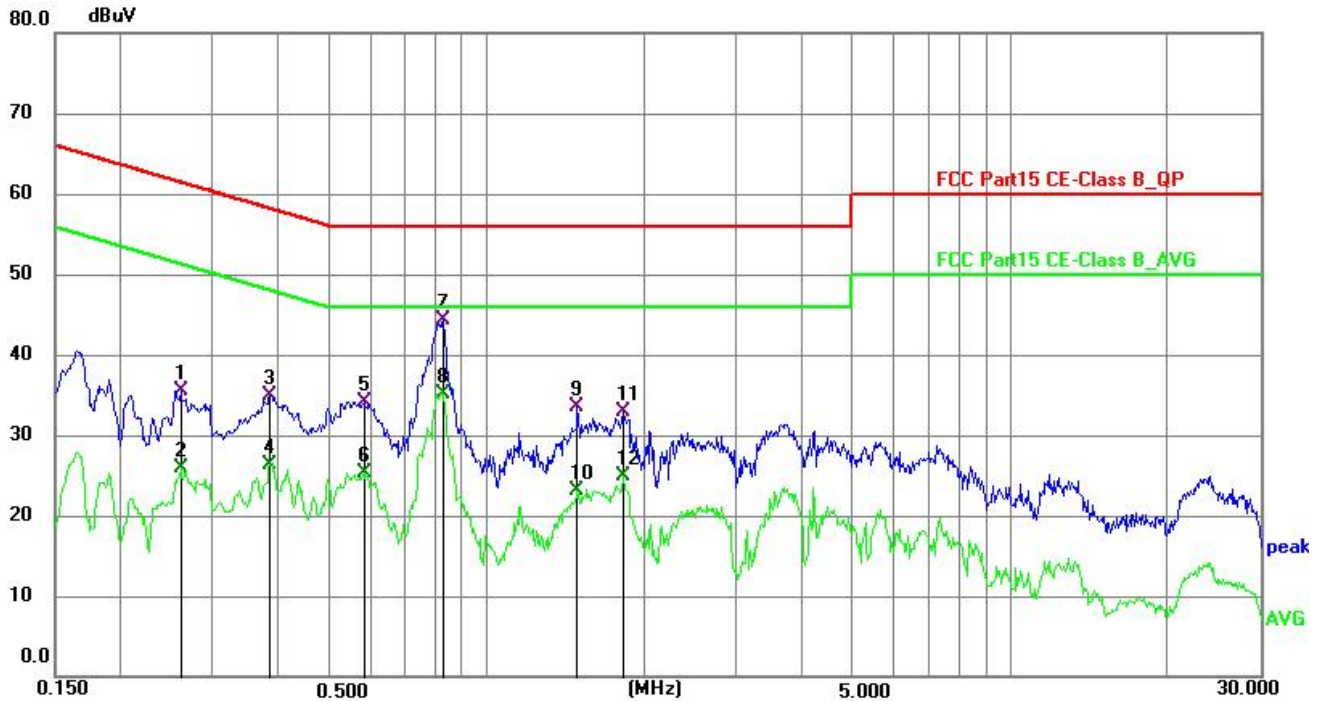

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Rerr	一键清晰	更多
1	0.2600	25.80	9.79	35.59	61.43	-25.84	QP	P			
2	0.2600	16.14	9.79	25.93	51.43	-25.50	AVG	P			
3	0.3840	25.20	9.77	34.97	58.19	-23.22	QP	P			
4	0.3840	16.51	9.77	26.28	48.19	-21.91	AVG	P			
5	0.5816	24.43	9.76	34.19	56.00	-21.81	QP	P			
6	0.5816	15.46	9.76	25.22	46.00	-20.78	AVG	P			
7	0.8295	34.48	9.76	44.24	56.00	-11.76	QP	P			
8 *	0.8295	25.35	9.76	35.11	46.00	-10.89	AVG	P			
9	1.4910	23.69	9.75	33.44	56.00	-22.56	QP	P			
10	1.4910	13.39	9.75	23.14	46.00	-22.86	AVG	P			
11	1.8240	23.19	9.76	32.95	56.00	-23.05	QP	P			
12	1.8240	15.16	9.76	24.92	46.00	-21.08	AVG	P			

Conducted Emission At The Mains Terminals Test Data

Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

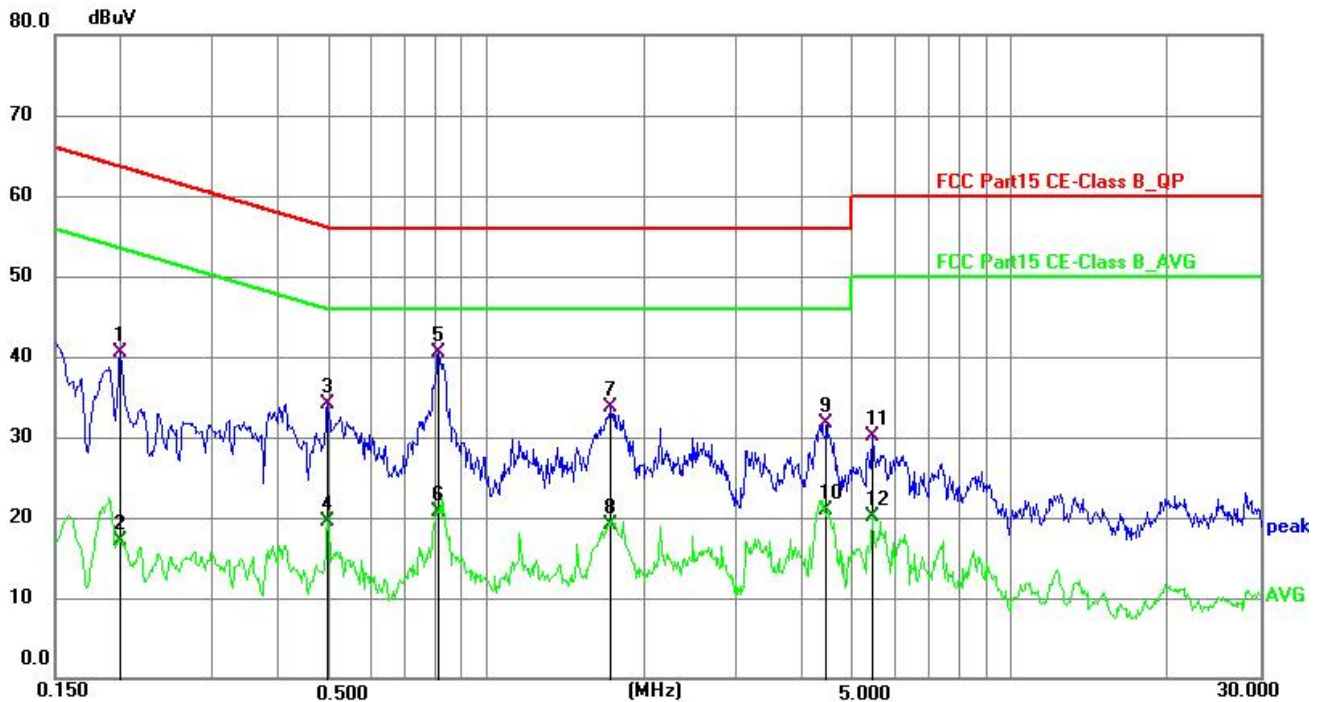


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1995	30.77	9.71	40.48	63.63	-23.15	QP	P	
2	0.1995	7.44	9.71	17.15	53.63	-36.48	AVG	P	
3	0.4964	24.35	9.70	34.05	56.06	-22.01	QP	P	
4	0.4964	9.81	9.70	19.51	46.06	-26.55	AVG	P	
5 *	0.8114	30.88	9.69	40.57	56.00	-15.43	QP	P	
6	0.8114	11.04	9.69	20.73	46.00	-25.27	AVG	P	
7	1.7295	24.07	9.69	33.76	56.00	-22.24	QP	P	
8	1.7295	9.48	9.69	19.17	46.00	-26.83	AVG	P	
9	4.4699	21.97	9.72	31.69	56.00	-24.31	QP	P	
10	4.4699	11.26	9.72	20.98	46.00	-25.02	AVG	P	
11	5.4600	20.47	9.72	30.19	60.00	-29.81	QP	P	
12	5.4600	10.33	9.72	20.05	50.00	-29.95	AVG	P	

Model:2150

Conducted Emission At The Mains Terminals Test Data


Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

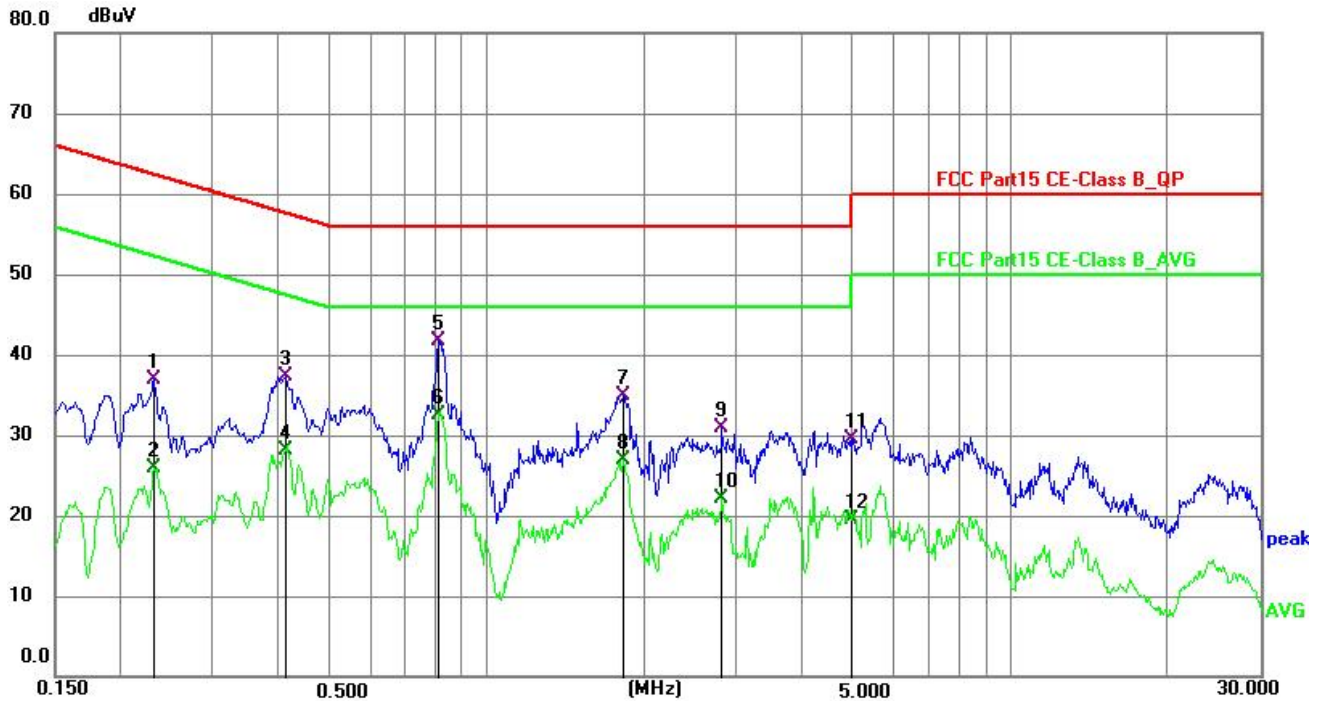

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2310	27.04	9.80	36.84	62.41	-25.57	QP	P	
2	0.2310	16.15	9.80	25.95	52.41	-26.46	AVG	P	
3	0.4107	27.48	9.77	37.25	57.63	-20.38	QP	P	
4	0.4107	18.26	9.77	28.03	47.63	-19.60	AVG	P	
5	0.8114	31.89	9.76	41.65	56.00	-14.35	QP	P	
6 *	0.8114	22.80	9.76	32.56	46.00	-13.44	AVG	P	
7	1.8240	25.19	9.76	34.95	56.00	-21.05	QP	P	
8	1.8240	17.16	9.76	26.92	46.00	-19.08	AVG	P	
9	2.8184	21.17	9.78	30.95	56.00	-25.05	QP	P	
10	2.8184	12.25	9.78	22.03	46.00	-23.97	AVG	P	
11	5.0010	19.63	9.81	29.44	60.00	-30.56	QP	P	
12	5.0010	9.75	9.81	19.56	50.00	-30.44	AVG	P	

Conducted Emission At The Mains Terminals Test Data


Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

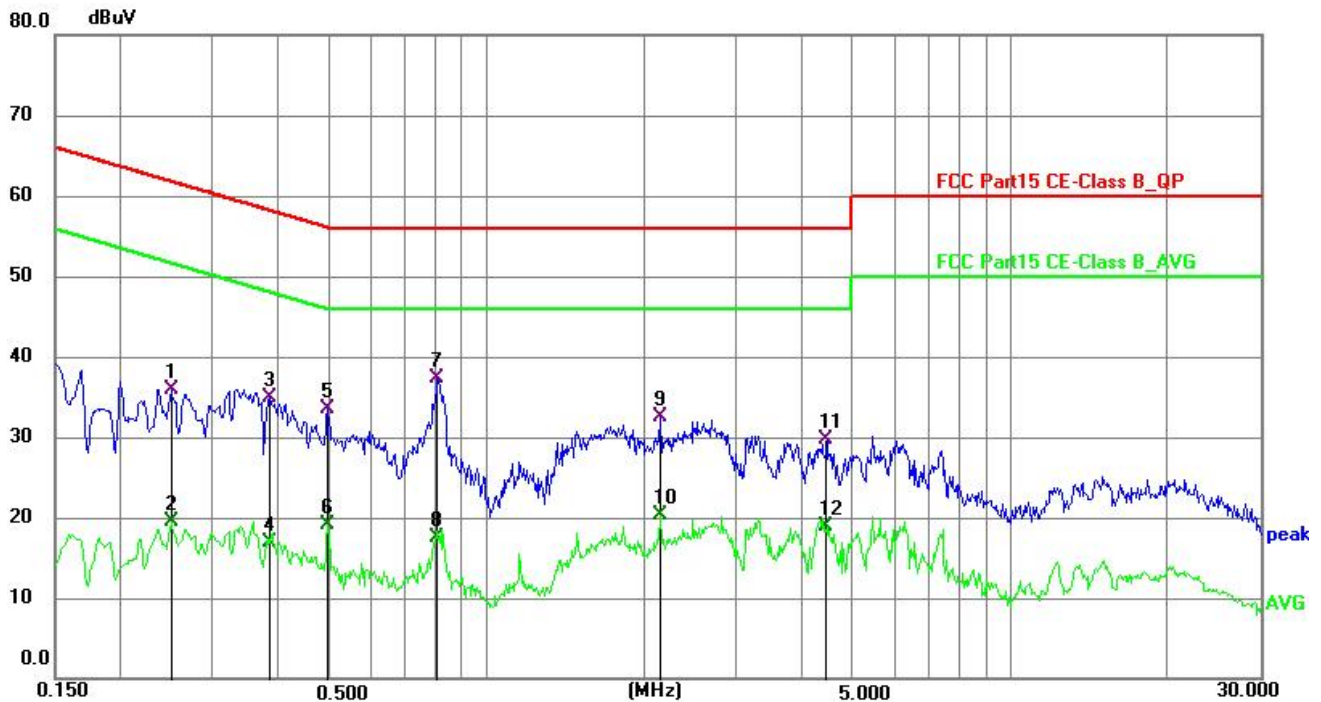

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2489	26.26	9.71	35.97	61.79	-25.82	QP	P	
2	0.2489	9.88	9.71	19.59	51.79	-32.20	AVG	P	
3	0.3840	25.30	9.70	35.00	58.19	-23.19	QP	P	
4	0.3840	7.27	9.70	16.97	48.19	-31.22	AVG	P	
5	0.4964	23.85	9.70	33.55	56.06	-22.51	QP	P	
6	0.4964	9.31	9.70	19.01	46.06	-27.05	AVG	P	
7 *	0.8070	27.59	9.69	37.28	56.00	-18.72	QP	P	
8	0.8070	7.76	9.69	17.45	46.00	-28.55	AVG	P	
9	2.1524	22.87	9.69	32.56	56.00	-23.44	QP	P	
10	2.1524	10.61	9.69	20.30	46.00	-25.70	AVG	P	
11	4.4699	19.97	9.72	29.69	56.00	-26.31	QP	P	
12	4.4699	9.26	9.72	18.98	46.00	-27.02	AVG	P	

Model:2700


Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

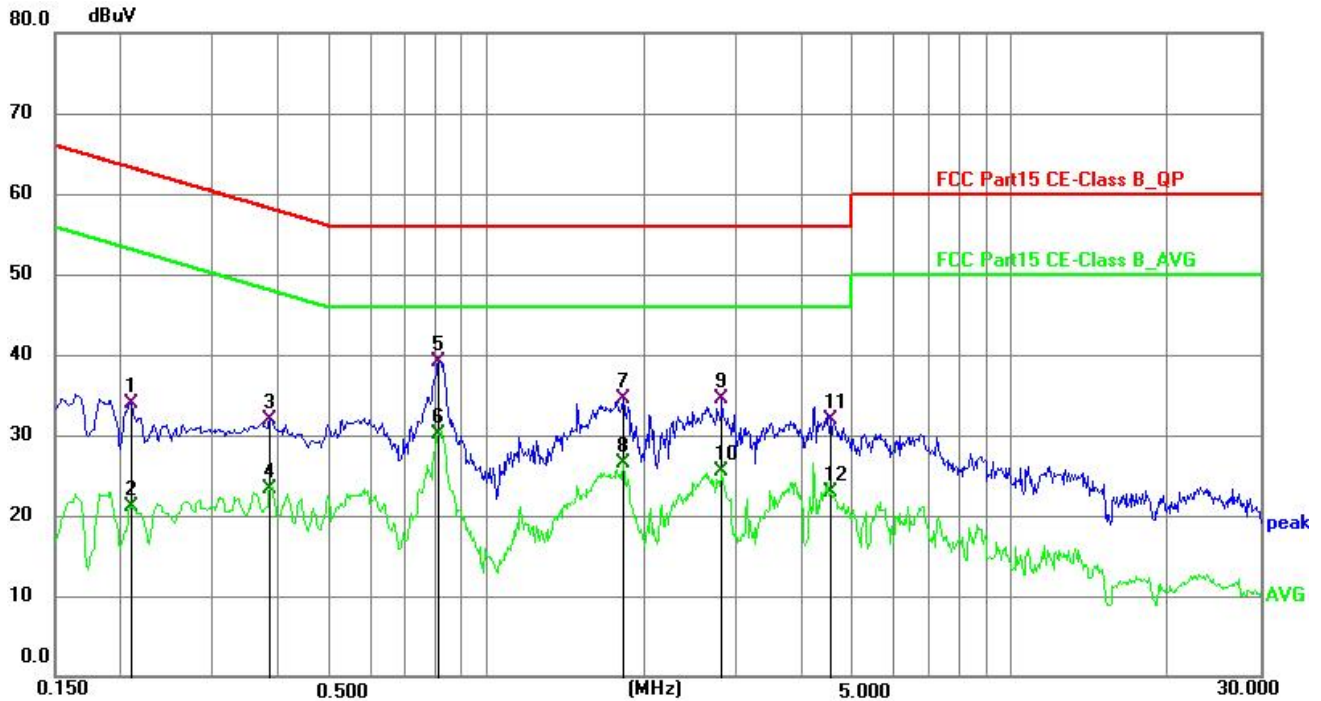

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2084	24.12	9.81	33.93	63.27	-29.34	QP	P	
2	0.2084	11.38	9.81	21.19	53.27	-32.08	AVG	P	
3	0.3840	22.20	9.77	31.97	58.19	-26.22	QP	P	
4	0.3840	13.51	9.77	23.28	48.19	-24.91	AVG	P	
5	0.8114	29.39	9.76	39.15	56.00	-16.85	QP	P	
6 *	0.8114	20.31	9.76	30.07	46.00	-15.93	AVG	P	
7	1.8240	24.69	9.76	34.45	56.00	-21.55	QP	P	
8	1.8240	16.66	9.76	26.42	46.00	-19.58	AVG	P	
9	2.8184	24.67	9.78	34.45	56.00	-21.55	QP	P	
10	2.8184	15.75	9.78	25.53	46.00	-20.47	AVG	P	
11	4.5373	22.06	9.80	31.86	56.00	-24.14	QP	P	
12	4.5373	13.13	9.80	22.93	46.00	-23.07	AVG	P	

Conducted Emission At The Mains Terminals Test Data

Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	n20(2462MHz)

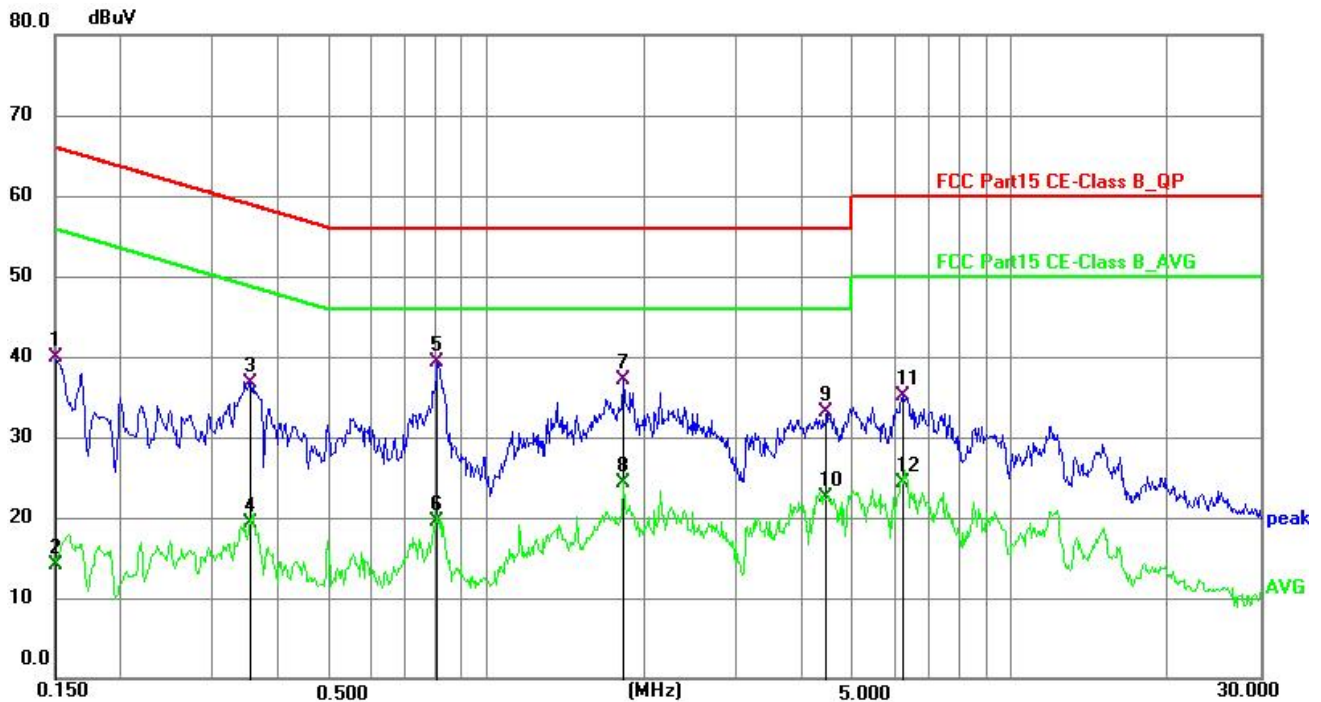

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	30.29	9.68	39.97	66.00	-26.03	QP	P	
2	0.1500	4.50	9.68	14.18	56.00	-41.82	AVG	P	
3	0.3523	27.02	9.70	36.72	58.91	-22.19	QP	P	
4	0.3523	9.66	9.70	19.36	48.91	-29.55	AVG	P	
5 *	0.8070	29.59	9.69	39.28	56.00	-16.72	QP	P	
6	0.8070	9.76	9.69	19.45	46.00	-26.55	AVG	P	
7	1.8186	27.33	9.69	37.02	56.00	-18.98	QP	P	
8	1.8186	14.71	9.69	24.40	46.00	-21.60	AVG	P	
9	4.4699	23.47	9.72	33.19	56.00	-22.81	QP	P	
10	4.4699	12.76	9.72	22.48	46.00	-23.52	AVG	P	
11	6.2294	25.49	9.71	35.20	60.00	-24.80	QP	P	
12	6.2294	14.64	9.71	24.35	50.00	-25.65	AVG	P	

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.

3. Radiated Spurious Emissions

3.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247,RSS-247 5.5&RSS-Gen 8.9

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02;
ANSI C63.10-2020+Cor.1-2023

Test Result: PASS

Measurement Distance: 3m

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$


3.2. Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

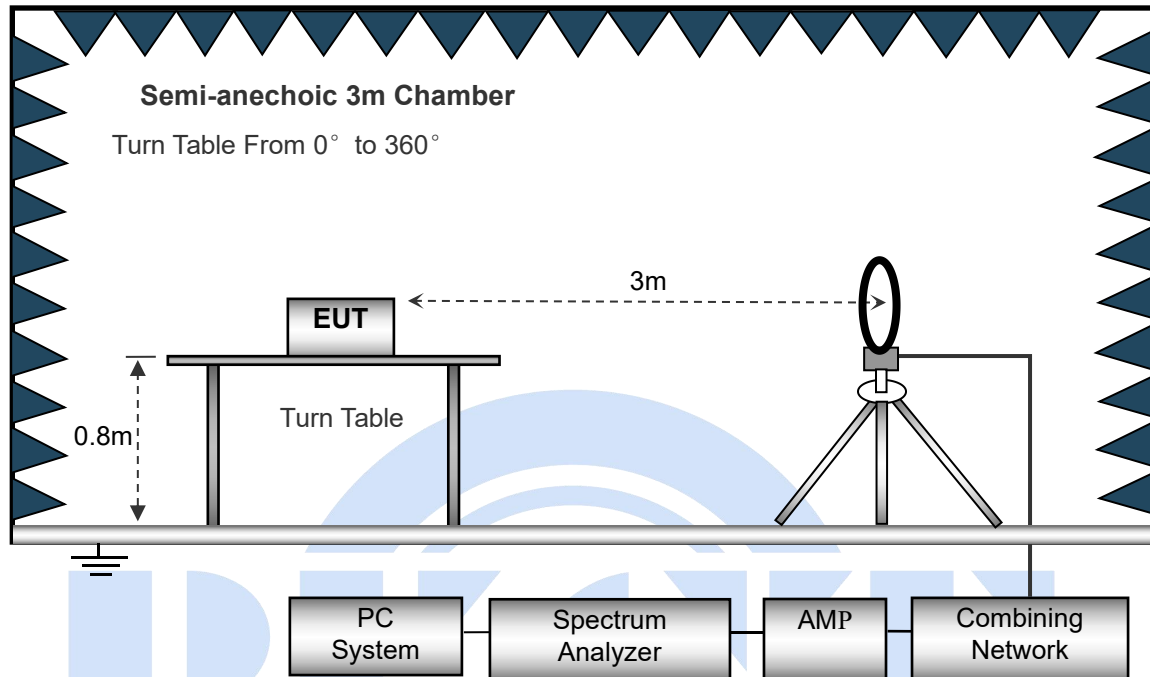

The test setup for emission measurement from 30 MHz to 1 GHz.

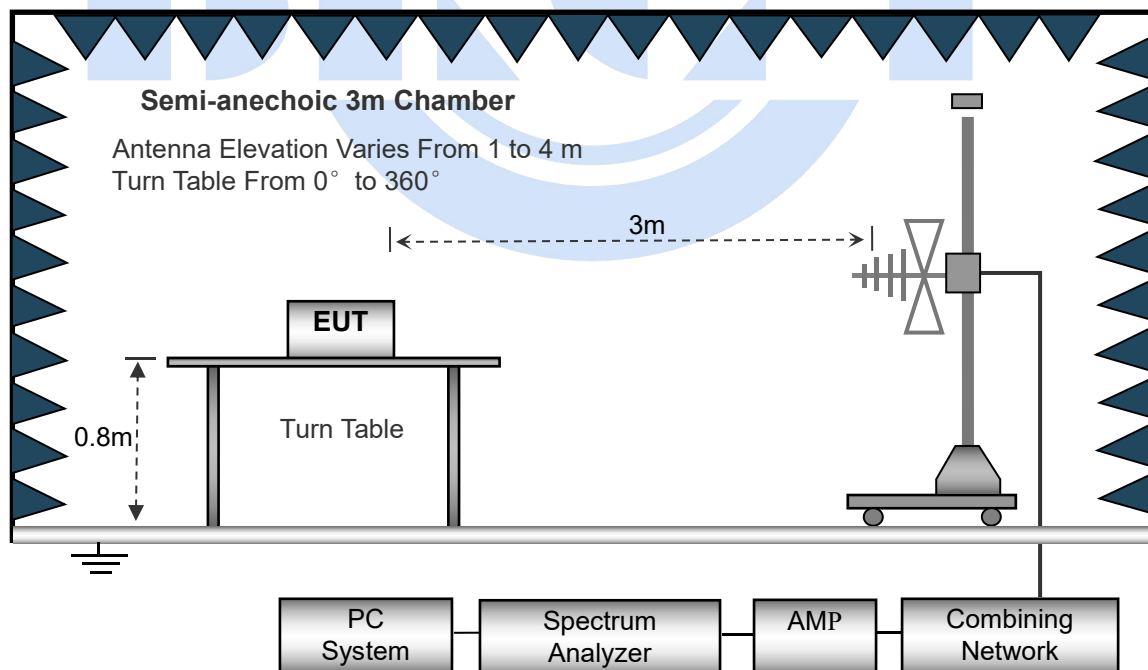

The test setup for emission measurement above 1 GHz.

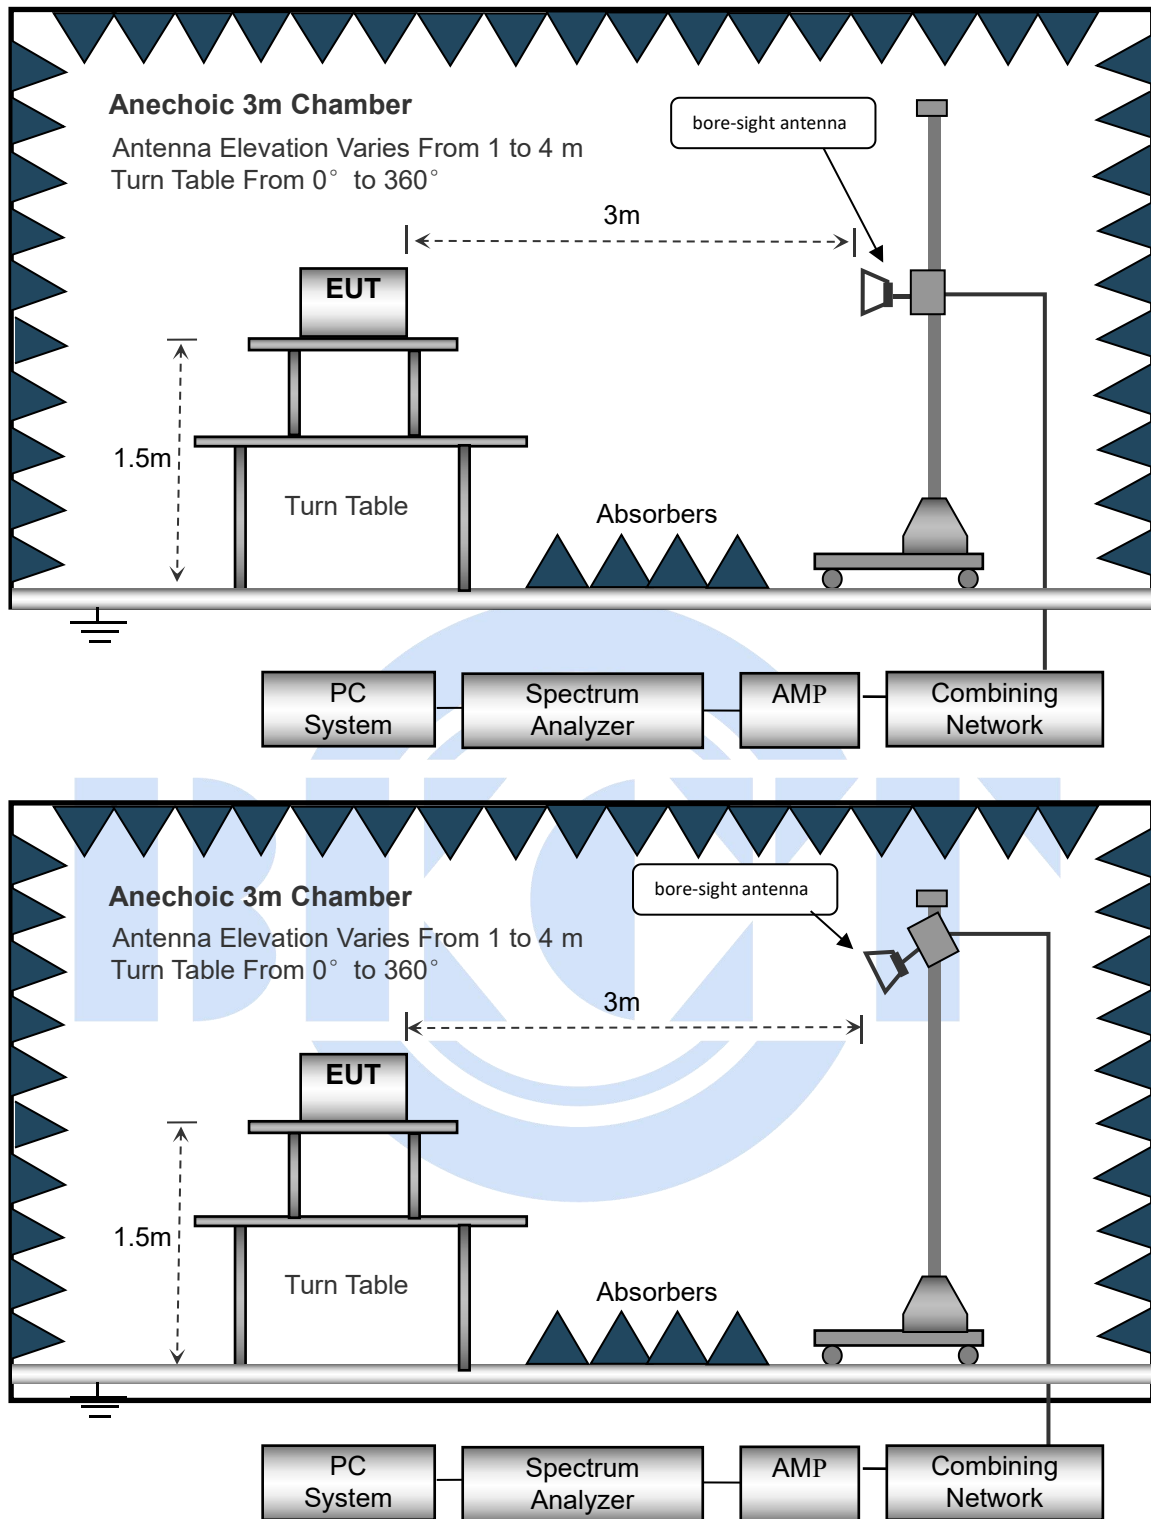

3.3. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high - pass filter is used during radiated emissions above 1GHz measurement.



3.4. Test Result

Test Frequency: 9KHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 1GHz


Model:1010

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	57.3923	33.82	-12.65	21.17	40.00	-18.83	QP
2	72.3375	35.99	-15.12	20.87	40.00	-19.13	QP
3	143.8295	41.19	-12.73	28.46	43.50	-15.04	QP
4	176.8875	42.70	-14.05	28.65	43.50	-14.85	QP
5	216.7828	52.28	-15.75	36.53	46.00	-9.47	QP
6 *	397.6334	51.28	-10.64	40.64	46.00	-5.36	QP

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)

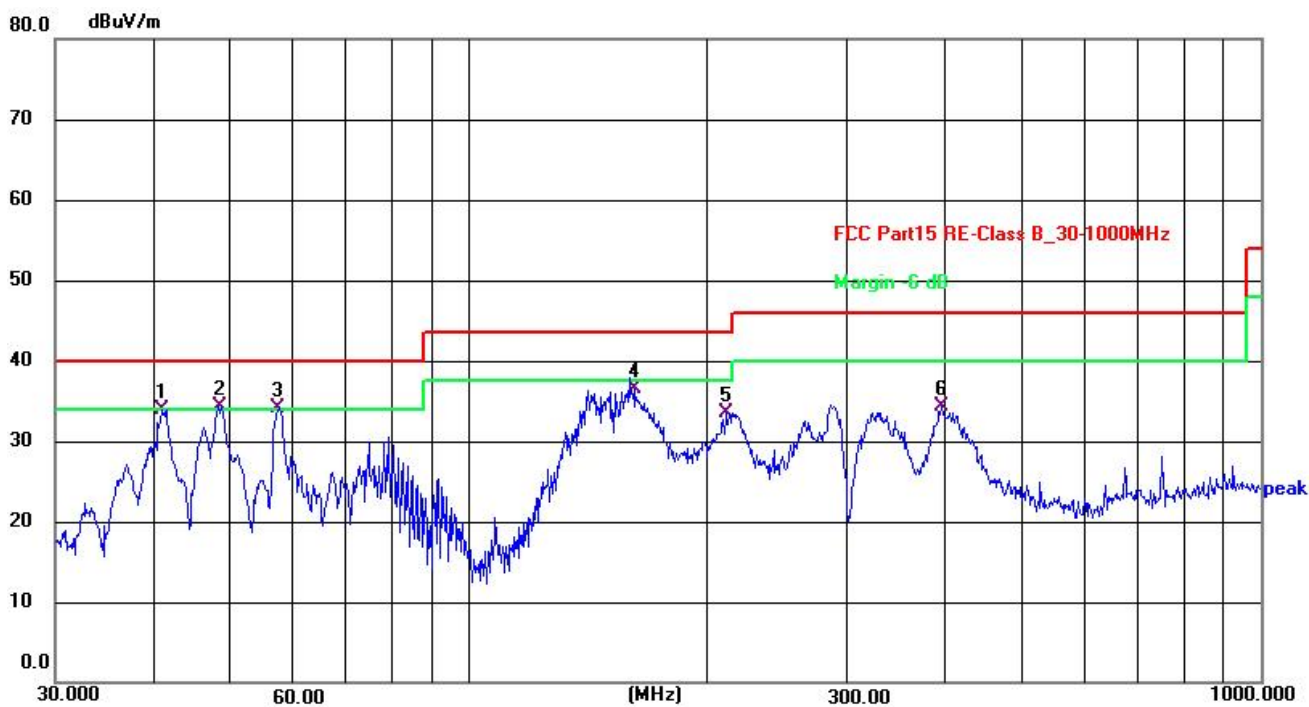

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.8446	45.69	-11.73	33.96	40.00	-6.04	QP
2 *	48.6719	46.33	-12.02	34.31	40.00	-5.69	QP
3 !	57.5939	46.72	-12.67	34.05	40.00	-5.95	QP
4	161.4742	48.81	-12.35	36.46	43.50	-7.04	QP
5	211.5265	49.38	-15.81	33.57	43.50	-9.93	QP
6	394.8545	44.99	-10.69	34.30	46.00	-11.70	QP


Model:2610

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	57.1914	37.90	-12.64	25.26	40.00	-14.74	QP
2	84.7020	37.26	-16.43	20.83	40.00	-19.17	QP
3	141.8262	39.12	-12.88	26.24	40.00	-13.76	QP
4	225.4660	44.69	-15.52	29.17	40.00	-10.83	QP
5 *	397.6333	47.28	-10.64	36.64	47.00	-10.36	QP
6	672.8442	36.36	-6.19	30.17	47.00	-16.83	QP

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)

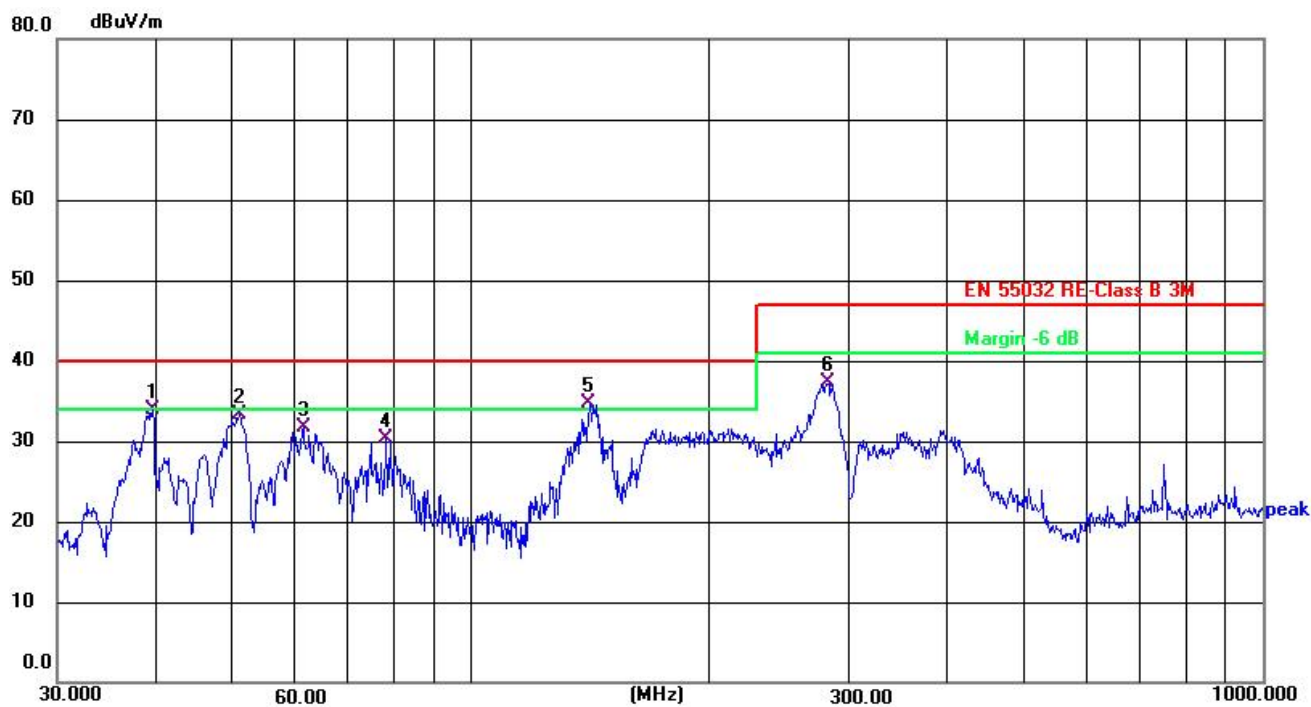

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.5756	45.61	-11.74	33.87	40.00	-6.13	QP
2	50.9420	45.33	-12.12	33.21	40.00	-6.79	QP
3	61.3462	44.75	-13.12	31.63	40.00	-8.37	QP
4	78.1388	46.26	-15.94	30.32	40.00	-9.68	QP
5 *	141.3296	47.63	-12.92	34.71	40.00	-5.29	QP
6	282.9849	50.53	-13.14	37.39	47.00	-9.61	QP

Model:1561

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	72.3375	38.99	-15.12	23.87	40.00	-16.13	QP
2	141.8262	45.12	-12.88	32.24	40.00	-7.76	QP
3	176.8874	46.20	-14.05	32.15	40.00	-7.85	QP
4 *	227.5310	50.76	-15.45	35.31	40.00	-4.69	QP
5	397.6333	45.78	-10.64	35.14	47.00	-11.86	QP
6	750.1082	34.34	-5.14	29.20	47.00	-17.80	QP


Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.8444	39.69	-11.73	27.96	40.00	-12.04	QP
2	48.6720	42.33	-12.02	30.31	40.00	-9.69	QP
3	78.9651	47.09	-16.02	31.07	40.00	-8.93	QP
4 *	150.5377	45.86	-12.30	33.56	40.00	-6.44	QP
5	219.8446	45.24	-15.71	29.53	40.00	-10.47	QP
6	394.8543	39.49	-10.69	28.80	47.00	-18.20	QP


Model:1562

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)

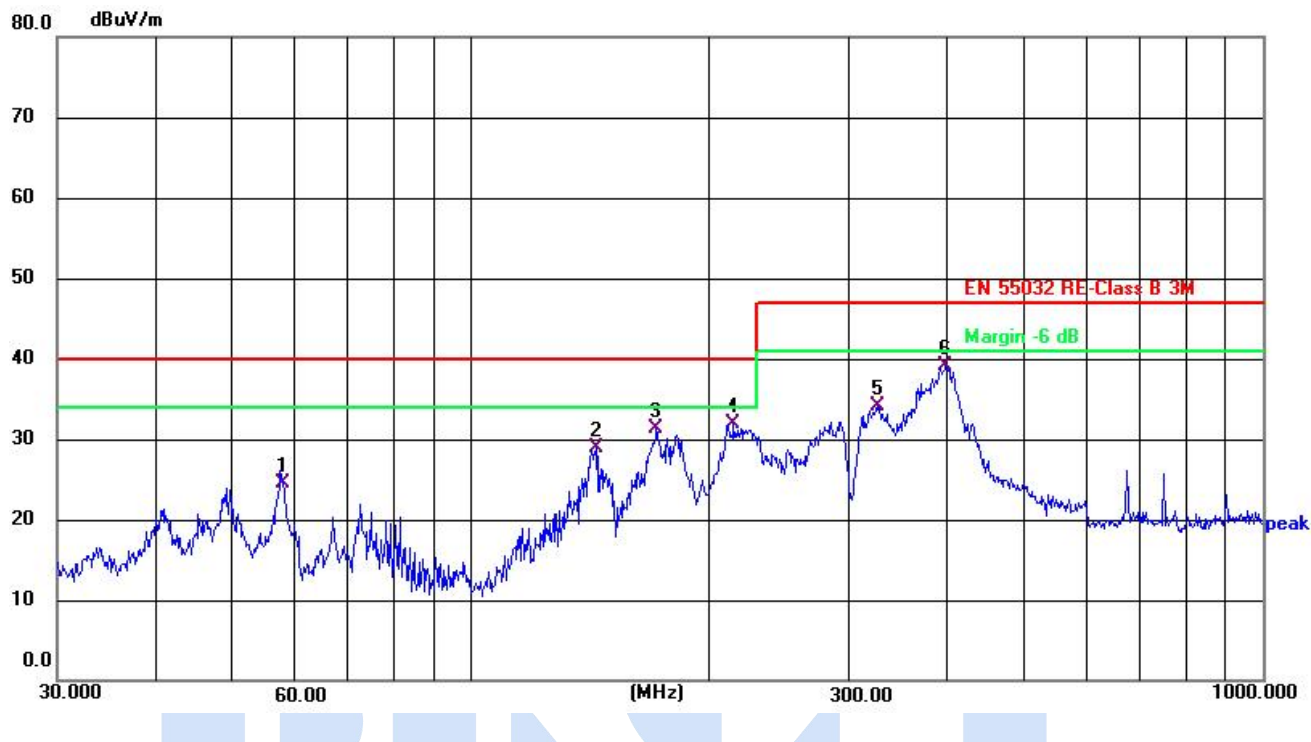

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	57.7961	37.26	-12.69	24.57	40.00	-15.43	QP
2	143.8291	41.69	-12.73	28.96	40.00	-11.04	QP
3	171.3925	44.62	-13.26	31.36	40.00	-8.64	QP
4	214.5141	47.66	-15.77	31.89	40.00	-8.11	QP
5	325.5957	46.12	-11.99	34.13	47.00	-12.87	QP
6 *	397.6333	49.78	-10.64	39.14	47.00	-7.86	QP

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)

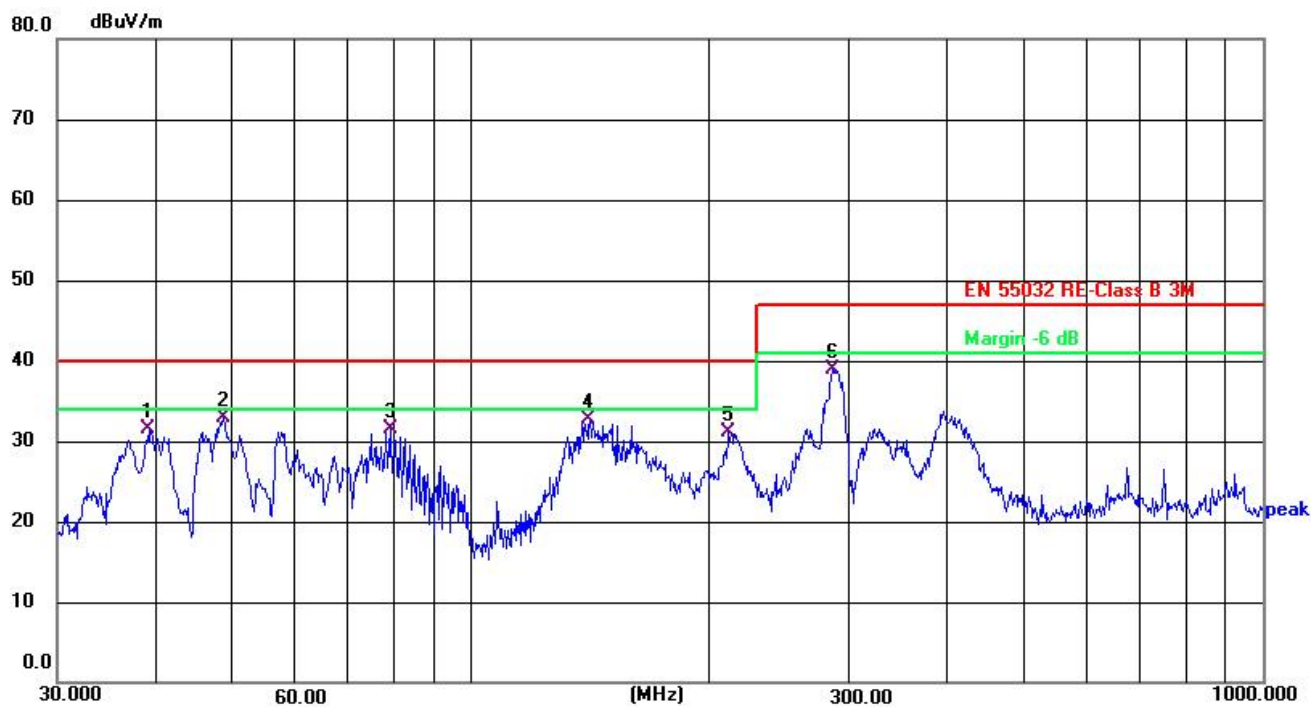

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.1613	43.23	-11.79	31.44	40.00	-8.56	QP
2 *	48.6720	44.83	-12.02	32.81	40.00	-7.19	QP
3	78.9651	47.59	-16.02	31.57	40.00	-8.43	QP
4	141.3296	45.63	-12.92	32.71	40.00	-7.29	QP
5	211.5261	46.88	-15.81	31.07	40.00	-8.93	QP
6	285.9777	51.95	-13.02	38.93	47.00	-8.07	QP


Model:1563

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	72.3375	39.99	-15.12	24.87	40.00	-15.13	QP
2	143.8291	43.69	-12.73	30.96	40.00	-9.04	QP
3	181.9200	45.68	-14.71	30.97	40.00	-9.03	QP
4 *	211.5261	49.05	-15.81	33.24	40.00	-6.76	QP
5	331.3546	49.04	-11.88	37.16	47.00	-9.84	QP
6	382.5878	49.33	-10.92	38.41	47.00	-8.59	QP


Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)

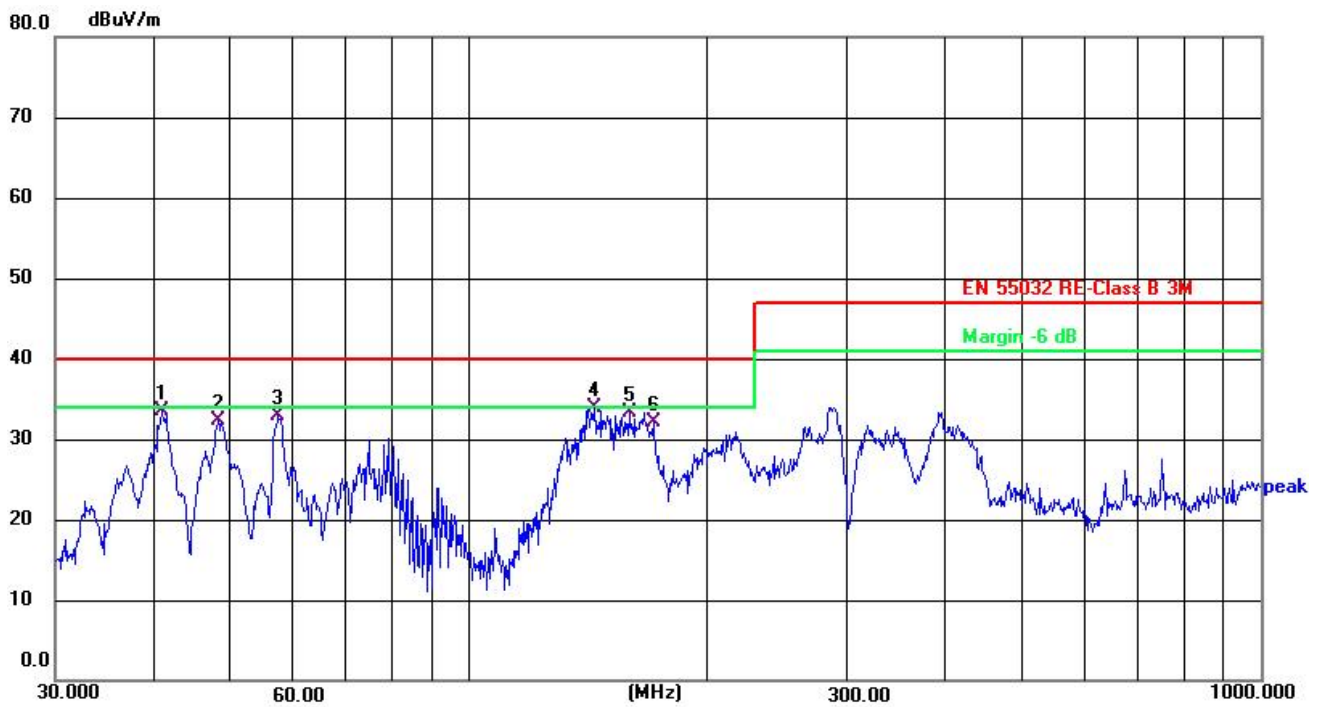

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.8444	45.19	-11.73	33.46	40.00	-6.54	QP
2	48.1625	44.24	-12.01	32.23	40.00	-7.77	QP
3	57.3922	45.50	-12.65	32.85	40.00	-7.15	QP
4 *	143.8291	46.65	-12.73	33.92	40.00	-6.08	QP
5	159.2250	45.60	-12.24	33.36	40.00	-6.64	QP
6	170.7923	45.27	-13.18	32.09	40.00	-7.91	QP

Model:2616

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)

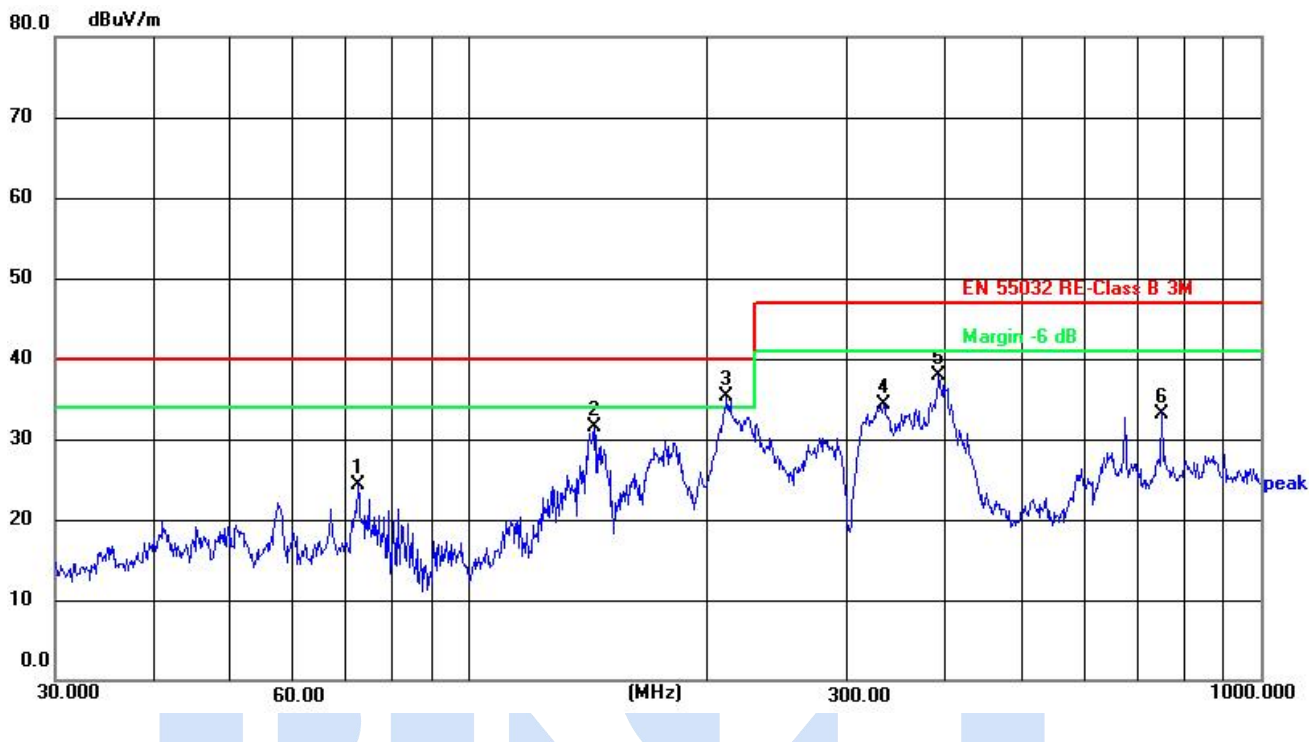

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	72.3375	39.49	-15.12	24.37	40.00	-15.63	QP
2	143.8291	44.19	-12.73	31.46	40.00	-8.54	QP
3 *	211.5261	51.05	-15.81	35.24	40.00	-4.76	QP
4	333.6865	46.07	-11.83	34.24	47.00	-12.76	QP
5	392.0950	48.55	-10.74	37.81	47.00	-9.19	QP
6	750.1082	38.34	-5.14	33.20	47.00	-13.80	QP

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	41.4215	43.60	-11.77	31.83	40.00	-8.17	QP
2	47.8260	45.08	-12.02	33.06	40.00	-6.94	QP
3	57.7961	46.49	-12.69	33.80	40.00	-6.20	QP
4	78.9651	46.59	-16.02	30.57	40.00	-9.43	QP
5 *	155.9100	48.94	-12.26	36.68	40.00	-3.32	QP
6 !	211.5261	49.88	-15.81	34.07	40.00	-5.93	QP


Model:2150

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	49.0144	32.91	-12.03	20.88	40.00	-19.12	QP
2	72.3375	37.49	-15.12	22.37	40.00	-17.63	QP
3	141.8262	45.12	-12.88	32.24	40.00	-7.76	QP
4 *	210.7860	49.16	-15.82	33.34	40.00	-6.66	QP
5	283.9791	47.39	-13.10	34.29	47.00	-12.71	QP
6	356.6757	50.75	-11.40	39.35	47.00	-7.65	QP


Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)

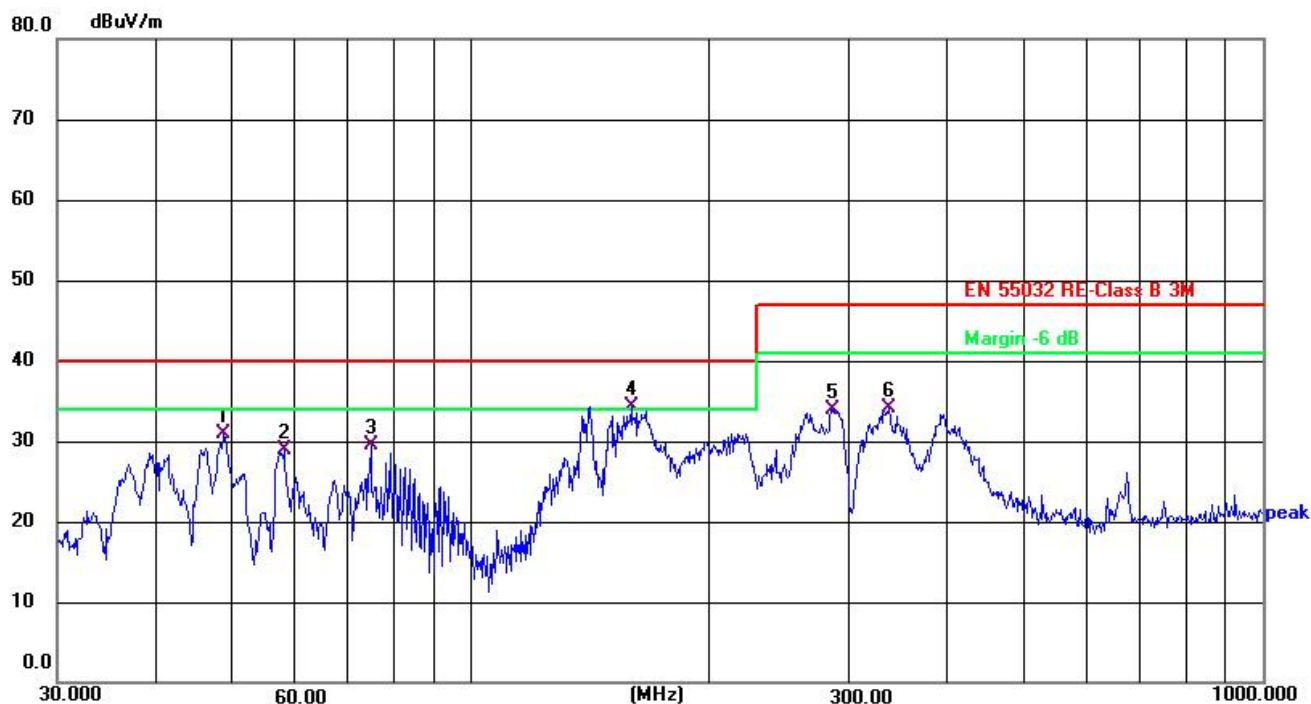

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	48.6720	42.83	-12.02	30.81	40.00	-9.19	QP
2	57.9992	41.61	-12.71	28.90	40.00	-11.10	QP
3	74.6568	45.06	-15.57	29.49	40.00	-10.51	QP
4 *	159.2250	46.60	-12.24	34.36	40.00	-5.64	QP
5	285.9777	46.95	-13.02	33.93	47.00	-13.07	QP
6	337.2155	45.79	-11.77	34.02	47.00	-12.98	QP


Model:2700

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)

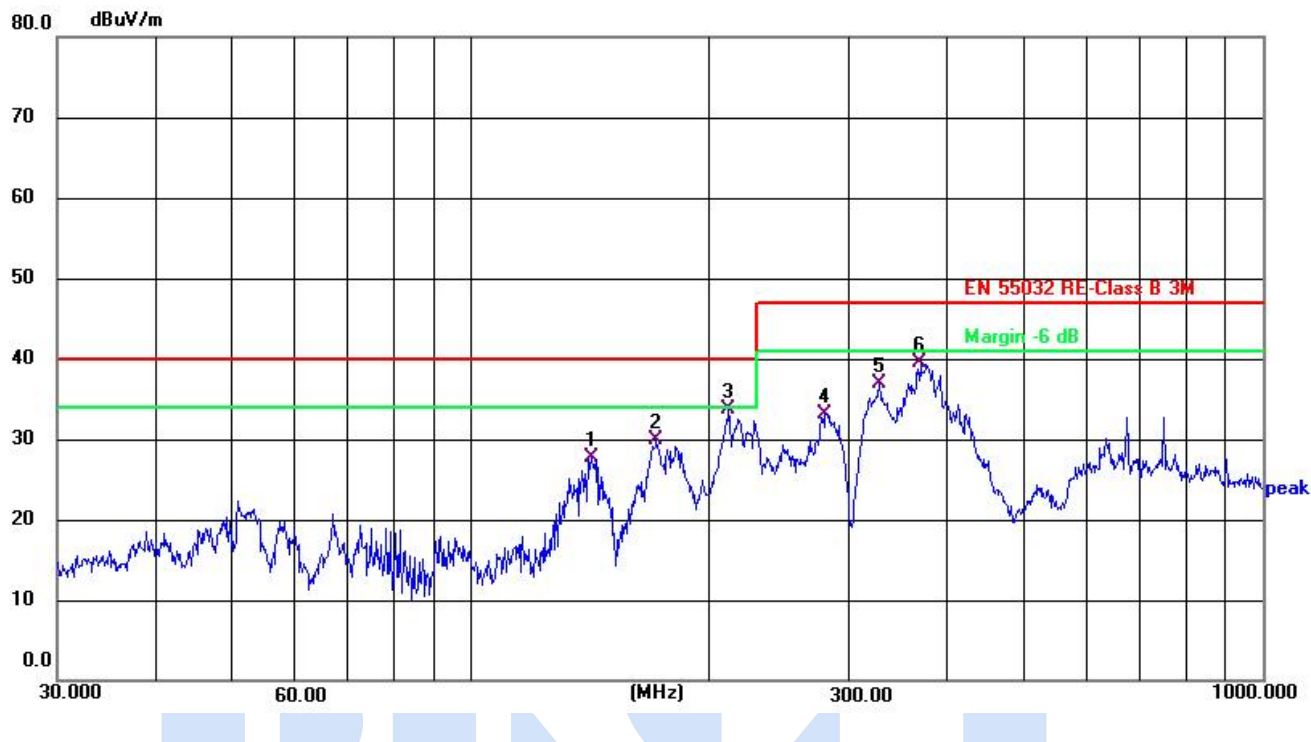

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	141.8262	40.62	-12.88	27.74	40.00	-12.26	QP
2	171.3925	43.12	-13.26	29.86	40.00	-10.14	QP
3 *	211.5261	49.55	-15.81	33.74	40.00	-6.26	QP
4	280.0237	46.41	-13.26	33.15	47.00	-13.85	QP
5	327.8872	48.94	-11.94	37.00	47.00	-10.00	QP
6	369.4045	50.64	-11.17	39.47	47.00	-7.53	QP

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode	n20(2462MHz)

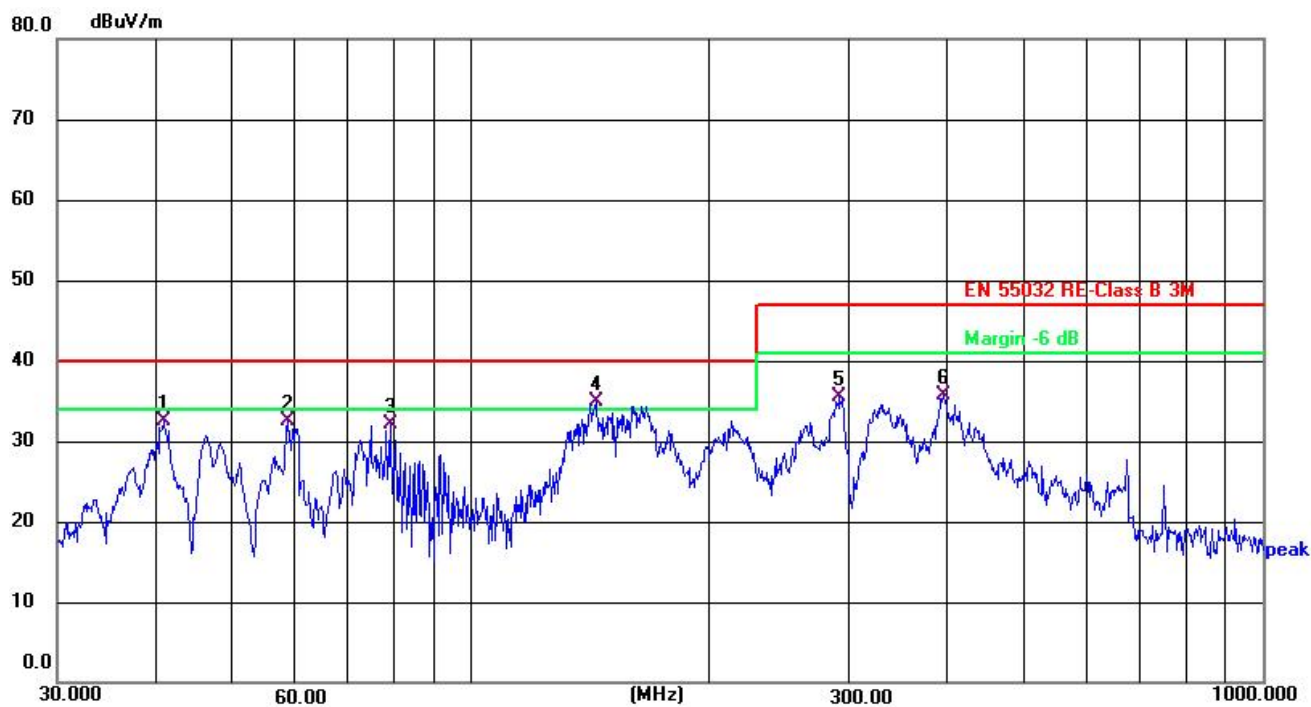

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.8444	44.19	-11.73	32.46	40.00	-7.54	QP
2	58.6126	45.24	-12.77	32.47	40.00	-7.53	QP
3	78.9651	48.09	-16.02	32.07	40.00	-7.93	QP
4 *	143.8293	47.65	-12.73	34.92	40.00	-5.08	QP
5	292.0581	48.36	-12.78	35.58	47.00	-11.42	QP
6	394.8543	46.49	-10.69	35.80	47.00	-11.20	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Only the worst Data 802.11n20(2462MHz)Record in the report.

1GHz~12.75GHz

802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	53.10	30.55	5.77	24.66	52.98	74.00	-21.02	Pk
V	4824.00	43.01	30.55	5.77	24.66	42.89	54.00	-11.11	AV
V	7236.00	52.02	30.33	6.32	24.55	52.56	74.00	-21.44	Pk
V	7236.00	43.03	30.33	6.32	24.55	43.57	54.00	-10.43	AV
V	9648.00	54.51	30.85	7.45	24.69	55.80	74.00	-18.20	Pk
V	9648.00	43.94	30.85	7.45	24.69	45.23	54.00	-8.77	AV
V	12060.00	54.71	31.02	8.99	25.57	58.25	74.00	-15.75	Pk
V	12060.00	43.16	31.02	8.99	25.57	46.70	54.00	-7.30	AV
H	4824.00	50.08	30.55	5.77	24.66	49.96	74.00	-24.04	Pk
H	4824.00	43.15	30.55	5.77	24.66	43.03	54.00	-10.97	AV
H	7236.00	51.22	30.33	6.32	24.55	51.76	74.00	-22.24	Pk
H	7236.00	43.79	30.33	6.32	24.55	44.33	54.00	-9.67	AV
H	9648.00	52.45	30.85	7.45	24.69	53.74	74.00	-20.26	Pk
H	9648.00	43.40	30.85	7.45	24.69	44.69	54.00	-9.31	AV
H	12060.00	51.31	31.02	8.99	25.57	54.85	74.00	-19.15	Pk
H	12060.00	43.50	31.02	8.99	25.57	47.04	54.00	-6.96	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	54.65	30.55	5.77	24.66	54.53	74.00	-19.47	Pk
V	4874.00	43.06	30.55	5.77	24.66	42.94	54.00	-11.06	AV
V	7311.00	54.23	30.33	6.32	24.55	54.77	74.00	-19.23	Pk
V	7311.00	43.77	30.33	6.32	24.55	44.31	54.00	-9.69	AV
V	9748.00	53.39	30.85	7.45	24.69	54.68	74.00	-19.32	Pk
V	9748.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
V	12185.00	53.28	31.02	8.99	25.57	56.82	74.00	-17.18	Pk
V	12185.00	43.98	31.02	8.99	25.57	47.52	54.00	-6.48	AV
H	4874.00	51.38	30.55	5.77	24.66	51.26	74.00	-22.74	Pk



H	4874.00	43.60	30.55	5.77	24.66	43.48	54.00	-10.52	AV
H	7311.00	52.99	30.33	6.32	24.55	53.53	74.00	-20.47	Pk
H	7311.00	43.07	30.33	6.32	24.55	43.61	54.00	-10.39	AV
H	9748.00	51.81	30.85	7.45	24.69	53.10	74.00	-20.90	Pk
H	9748.00	43.50	30.85	7.45	24.69	44.79	54.00	-9.21	AV
H	12185.00	51.65	31.02	8.99	25.57	55.19	74.00	-18.81	Pk
H	12185.00	43.98	31.02	8.99	25.57	47.52	54.00	-6.48	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	53.67	30.55	5.77	24.66	53.55	74.00	-20.45	Pk
V	4924.00	43.04	30.55	5.77	24.66	42.92	54.00	-11.08	AV
V	7386.00	54.08	30.33	6.32	24.55	54.62	74.00	-19.38	Pk
V	7386.00	43.23	30.33	6.32	24.55	43.77	54.00	-10.23	AV
V	9848.00	51.55	30.85	7.45	24.69	52.84	74.00	-21.16	Pk
V	9848.00	43.27	30.85	7.45	24.69	44.56	54.00	-9.44	AV
V	12310.00	52.74	31.02	8.99	25.57	56.28	74.00	-17.72	Pk
V	12310.00	44.00	31.02	8.99	25.57	47.54	54.00	-6.46	AV
H	4924.00	51.56	30.55	5.77	24.66	51.44	74.00	-22.56	Pk
H	4924.00	43.76	30.55	5.77	24.66	43.64	54.00	-10.36	AV
H	7386.00	53.56	30.33	6.32	24.55	54.10	74.00	-19.90	Pk
H	7386.00	43.27	30.33	6.32	24.55	43.81	54.00	-10.19	AV
H	9848.00	54.74	30.85	7.45	24.69	56.03	74.00	-17.97	Pk
H	9848.00	43.66	30.85	7.45	24.69	44.95	54.00	-9.05	AV
H	12310.00	54.98	31.02	8.99	25.57	58.52	74.00	-15.48	Pk
H	12310.00	43.65	31.02	8.99	25.57	47.19	54.00	-6.81	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss - Pre-amplifier,

Margin= Emission Level - Limit

2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. All of the 802.11b, 802.11g and 802.11n (H20), 802.11n (H40) modes have been tested, the EUT complied with the FCC Part 15.247 standard limit for a wireless device. Only the worst Data 802.11b Record in the report.

5. All prototype samples have been tested; only the sample with the worst data is recorded.



Radiated Band Emission Measurement:

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/ m)	Detect or Type	Result
802.11b	Low Channel 802.11b_2412MHz									
	H	2310.00	54.00	30.22	4.85	23.98	52.61	74.00	Pk	PASS
	H	2310.00	44.37	30.22	4.85	23.98	42.98	54.00	AV	PASS
	H	2390.00	54.56	30.22	4.85	23.98	53.17	74.00	Pk	PASS
	H	2390.00	44.30	30.22	4.85	23.98	42.91	54.00	AV	PASS
	V	2310.00	54.74	30.22	4.85	23.98	53.35	74.00	Pk	PASS
	V	2310.00	44.14	30.22	4.85	23.98	42.75	54.00	AV	PASS
	V	2390.00	53.98	30.22	4.85	23.98	52.59	74.00	Pk	PASS
	V	2390.00	44.48	30.22	4.85	23.98	43.09	54.00	AV	PASS
	High Channel 802.11b_2462MHz									
	H	2483.50	53.09	30.22	4.85	23.98	51.70	74.00	Pk	PASS
	H	2483.50	44.09	30.22	4.85	23.98	42.70	54.00	AV	PASS
	H	2500.00	54.85	30.22	4.85	23.98	53.46	74.00	Pk	PASS
	H	2500.00	44.64	30.22	4.85	23.98	43.25	54.00	AV	PASS
	V	2483.50	54.54	30.22	4.85	23.98	53.15	74.00	Pk	PASS
	V	2483.50	44.85	30.22	4.85	23.98	43.46	54.00	AV	PASS
	V	2500.00	53.06	30.22	4.85	23.98	51.67	74.00	Pk	PASS
	V	2500.00	44.01	30.22	4.85	23.98	42.62	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss - Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. All of the 802.11b, 802.11g and 802.11n (H20), 802.11n (H40) modes have been tested, the EUT complied with the FCC Part 15.247 standard limit for a wireless device. Only the worst Data 802.11b Record in the report.

5. All prototype samples have been tested; only the sample with the worst data is recorded.

4. Conducted Spurious Emissions


4.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247,RSS-247 5.5
Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02;
ANSI C63.10-2020+Cor.1-2023
Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.2.Test Setup

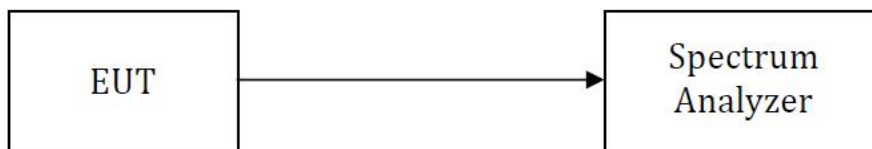

4.3.Test Procedure

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set instrument center frequency to DTS channel center frequency.
- 3) Set the span to 1.5 times the DTS bandwidth.
- 4) Set the RBW = 100 kHz.
- 5) Set the VBW [3 × RBW].
- 6) Detector = peak.
- 7) Sweep time = auto couple.
- 8) Trace mode = max hold.
- 9) Allow trace to fully stabilize.
- 10) Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

- 1) Set the center frequency and span to encompass frequency range to be measured.
- 2) Set the RBW = 100 kHz.
- 3) Set the VBW [3 × RBW].
- 4) Detector = peak.
- 5) Sweep time = auto couple.
- 6) Trace mode = max hold.
- 7) Allow trace to fully stabilize.
- 8) Use the peak marker function to determine the maximum amplitude level.

4.4.Test Result

Please see the attachment for 2.4GWIFI data.

5. Band Edge Measurement

5.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02;

ANSI C63.10-2020+Cor.1-2023

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting

5.2.Test setup



5.3.Test Procedure

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set instrument center frequency to DTS channel center frequency.
- 3) Set the span to 1.5 times the DTS bandwidth.
- 4) Set the RBW = 100 kHz.
- 5) Set the VBW [3 × RBW].
- 6) Detector = peak.
- 7) Sweep time = auto couple.
- 8) Trace mode = max hold.
- 9) Allow trace to fully stabilize.
- 10) Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

- 1) Set the center frequency and span to encompass frequency range to be measured.
- 2) Set the RBW = 100 kHz.
- 3) Set the VBW [3 × RBW].
- 4) Detector = peak.
- 5) Sweep time = auto couple.
- 6) Trace mode = max hold.
- 7) Allow trace to fully stabilize.
- 8) Use the peak marker function to determine the maximum amplitude level.

5.4.Test Result

Please see the attachment for 2.4GWIFI data.


6. -6 dB Bandwidth and 99% Bandwidth Measurement

6.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02; ANSI C63.10-2020+Cor.1-2023

6.2.Test Setup



6.3.Test Procedure

DTS Bandwidth

- Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.

Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

99% Bandwidth

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.

Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

6.4.Test Result

Please see the attachment for 2.4GWIFI data.

7. Maximum Output Power& E.I.R.P


7.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247,RSS-247 5.4(d)

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02;
ANSI C63.10-2020+Cor.1-2023

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.2.Test Setup

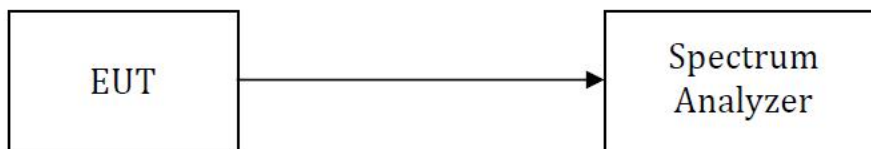

7.3.Test Procedure

KDB 558074 D01 15.247 Meas Guidance v05r02

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a)Set the RBW $\geq$ DTS bandwidth.
- b)Set VBW ≥ 3 RBW.
- c)Set span $\geq 3 \times$ RBW
- d)Sweep time = auto couple.
- e)Detector = peak.
- f)Trace mode = max hold.
- g)Allow trace to fully stabilize.
- h)Use peak marker function to determine the peak amplitude level.

ANSI C63.10-2020 section 11.9.2.2.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- a)Set the RBW = 1% to 5% of the OBW, not to exceed 1 MHz..
- b)Set the VBW $\geq 3 \times$ RBW
- c)Set the span $\geq 1.5 \times$ OBW.
- d)Detector = RMS.
- e)Sweep time = auto couple.
- f) trigger = free run..
- g) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\geq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.4. Test Result

Test plot Please see the attachment for 2.4GWIFI data.



8. Power Spectral density


8.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02; ANSI C63.10-2020+Cor.1-2023

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

8.2.Test Setup

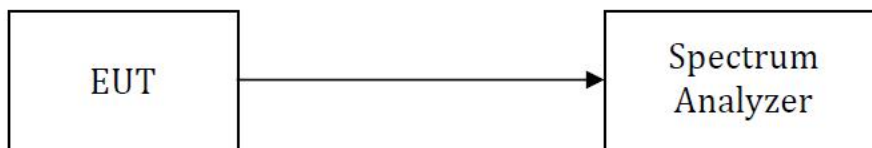

8.3.Test Procedure

KDB 558074 D01 15.247 Meas Guidance v05r02;

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set instrument center frequency to DTS channel center frequency
3. Set span to > 1.5 times the OBW.
4. Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
5. Set VBW $\geq [3 \times \text{RBW}]$
6. Detector = power averaging (rms) or sample detector (when rms not available).
7. Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
8. Sweep time = auto couple.
9. Employ trace averaging (rms) mode over a minimum of 100 traces.
10. Use the peak marker function to determine the maximum amplitude level.
11. If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat(note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).
12. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

8.4.Test Result

Please see the attachment for 2.4GWIFI data.

9. Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

According to the RSS-Gen Section 7.1.2, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

This product has an FPC antenna, and the maximum antenna gain is 1.55dBi, fulfill the requirement of this section.



10. Test Photographs

Please see the attachment for BKC26052786EE-3.



Appendix I: Photos of the EUT

Please see the attachment for BKC26052786EE-4 and BKC26052786EE-5.

***** END OF REPORT *****