


Restricted bands:

Test plot as follows:

|           |                   |                |           |
|-----------|-------------------|----------------|-----------|
| Test_Mode | GFSK Transmitting | Test_Frequency | 2402Mhz   |
| Remark:   | \                 | Test_Date      | 2026/6/24 |

Test Graph

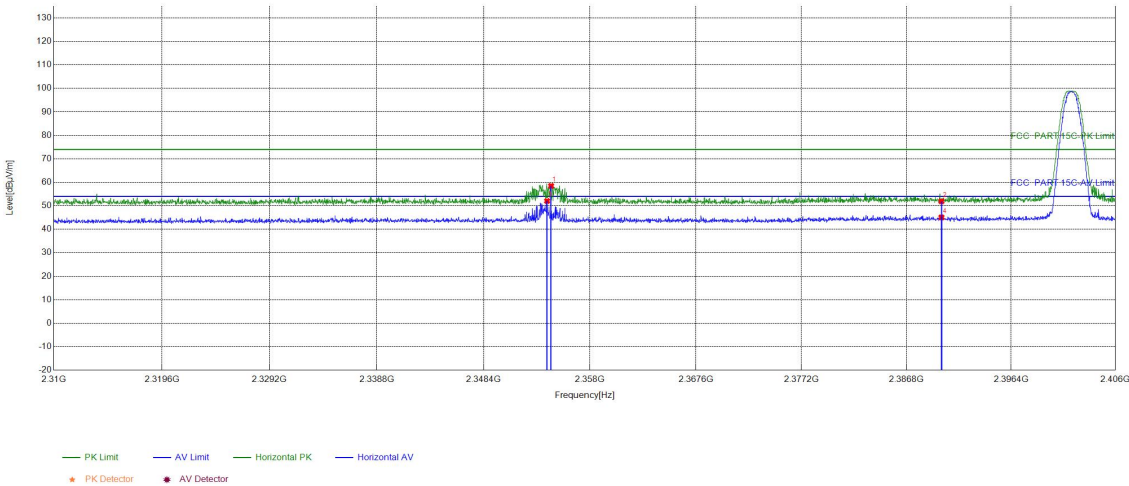


Suspected List

| NO | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
|----|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| 1  | 2354.4831   | 15.56       | 42.89          | 58.45          | 74.00          | 15.55       | PASS   | Horizont | PK     |
| 2  | 2390        | 15.96       | 35.95          | 51.91          | 74.00          | 22.09       | PASS   | Horizont | PK     |
| 3  | 2354.123    | 15.55       | 36.49          | 52.04          | 54.00          | 1.96        | PASS   | Horizont | AV     |
| 4  | 2390        | 15.96       | 29.11          | 45.07          | 54.00          | 8.93        | PASS   | Horizont | AV     |

|           |                   |                |           |
|-----------|-------------------|----------------|-----------|
| Test_Mode | GFSK Transmitting | Test_Frequency | 2402Mhz   |
| Remark:   | \                 | Test_Date      | 2026/6/24 |


Test Graph

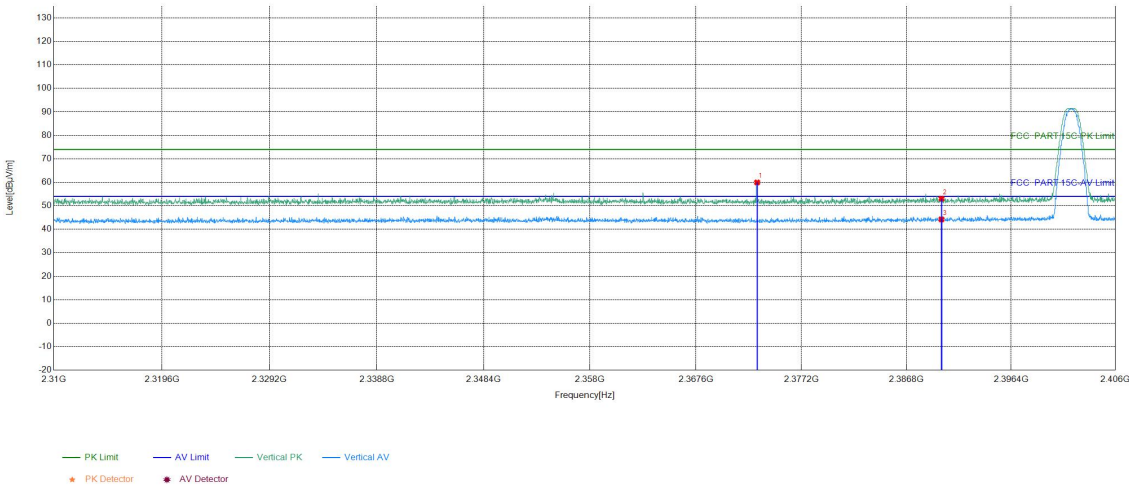

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2373.1598   | 15.56       | 44.38          | 59.94          | 74.00          | 14.06       | PASS   | Vertical | PK     |
| 2              | 2390        | 15.96       | 37.09          | 53.05          | 74.00          | 20.95       | PASS   | Vertical | PK     |
| 3              | 2390        | 15.96       | 28.25          | 44.21          | 54.00          | 9.79        | PASS   | Vertical | AV     |

|           |                   |                |           |
|-----------|-------------------|----------------|-----------|
| Test_Mode | GFSK Transmitting | Test_Frequency | 2480Mhz   |
| Remark:   | \                 | Test_Date      | 2026/6/24 |


Test Graph

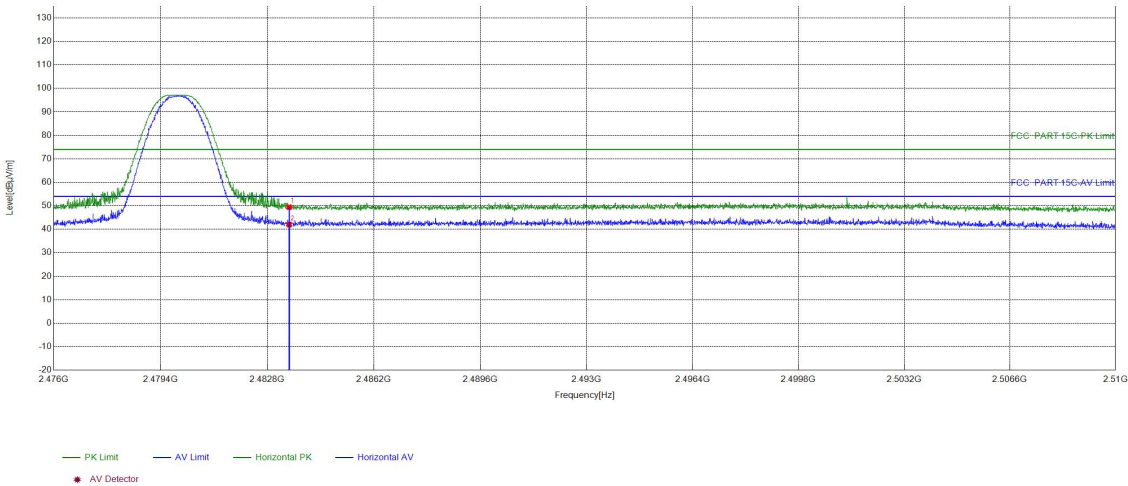

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2483.5      | 16.29       | 33.14          | 49.43          | 74.00          | 24.57       | PASS   | Horizont | PK     |
| 2              | 2483.5      | 16.29       | 25.71          | 42.00          | 54.00          | 12.00       | PASS   | Horizont | AV     |

|           |                   |                |           |
|-----------|-------------------|----------------|-----------|
| Test_Mode | GFSK Transmitting | Test_Frequency | 2480Mhz   |
| Remark:   | \                 | Test_Date      | 2026/6/24 |

Test Graph

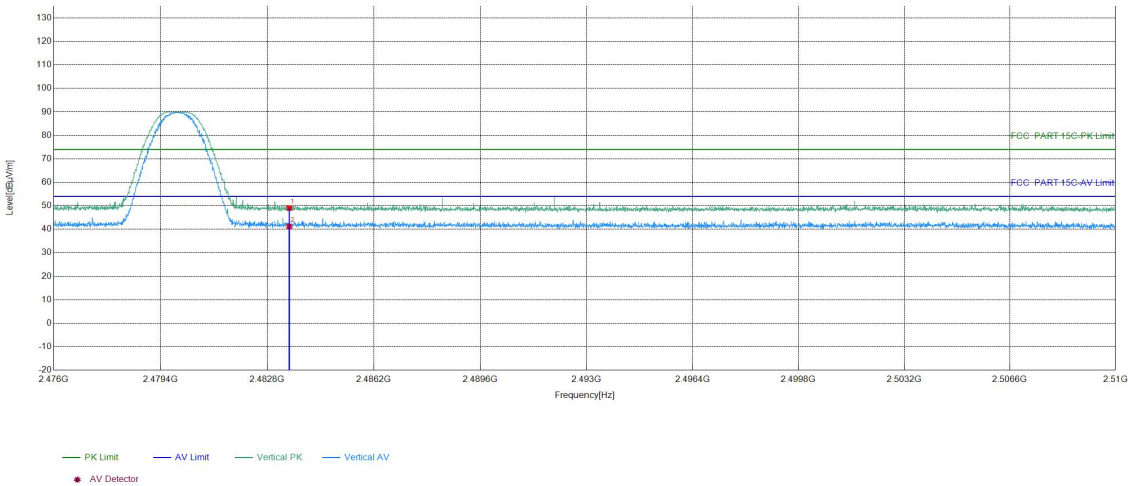

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2483.5      | 16.29       | 32.71          | 49.00          | 74.00          | 25.00       | PASS   | Vertical | PK     |
| 2              | 2483.5      | 16.29       | 24.90          | 41.19          | 54.00          | 12.81       | PASS   | Vertical | AV     |

Note:  
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level =Receiver Reading - Correct Factor  
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

## 5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S811133

## 6 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S811133.

## Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

\*\*\* End of Report \*\*\*