




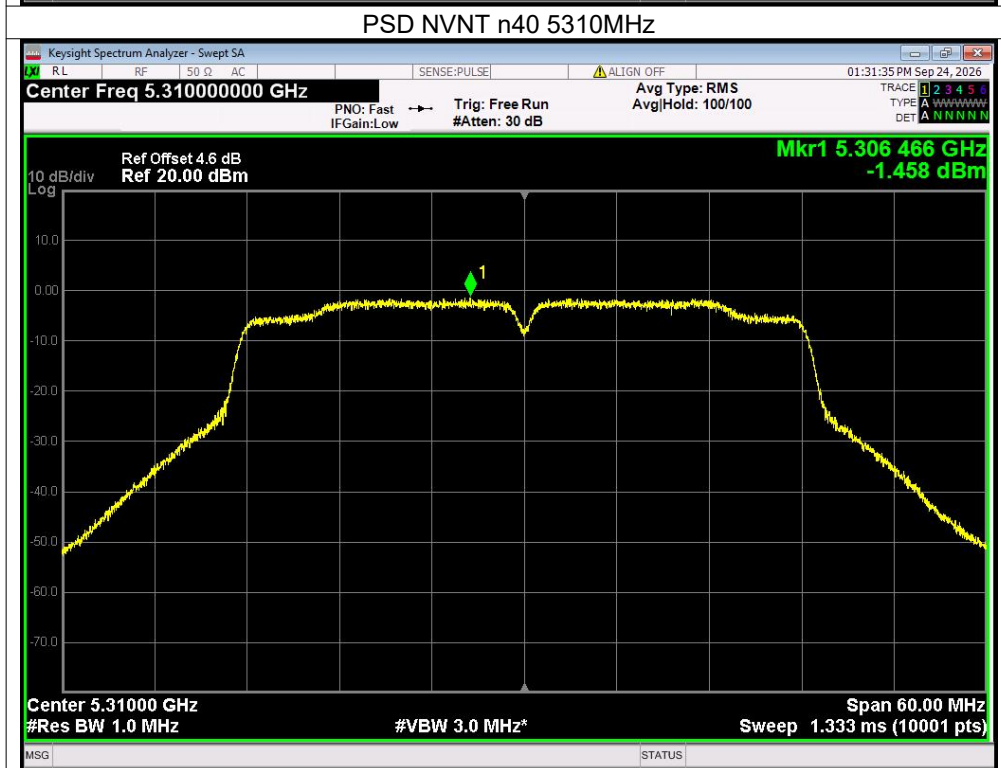
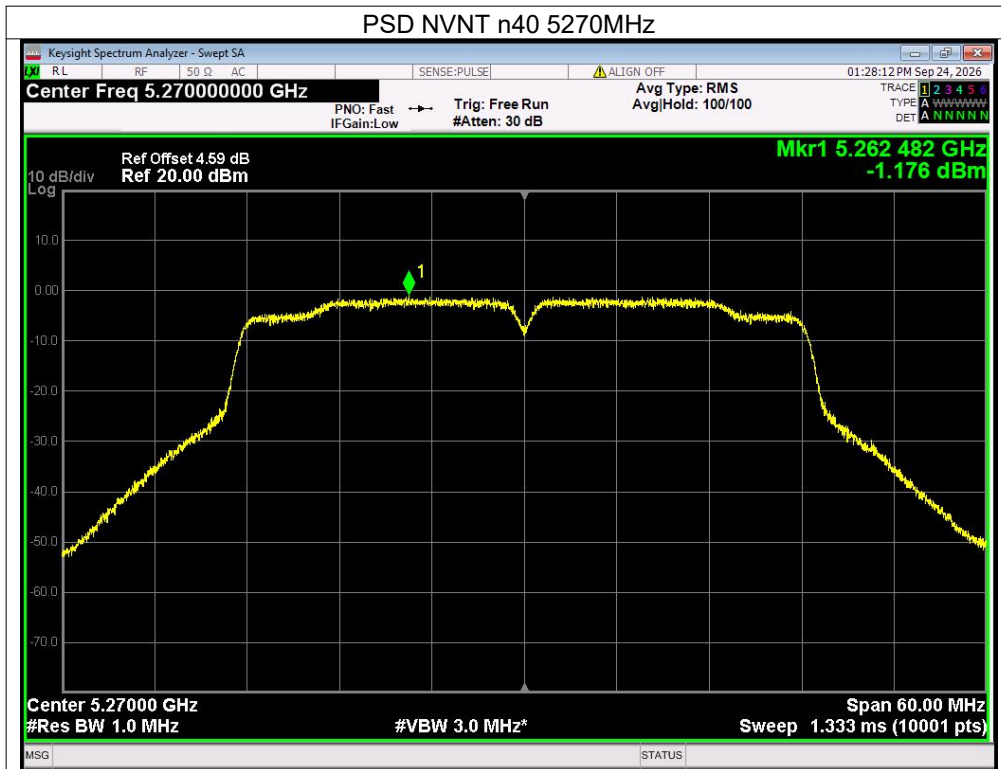
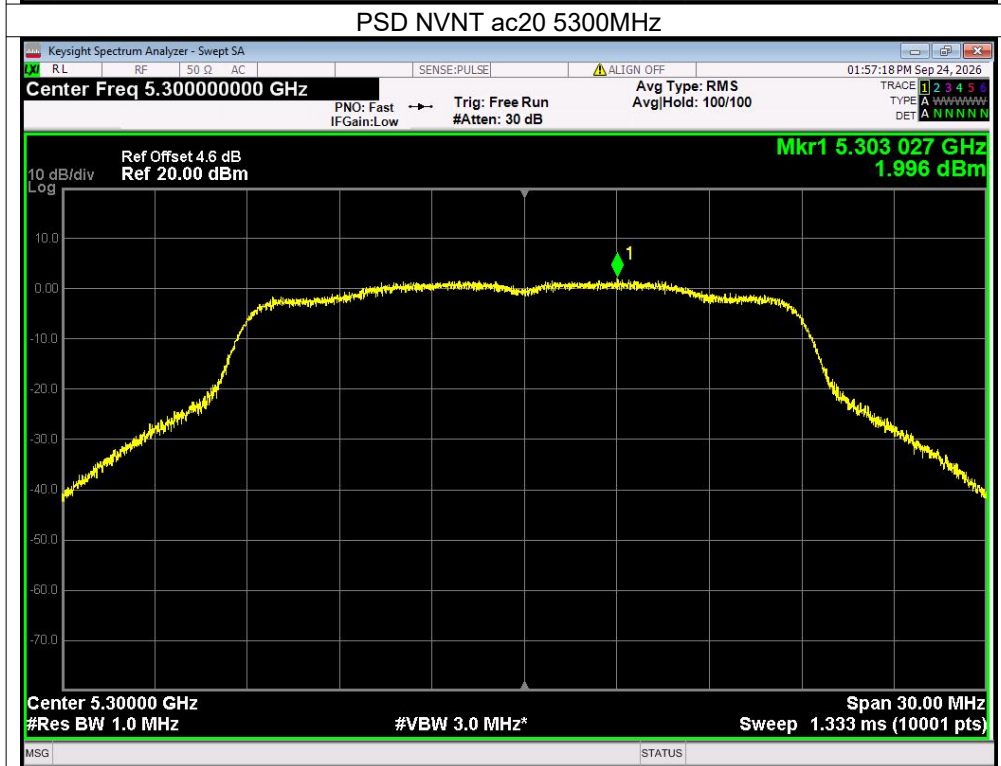
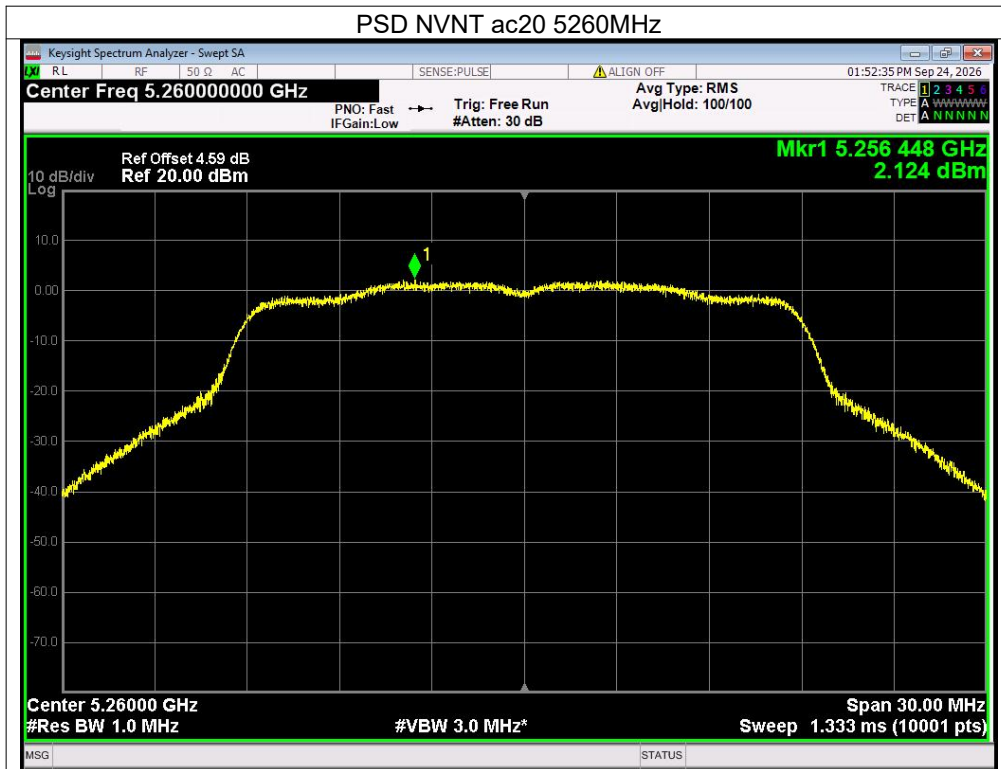
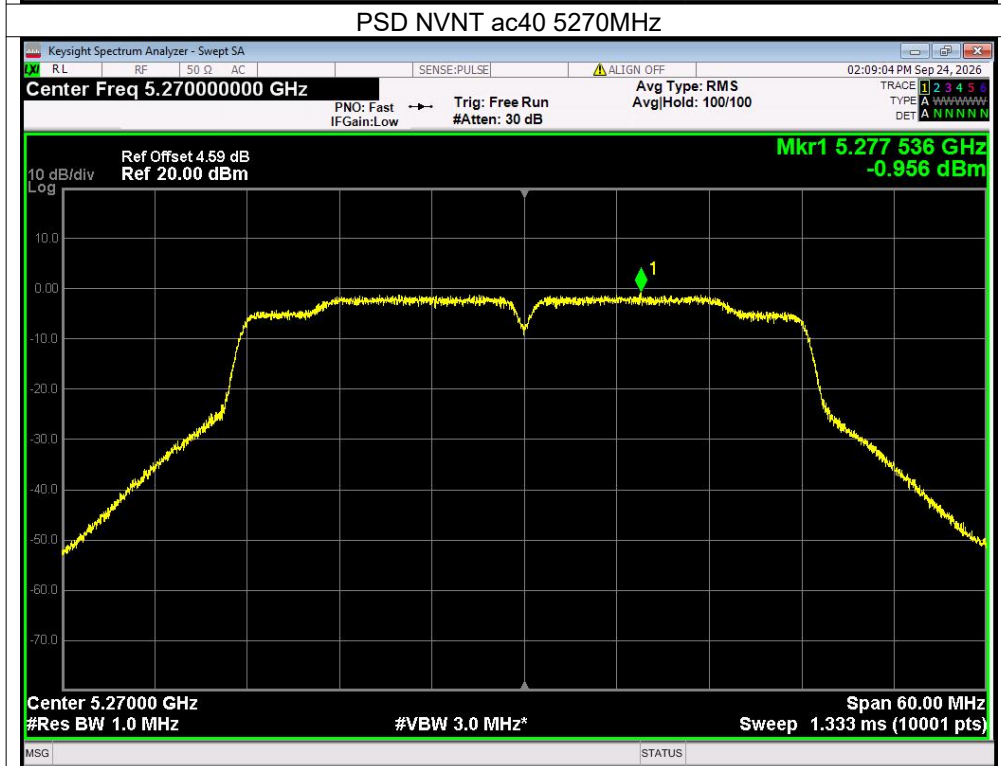



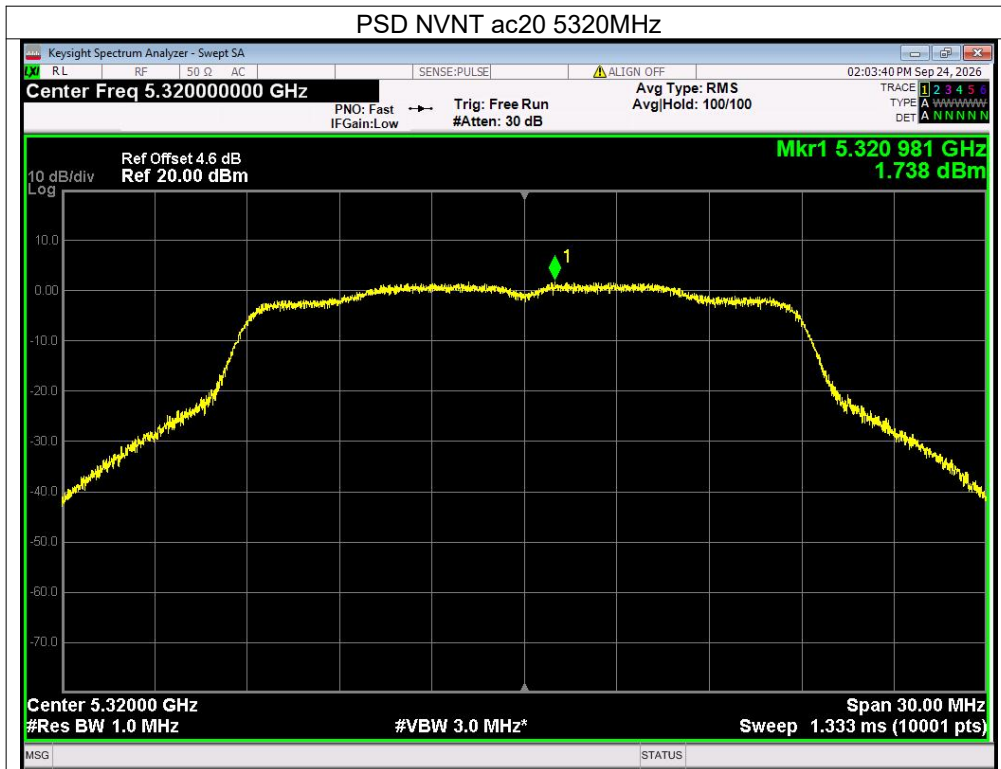


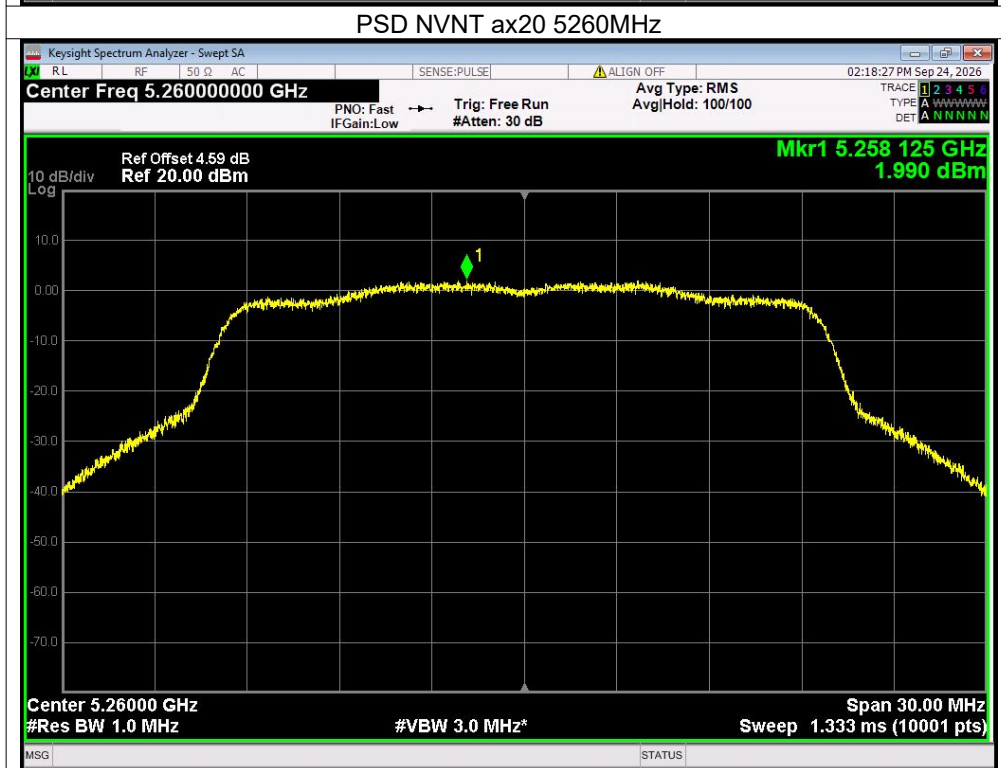

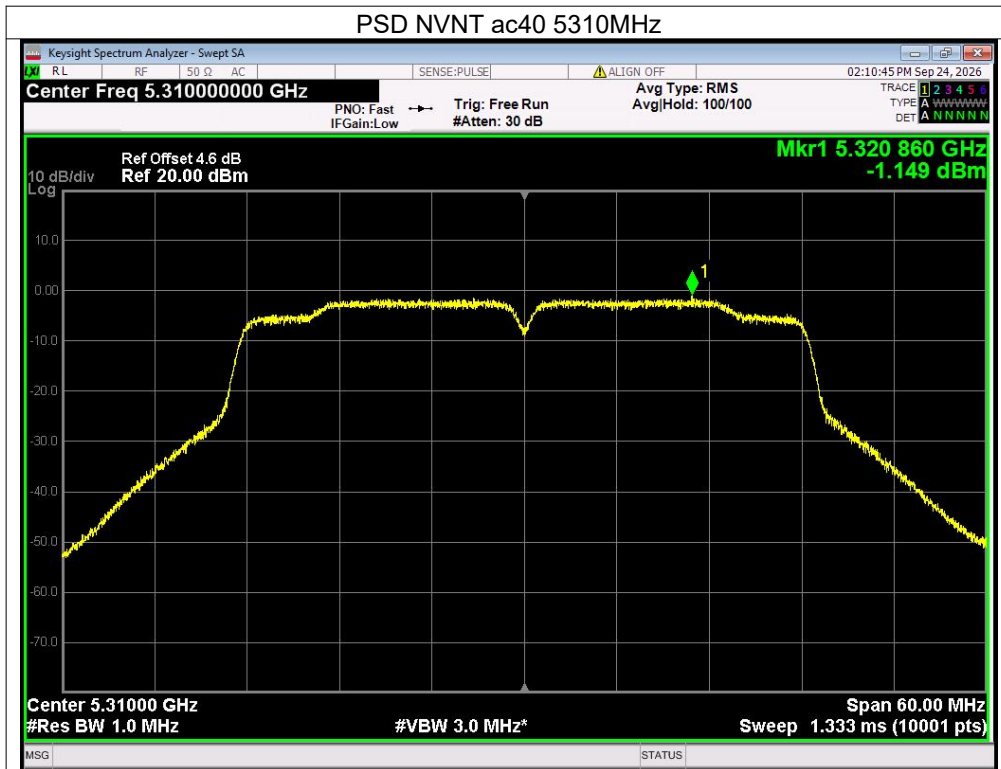

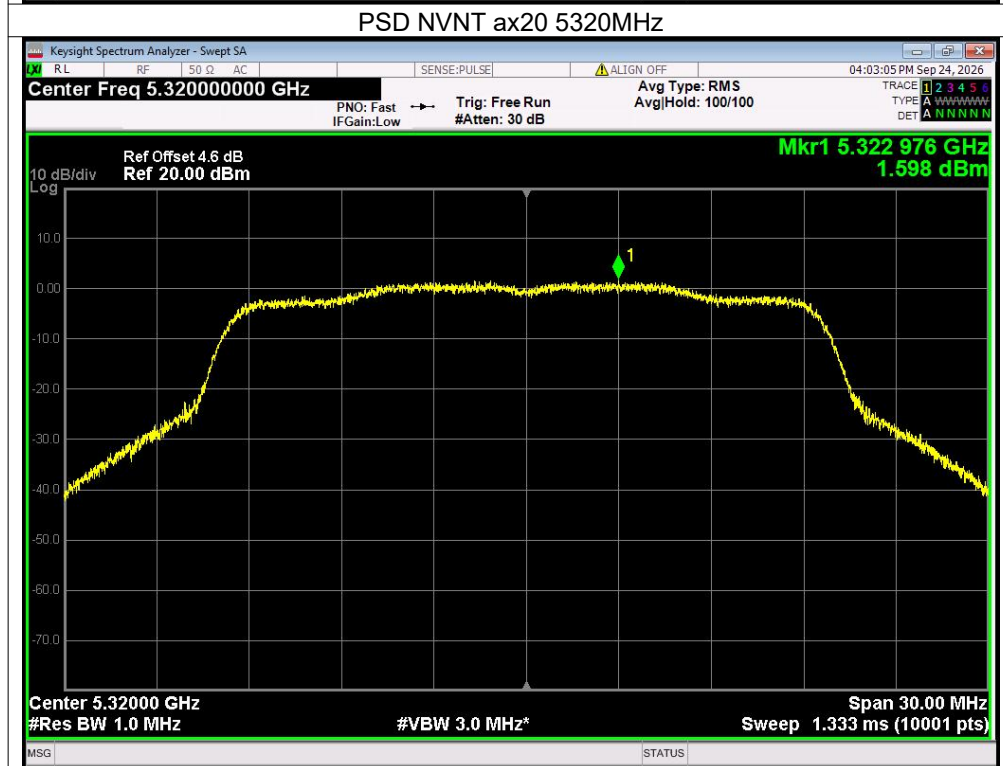

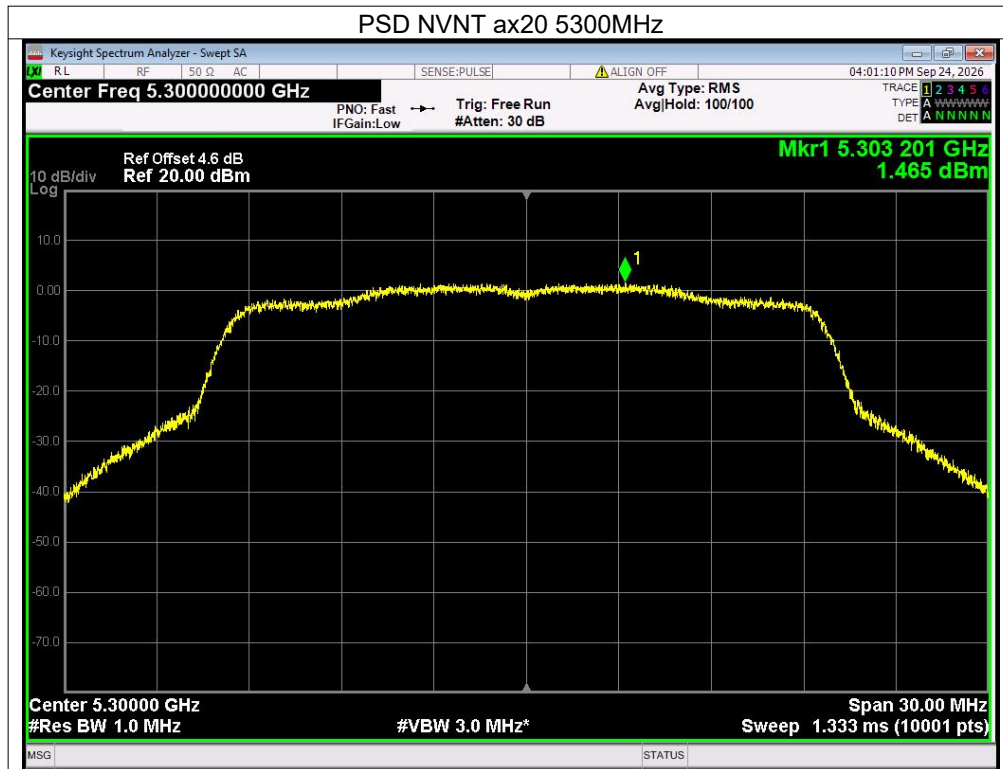

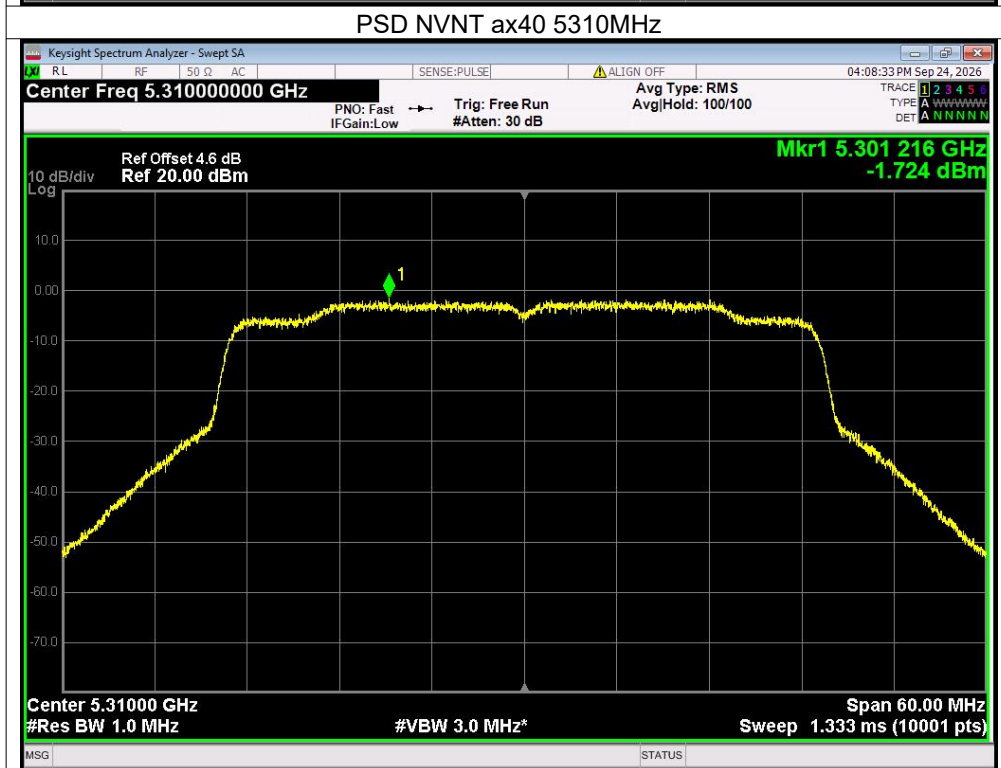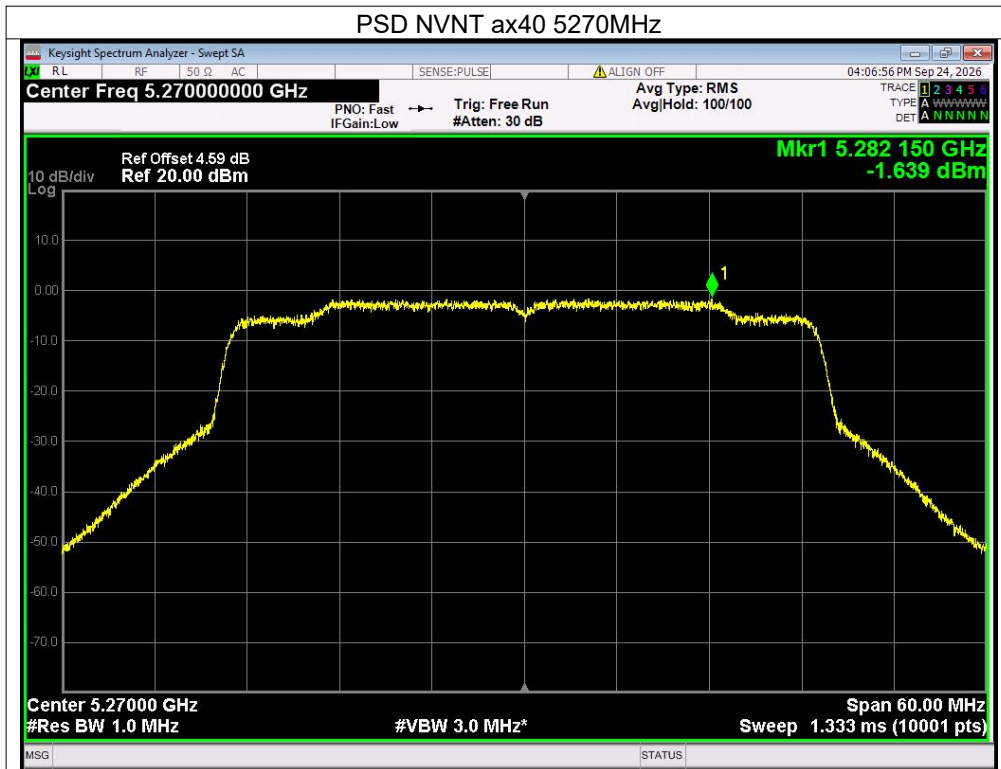








5.6G WLAN



Duty Cycle



Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
a	5500	0.96	1.008	95.24	0.21	1.04	0.50
a	5580	0.96	1.005	95.52	0.2	1.04	0.35
a	5700	0.96	1.005	95.52	0.2	1.04	0.23
n20	5500	0.96	1.006	95.43	0.2	1.04	0.31
n20	5580	0.96	1.006	95.43	0.2	1.04	0.22
n20	5700	0.962	1.008	95.44	0.2	1.04	0.18
n40	5510	0.976	1.024	95.31	0.21	1.02	0.38
n40	5550	0.976	1.022	95.5	0.2	1.02	0.51
n40	5670	0.978	1.024	95.51	0.2	1.02	0.31
ac20	5500	0.952	1	95.2	0.21	1.05	0.79
ac20	5580	0.952	0.998	95.39	0.2	1.05	0.18
ac20	5700	0.952	1	95.2	0.21	1.05	0.79
ac40	5510	0.952	1	95.2	0.21	1.05	0.44
ac40	5550	0.954	1	95.4	0.2	1.05	0.21
ac40	5670	0.952	0.998	95.39	0.2	1.05	0.51
ax20	5500	0.978	1.026	95.32	0.21	1.02	0.23
ax20	5580	0.98	1.026	95.52	0.2	1.02	0.46
ax20	5700	0.98	1.026	95.52	0.2	1.02	0.31
ax40	5510	0.978	1.024	95.51	0.2	1.02	0.40
ax40	5550	0.978	1.026	95.32	0.21	1.02	0.33
ax40	5670	0.976	1.022	95.5	0.2	1.02	0.22


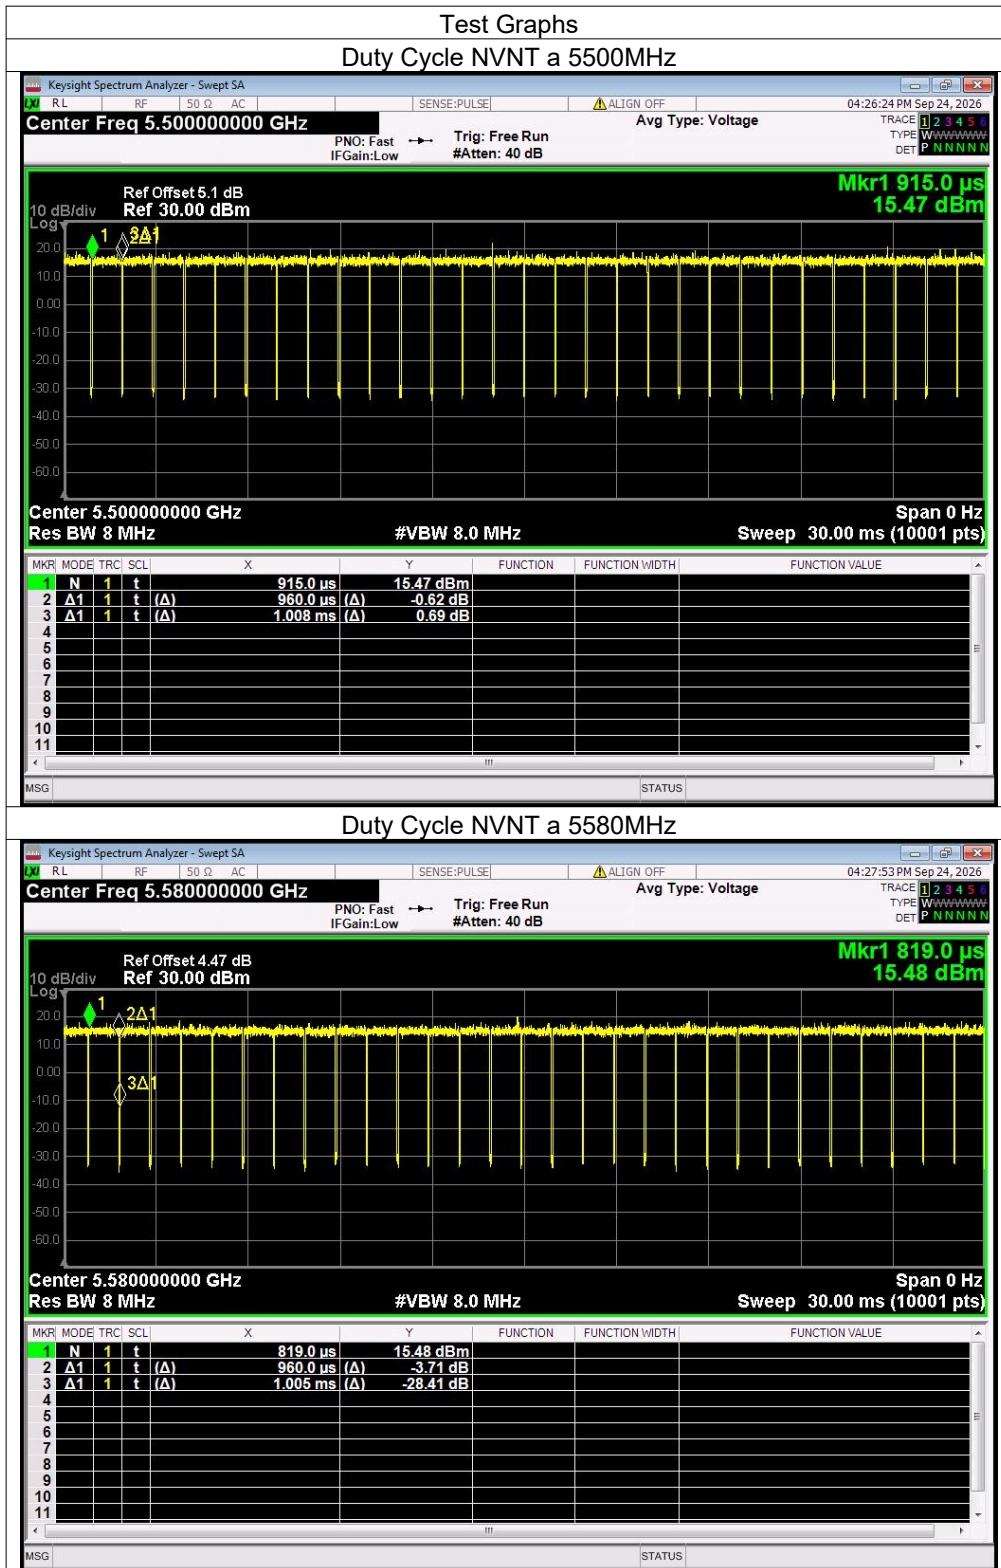


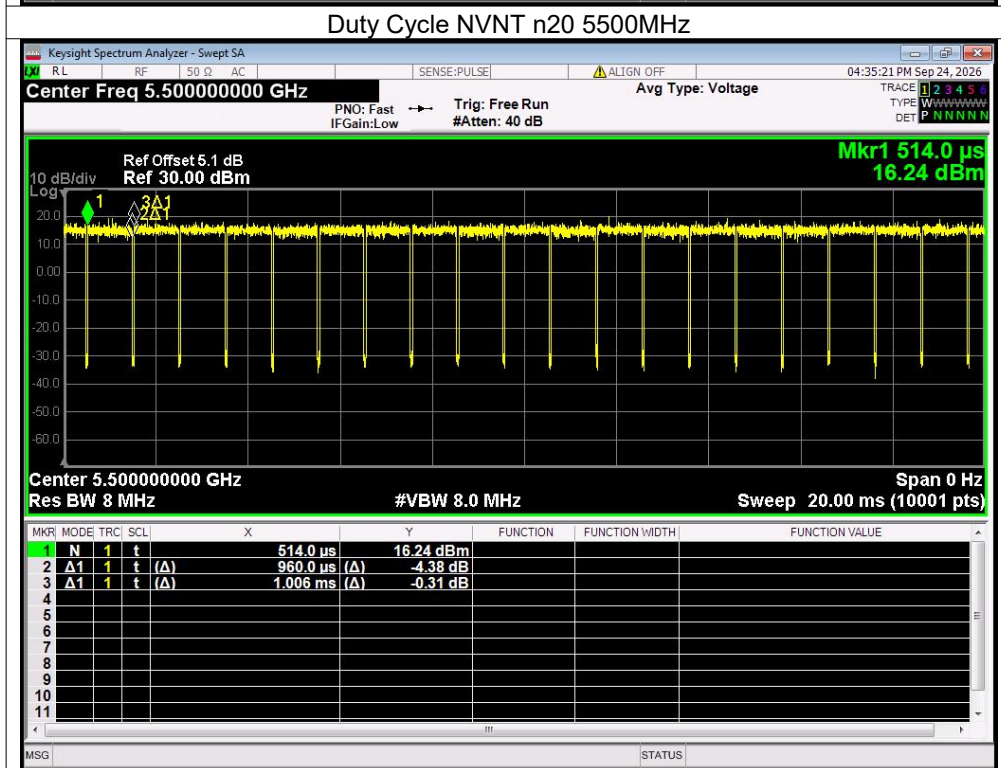
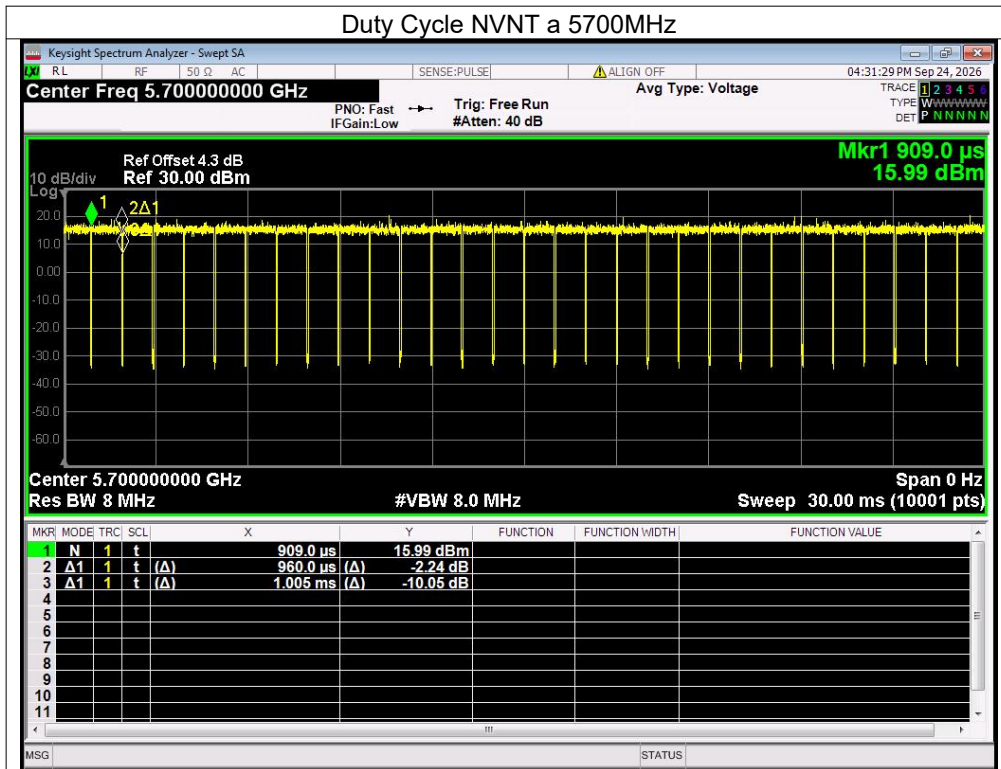


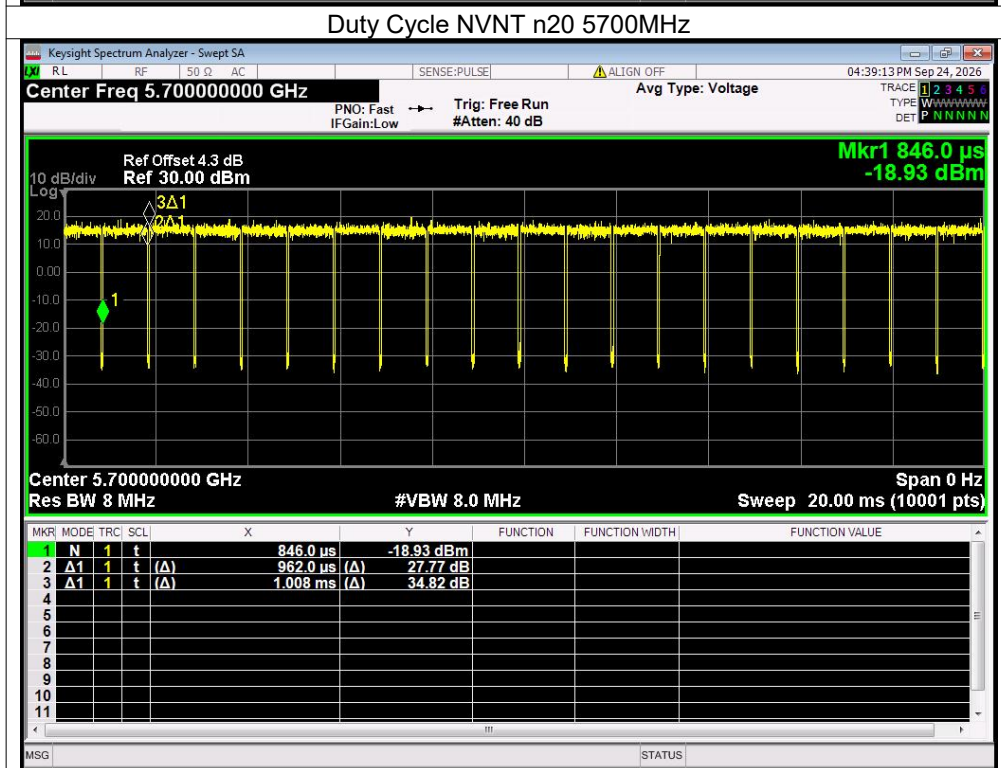
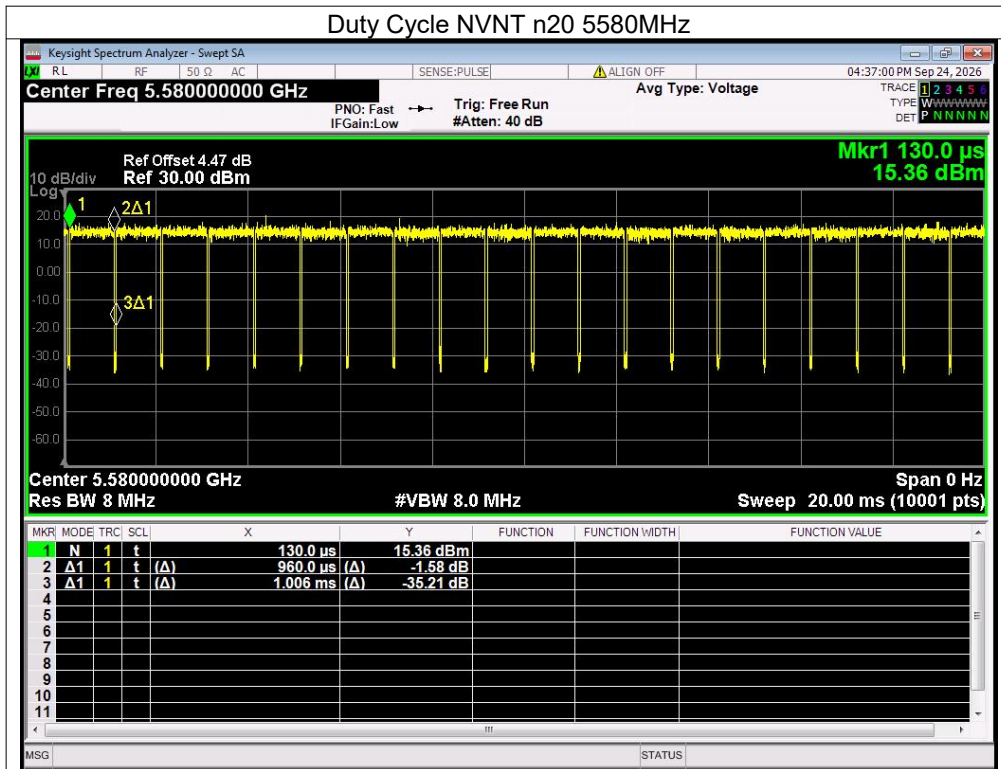


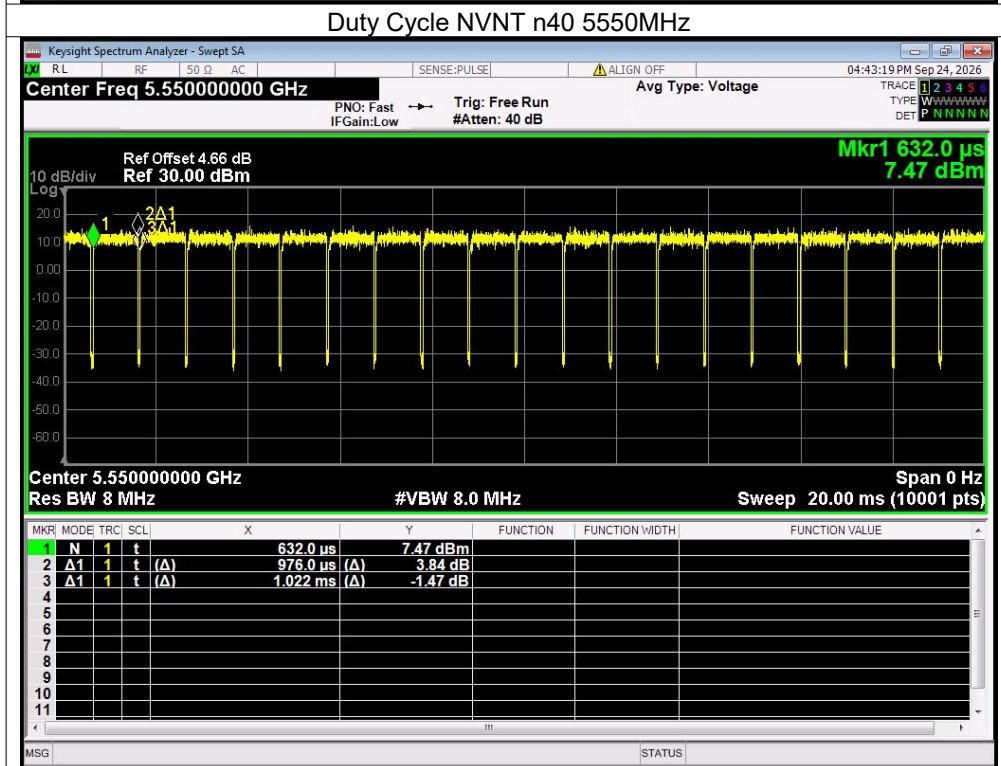
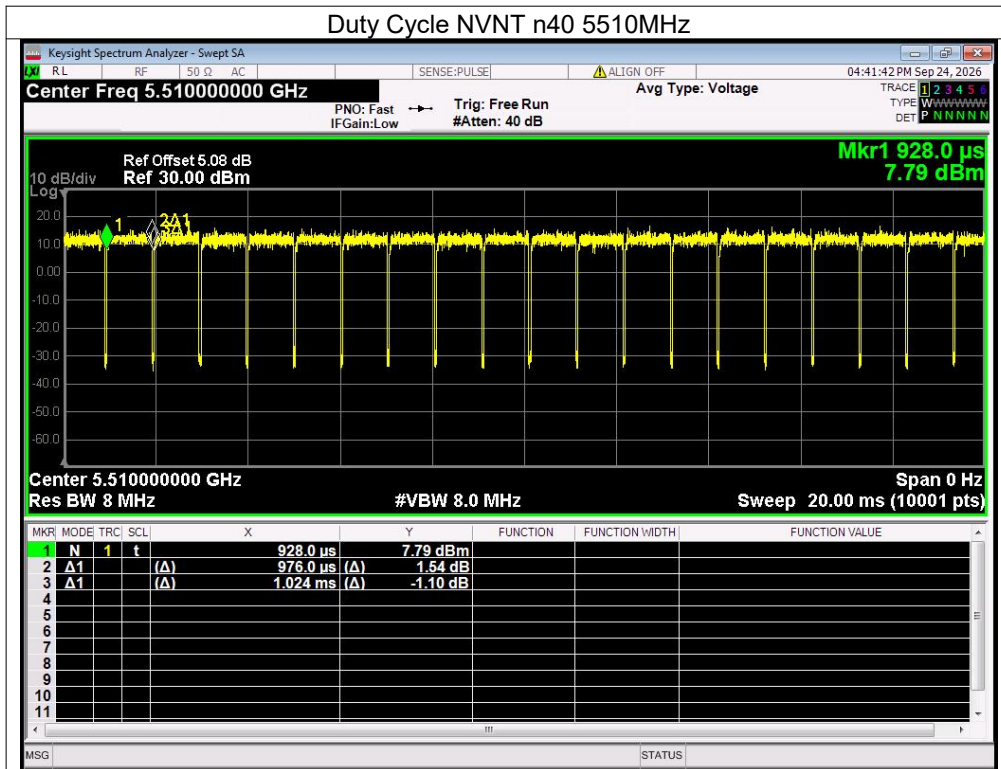


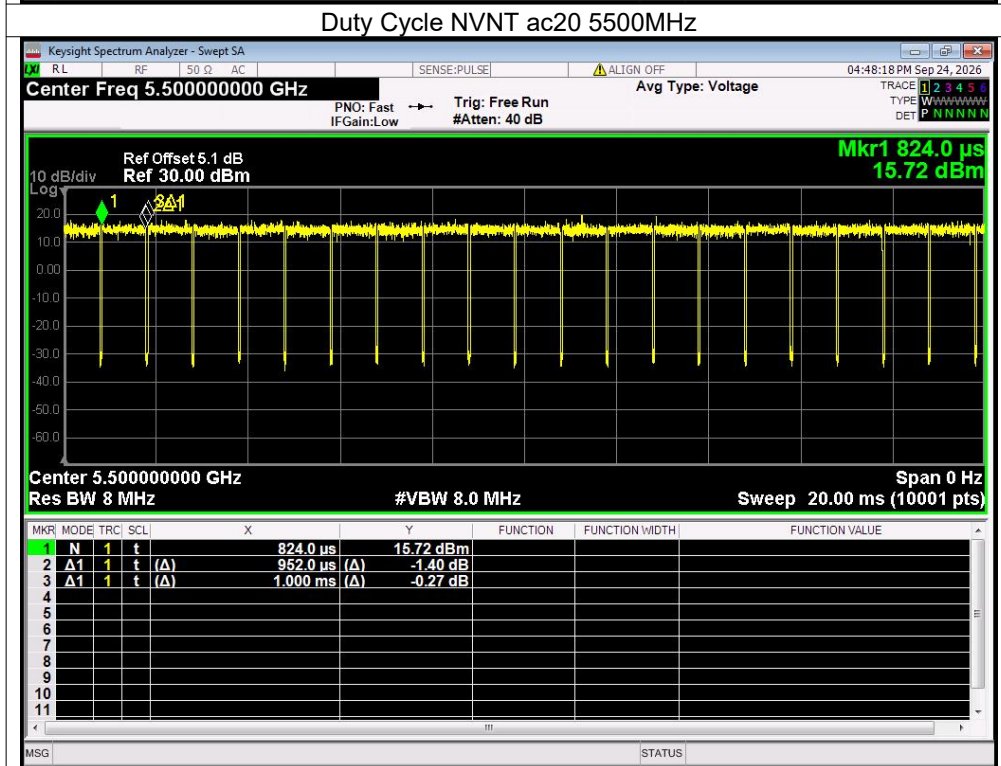
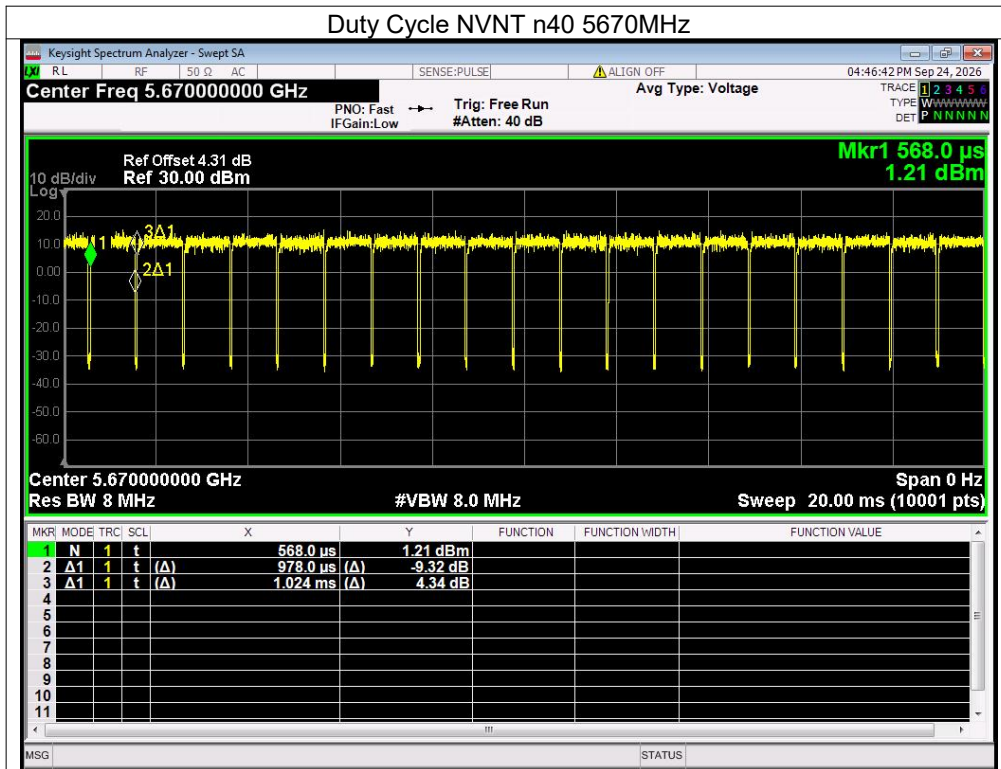


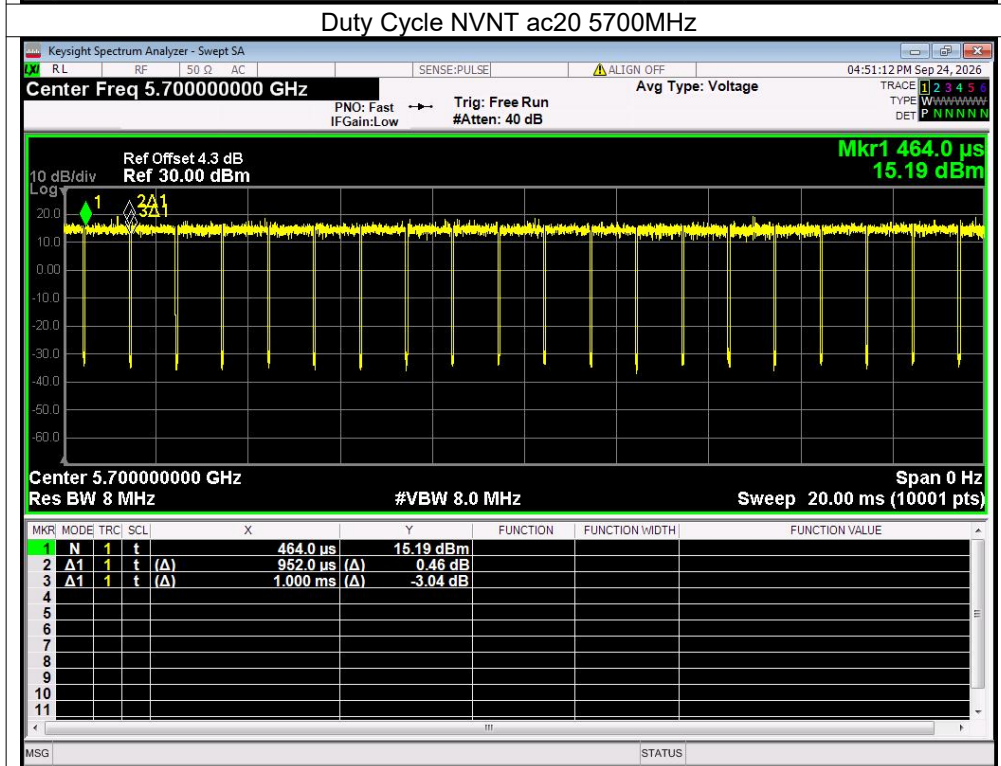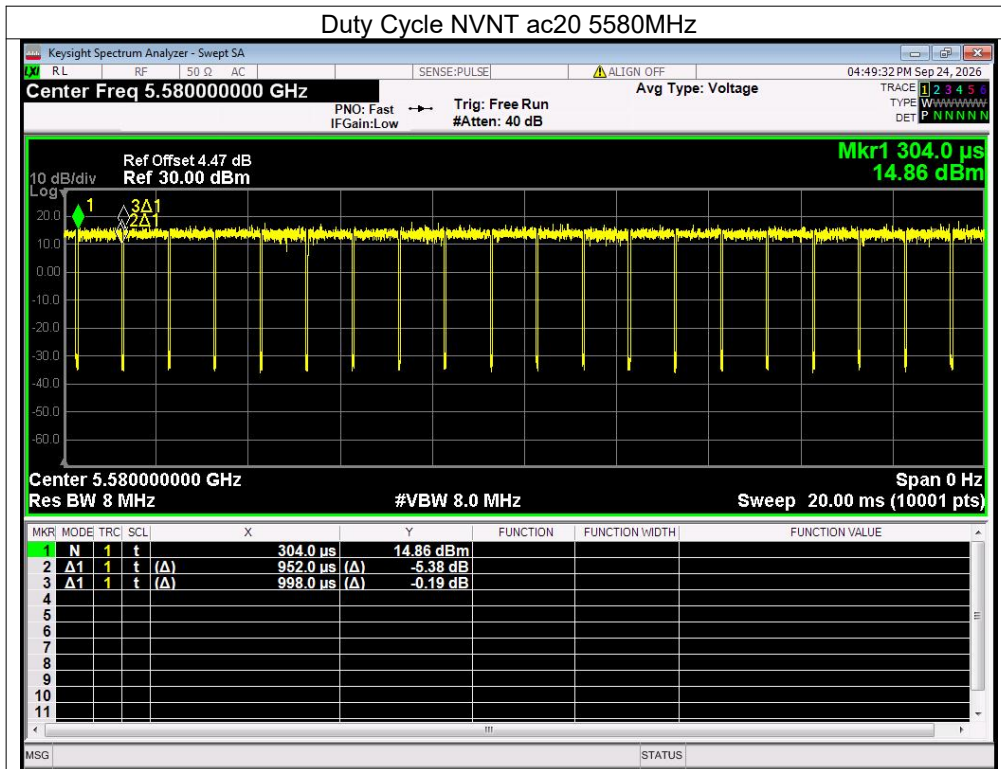


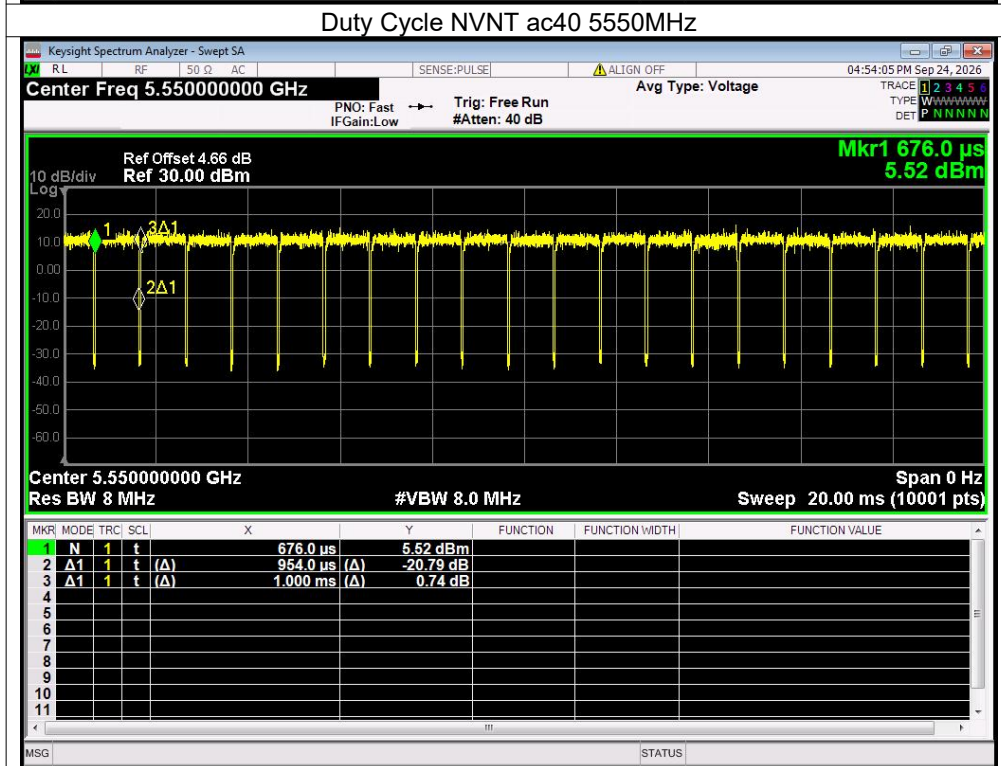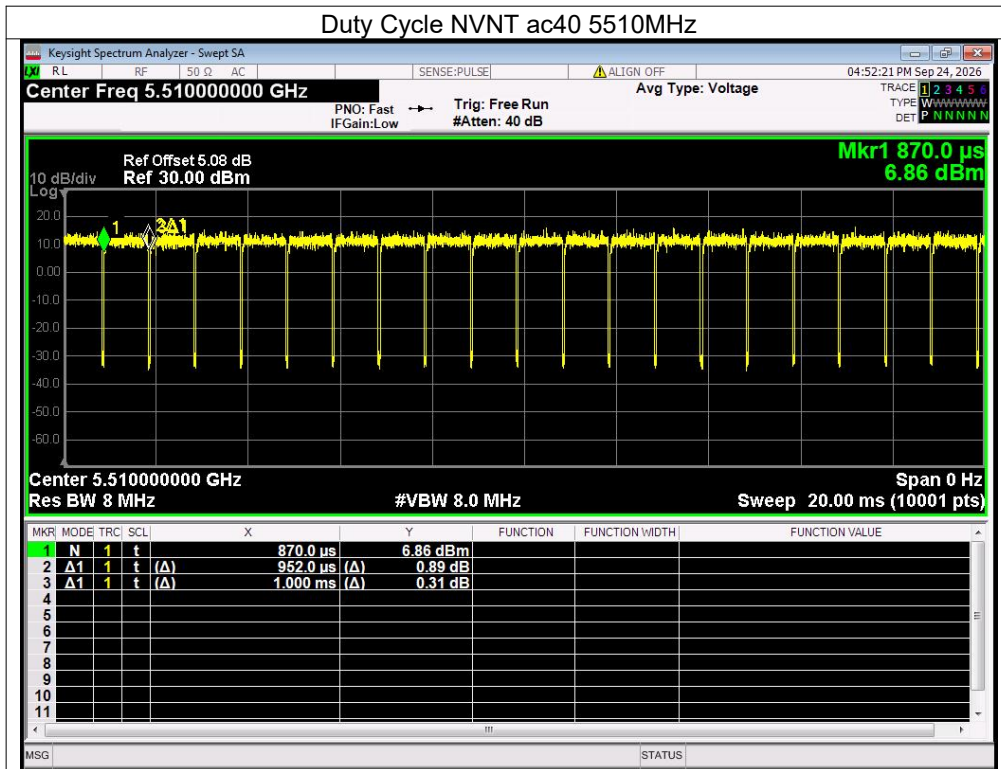

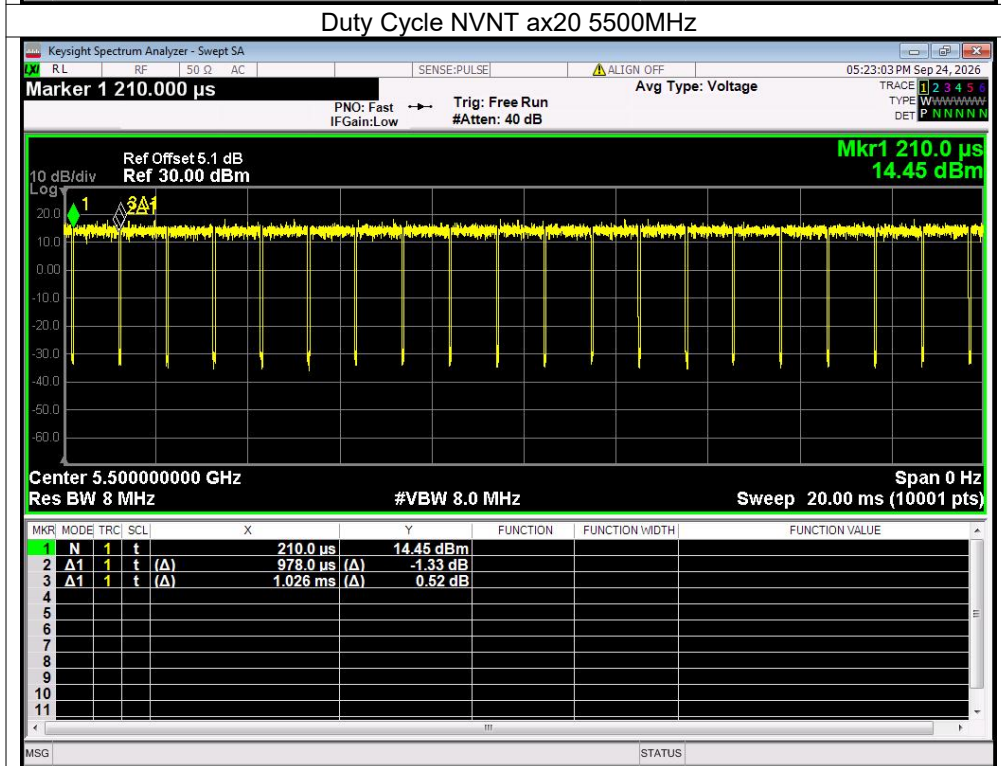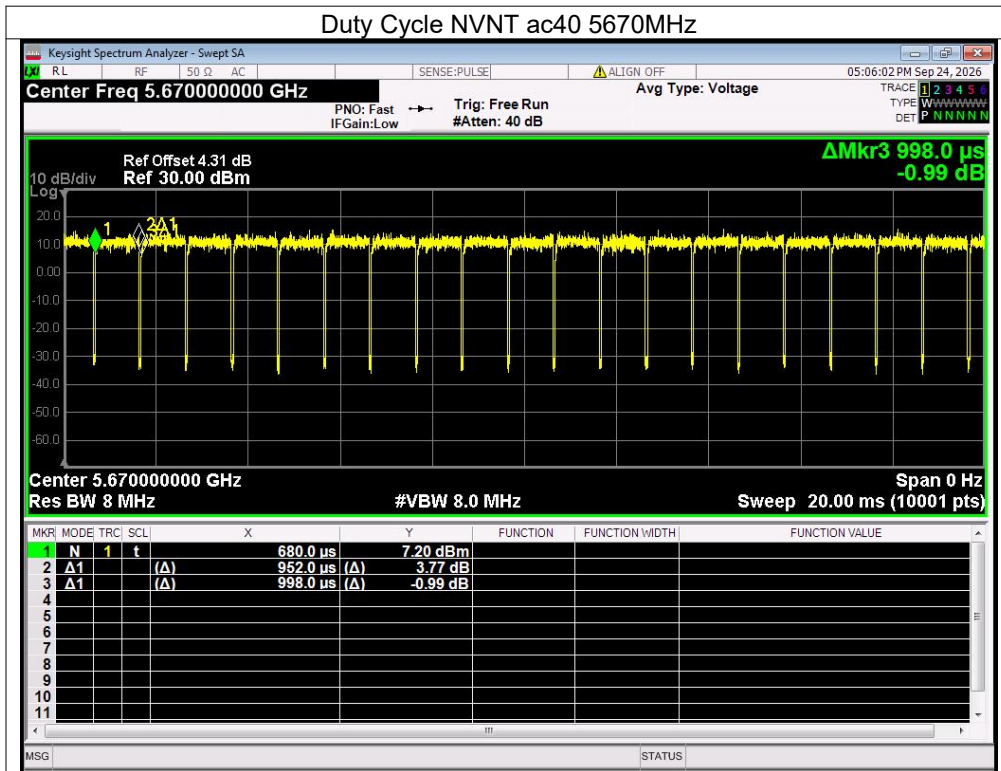

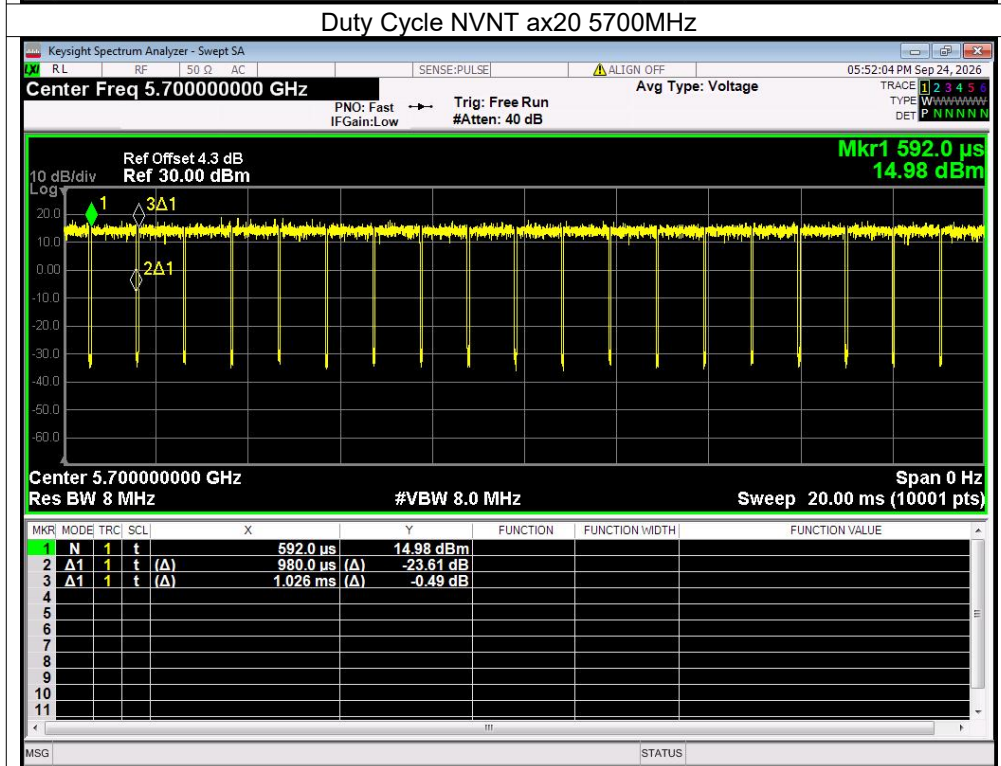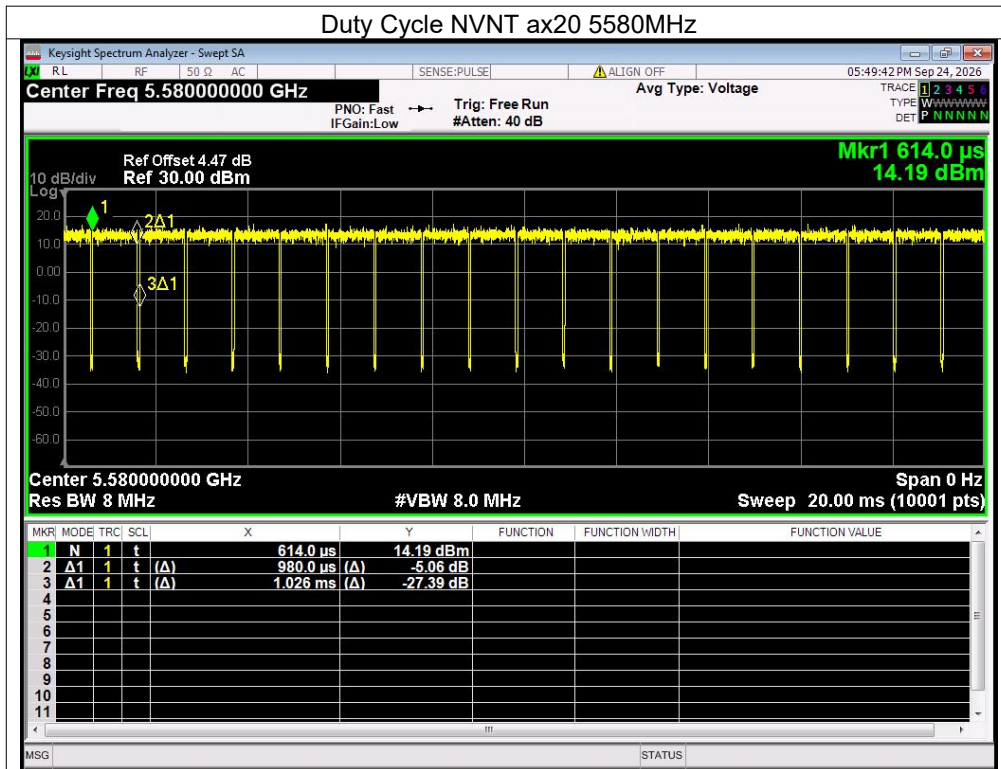

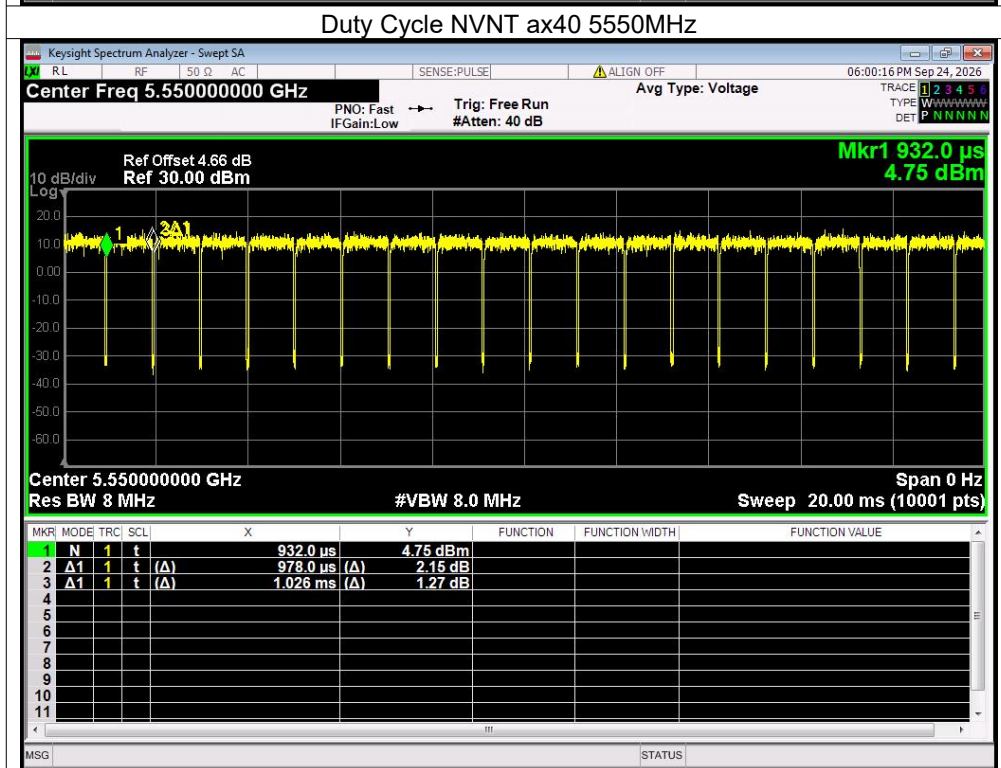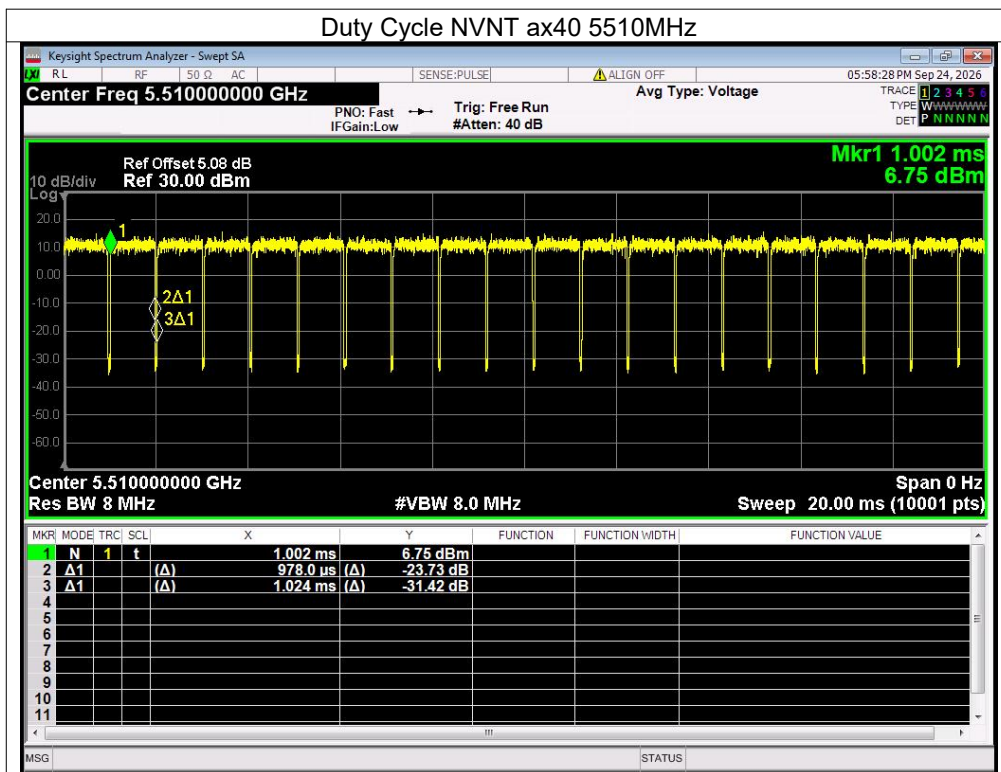

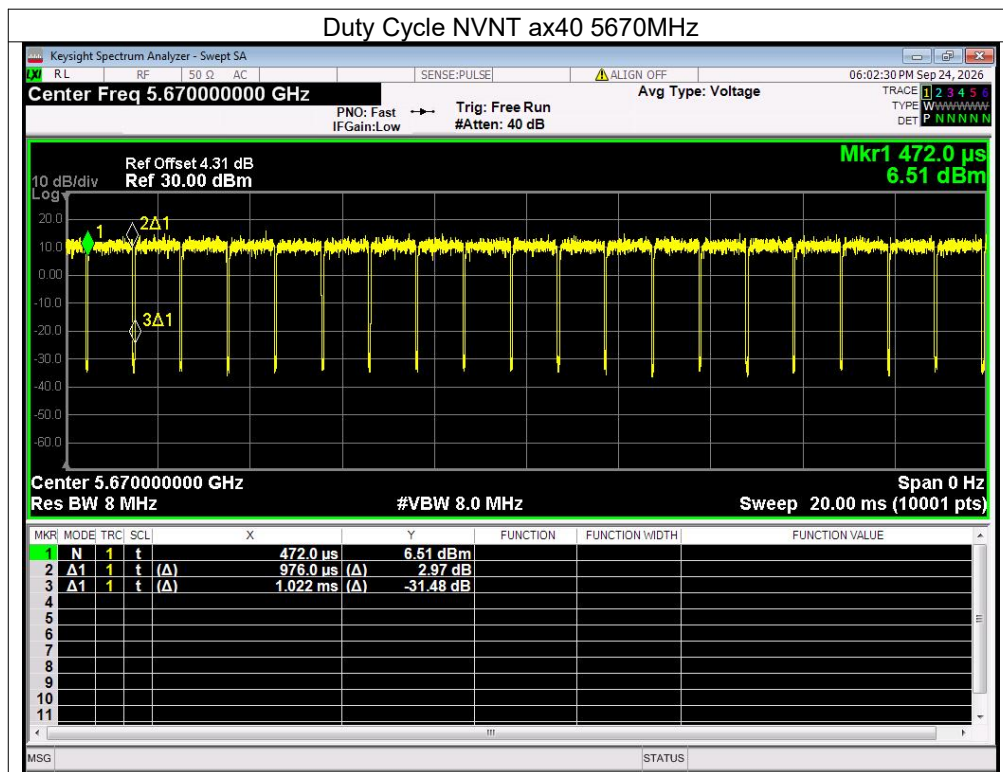



Maximum Output Power

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5500	11.76	0.21	11.97	<=24	Pass
a	5580	11.92	0.2	12.12	<=24	Pass
a	5700	11.84	0.2	12.04	<=24	Pass
n20	5500	12.58	0.2	12.78	<=24	Pass
n20	5580	11.79	0.2	11.99	<=24	Pass
n20	5700	12.6	0.2	12.8	<=24	Pass
n40	5510	12.24	0.21	12.45	<=24	Pass
n40	5550	11.91	0.2	12.11	<=24	Pass
n40	5670	11.77	0.2	11.97	<=24	Pass
ac20	5500	12.02	0.21	12.23	<=24	Pass
ac20	5580	11.28	0.2	11.48	<=24	Pass
ac20	5700	12.18	0.21	12.39	<=24	Pass
ac40	5510	12.19	0.21	12.4	<=24	Pass
ac40	5550	11.8	0.2	12	<=24	Pass
ac40	5670	11.67	0.2	11.87	<=24	Pass
ax20	5500	11.78	0.21	11.99	<=24	Pass
ax20	5580	10.95	0.2	11.15	<=24	Pass
ax20	5700	11.84	0.2	12.04	<=24	Pass
ax40	5510	11.91	0.2	12.11	<=24	Pass
ax40	5550	11.56	0.21	11.77	<=24	Pass
ax40	5670	11.44	0.2	11.64	<=24	Pass



-26dB Bandwidth

Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
a	5500	23.38	Pass
a	5580	22.75	Pass
a	5700	23.38	Pass
n20	5500	23.65	Pass
n20	5580	23.09	Pass
n20	5700	22.97	Pass
n40	5510	42.8	Pass
n40	5550	44.43	Pass
n40	5670	43.71	Pass
ac20	5500	23.15	Pass
ac20	5580	23.45	Pass
ac20	5700	23.33	Pass
ac40	5510	43.21	Pass
ac40	5550	43.17	Pass
ac40	5670	44.29	Pass
ax20	5500	23.56	Pass
ax20	5580	23.17	Pass
ax20	5700	22.27	Pass
ax40	5510	43.83	Pass
ax40	5550	42.52	Pass
ax40	5670	42.52	Pass

