

SW0800-8060

3.5-8.2GHz Silicon Chip Design Antenna

Description

The SW0800-8060 is an ultra-compact chip antenna for UWB 3.5-8.2GHz-band applications. Its size is only 8.0*6.0*1.2mm, which is suitable for compact wearable devices for indoor positioning and navigation applications.

Applications

Indoor Positioning and Navigation using 802.15.4a/z or other UWB standards for low frequency band.

Explanation of Part Number

SW 0800 8060

(1) (2) (3)

(1) SW: Siliconwave;

(2) 0800: 3.5-8.2GHz;

(3) 8060: Size Code 8.0mm(Length) x 6.0mm(Width).

Size Information

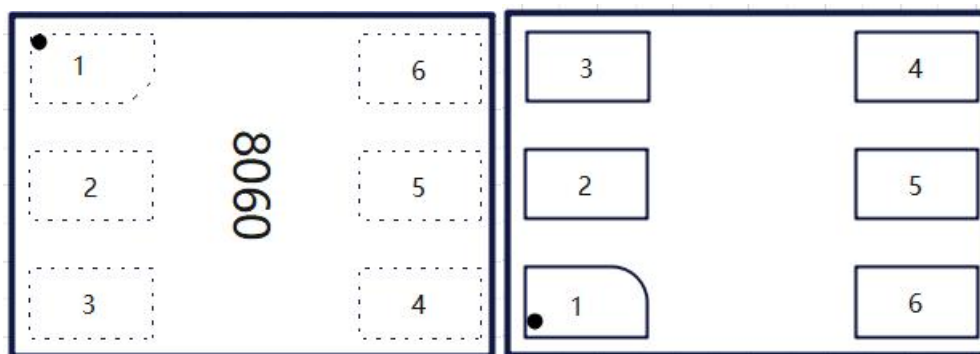


Figure 1. SW0800-8060 Pin Configuration and Marking

Pin Names And Signal Descriptions

Table1. PIN name and description


Pin	Name	Description
1	NC	NC pad
2	IN	INPUT pad
3	NC	NC pad
4	NC	NC pad
5	NC	NC pad
6	NC	NC pad

Order Information


Table 2. Order Information

Part Number	Temperature	Package	RoHS	Mark	SPQ
SW0800-8060	-40°C ~ 85°C	Tape and Reel	Yes	8060	3000 pcs/Reel

Recommend PCB Layout

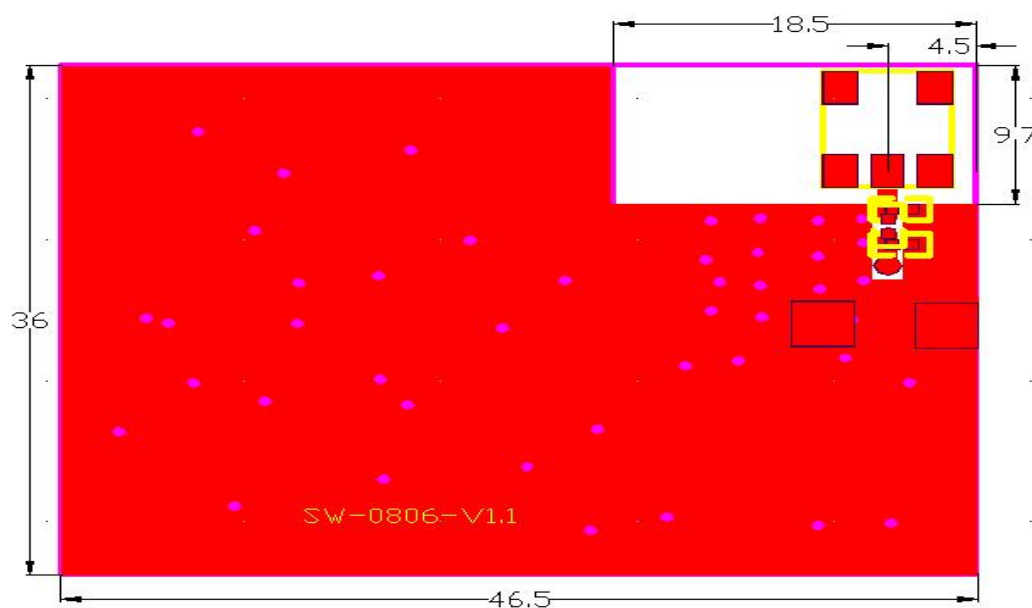


Electrical Characteristics

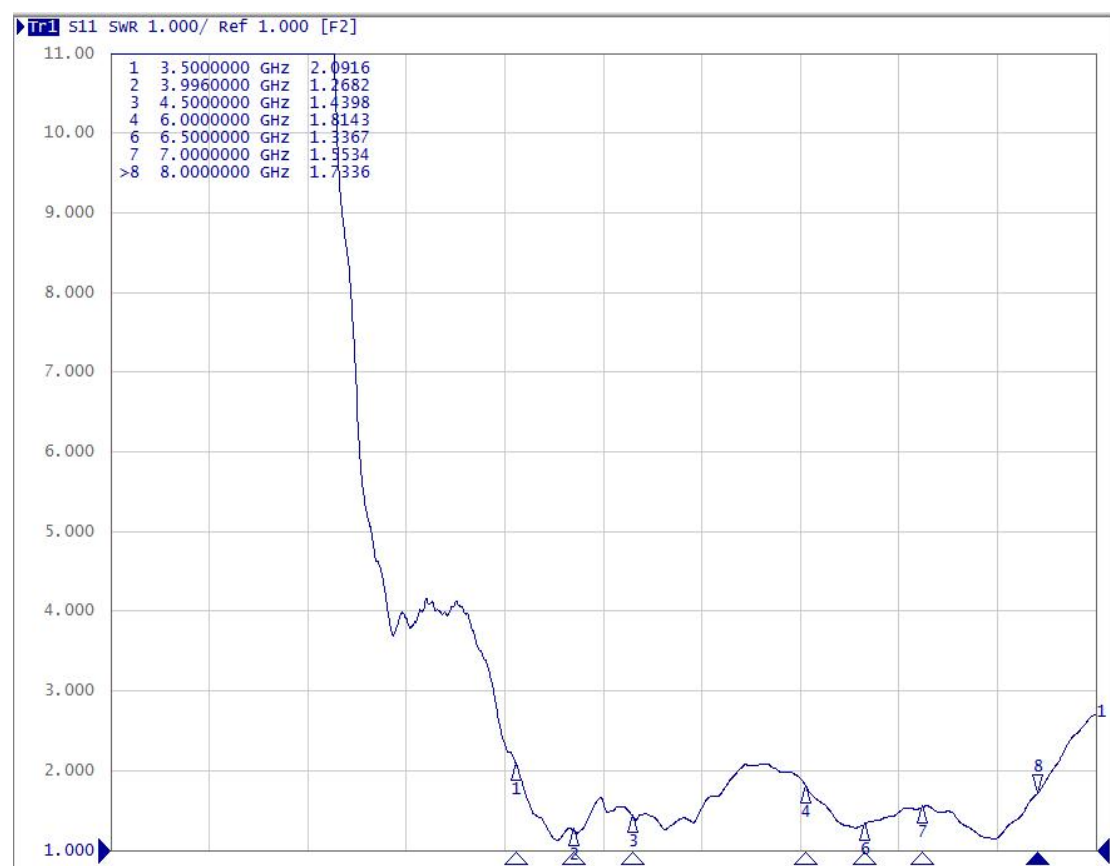


Freq(MHz)	3500	3900	4300	5300	5900	6300	6900	7300	7700	8000	8200
Efficiency(%)	85.0	88.0	79.4	70.8	70.9	90.0	89.0	87.7	81.8	85.6	84.1
Gain(dB)	3	3	2	2.8	3.1	3.6	3.9	4.3	5.1	5.3	5.1

Frequency=3900MHz

Total

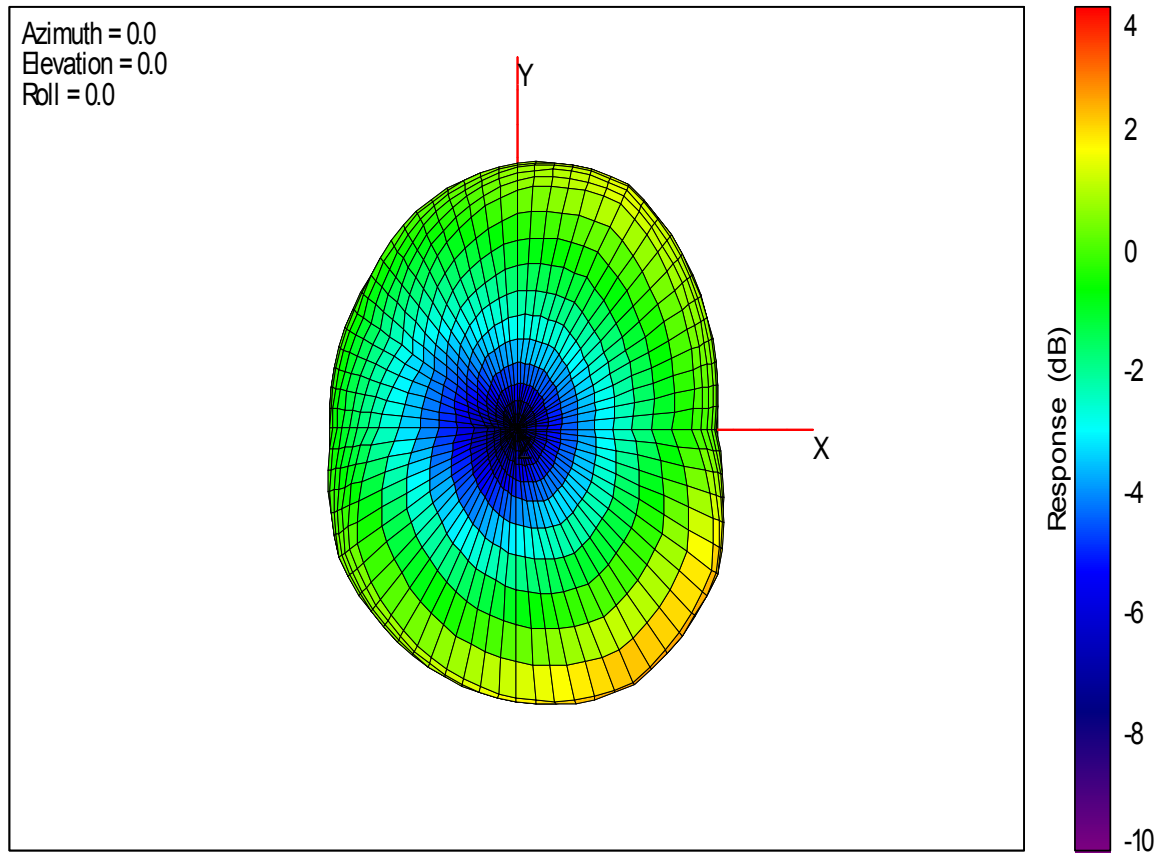


Total

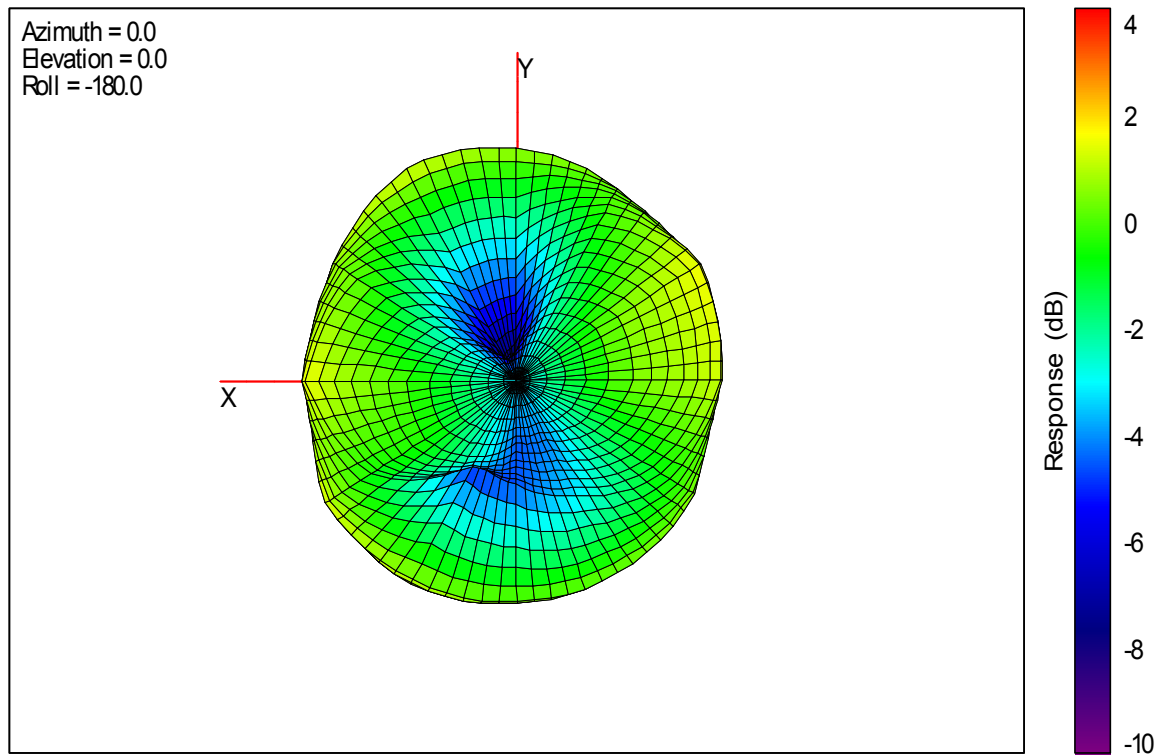


Frequency=6500MHz



Total

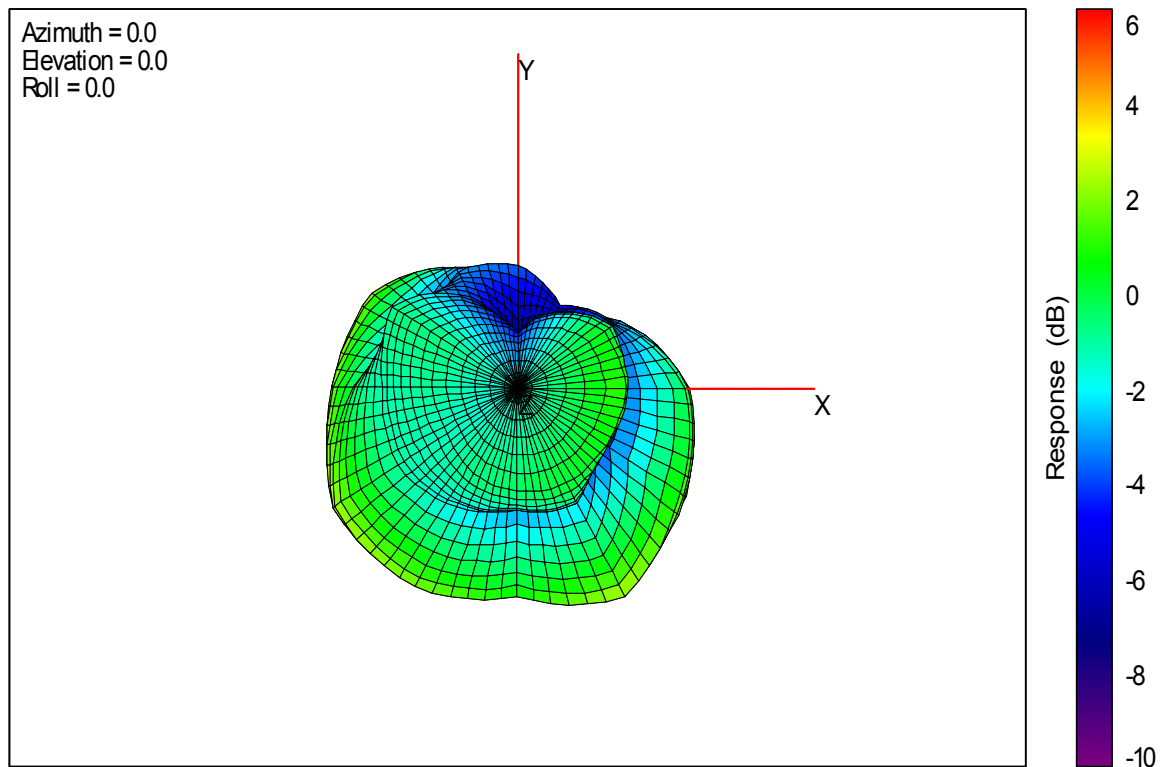

Total

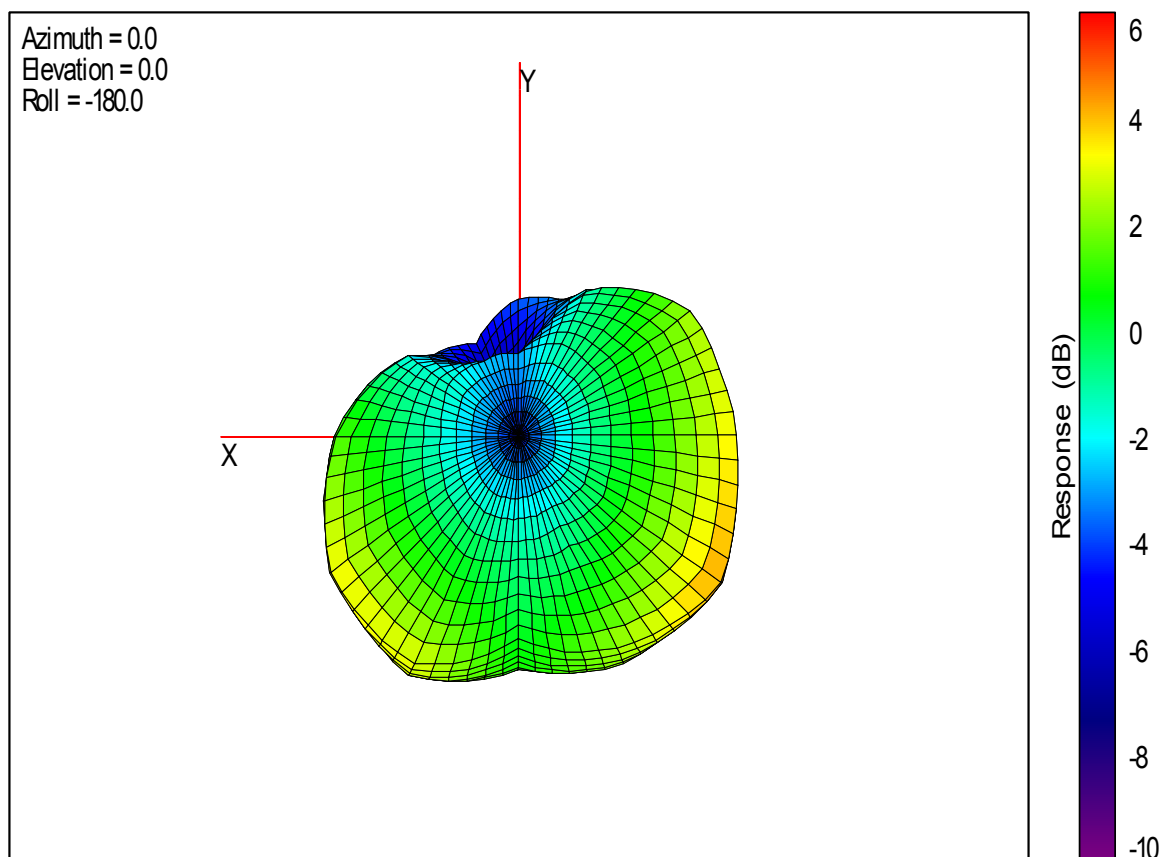


Frequency=7900MHz

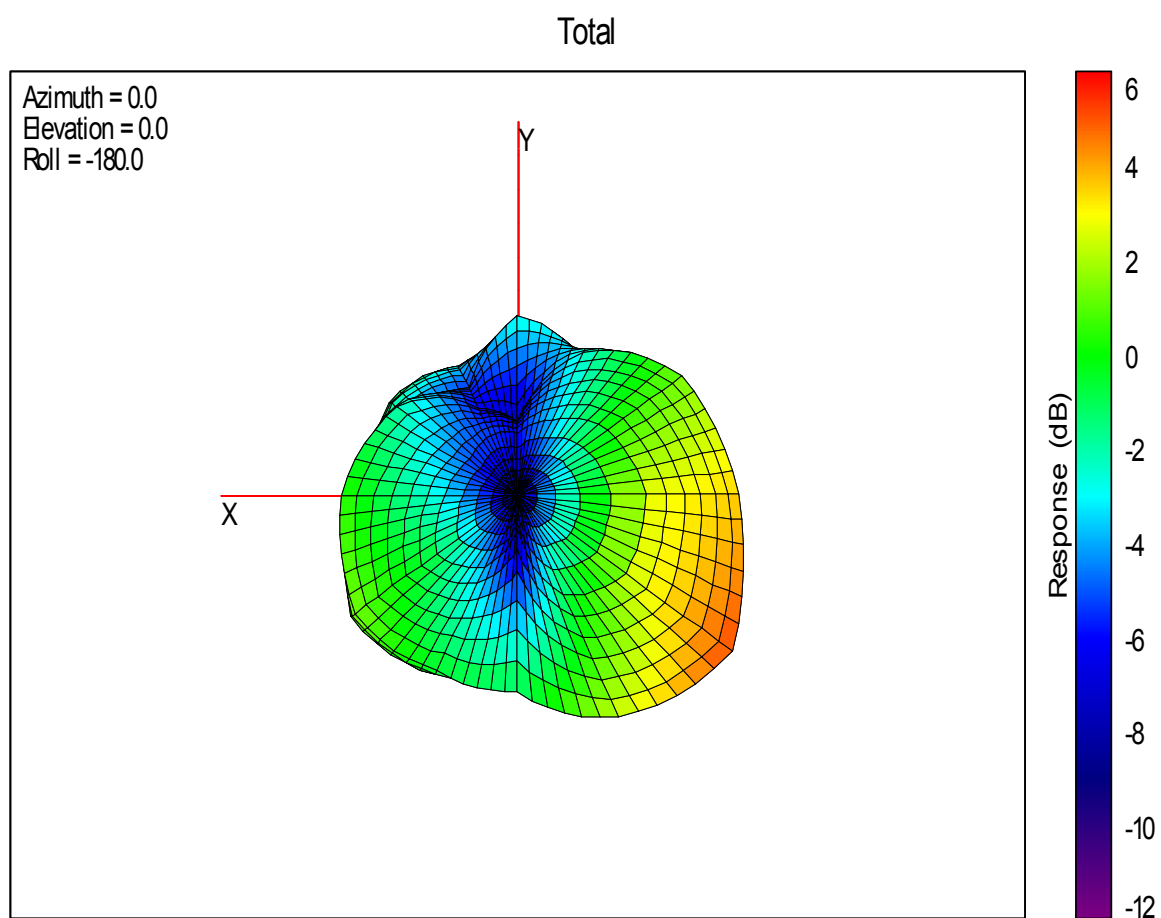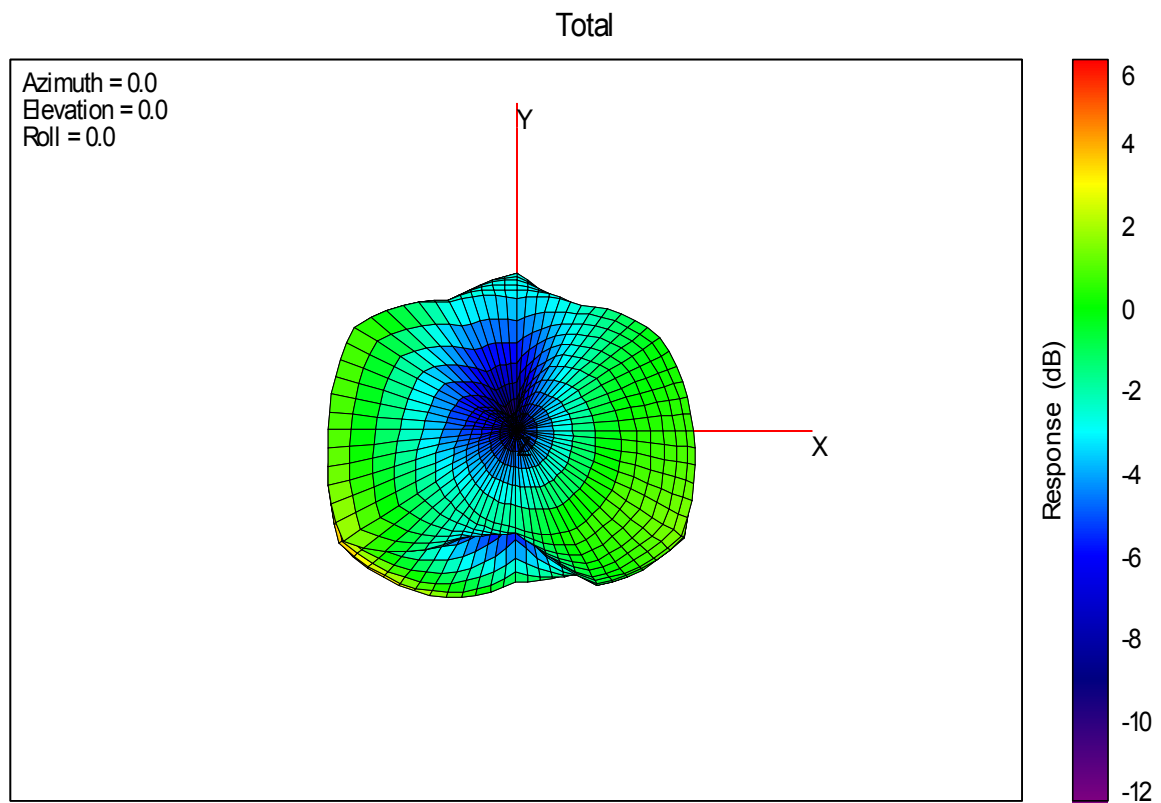


Package Information


➤ Package Outline Dimensions:

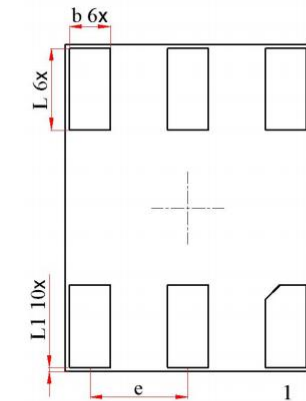

Bottom View

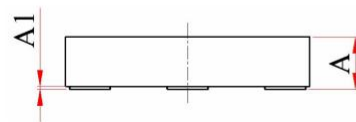

Side View

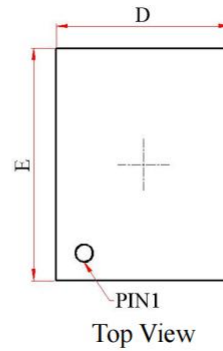

Top View

Symbol	Dimension In Millimeters			Dimension In Inches		
	Normal	Min	Max	Normal	Min	Max
A	--	1.170	1.230	--	0.046	0.048
A1	--	--	0.005	--	--	0.000
D	6.000	5.900	6.100	0.236	0.232	0.240
E	8.000	7.900	8.100	0.315	0.311	0.319
b	1.000	0.900	1.100	0.039	0.035	0.043
L	2.000	1.900	2.100	0.079	0.075	0.083
L1	0.100	0.010	0.190	0.004	0.000	0.007
e	2.400 BSC			0.094 BSC		

Recommended Solder Temperature

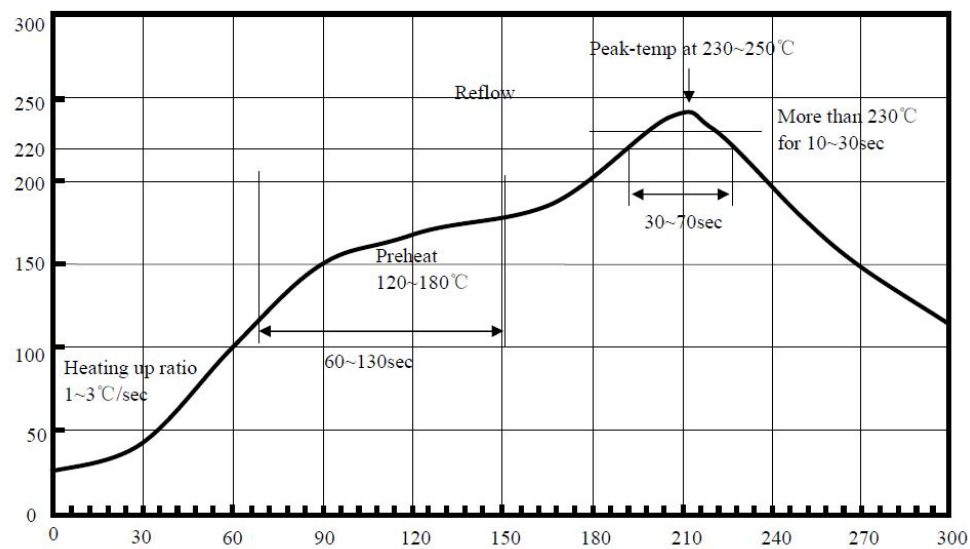


Figure 3. Recommended Solder Temperature

RoHS Compliant

The product does not contain lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls(PBB) or polybrominated diphenyl ethers(PBDE), and are therefore considered RoHS compliant

Revision History

Document ID	Release Date	Change Record
V1.0	2022.09	Officially released

Important Notes

- All data or information contained herein are subject to change without prior notice. Please contact SILICONWAVE for further details of product specification.
- Customers should conduct validation and verification of our products in actual condition of mounting and operating environment before placing orders for SILICONWAVE products.
- The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.
- SILICONWAVE products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.
- The contents of this specification are applicable to our products which are purchased from our sales offices or authorized distributors (hereinafter “SILICONWAVE’s official sales channel”). Please note that the contents of this specification are not applicable to our products purchased from any seller other than SILICONWAVE’s official sales channel.

Contact Information

安徽矽磊电子科技有限公司

Anhui Siliconwave Electronic Technology Co., Ltd.

Web: www.siliconwave.com.cn

Tel: 0551-6902 2219

Address: Room 2206, building F1, the Innovation Industrial Park of Hefei hi tech Zone in Anhui, China.

© 2022 Copyright Siliconwave Property

Siliconwave reserves the right to make changes to the information contained herein without notice.

No liability shall be incurred as a result of its use or application.