



Test mode:	Low Channel (824.7MHz)	Polarity:	Vertical
------------	------------------------	-----------	----------

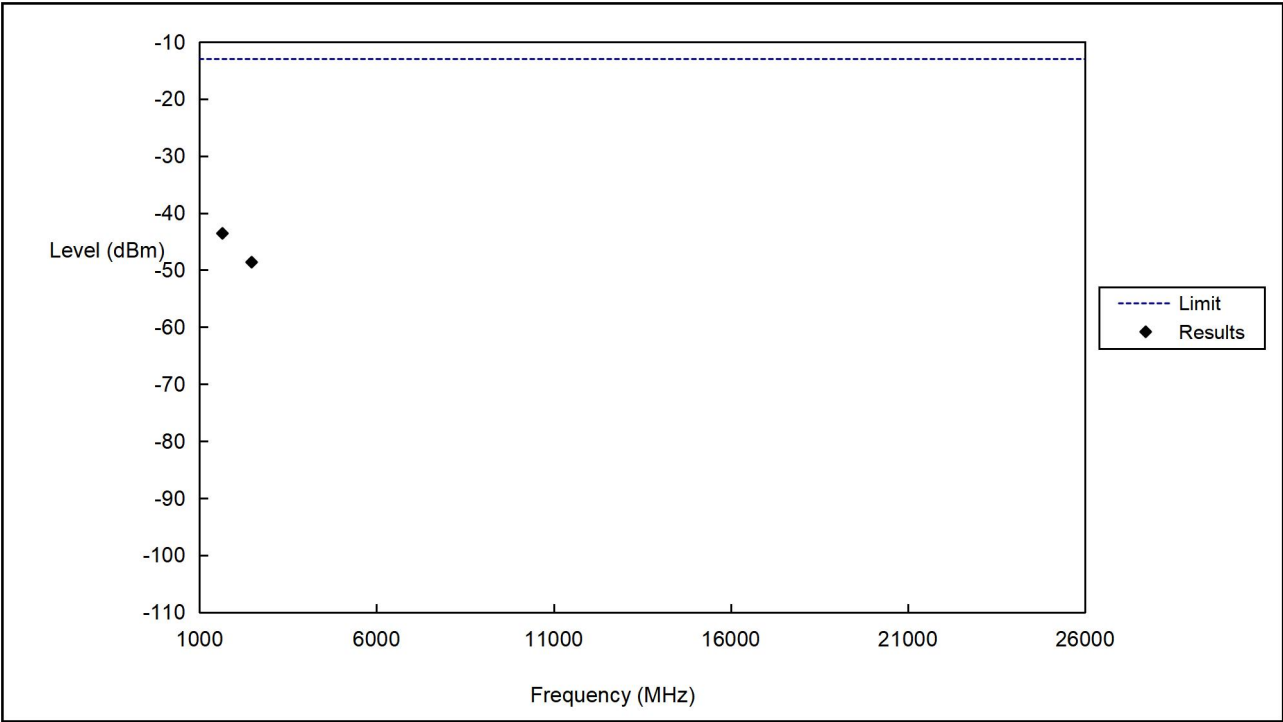


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1649.40	-43.57	-13	-30.57	RMS
2	2474.10	-48.62	-13	-35.62	RMS

Test mode:	Middle Channel (836.5MHz)	Polarity:	Horizontal
------------	---------------------------	-----------	------------

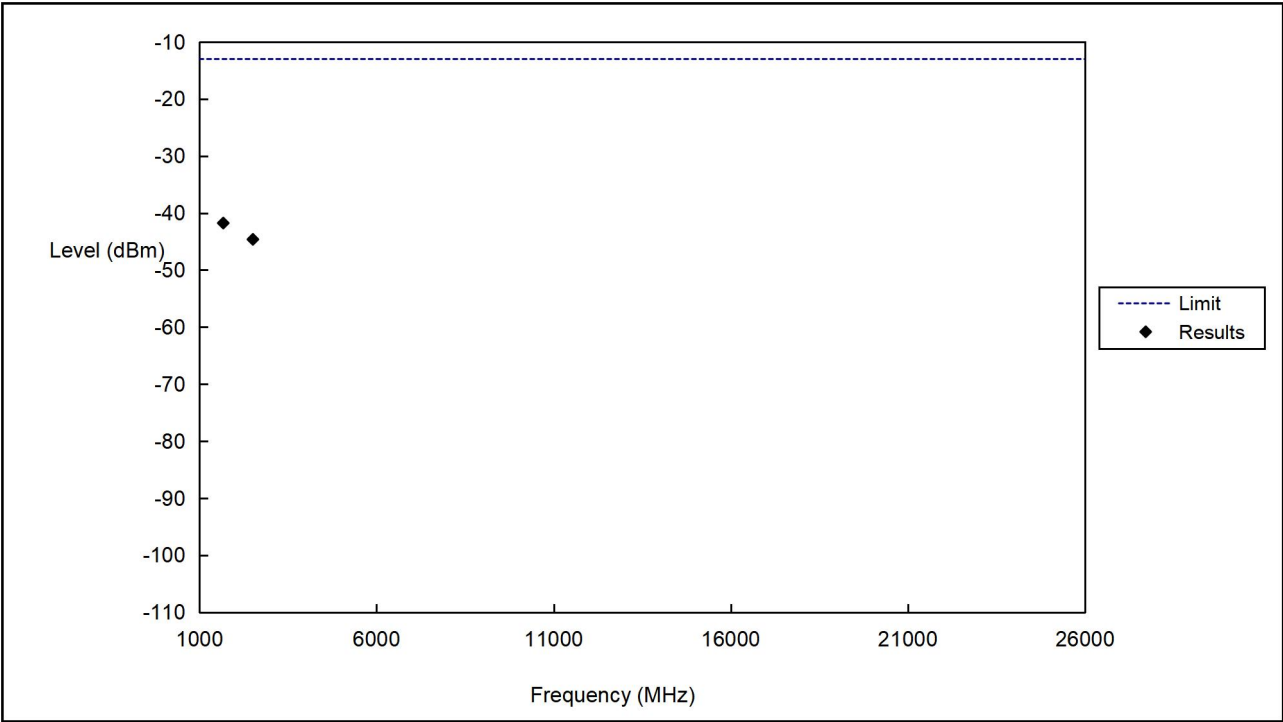


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1673.00	-41.76	-13	-28.76	RMS
2	2509.50	-44.62	-13	-31.62	RMS

Test mode:	Middle Channel (836.5MHz)	Polarity:	Vertical
------------	---------------------------	-----------	----------

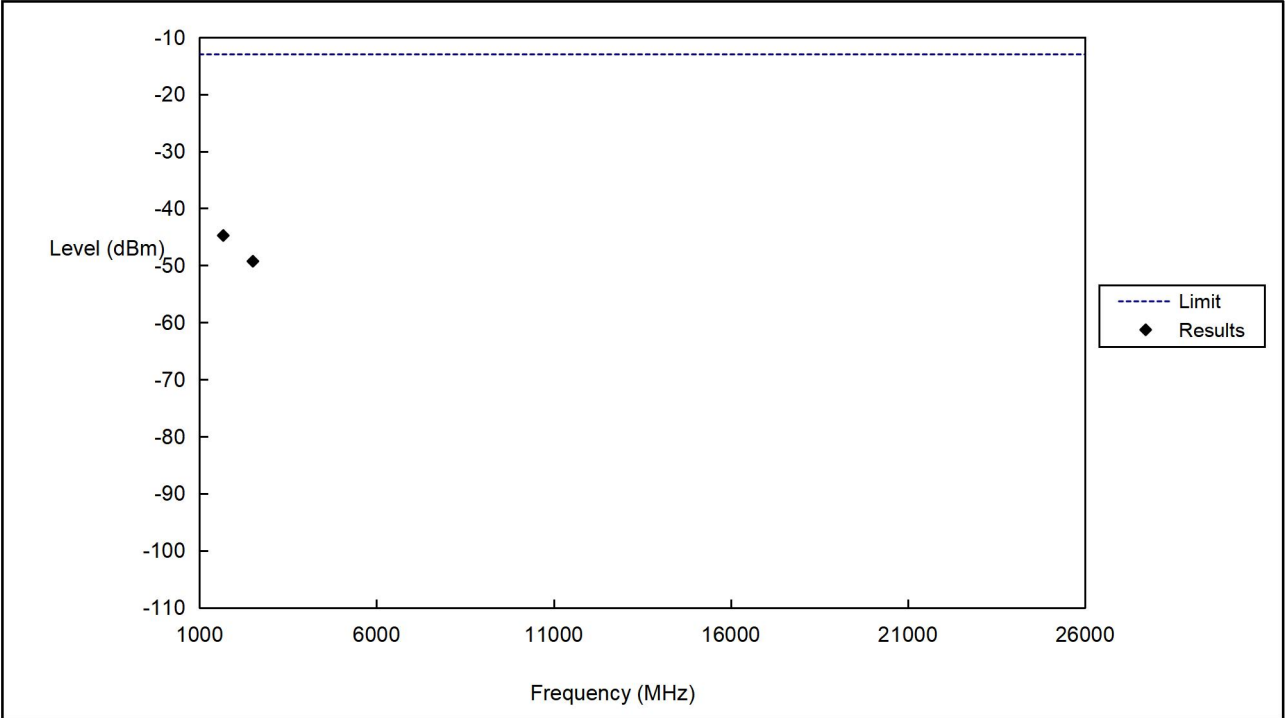


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1673.00	-44.76	-13	-31.76	RMS
2	2509.50	-49.28	-13	-36.28	RMS

Test mode:	High Channel (848.3MHz)	Polarity:	Horizontal
------------	-------------------------	-----------	------------

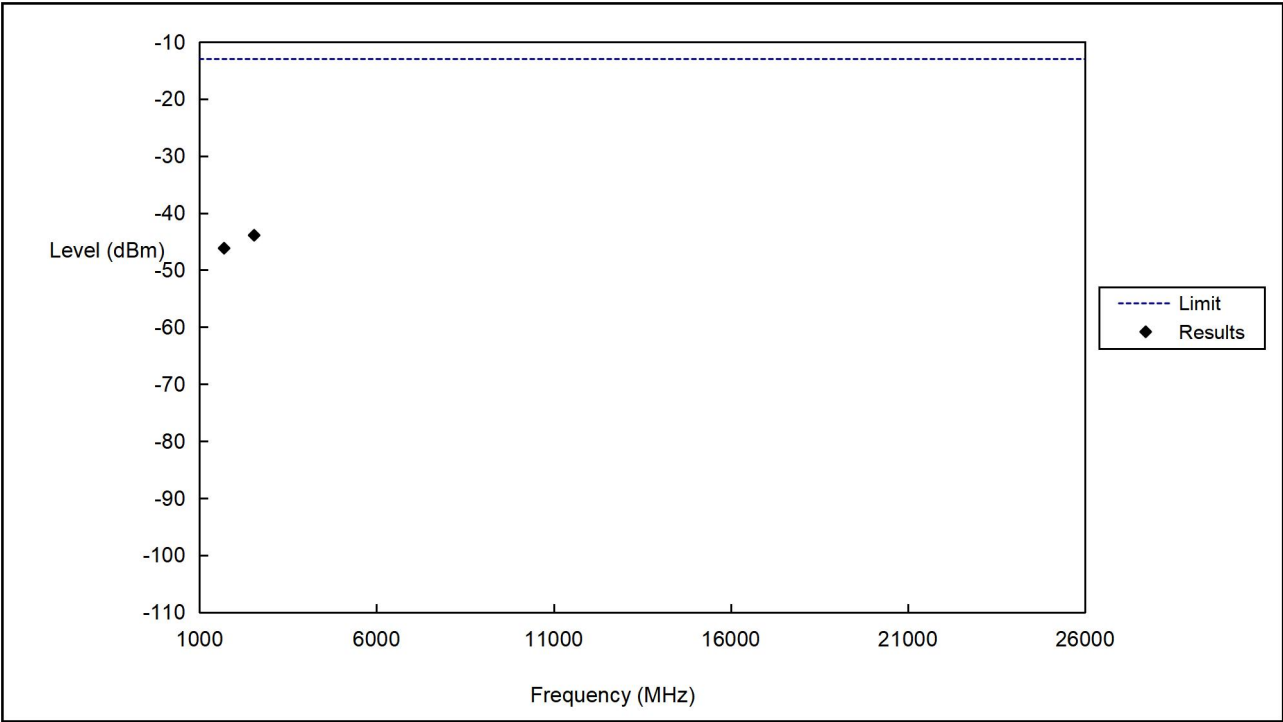

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1696.60	-46.17	-13	-33.17	RMS
2	2544.90	-43.90	-13	-30.90	RMS


Test mode:	High Channel (848.3MHz)	Polarity:	Vertical
------------	-------------------------	-----------	----------

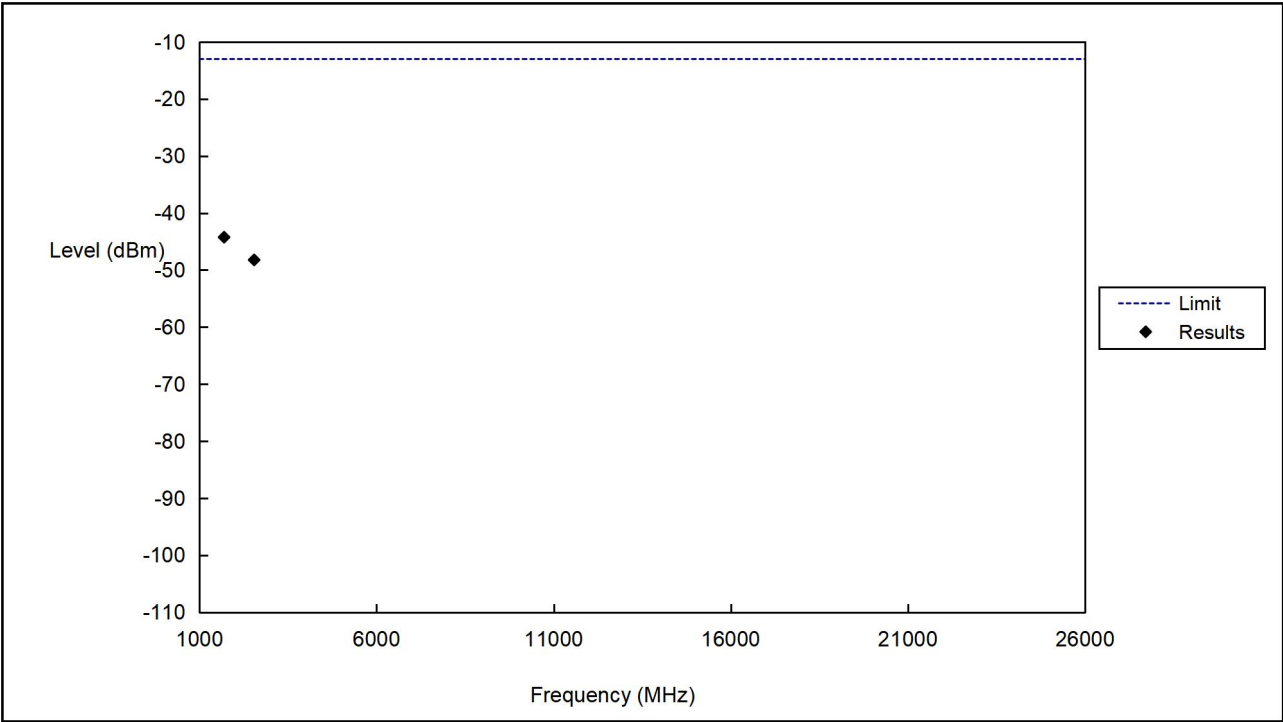

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1696.60	-44.24	-13	-31.24	RMS
2	2544.90	-48.22	-13	-35.22	RMS


For FDD_LTE Band 66 Mode

Test mode:	Low Channel (1710.7MHz)	Polarity:	Horizontal
------------	-------------------------	-----------	------------

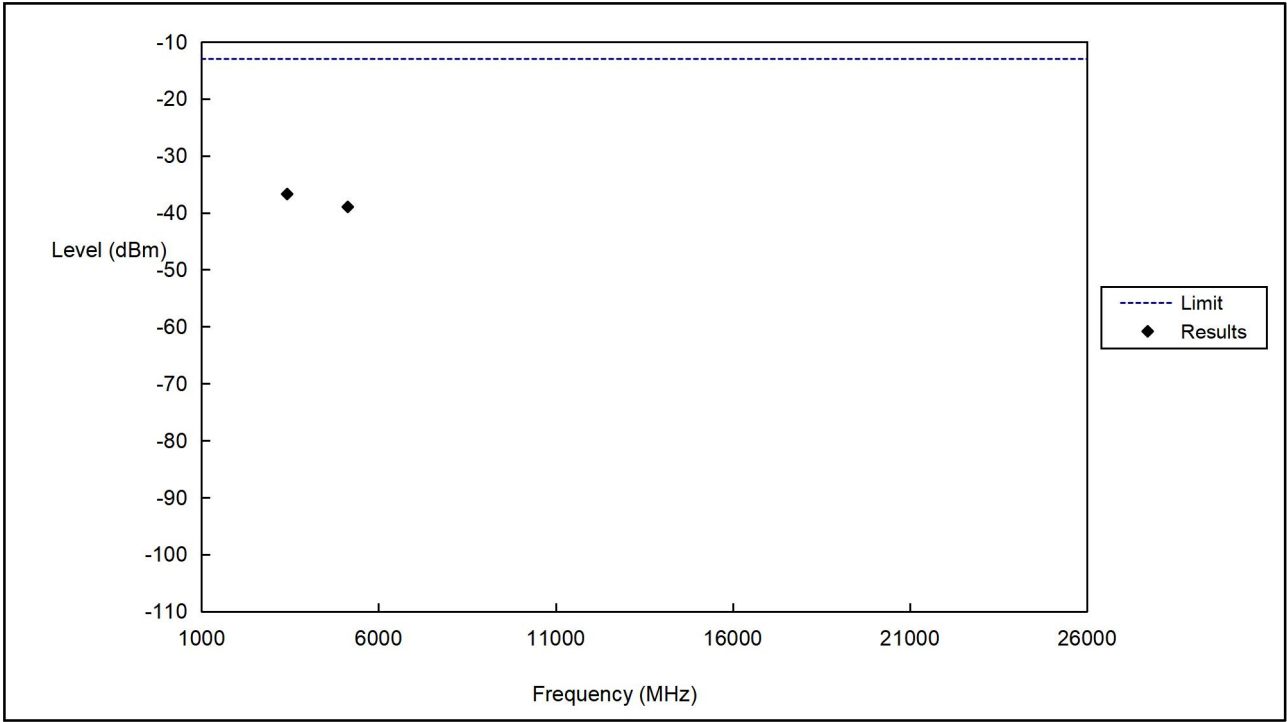


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3420.77	-36.72	-13	-23.72	RMS
2	5131.47	-38.98	-13	-25.98	RMS

Test mode:	Low Channel (1710.7MHz)	Polarity:	Vertical
------------	-------------------------	-----------	----------

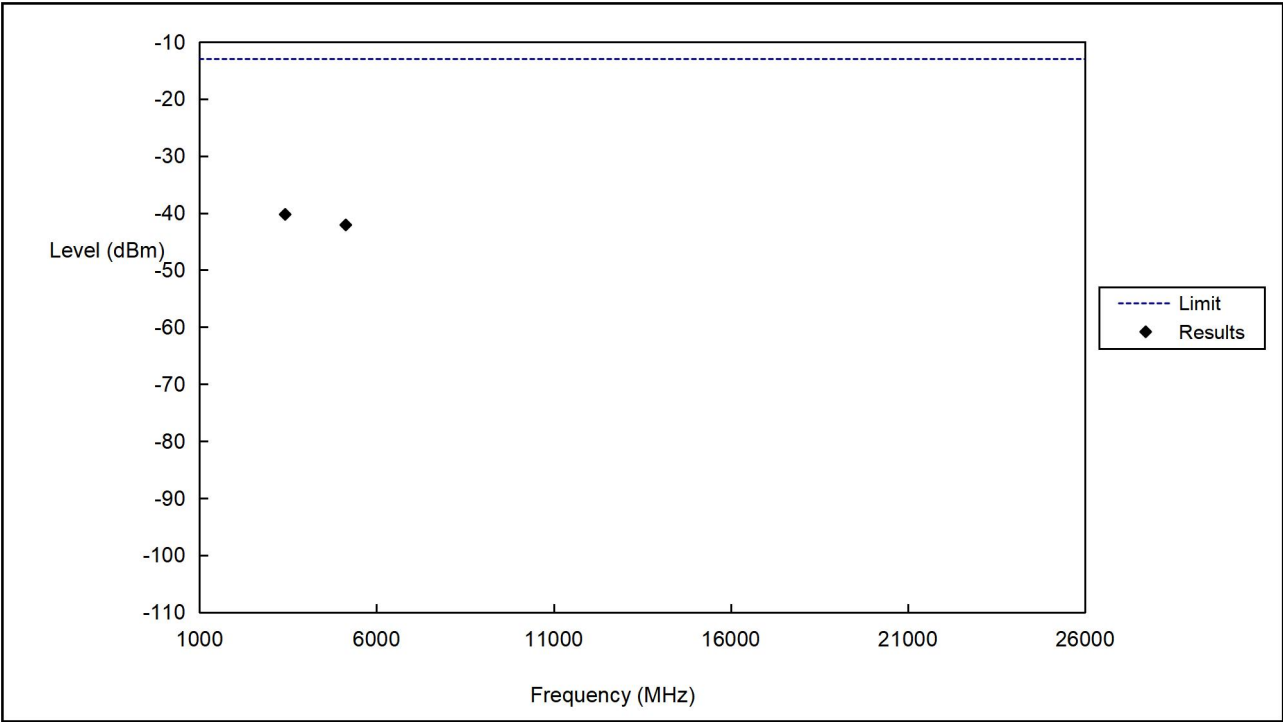


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3420.77	-40.24	-13	-27.24	RMS
2	5131.47	-42.09	-13	-29.09	RMS

Test mode:	Middle Channel (1745MHz)	Polarity:	Horizontal
------------	--------------------------	-----------	------------

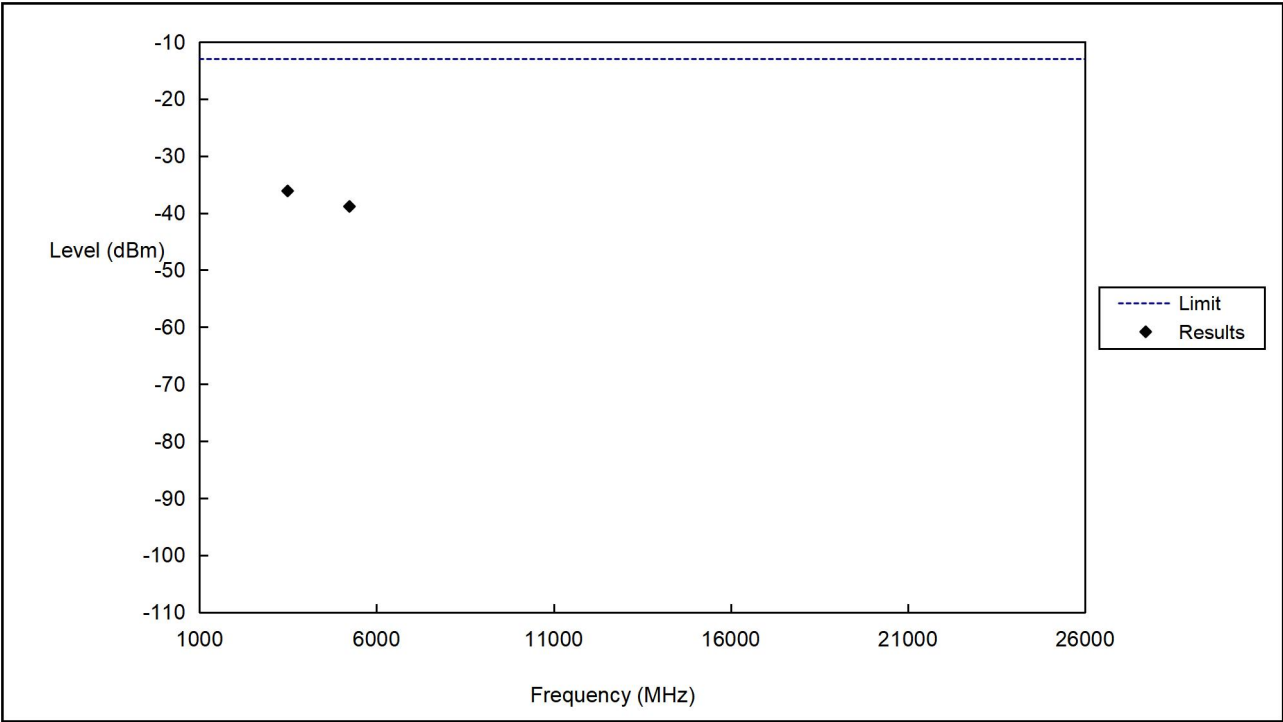


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3490.00	-36.13	-13	-23.13	RMS
2	5235.00	-38.85	-13	-25.85	RMS

Test mode:	Middle Channel (1745MHz)	Polarity:	Vertical
------------	--------------------------	-----------	----------

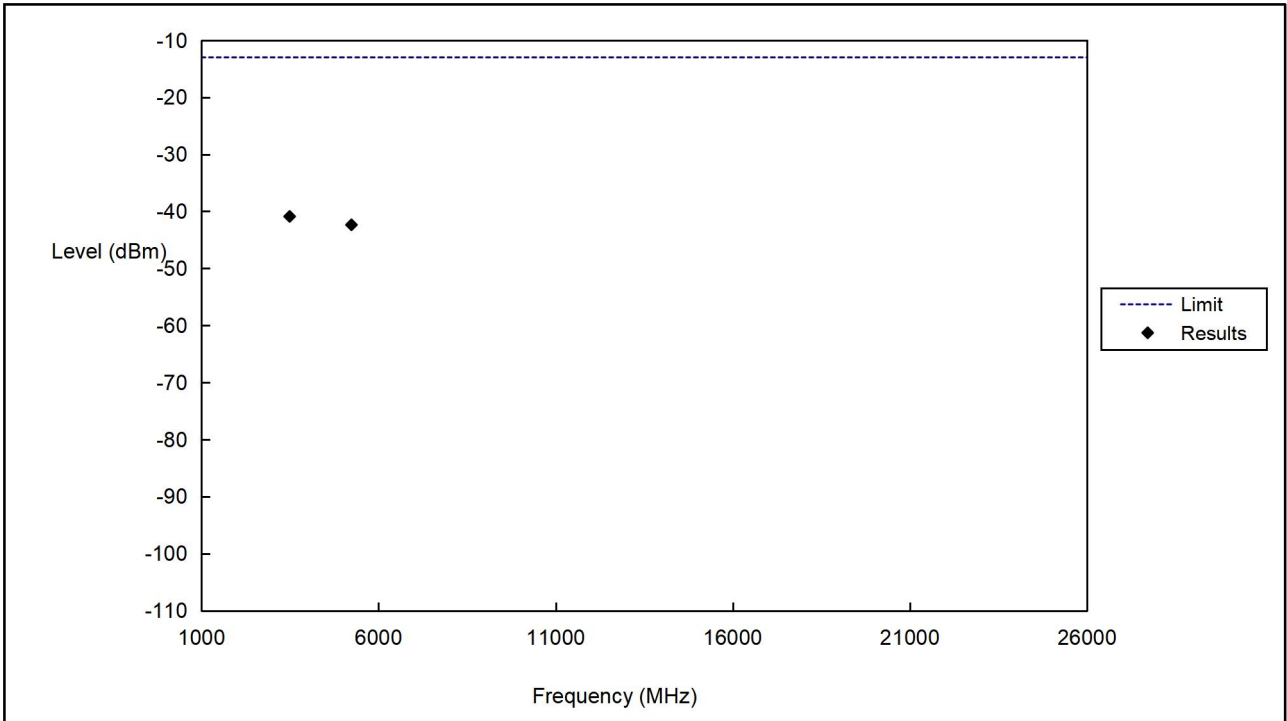


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3490.00	-40.89	-13	-27.89	RMS
2	5235.00	-42.36	-13	-29.36	RMS

Test mode:	High Channel (1779.3MHz)	Polarity:	Horizontal
------------	--------------------------	-----------	------------

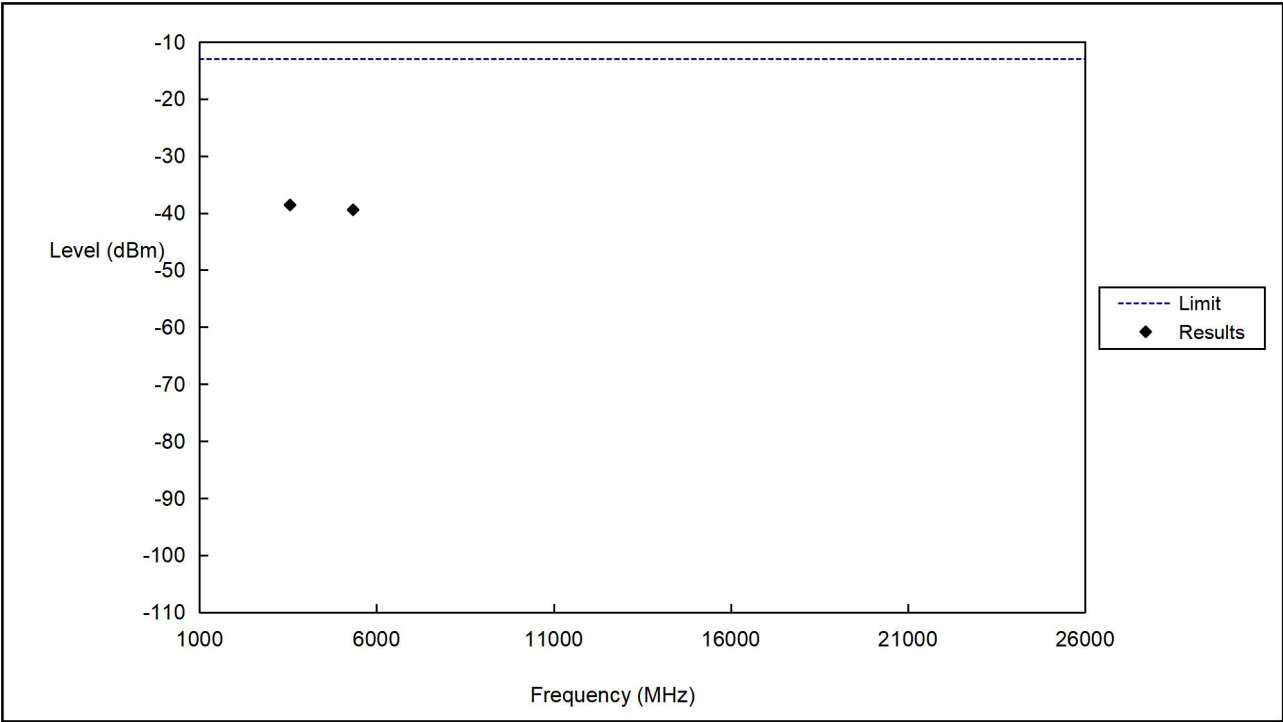

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3558.60	-38.59	-13	-25.59	RMS
2	5337.90	-39.44	-13	-26.44	RMS


Test mode:	High Channel (1779.3MHz)	Polarity:	Vertical
------------	--------------------------	-----------	----------

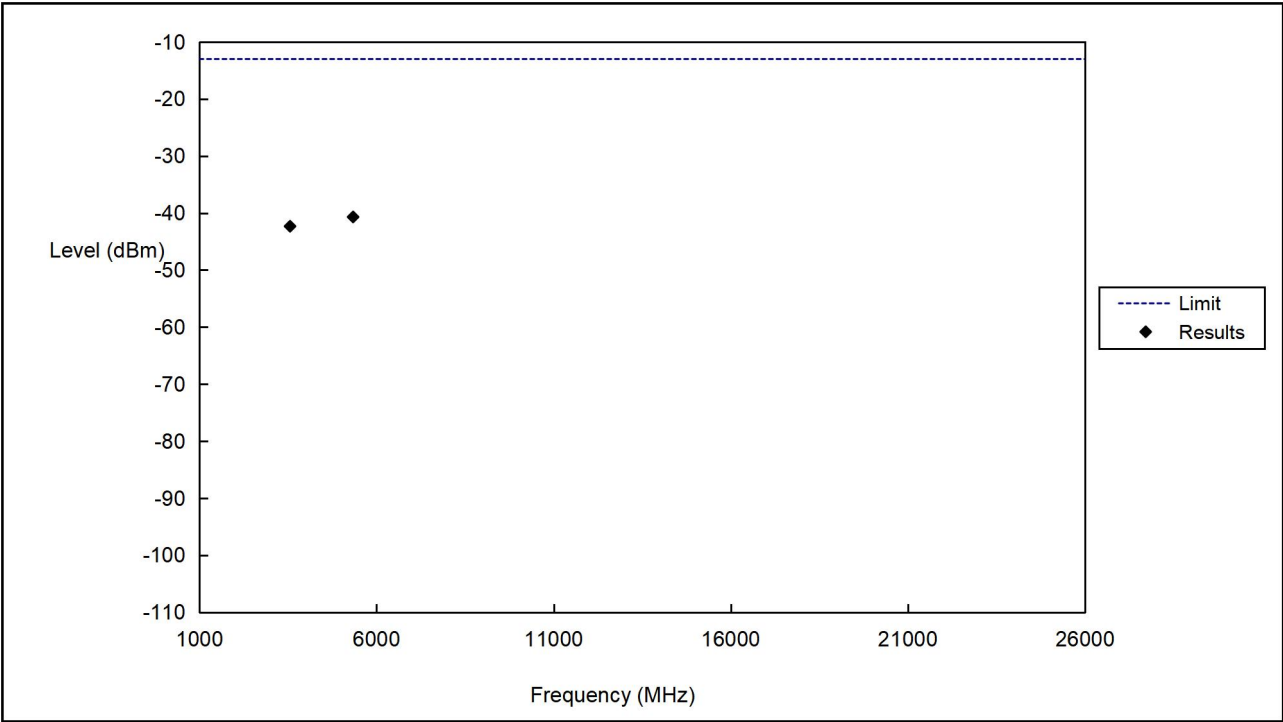

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3558.60	-42.32	-13	-29.32	RMS
2	5337.90	-40.69	-13	-27.69	RMS


For FDD_LTE Band 85 Mode

Test mode:	Low Channel (700.5MHz)	Polarity:	Horizontal
------------	------------------------	-----------	------------

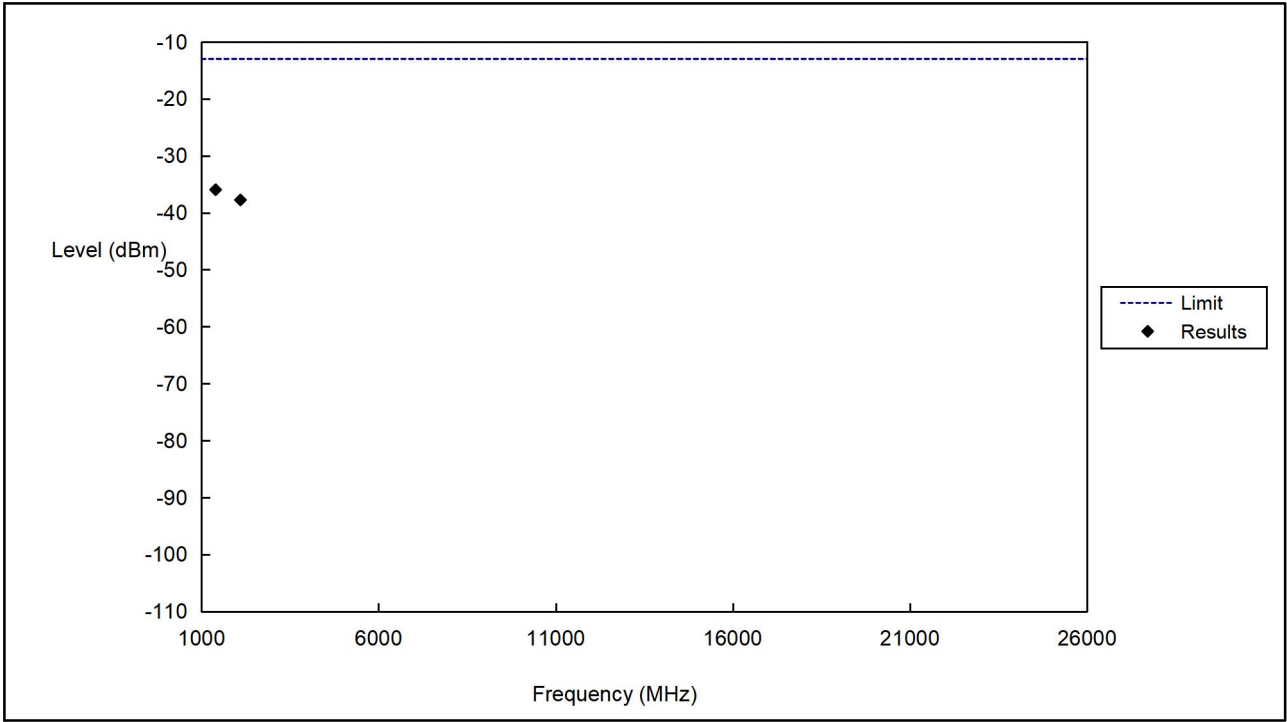


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1401.00	-35.96	-13	-22.96	RMS
2	2101.50	-37.76	-13	-24.76	RMS

Test mode:	Low Channel (700.5MHz)	Polarity:	Vertical
------------	------------------------	-----------	----------

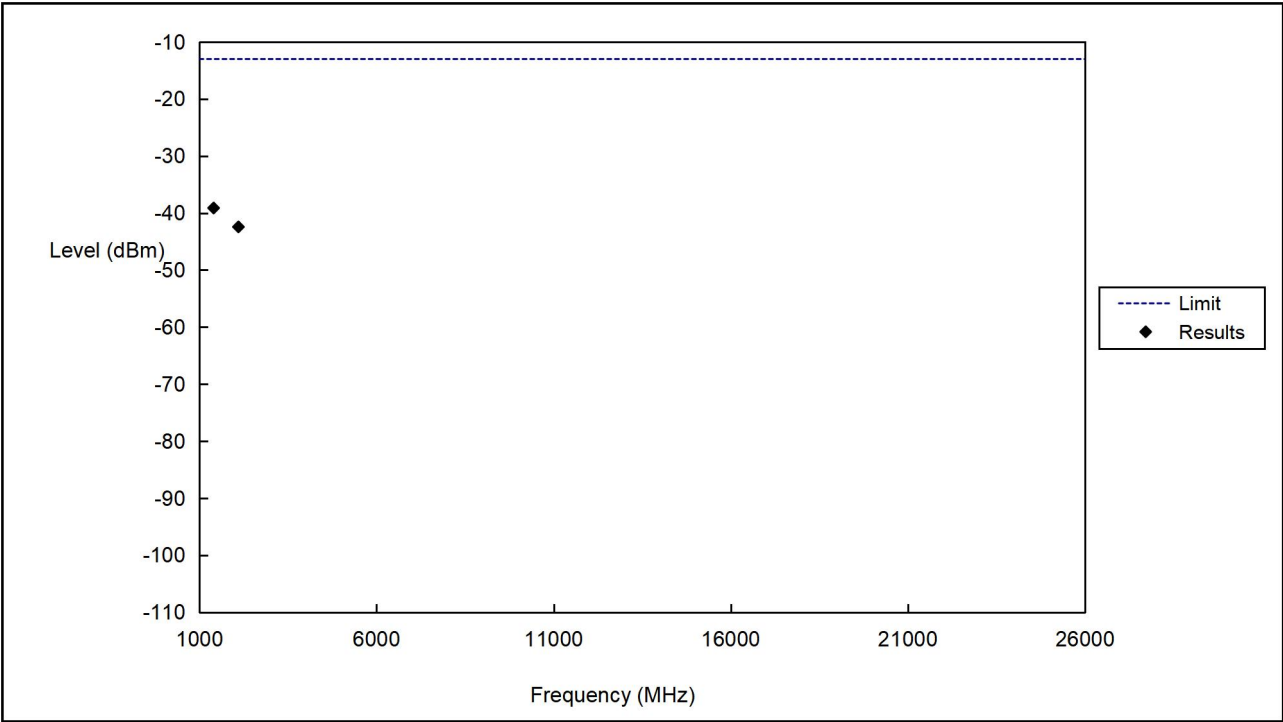


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1401.00	-39.12	-13	-26.12	RMS
2	2101.50	-42.43	-13	-29.43	RMS

Test mode:	Middle Channel (707MHz)	Polarity:	Horizontal
------------	-------------------------	-----------	------------

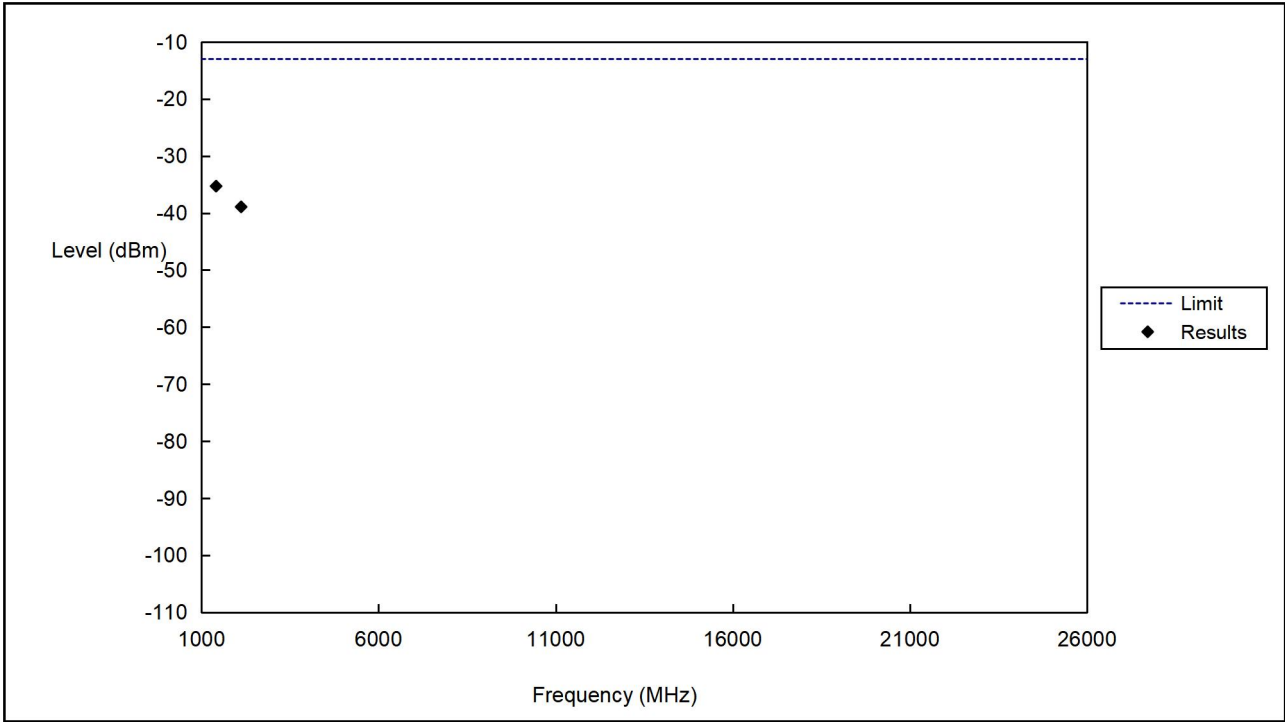


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1414.00	-35.29	-13	-22.29	RMS
2	2121.00	-38.92	-13	-25.92	RMS

Test mode:	Middle Channel (707MHz)	Polarity:	Vertical
------------	-------------------------	-----------	----------

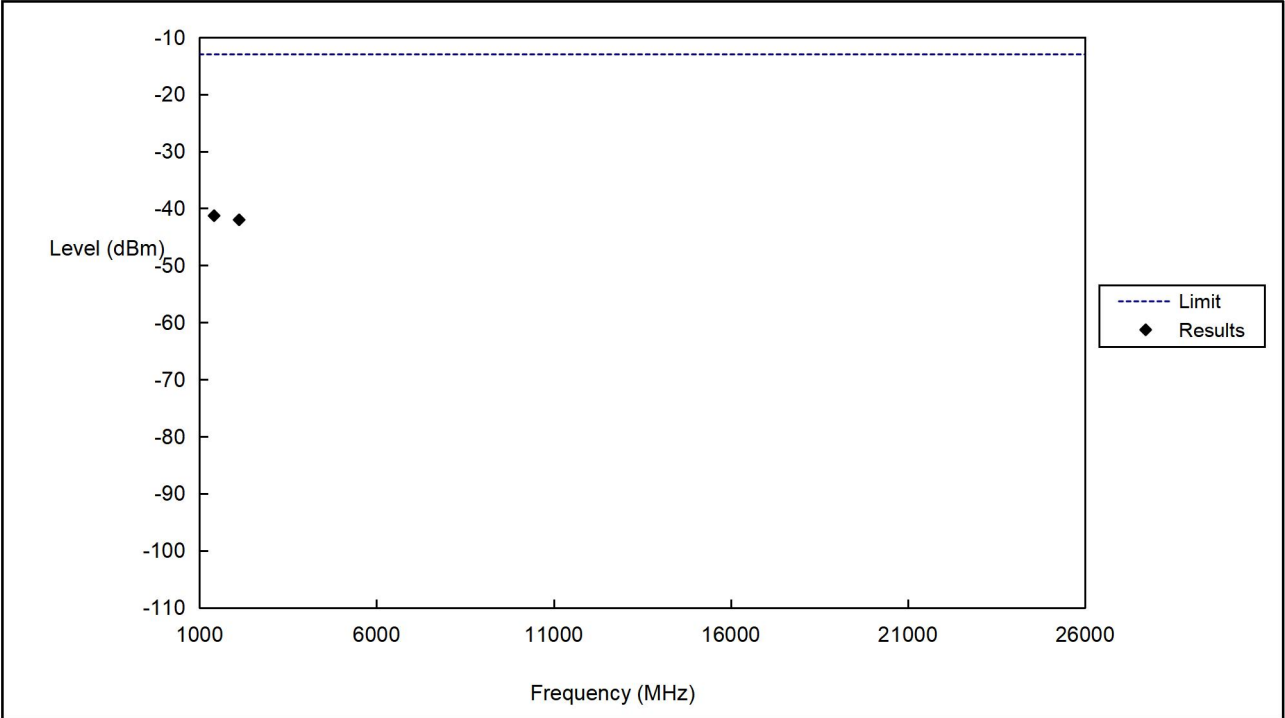


No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1414.00	-41.29	-13	-28.29	RMS
2	2121.00	-42.01	-13	-29.01	RMS

Test mode:	High Channel (713.5MHz)	Polarity:	Horizontal
------------	-------------------------	-----------	------------

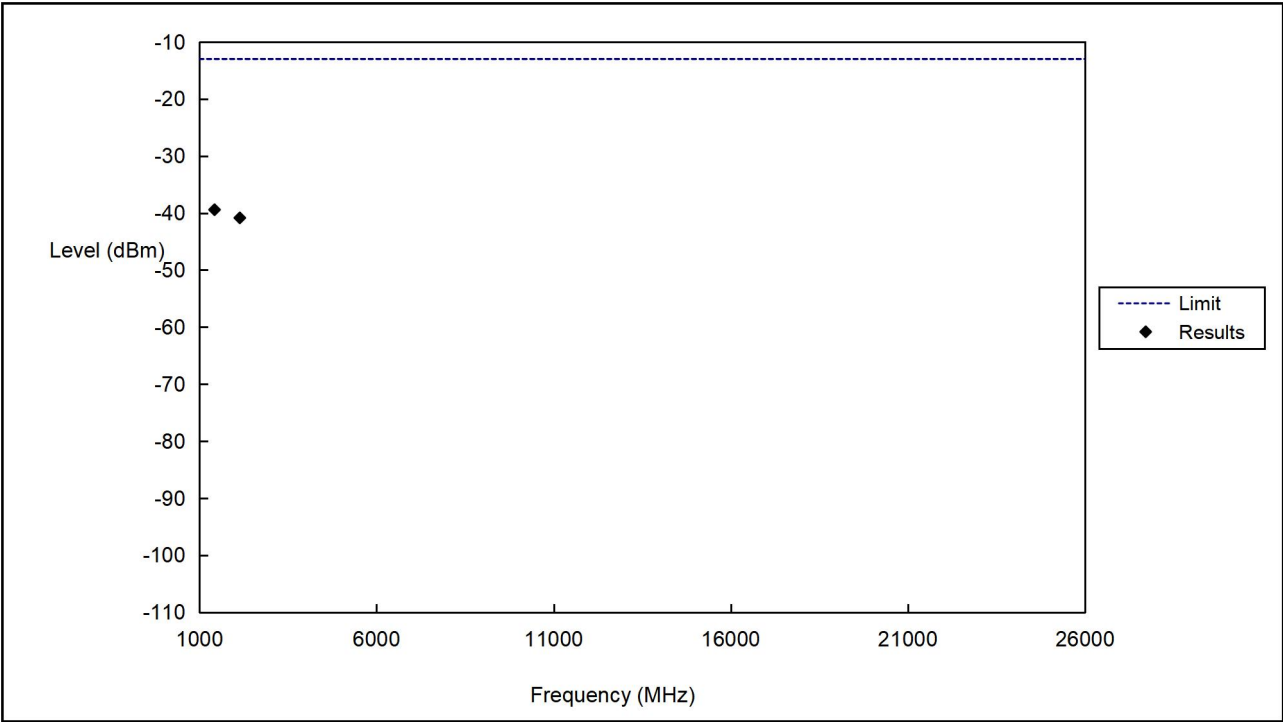

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1427.00	-39.42	-13	-26.42	RMS
2	2140.50	-40.85	-13	-27.85	RMS

Test mode:	High Channel (713.5MHz)	Polarity:	Vertical
------------	-------------------------	-----------	----------

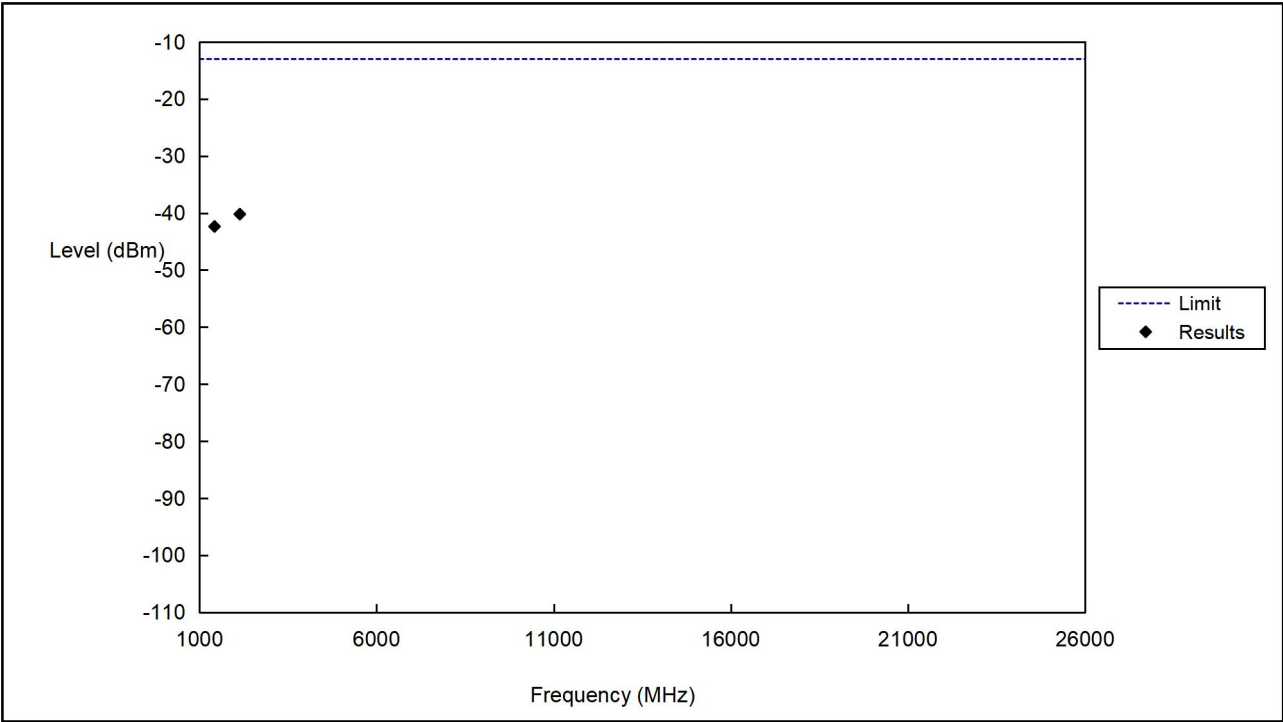

No.	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	1427.00	-42.36	-13	-29.36	RMS
2	2140.50	-40.20	-13	-27.20	RMS

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Frequency Stability

8.1 Standard Applicable

According to §22.355, §24.235, §27.54 the limit is 2.5ppm.

8.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

8.3 Summary of Test Results/Plots

Reference to the report 77535RRF.001A1& 77535RRF.002A1& 77535RRF.003A1

Test result: Pass

TEST SETUP PHOTOGRAPHS

Please refer to “ANNEX”

APPENDIX EUT PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****