**MEASUREMENT REPORT**
FCC PART 15.249 ZWave**Applicant Name:**

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

1/30-3/2/2017

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M1701230040-09.A3L

FCC ID:

A3LETWV520

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

ET-WV520

EUT Type:

Indoor Access Point

Frequency Range:

908.4 – 916MHz

FCC Classification:

Low Power Transceiver, Rx Verified (DXT)

FCC Rule Part(s):

Part 15 Subpart C (15.249)

Test Procedure(s):

ANSI C63.10-2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 1 of 32

T A B L E O F C O N T E N T S

FCC PART 15.249 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 Scope	4
1.2 PCTEST Test Location	4
2.0 PRODUCT INFORMATION	5
2.1 Equipment Description	5
2.2 Device Capabilities	5
2.3 Test Configuration	5
2.4 EMI Suppression Device(s)/Modifications	5
3.0 DESCRIPTION OF TESTS	6
3.1 Evaluation Procedure	6
3.2 AC Line Conducted Emissions	6
3.3 Radiated Emissions	7
3.4 Environmental Conditions	7
4.0 ANTENNA REQUIREMENTS	8
5.0 MEASUREMENT UNCERTAINTY	9
6.0 TEST EQUIPMENT CALIBRATION DATA	10
7.0 TEST RESULTS	11
7.1 Summary	11
7.2 Occupied Bandwidth Measurement	12
7.3 Output Power Measurement	14
7.4 Fundamental Field Strength Level Measurement	17
7.5 Radiated Spurious Emission Measurements	18
7.6 Radiated Spurious Emissions Measurements – Below 1GHz	24
7.7 Line Conducted Measurement Data	29
8.0 CONCLUSION	32

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 2 of 32



MEASUREMENT REPORT

FCC Part 15.249



§ 2.1033 General Information

APPLICANT: Samsung Electronics Co., Ltd.
APPLICANT ADDRESS: 129, Samsung-ro,
 Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA
FCC RULE PART(S): Part 15 Subpart C (15.249)
MODEL: ET-WV520
FCC ID: A3LETWV520
Test Device Serial No.: 20JAN-2, 20JAN-3, 20JAN-5 ☐ Production ☒ Pre-Production ☐ Engineering
FCC CLASSIFICATION: Low Power Transceiver, Rx Verified (DXT)
DATE(S) OF TEST: 1/30-3/2/2017
TEST REPORT S/N: 1M1701230040-09.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 3 of 32

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

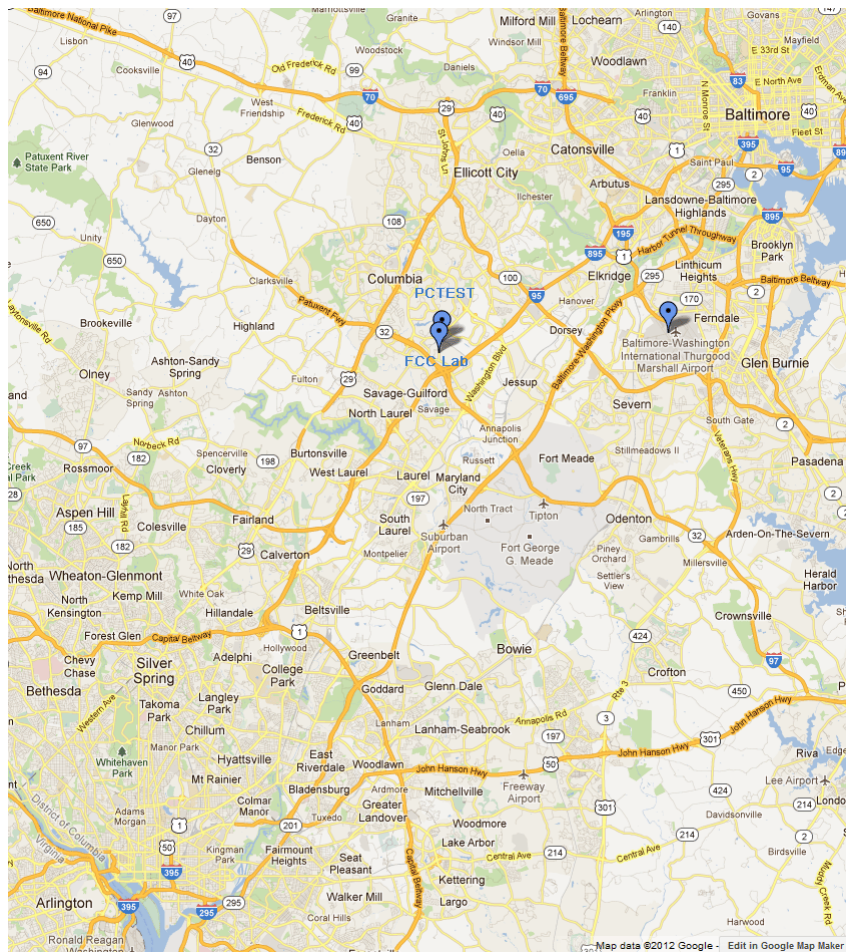


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LETWV520	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 4 of 32

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.2

01/09/2016

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this International copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Indoor Access Point FCC ID: A3LETWV520**. The test data contained in this report pertains only to the emissions due to the EUT's ZWave transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ac WLAN, 802.11a/n/ac UNII, Bluetooth (LE), Zigbee, Zwave

Frequency (MHz)
908.4
:
916

Table 2-1. Frequency/ Channel Operations

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2 for antenna port conducted emissions test setups.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 5 of 32

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.7. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 6 of 32

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm. For measurements above 1GHz, a high density expanded polystyrene block is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 7 of 32

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 8 of 32

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 9 of 32

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	4/11/2016	Annual	4/11/2017	WL25-1
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/11/2016	Annual	7/11/2017	RE1
Agilent	N9030A	PXA Signal Analyzer (26.5GHz)	7/20/2016	Annual	7/20/2017	MY49432391
Agilent	N9038A	MXE EMI Receiver	4/21/2016	Annual	4/21/2017	MY51210133
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	7/30/2015	Biennial	7/30/2017	121034
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	7/6/2016	Annual	7/6/2017	441119
Com-Power	PAM-118A	PREAMPLIFIER 500MHZ TO 18GHZ	7/26/2016	Annual	7/26/2017	551079
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/26/2016	Biennial	4/26/2018	125518
Pasternack	NMLC-1	Line Conducted Emissions Cable (NM)	4/28/2016	Biennial	4/28/2017	NMLC-1
PCTEST	-	EMC Switch System	7/6/2016	Annual	7/6/2017	NM2
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/15/2016	Annual	7/15/2017	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	7/27/2016	Annual	7/27/2017	103200
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	7/30/2015	Biennial	7/30/2017	310233
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 10 of 32

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LETWV520
 Method/System: Low Power Transceiver, Rx Verified (DXT)
 Number of Channels: 2

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1046	Transmitter Output Power	< 1 Watt		PASS	Section 7.3
15.249(a)(e)	Fundamental Field Strength Level	< 50 mV/m	RADIATED	PASS	Section 7.4
15.205, 15.209, 15.249(d)(e)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	< 15.209 limits or 50dB below the level of the fundamental		PASS	Sections 7.5, 7.6
15.207	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.1.5.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 11 of 32

7.2 Occupied Bandwidth Measurement

\$2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The spectrum analyzers' "occupied bandwidth" measurement function was used to record the occupied bandwidth.

Frequency [MHz]	Detector	Data Rate [kbps]	Measured Bandwidth [kHz]
908.4	Peak	9.6	97.2
908.4	Peak	40	93.3
916.0	Peak	100	97.4

Table 7-2. Occupied Bandwidth Measurement






Figure 7-1. Test Instrument & Measurement Setup

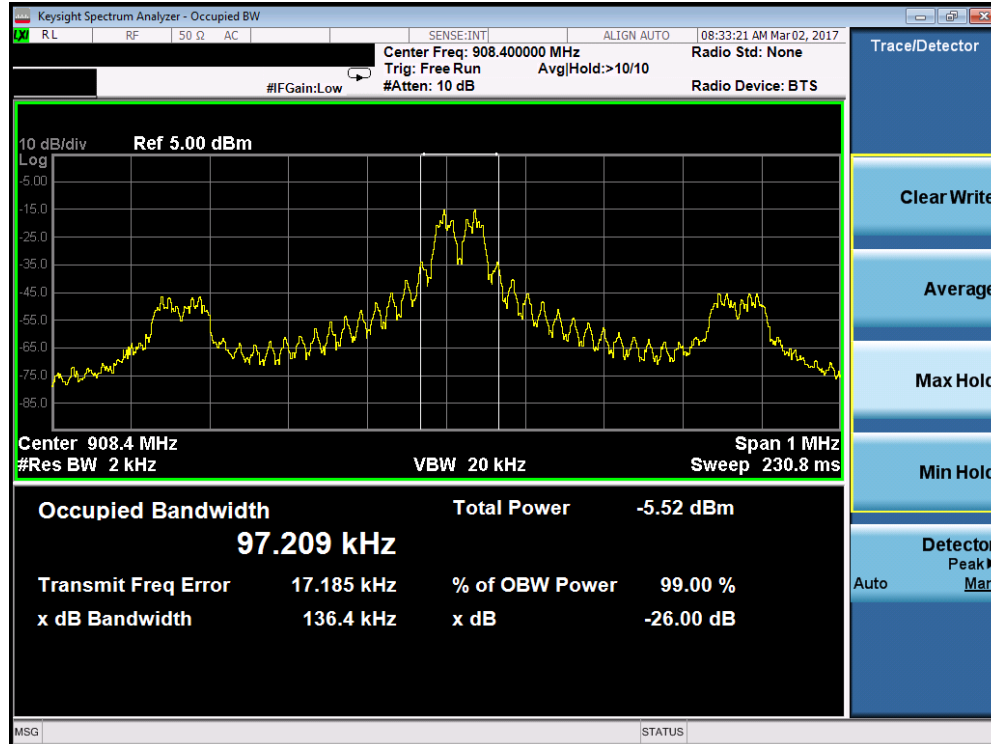

Plot 7-1. Occupied Bandwidth Plot (ZWave – Ch. 908.4MHz – 9.6kbps)

FCC ID: A3LETWV520	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 12 of 32

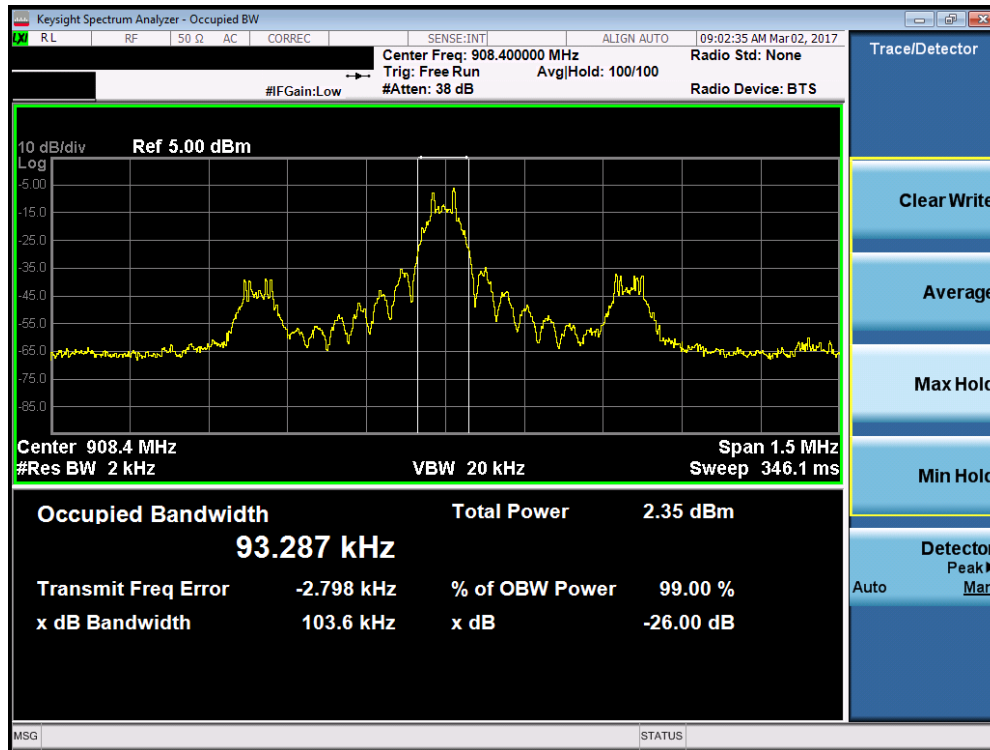

Plot 7-2. Occupied Bandwidth Plot (ZWave – Ch. 908.4MHz – 40kbps)



Plot 7-3. Occupied Bandwidth Plot (ZWave – Ch. 916MHz – 100kbps)

FCC ID: A3LETWV520	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 13 of 32

7.3 Output Power Measurement

§2.1046

Test Overview and Limits

The transmitter antenna terminal of the EUT is connected to the input of a spectrum analyzer. Measurements are made while the EUT is operating at maximum power and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Procedure Used

ANSI C63.10-2013

Test Settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Span $\geq 3 \times$ RBW
4. Sweep = auto couple
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





Figure 7-2. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 14 of 32

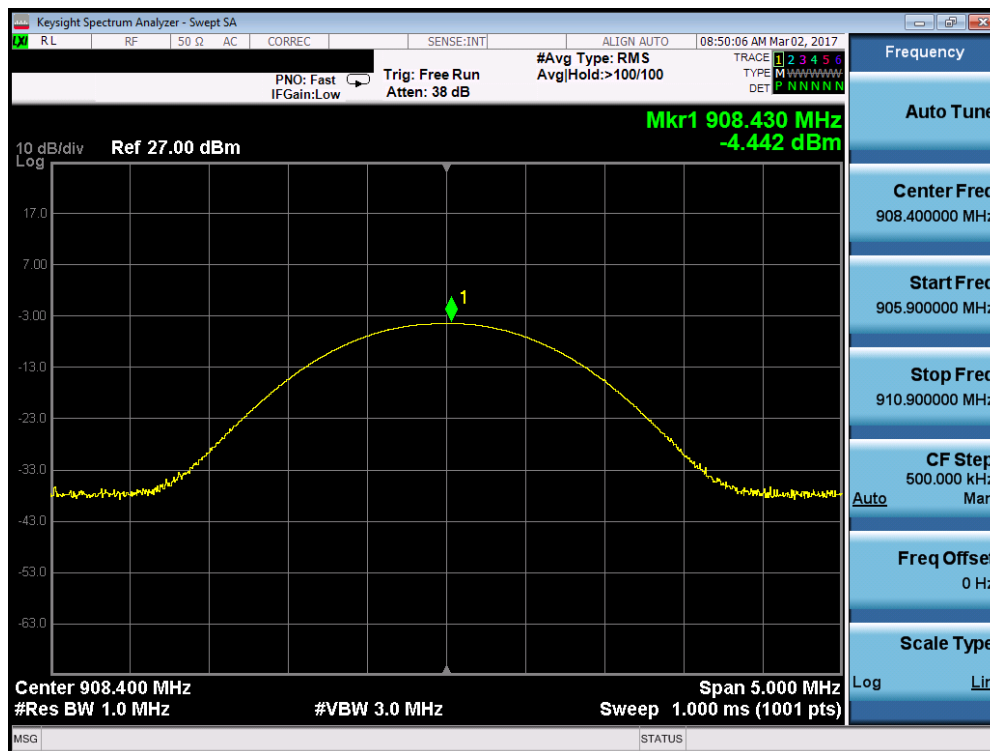

Plot 7-5. Peak Conducted Power (ZWave – 908.4 MHz – 40kbps)

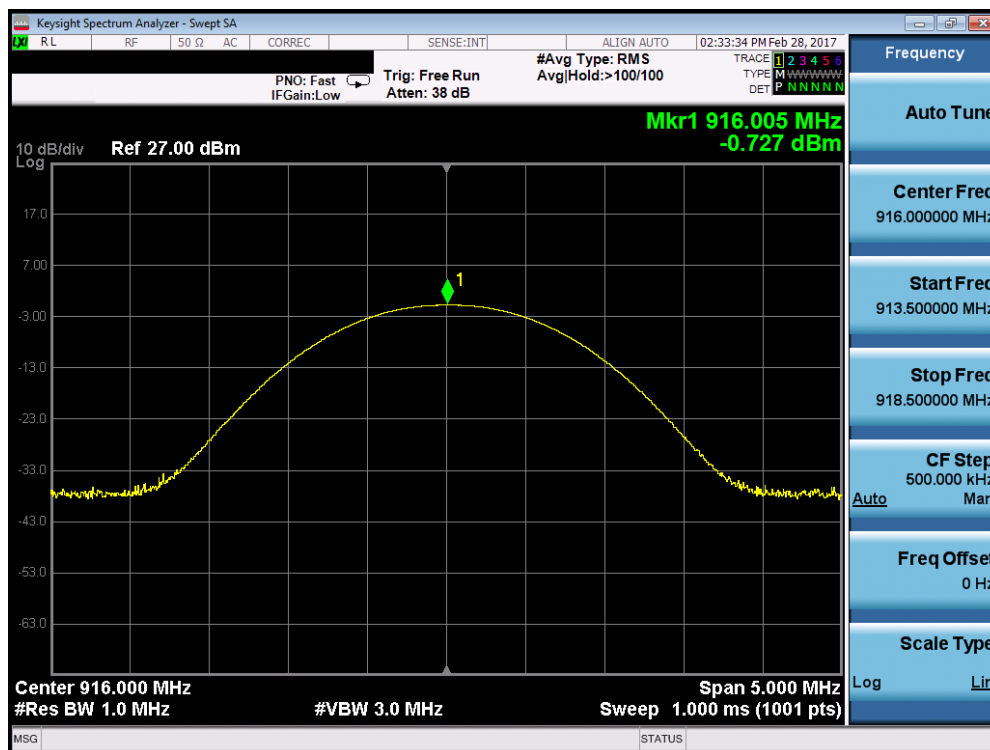

Plot 7-6. Peak Conducted Power (ZWave – 916 MHz – 100kbps)

FCC ID: A3LETWV520	 FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point	Page 16 of 32

7.4 Fundamental Field Strength Level Measurement

§15.249(a)(e)

The field strengths shown below were measured using a spectrum analyzer. Peak field strength measurements are performed in the analyzers' swept spectrum mode using a peak detector with RBW = 100kHz and VBW = 300kHz.

The maximum permissible peak field strength level is 50mV/m (93.98dBμV/m).

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
908.40	Peak	H	161	339	-12.58	-2.48	91.94	93.98	-2.04
916.00	Peak	H	166	357	-12.99	-2.60	91.41	93.98	-2.57

Table 7-4. Field Strength Measurements

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 17 of 32

7.5 Radiated Spurious Emission Measurements

§15.205 §15.209 §15.249 (d)(e)

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-5. Radiated Limits

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

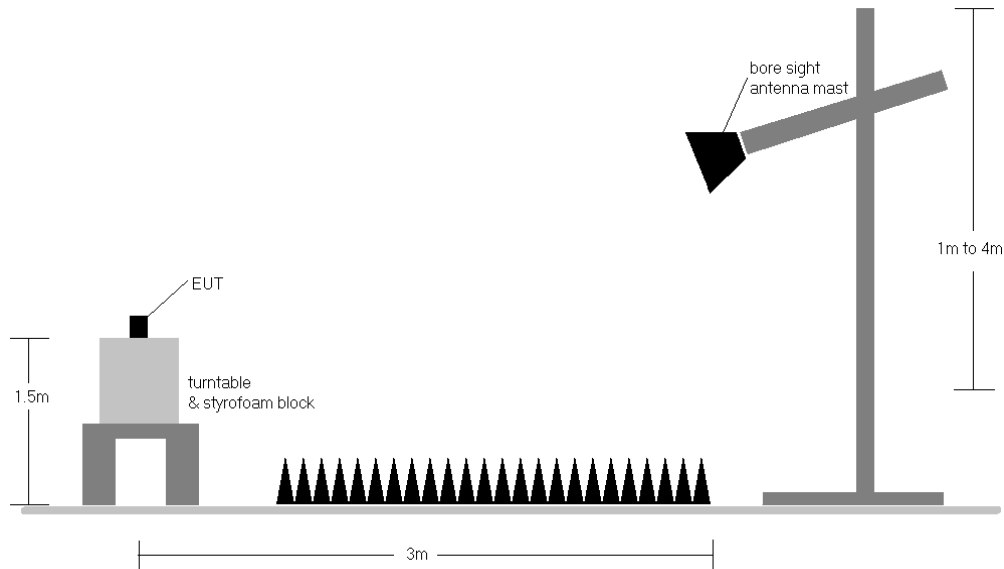


Figure 7-3. Radiated Test Setup

FCC ID: A3LETWV520	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 18 of 32

Sample Calculation

- Avg. Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]} + \text{Duty Cycle Correction }_{[dB]}$
- Pk. Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$


Test Notes

1. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. There were no non-harmonic emissions detected whose levels were within 20dB of the applicable limits so only harmonic emissions data is shown in this section.
2. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-5. Per 15.249(d), the radiated emissions limits from 15.209 were used since they were less than the limit of 50dB of attenuation from the measured fundamental field strength level.
3. Peak measurements > 1GHz using RBW = 1MHz and VBW = 3MHz.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 19 of 32


Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

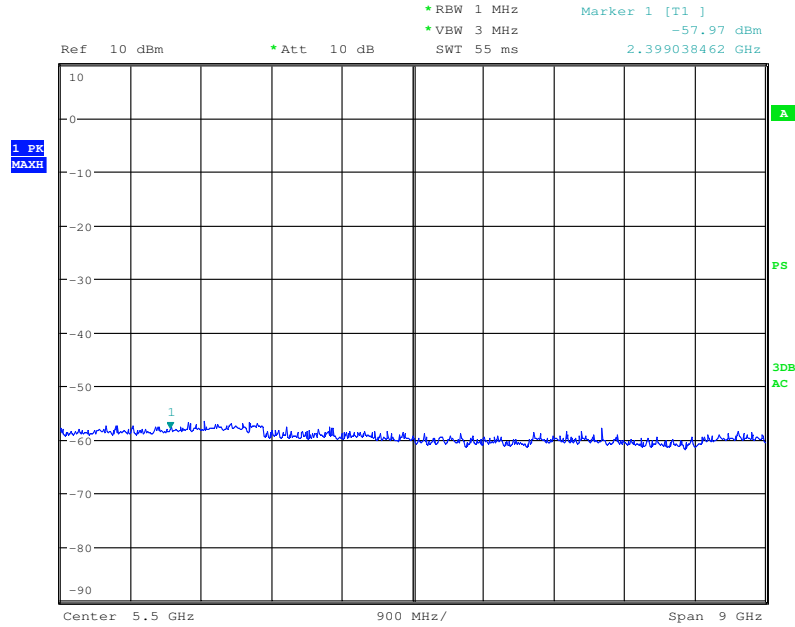

Date: 28.FEB.2017 09:44:34

Plot 7-7. Radiated Spurious Plot above 1GHz (Zwave – 908.4MHz, Ant. Pol. H)

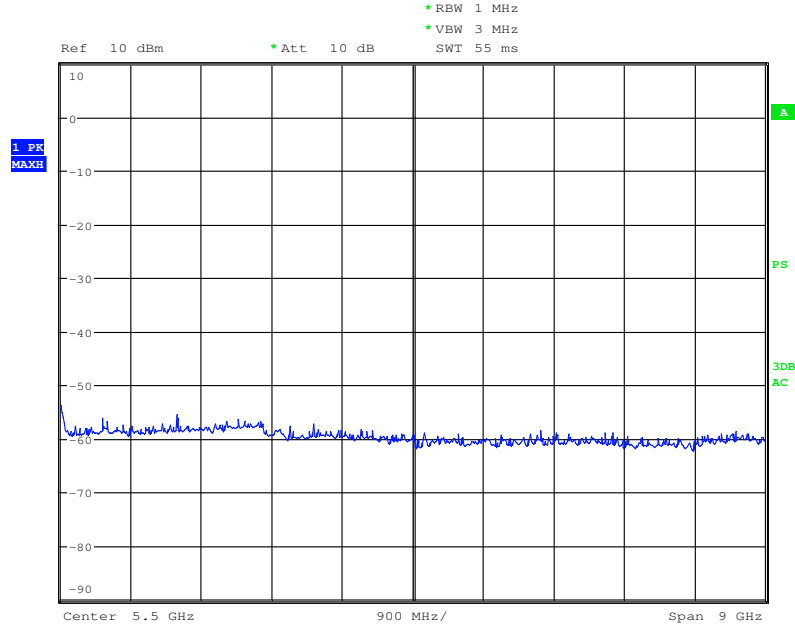

Date: 28.FEB.2017 09:45:44

Plot 7-8. Radiated Spurious Plot above 1GHz (Zwave – 908.4MHz, Ant. Pol. V)


FCC ID: A3LETWV520	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 20 of 32

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.2


01/09/2016

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

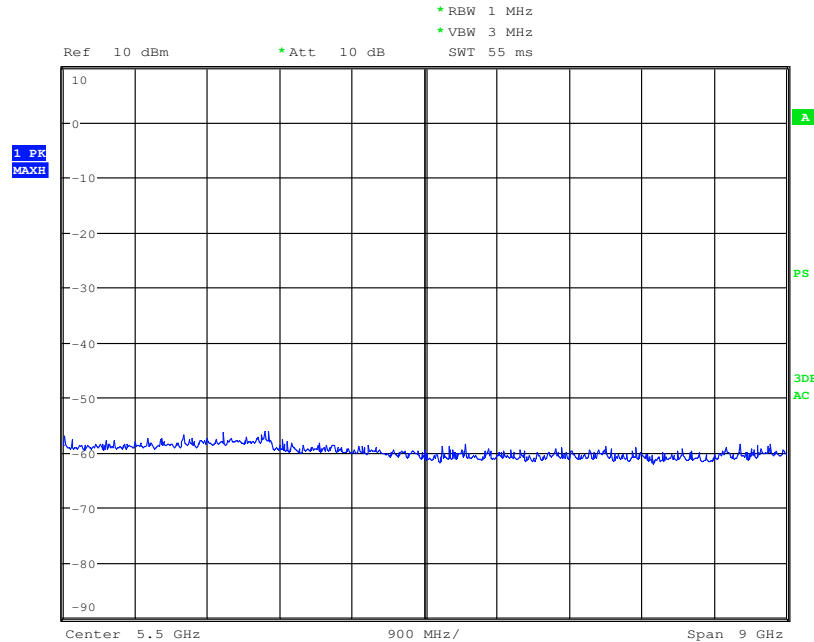

Date: 28.FEB.2017 09:48:13

Plot 7-9. Radiated Spurious Plot above 1GHz (Zwave – 916MHz, Ant. Pol. H)

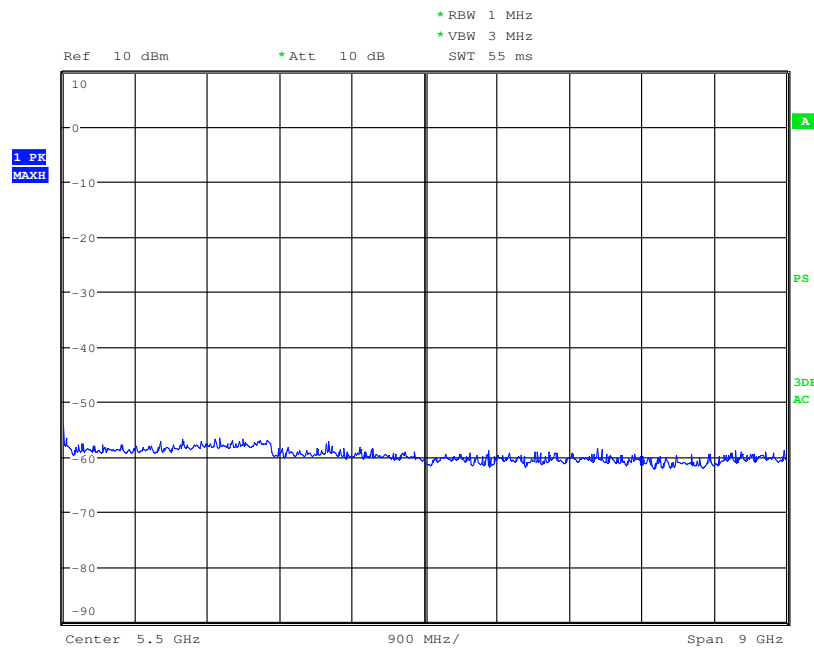

Date: 28.FEB.2017 09:47:00

Plot 7-10. Radiated Spurious Plot above 1GHz (Zwave – 916MHz, Ant. Pol. V)

FCC ID: A3LETWV520	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 21 of 32

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.2

01/09/2016

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

Radiated Spurious Emission Measurements

\$15.205 \$15.209 \$15.249 (d)(e)

Mode: Z-Wave
Worst Case Data Rate: 9.6kbps
Measurement Distance: 3 Meters
Operating Frequency: 908.4MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
1816.80	Peak	H	-	-	-57.04	-5.10	44.86	53.98	-9.12
2725.20	Peak	H	100	77	-56.09	-3.80	47.11	53.98	-6.87
3633.60	Peak	H	100	91	-56.61	-1.50	48.89	53.98	-5.09
4542.00	Avg	H	100	66	-65.52	0.17	41.65	53.98	-12.33
4542.00	Peak	H	100	66	-55.52	0.17	51.65	73.98	-22.33
5450.40	Avg	H	-	-	-70.08	3.79	40.71	53.98	-13.27
5450.40	Peak	H	-	-	-58.46	3.79	52.33	73.98	-21.64
6358.80	Peak	H	100	68	-55.91	9.11	60.20	73.98	-13.78
7267.20	Avg	H	-	-	-70.13	11.68	48.55	53.98	-5.43
7267.20	Peak	H	-	-	-57.79	11.68	60.89	73.98	-13.09
8175.60	Avg	H	-	-	-70.39	11.33	47.94	53.98	-6.03
8175.60	Peak	H	-	-	-58.55	11.33	59.78	73.98	-14.19

Table 7-6. Radiated Measurements

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 22 of 32

Mode: Z-Wave
 Worst Case Data Rate: 100kbps
 Measurement Distance: 3 Meters
 Operating Frequency: 916MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
1832.00	Peak	H	100	191	-55.17	-4.84	46.99	53.98	-6.99
2748.00	Peak	H	100	225	-55.41	-3.74	47.85	53.98	-6.13
3664.00	Peak	H	100	83	-56.37	-1.25	49.38	53.98	-4.60
4580.00	Avg	H	100	114	-62.48	0.60	45.12	53.98	-8.86
4580.00	Peak	H	100	114	-54.38	0.60	53.22	73.98	-20.76
5496.00	Peak	H	-	-	-57.65	3.66	53.01	73.98	-20.96
6412.00	Peak	H	100	176	-56.80	8.89	59.09	73.98	-14.89
7328.00	Avg	H	-	-	-69.91	11.20	48.29	53.98	-5.69
7328.00	Peak	H	-	-	-58.28	11.20	59.92	73.98	-14.06
8244.00	Avg	H	100	182	-67.58	11.23	50.65	53.98	-3.33
8244.00	Peak	H	100	182	-56.41	11.23	61.82	73.98	-12.16
9160.00	Avg	H	-	-	-70.31	12.09	48.78	53.98	-5.20
9160.00	Peak	H	-	-	-58.84	12.09	60.25	73.98	-13.73

Table 7-7. Radiated Measurements

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 23 of 32

7.6 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-8 per Section 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-8. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 24 of 32

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

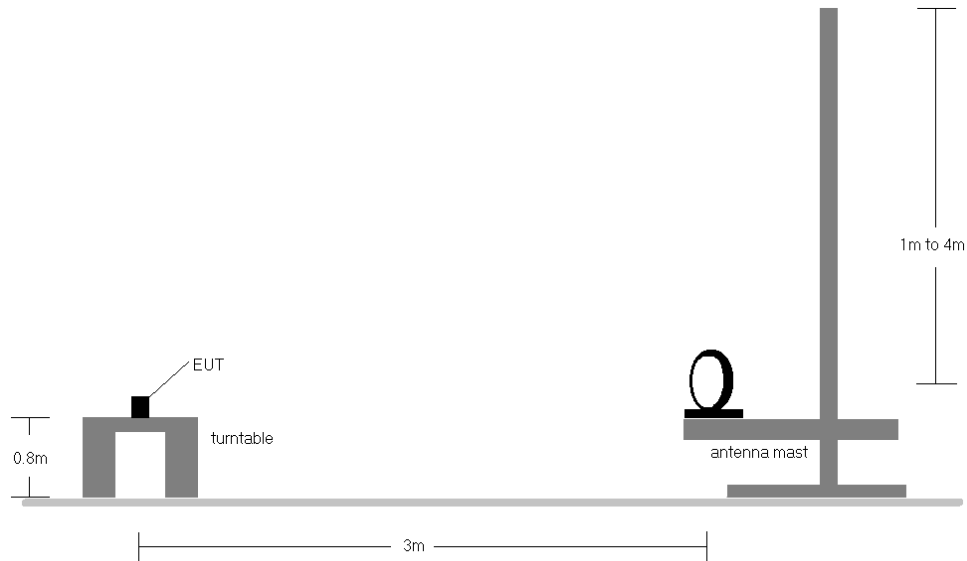


Figure 7-4. Radiated Test Setup < 30Mhz

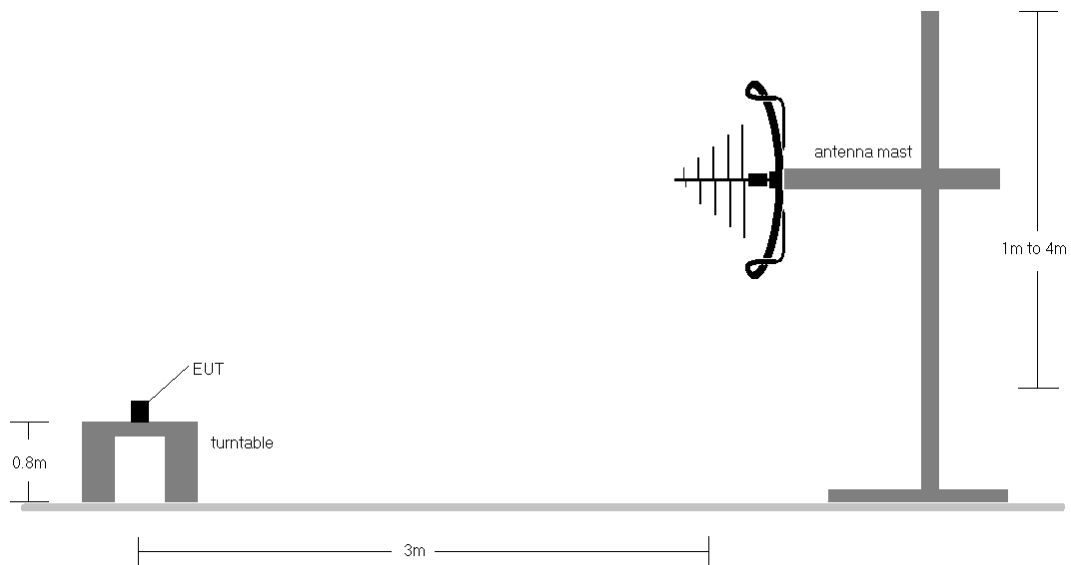


Figure 7-5. Radiated Test Setup < 1GHz

FCC ID: A3LETWV520	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 25 of 32


Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-8.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested while powered by an DC power source.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.


FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 26 of 32

Radiated Spurious Emissions Measurements (Below 1GHz)


§15.209

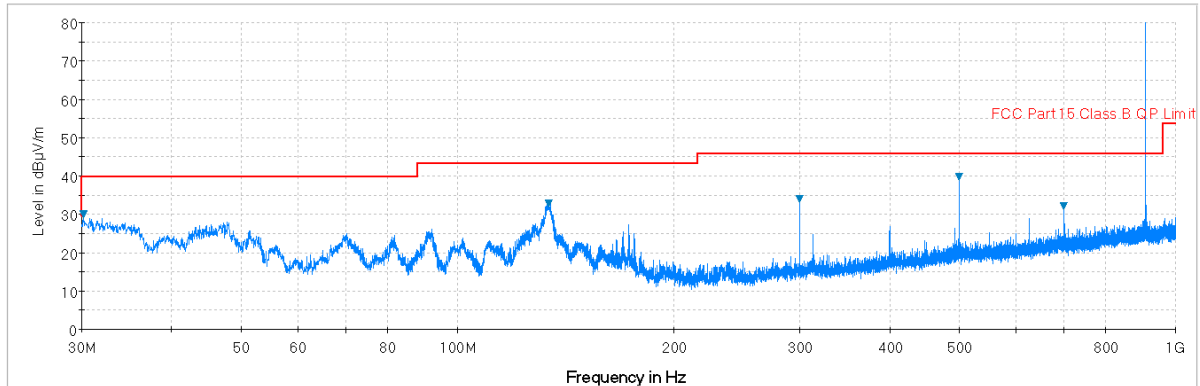

Plot 7-11. Radiated Spurious Plot below 1GHz (Zwave – 908.4MHz, Ant. Pol. H)

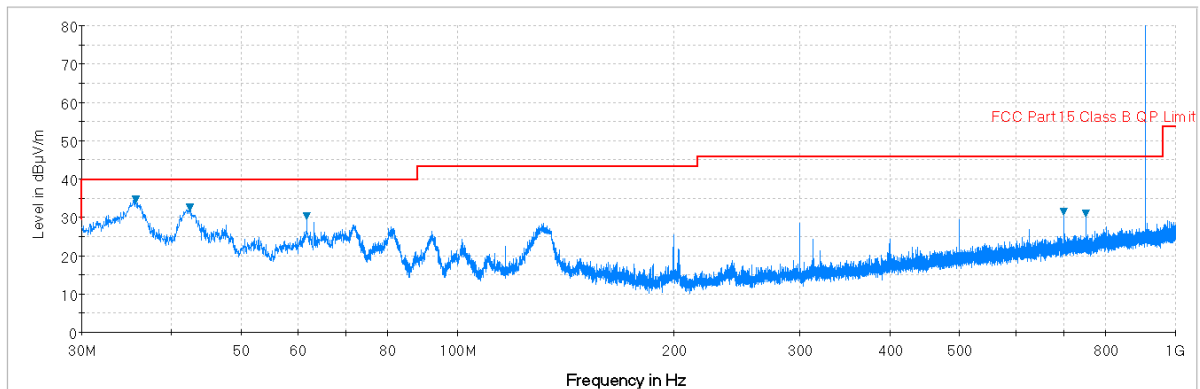


Plot 7-12. Radiated Spurious Plot below 1GHz (Zwave – 908.4MHz, Ant. Pol. V)

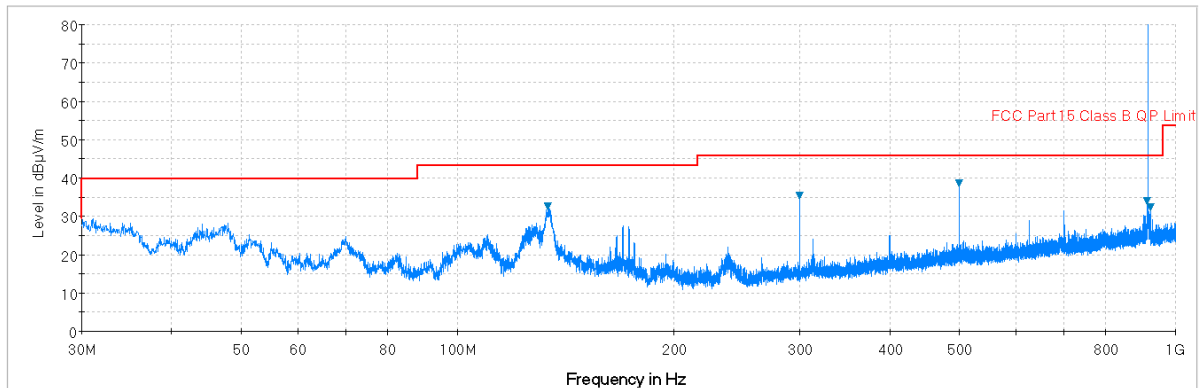

Plot 7-13. Radiated Spurious Plot below 1GHz (Zwave – 916MHz, Ant. Pol. H)

FCC ID: A3LETWV520	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 27 of 32

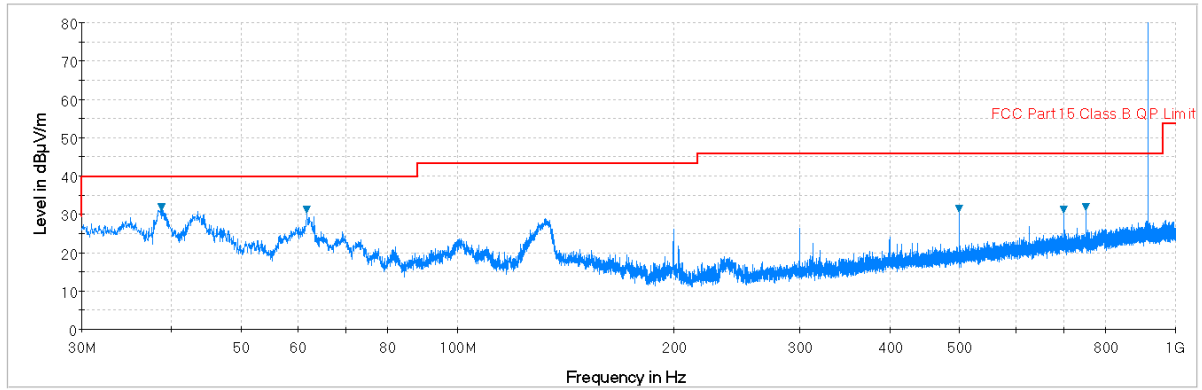

Plot 7-14. Radiated Spurious Plot below 1GHz (Zwave – 916MHz, Ant. Pol. V)

FCC ID: A3LETWV520	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 28 of 32

7.7 Line Conducted Measurement Data

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per §15.207.

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-9. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 29 of 32

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

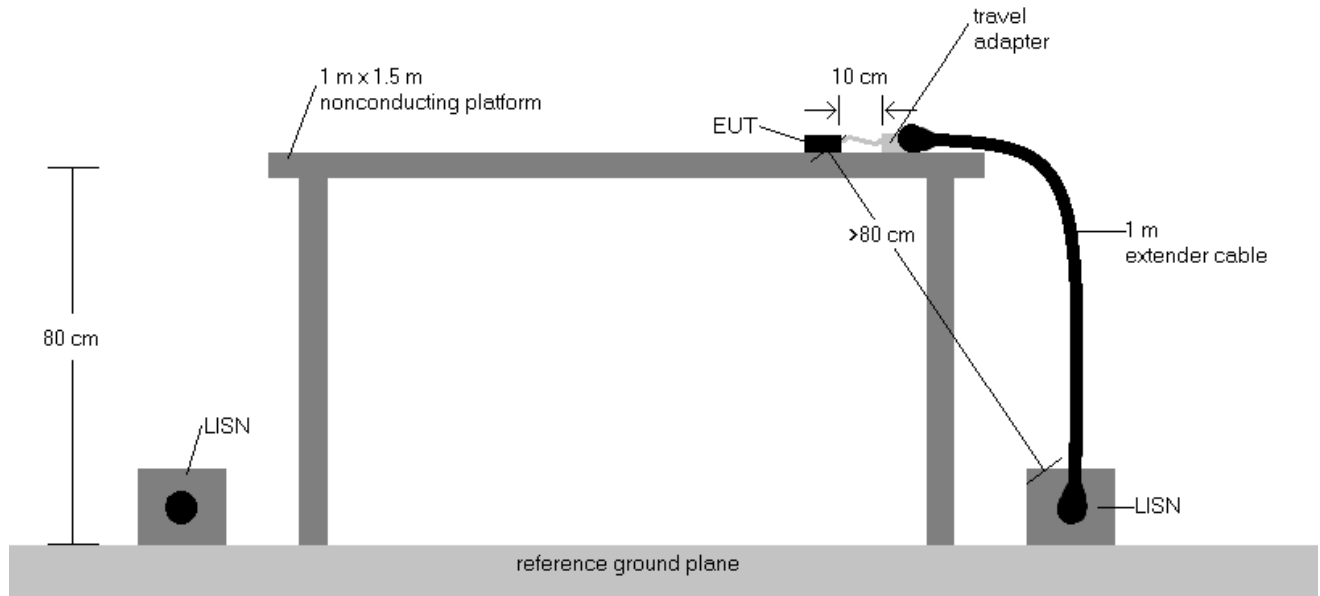


Figure 7-6. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.


FCC ID: A3LETWV520	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 30 of 32

Line Conducted Measurement Data

\$15.207

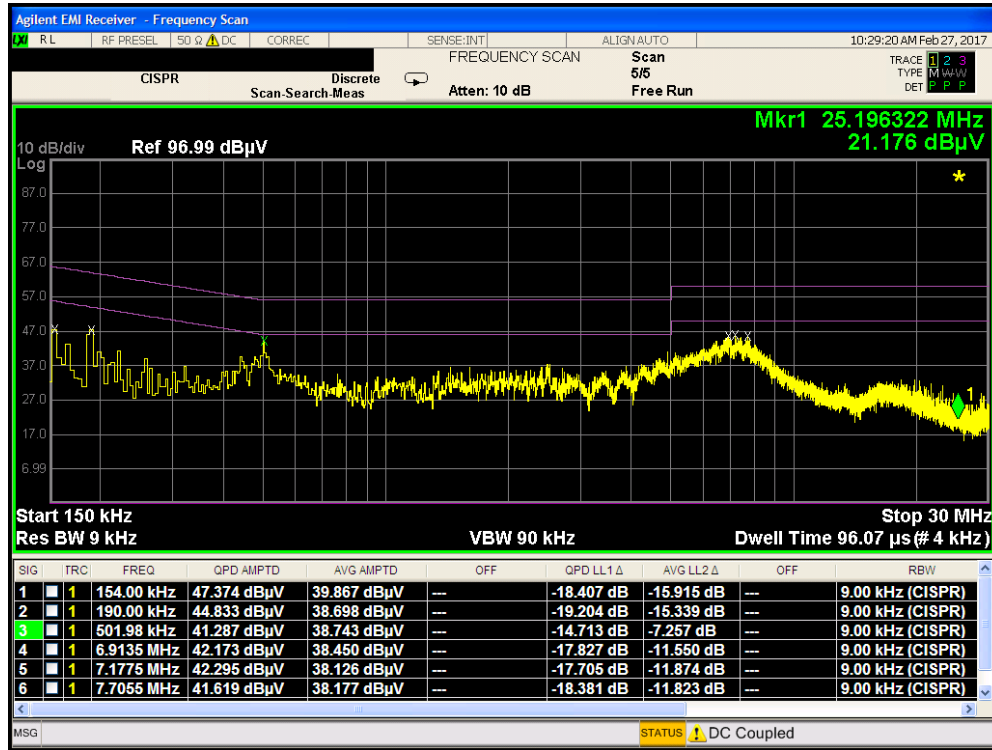

Plot 7-15. Line-Conducted Test Plot (L1)

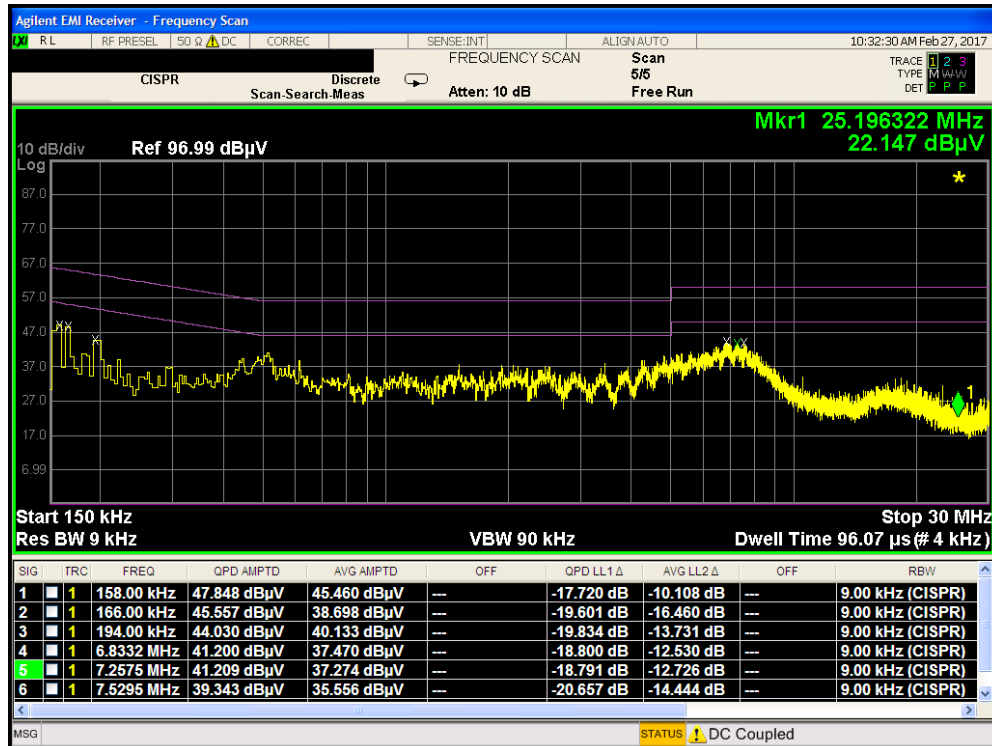

Plot 7-16. Line-Conducted Test Plot (N)

FCC ID: A3LETWV520			FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point				Page 31 of 32

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Indoor Access Point FCC ID: A3LETWV520** is in compliance with Part 15 Subpart C (15.249) of the FCC Rules.

FCC ID: A3LETWV520		FCC Pt. 15.249 ZWAVE TEST REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1701230040-09.A3L	Test Dates: 1/30-3/2/2017	EUT Type: Indoor Access Point		Page 32 of 32