



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested:	GT-S5380L
FCC ID (Requested):	A3LGTS5380L
Report No:	FI-267-R2
Job No:	FI-267
Date issued:	October 24, 2011

- Abstract -

All measurement reported here in accordance with FCC Rules, 47CFR
Part2, Part22, Part24

Prepared By

HK LEE - Test Engineer

Authorized By

WT JANG - Technical Manager

© Copyright SAMSUNG Electronics 2011

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC Certification Information.....	3
1.1 §2.1033 General Information	3
2. INTRODUCTION	4
2.1 General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST.....	6
5. FCC 3G MEASUREMENT PROCEDURES	7
5.1 Effective Radiated Power / Equivalent Isotropic Radiated Power	8
5.2 Radiated Spurious & Harmonic Emission	9
5.3 Occupied Bandwidth	11
5.4 Spurious and Harmonic Emissions at Antenna Terminal	11
5.4.1 Occupied Bandwidth Emission Limits	11
5.4.2 Conducted Spurious Emission	13
5.5 Frequency Stability / Temperature Variation	14
6. TEST DATA	15
6.1 Conducted Output Power	15
6.2 Effective Radiated Power(E.R.P.)	16
6.3 Equivalent Isotropic Radiated Power(E.I.R.P.)	17
6.4 Cellular WCDMA Radiated Spurious & Harmonic measurement	18
6.5 PCS WCDMA Radiated Spurious & Harmonic measurement	19
6.6 Cellular WCDMA Radiated Spurious & Harmonic Conversion Table	20
6.7 PCS WCDMA Radiated Spurious & Harmonic Conversion Table	21
6.8 Frequency Stability	22
6.8.1 Cellular WCDMA Frequency Stability Table	22
6.8.2 PCS WCDMA Frequency Stability Table	23
6.8.3 Cellular WCDMA Frequency Stability Graph	24
6.8.4 PCS WCDMA Frequency Stability Graph	26
7. SAMPLE CALCULATION	28
7.1 Emission Designator	28
8. CONCLUSION.....	29
9. TEST PLOT	30

MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1 §2.1033 General Information

- Applicant Name: SAMSUNG ELECTRONICS CO., LTD.
- Address: 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC ID: A3LGTS5380L
- Model: GT-S5380L
- Quantity: Quantity production is planned
- Emission Designators: 4M20F9W(Cellular WCDMA),4M16F9W(PCS WCDMA)
- Tx Freq. Range: 826.4 - 846.6 MHz (Cellular WCDMA)
1852.4 - 1907.6 MHz (PCS WCDMA)
- Rx Freq. Range: 871.4 - 891.6 MHz (Cellular WCDMA)
1932.4 - 1987.6 MHz (PCS WCDMA)
- Max. Power Rating: 0.039 W Cellular WCDMA (15.94 dBm)
0.135 W PCS WCDMA(21.30 dBm)
- FCC Classification(s): Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type: 850/1900 GSM/GPRS and WCDMA/HSDPA Phone with
Bluetooth, EDGE Rx only and WLAN
- Modulation(s): WCDMA
- Frequency Tolerance: $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s): §24(E), §22(H), §2.
- Dates of Test: October 19-20, 2011
- Place of Test: SAMSUNG Lab,
- Test Report S/N: FI-267-R2

2. INTRODUCTION

2.1 General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
 The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742
 The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on the rotating device at the same height and at a distance of 3-meters from the receive antenna. The rotating device which can rotate horizontal axis was mounted on the turn unit to facilitate rotation around a vertical axis. The measurement was made for each horizontal/vertical position combination with receive antenna horizontally polarized. This measurement was repeated with receive antenna vertically polarized. The substitution antenna will replace the EUT antenna at the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

- End of page -

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	E4440A(3Hz~26.5GHz)	MY46187454	2012-03-08
	E4440A(3Hz~26.5GHz)	MY41000236	2012-04-27
Network Analyzer	8753E	JP38160590	2012-06-21
Pre-Amplifier	8449B	3008A00691	2011-12-15
Communication test set	8960	MY47510060	2012-03-08
	8960	GB42230535	2011-12-23
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2013-09-05
	BBHA9120	9120D-636	2012-07-14
Dipole Antenna	UHA 9105	9105-2412	2013-09-09
	UHA 9105	9105-2413	2012-07-15
Receive Antenna	HL040	353255/019	2011-10-26
Power Supply	E3640A	MY40003594	2012-06-21
	E3640A	MY40003595	2012-05-27
	E3632A	MY40022438	2012-03-08
Divider	11636B	51946	2012-07-04
	11636B	51942	2012-07-05
	11636B	56918	2012-09-28
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2011-11-15
	SH-241	92000548	2011-11-15
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. FCC 3G MEASUREMENT PROCEDURES

The maximum output power is a measure of the maximum power the UE can transmit (i.e. the actual power as would be measured assuming no measurement error) in a band width of at least $(1+\alpha)$ times the chip rate of the radio access mode

The default test configuration is configure an established radio link between the UE and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. Maximum output is verified according to 3GPP TS 34.121 Section 5.2

1. Configure TCP (Transmit Power Control) set to "All 1"s.
2. RMC and AMR connections at 12.2kbps are measured under 3.4kbps SRB (signaling radio bearer)
3. Measure the mean power of the UE in a bandwidth of at least $(1+\alpha)$ times the chip rate of the radio access mode. The mean power shall be averaged over at least one timeslot.

Table1
3GPP TS 34.121 Nominal Maximum Output Power

Operating Band	Power Class3		Power Class 4	
	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)
Band II	+24	+1/-3	+21	+2/-2
Band V	+24	+1/-3	+21	+2/-2

5.1 Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

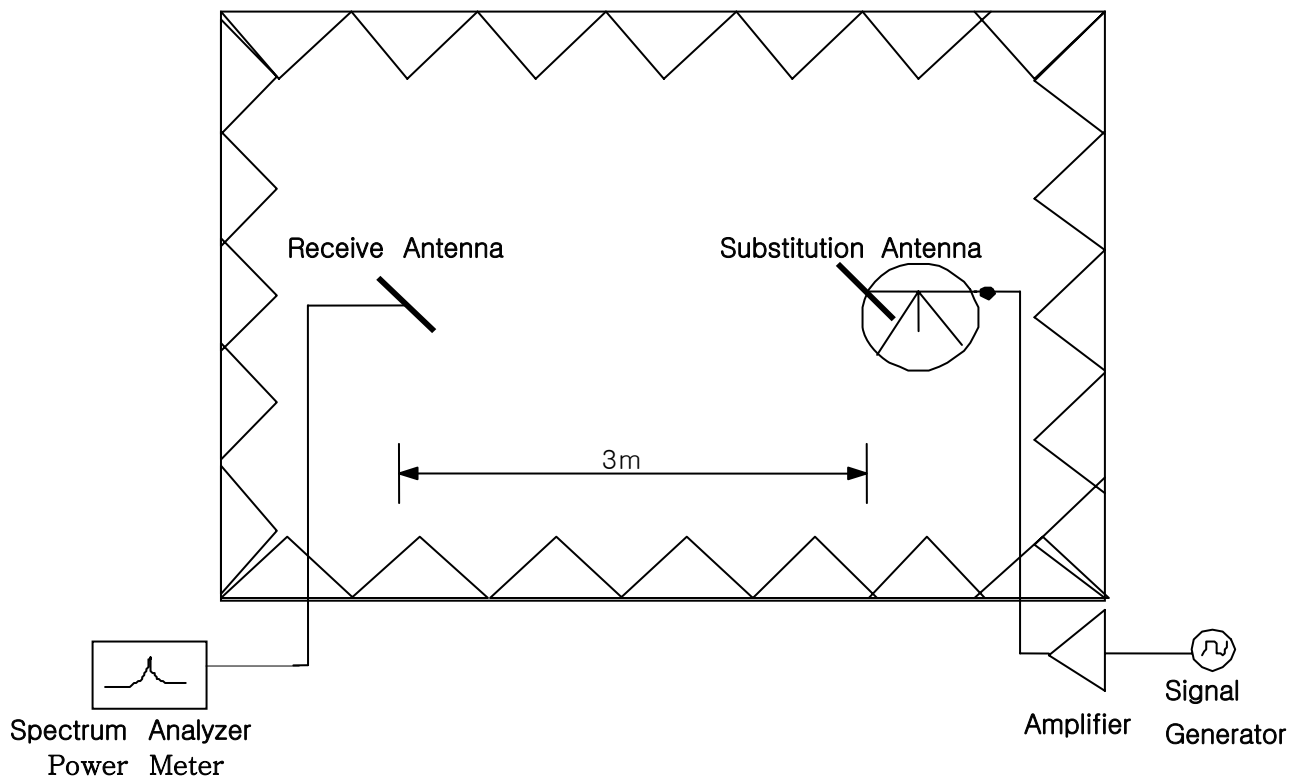


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2 Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

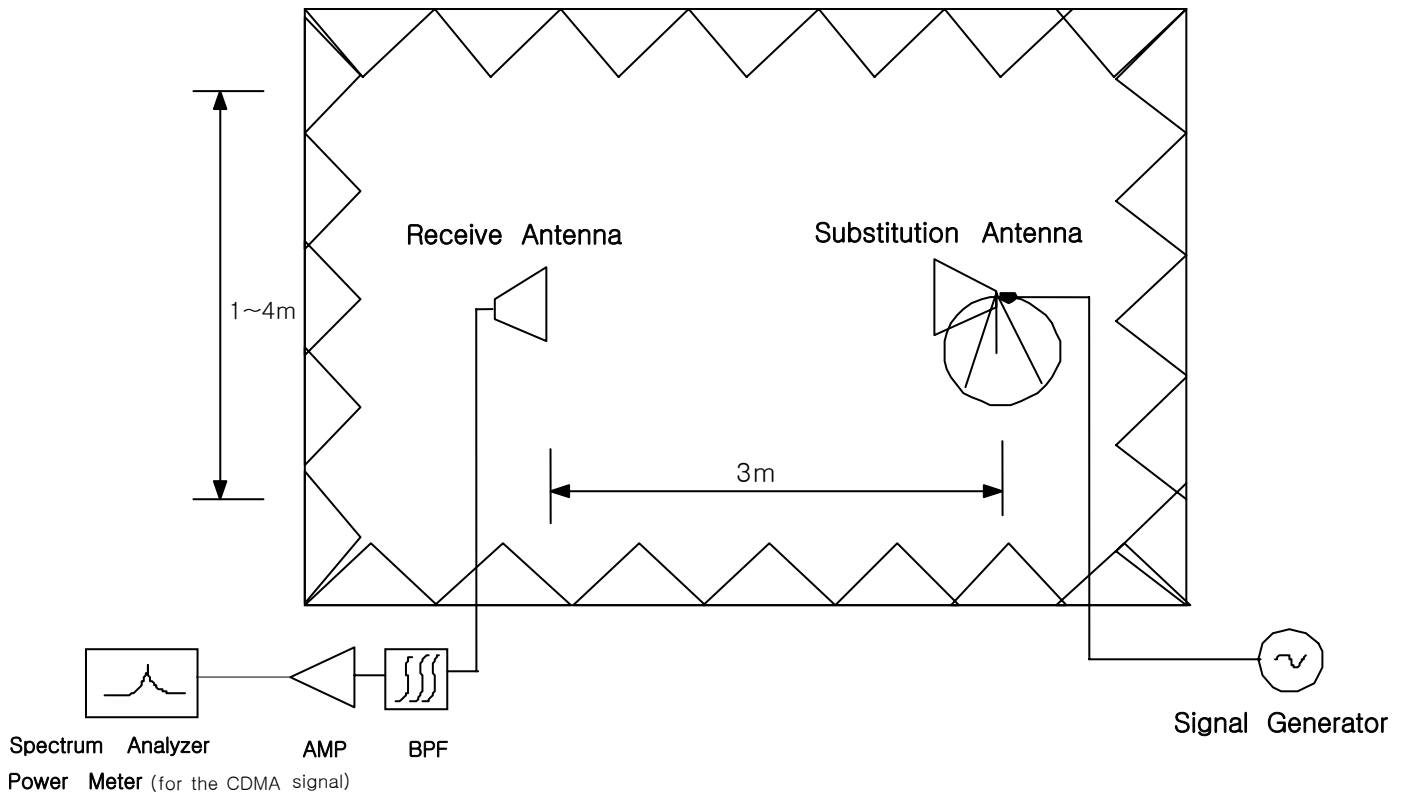


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 600 PCS Mode 2nd Harmonic(3760MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760MHz. So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

- End of page -

5.3 Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.

5.4 Spurious and Harmonic Emissions at Antenna Terminal

5.4.1 Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

- End of page -

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 – 835	869 – 880
B	835 – 845	880 – 890
A* High	845 – 846.5	890 – 891.5
B*	846.5 – 849	891.5 – 894

Table 2. Cellular Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1710 – 1720	2110 – 2120
B	1720 – 1730	2120 – 2130
C	1730 – 1735	2130 – 2135
D	1735 – 1740	2135 – 2140
E	1740 – 1745	2140 – 2145
F	1745 – 1755	2145 – 2155

Table 3. Broadband AWS Service Frequency Blocks

5.4.2 Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log (P)$ dB. Limit equivalent to -13 dBm, calculation shown below.

$$43 + 10\log (0.333 \text{ W}) = 38.22\text{dB}$$
$$25.22 \text{ dBm} - 38.22 \text{ dB} = -13 \text{ dBm}$$

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13 dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (PCS Mode : 10MHz to 20GHz). A display line was placed at -13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements. Plots are shown herein.

5.5 Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +50°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

- End of page -

6. TEST DATA

6.1 Conducted Output Power

A base station simulator was used to establish communication with the Samsung 850/1900 GSM/GPRS and WCDMA/HSDPA Phone with Bluetooth, EDGE Rx only and WLAN

FCC ID: A3LGTS5380L. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA inactive at 12.2 kbps RMC. The WCDMA conducted powers are reported below, respectively.

BAND	Channel	UMTS RF Conducted Power Table		
		HSDPA Inactive		HSDPA Active
		12.2 kbps RMC [dBm]	12.2 kbps AMR [dBm]	12.2 kbps RMC [dBm]
Cellular	4132	22.51	22.54	22.37
	4183	22.44	22.46	22.43
	4233	22.34	22.37	22.49
PCS	9262	23.06	23.05	22.6
	9400	22.71	22.70	22.67
	9538	22.69	22.66	22.58

Table 6.1 WCDMA Conducted Output Powers

6.2 Effective Radiated Power(E.R.P.)

Supply Voltage : 3.7VDC

Modulation : Cellular WCDMA

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBd)	Ref level (dBm)
826.4	16.00	H	-21.57	-0.67	-20.90
		V	-22.37	-0.67	-21.70
836.6	15.00	H	-23.04	-0.73	-22.31
		V	-23.32	-0.73	-22.59
846.6	15.00	H	-25.27	-0.79	-24.48
		V	-24.34	-0.79	-23.55

■ Result

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
826.4	-20.96	H	287/135	15.94	0.039	Standard
836.6	-23.08	H	289/135	14.23	0.026	Standard
846.6	-25.68	H	279/90	13.80	0.024	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3 Equivalent Isotropic Radiated Power(E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS WCDMA

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBi)	Ref level (dBm)
1852.4	20.00	H	-19.29	9.60	-28.89
		V	-18.93	9.60	-28.53
1880.0	21.00	H	-17.93	9.60	-27.53
		V	-18.33	9.60	-27.93
1907.6	21.00	H	-18.47	9.60	-28.07
		V	-18.23	9.60	-27.83

■ Result

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1852.4	-28.73	H	114/180	20.16	0.104	Standard
1880.0	-27.63	V	212/90	21.30	0.135	Standard
1907.6	-27.74	V	210/90	21.09	0.129	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.4 Cellular WCDMA Radiated Spurious & Harmonic measurement

Operating Frequency : 826.4 MHz(Low), 836.6 MHz(Middle), 846.6 MHz(High)

Measured Output Power : 15.94 dBm = 0.039 W

Modulation Signal : CDMA

Limit : $43 + 10\log_{10}(P) = 28.94\text{dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
4357	2	1652.80	-59.31	H	62.66
	3	2479.20	-67.80	H	65.91
	4	3305.60	-67.40	V	61.64
	5	4132.00	-	-	-
	6	4958.40	-	-	-
	7	5784.80	-	-	-
4408	2	1673.20	-61.74	H	64.84
	3	2509.80	-67.50	H	65.40
	4	3346.40	-67.56	V	61.89
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
4458	2	1693.20	-58.23	V	60.86
	3	2539.80	-67.61	V	65.84
	4	3386.40	-67.56	H	62.04
	5	4233.00	-	-	-
	6	5079.60	-	-	-
	7	5926.20	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5 PCS WCDMA Radiated Spurious & Harmonic measurement

Operating Frequency : 1852.4 MHz(Low), 1880.00 MHz(Middle), 1907.60 MHz(High)

Measured Output Power : 21.30 dBm = 0.135 W

Modulation Signal : PCS

Limit : $43 + 10\log_{10}(P) = 34.3\text{dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
9662	2	3704.80	-59.53	V	54.80
	3	5557.20	-66.37	H	57.27
	4	7409.60	-68.37	H	53.96
	5	9262.00	-	-	-
	6	11114.40	-	-	-
	7	12966.80	-	-	-
9800	2	3760.00	-61.35	V	56.49
	3	5640.00	-67.76	H	58.32
	4	7520.00	-68.72	H	54.26
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
9938	2	3815.20	-63.67	H	58.02
	3	5722.80	-67.62	H	57.72
	4	7630.40	-68.41	H	54.46
	5	9538.00	-	-	-
	6	11445.60	-	-	-
	7	13353.20	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.6 Cellular WCDMA Radiated Spurious & Harmonic Conversion Table

Date : October 20, 2011

Test Engineer : HK LEE

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = ERP+ 2.15 - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Test ed EUT Level : H dBm	⑤Test ed EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
4357	2	1652.80	-8.77	9.40	-13.60	-27.73	-27.03	-59.31	-59.24	62.66	63.29
	3	2479.20	-11.12	10.60	-12.50	-32.97	-32.23	-67.80	-67.67	65.91	66.52
	4	3305.60	-12.19	12.00	-12.80	-36.08	-36.84	-67.58	-67.40	62.58	61.64
	5	4132.00	-13.85	12.60	-11.80	-39.75	-39.33	-	-	-	-
	6	4958.40	-15.03	12.70	-10.70	-42.44	-42.28	-	-	-	-
	7	5784.80	-17.11	13.10	-9.00	-44.12	-44.43	-	-	-	-
4408	2	1673.20	-8.83	9.40	-13.60	-27.98	-27.21	-61.74	-61.44	64.84	65.31
	3	2509.80	-11.24	10.60	-12.40	-33.18	-32.42	-67.50	-67.90	65.40	66.56
	4	3346.40	-12.13	12.00	-12.90	-36.09	-36.75	-67.20	-67.56	62.19	61.89
	5	4183.00	-14.18	12.60	-11.40	-39.47	-39.56	-	-	-	-
	6	5019.60	-15.91	12.70	-9.80	-42.07	-42.44	-	-	-	-
	7	5856.20	-17.15	13.10	-9.00	-45.07	-44.94	-	-	-	-
4458	2	1693.20	-8.88	9.40	-13.50	-29.26	-28.45	-59.62	-58.23	61.44	60.86
	3	2539.80	-11.22	10.60	-12.40	-32.63	-32.85	-67.77	-67.61	66.22	65.84
	4	3386.40	-12.28	12.00	-12.70	-36.60	-36.89	-67.56	-67.94	62.04	62.13
	5	4233.00	-14.15	12.60	-11.50	-39.36	-39.77	-	-	-	-
	6	5079.60	-16.16	12.70	-9.50	-42.73	-42.38	-	-	-	-
	7	5926.20	-17.34	13.10	-8.80	-45.37	-45.34	-	-	-	-

6.7 PCS WCDMA Radiated Spurious & Harmonic Conversion Table

Date : October 20, 2011.

Test Engineer : HK LEE

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
9662	2	3704.80	-12.85	12.60	-12.80	-39.98	-39.03	-67.35	-59.53	61.67	54.80
	3	5557.20	-16.92	12.50	-8.60	-43.40	-42.99	-66.37	-66.86	57.27	58.17
	4	7409.60	-20.20	11.50	-4.30	-48.71	-48.56	-68.37	-69.36	53.96	55.10
	5	9262.00	-23.05	11.90	-1.90	-53.11	-52.12	-	-	-	-
	6	11114.40	-25.08	11.50	0.60	-57.75	-54.90	-	-	-	-
	7	12966.80	-28.10	14.42	0.70	-61.50	-58.01	-	-	-	-
9800	2	3760.00	-13.35	12.60	-12.30	-39.89	-39.16	-63.89	-61.35	58.30	56.49
	3	5640.00	-17.07	12.50	-8.40	-43.74	-43.42	-67.76	-67.70	58.32	58.58
	4	7520.00	-20.60	11.50	-3.90	-48.76	-48.06	-68.72	-68.76	54.26	55.00
	5	9400.00	-23.50	11.90	-1.40	-52.65	-51.24	-	-	-	-
	6	11280.00	-26.24	11.50	1.70	-56.66	-54.54	-	-	-	-
	7	13160.00	-28.79	14.42	1.40	-61.01	-57.76	-	-	-	-
9938	2	3815.20	-13.30	12.60	-12.30	-39.95	-39.55	-63.67	-65.24	58.02	59.99
	3	5722.80	-17.16	12.50	-8.30	-44.20	-43.35	-67.62	-67.56	57.72	58.51
	4	7630.40	-20.88	11.50	-3.60	-48.25	-47.92	-68.41	-69.42	54.46	55.80
	5	9538.00	-24.09	11.90	-0.80	-52.88	-51.48	-	-	-	-
	6	11445.60	-26.05	11.50	1.60	-57.49	-54.67	-	-	-	-
	7	13353.20	-28.74	14.42	1.30	-63.03	-59.49	-	-	-	-

6.8 Frequency Stability

6.8.1 Cellular WCDMA Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 4183

Reference Voltage : 3.7VDC

Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-8.50	836,599,992	-0.000001	-0.010
100%		-30	29.90	836,600,030	0.000004	0.036
100%		-20	23.90	836,600,024	0.000003	0.029
100%		-10	-8.00	836,599,992	-0.000001	-0.010
100%		0	-15.40	836,599,985	-0.000002	-0.018
100%		+10	-17.90	836,599,982	-0.000002	-0.021
100%		+20	-8.50	836,599,992	-0.000001	-0.010
100%		+30	-42.60	836,599,957	-0.000005	-0.051
100%		+40	-13.20	836,599,987	-0.000002	-0.016
100%		+50	-16.80	836,599,983	-0.000002	-0.020
85%	3.35	+20	-36.30	836,599,964	-0.000004	-0.043
115%	4.26	+20	-23.00	836,599,977	-0.000003	-0.027
Batt. Endpoint	3.35	+20	-36.30	836,599,964	-0.000004	-0.043

Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.

The EUT is tested down to the battery end point

6.8.2 PCS WCDMA Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 9400

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-7.90	1,879,999,992	0.000000	-0.004
100%		-30	-43.30	1,879,999,957	-0.000002	-0.023
100%		-20	27.50	1,880,000,028	0.000001	0.015
100%		-10	-17.50	1,879,999,983	-0.000001	-0.009
100%		0	-22.80	1,879,999,977	-0.000001	-0.012
100%		+10	-20.20	1,879,999,980	-0.000001	-0.011
100%		+20	-7.90	1,879,999,992	0.000000	-0.004
100%		+30	-1.90	1,879,999,998	0.000000	-0.001
100%		+40	36.90	1,880,000,037	0.000002	0.020
100%		+50	24.00	1,880,000,024	0.000001	0.013
85%	3.35	+20	-7.40	1,879,999,993	0.000000	-0.004
115%	4.26	+20	0.80	1,880,000,001	0.000000	0.000
Batt. Endpoint	3.35	+20	-7.40	1,879,999,993	0.000000	-0.004

Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.


The EUT is tested down to the battery end point

6.8.3 Cellular WCDMA Frequency Stability Graph

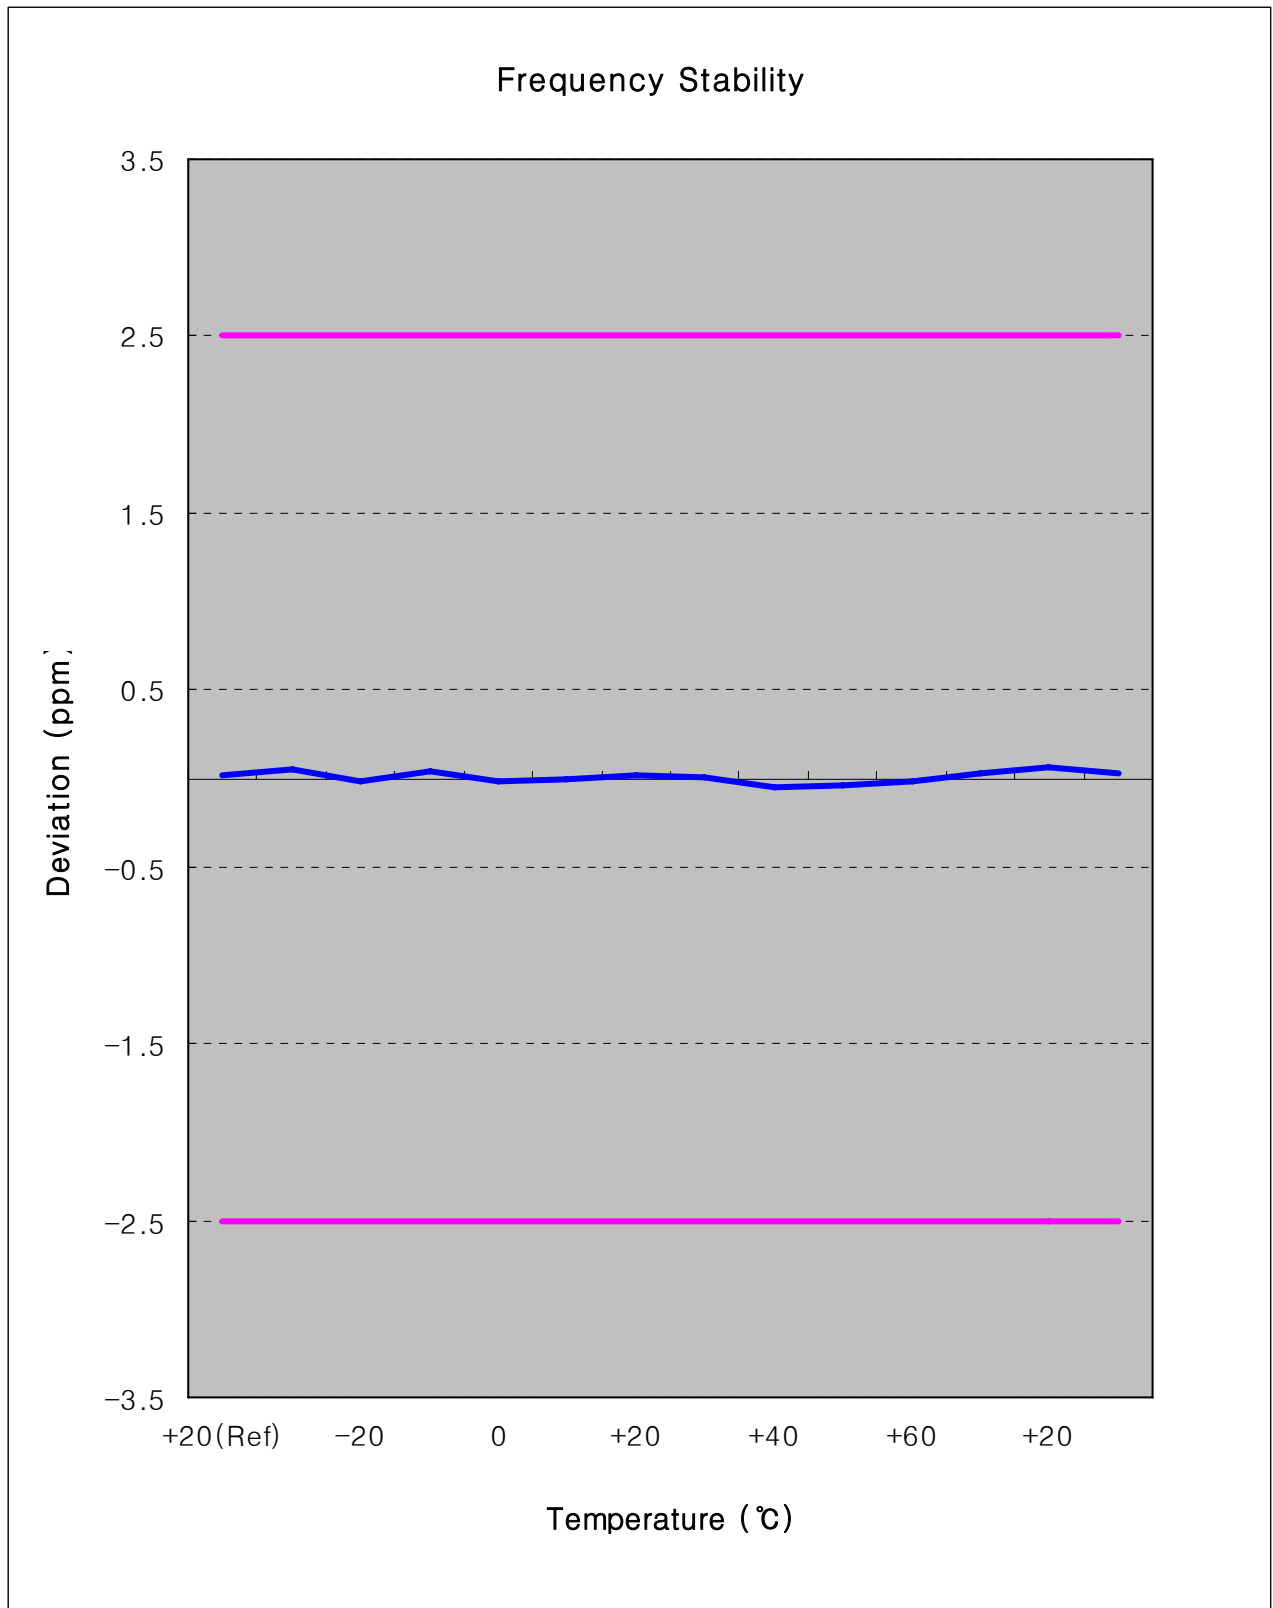


- End of page -

Zoom In

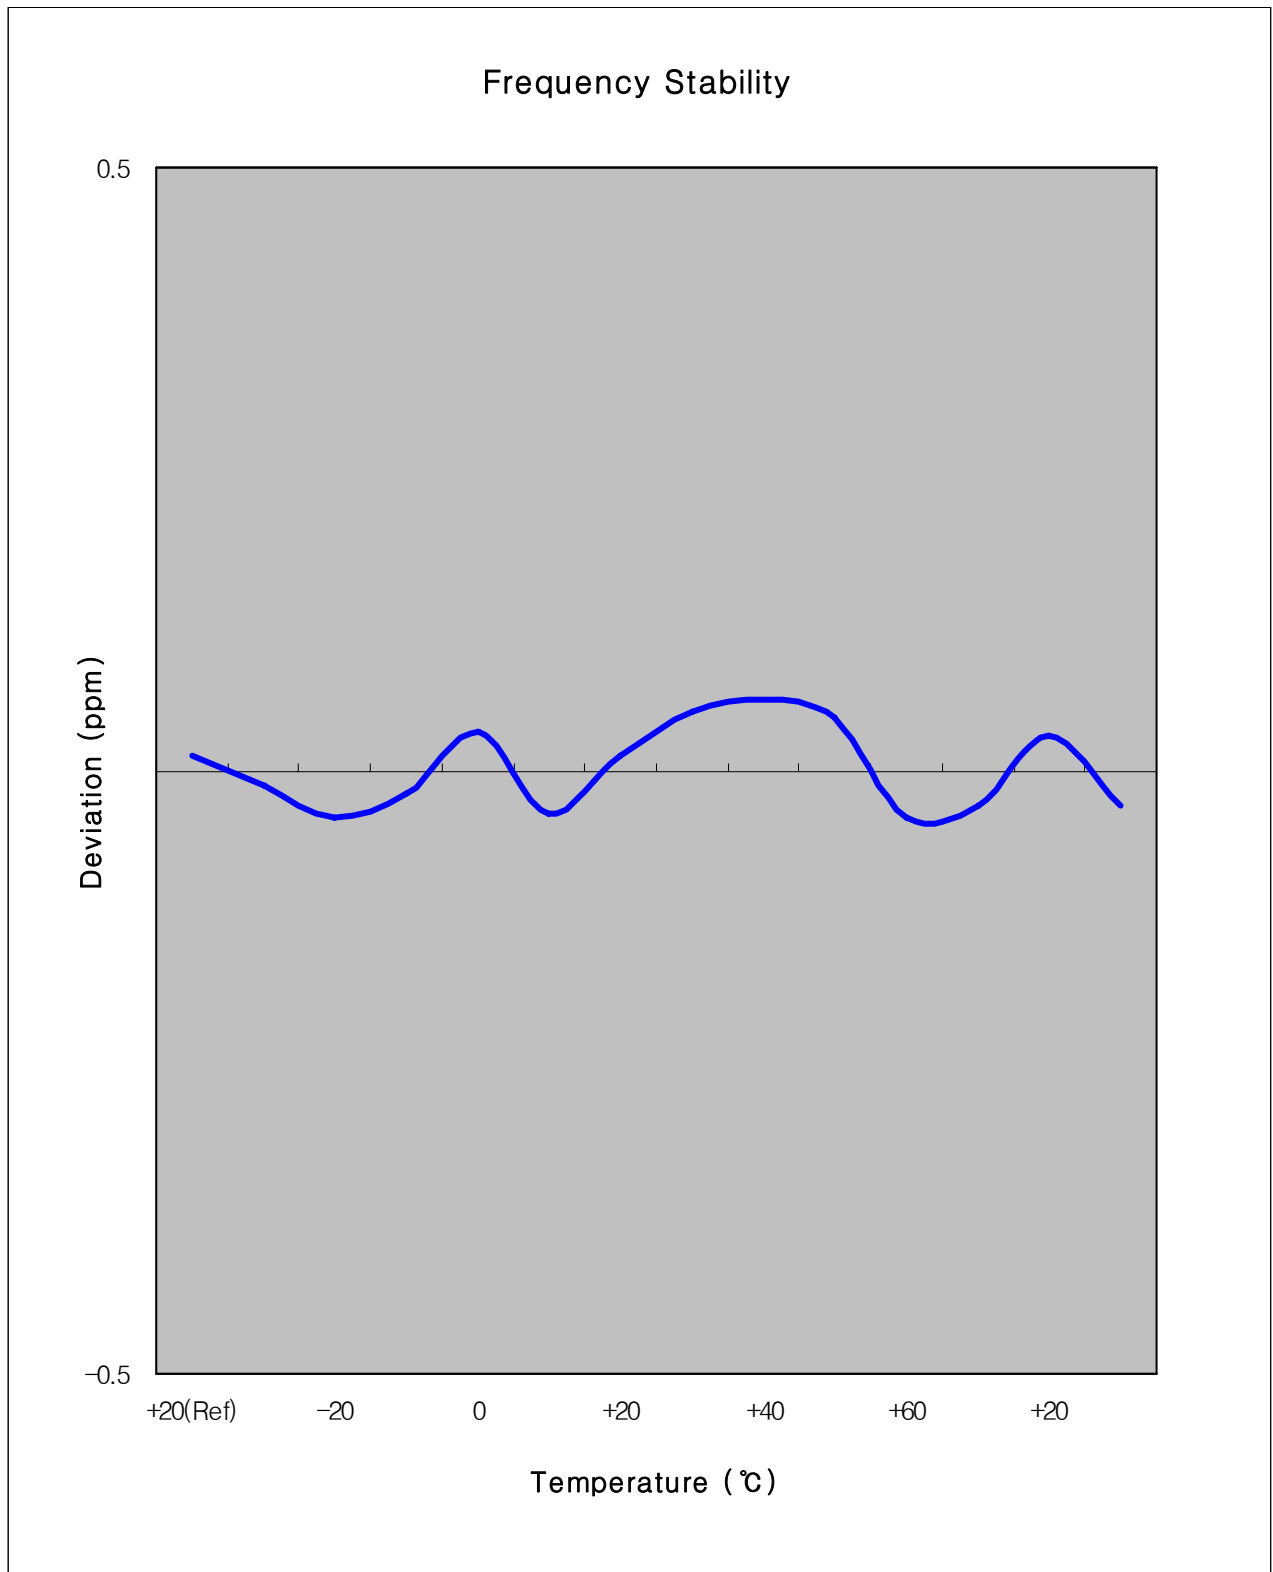


- End of page -

6.8.4 PCS WCDMA Frequency Stability Graph

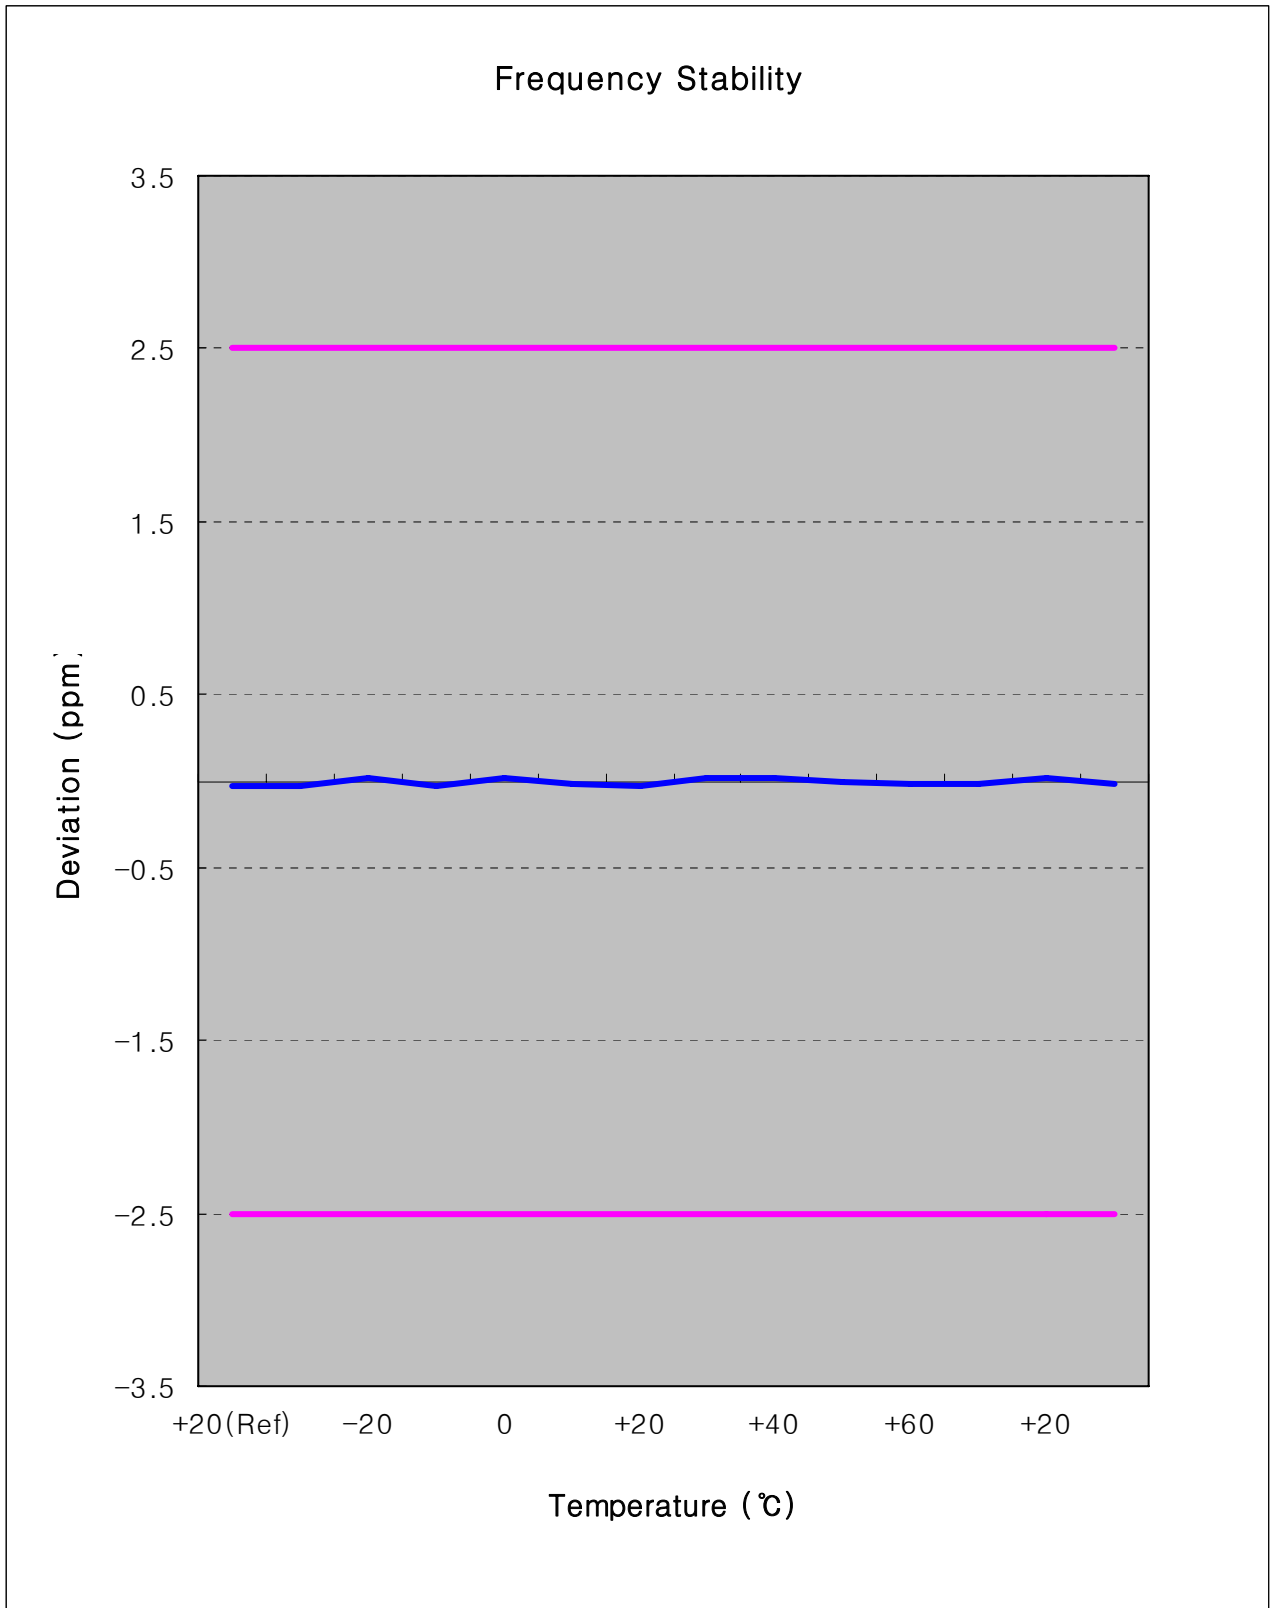

- End of page -

Zoom In

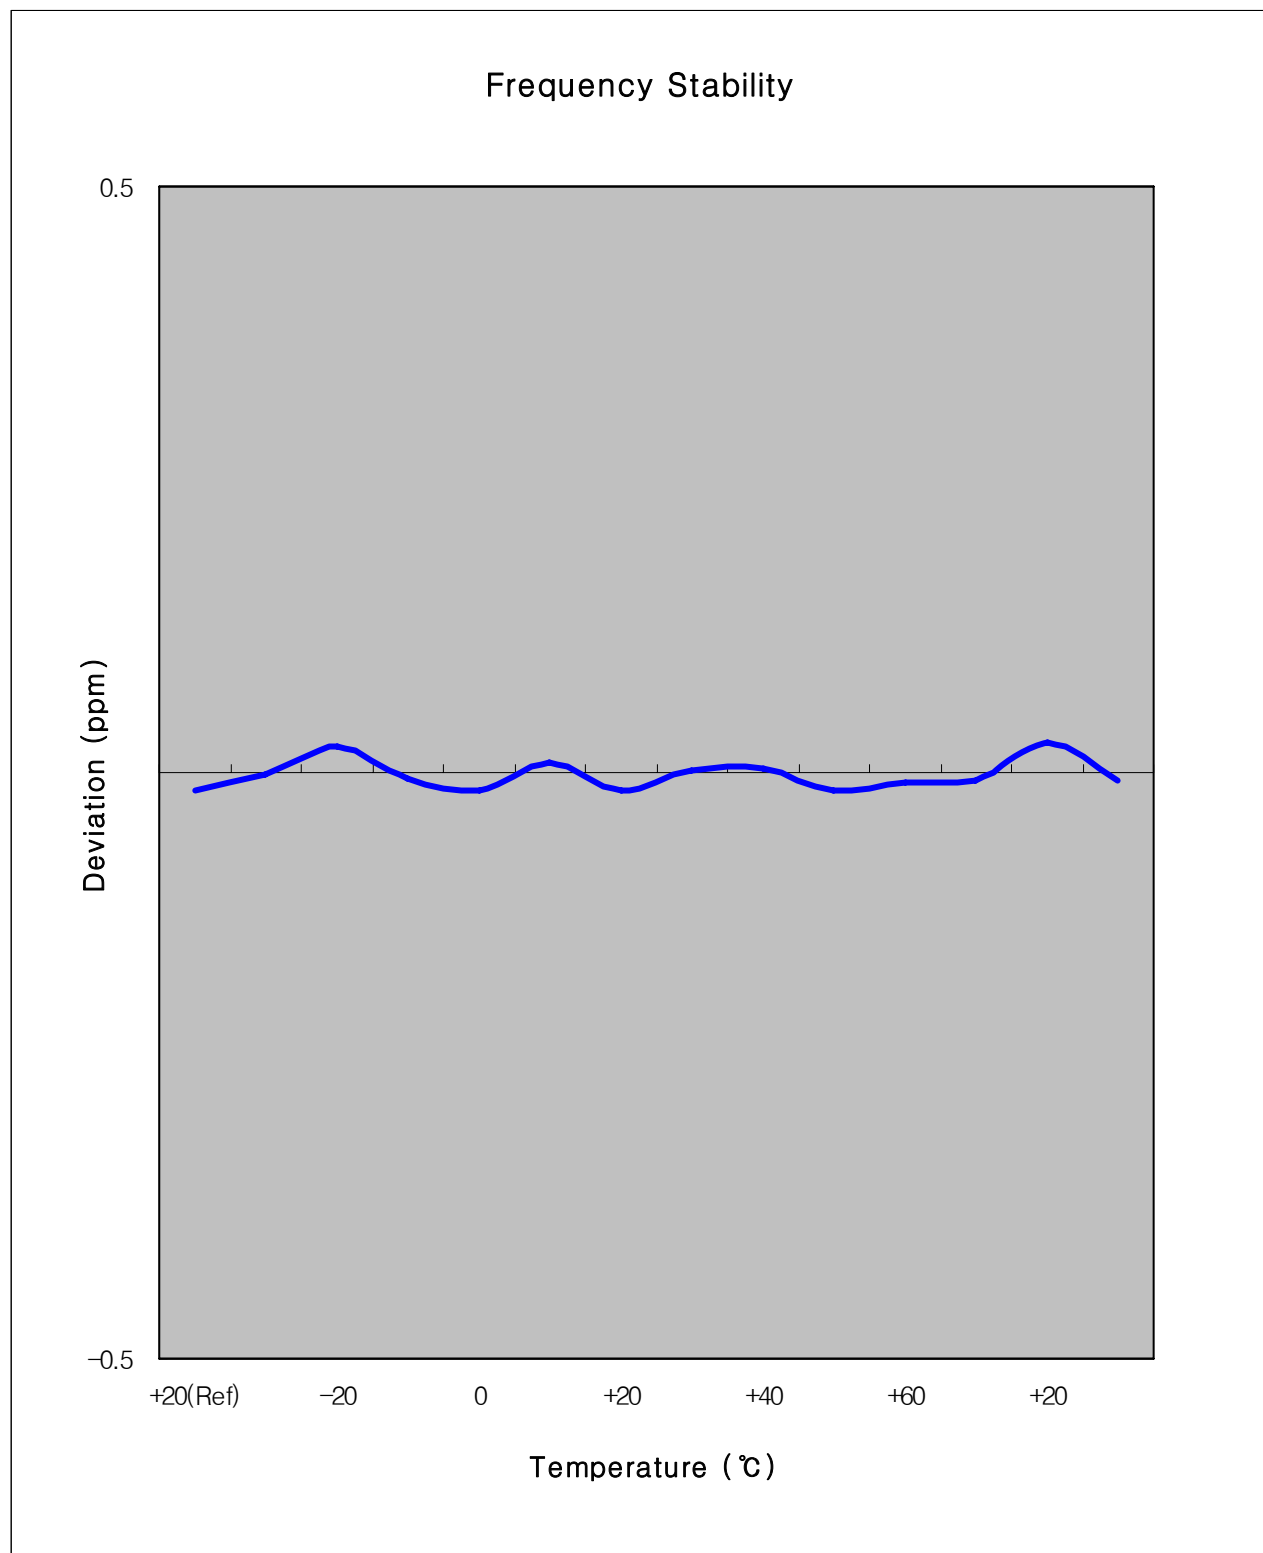

- End of page -

7. SAMPLE CALCULATION

7.1 Emission Designator

Emission Designator = 4M19F9W

CDMA BW = 4.19MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination(Audio/Data)

(Measured at the 99.75% power bandwidth)

– End of page –

8. CONCLUSION

The data collected shows that the SAMSUNG 850/1900 GSM/GPRS and WCDMA/HSDPA Phone with Bluetooth, EDGE Rx only and WLAN

FCC ID : A3LGTS5380L complies with all the requirements of Parts 2, 22, 24 of the FCC Rules.

- End of page -

9. TEST PLOT

A3LGTS5380L BAND 5
(UL Channel : 4132, DL Channel : 4357)

Measurement/Instrument Screen												
Control		Waveform Quality									Call Parms	
Waveform Quality Setup ▾					Minimum		Maximum		Average		Cell Power	
			EVM (%):		5.73		5.85		5.81		-104.00	
			Frequency Error (Hz):		-6.04		1.91		-2.10		dBm/3.84 MHz	
			Origin Offset (dB):		-30.71		-30.15		-30.39		Channel Type	
			Phase Error (°):		2.61		2.67		2.64		12.2k RNC	
			Mag Error (%):		3.46		3.54		3.51			
			Time Error (chips):		0.53		0.56		0.55		Paging Service	
		Max PCDE:		-41.28 dB		at Cch.64.32:I				RB Test Mode		
		50 /5C								Single		
		Thermal Power										
Calibrate Measurements		Thermal Power 22.51 dBm <										


(UL Channel : 4183, DL Channel : 4408)

Measurement/Instrument Screen														
Control		Waveform Quality									Call Parms			
Waveform Quality Setup ▾					Minimum	Maximum	Average			Cell Power				
		EVM (%):			5.04	5.15	5.08			-104.00				
		Frequency Error (Hz):			-7.48	-0.08	-3.55			dBm/3.84 MHz				
		Origin Offset (dB):			-30.71	-30.20	-30.49			Channel Type				
		Phase Error (°):			2.24	2.31	2.26			12.2k RNC				
		Mag Error (%):			3.16	3.21	3.18							
		Time Error (chips):			0.94	0.97	0.95			Paging Service				
			Max PCDE: -42.76 dB at Cch.64.39:I						RB Test Mode					
50 /5C			Single											
		Thermal Power												
Calibrate Measurements		Thermal Power 22.44 dBm Single											HSPA Parameters	
Swap Window Positions													34.121 Preset Call Configs ▾	
													Channel (UARFCH) Parms	
				Active Cell Connected				Sys Type: UTRA FDD						
1 of 2						IntRef	Offset	R T			1 of 3			


(UL Channel : 4233, DL Channel : 4458)

Measurement/Instrument Screen											
Control		Waveform Quality							Call Params		
Waveform Quality Setup ▾										Cell Power	
										-104.00	
										dBm/3.84 MHz	
										Channel Type	
										12.2k RMC	
										Paging Service	
										RB Test Mode	
Calibrate Measurements	Thermal Power										
	Thermal Power										
	22.34 dBm										
Swap Window Positions	Single										
			Active Cell Connected				Sys Type: UTRA FDD				
1 of 2				IntRef	Offset	R	T				1 of 3


(UL Channel : 4132, DL Channel : 4357)

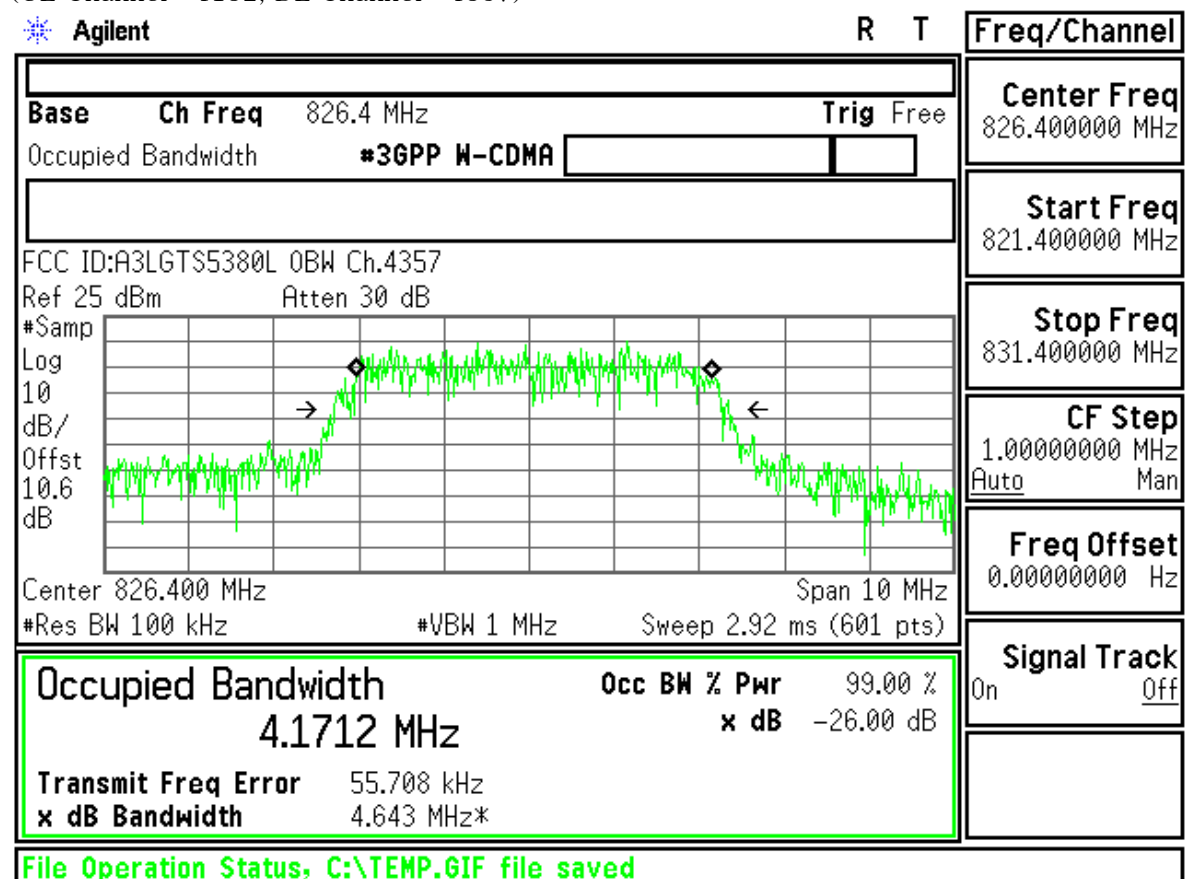


(UL Channel : 4183, DL Channel : 4408)

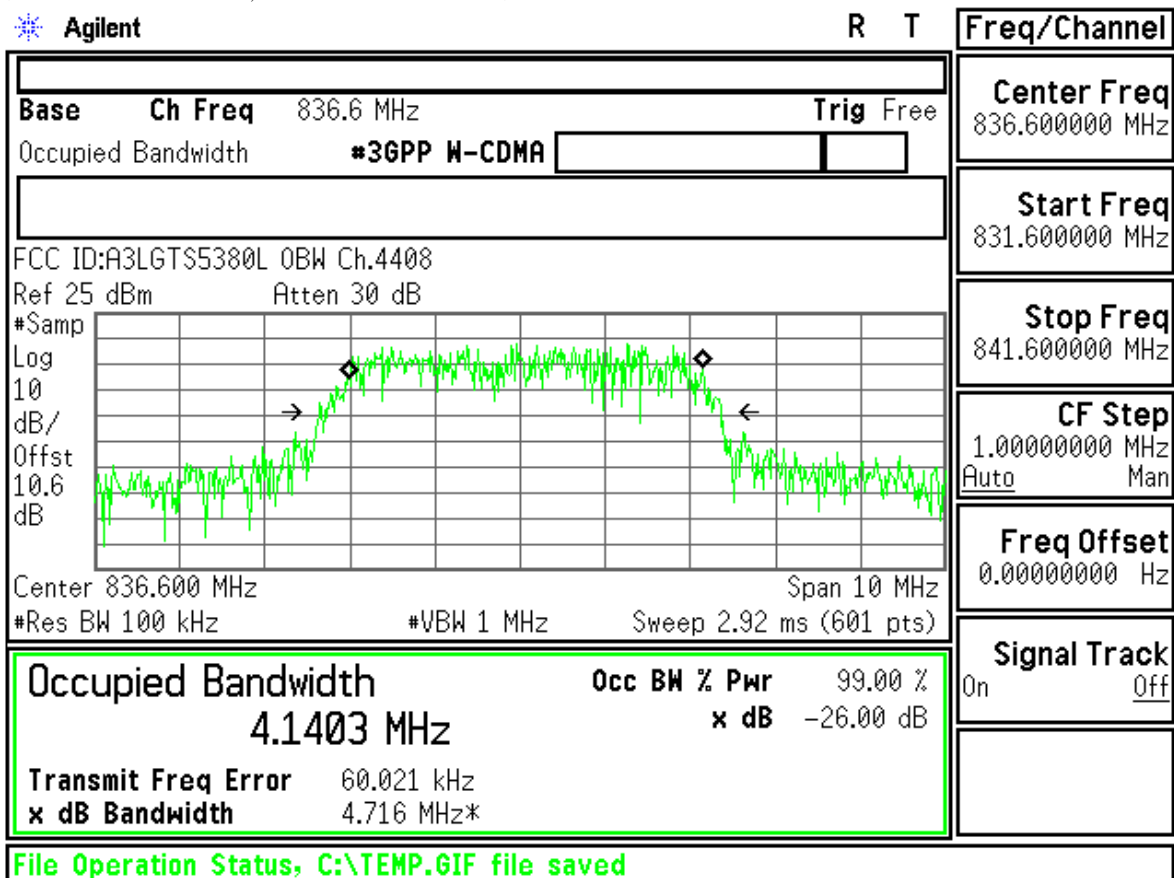


(UL Channel : 4233, DL Channel : 4458)

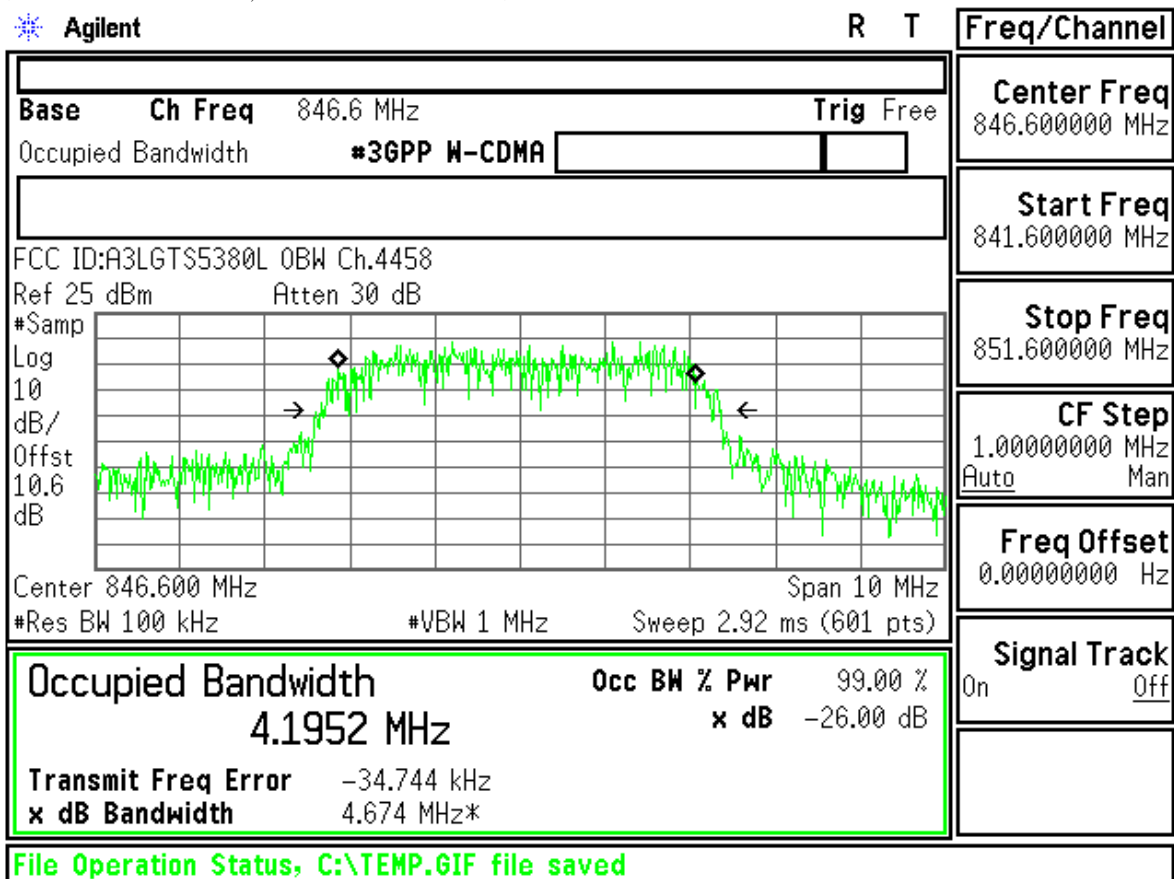


(UL Channel : 4132, DL Channel : 4357)

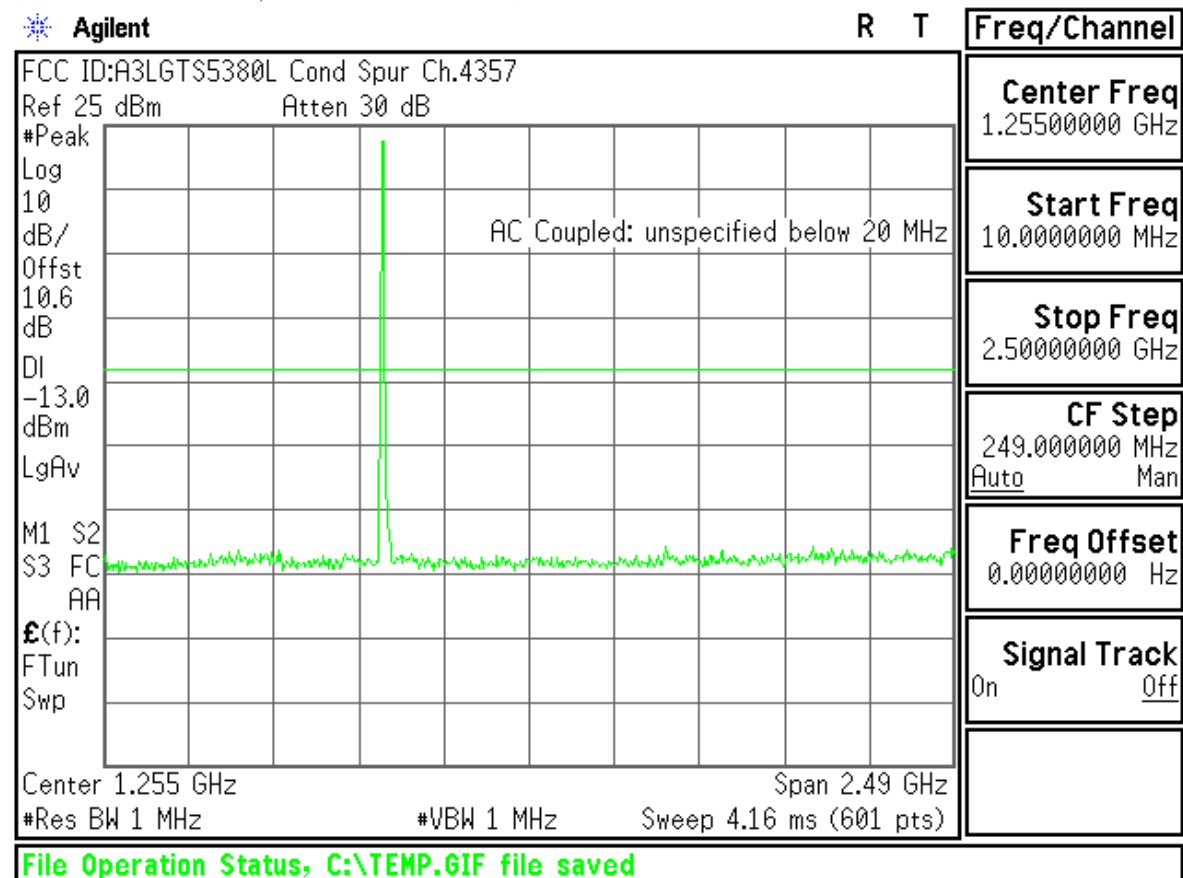


(UL Channel : 4132, DL Channel : 4357)

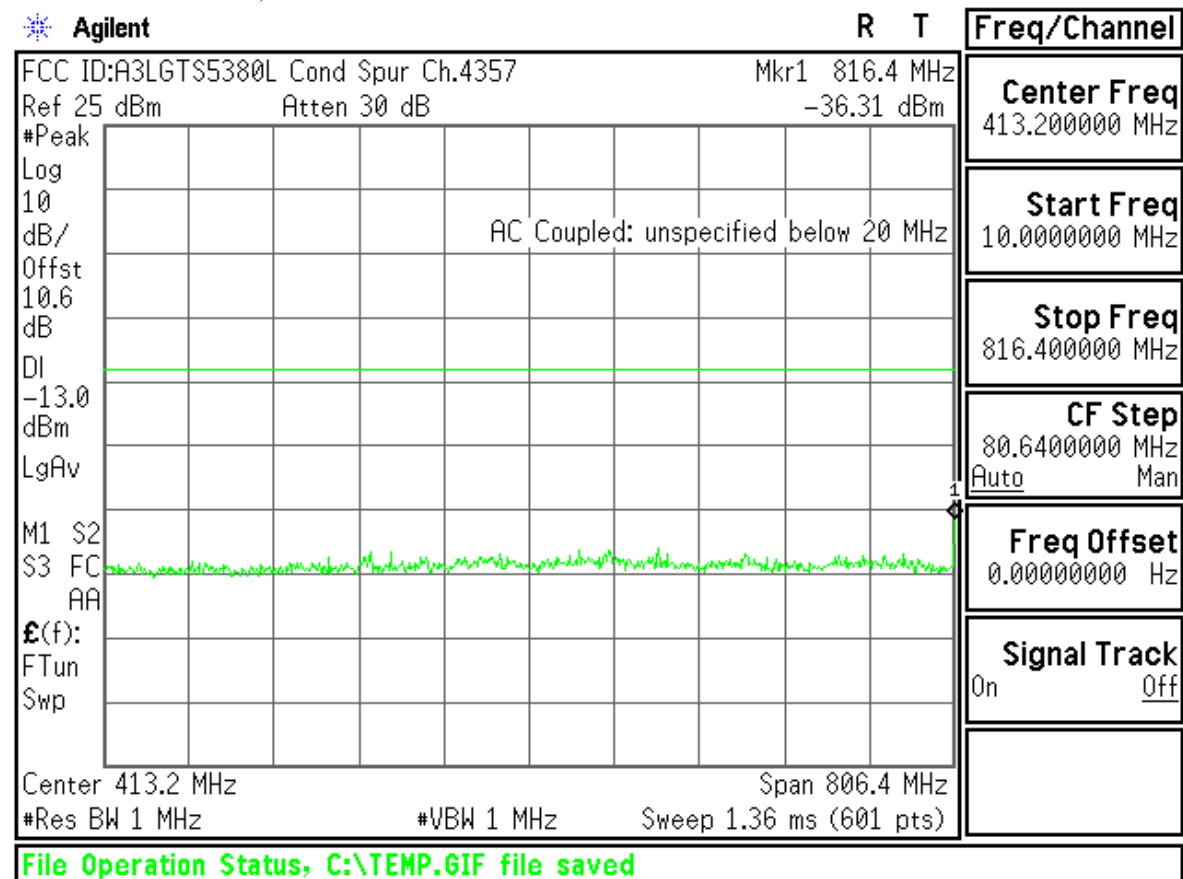


(UL Channel : 4132, DL Channel : 4357)

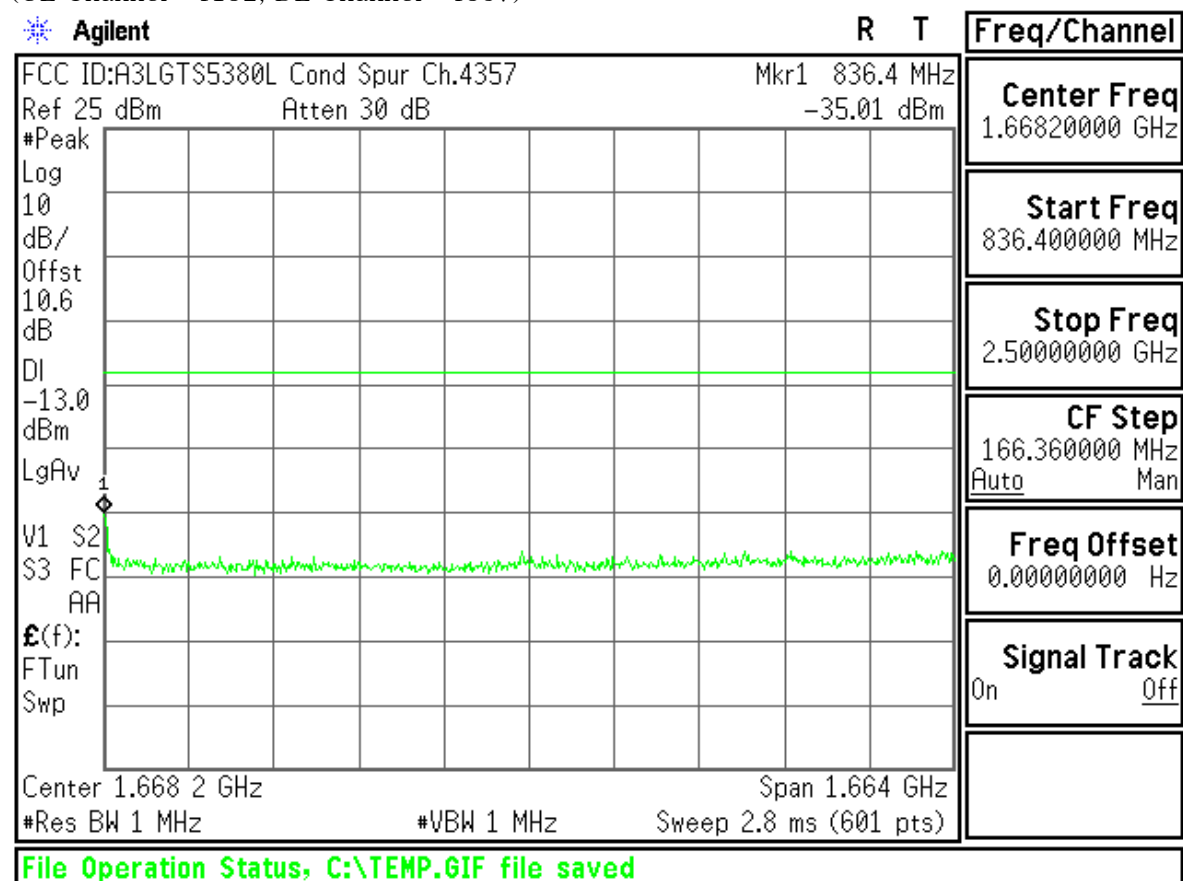


(UL Channel : 4132, DL Channel : 4357)

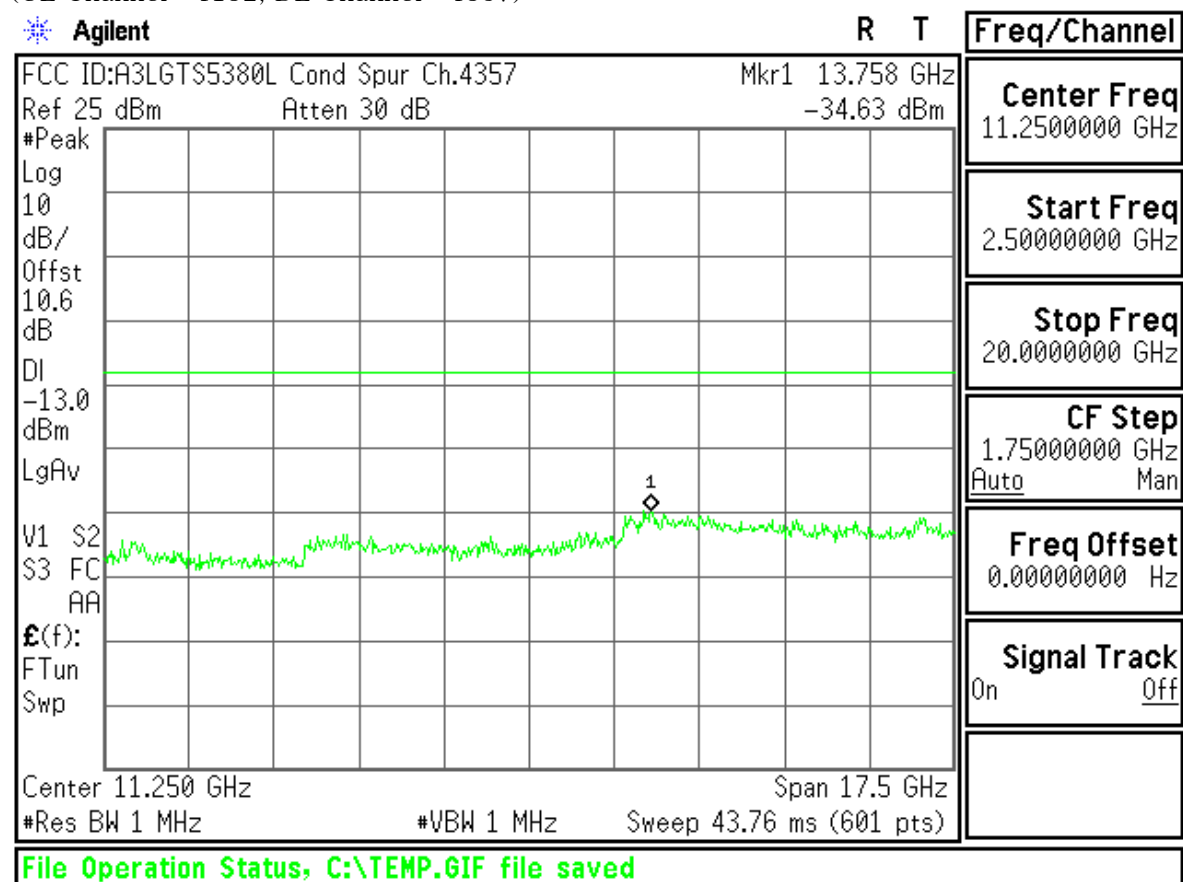


(UL Channel : 4183, DL Channel : 4408)

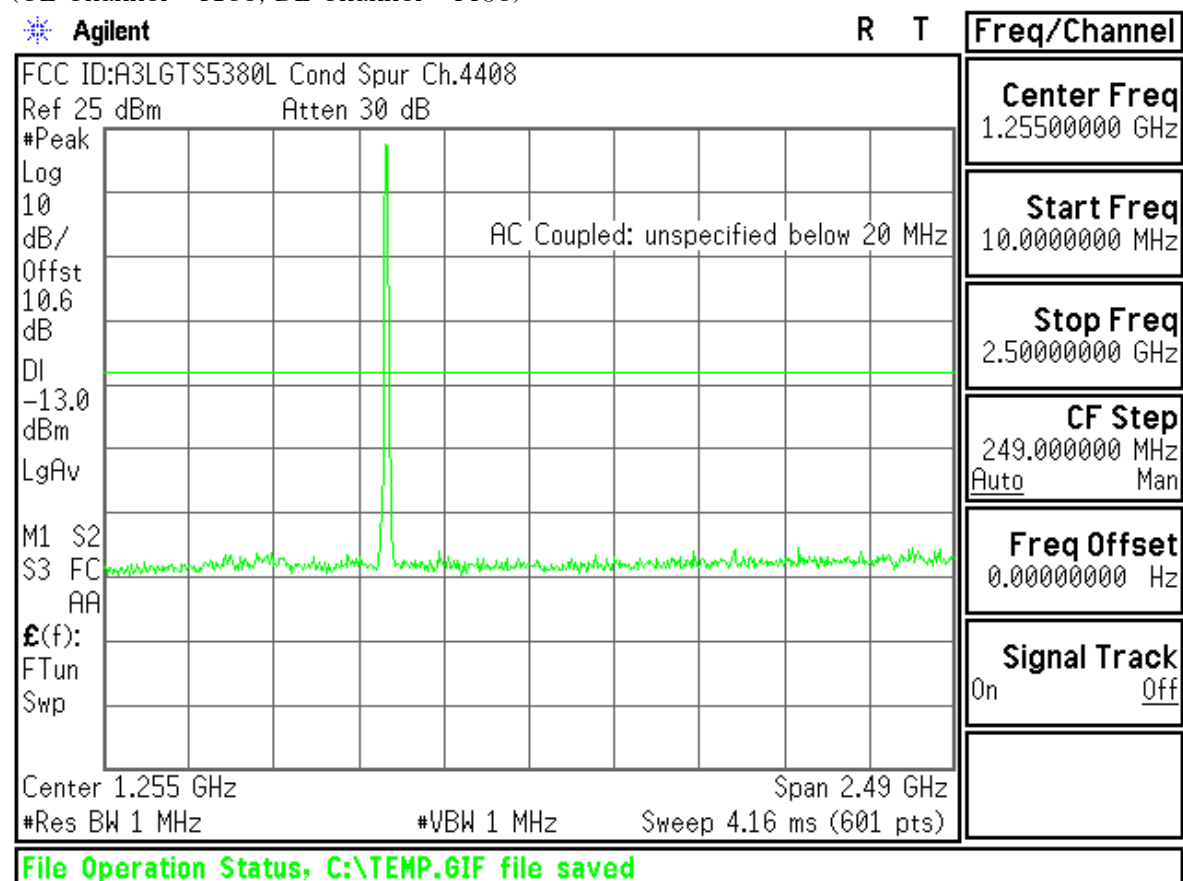


(UL Channel : 4183, DL Channel : 4408)

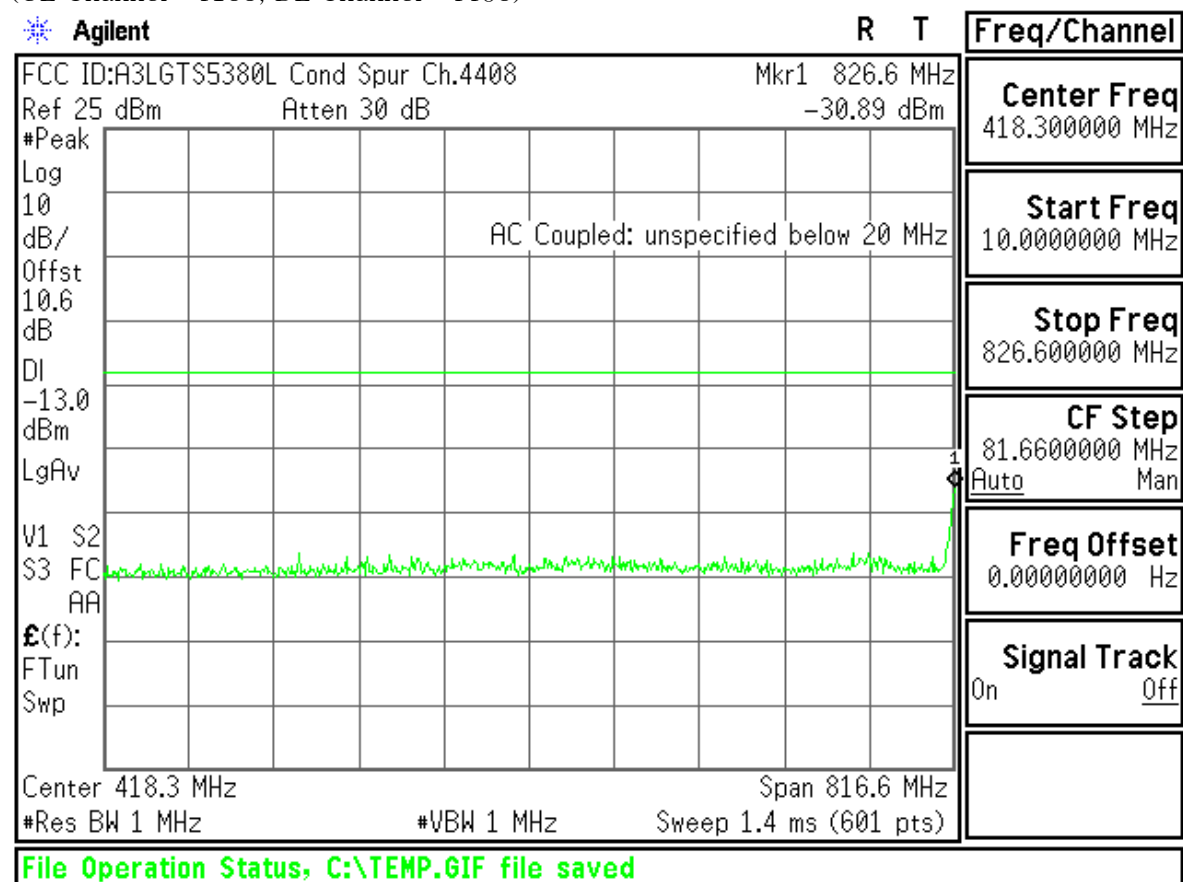


(UL Channel : 4183, DL Channel : 4408)

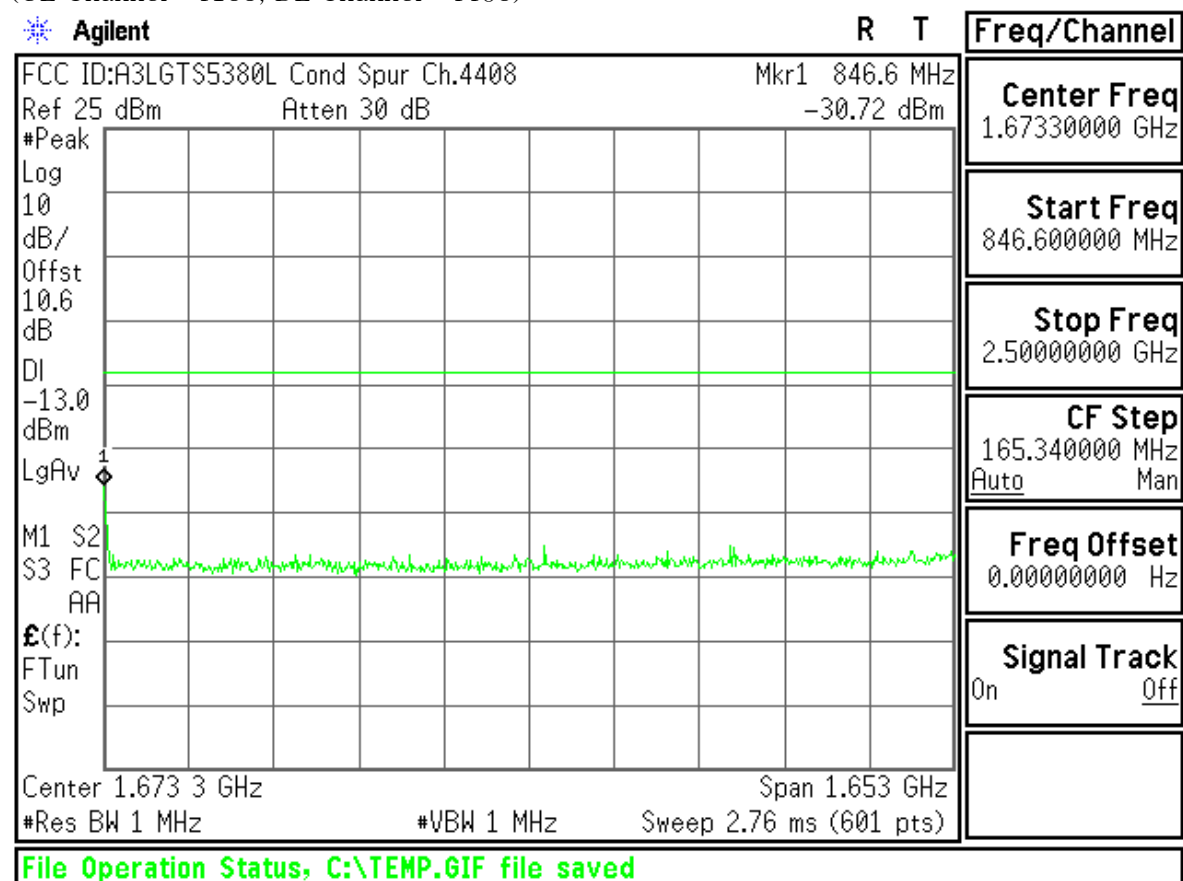


(UL Channel : 4183, DL Channel : 4408)

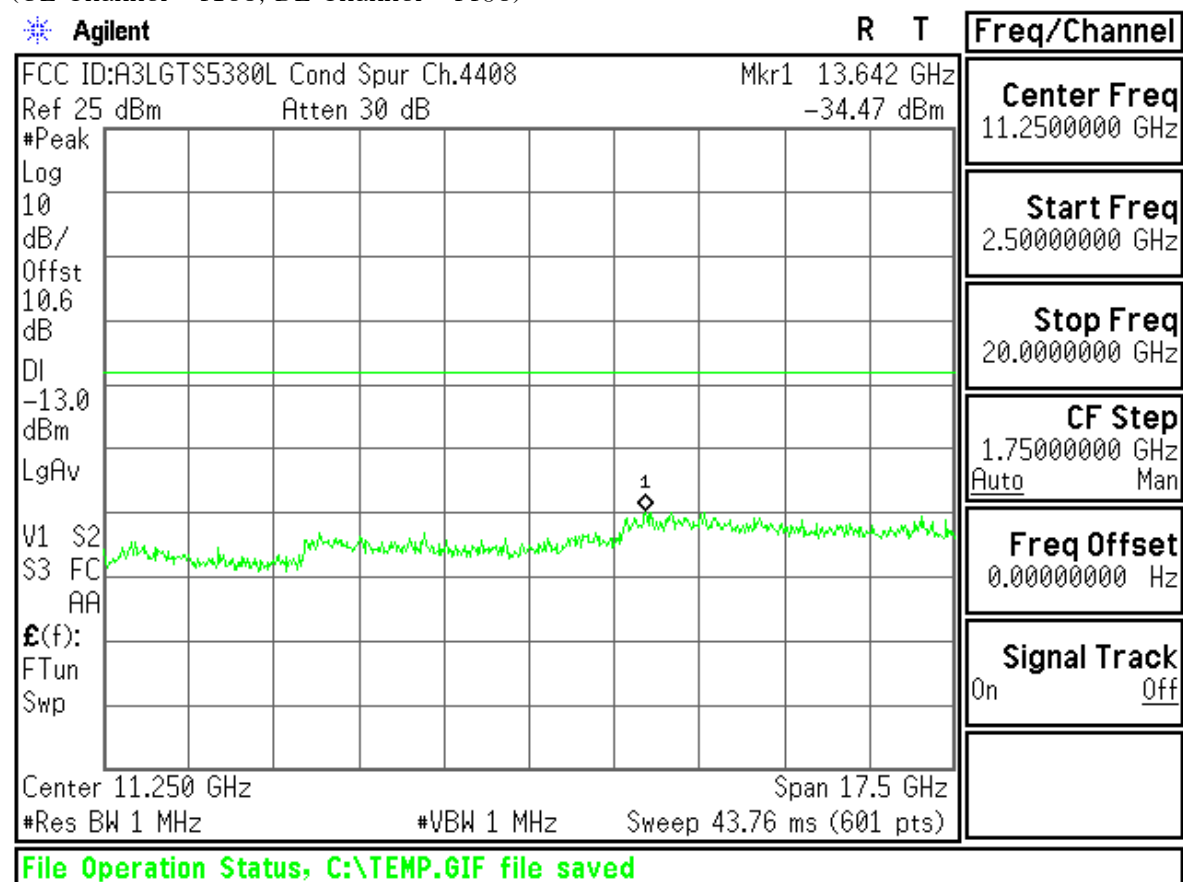


(UL Channel : 4233, DL Channel : 4458)

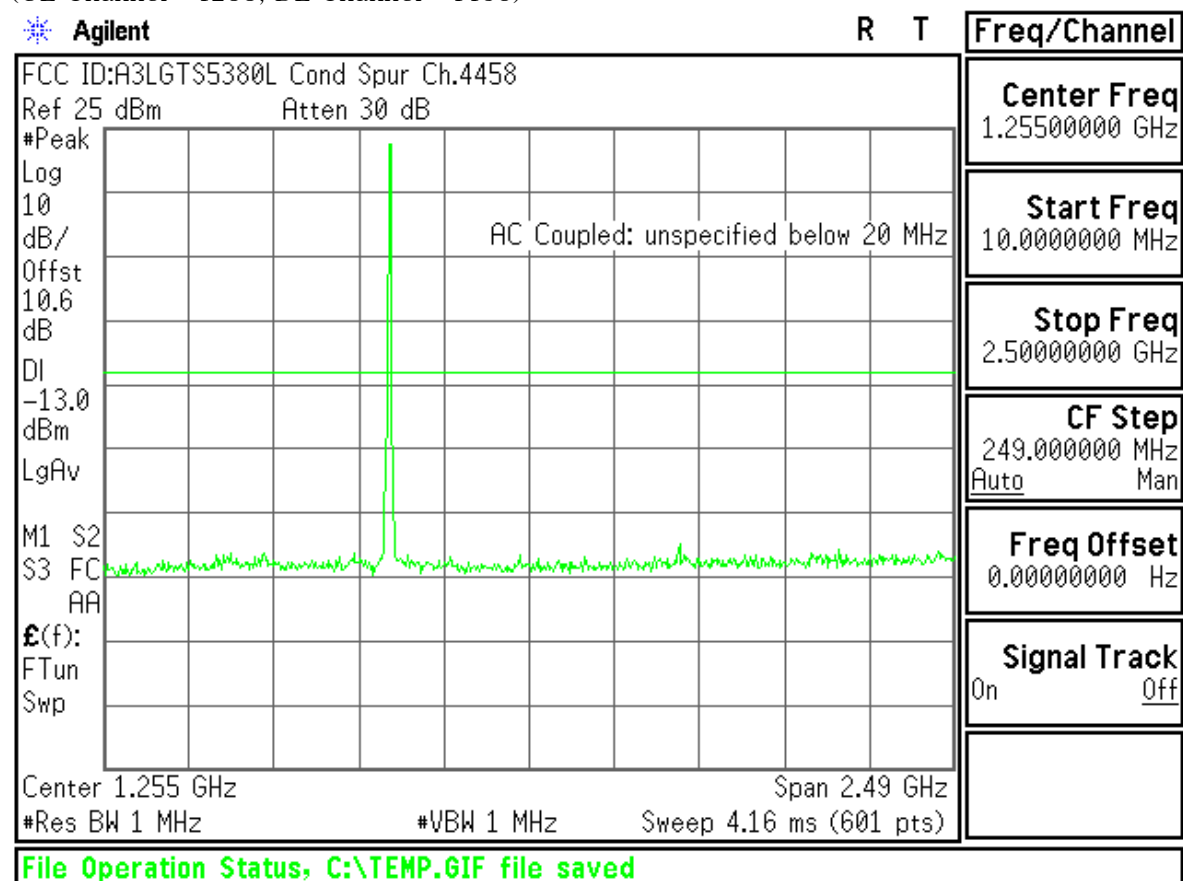


(UL Channel : 4233, DL Channel : 4458)

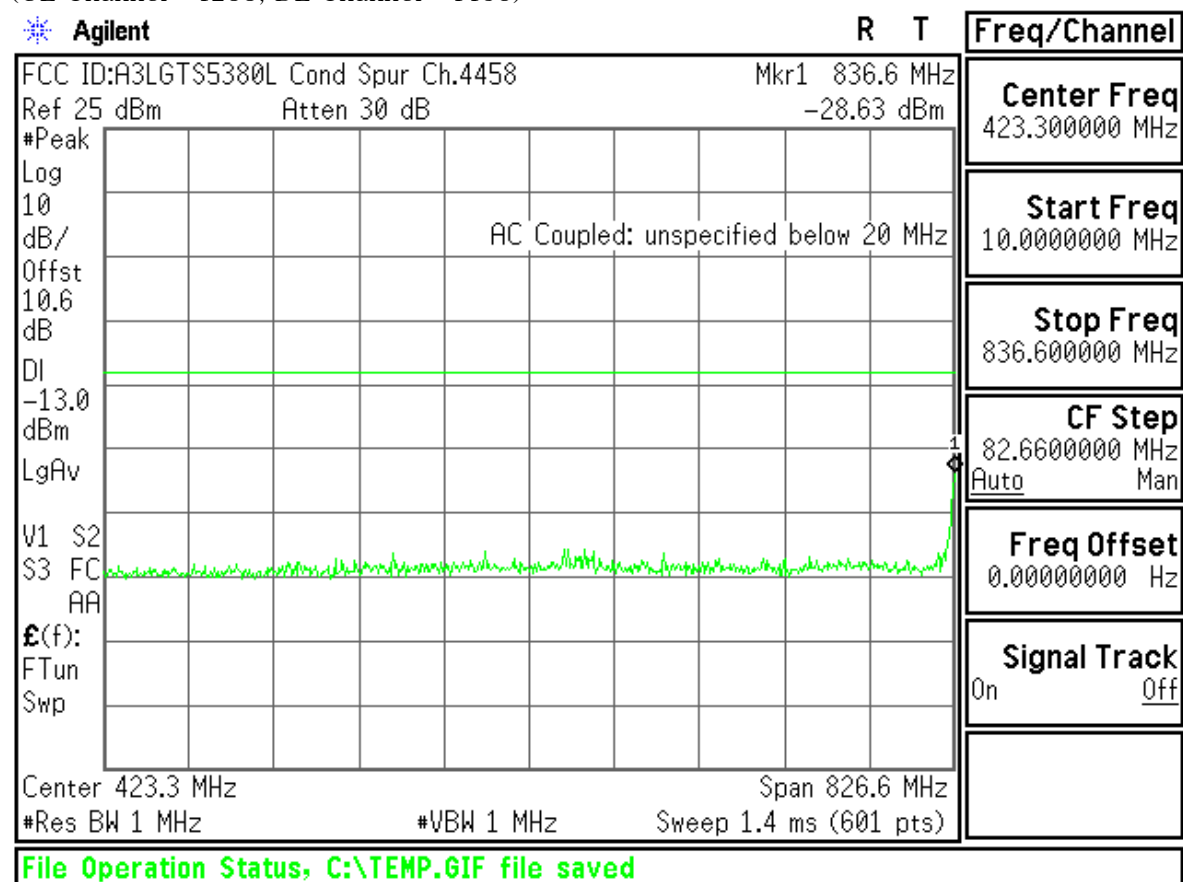


(UL Channel : 4233, DL Channel : 4458)

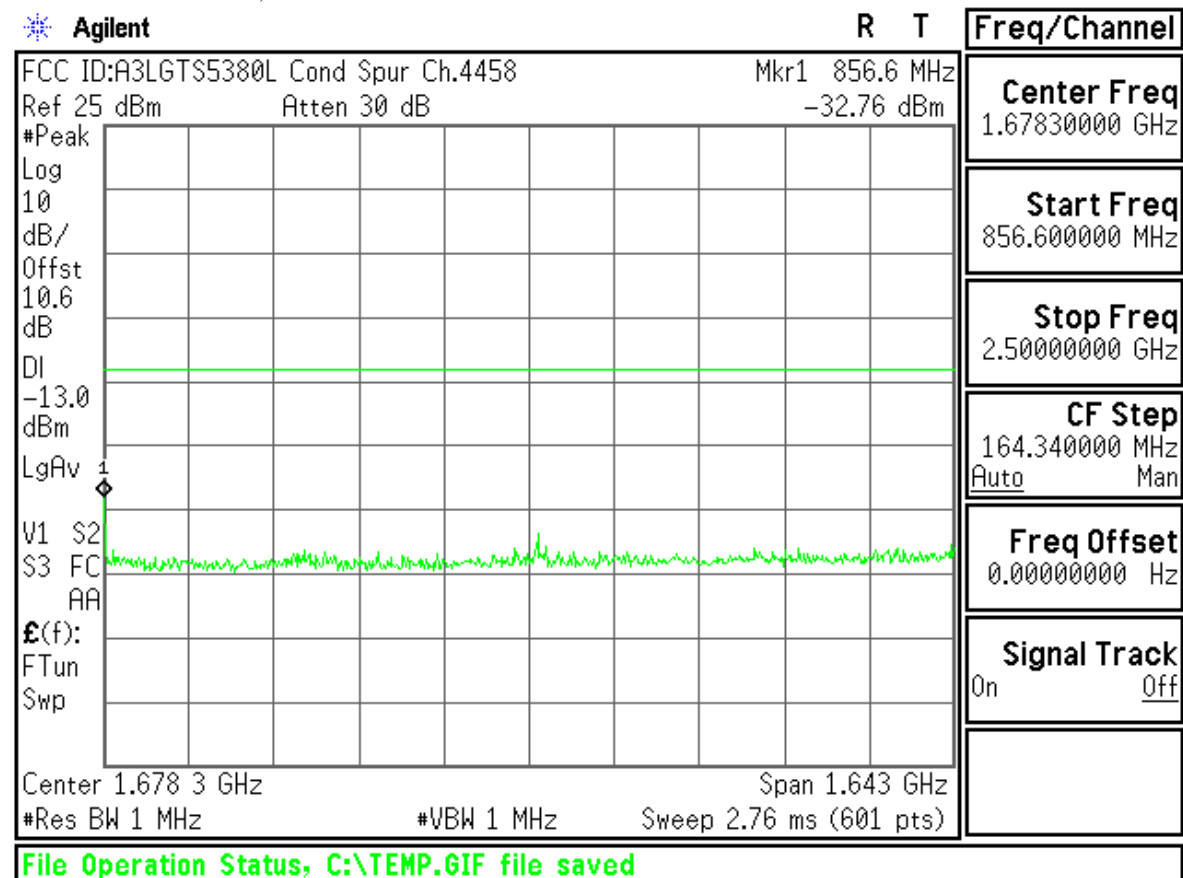


(UL Channel : 4233, DL Channel : 4458)

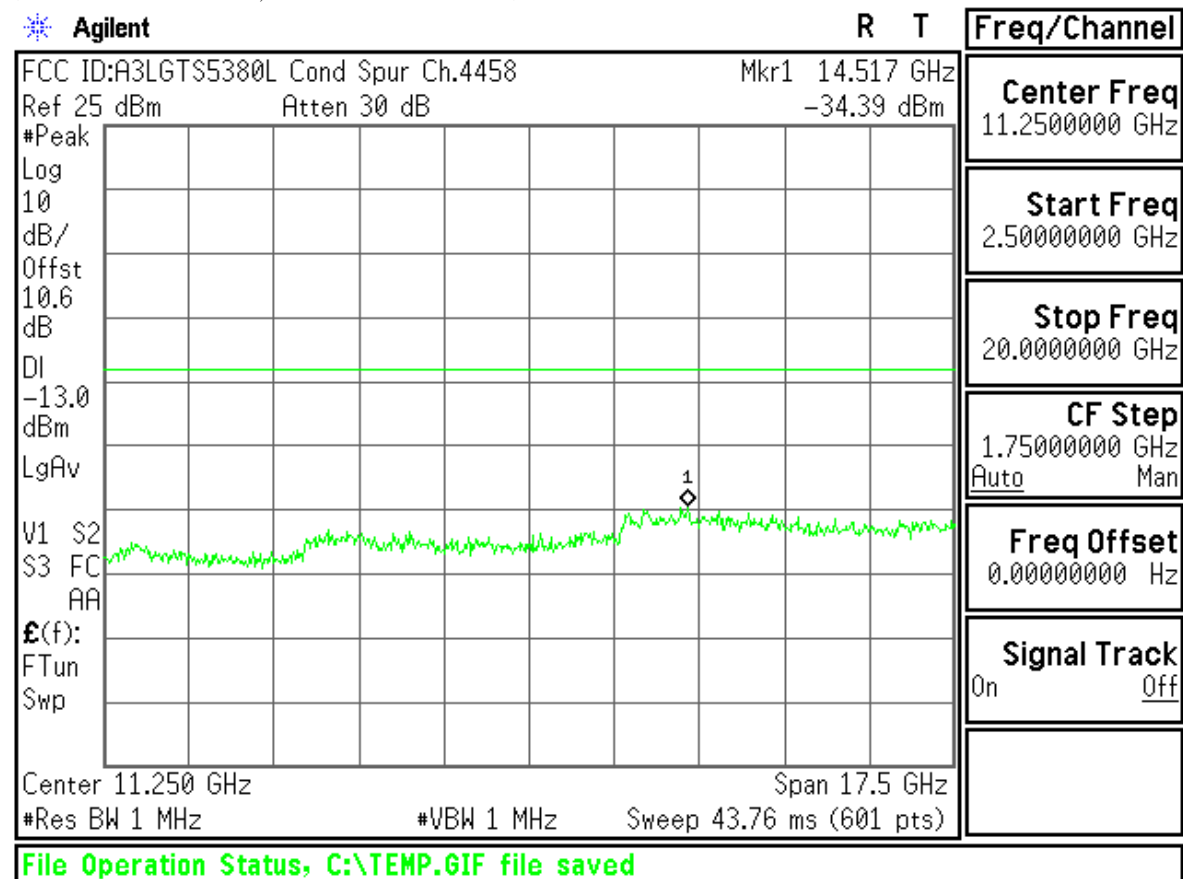


(UL Channel : 4132, DL Channel : 4357)

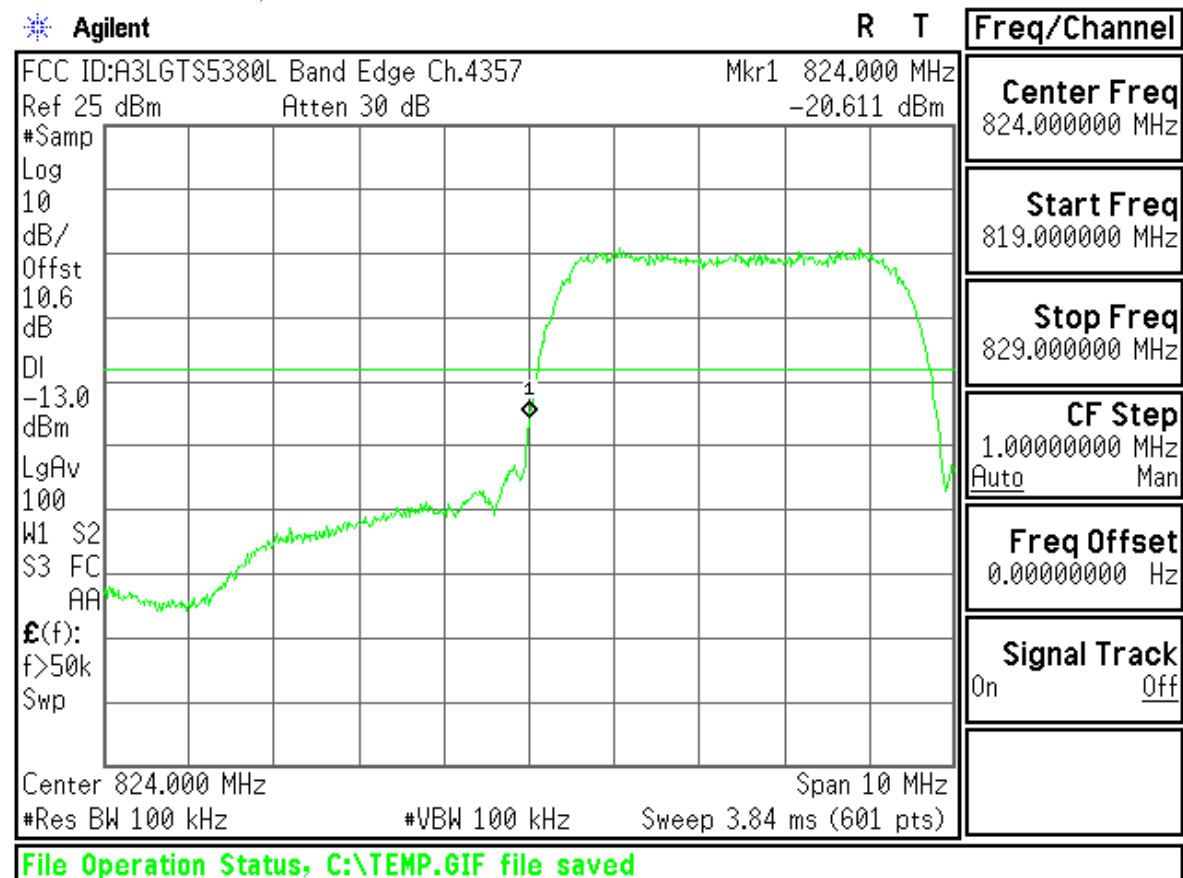


(UL Channel : 4233, DL Channel : 4458)

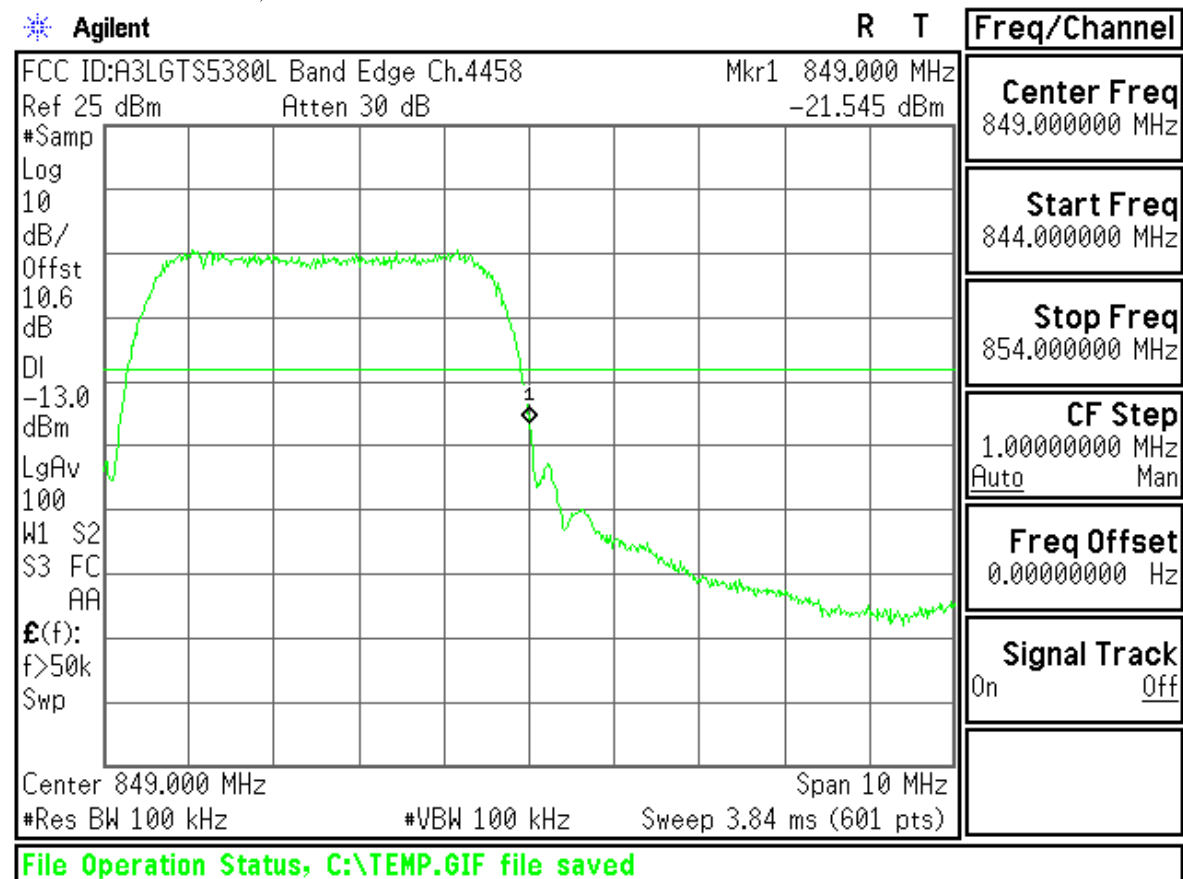

(UL Channel : 4132, DL Channel : 4357)

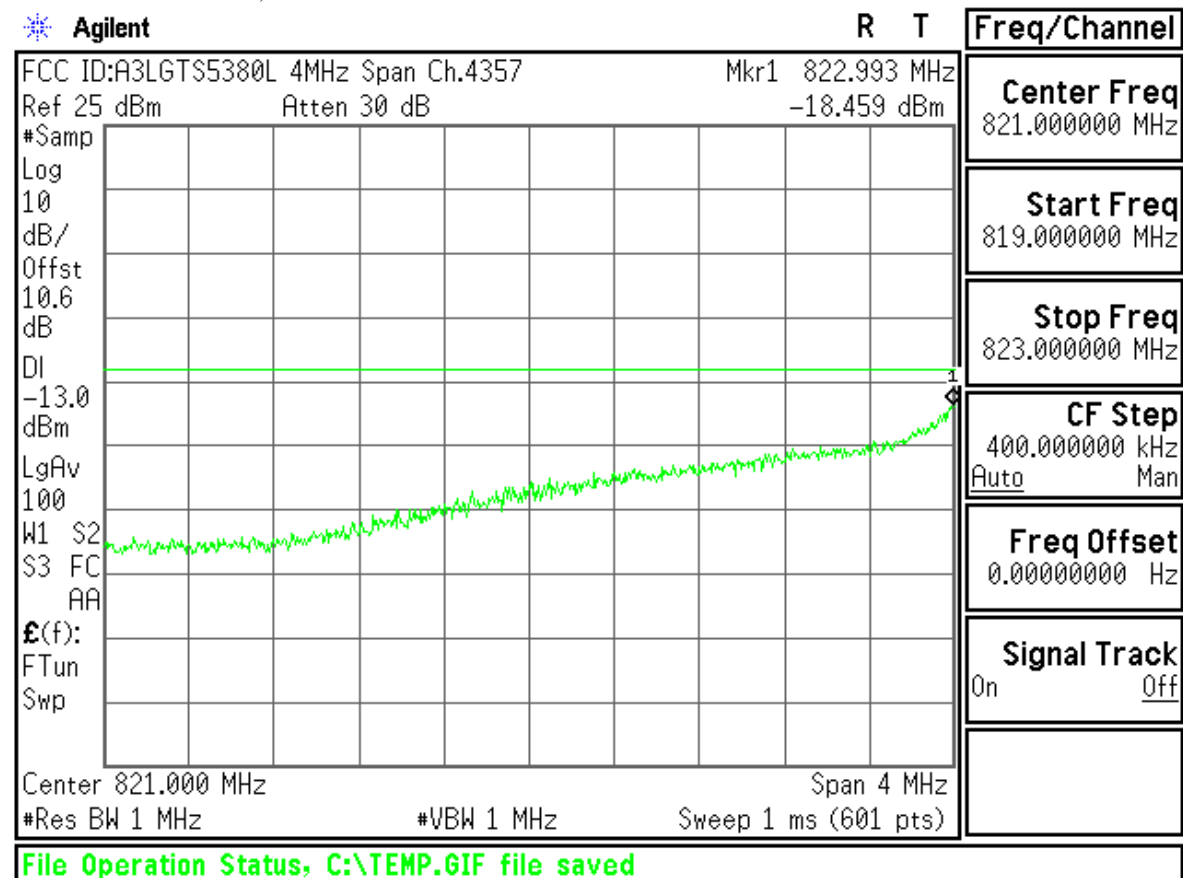

(UL Channel : 4233, DL Channel : 4458)

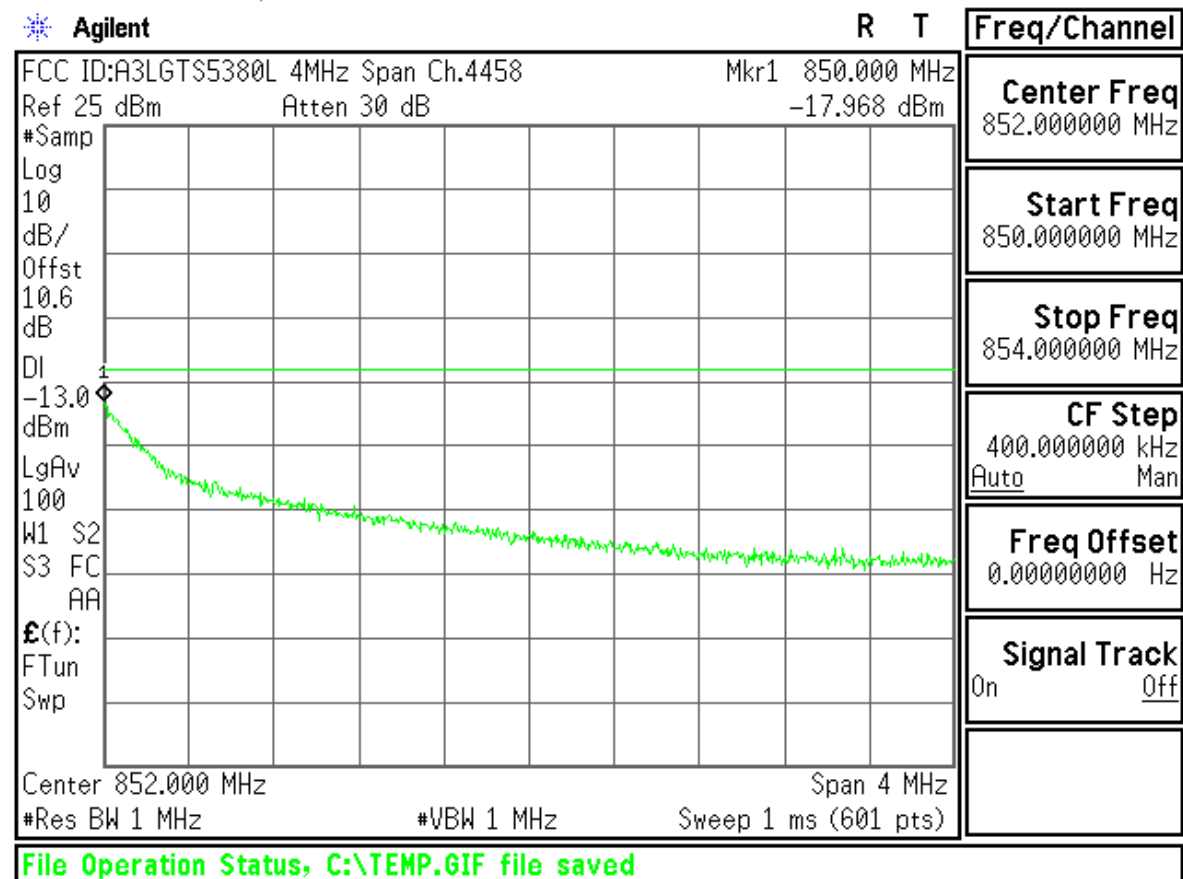

A3LGTS5380L BAND 2
(UL Channel : 9262, DL Channel : 9662)

Control		Waveform Quality							Call Parms			
Waveform Quality Setup ▾				Minimum		Maximum		Average		Cell Power		
		EVM (%):		6.10		6.35		6.22		-104.00		
		Frequency Error (Hz):		-18.19		7.54		-4.90		dBm/3.84 MHz		
		Origin Offset (dB):		-27.78		-27.31		-27.53		Channel Type		
		Phase Error (°):		2.80		2.98		2.88		12.2k RMC		
		Mag Error (%):		3.61		3.70		3.65				
		Time Error (chips):		0.87		0.88		0.87		Paging Service		
		Max PCDE:		-35.64 dB		at Cch.64.11				RB Test Mode		
		50 /5C						Single				
Calibrate Measurements		Thermal Power							HSPA Parameters			
		Thermal Power 23.06 dBm 										


(UL Channel : 9400, DL Channel : 9800)

Measurement/Instrument Screen													
Control		Waveform Quality							Call Parms				
Waveform Quality Setup ▾				Minimum		Maximum		Average		Cell Power			
		EVM (%):		6.57		6.85		6.69		-104.00			
		Frequency Error (Hz):		-30.72		11.97		-4.75		dBm/3.84 MHz			
		Origin Offset (dB):		-27.18		-26.85		-27.02		Channel Type			
		Phase Error (°):		3.08		3.25		3.15		12.2k RMC			
		Mag Error (%):		3.76		3.82		3.78					
		Time Error (chips):		-0.10		-0.08		-0.09		Paging Service			
		Max PCDE:		-34.04 dB		at Cch.64.11		RB Test Mode					
		50 /5C						Single					
		Thermal Power											
Calibrate Measurements		Thermal Power 22.71 dBm							HSPA Parameters				
Swap Window Positions									34.121 Preset Call Configs ▾				
		Single							Channel (UARFCN) Parms				
				Active Cell Connected			Sys Type: UTRA FDD						
1 of 2						IntRef		Offset		R T		1 of 3	


(UL Channel : 9538, DL Channel : 9938)

Measurement/Instrument Screen										
Control		Waveform Quality							Call Params	
Waveform Quality Setup ▾			Minimum		Maximum		Average		Cell Power	
	EVM (%):		5.86		6.13		5.97		-104.00	
	Frequency Error (Hz):		-14.06		5.46		-2.96		dBm/3.84 MHz	
	Origin Offset (dB):		-27.60		-27.24		-27.40		Channel Type	
	Phase Error (°):		2.72		2.90		2.80		12.2k RMC	
	Mag Error (%):		3.40		3.45		3.43		Paging Service	
	Time Error (chips):		0.48		0.50		0.49		RB Test Mode	
	Max PCDE:		-35.00 dB		at Cch.64.1:1					
50 /50								Single		
Calibrate Measurements		Thermal Power							HSPA Parameters	
		Thermal Power								
		22.69 dBm							34.121 Preset Call Configs ▾	
Swap Window Positions									Channel (UARFCN) Params	
		Single								
		Active Cell Connected				Sys Type: UTRA FDD				
1 of 2				IntRef	Offset	R	T			1 of 3


(UL Channel : 9262, DL Channel : 9662)

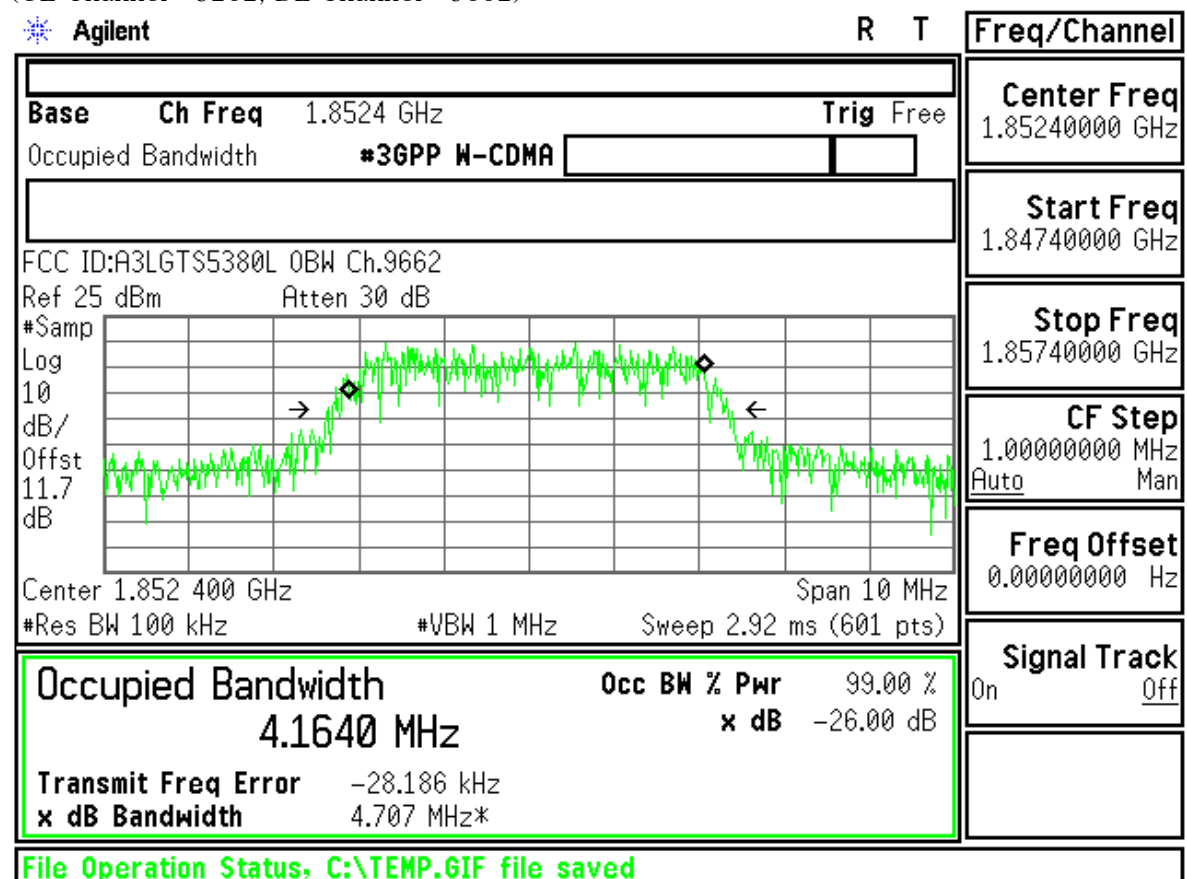


(UL Channel : 9400, DL Channel : 9800)

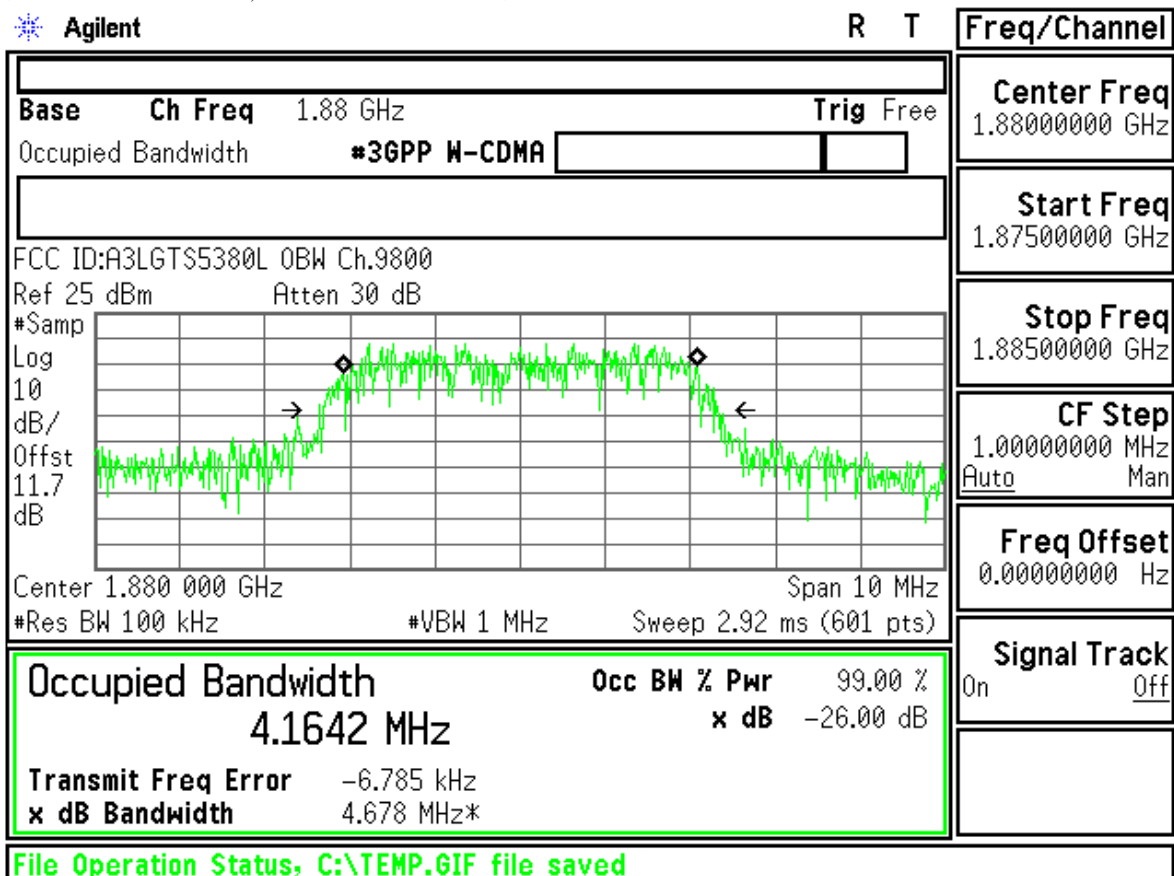


(UL Channel : 9538, DL Channel : 9938)

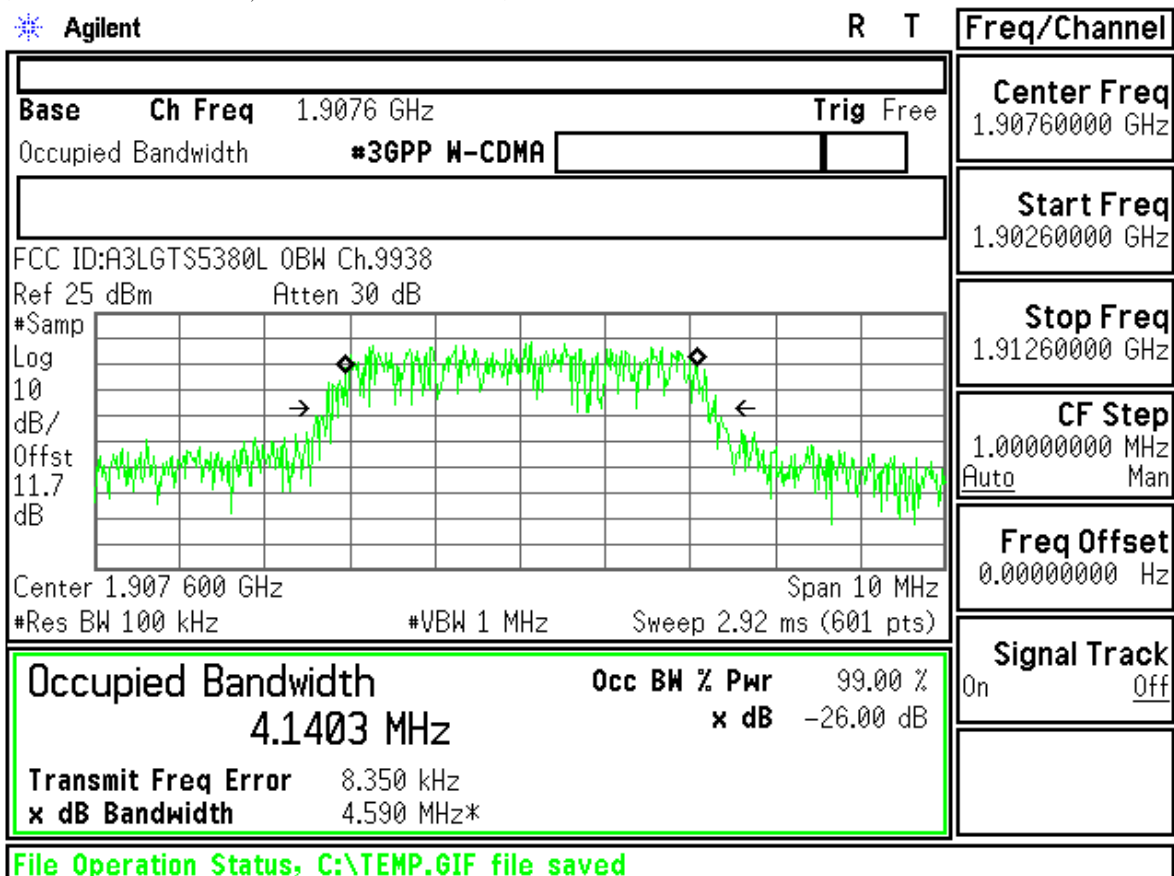


(UL Channel : 9262, DL Channel : 9662)

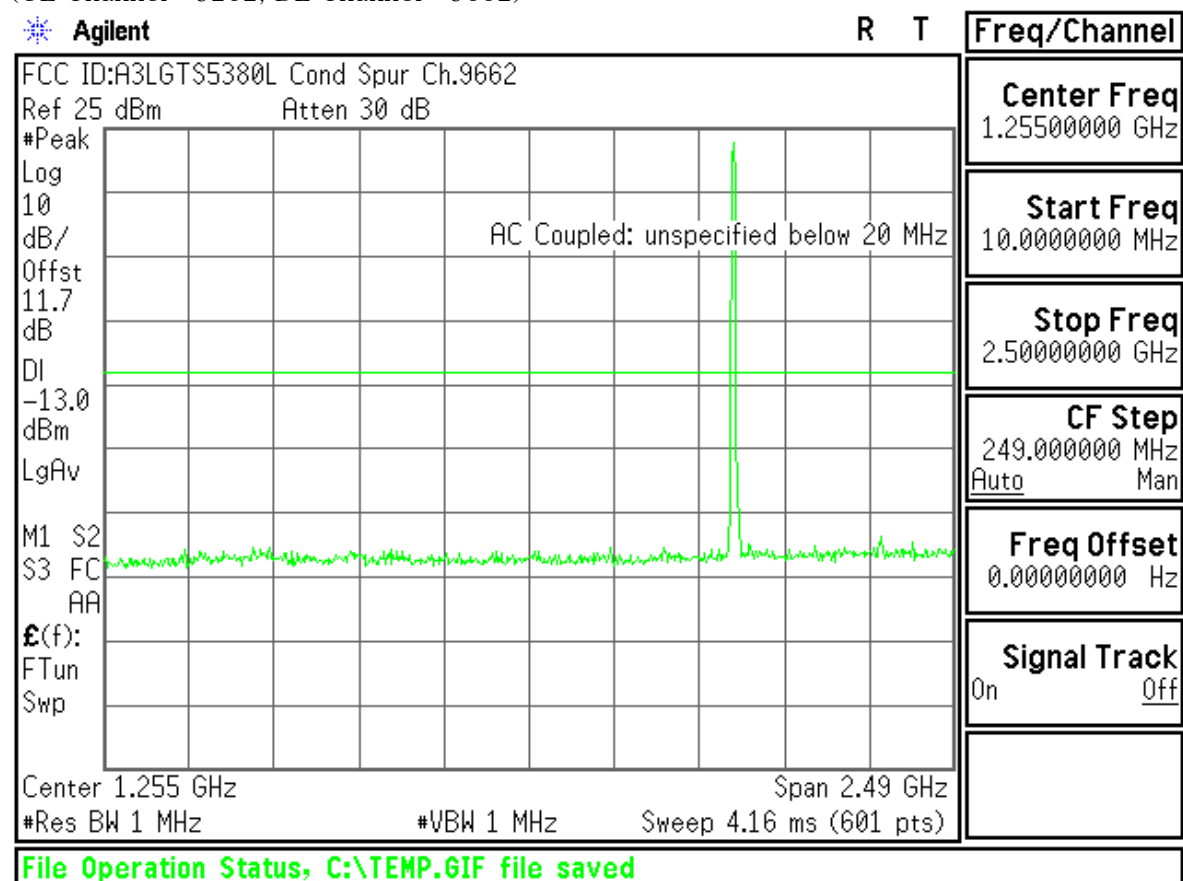


(UL Channel : 9262, DL Channel : 9662)

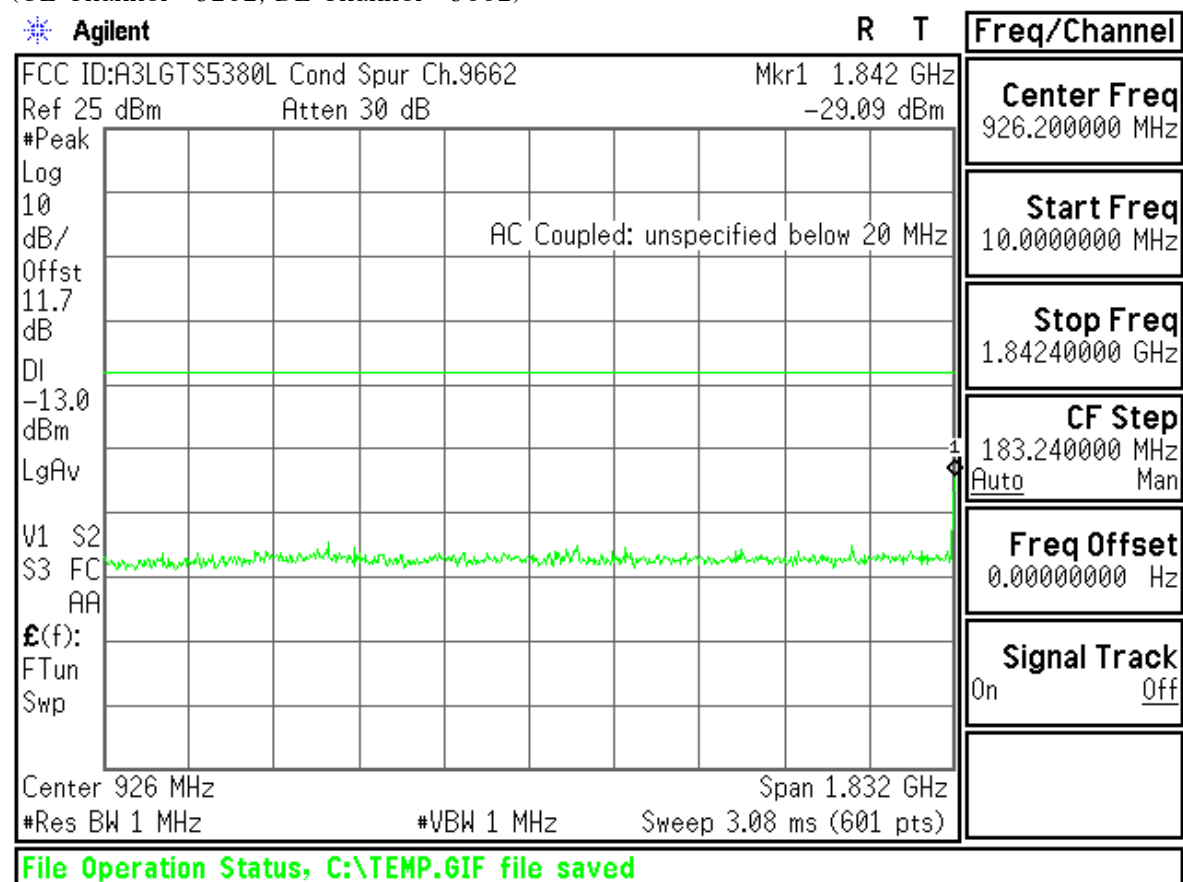


(UL Channel : 9262, DL Channel : 9662)

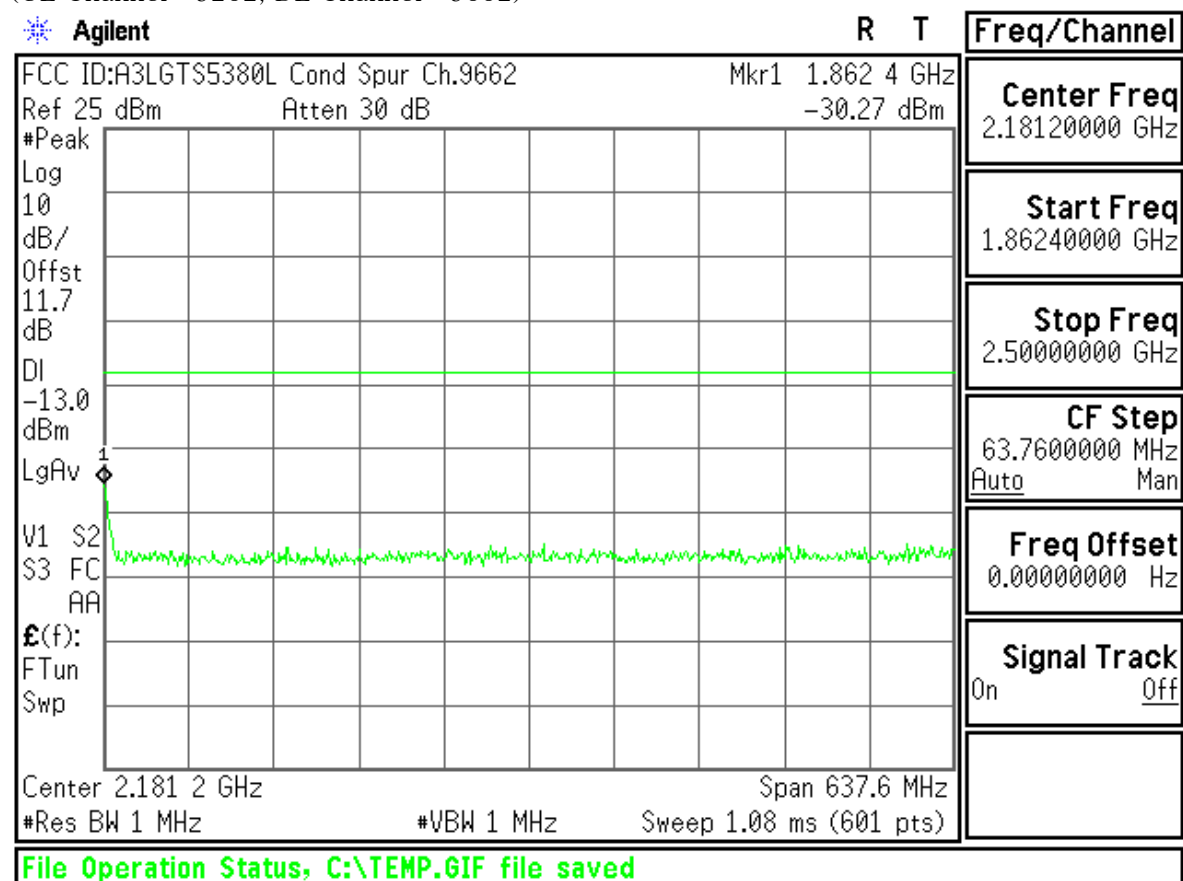


(UL Channel : 9262, DL Channel : 9662)

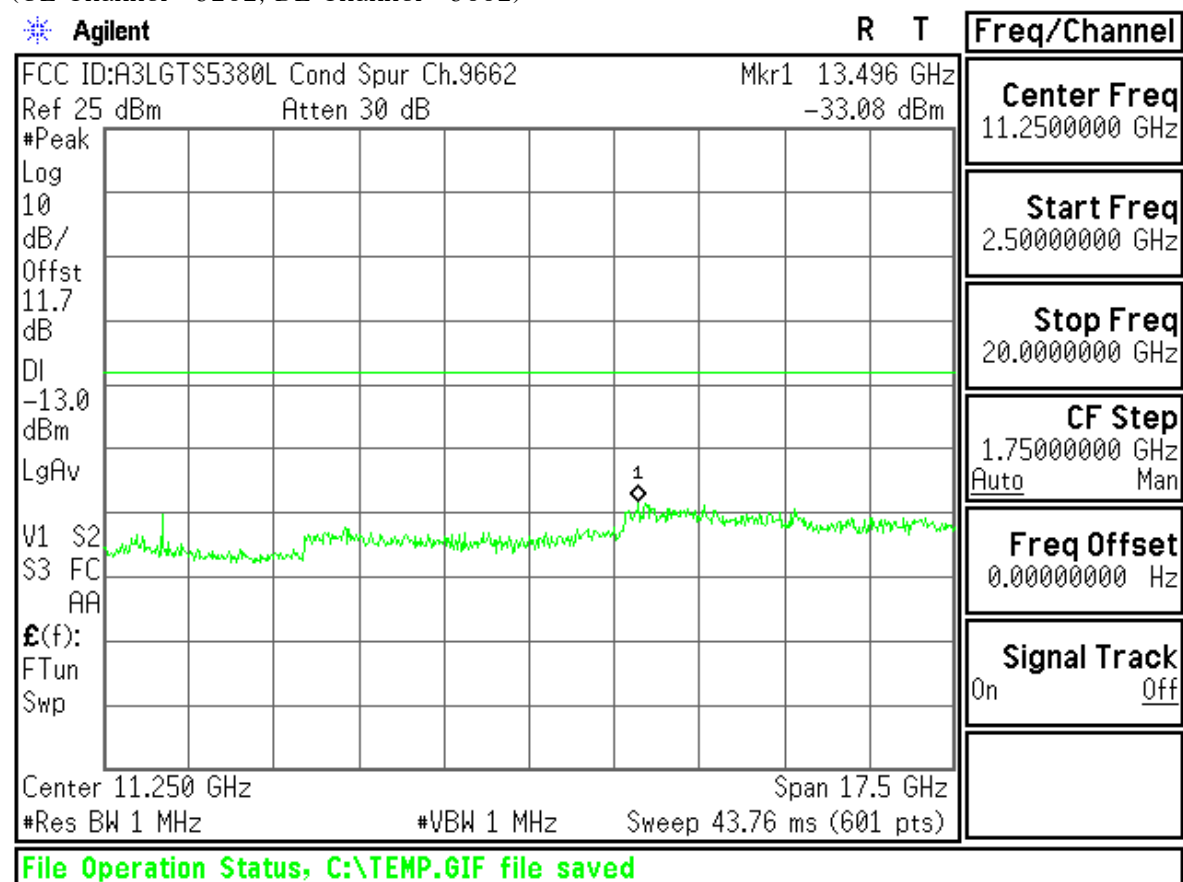


(UL Channel : 9400, DL Channel : 9800)

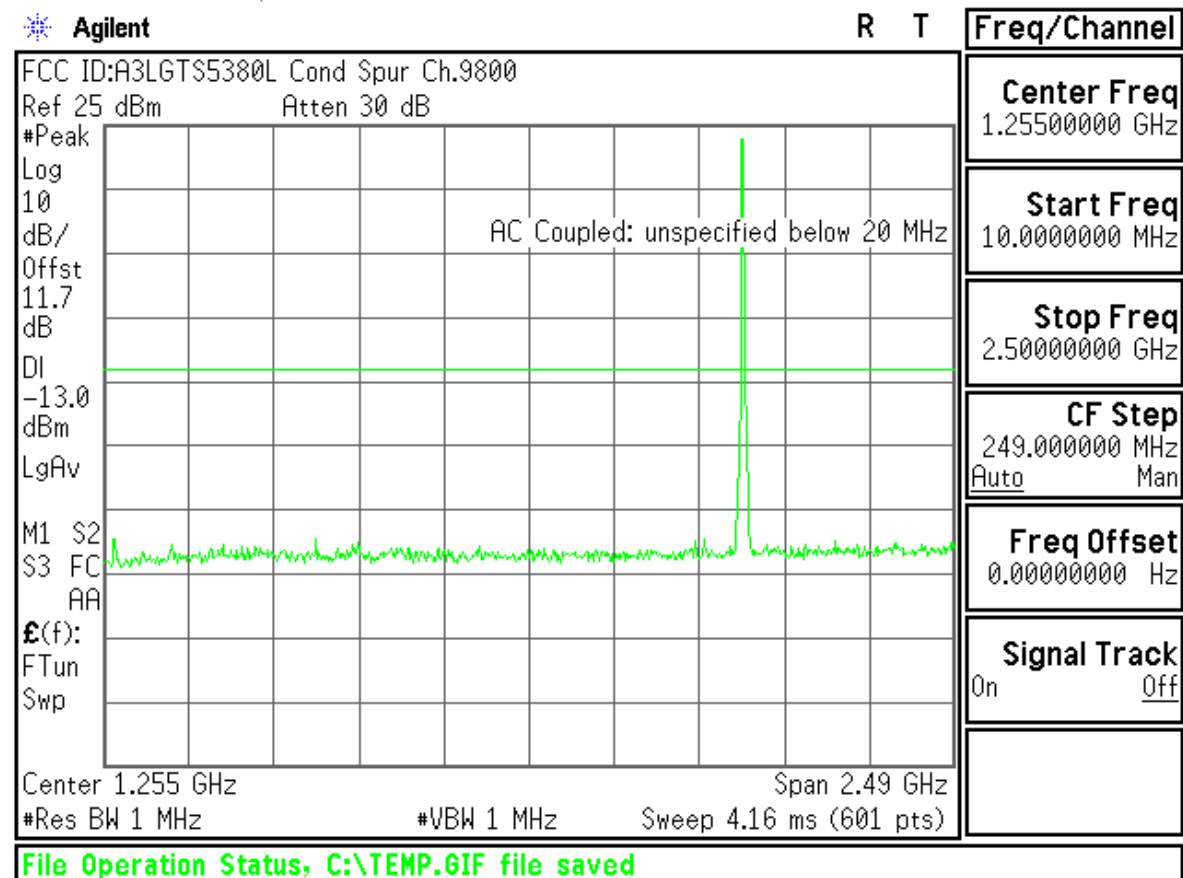


(UL Channel : 9400, DL Channel : 9800)

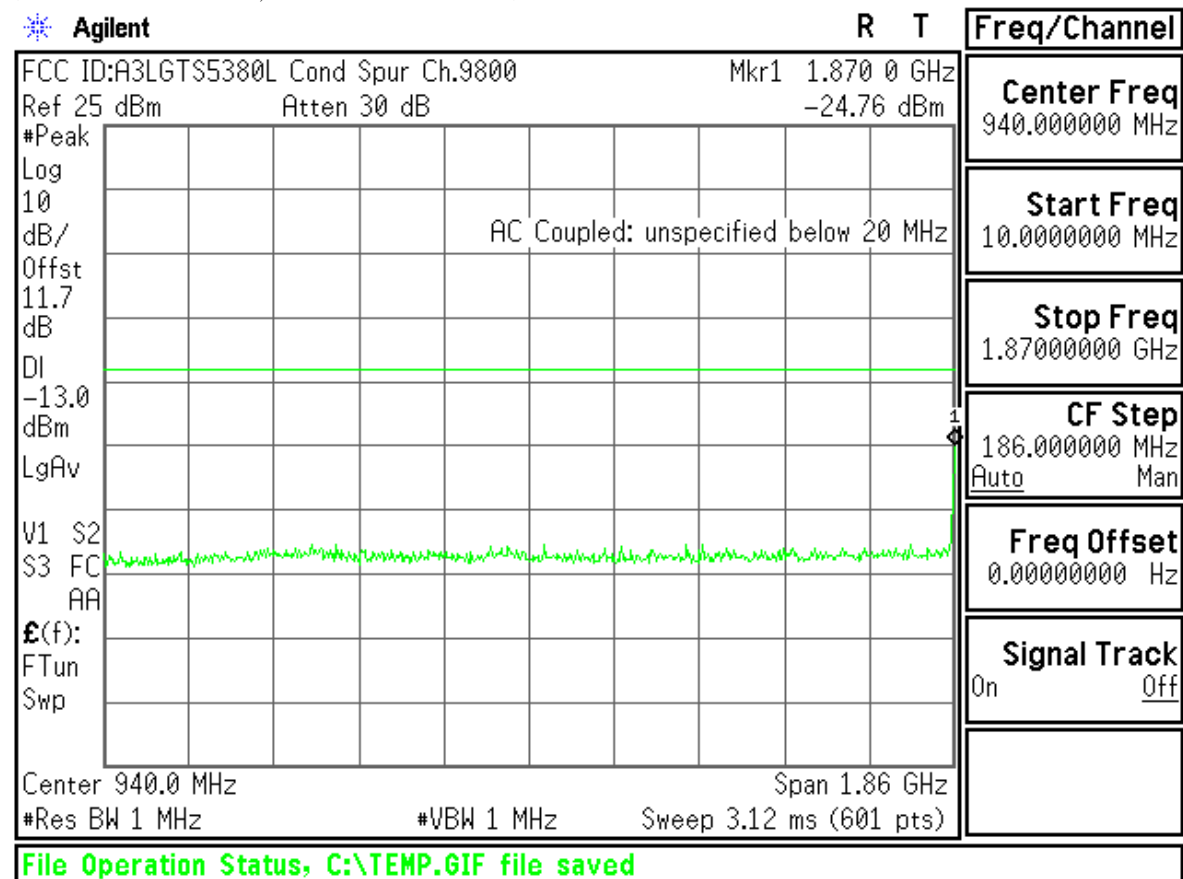


(UL Channel : 9400, DL Channel : 9800)

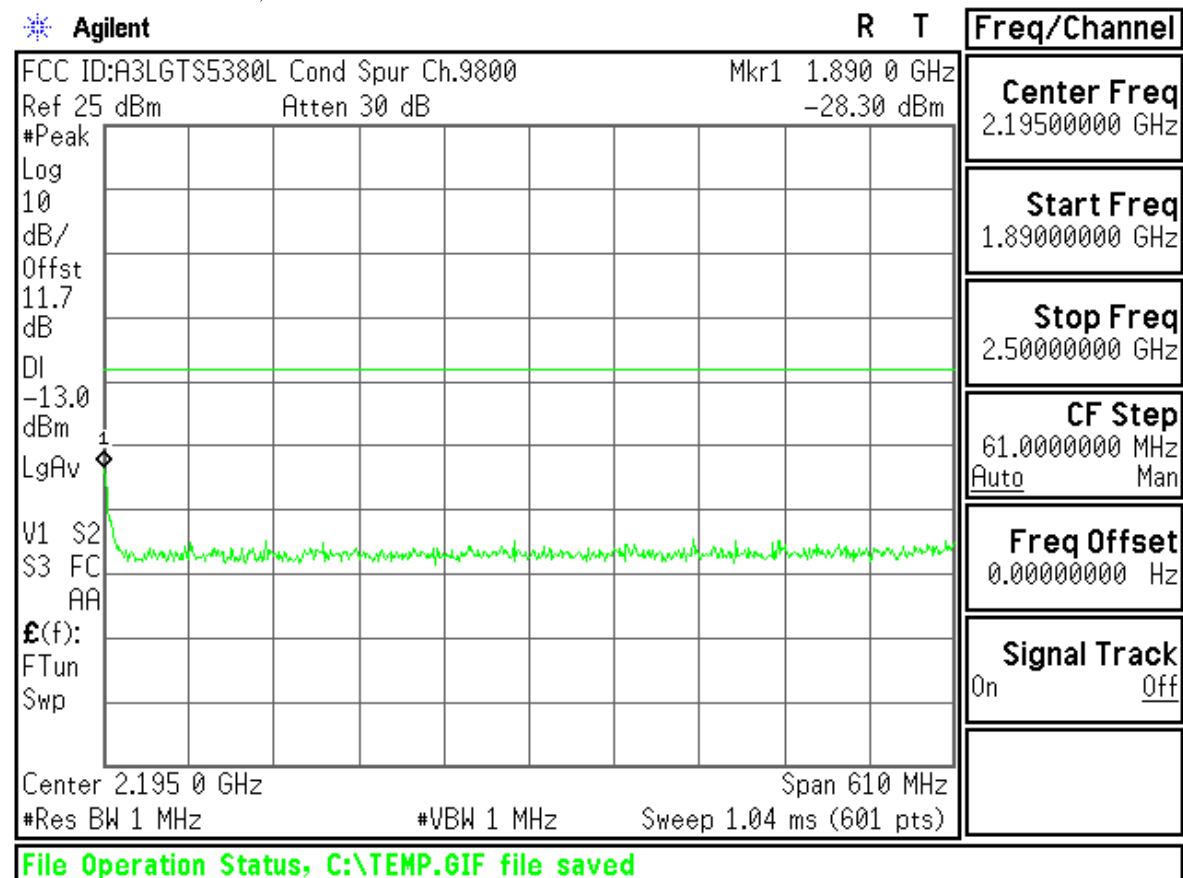


(UL Channel : 9400, DL Channel : 9800)

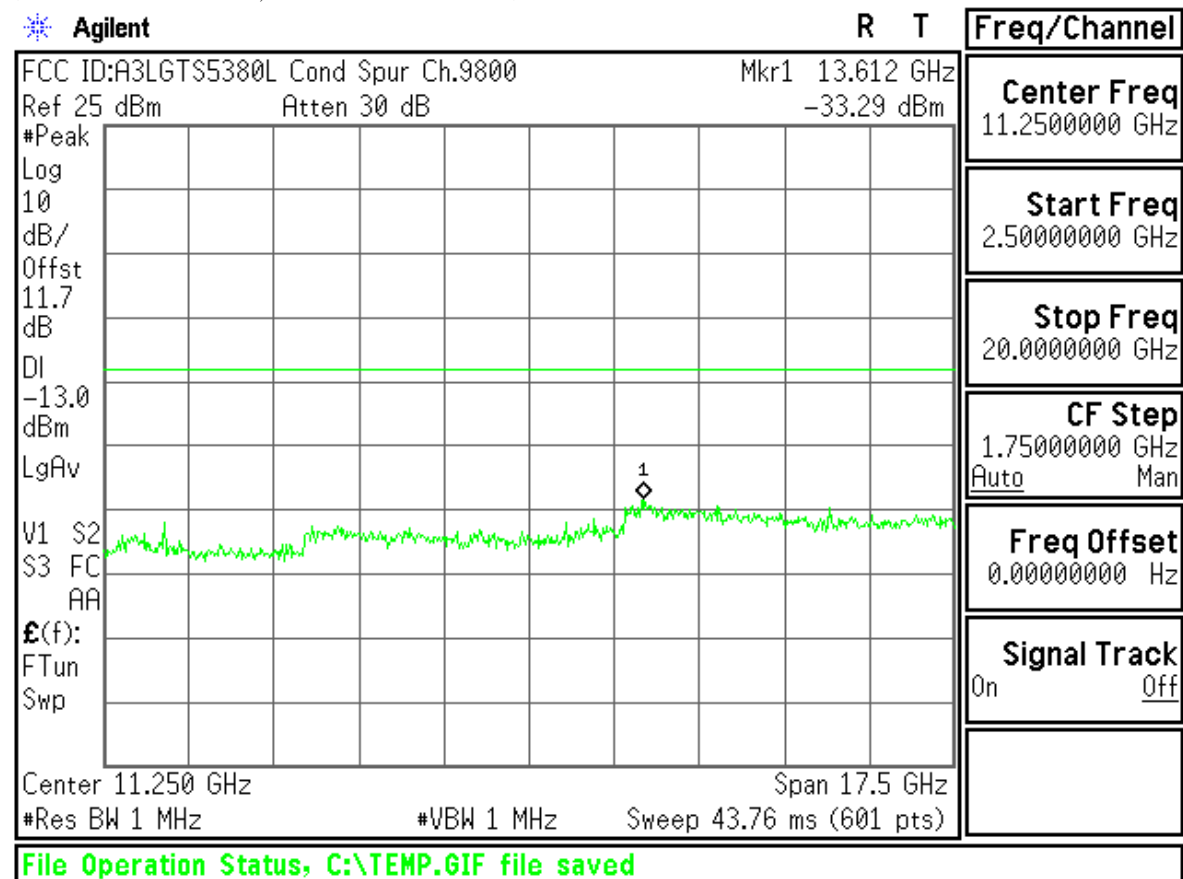


(UL Channel : 9538, DL Channel : 9938)

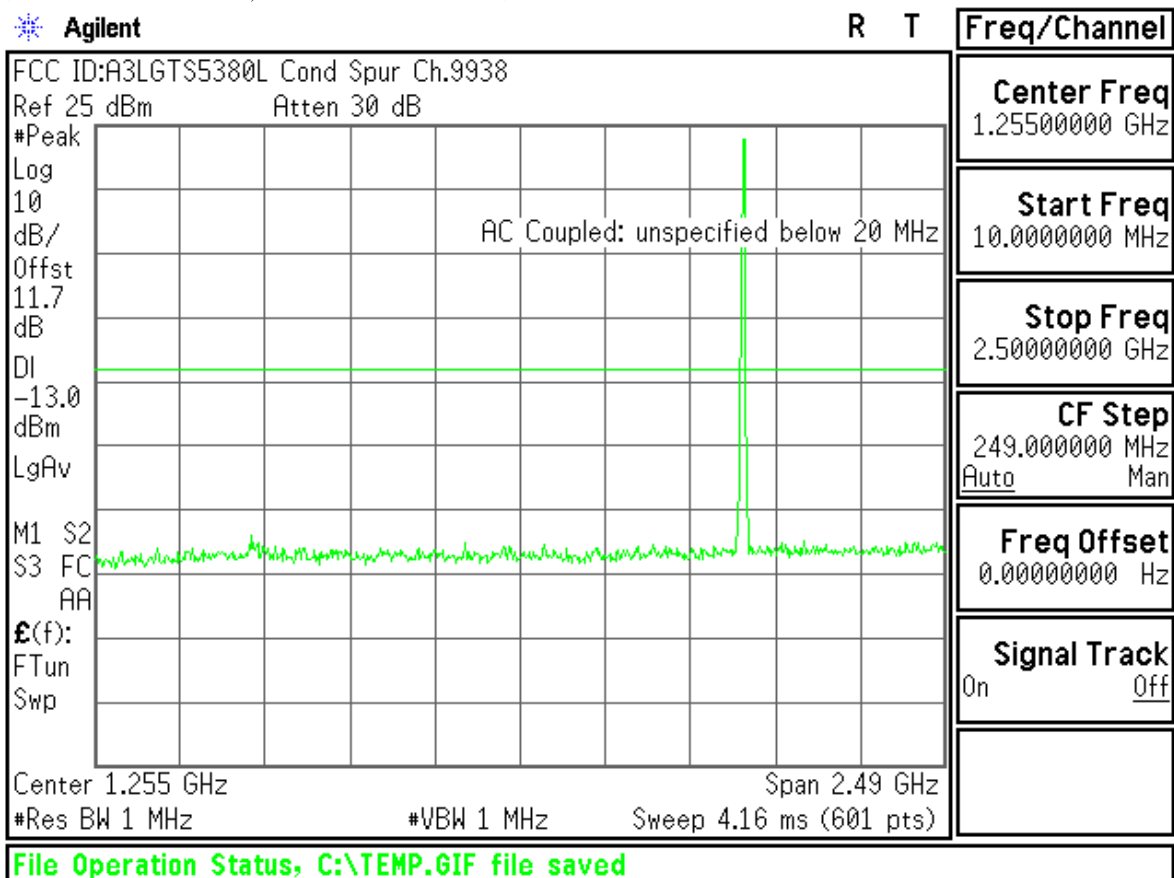


(UL Channel : 9538, DL Channel : 9938)

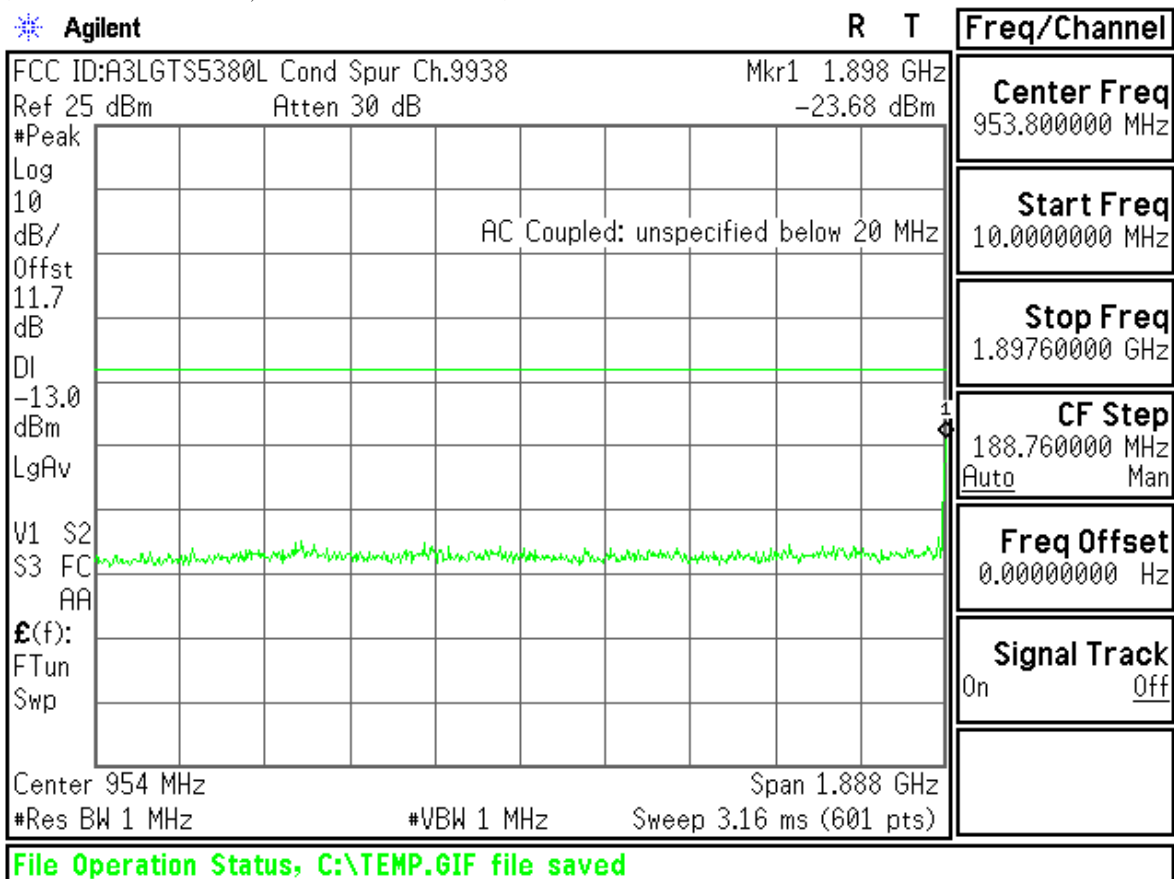


(UL Channel : 9538, DL Channel : 9938)

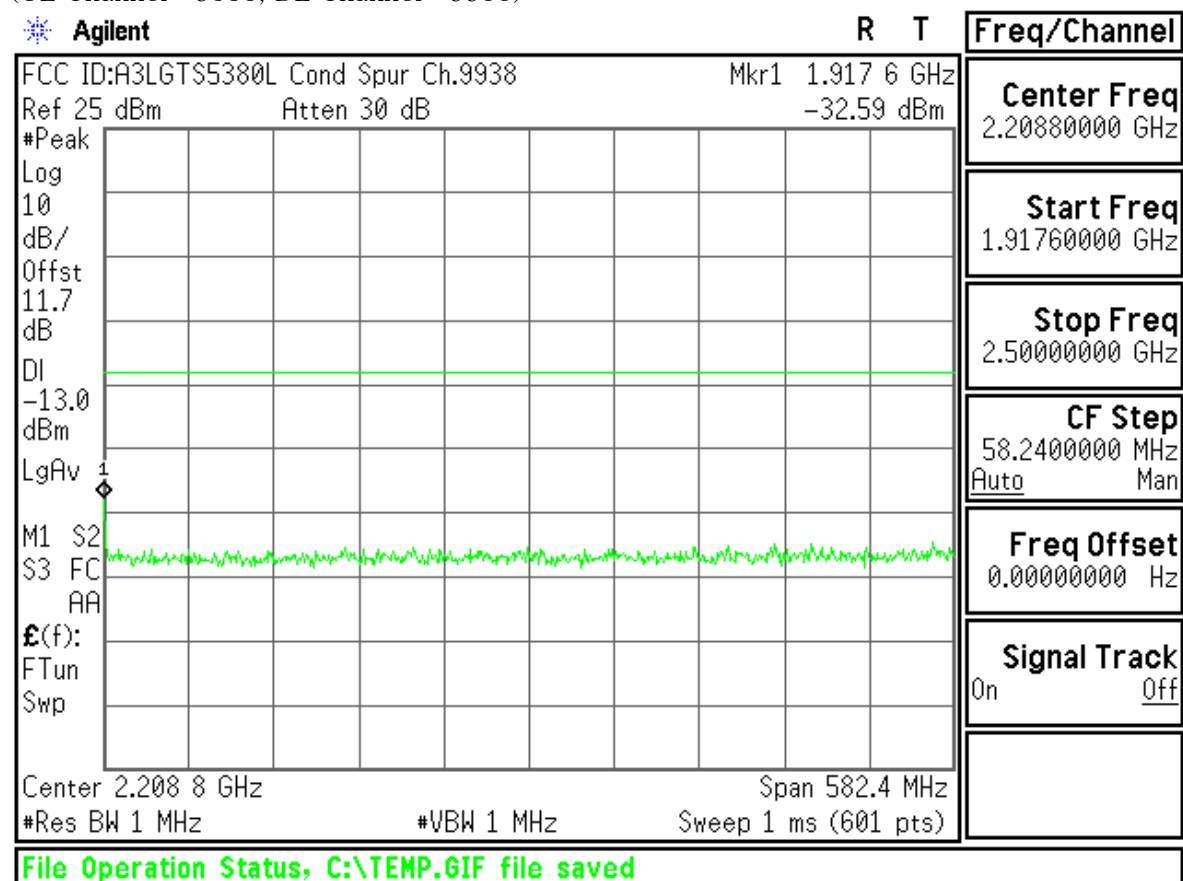


(UL Channel : 9538, DL Channel : 9938)

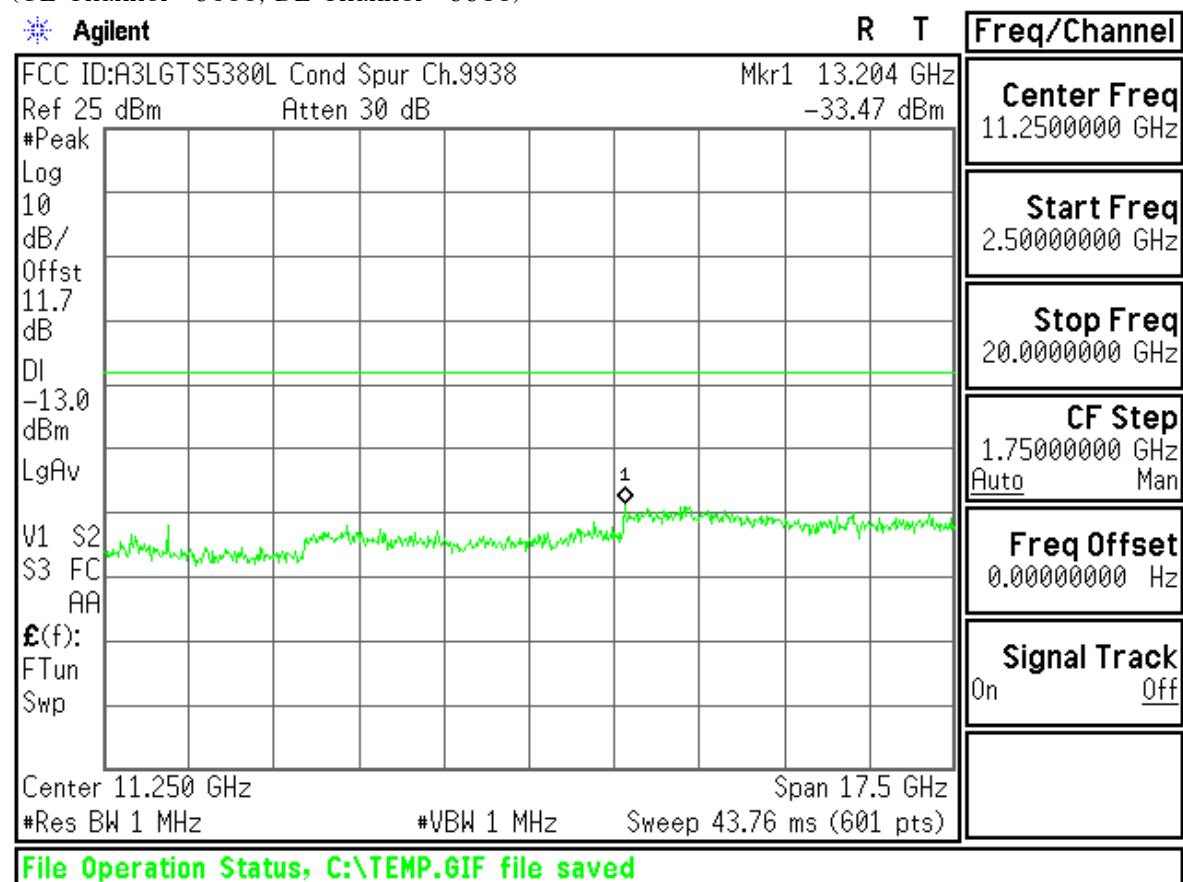


(UL Channel : 9262, DL Channel : 9662)

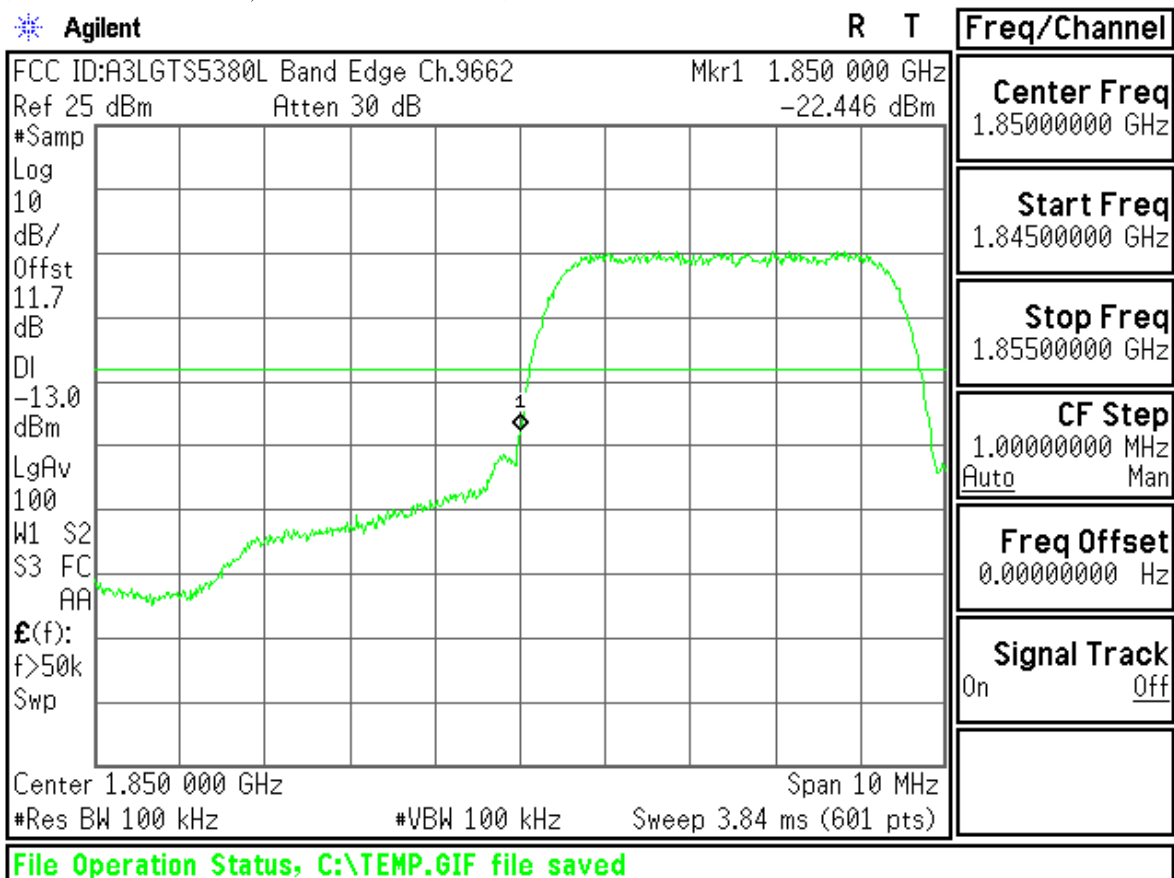

(UL Channel : 9538, DL Channel : 9938)

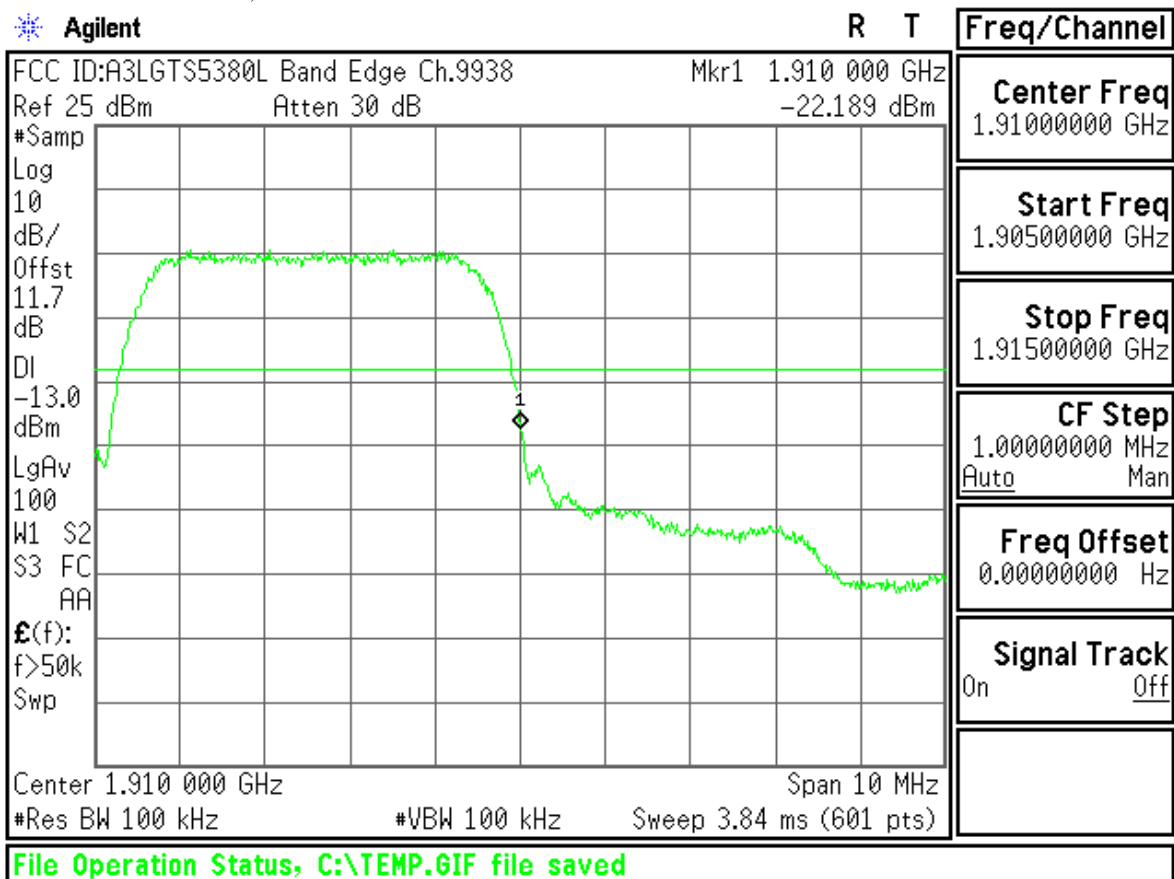

(UL Channel : 9262, DL Channel : 9662)

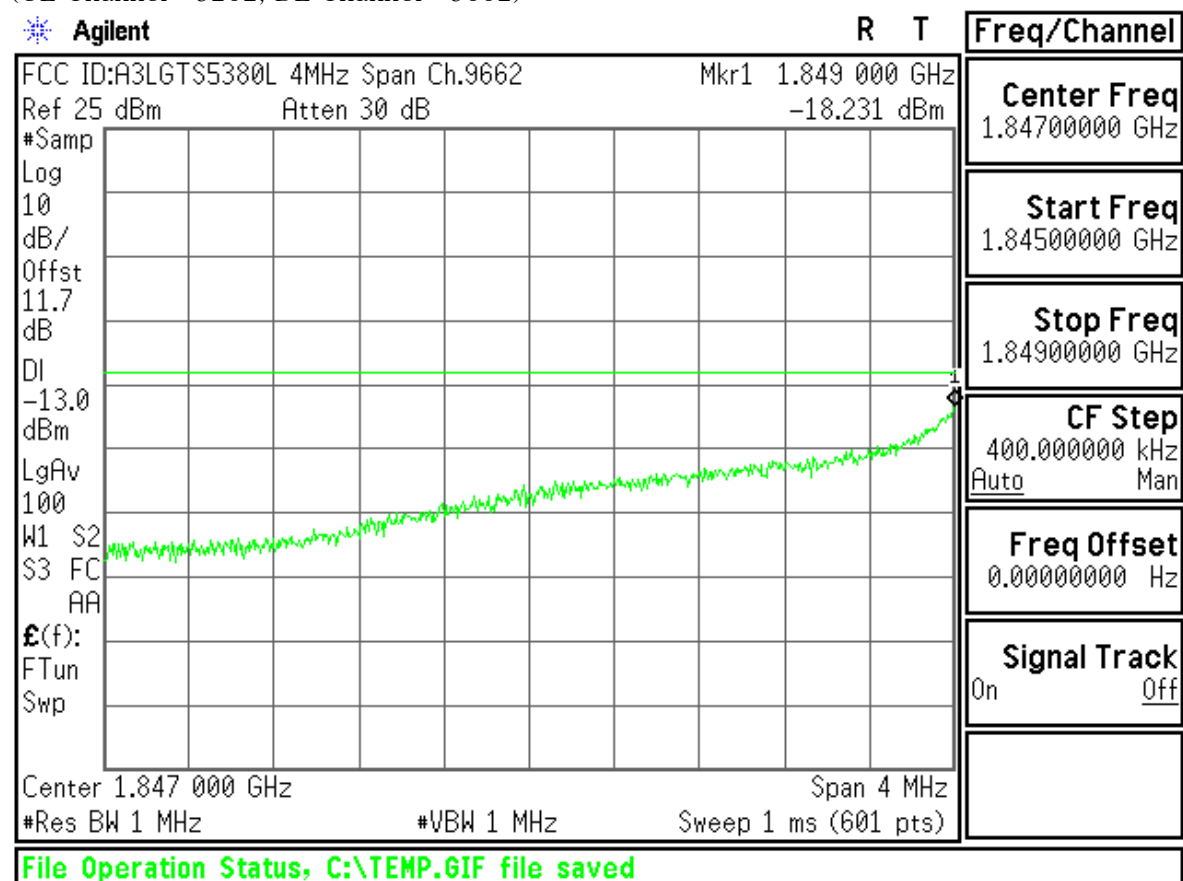

(UL Channel : 9538, DL Channel : 9938)

