



TEST REPORT

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR20-SRF0010-A Page (1) of (34)	
1. Client - Name : Samsung Electronics Co., Ltd. - Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea - Date of Receipt : 2019-12-09 2. Use of Report : Class II Permissive change 3. Name of Product and Model : Sound bar / HW-T420 4. Manufacturer and Country of Origin : Samsung Electronics Co., Ltd. / China 5. FCC ID : A3LHWT450 6. IC Certificate No. : 649E-HWT450 7. Date of Test : 2019-12-20 to 2020-01-06 8. Test Standards : FCC Part 15 Subpart C, 15.247 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 March 2019 9. Test Results : Refer to the test result in the test report		
Affirmation	Tested by Name : Heesu Ahn	Technical Manager Name : Jaehyong Lee
	 (Signature)	 (Signature)
2020-01-22 KCTL Inc. As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.		

Report revision history

Date	Revision	Page No
2020-01-21	Initial report	-
2020-01-22	Updated note#2	7

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.

KCTL

CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Accessory information	4
2.2.	Frequency/channel operations.....	5
3.	Antenna requirement	6
4.	Summary of tests	7
5.	Measurement uncertainty	8
6.	Measurement results explanation example	9
7	Test results	10
7.1.	Maximum peak output power.....	10
7.2.	Radiated spurious emissions & band edge.....	12
7.3.	AC Conducted emission	32
8.	Measurement equipment	34

1. General information

Client : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Manufacturer : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Factory : TCLTechnoly Electronics (Huizhou) Co., Ltd. Zhongkai The Third Factory
 Address : NO.88, North Of Luen Fat Road, Tongqiao Industrial Base, Zhongkai High-techDevelopment Zone, Huizhou City, Guangdong Province, P.R.China
 Laboratory : KCTL Inc.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
 Industry Canada Registration No. : 8035A
 KOLAS No.: KT231

2. Device information

Equipment under test : Sound bar
 Model : HW-T420
 Frequency range : 2 402 MHz ~ 2 480 MHz
 Modulation technique : GFSK, $\pi/4$ DQPSK, 8DPSK
 Number of channels : 79 ch
 Power source : AC 120 V
 Antenna specification : PCB Antenna
 Antenna gain : 1.48 dBi
 Software version : 13
 Hardware version : D
 Test device serial No. : N/A
 Operation temperature : -20 °C ~ 70 °C

2.1. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
Woofer	Samsung Electronics Co.,Ltd.	PS-T4SWT	-	AC 120 V
Remote Controller	Samsung Electronics Co.,Ltd.	AH59-02767A	-	DC 1.5 V

2.2. Frequency/channel operations

This device contains the following capabilities:

Bluetooth(BDR/EDR)

Ch.	Frequency (MHz)
00	2 402
.	.
39	2 441
.	.
78	2 480

Table 2.2.1. Bluetooth(BDR/EDR) mode

15.247 Requirements for Bluetooth transmitter:

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - 1) This system is hopping pseudo-randomly.
 - 2) Each frequency is used equally on the average by each transmitter.
 - 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
 - 4) The receiver shifts frequencies in synchronization with the transmitted signals.
 - 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
 - 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3. Antenna requirement

Requirement of FCC part section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Requirement of RSS-Gen Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

- The transmitter has permanently attached Pattern Antenna (internal antenna) on board.
- The E.U.T Complies with the requirement of §15.203, §15.247.

4. Summary of tests

FCC Part section(s)	IC Rule	Parameter	Test results
15.247(b)(1),(4)	RSS-247, 5.4 (b)	Maximum peak output power	Pass
15.247(a)(1)	RSS-247, 5.1 (b)	Carrier frequency separation	N/T ^(note1)
15.247(a)(1)	RSS-247, 5.1 (a) RSS-Gen, 6.7	20dB channel bandwidth & Occupied bandwidth	N/T ^(note1)
-			
15.247(a)(iii) 15.247(b)(1)	RSS-247, 5.1(d)	Number of hopping channel	N/T ^(note1)
15.247(a) (iii)	RSS-247, 5.1 (d)	Time of occupancy(dwel time)	N/T ^(note1)
15.205(a), 15.209(a)	RSS-247, 5.5 RSS-Gen, 8.9, 8.10	Spurious emission	Pass
15.247(d)		Band-edge, restricted band	Pass
15.207(a)	RSS-Gen 8.8	Conducted Emissions	Pass

Notes: (N/T : Not Tested)

- These test item was performed. (FCC ID: A3LHWT450, IC: 649E-HWT450)
Test Report No. KR20-SRF0007-B issued on January 22, 2020 by KCTL Inc.)
- This model removed the certified SRD modular transmitter(FCC ID:A3LWSM520V, IC: 649E-WSM520V), FFC connector and added sub amplifier and minor part from the original model.
- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
- The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that X orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in X orientation
- The test procedure(s) in this report were performed in accordance as following.
 - ANSI C63.10-2013
 - KDB 558074 D01 v05r02

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty ($\pm$)	
Conducted RF power	1.76 dB	
Conducted spurious emissions	4.03 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz	2.28 dB
	30 MHz ~ 300 MHz	4.98 dB
	300 MHz ~ 1 000 MHz	5.14 dB
	1 GHz ~ 6 GHz	6.70 dB
	Above 6 GHz	6.60 dB
Conducted emissions	9 kHz ~ 150 kHz	3.66 dB
	150 kHz ~ 30 MHz	3.26 dB



6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	16.02	9 000	18.85
50	16.09	10 000	19.48
100	16.30	11 000	20.03
200	16.38	12 000	20.06
300	16.46	13 000	20.07
400	16.51	14 000	19.76
500	16.53	15 000	20.26
600	16.60	16 000	20.03
700	16.62	17 000	19.98
800	16.69	18 000	20.37
900	16.74	19 000	20.54
1 000	17.13	20 000	20.74
2 000	17.31	21 000	21.05
3 000	17.82	22 000	21.55
4 000	17.88	23 000	22.58
5 000	18.11	24 000	21.70
6 000	18.65	25 000	21.80
7 000	18.68	26 000	21.73
8 000	18.30	26 500	21.56

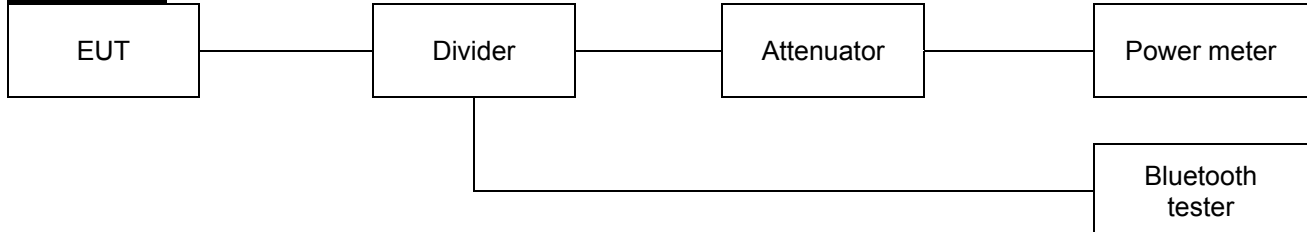
Note.

Offset(dB) = RF cable loss(dB) + Power Divider(dB) + Attenuator (dB)

7 Test results

7.1. Maximum peak output power

Test setup



Limit FCC

According to §15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), for frequency hopping systems operating in the 2 400-2 483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725-5 850 MHz band: 1 watt. For all other frequency hopping systems in the 2 400-2 483.5 MHz band: 0.125 watts.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC

According to RSS-247 5.4(b), for FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels.

The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

Test procedure

ANSI C63.10-2013 - Section 7.8.5

Test settings

The test follows ANSI C63.10-2013 – Section 7.8.5. Using the power sensor instead of a spectrum analyzer.

Notes:

A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.

Test results

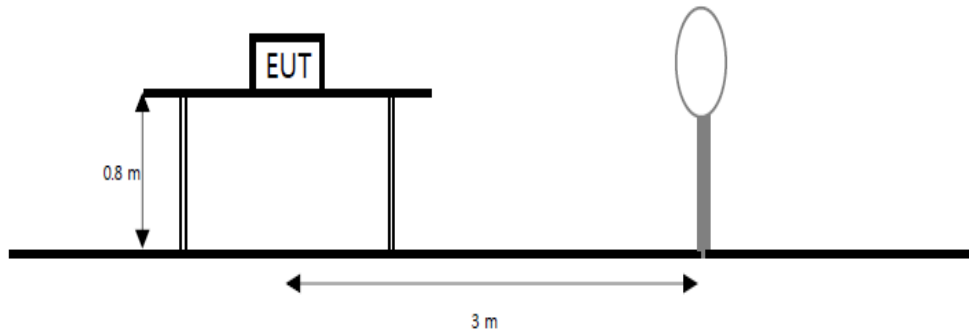
Frequency (MHz)	Data rate (Mbps)	Conducted output power (dBm)		Conducted Power Limit (dBm)	Ant. Gain (dBi)	Max. e.i.r.p. (dB m)		Max. e.i.r.p. Limit (dBm)
		Peak	Average			Peak	Average	
2 402	1	7.17	6.68	20.97	1.48	8.65	8.16	36.00
2 441	1	7.24	6.78			8.72	8.26	
2 480	1	6.35	5.81			7.83	7.29	
2 402	2	7.17	3.69	20.97	1.48	8.65	5.17	36.00
2 441	2	7.28	3.73			8.76	5.21	
2 480	2	6.34	2.67			7.82	4.15	
2 402	3	7.22	3.75	20.97	1.48	8.70	5.23	36.00
2 441	3	7.30	3.72			8.78	5.20	
2 480	3	6.39	2.70			7.87	4.18	



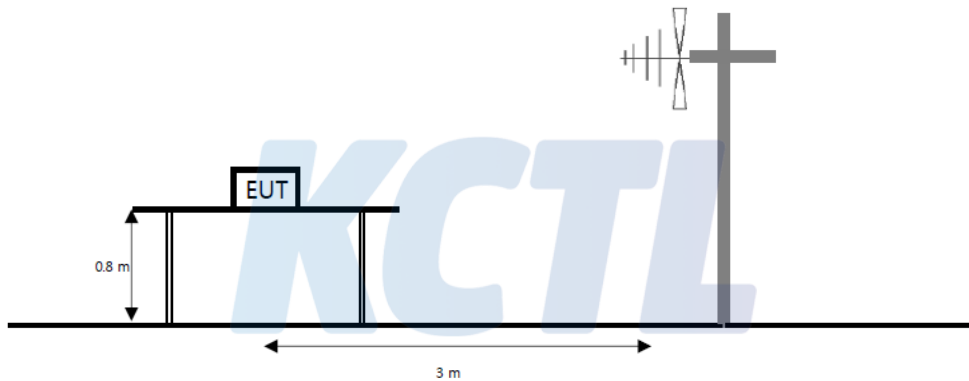
7.2. Radiated spurious emissions & band edge

Test setup

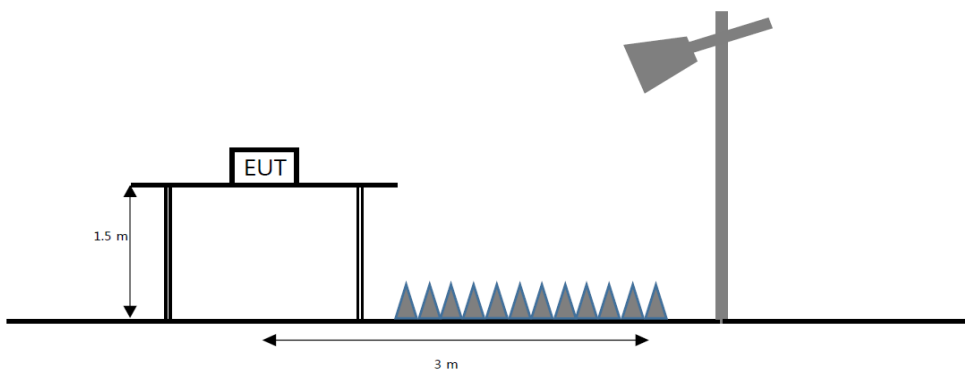
The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions



The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.



The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.



Limit

FCC

According to section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ($\mu V/m$)	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	25	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 - 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

IC

According to RSS-247(5.5), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

According to RSS-Gen(8.9), Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5- General field strength limits at frequencies above 30 MHz

Frequency(MHz)	Field strength ($\mu\text{V/m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 6- General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement distance(m)
9 – 490 kHz ¹⁾	6.37/F (F in kHz)	300
490 – 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

According to RSS-Gen(8.10), Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:

- The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD).
- Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.
- Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

Table 7- Restricted frequency bands*

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138	--	

* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

Test procedure

ANSI C63.10-2013 - Section 6.6.4.3

Test settings**Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW $\geq$ (3 $\times$ RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

Average field strength measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = $1/T \geq 1$ Hz
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times(1/duty cycle) traces

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz ($\geq 1/T$) for Average detection (AV) at frequency above 1 GHz. (where T = pulse width)
2. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40\log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20\log(D_m/D_s)$

Where:

 F_d = Distance factor in dB D_m = Measurement distance in meters D_s = Specification distance in meters

3. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
4. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
5. Average test would be performed if the peak result were greater than the average limit.
6. ¹⁾ means restricted band.
7. According to part 15.31(f)(2), an extrapolation factor of 40 dB/decade is applied because measured distance of radiated emission is 3 m.

Duty cycle correction factor calculation:

According to 7.5 Procedure for determining the average value of pulsed emissions

Duty Cycle Correction Factor Calculation

- Worst case : AFH mode
- Channel hop rate = 800 hops/second
- Hopping rate for DH5 mode = 800 hops/second / 5 (6 slots for DH5) = 133.33 hops/second
- Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.50 \text{ ms}$
- Time to cycle through all channels = $7.50 \times 20 \text{ channels(AFH mode)} = 150 \text{ ms}$
- Number of times transmitter hits on one channel = $100 \text{ ms} / \text{Time to cycle through all channels (ms)}$
 $= 100 \text{ ms} / 150 \text{ ms} = 1 \text{ time}$
- Worst case Dwell time = 7.5 ms
- Duty Cycle Correction Factor = $20\log(7.5 \text{ ms}/100 \text{ ms}) = -22.5 \text{ dB}$

KCTL

KCTL Inc.

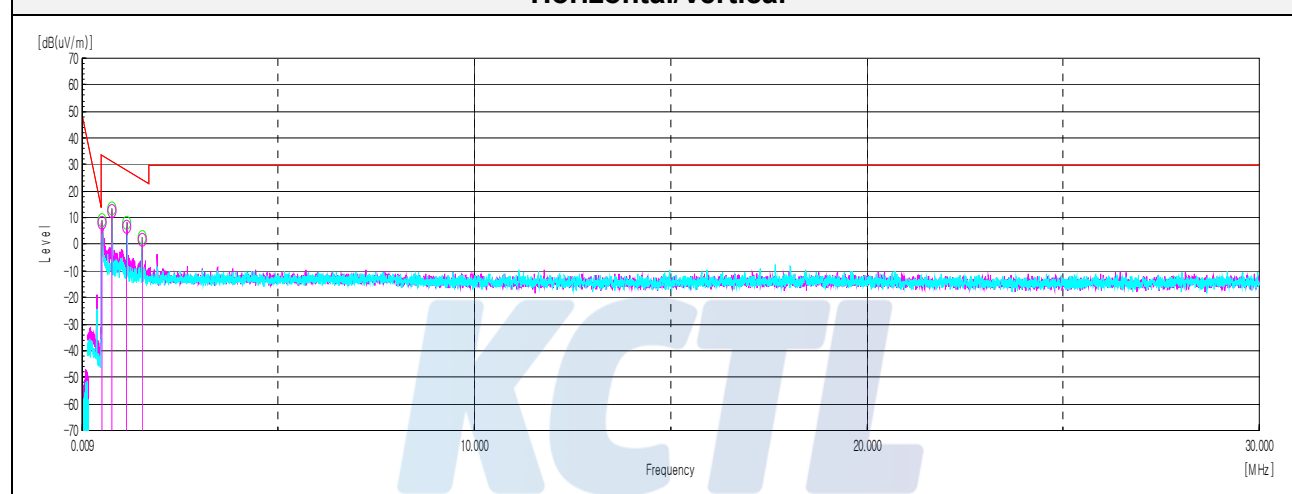
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0010-A

Page (18) of (34)

KCTL**Test results (Below 30 MHz) – Worst case: GFSK Middle frequency**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	Distance Factor	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Quasi peak data								
0.51	H	60.10	20.00	-32.04	40.00	8.06	33.60	25.54
0.77	H	64.30	20.00	-31.97	40.00	12.33	31.30	18.97
1.15	H	58.70	20.01	-31.94	40.00	6.77	27.90	21.13
1.53	H	53.50	20.03	-31.92	40.00	1.61	24.50	22.89

Horizontal/Vertical

KCTL Inc.

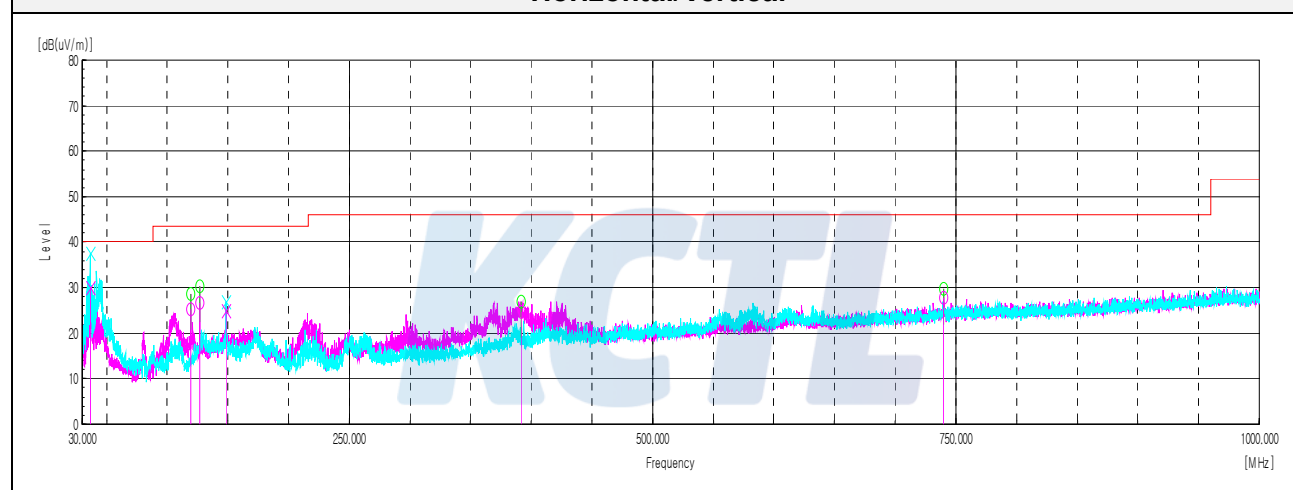
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0010-A

Page (19) of (34)

KCTL**Test results (Below 1 000 MHz) – Worst case: GFSK Middle frequency**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Quasi peak data								
36.67	V	42.90	17.73	-30.52	-	30.11	40.00	9.89
119.60	H	37.30	17.17	-29.09	-	25.38	43.50	18.12
126.76	H	38.20	17.64	-29.00	-	26.84	43.50	16.66
148.46	V	34.70	19.17	-28.81	-	25.06	43.50	18.44
391.45	H	30.30	21.53	-27.14	-	24.69	46.00	21.31
740.16	H	25.10	27.80	-25.16	-	27.74	46.00	18.26

Horizontal/Vertical

KCTL Inc.

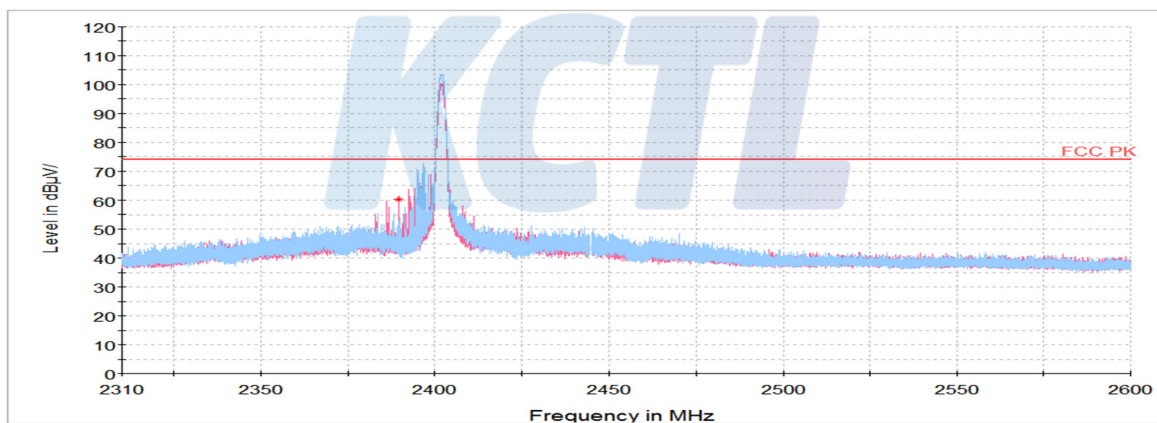
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

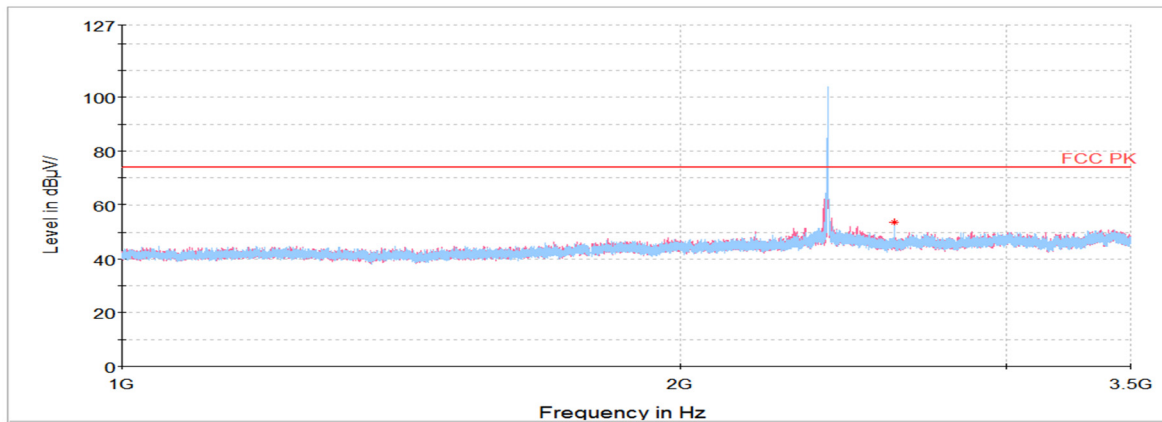
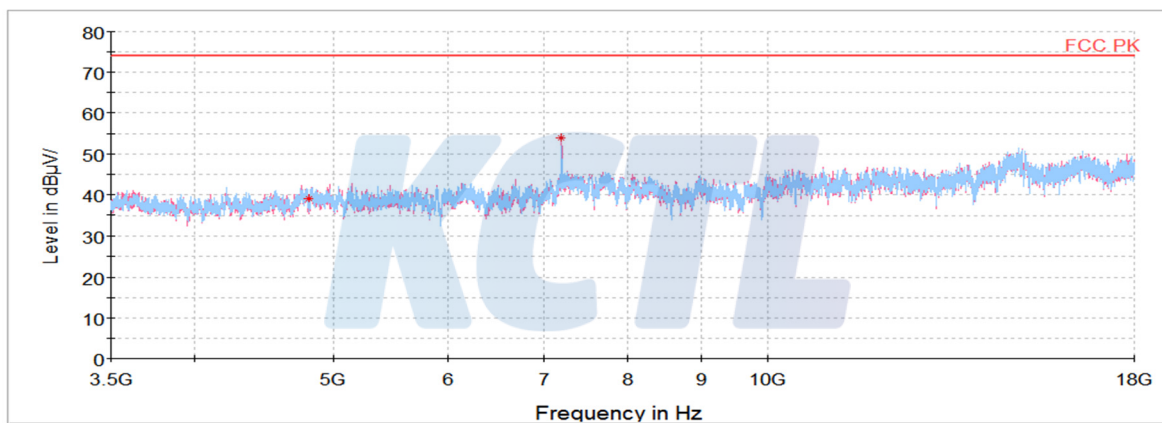
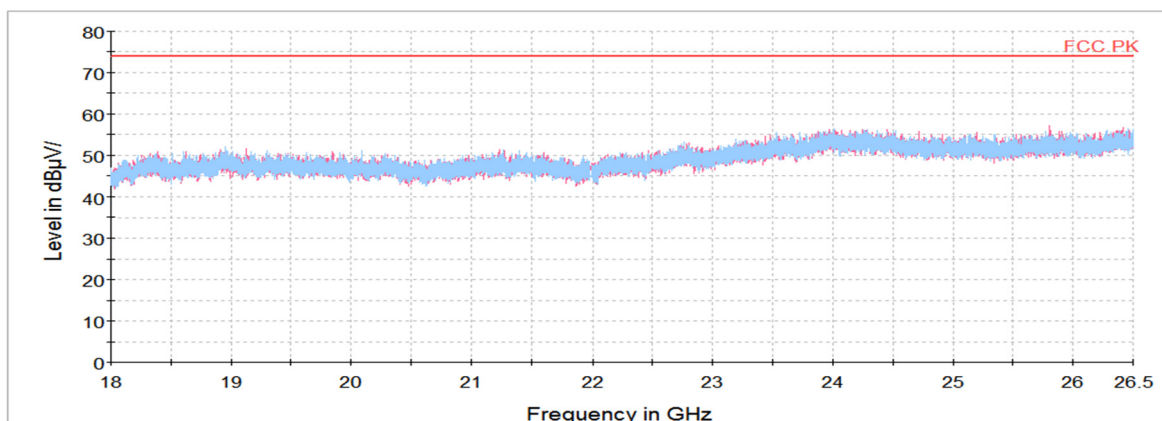
Report No.:
KR20-SRF0010-A

Page (20) of (34)

KCTL**Test results (Above 1 000 MHz)****GFSK****Low Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
2 389.80 ¹⁾	V	57.21	31.88	-29.04	-	60.05	74.00	13.95
2 610.23	H	70.25	32.19	-48.76	-	53.68	74.00	20.32
4 804.55 ¹⁾	H	57.29	33.92	-52.29	-	38.92	74.00	35.08
7 206.11	V	70.54	35.40	-52.02	-	53.92	74.00	20.08
Average Data								
2 389.80 ¹⁾	V	57.21	31.88	-29.04	-22.50	37.55	54.00	16.45

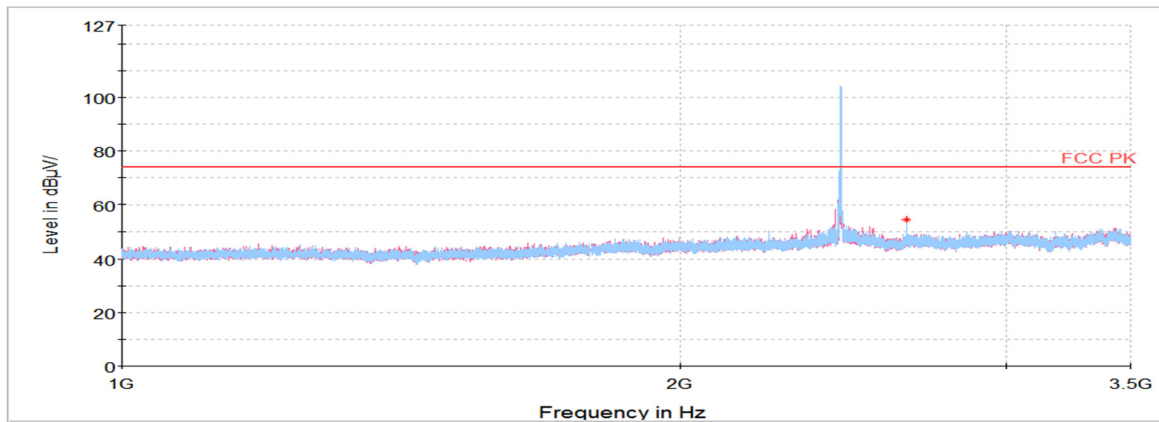
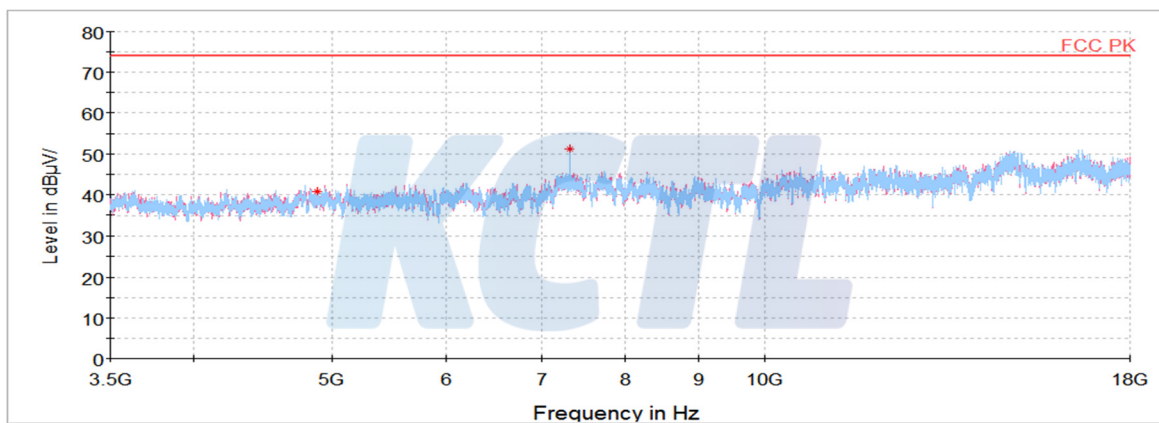
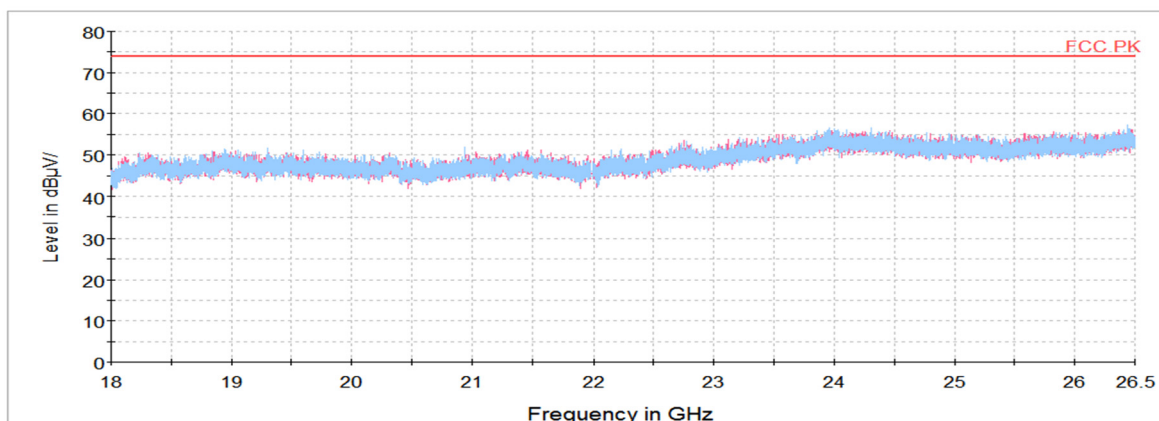
Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
2 649.06	H	70.77	32.22	-48.34	-	54.65	74.00	19.35
4 882.03 ¹⁾	V	61.35	33.95	-54.43	-	40.87	74.00	33.13
7 323.47 ¹⁾	V	67.25	35.40	-51.44	-	51.21	74.00	22.79
Average Data								
7 323.47 ¹⁾	V	67.25	35.40	-51.44	-22.50	28.71	54.00	25.29



Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

KCTL Inc.

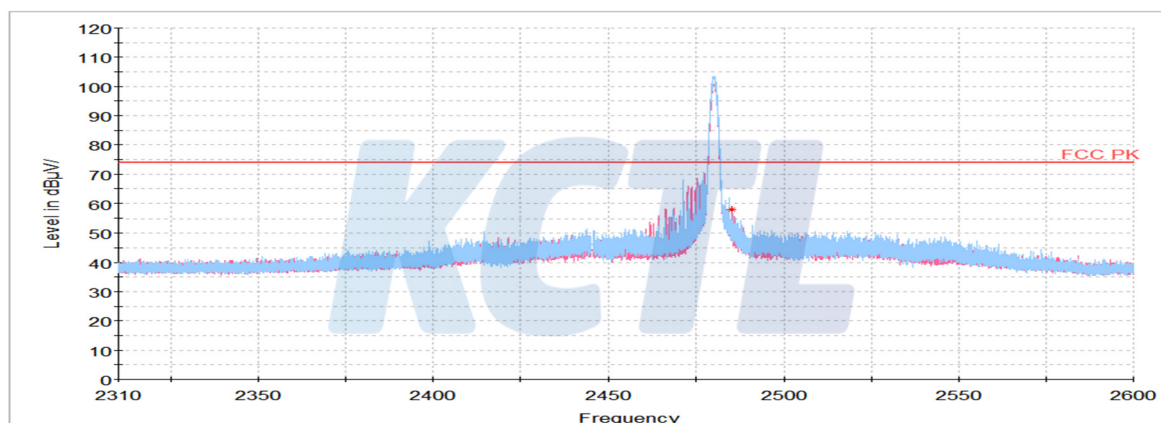
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

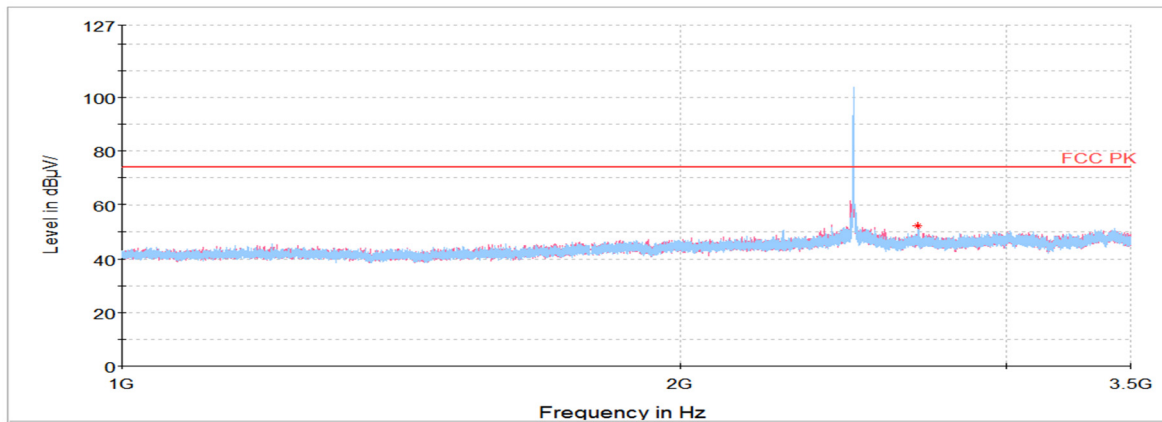
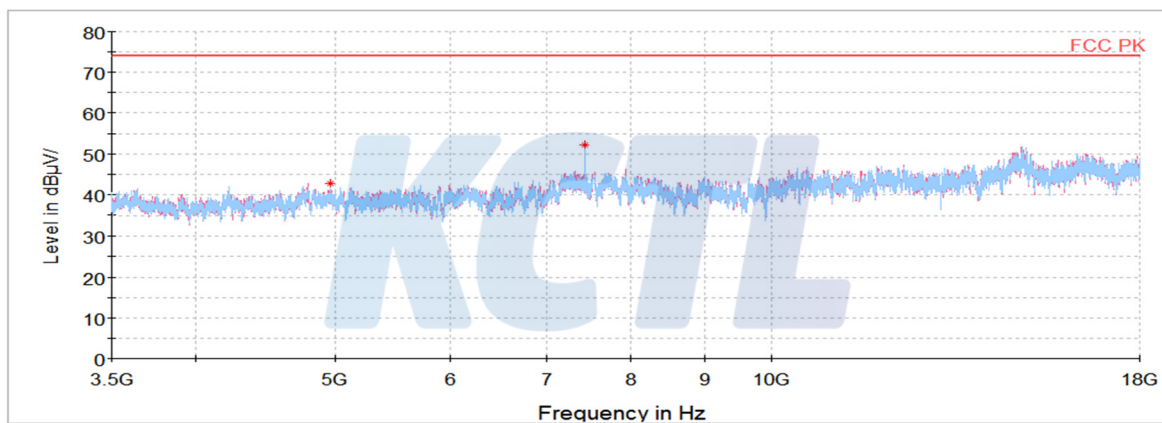
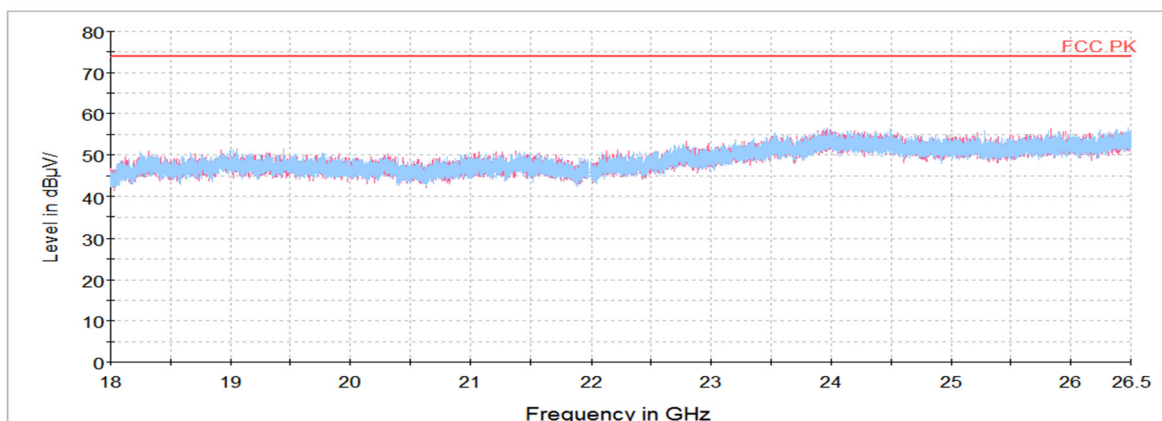
Report No.:
KR20-SRF0010-A

Page (24) of (34)

KCTL**High Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 485.11 ¹⁾	V	54.96	32.07	-29.22	-	57.81	74.00	16.19
2 687.66	H	68.01	32.25	-47.92	-	52.34	74.00	21.66
4 959.97 ¹⁾	H	63.49	33.98	-54.80	-	42.67	74.00	31.33
7 440.38 ¹⁾	H	67.73	35.40	-50.86	-	52.27	74.00	21.73
Average Data								
2 485.11 ¹⁾	V	54.96	32.07	-29.22	-22.50	35.31	54.00	18.69
7 440.38 ¹⁾	H	67.73	35.40	-50.86	-22.50	29.77	54.00	24.23

Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

KCTL Inc.

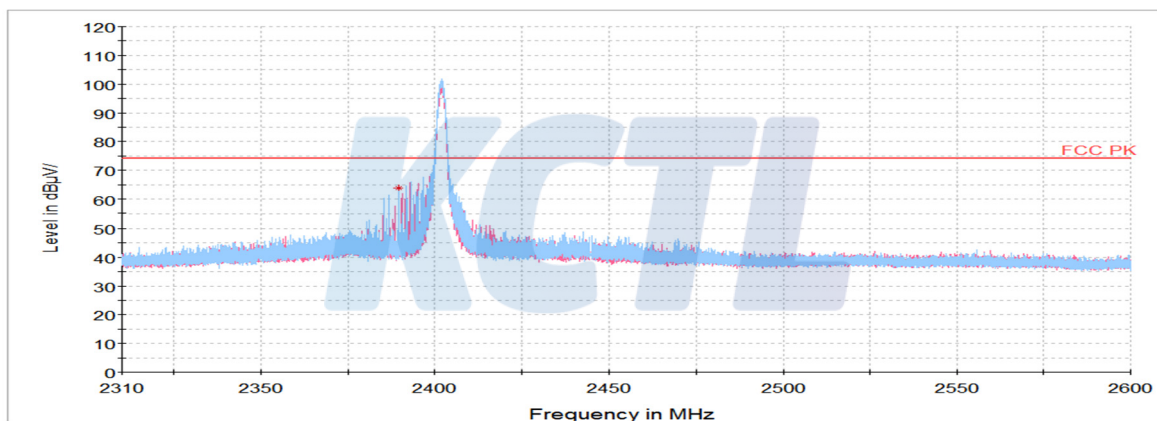
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

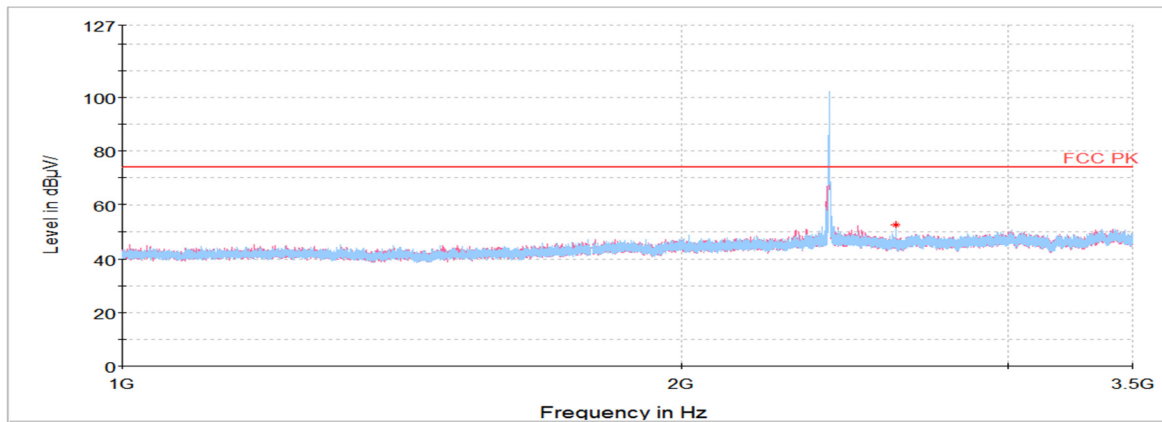
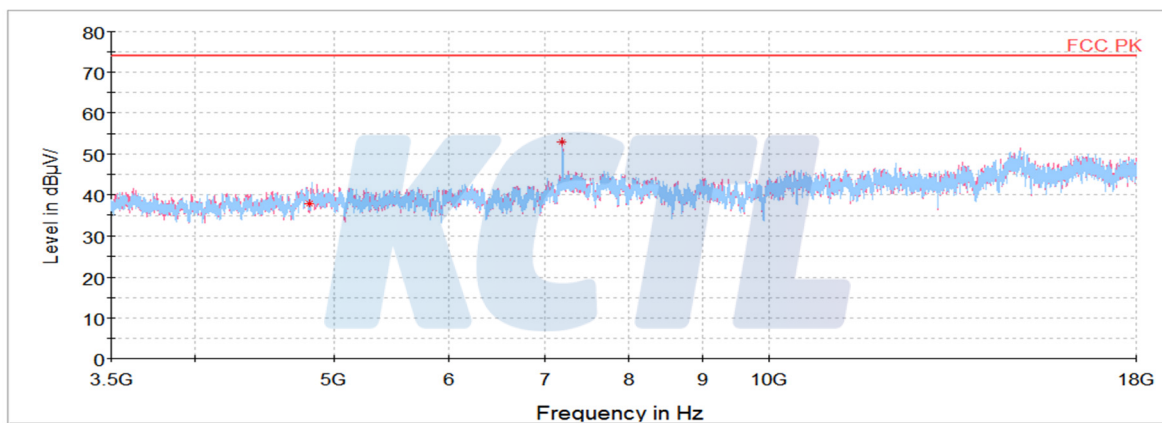
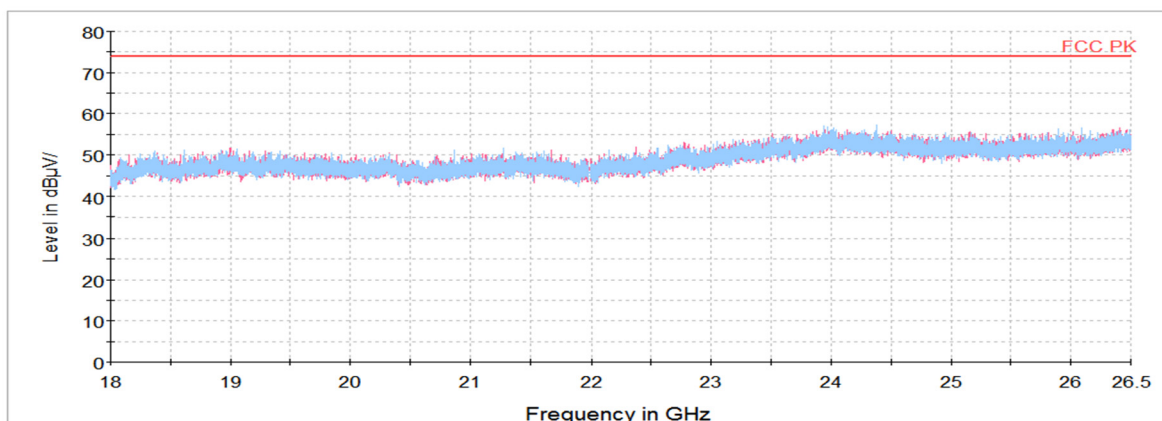
Report No.:
KR20-SRF0010-A

Page (26) of (34)

KCTL**8DPSK****Low Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 389.82 ¹⁾	H	60.88	31.88	-29.04	-	63.72	74.00	10.28
2 610.39	H	69.39	32.19	-48.76	-	52.82	74.00	21.18
4 804.55 ¹⁾	H	56.06	33.92	-52.29	-	37.69	74.00	36.31
7 206.11	V	69.45	35.40	-52.02	-	52.83	74.00	21.17
Average Data								
2 389.82 ¹⁾	H	60.88	31.88	-29.04	-22.50	41.22	54.00	12.78

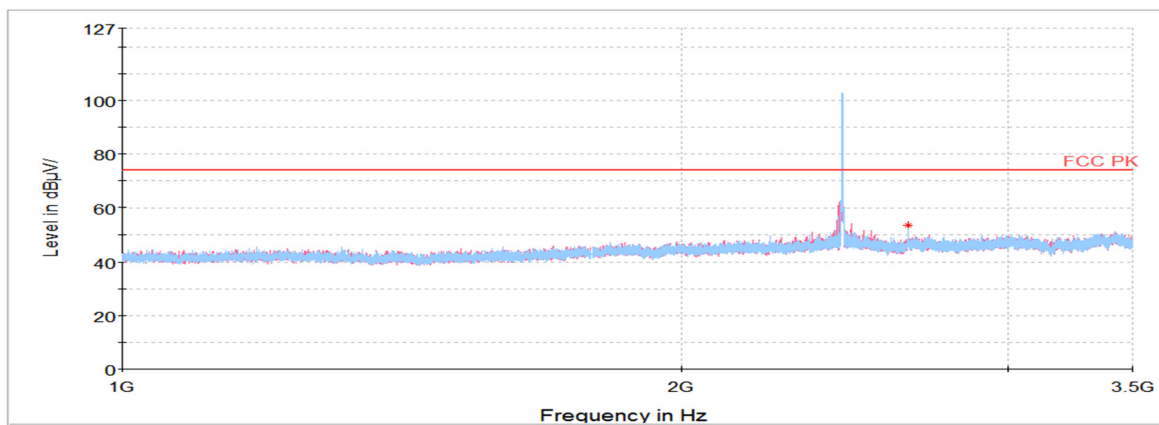
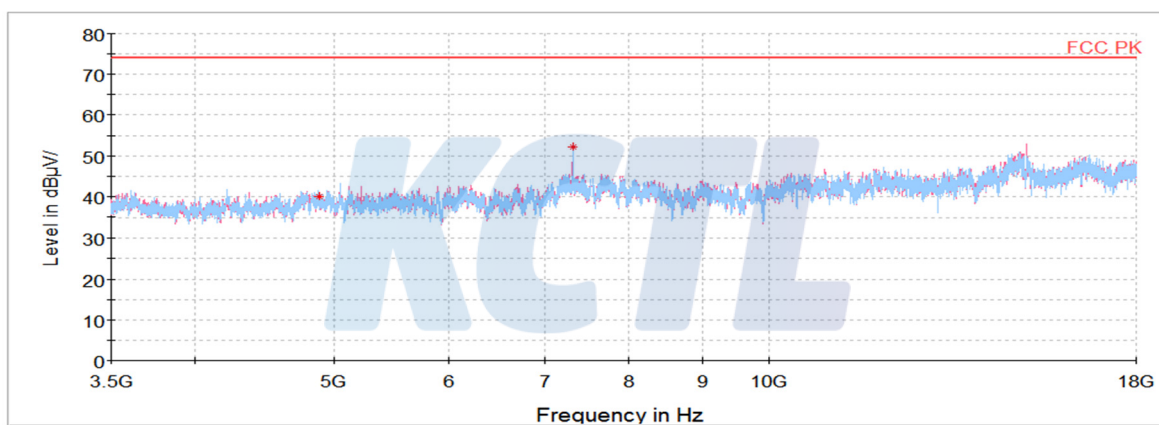
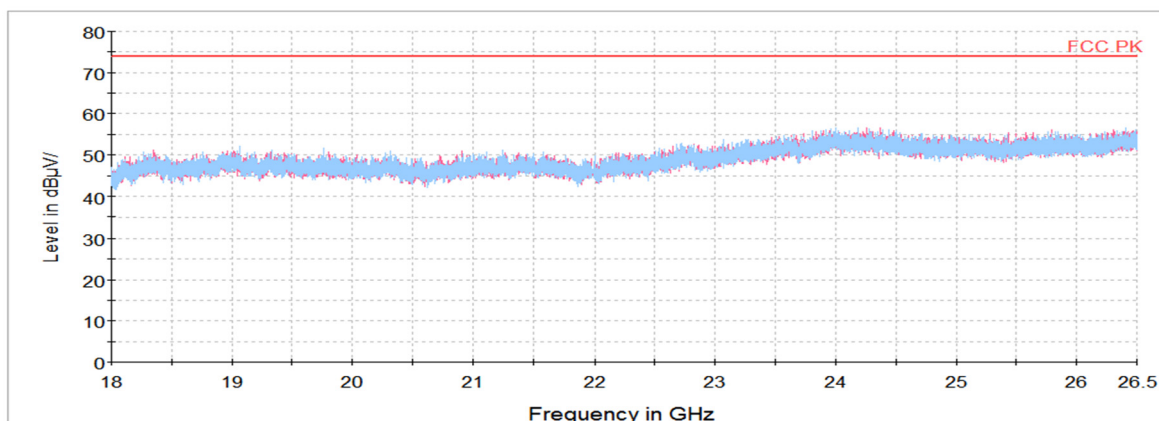
Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
2 649.30	H	69.67	32.22	-48.34	-	53.55	74.00	20.45
4 882.03 ¹⁾	V	60.36	33.95	-54.43	-	39.88	74.00	34.12
7 322.56 ¹⁾	V	68.23	35.40	-51.44	-	52.19	74.00	21.81
Average Data								
7 322.56 ¹⁾	V	68.23	35.40	-51.44	-22.50	29.69	54.00	24.31



Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

KCTL Inc.

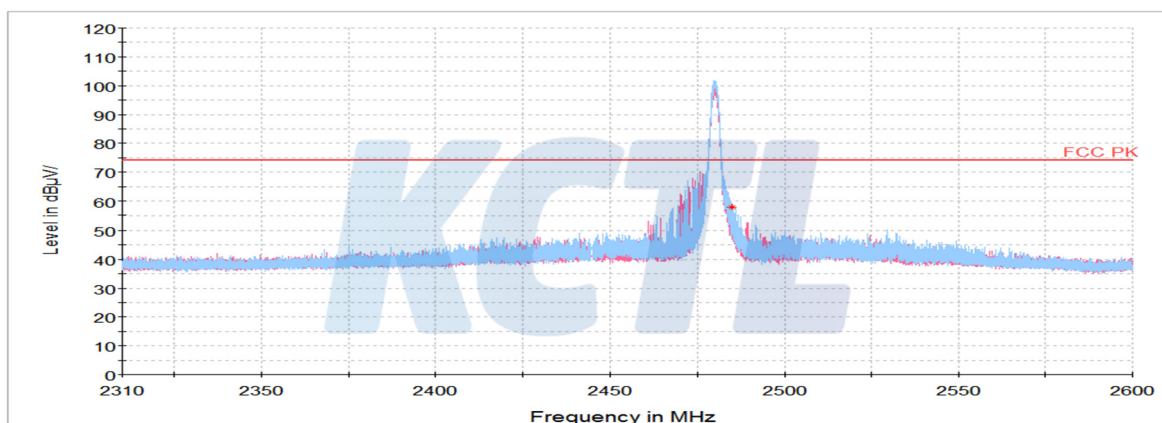
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

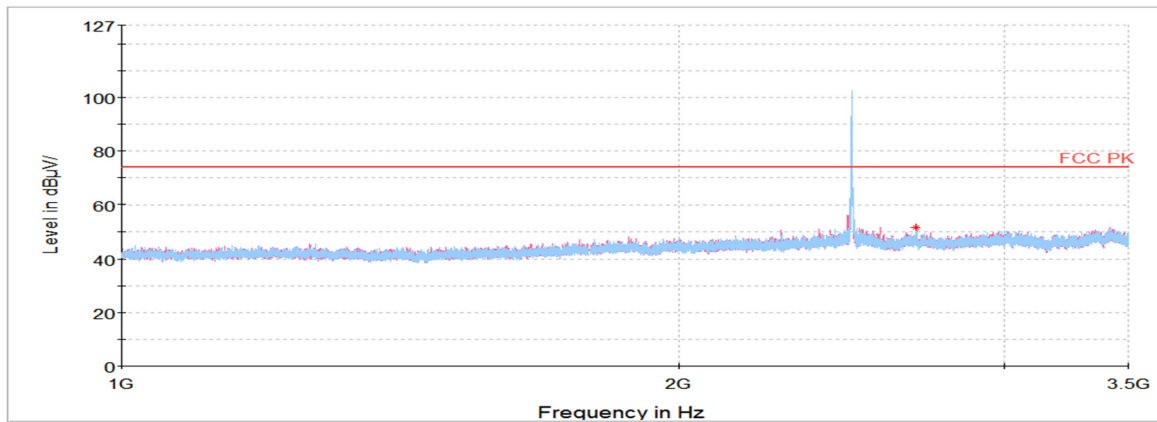
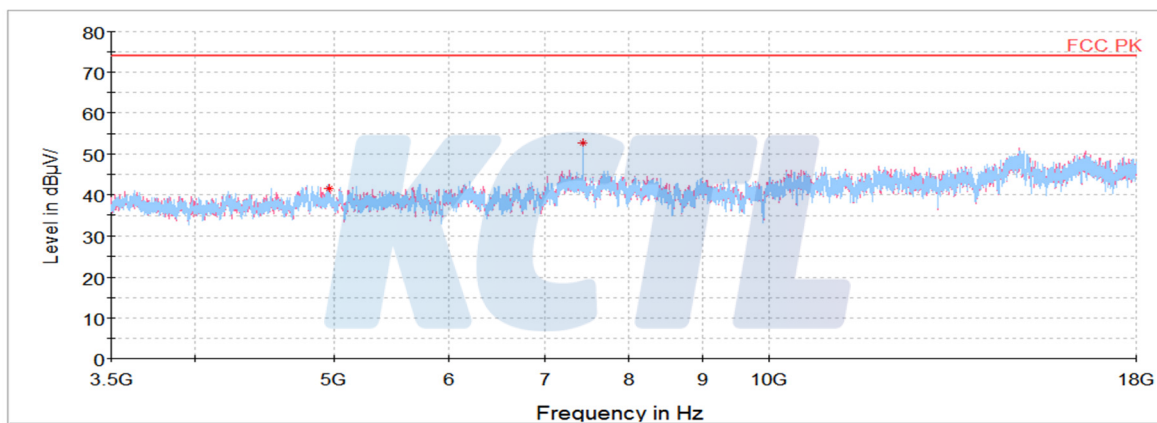
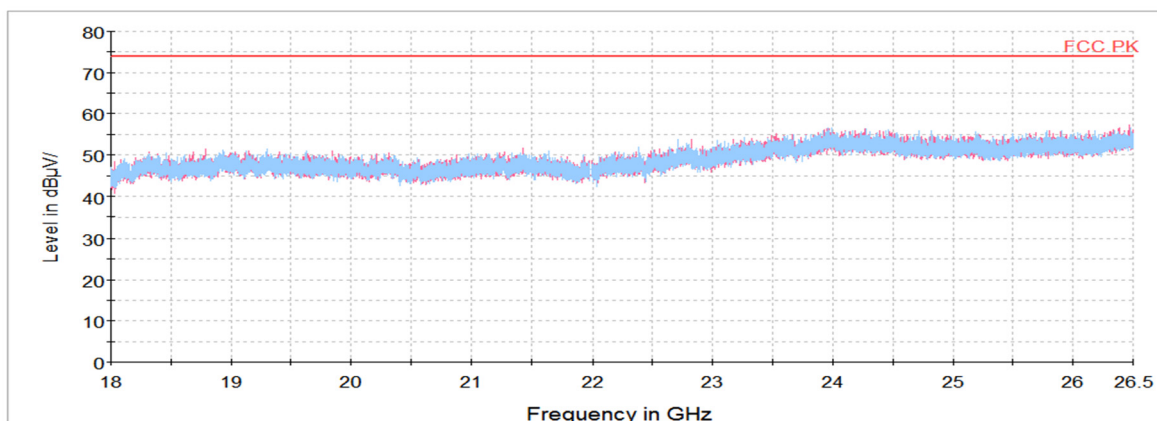
Report No.:
KR20-SRF0010-A

Page (30) of (34)

KCTL**High Channel**

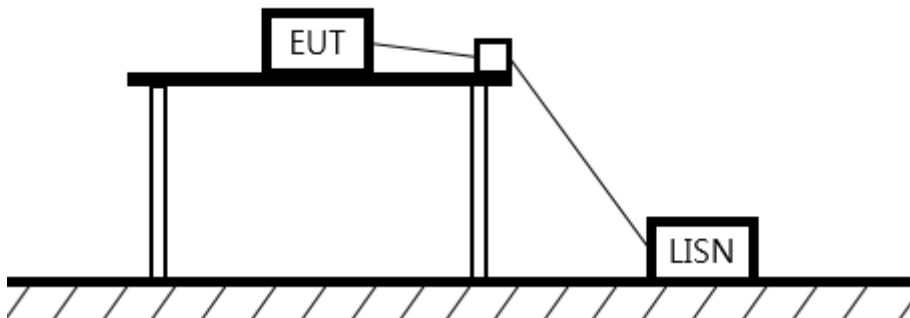
Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 484.97 ¹⁾	V	54.86	32.07	-29.22	-	57.71	74.00	16.29
2 688.13	H	67.58	32.25	-47.92	-	51.91	74.00	22.09
4 960.42 ¹⁾	V	62.43	33.98	-54.80	-	41.61	74.00	32.39
7 439.02 ¹⁾	V	68.16	35.40	-50.87	-	52.69	74.00	21.31
Average Data								
2 484.97 ¹⁾	V	54.86	32.07	-29.22	-22.50	35.21	54.00	18.79
7 439.02 ¹⁾	V	68.16	35.40	-50.87	-22.50	30.19	54.00	23.81

Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

7.3. AC Conducted emission

Test setup



Limit

According to 15.207(a), RSS-Gen 8.8 for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

KCTL Inc.

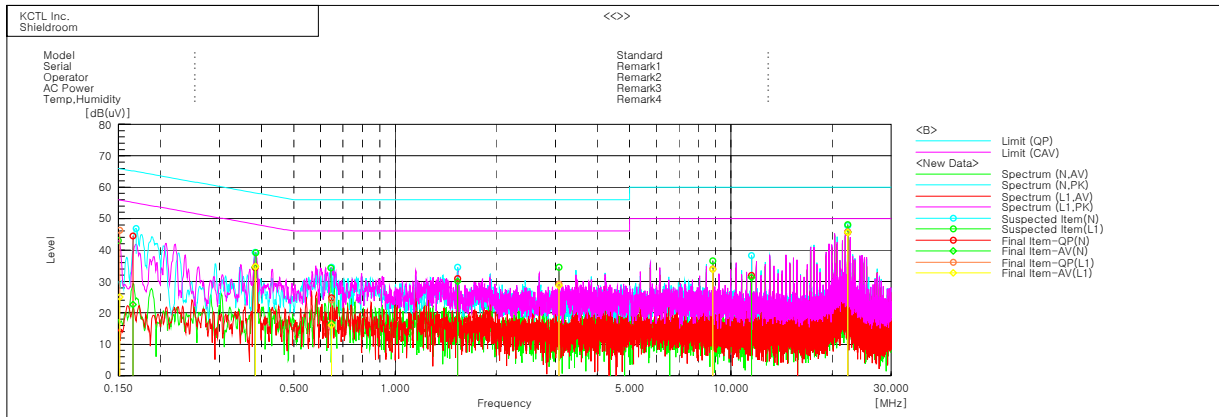
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0010-A

Page (33) of (34)

KCTL

Test results



Final Result

--- N Phase ---									
No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	QP CAV
1	0.16584	34.5	12.7	10.0	44.5	22.7	65.2	55.2	20.7 32.5
2	0.38306	24.5	24.6	9.9	34.4	34.5	58.2	48.2	23.8 13.7
3	0.64629	14.9	6.8	9.9	24.8	16.7	56.0	46.0	31.2 29.3
4	1.53602	21.2	20.2	9.7	30.9	29.9	56.0	46.0	25.1 16.1
5	11.52134	22.0	21.4	9.9	31.9	31.3	60.0	50.0	28.1 18.7
6	22.27355	35.6	35.6	10.1	45.7	45.7	60.0	50.0	14.3 4.3

--- L1 Phase ---									
No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	QP CAV
1	0.15146	36.4	15.3	9.8	46.2	25.1	65.9	55.9	19.7 30.8
2	0.38392	24.8	24.9	9.9	34.7	34.8	58.2	48.2	23.5 13.4
3	0.64769	14.2	6.2	9.9	24.1	16.1	56.0	46.0	31.9 29.9
4	3.07238	19.5	18.9	9.7	29.2	28.6	56.0	46.0	26.8 17.4
5	8.83068	24.0	23.9	9.9	33.9	33.8	60.0	50.0	26.1 16.2
6	22.27354	35.6	35.5	10.1	45.7	45.6	60.0	50.0	14.3 4.4

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV30	100806	20.07.30
Spectrum Analyzer	R&S	FSV40	100988	21.01.03
Bluetooth Tester	TESCOM	TC-3000C	3000C000270	20.07.31
Power Divider	Aeroflex/ Weinschel, Inc	1580-1	SC571	20.08.01
Wideband Power Sensor	R&S	NRP-Z81	102398	20.01.25
ATTENUATOR	R&S	DNF Dämpfungsglied 10 dB in N-50 Ohm	31212	20.05.13
EMI TEST RECEIVER	R&S	ESCI7	100732	20.08.22
Bi-Log Antenna	SCHWARZBECK	VULB 9168	583	20.05.04
Amplifier	SONOMA INSTRUMENT	310N	284608	20.08.22
COAXIAL FIXED ATTENUATOR	Agilent	8491B-003	2708A18758	20.05.04
Horn antenna	ETS.lindgren	3116	00086632	20.02.15
Horn antenna	ETS.lindgren	3117	155787	20.10.24
Attenuator	API Inmet	40AH2W-10	12	20.05.15
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	20.07.30
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800 -22-10P	2031196	20.02.21
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33 -8P	2000997	20.08.01
LOOP Antenna	R&S	HFH2-Z2	100355	20.08.24
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	DT2000	79	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
Highpass Filter	WT	WT-A1698-HS	WT160411001	20.05.14
Vector Signal Generator	R&S	SMBV100A	257566	20.07.06
Signal Generator	R&S	SMR40	100007	20.05.13
TWO-LINE V - NETWORK	R&S	ENV216	101584	20.04.05
EMI TEST RECEIVER	R & S	ESCI	101408	20.02.22

End of test report