

EMC TEST REPORT

Project No.	LBE20132094	Issue No.	1
Applicant	Name of organization	Samsung Electronics Co., Ltd.	
	Address	(Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea	
	Date of application	February 15, 2013	
EUT	Type of device	☒ Class B personal computers and peripherals ☐ All other devices	
	Equipment authorization	☐ Declaration of Conformity ☒ Certification ☐ Verification	
	FCC ID	A3LSGHM919	
	Kind of product	Mobile Phone	
	Model No.	SGH-M919	
	Variant Model No.	Refer to clause 4.6	
	Manufacturer	SAMSUNG ELECTRONICS CO., LTD. 94-1, Imsu-dong, Gumi-si, Gyeongsangbuk-do, 730-722, Republic of Korea TIANJIN SAMSUNG TELECOM TECHNOLOGY CO., LTD. 300385 No.9, WeiWu Rd., Micro Electronic Industrial Park, Xiqing Dist, Tianjin, China	
Applied Standards		FCC Part 15, Subpart B, Class B / ANSI C63.4-2003	
Test Period		February 18, 2013 ~ February 19, 2013	
Issue date		March 29, 2013	

Test result : Complied

The equipment under test has found to be compliant with the applied standards.
 (Refer to the attached test result for more detail.)

Tested by : Jong-Sup Jeong



Reviewed by : Tae-Young Jang



The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from CS & Environment center.



(Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea
 Tel: 82 31 279 1750, Fax: 82 31 279 1745

Table of contents

1. Report Information

1.1 Revision history	3
----------------------------	---

2. Summary of test results

2.1 Emission	3
--------------------	---

3. General Information

3.1 Test facility	3
-------------------------	---

4. Test Configuration

4.1 Test Peripherals	4
4.2 EUT operating mode	4
4.3 Details of Sampling	4
4.4 Used cable description	5
4.5 Test arrangement	5
4.6 EUT Description	6
4.7 Clock Frequencies	6
4.8 Test configuration and condition	7
4.9 Measurement uncertainty	7

5. Result of individual tests

5.1 Conducted disturbance	8
5.2 Radiated disturbance	10

1. Report Information

1.1 Revision history

No.	Revised detailed information
Issue 0	- LBE20131044 (SAMSUNG)
Issue 1	- LBE20132094 (SAMSUNG), Correction of the EUT description

2. Summary of test results

1.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result
☒	Conducted Disturbance (Mains port)	FCC Part 15 Subpart B / ANSI C63.4-2003 (Class B)	Complied
☒	Radiated Disturbance		Complied

3. General Information

3.1 Test facility

The CS & Environment center is located on Samsung Electronics Co., Ltd. at (Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea.

All testing are performed in Semi-anechoic chambers conforming to the site attenuation characteristics defined by ANSI C63.4, CISPR 22, 16-1 and 16-2. and Shielded rooms.

The CS & Environment center is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

4. Test Setup configuration

4.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Mark	Description	Model No.	Serial No.	Manufacturer / Trademark	FCC ID / DoC
A	Mobile Phone	SGH-M919	-	SAMSUNG	A3LSGHM919
B	Battery	B600BU	AAaD201sS/2-B	SAMSUNG	-
C	Headset	EO-HS3303WE	-	SAMSUNG	-
D	Data Cable	ECB-DU4EWE	-	SAMSUNG	-
E	HDMI Adapter	ET-H10FAUWE	RT1D122AS E	SAMSUNG	-
F	Ferrite Core	ZCAT1325-0530	-	TDK	-
G	microSD Card	16GB	-	SANDISK	-
H	Travel Adapter	ETA-U90JWE	RT1D128RS/B-E	SAMSUNG	-
I	Desk-Top Computer	HP Compaq dx2200 Microtower	CNG7060LW0	HP	DoC
J	LCD TV Monitor	CF19MS	CF19H1LS700048Y	SAMSUNG	DoC
K	Mouse	N3+Optical	K034729902	HP	DoC
L	Keyboard	SDM8500P	8M000131	SAMSUNG	DoC
M	Gigabit Switch 8	3CGSU08	AB/9XRQAC0024825	3COM	DoC
N	Power Supply	PW150	KA1203N03	AULT	DoC

4.2 EUT operating mode

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

Operating Mode 1	USB Mode (Data Communication)
-------------------------	-------------------------------

4.3 Details of Sampling

Customer selected, single unit.

The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected:

No.	Connected cable	Length [m]	Shielded [Y/N]	Note
1	Data Cable / Travel Adapter	1.5	Yes	From EUT to Desk-Top Computer, From Travel Adapter to HDMI Adapter
2	Headset	1.3	No	For EUT
3	Power	1.8	No	For Desk-Top Computer
4	Power	1.8	No	For LCD TV Monitor
5	Power	1.8	No	From Gigabit Switch 8 to Power Supply
6	Power	1.8	No	For Power Supply
7	LAN	1.5	No	From Desk-Top Computer to Gigabit Switch 8
8	LAN	1.5	No	From Gigabit Switch 8 to Local Area Network
9	RGB	1.8	Yes	From Desk-Top Computer to LCD TV Monitor
10	PS/2	1.8	Yes	From Desk-Top Computer to Mouse
11	PS/2	1.8	Yes	From Desk-Top Computer to Keyboard
12	MHL	0.1	Yes	From EUT to HDMI Cable
13	HDMI	1.5	Yes	From HDMI Adapter to LCD TV Monitor

A diagram of a computer system with the following components and connections:

- Computer Case (I):** The central unit.
- Monitor (J):** Connected to the case via cable 9.
- Mouse (K):** Connected to the case via cable 10.
- Keyboard (L):** Connected to the case via cable 11.
- Router (M):** Connected to the case via cable 7.
- Modem (N):** Connected to the router via cable 5.
- Phone (D):** Connected to the case via cable 1.
- Headset (C):** Connected to the phone via cable 2.
- External Drive (A/B/G):** Connected to the phone via cable 3.
- Printer (P):** Connected to the router via cable 4.
- Network Cable (6):** Connected to the modem.

4.6 EUT Description

4.6.1 The following features describe EUT represented by this report:

Item	Specification	
Frequency Range	GSM850	TX : 824.2 ~ 848.8 MHz RX : 869.2 ~ 893.8 MHz
	GSM1900	TX : 1 850.2 ~ 1 909.8 MHz RX : 1 930.2 ~ 1 989.8 MHz
	WCDMA FDD2	TX : 1 852.4 ~ 1 907.6 MHz RX : 1 932.4 ~ 1 987.6 MHz
	WCDMA FDD4	TX : 1 712.4 ~ 1 752.6 MHz RX : 2 112.4 ~ 2 152.6 MHz
	WCDMA FDD5	TX : 826.4 ~ 846.6 MHz RX : 871.4 ~ 891.6 MHz
	LTE FDD2	TX : 1 852.5 ~ 1 907.5 MHz RX : 1 932.5 ~ 1 987.5 MHz
	LTE FDD4	TX : 1 712.5 ~ 1 752.5 MHz RX : 2 112.5 ~ 2 152.5 MHz
	LTE FDD5	TX : 826.5 ~ 846.5 MHz RX : 871.5 ~ 891.5 MHz
	LTE FDD17	TX : 706.5 ~ 713.5 MHz RX : 736.5 ~ 743.5 MHz
Operating Temperature (℃)	-20 ~ +60	
Operating Humidity (%)	0 ~ 95	

4.6.2 The variant models

- None

4.7 Clock Frequencies

Kind of Clocks	Frequency [MHz]	Kind of Clocks	Frequency [MHz]
CPU	1 890	USB 2.0	24
MHL	74.25		

4.8 Test configuration and condition

- ☐ The EUT exercise program which is the samsung standardized emission test program for windows was used during all EMC measurements were tested. This program was contained on the PC hard disk drive. Once loaded, the program sequentially exercises each system component in turn.
- ☒ The EUT was exercised during the testing by data read and write cycles repeated with internal storage devices. At the end of the test, the copied back data was compared with original.
- ☐ The EUT was connected to the PC by using USB data cable to charge.
- ☒ The system was configured for testing in a typical fashion that a customer would normally use, and was tested while in an automated non-attendant mode.

Power source for the EUT operating was supplied by CVCF made by the Pacific Power Source Corp.

- Test Voltage : AC 120 V, 60 Hz

4.9 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4 and UKAS Lab 34.)

4.9.1 Emission

Test type		Measurement uncertainty (C.L. 95 %, k = 2)
Conducted disturbance	AC Mains	± 3.24 dB
Radiated Disturbance (30 MHz ~ 1 GHz)	Horizontal	± 4.59 dB
	Vertical	± 4.75 dB
Radiated Disturbance (1 GHz ~ 6 GHz)	Horizontal	± 4.18 dB
	Vertical	± 4.15 dB

5. Results of individual test

5.1 Conducted disturbance

The EUT was connected to the Desk-Top Computer which was powered from one LISN for the measurements. The support equipment power cables were connected to a second LISN.

Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

Limits for conducted disturbance at the mains ports of Class B ITE

Frequency range Limits [MHz]	Resolution Bandwidth [kHz]	Limits [dB(μV)]	
		Quasi-peak	Average
0,15 to 0,50	9	66 to 56	56 to 46
0,50 to 5	9	56	46
5 to 30	9	60	50

NOTE 1 The lower limit shall apply at the transition frequency.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.1.1 Test instrumentation


EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E3I-050	LISN	ESH3-Z5	R&S	100263	2012-10-16	12
E3I-259	LISN	ENV216	R&S	101369	2012-12-07	12
E3I-266	EMI Test Receiver	ESCI3	R&S	100086	2012-11-27	12

5.1.2 Temperature and humidity condition

Test date	2013-02-19	Test engineer	Jong-Sup Jeong
Climate condition	Ambient temperature	23.6 °C	Limit (15.0 to 35.0) °C
	Relative humidity	41.0 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	101.2 kPa	Limit (86.0 to 106.0) kPa
Test place	Shield Room (SR8)		

5.1.3 Test results

☐ Operating Mode 1: AC Mains

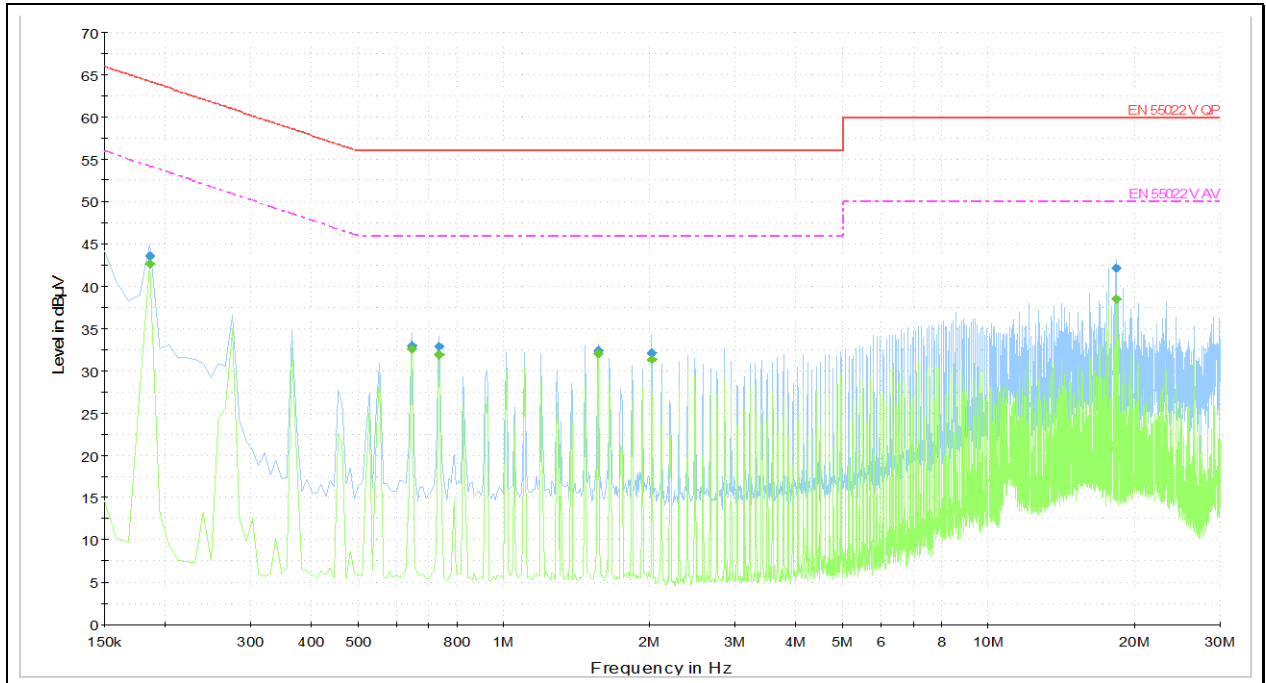

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

Quasi-peak final measurement results table:

Frequency (MHz)	Level (dBμV)	Corr. (dB)	Limit (dBμV)	Margin (dB)	Line
0.186	43.6	10.1	64.2	20.6	N
0.645	32.9	10.0	56.0	23.1	L1
0.735	32.9	9.9	56.0	23.1	L1
1.563	32.4	9.8	56.0	23.6	L1
2.022	32.1	9.7	56.0	23.9	L1
18.303	42.1	10.0	60.0	17.9	N

Average final measurement results table:

Frequency (MHz)	Level (dBμV)	Corr. (dB)	Limit (dBμV)	Margin (dB)	Line
0.186	42.7	10.1	54.2	11.5	N
0.645	32.6	10.0	46.0	13.4	L1
0.735	31.9	9.9	46.0	14.1	L1
1.563	32.0	9.8	46.0	14.0	L1
2.022	31.3	9.7	46.0	14.7	L1
18.366	38.5	10.0	50.0	11.5	N

Note 2) Level (QP and/or AV) = Meter Reading (QP and/or AV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or AV) = Limit – Level (QP and/or AV)

QP = Quasi-Peak, AV = Average

5.2 Radiated disturbance

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin.

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 10 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [kHz]	Video Bandwidth [kHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	120	300	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using quasi-peak detector.

Peak/RMS-Average measurements were made over the changeable frequency range 1 GHz to 40 GHz or 5th harmonics of the highest frequency in accordance with internal maximum operating frequency at a measurement distance of 3 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [MHz]	Video Bandwidth [MHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	1	3	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using peak and rms-average detectors.

Limits for radiated disturbance of Class B ITE at a measuring distance of 3 m and 10 m

Frequency range Limits [MHz]	Field Strength		
	3 m [$\mu\text{V/m}$]	3 m [dB($\mu\text{V/m}$)]	10 m [dB($\mu\text{V/m}$)]
30 to 88	100	40.0	29.5
88 to 216	150	43.5	33.0
216 to 960	200	46.0	35.5
Above 960	500	54.0	43.5

Results checked manually; and points close to the limit line were re-measured.

5.2.1 Test instrumentation

EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E3I-003	BILOG Antenna	CBL6112B	Schaffner	2805	2012-04-19	24
E3I-170	Double-Ridged Waveguide Horn Antenna	HF906	R&S	100028	2012-08-13	24
E3I-190	BILOG Antenna	CBL6112B	Schaffner	2804	2011-06-22	24
E3I-213	Preamplifier	317	Sonoma	282424	2012-11-14	12
E3I-214	Preamplifier	317	Sonoma	282425	2012-11-14	12
E3I-228	EMI Test Receiver	ESU-08	R&S	100084	2012-10-18	12
E3I-233	EMI Test Receiver	ESU-26	R&S	100364	2012-10-26	12


5.2.2 Temperature and humidity condition

Test date	2013-02-18	Test engineer	Jong-Sup Jeong
Climate condition	Ambient temperature	23.8 °C	Limit (15.0 to 35.0) °C
	Relative humidity	39.0 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	100.8 kPa	Limit (86.0 to 106.0) kPa
Test place	Semi-Anechoic Chamber (SAC4)		

5.2.3 Test results

□ Operating Mode 1

- Frequency range: 30 ~ 1 000 MHz

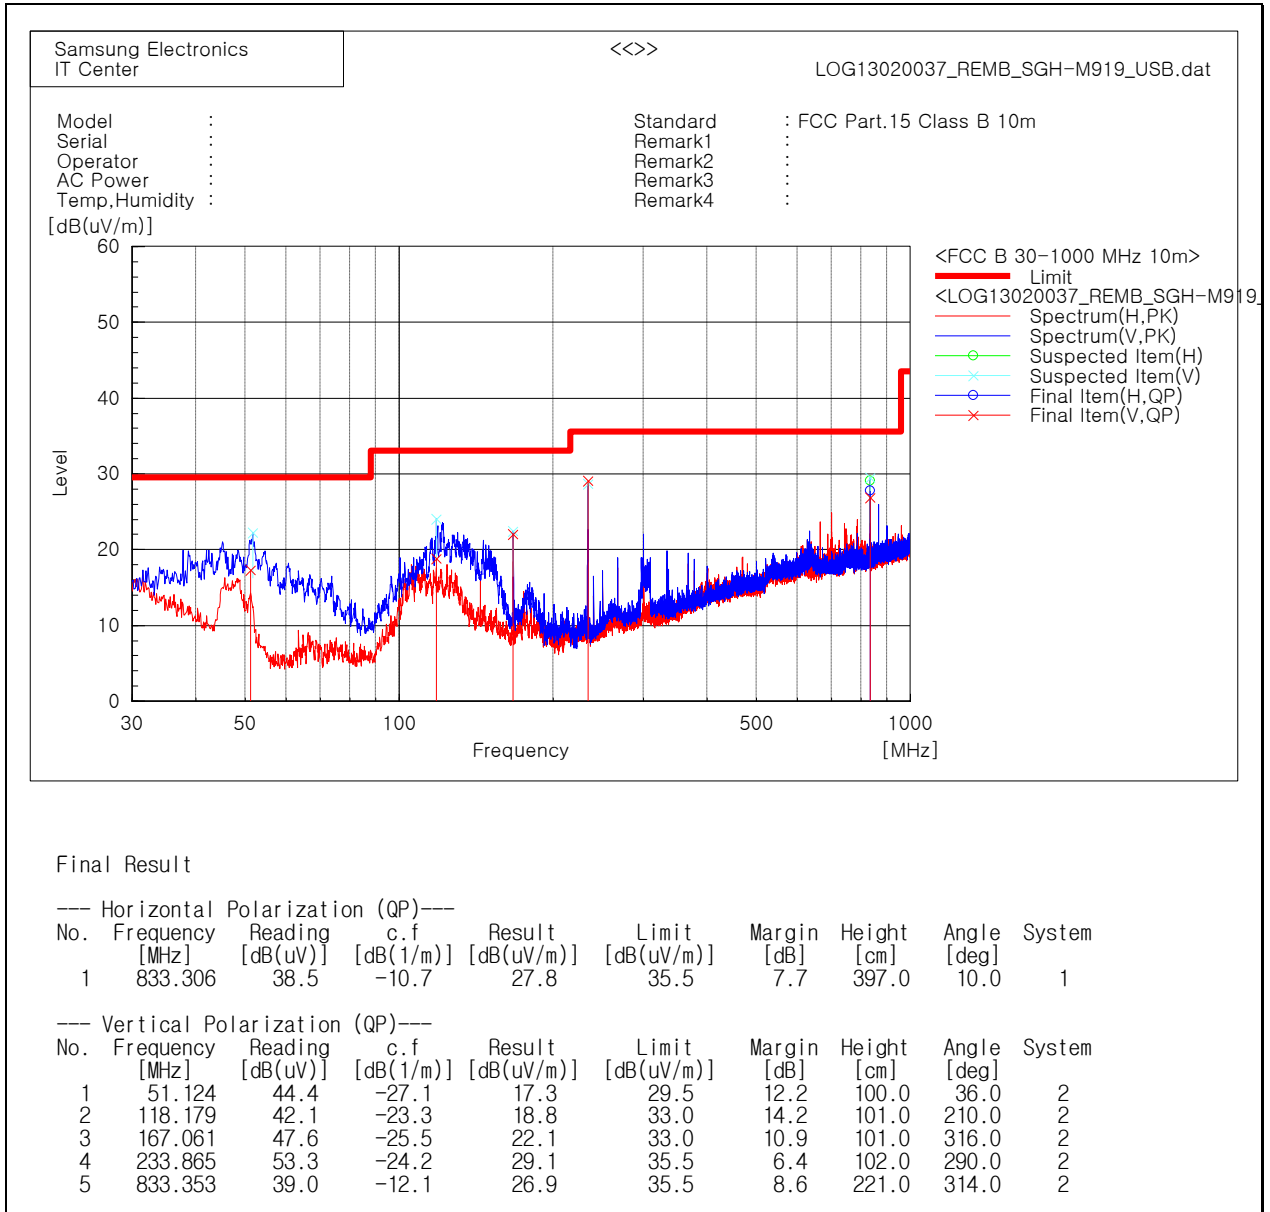

Note) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 10 m, Antenna Height : 1 to 4 meters

Level (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)


Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak

5.2.3 Test results

☐ Operating Mode 1

- Frequency range: 1 000 ~ 10 000 MHz

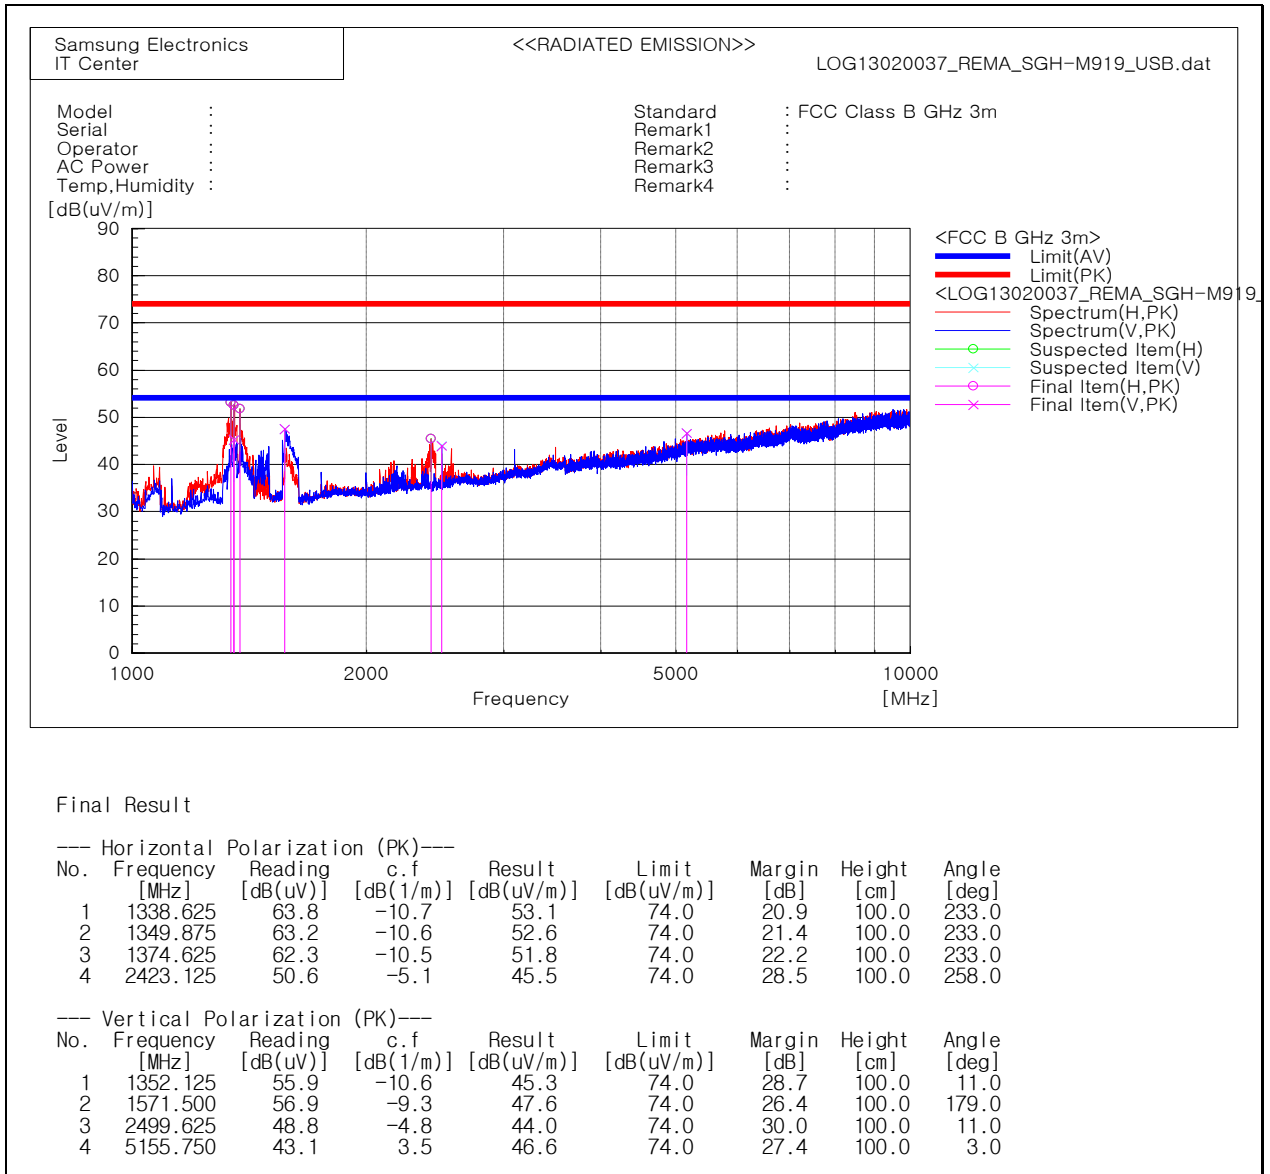

Note 1) Radiated emissions that do not exceed average limit were not tested with average detector mode.

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or AV) = Reading (PK and/or AV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or AV) = Limit - Level (PK and/or AV)

PK = Peak, AV = Average