


10. APPENDIX A: PRE-SCAN DATA FOR 15B RECEIVER MODE

LTE Band 5

BELOW 1GHz

LOW CHANNEL


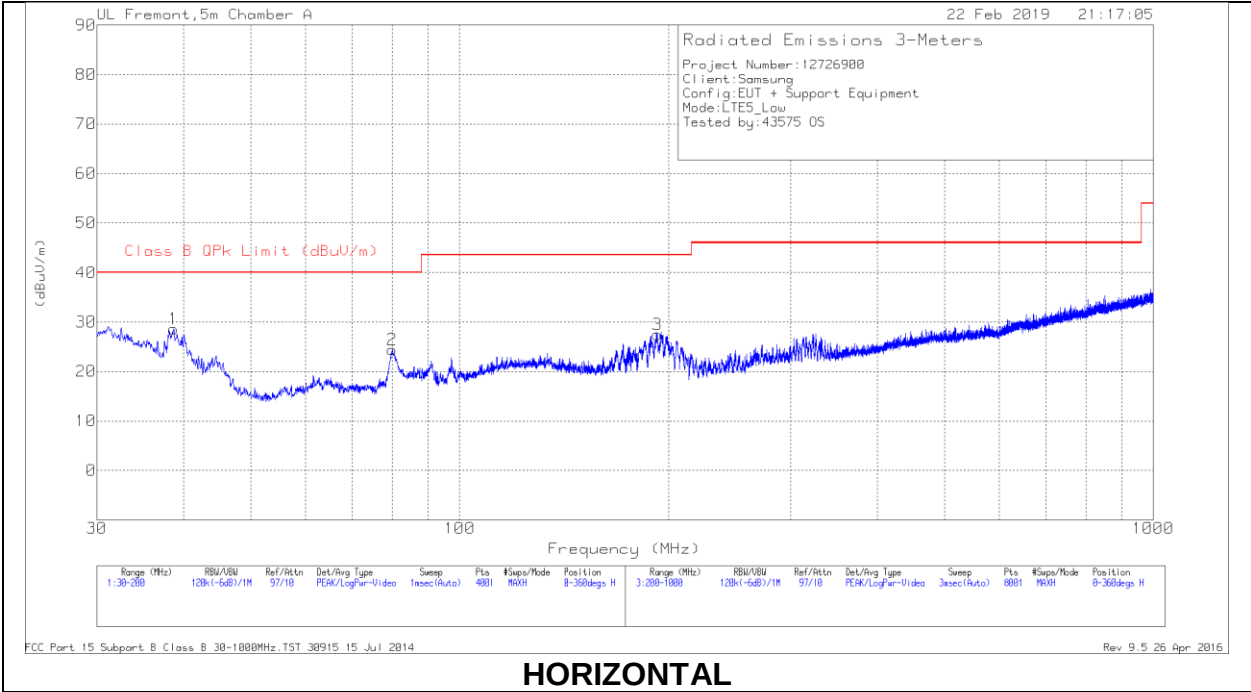


RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF PRE0181574 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	Class B QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	38.7125	35.14	Pk	20.5	-27.1	28.54	40	-11.46	0-360	100	H
4	40.1575	41.24	Pk	19.4	-27.1	33.54	40	-6.46	0-360	100	V
5	62.3425	39.16	Pk	13.6	-26.8	25.96	40	-14.04	0-360	100	V
6	79.98	40.77	Pk	13.4	-26.5	27.67	40	-12.33	0-360	100	V
2	80.0225	37.5	Pk	13.4	-26.5	24.4	40	-15.6	0-360	199	H
3	192.8175	35.06	Pk	17.6	-25.2	27.46	43.52	-16.06	0-360	100	H

Pk - Peak detector

MID CHANNEL

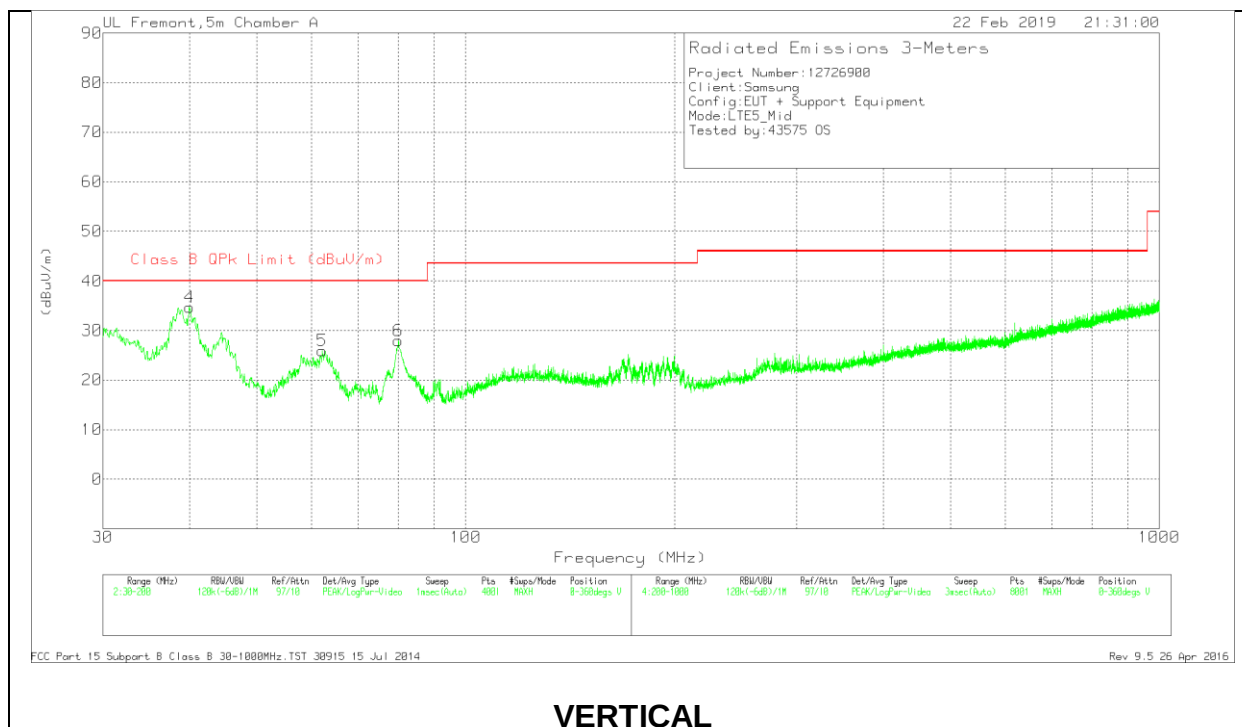
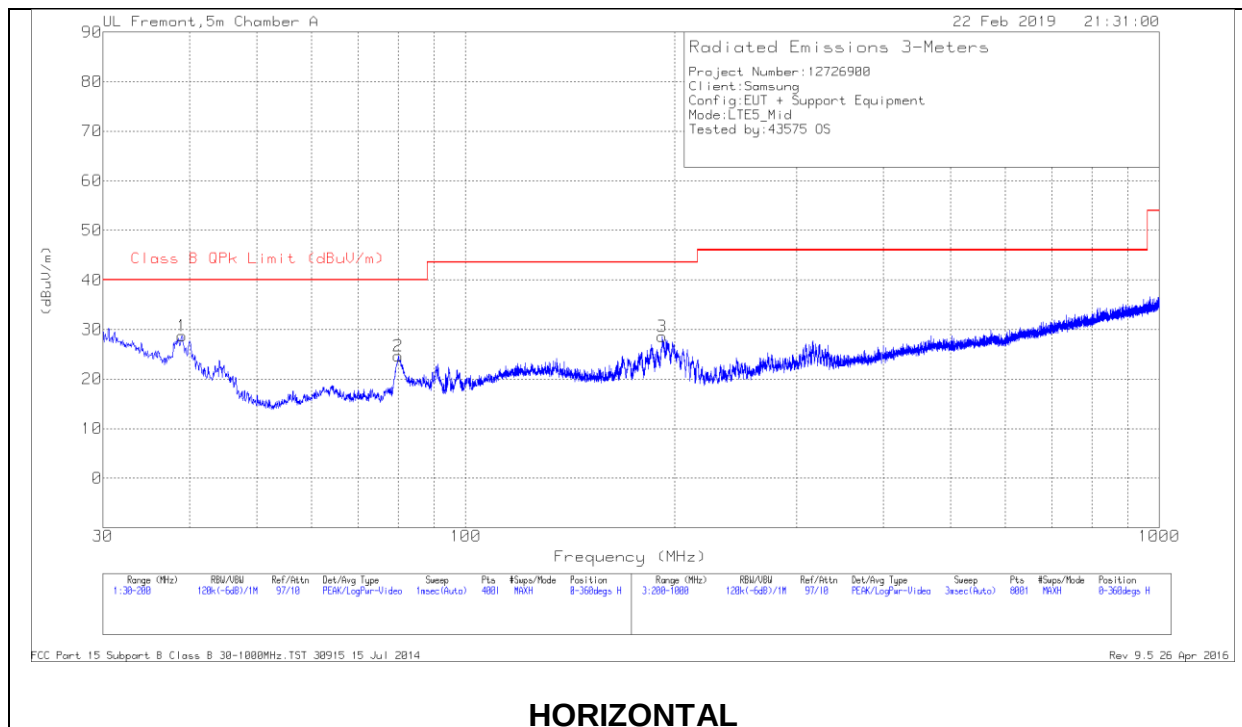


RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF PRE0181574 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	Class B QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	39.01	35.51	Pk	20.3	-27.1	28.71	40	-11.29	0-360	200	H
4	39.9875	41.25	Pk	19.5	-27.1	33.65	40	-6.35	0-360	100	V
5	62.13	39.14	Pk	13.6	-26.8	25.94	40	-14.06	0-360	100	V
2	79.98	37.73	Pk	13.4	-26.5	24.63	40	-15.37	0-360	200	H
6	80.0225	41.07	Pk	13.4	-26.5	27.97	40	-12.03	0-360	100	V
3	192.095	36.26	Pk	17.5	-25.2	28.56	43.52	-14.96	0-360	98	H

Pk - Peak detector

HIGH CHANNEL

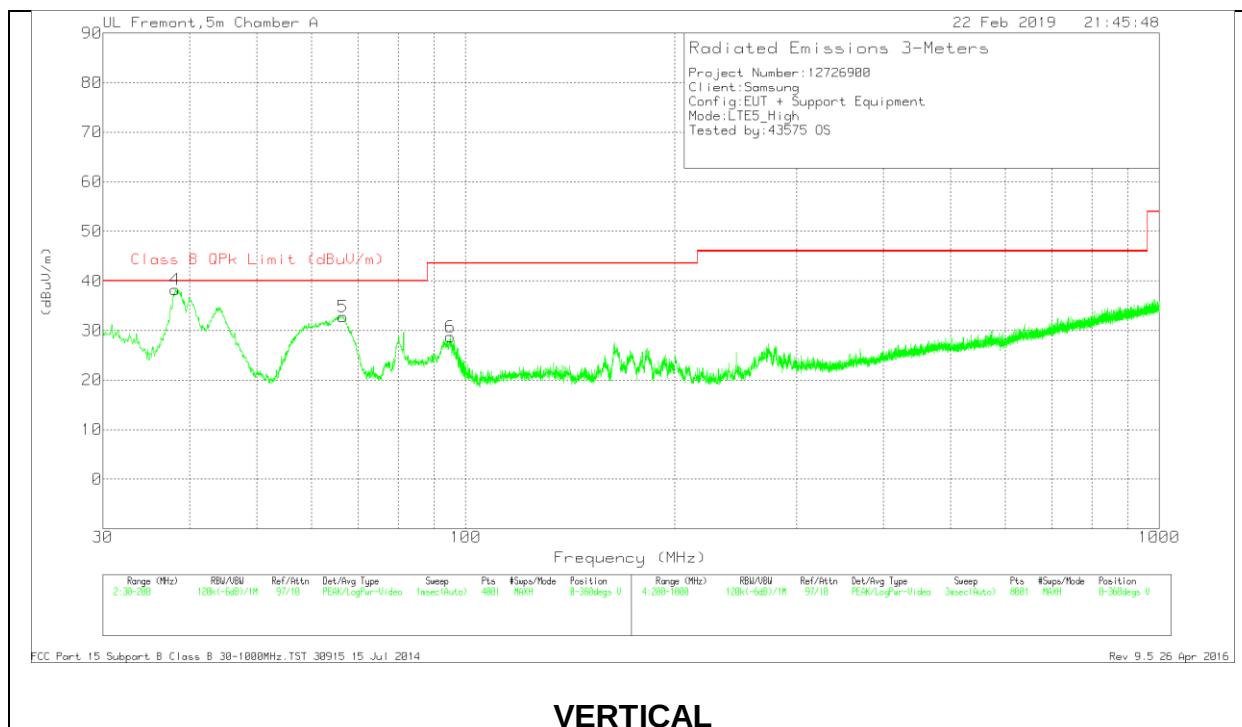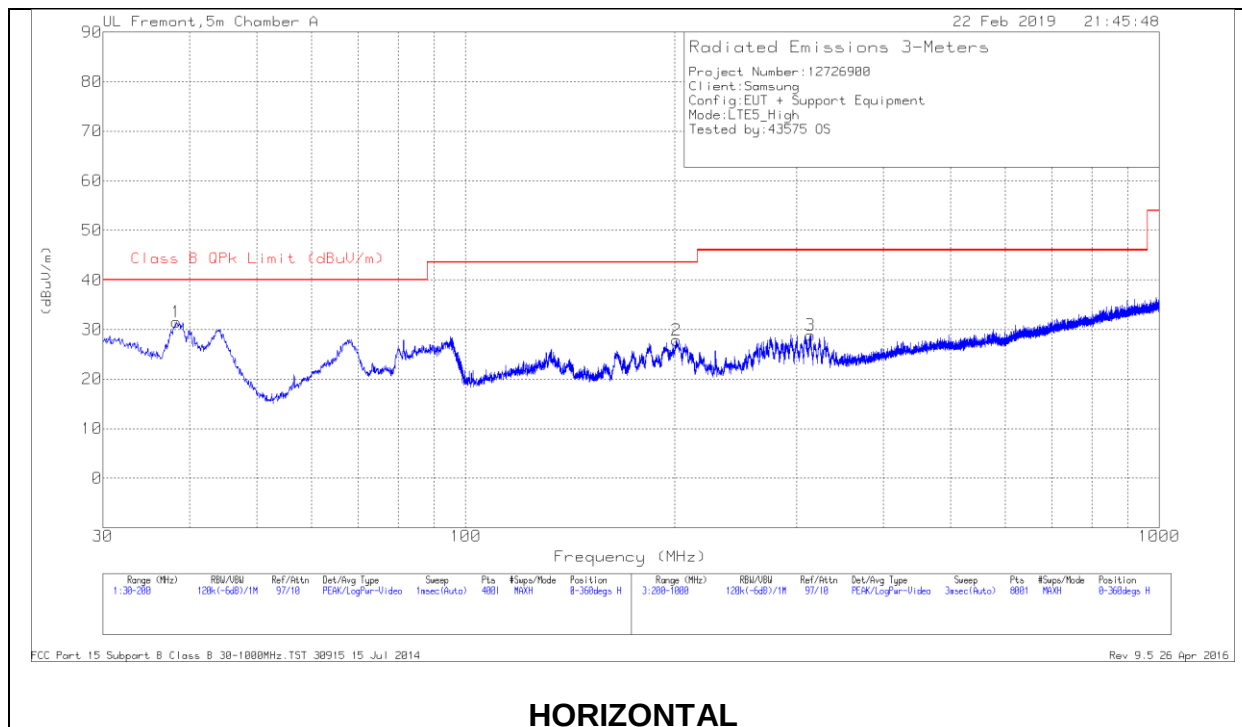

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF PRE0181574 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	Class B QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	38.16	44.49	Pk	20.9	-27.1	38.29	40	-1.71	0-360	100	V
1	38.2875	37.83	Pk	20.8	-27.1	31.53	40	-8.47	0-360	399	H
5	66.5925	45.59	Pk	13.9	-26.7	32.79	40	-7.21	0-360	100	V
6	95.0675	40.26	Pk	14.8	-26.3	28.76	43.52	-14.76	0-360	100	V
2	201.5	34.63	Pk	18.3	-25.1	27.83	43.52	-15.69	0-360	100	H
3	314.2	33.55	Pk	19.7	-24.4	28.85	46.02	-17.17	0-360	100	H


Pk - Peak detector

Frequency (MHz)	Meter Reading (dBuV)	Det	AF PRE0181574 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	Class B QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
38.0669	35.43	Qp	21	-27.1	29.33	40	-10.67	289	109	V


Qp - Quasi-Peak detector

ABOVE 1GHz

LOW CHANNEL

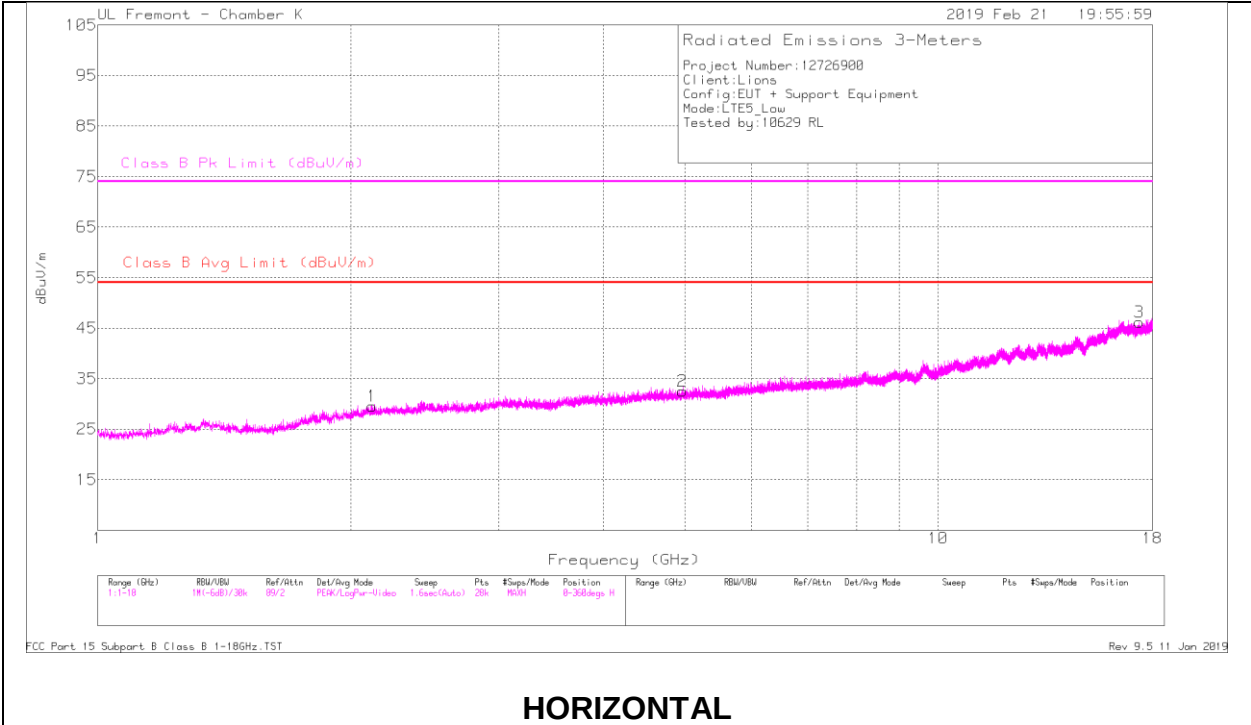

HORIZONTAL

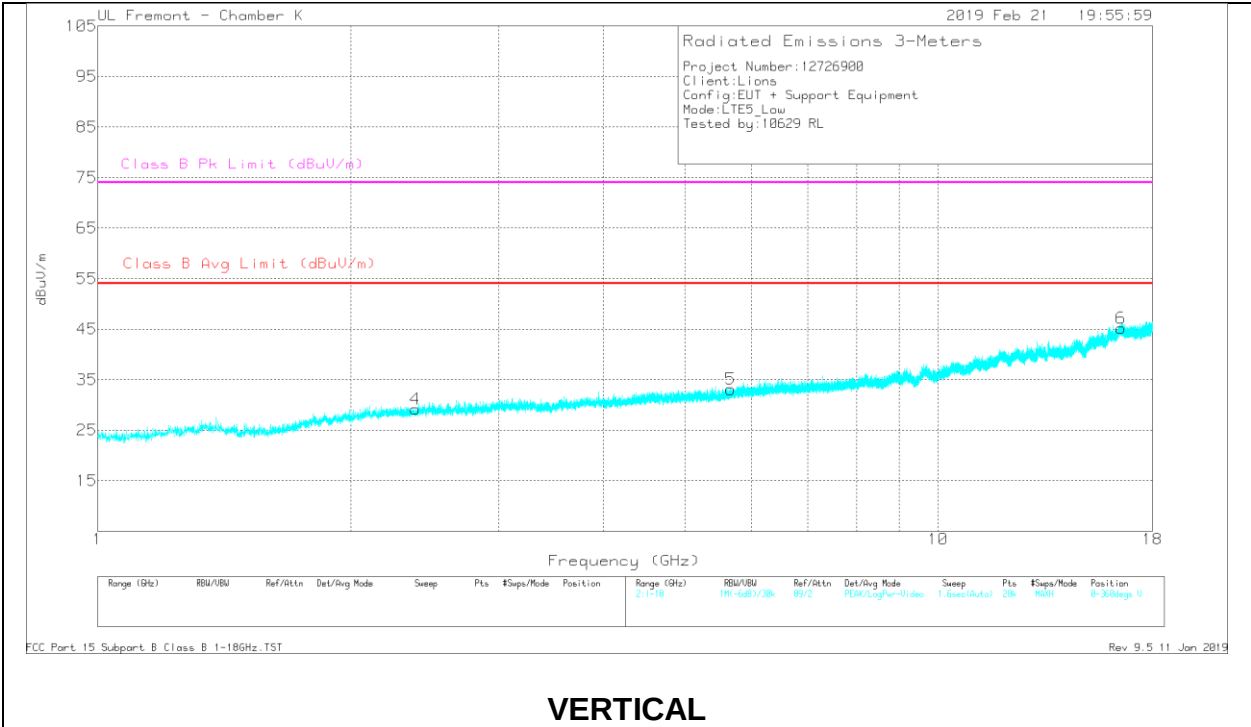

VERTICAL



RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Corrected Reading dBuV/m	Class B Avg Limit (dBuV/m)	Margin (dB)	Class B Pk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2.122	33.72	Pk	31.6	-35.4	29.92	-	-	74	-44.08	248	135	H
2.122	20.21	Av	31.6	-35.4	16.41	54	-37.59	-	-	248	135	H
4.963	28.75	Pk	34.2	-30.9	32.05	-	-	74	-41.95	167	135	H
4.963	16.25	Av	34.2	-30.9	19.55	54	-34.45	-	-	167	135	H
17.36	20.56	Pk	41.3	-17.1	44.76	-	-	74	-29.24	115	366	H
17.36	8.42	Av	41.3	-17.1	32.62	54	-21.38	-	-	115	366	H
2.389	42.63	Pk	31.9	-35.3	39.23	-	-	74	-34.77	228	341	V
2.389	29.26	Av	31.9	-35.3	25.86	54	-28.14	-	-	228	341	V
5.665	37.44	Pk	34.7	-29.4	42.74	-	-	74	-31.26	293	232	V
5.665	24.03	Av	34.7	-29.4	29.33	54	-24.67	-	-	293	232	V
16.516	30.34	Pk	41.8	-17.7	54.44	-	-	74	-19.56	285	314	V
16.516	17.75	Av	41.8	-17.7	41.85	54	-12.15	-	-	285	314	V

Pk - Peak detector

Av - Average detection

MID CHANNEL

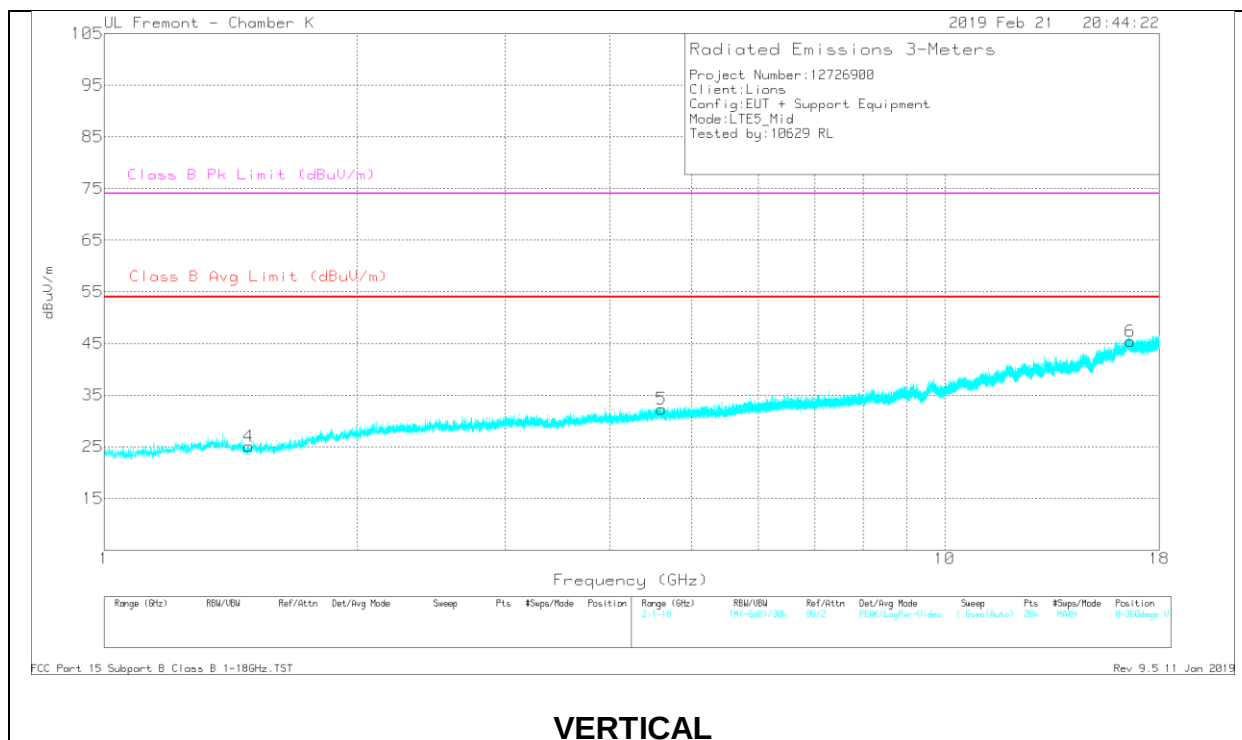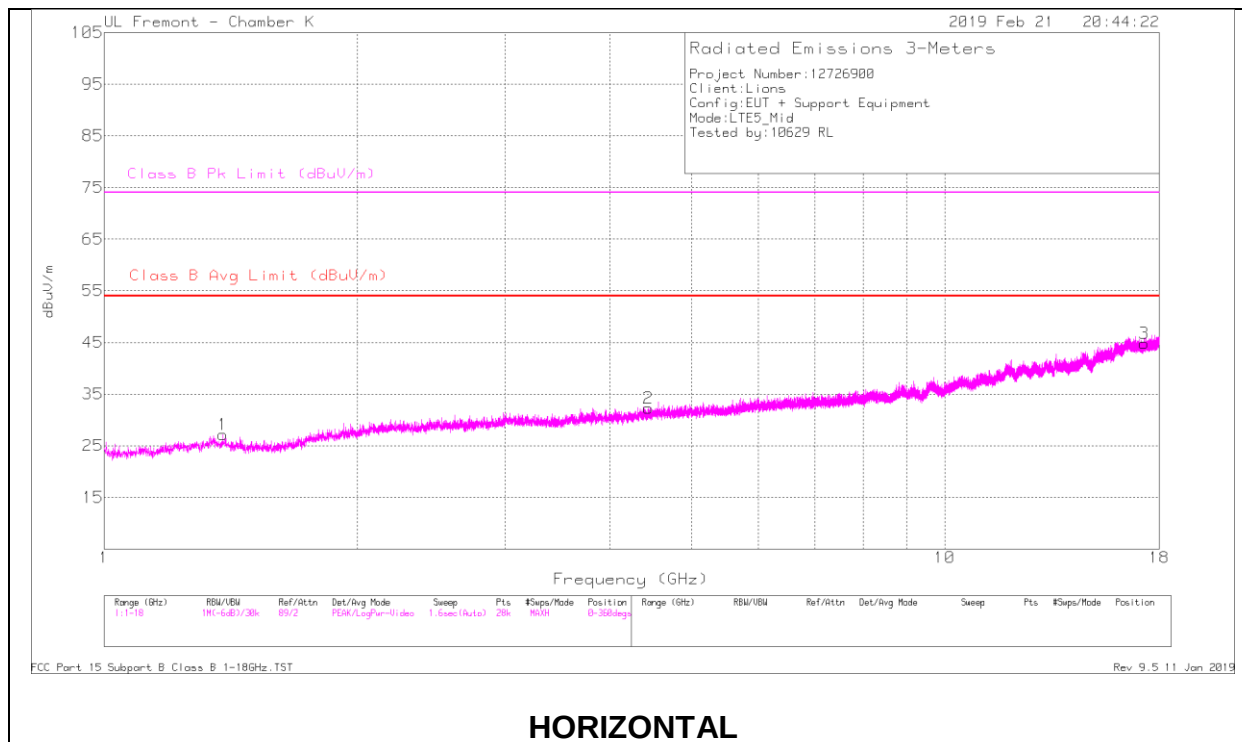



RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Corrected Reading dBuV/m	Class B Avg Limit (dBuV/m)	Margin (dB)	Class B Pk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.384	32.76	Pk	29.1	-35.5	26.36	-	-	74	-47.64	147	247	H
1.384	19.92	Av	29.1	-35.5	13.52	54	-40.48	-	-	147	247	H
4.44	29.44	Pk	33.8	-31.6	31.64	-	-	74	-42.36	218	185	H
4.44	16.86	Av	33.8	-31.6	19.06	54	-34.94	-	-	218	185	H
17.266	21.95	Pk	41.3	-17.4	45.85	-	-	74	-28.15	8	130	H
17.266	9	Av	41.3	-17.4	32.9	54	-21.1	-	-	8	130	H
1.487	42.32	Pk	28.2	-35.4	35.12	-	-	74	-38.88	108	286	V
1.487	29.14	Av	28.2	-35.4	21.94	54	-32.06	-	-	108	286	V
4.604	39.13	Pk	34.1	-31.1	42.13	-	-	74	-31.87	43	384	V
4.604	25.44	Av	34.1	-31.1	28.44	54	-25.56	-	-	43	384	V
16.624	30.91	Pk	41.9	-17.8	55.01	-	-	74	-18.99	218	221	V
16.624	18.23	Av	41.9	-17.8	42.33	54	-11.67	-	-	218	221	V

Pk - Peak detector

Av - Average detection

HIGH CHANNEL

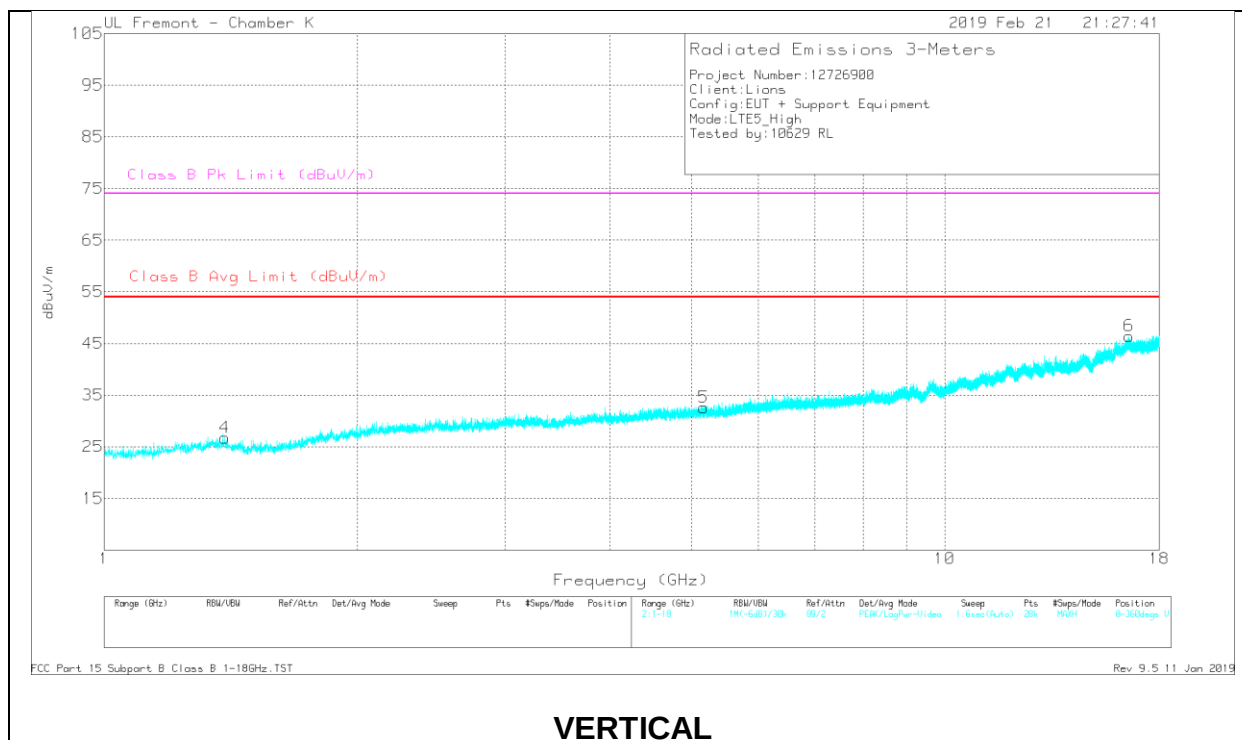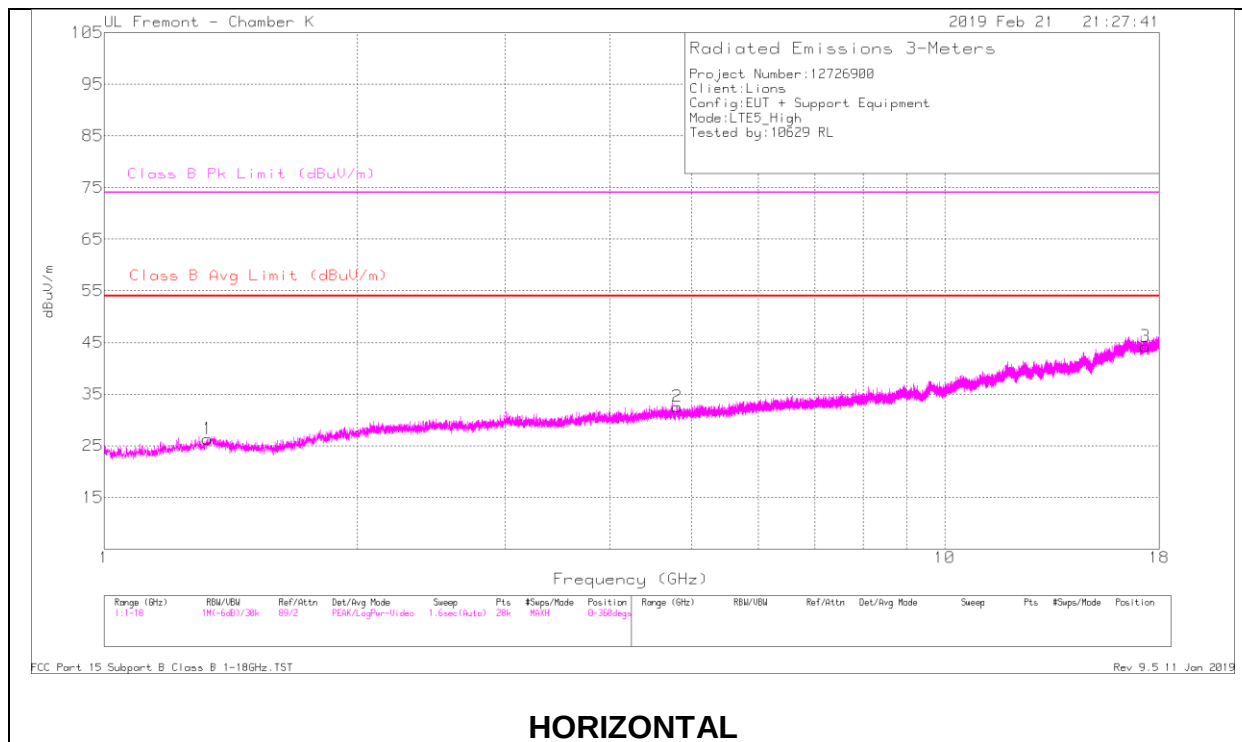

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl (dB)	Corrected Reading dBuV/m	Class B Avg Limit (dBuV/m)	Margin (dB)	Class B Pk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.327	32.66	Pk	29.1	-35.4	26.36	-	-	74	-47.64	198	280	H
1.327	19.96	Av	29.1	-35.4	13.66	54	-40.34	-	-	198	280	H
4.803	39.31	Pk	34.2	-31.2	42.31	-	-	74	-31.69	130	363	H
4.803	25.74	Av	34.2	-31.2	28.74	54	-25.26	-	-	130	363	H
17.331	30.41	Pk	41.3	-17.2	54.51	-	-	74	-19.49	328	108	H
17.331	17.69	Av	41.3	-17.2	41.79	54	-12.21	-	-	328	108	H
1.393	42.65	Pk	29	-35.4	36.25	-	-	74	-37.75	337	246	V
1.393	29.28	Av	29	-35.4	22.88	54	-31.12	-	-	337	246	V
5.167	38.69	Pk	34.4	-30.5	42.59	-	-	74	-31.41	230	363	V
5.167	25.15	Av	34.4	-30.5	29.05	54	-24.95	-	-	230	363	V
16.559	30.09	Pk	41.9	-17.7	54.29	-	-	74	-19.71	150	156	V
16.559	17.91	Av	41.9	-17.7	42.11	54	-11.89	-	-	150	156	V

Pk - Peak detector

Av - Average detection