

REPORT

FCC Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.**Address:**
129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do, 443-
742 Rep. of Korea**Date of Issue:**
December 23, 2014**Test Site/Location:**
HCT CO., LTD., 74, Seoicheon-ro 578beon-gil,
Majang-myeon, Icheon-si, Gyeonggi-do, Korea**Report No.:** HCT-R-1412-F053**HCT FRN:** 0005866421

FCC ID:	A3LSME500M
APPLICANT:	SAMSUNG Electronics Co., Ltd.

FCC Model(s):	SM-E500M/DS
Additional FCC Model(s):	SM-E500M
EUT Type:	Mobile Phone
FCC Classification:	Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s):	\$24, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M10G7D	QPSK	0.478	26.79
		1M12W7D	16QAM	0.489	26.89
LTE – Band2 (3)	1851.5 - 1908.5	2M70G7D	QPSK	0.481	26.82
		2M71W7D	16QAM	0.470	26.72
LTE – Band2 (5)	1852.5 - 1907.5	4M49G7D	QPSK	0.475	26.77
		4M50W7D	16QAM	0.495	26.95
LTE – Band2 (10)	1855.0 - 1905.0	8M99G7D	QPSK	0.493	26.93
		8M97W7D	16QAM	0.536	27.29
LTE – Band2 (15)	1857.5 - 1902.5	13M4G7D	QPSK	0.532	27.26
		13M5W7D	16QAM	0.521	27.17
LTE – Band2 (20)	1860.0 - 1900.0	18M0G7D	QPSK	0.528	27.23
		18M0W7D	16QAM	0.483	26.84

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



Report prepared by
: Kyoung Houn Seo
Test engineer of RF Team



Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1412-F053	December 23, 2014	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. EUT DESCRIPTION.....	6
2.2. MEASURING INSTRUMENT CALIBRATION.....	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS	7
3.2 FREQUENCY RANGE	7
3.3 PEAK-AVERAGE RATIO	8
3.4 OCCUPIED BANDWIDTH.	10
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	11
3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	12
4. LIST OF TEST EQUIPMENT	13
5. SUMMARY OF TEST RESULTS	14
6. SAMPLE CALCULATION	15
7. TEST DATA	16
7.1 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT	16
7.2 RADIATED SPURIOUS EMISSIONS	20
7.2.1 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 2 LTE)	20
7.2.2 RADIATED SPURIOUS EMISSIONS (3 MHz Band 2 LTE)	21
7.2.3 RADIATED SPURIOUS EMISSIONS (5 MHz Band 2 LTE)	22
7.2.4 RADIATED SPURIOUS EMISSIONS (10 MHz Band 2 LTE)	23
7.2.5 RADIATED SPURIOUS EMISSIONS (15 MHz Band 2 LTE)	24
7.2.6 RADIATED SPURIOUS EMISSIONS (20 MHz Band 2 LTE)	25
7.3 PEAK-TO-AVERAGE RATIO	26
7.4 OCCUPIED BANDWIDTH	27
7.5 CONDUCTED SPURIOUS EMISSIONS	28
7.5.1 BAND EDGE	28
7.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	29
7.6.1 FREQUENCY STABILITY (1.4 MHz Band 2 LTE)	29
7.6.2 FREQUENCY STABILITY (3 MHz Band 2 LTE)	30

7.6.3 FREQUENCY STABILITY (5 MHz Band 2 LTE)	31
7.6.4 FREQUENCY STABILITY (10 MHz Band 2 LTE)	32
7.6.5 FREQUENCY STABILITY (15 MHz Band 2 LTE)	33
7.6.6 FREQUENCY STABILITY (20 MHz Band 2 LTE)	34
8. TEST PLOTS.....	35

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: SAMSUNG Electronics Co., Ltd.

Address: 129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do, 443-742 Rep. of Korea

FCC ID: A3LSME500M

Application Type: Certification

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §24, §2

EUT Type: Mobile Phone

FCC Model(s): SM-E500M/DS

Additional FCC Model(s): SM-E500M

Tx Frequency: 1850.7 MHz – 1909.3 MHz (LTE – Band2 (1.4 MHz))
1851.5 MHz – 1908.5 MHz (LTE – Band2 (3 MHz))
1852.5 MHz – 1907.5 MHz (LTE – Band2 (5 MHz))
1855.0 MHz – 1905.0 MHz (LTE – Band2 (10 MHz))
1857.5 MHz – 1902.5 MHz (LTE – Band2 (15 MHz))
1860.0 MHz – 1900.0 MHz (LTE – Band2 (20 MHz))

Max. RF Output Power:

Band 2 (1.4 MHz) :	0.478 W (QPSK) (26.79 dBm) 0.489 W (16-QAM) (26.89 dBm)
Band 2 (3 MHz) :	0.481 W (QPSK) (26.82 dBm) 0.470 W (16-QAM) (26.72 dBm)
Band 2 (5 MHz) :	0.475 W (QPSK) (26.77 dBm) 0.495 W (16-QAM) (26.95 dBm)
Band 2 (10 MHz) :	0.493 W (QPSK) (26.93 dBm) 0.536 W (16-QAM) (27.29 dBm)
Band 2 (15 MHz) :	0.532 W (QPSK) (27.26 dBm) 0.521 W (16-QAM) (27.17 dBm)
Band 2 (20 MHz) :	0.528 W (QPSK) (27.23 dBm) 0.483 W (16-QAM) (26.84 dBm)

Emission Designator(s):

Band 2 (1.4 MHz) :	1M10G7D (QPSK) / 1M12W7D (16-QAM)
Band 2 (3 MHz) :	2M70G7D (QPSK) / 2M71W7D (16-QAM)
Band 2 (5 MHz) :	4M49G7D (QPSK) / 4M50W7D (16-QAM)
Band 2 (10 MHz) :	8M99G7D (QPSK) / 8M97W7D (16-QAM)
Band 2 (15 MHz) :	13M4G7D (QPSK) / 13M5W7D (16-QAM)
Band 2 (20 MHz) :	18M0G7D (QPSK) / 18M0W7D (16-QAM)

Date(s) of Tests: December 10, 2014 ~ December 22, 2014

Antenna Specification

Manufacturer: Partron

Antenna type: LDS Type Antenna

Peak Gain: Band 2 : -0.57 dBi

2. INTRODUCTION

2.1. EUT DESCRIPTION

The SAMSUNG Electronics Co., Ltd. SM-E500M/DS Mobile Phone consists of LTE 2.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.**

3. DESCRIPTION OF TESTS

3.1 EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

ERP/EIRP

Note: ERP(Effective Radiated Power), EIRP(Equivalent Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-C-2004 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a positive peak detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.


The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

Radiated spurious emissions

: Frequency Range : 30 MHz ~ 10th Harmonics of highest channel fundamental frequency.

3.2 FREQUENCY RANGE

§ 24.229: PCS – Mobile Frequency Blocks

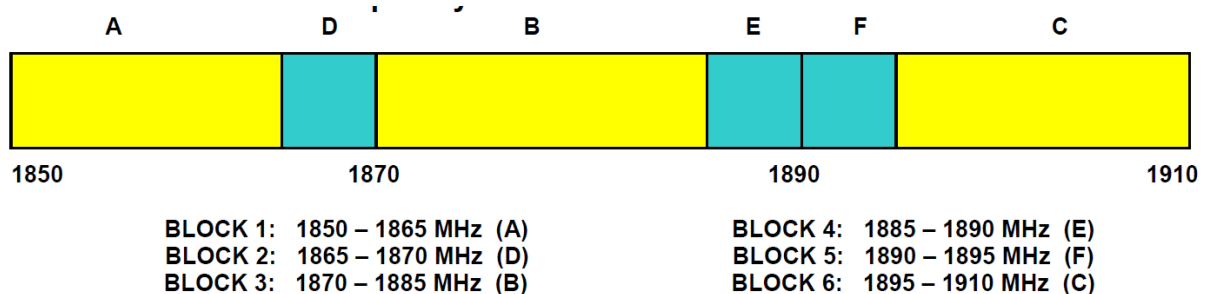

3.3 PEAK-AVERAGE RATIO.

Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.7.

- Section 5.7.1 CCDF Procedure

- a) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,
 - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

- Section 5.7.2 Alternate Procedure

Use one of the procedures presented in 5.1 to measure the total peak power and record as P_{Pk} . Use one of the applicable procedures presented 5.2 to measure the total average power and record as P_{Avg} . Determine the P.A.R. from: $P.A.R._{dB} = P_{Pk (dBm)} - P_{Avg (dBm)}$ (P_{Avg} = Average Power + Duty cycle Factor)

5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW $\geq$ OBW.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 2 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points $\geq$ span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

5.2.2.2 Constant burst duty cycle


If the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is a constant 25%.

3.4 OCCUPIED BANDWIDTH.

Test set-up

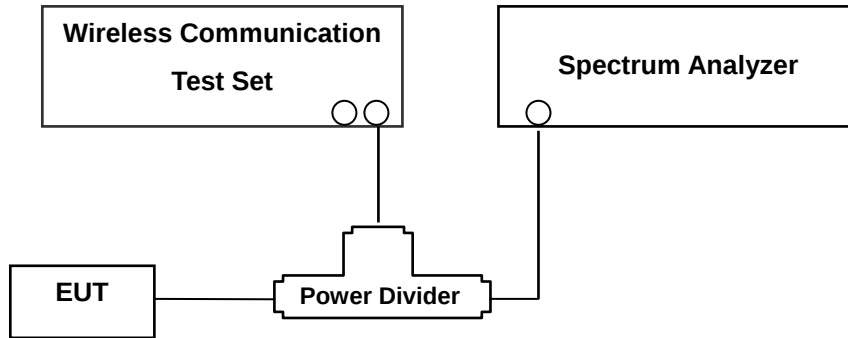

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 4.2..

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the -13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 30 MHz to 10th Harmonics. A display line was placed at -13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.


- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13 dBm.

NOTES: The analyzer plot offsets were determined by below conditions.

- For LTE Band 2, total offset 27.5 dBm = 20 dBm attenuator + 6 dBm Divider + 1.5 dBm RF cables.

3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

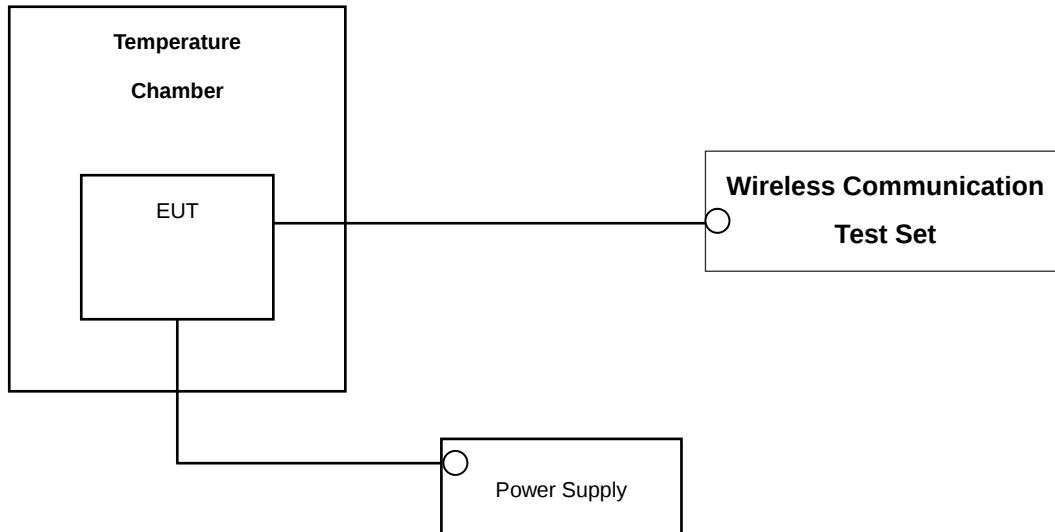

* Nominal Operating Voltage

Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-C-2004 section 2.2.2

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from the end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block(LTE Band2).

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
Agilent	N1921A/ Power Sensor	MY45241059	Annual	07/09/2015
Agilent	N1911A/ Power Meter	MY45100523	Annual	01/24/2015
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/04/2015
Wainwright	WHK1.2/15G-10EF/H.P.F	4	Annual	06/17/2015
Wainwright	WRCJV2400/2483.5-2370/2520-60/12SS / B.R.F.	1	Annual	06/17/2015
Wainwright	WHK3.3/18G-10EF/H.P.F	2	Annual	06/17/2015
Hewlett Packard	11667B / Power Splitter	10545	Annual	02/22/2015
Hewlett Packard	11667B / Power Splitter	11275	Annual	05/19/2015
Digital	EP-3010/ Power Supply	3110117	Annual	10/29/2015
Schwarzbeck	UHAP/ Dipole Antenna	557	Biennial	03/05/2015
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	05/03/2015
Korea Engineering	KR-1005L / Chamber	KRAC05063-3CH	Annual	10/29/2015
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	09/01/2016
Schwarzbeck	BBHA 9120D/ Horn Antenna	1151	Biennial	10/05/2015
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170541	Biennial	07/05/2015
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	04/09/2015
WEINSCHL	ATTENUATOR	BR0592	Annual	10/22/2015
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	Annual	06/09/2015
Agilent	8960 (E5515C)/ Base Station	MY48360222	Annual	08/26/2015
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200863156	Annual	04/01/2015

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	$< 43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS
2.1046	*Conducted Output Power	N/A		PASS
24.232(d)	Peak- to- Average Ratio	$< 13 \text{ dB}$		PASS
2.1055, 24.235	Frequency stability / variation of ambient temperature	Emission must remain in band		PASS
24.232(c)	Equivalent Isotropic Radiated Power	$< 2 \text{ Watts max. EIRP}$	RADIATED	PASS
2.1053, 24.238(a)	Radiated Spurious and Harmonic Emissions	$< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of band emissions		PASS

*See SAR Report

6. SAMPLE CALCULATION

A. EIRP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
	channel	Freq.(MHz)						W	dBm
LTE Band2	18607	1850.7	-15.45	19.20	10.04	1.83	H	0.551	27.41

EIRP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power(EIRP).

B. Emission Designator

QPSK Modulation(For example)

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation(For example)

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = main carrier modulated in a combination of two

or more of the following modes;

amplitude, angle, pulse

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

7. TEST DATA

7.1 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT

Freq (MHz)	Band Width (MHz)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1850.7	1.4	QPSK	-16.07	18.58	10.04	1.83	H	0.478	26.79
		16-QAM	-15.97	18.68	10.04	1.83	H	0.489	26.89
1880.0		QPSK	-16.82	18.15	10.04	1.85	H	0.431	26.34
		16-QAM	-16.69	18.28	10.04	1.85	H	0.444	26.47
1909.3		QPSK	-17.75	17.27	10.05	1.88	H	0.350	25.44
		16-QAM	-17.83	17.19	10.05	1.88	H	0.344	25.36

Equivalent Isotropic Radiated Power Output Data (1.4 MHz Band 2 LTE)

Note: Worst case is 1 resource block.

Freq (MHz)	Band Width (MHz)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1851.5	3	QPSK	-16.04	18.61	10.04	1.83	H	0.481	26.82
		16-QAM	-16.14	18.51	10.04	1.83	H	0.470	26.72
1880.0		QPSK	-16.86	18.11	10.04	1.85	H	0.427	26.30
		16-QAM	-16.69	18.28	10.04	1.85	H	0.444	26.47
1908.5		QPSK	-18.11	16.91	10.05	1.88	H	0.322	25.08
		16-QAM	-18.15	16.87	10.05	1.88	H	0.319	25.04

Equivalent Isotropic Radiated Power Output Data (3 MHz Band 2 LTE)

Note: Worst case is 1 resource block.

Freq (MHz)	Band Width (MHz)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1852.5	5	QPSK	-16.09	18.56	10.04	1.83	H	0.475	26.77
		16-QAM	-15.91	18.74	10.04	1.83	H	0.495	26.95
1880.0		QPSK	-16.98	17.99	10.04	1.85	H	0.415	26.18
		16-QAM	-17.15	17.82	10.04	1.85	H	0.399	26.01
1907.5		QPSK	-18.50	16.52	10.05	1.88	H	0.294	24.69
		16-QAM	-18.69	16.33	10.05	1.88	H	0.282	24.50

Equivalent Isotropic Radiated Power Output Data (5 MHz Band 2 LTE)

Note: Worst case is 1 resource block.

Freq (MHz)	Band Width (MHz)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1855.0	10	QPSK	-16.09	18.72	10.04	1.83	H	0.493	26.93
		16-QAM	-15.73	19.08	10.04	1.83	H	0.536	27.29
1880.0		QPSK	-17.50	17.47	10.04	1.85	H	0.368	25.66
		16-QAM	-17.42	17.55	10.04	1.85	H	0.375	25.74
1905.0		QPSK	-17.37	17.65	10.05	1.88	H	0.382	25.82
		16-QAM	-17.18	17.84	10.05	1.88	H	0.399	26.01

Equivalent Isotropic Radiated Power Output Data (10 MHz Band 2 LTE)

Note: Worst case is 1 resource block.

Freq (MHz)	Band Width (MHz)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1857.5	15	QPSK	-15.76	19.05	10.04	1.83	H	0.532	27.26
		16-QAM	-15.85	18.96	10.04	1.83	H	0.521	27.17
1880.0		QPSK	-16.71	18.26	10.04	1.85	H	0.442	26.45
		16-QAM	-16.78	18.19	10.04	1.85	H	0.435	26.38
1902.5		QPSK	-16.09	18.69	10.05	1.87	H	0.486	26.87
		16-QAM	-16.13	18.65	10.05	1.87	H	0.482	26.83

Equivalent Isotropic Radiated Power Output Data (15 MHz Band 2 LTE)

Note: Worst case is 1 resource block.

Freq (MHz)	Band Width (MHz)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1860.0	20	QPSK	-15.79	19.02	10.04	1.83	H	0.528	27.23
		16-QAM	-16.18	18.63	10.04	1.83	H	0.483	26.84
1880.0		QPSK	-17.62	17.35	10.04	1.85	H	0.358	25.54
		16-QAM	-17.65	17.32	10.04	1.85	H	0.356	25.51
1900.0		QPSK	-16.55	18.23	10.05	1.87	H	0.438	26.41
		16-QAM	-16.39	18.39	10.05	1.87	H	0.454	26.57

Equivalent Isotropic Radiated Power Output Data (20 MHz Band 2 LTE)

Note: Worst case is 1 resource block.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading.

The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

7.2 RADIATED SPURIOUS EMISSIONS

7.2.1 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 2 LTE)

- OPERATING FREQUENCY : 1850.70 MHz
- MEASURED OUTPUT POWER: 26.89 dBm = 0.489 W
- MODULATION SIGNAL: 1.4 MHz 16-QAM
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 39.89 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18607 (1850.7)	3,701.40	-58.84	12.32	-60.62	2.64	H	-50.94	77.83
	5,552.10	-57.91	13.02	-54.37	3.39	H	-44.74	71.63
	7,402.80	-57.87	11.06	-45.46	4.08	V	-38.48	65.37
18900 (1880.0)	3,760.00	-56.18	12.29	-57.88	2.67	H	-48.26	75.15
	5,640.00	-58.82	13.12	-55.41	3.51	H	-45.80	72.69
	7,520.00	-58.33	11.09	-46.81	4.38	H	-40.10	66.99
19193 (1909.3)	3,818.60	-57.17	12.28	-58.26	2.70	V	-48.68	75.57
	5,727.90	-56.65	13.06	-53.03	3.57	H	-43.54	70.43
	7,637.20	-57.53	11.38	-45.61	4.04	V	-38.27	65.16

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10^{th} harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

7.2.2 RADIATED SPURIOUS EMISSIONS (3 MHz Band 2 LTE)

- ☐ OPERATING FREQUENCY : 1851.50 MHz
☐ MEASURED OUTPUT POWER: 26.82 dBm = 0.481 W
☐ MODULATION SIGNAL: 3 MHz QPSK
☐ DISTANCE: 3 meters
☐ LIMIT: $43 + 10 \log_{10}(W) =$ 39.82 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18615 (1851.5)	3,703.00	-53.47	12.32	-55.25	2.64	H	-45.57	72.39
	5,554.50	-56.57	13.02	-53.03	3.39	H	-43.40	70.22
	7,406.00	-58.68	11.05	-46.24	4.10	H	-39.29	66.11
18900 (1880.0)	3,760.00	-58.17	12.29	-59.87	2.67	H	-50.25	77.07
	5,640.00	-59.13	13.12	-55.72	3.51	H	-46.11	72.93
	7,520.00	-59.33	11.09	-47.81	4.38	H	-41.10	67.92
19185 (1908.5)	3,817.00	-57.20	12.28	-58.29	2.70	H	-48.71	75.53
	5,725.50	-56.68	13.06	-53.06	3.57	H	-43.57	70.39
	7,634.00	-58.92	11.36	-47.26	4.09	H	-39.99	66.81

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10^{th} harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

7.2.3 RADIATED SPURIOUS EMISSIONS (5 MHz Band 2 LTE)

- OPERATING FREQUENCY : 1852.50 MHz
- MEASURED OUTPUT POWER: 26.95 dBm = 0.495 W
- MODULATION SIGNAL: 5 MHz 16-QAM
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 39.95 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18625 (1852.5)	3,705.00	-52.84	12.31	-54.58	2.67	H	-44.94	71.89
	5,557.50	-56.09	13.04	-52.73	3.41	H	-43.10	70.05
	7,410.00	-59.11	11.05	-47.10	4.13	H	-40.18	67.13
18900 (1880.0)	3,760.00	-56.60	12.29	-58.30	2.67	H	-48.68	75.63
	5,640.00	-58.81	13.12	-55.40	3.51	H	-45.79	72.74
	7,520.00	-59.48	11.09	-47.96	4.38	H	-41.25	68.20
19175 (1907.5)	3,815.00	-56.77	12.28	-57.86	2.70	H	-48.28	75.23
	5,722.50	-58.54	13.05	-55.13	3.59	H	-45.67	72.62
	7,630.00	-59.52	11.36	-47.86	4.09	H	-40.59	67.54

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

7.2.4 RADIATED SPURIOUS EMISSIONS (10 MHz Band 2 LTE)

- ☐ OPERATING FREQUENCY : 1855.00 MHz
☐ MEASURED OUTPUT POWER: 27.29 dBm = 0.536 W
☐ MODULATION SIGNAL: 10 MHz 16-QAM
☐ DISTANCE: 3 meters
☐ LIMIT: $43 + 10 \log_{10}(W) =$ 40.29 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18650 (1855.0)	3,710.00	-54.10	12.31	-55.83	2.70	H	-46.22	73.51
	5,565.00	-59.76	13.05	-56.40	3.42	H	-46.77	74.06
	7,420.00	-59.98	11.05	-47.86	4.17	H	-40.98	68.27
18900 (1880.0)	3,760.00	-55.86	12.29	-57.56	2.67	H	-47.94	75.23
	5,640.00	-58.85	13.12	-55.44	3.51	H	-45.83	73.12
	7,520.00	-58.71	11.09	-47.19	4.38	H	-40.48	67.77
19150 (1905.0)	3,810.00	-56.41	12.29	-57.81	2.68	H	-48.20	75.49
	5,715.00	-56.31	13.08	-52.94	3.56	H	-43.42	70.71
	7,620.00	-58.69	11.33	-47.01	3.99	H	-39.67	66.96

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10^{th} harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

7.2.5 RADIATED SPURIOUS EMISSIONS (15 MHz Band 2 LTE)

- OPERATING FREQUENCY : 1857.50 MHz
- MEASURED OUTPUT POWER: 27.26 dBm = 0.532 W
- MODULATION SIGNAL: 15 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 40.26 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18675 (1857.5)	3,715.00	-53.67	12.31	-55.42	2.68	H	-45.79	73.05
	5,572.50	-56.94	13.05	-53.57	3.43	H	-43.95	71.21
	7,430.00	-57.75	11.04	-45.70	4.30	H	-38.96	66.22
18900 (1880.0)	3,760.00	-56.15	12.29	-57.85	2.67	H	-48.23	75.49
	5,640.00	-56.20	13.12	-52.79	3.51	H	-43.18	70.44
	7,520.00	-59.53	11.09	-48.01	4.38	H	-41.30	68.56
19125 (1902.5)	3,805.00	-54.71	12.29	-56.09	2.66	H	-46.46	73.72
	5,707.50	-59.73	13.11	-56.25	3.54	H	-46.68	73.94
	7,610.00	-59.53	11.31	-48.08	3.97	H	-40.74	68.00

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

7.2.6 RADIATED SPURIOUS EMISSIONS (20 MHz Band 2 LTE)

- ☐ OPERATING FREQUENCY : 1860.00 MHz
☐ MEASURED OUTPUT POWER: 27.23 dBm = 0.528 W
☐ MODULATION SIGNAL: 20 MHz QPSK
☐ DISTANCE: 3 meters
☐ LIMIT: $43 + 10 \log_{10}(W) =$ 40.23 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
18700 (1860.0)	3,720.00	-53.74	12.31	-55.50	2.67	H	-45.86	73.09
	5,580.00	-59.35	13.07	-56.12	3.44	H	-46.49	73.72
	7,440.00	-58.96	11.04	-46.53	4.24	H	-39.73	66.96
18900 (1880.0)	3,760.00	-55.65	12.29	-57.35	2.67	H	-47.73	74.96
	5,640.00	-59.61	13.12	-56.20	3.51	H	-46.59	73.82
	7,520.00	-58.86	11.09	-47.34	4.38	H	-40.63	67.86
19100 (1900.0)	3,800.00	-54.61	12.30	-56.02	2.64	H	-46.36	73.59
	5,700.00	-55.71	13.13	-52.32	3.47	H	-42.66	69.89
	7,600.00	-57.34	11.29	-45.63	4.12	H	-38.46	65.69

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

7.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Band 2	1.4 MHz	1880.0	QPSK	6	0	4.73
			16-QAM	6	0	5.55
	3 MHz		QPSK	15	0	4.71
			16-QAM	15	0	5.60
	5 MHz		QPSK	25	0	4.93
			16-QAM	25	0	5.44
	10 MHz		QPSK	50	0	5.02
			16-QAM	50	0	5.64
	15 MHz		QPSK	75	0	4.83
			16-QAM	75	0	5.60
	20 MHz		QPSK	100	0	4.93
			16-QAM	100	0	5.73

- Plots of the EUT's Peak- to- Average Ratio are shown Page 42 ~ 47

7.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 2	1.4 MHz	1880.0	QPSK	6	0	1.1007
			16-QAM	6	0	1.1158
	3 MHz		QPSK	15	0	2.7032
			16-QAM	15	0	2.7090
	5 MHz		QPSK	25	0	4.4934
			16-QAM	25	0	4.5040
	10 MHz		QPSK	50	0	8.9911
			16-QAM	50	0	8.9707
	15 MHz		QPSK	75	0	13.4410
			16-QAM	75	0	13.4780
	20 MHz		QPSK	100	0	18.0070
			16-QAM	100	0	17.9940

- Plots of the EUT's Occupied Bandwidth are shown Page 36 ~ 41.

7.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Frequency of Maximum Harmonic (GHz)	Maximum Data [dBm]
Band 2	1.4	1850.7	QPSK	1	0	6.972360	-25.89
		1880.0	QPSK	1	0	8.867660	-26.04
		1909.3	QPSK	1	0	6.728100	-25.32
	3	1851.5	QPSK	1	0	6.988310	-26.01
		1880.0	QPSK	1	0	5.478360	-26.52
		1908.5	QPSK	1	0	6.564090	-25.86
	5	1852.5	QPSK	1	0	6.732080	-25.45
		1880.0	QPSK	1	0	6.499280	-26.12
		1907.5	QPSK	1	0	6.976350	-25.58
	10	1855.0	QPSK	1	0	6.955410	-25.40
		1880.0	QPSK	1	0	6.943450	-25.53
		1905.0	QPSK	1	0	6.938460	-26.18
	15	1857.5	QPSK	1	0	6.813840	-26.09
		1880.0	QPSK	1	0	6.601970	-25.60
		1902.5	QPSK	1	0	5.594510	-25.78
	20	1860.0	QPSK	1	0	6.990310	-25.65
		1880.0	QPSK	1	0	6.980830	-25.21
		1900.0	QPSK	1	0	6.937470	-25.50

- Plots of the EUT's Conducted Spurious Emissions are shown Page 66 ~ 83.

7.5.1 BAND EDGE


- Plots of the EUT's Band Edge are shown Page 48 ~ 65.

7.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.6.1 FREQUENCY STABILITY (1.4 MHz Band 2 LTE)

■ OPERATING FREQUENCY:	<u>1880,000,000 Hz</u>
■ CHANNEL:	<u>18900 (1.4 MHz)</u>
■ REFERENCE VOLTAGE:	<u>3.8 VDC</u>
■ DEVIATION LIMIT:	<u>-</u>


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1880 000 009	0	0.000 000	0.000
100%		-30	1880 000 000	-9.30	0.000 000	-0.005
100%		-20	1880 000 001	-8.50	0.000 000	-0.005
100%		-10	1880 000 004	-5.80	0.000 000	-0.003
100%		0	1880 000 000	-9.00	0.000 000	-0.005
100%		+10	1880 000 002	-7.20	0.000 000	-0.004
100%		+30	1880 000 001	-8.90	0.000 000	-0.005
100%		+40	1880 000 002	-7.60	0.000 000	-0.004
100%		+50	1880 000 000	-9.40	0.000 000	-0.005
115%	4.37	+20	1880 000 002	-7.70	0.000 000	-0.004
85%	3.23	+20	1880 000 003	-6.20	0.000 000	-0.003

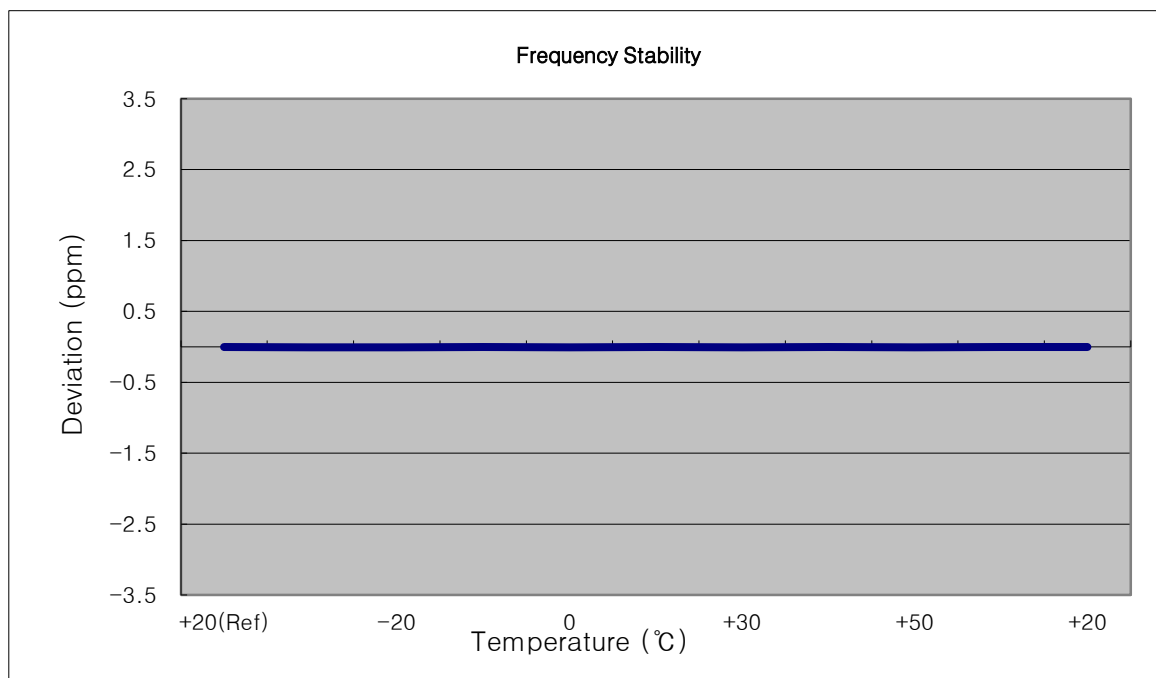

7.6.2 FREQUENCY STABILITY (3 MHz Band 2 LTE)

☒ OPERATING FREQUENCY: 1880,000,000 Hz
☒ CHANNEL: 18900 (3 MHz)
☒ REFERENCE VOLTAGE: 3.8 VDC
☒ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1880 000 008	0	0.000 000	0.000
100%		-30	1880 000 002	-6.60	0.000 000	-0.004
100%		-20	1880 000 002	-6.70	0.000 000	-0.004
100%		-10	1880 000 000	-8.10	0.000 000	-0.004
100%		0	1880 000 002	-5.90	0.000 000	-0.003
100%		+10	1880 000 002	-6.10	0.000 000	-0.003
100%		+30	1880 000 003	-5.60	0.000 000	-0.003
100%		+40	1880 000 002	-6.30	0.000 000	-0.003
100%		+50	1880 000 004	-4.60	0.000 000	-0.002
115%	4.37	+20	1880 000 003	-5.40	0.000 000	-0.003
85%	3.23	+20	1880 000 001	-7.20	0.000 000	-0.004

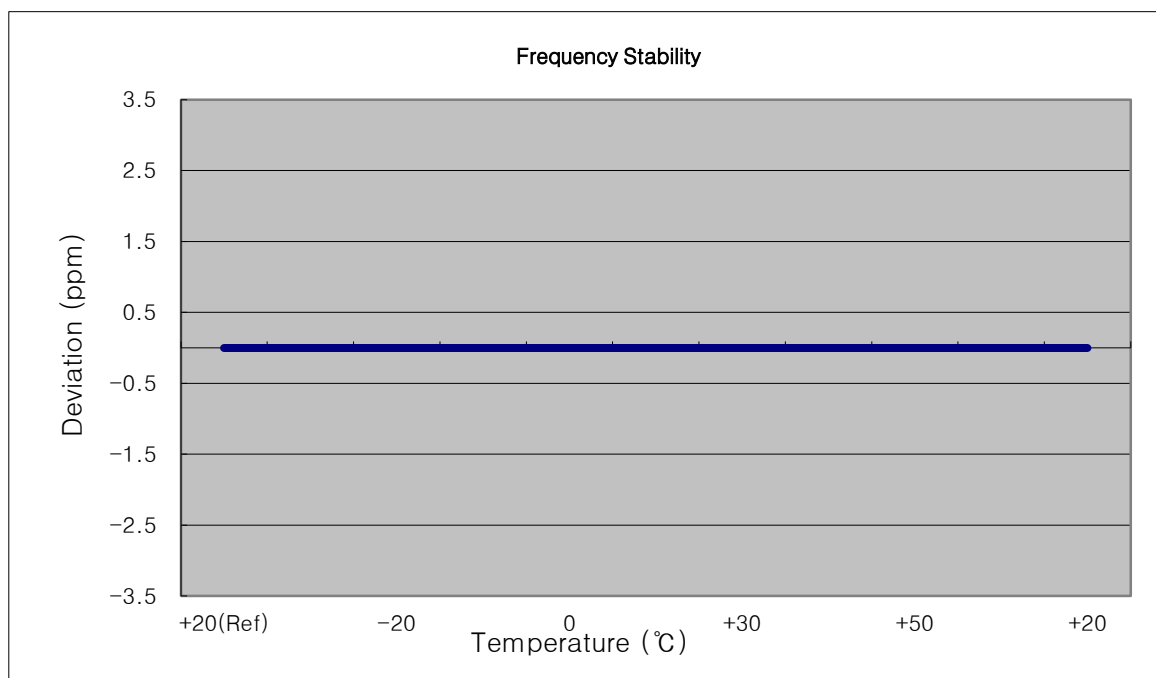

7.6.3 FREQUENCY STABILITY (5 MHz Band 2 LTE)

☐ OPERATING FREQUENCY: 1880,000,000 Hz
☐ CHANNEL: 18900 (5 MHz)
☐ REFERENCE VOLTAGE: 3.8 VDC
☐ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1880 000 006	0	0.000 000	0.000
100%		-30	1879 999 999	-6.60	0.000 000	-0.004
100%		-20	1879 999 999	-7.20	0.000 000	-0.004
100%		-10	1880 000 000	-6.00	0.000 000	-0.003
100%		0	1879 999 998	-7.90	0.000 000	-0.004
100%		+10	1879 999 999	-6.30	0.000 000	-0.003
100%		+30	1879 999 999	-6.60	0.000 000	-0.004
100%		+40	1880 000 001	-4.80	0.000 000	-0.003
100%		+50	1880 000 000	-6.20	0.000 000	-0.003
115%	4.37	+20	1880 000 000	-5.70	0.000 000	-0.003
85%	3.23	+20	1879 999 998	-7.50	0.000 000	-0.004

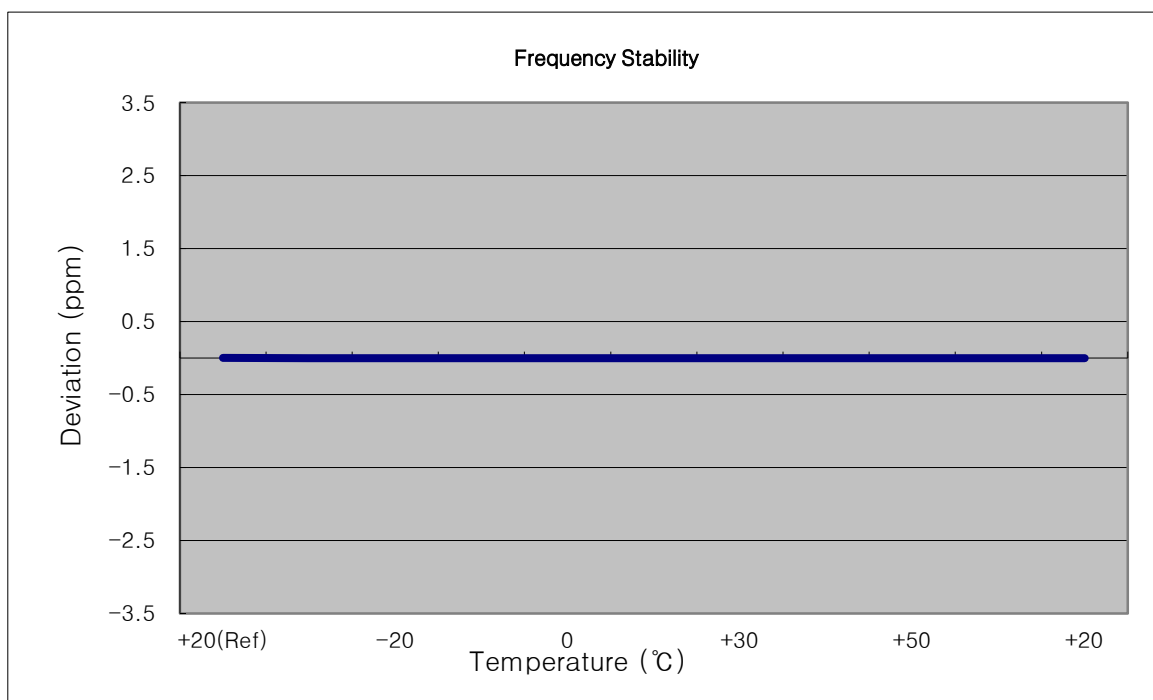

7.6.4 FREQUENCY STABILITY (10 MHz Band 2 LTE)

☒ OPERATING FREQUENCY: 1880,000,000 Hz
☒ CHANNEL: 18900 (10 MHz)
☒ REFERENCE VOLTAGE: 3.8 VDC
☒ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1880 000 007	0	0.000 000	0.000
100%		-30	1879 999 999	-7.70	0.000 000	-0.004
100%		-20	1880 000 001	-5.50	0.000 000	-0.003
100%		-10	1879 999 998	-8.40	0.000 000	-0.004
100%		0	1880 000 000	-6.60	0.000 000	-0.004
100%		+10	1879 999 999	-7.70	0.000 000	-0.004
100%		+30	1879 999 998	-8.50	0.000 000	-0.005
100%		+40	1880 000 000	-6.50	0.000 000	-0.003
100%		+50	1879 999 999	-7.90	0.000 000	-0.004
115%	4.37	+20	1879 999 998	-8.40	0.000 000	-0.004
85%	3.23	+20	1879 999 997	-9.10	0.000 000	-0.005

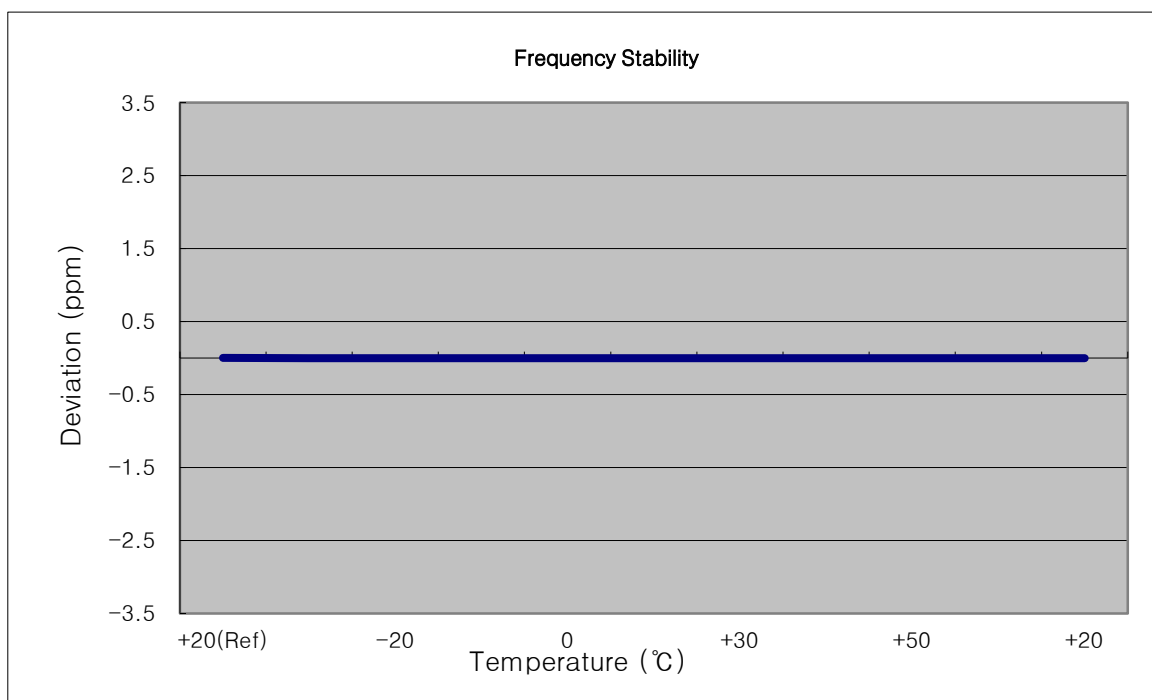

7.6.5 FREQUENCY STABILITY (15 MHz Band 2 LTE)

☒ OPERATING FREQUENCY: 1880,000,000 Hz
☒ CHANNEL: 18900 (15 MHz)
☒ REFERENCE VOLTAGE: 3.8 VDC
☒ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1880 000 008	0	0.000 000	0.000
100%		-30	1880 000 001	-7.80	0.000 000	-0.004
100%		-20	1880 000 001	-7.60	0.000 000	-0.004
100%		-10	1880 000 002	-6.40	0.000 000	-0.003
100%		0	1879 999 999	-8.90	0.000 000	-0.005
100%		+10	1880 000 000	-8.70	0.000 000	-0.005
100%		+30	1880 000 001	-6.90	0.000 000	-0.004
100%		+40	1880 000 002	-6.40	0.000 000	-0.003
100%		+50	1880 000 002	-6.50	0.000 000	-0.003
115%	4.37	+20	1879 999 998	-10.00	-0.000 001	-0.005
85%	3.23	+20	1880 000 000	-8.20	0.000 000	-0.004

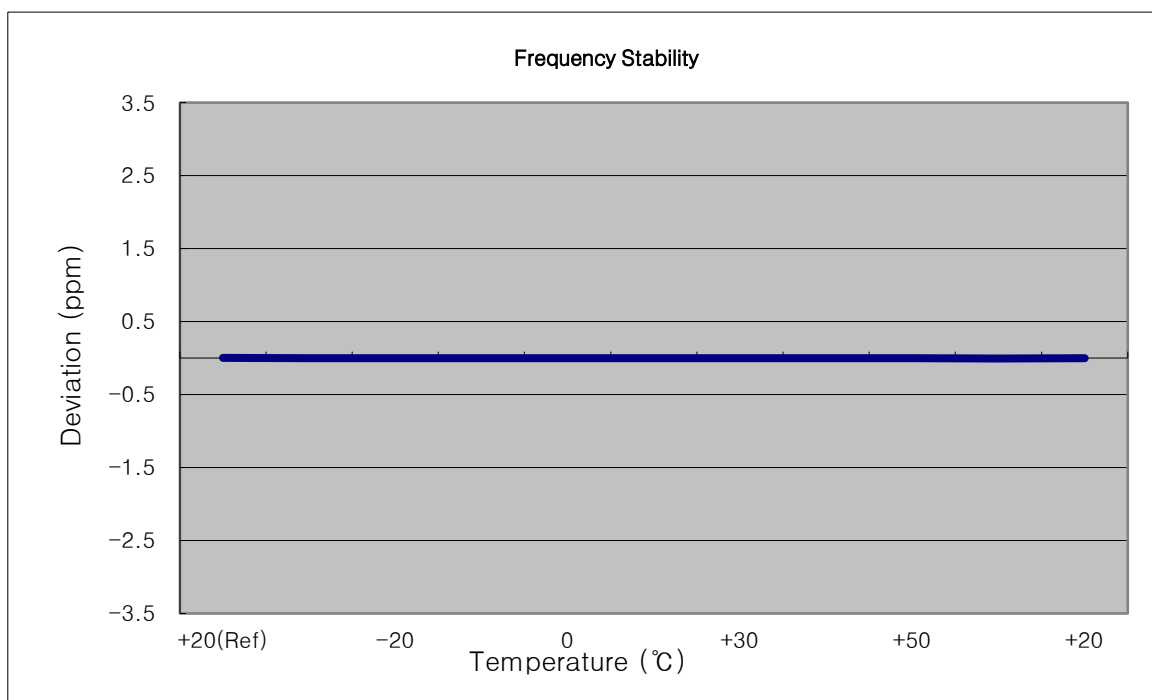

7.6.6 FREQUENCY STABILITY (20 MHz Band 2 LTE)


☒ OPERATING FREQUENCY: 1880,000,000 Hz
☒ CHANNEL: 18900 (20 MHz)
☒ REFERENCE VOLTAGE: 3.8 VDC
☒ DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1880 000 005	0	0.000 000	0.000
100%		-30	1879 999 998	-7.20	0.000 000	-0.004
100%		-20	1879 999 996	-9.10	0.000 000	-0.005
100%		-10	1879 999 999	-6.60	0.000 000	-0.004
100%		0	1879 999 998	-7.00	0.000 000	-0.004
100%		+10	1879 999 999	-6.20	0.000 000	-0.003
100%		+30	1879 999 999	-5.80	0.000 000	-0.003
100%		+40	1879 999 999	-6.20	0.000 000	-0.003
100%		+50	1879 999 998	-6.90	0.000 000	-0.004
115%	4.37	+20	1880 000 000	-5.00	0.000 000	-0.003
85%	3.23	+20	1879 999 997	-8.50	0.000 000	-0.005

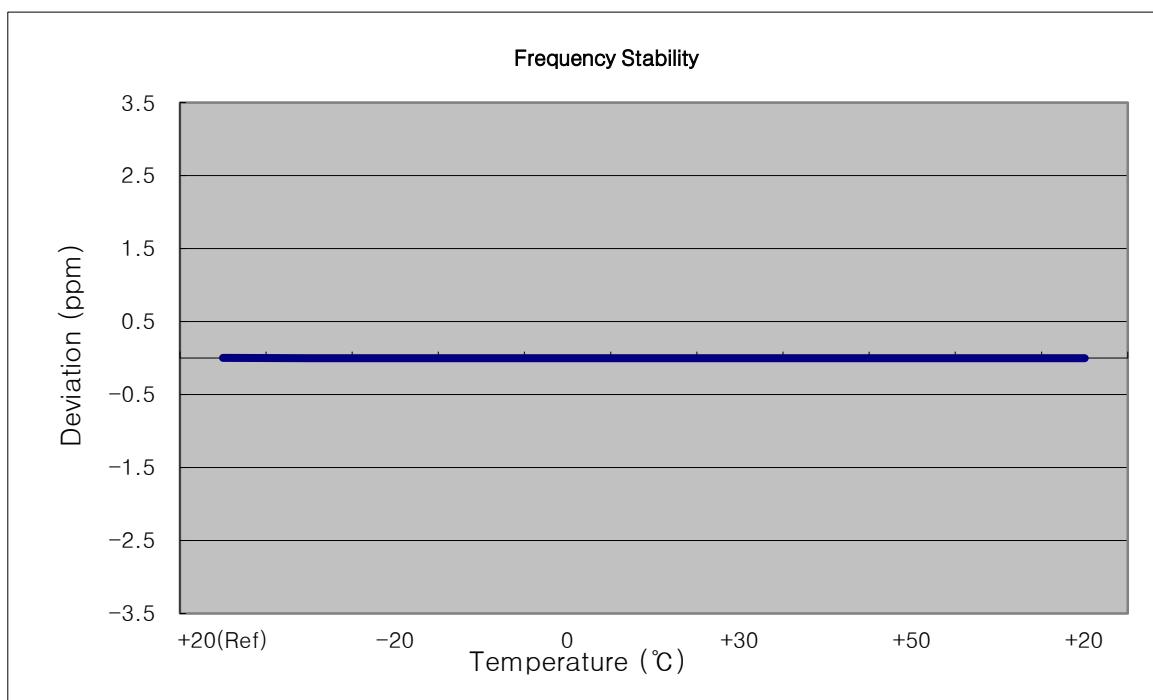


8. TEST PLOTS


BAND 2. Occupied Bandwidth Plot (1.4M BW Ch.18900 QPSK RB 6_0)

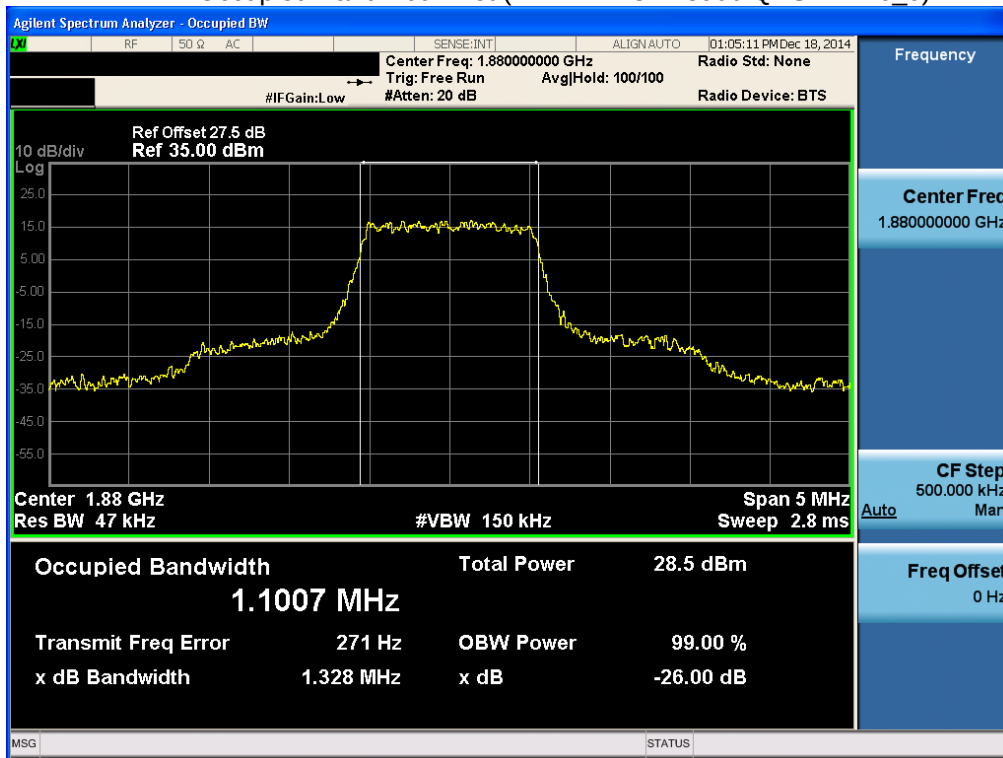


BAND 2. Occupied Bandwidth Plot (1.4M BW Ch.18900 16QAM RB 6_0)

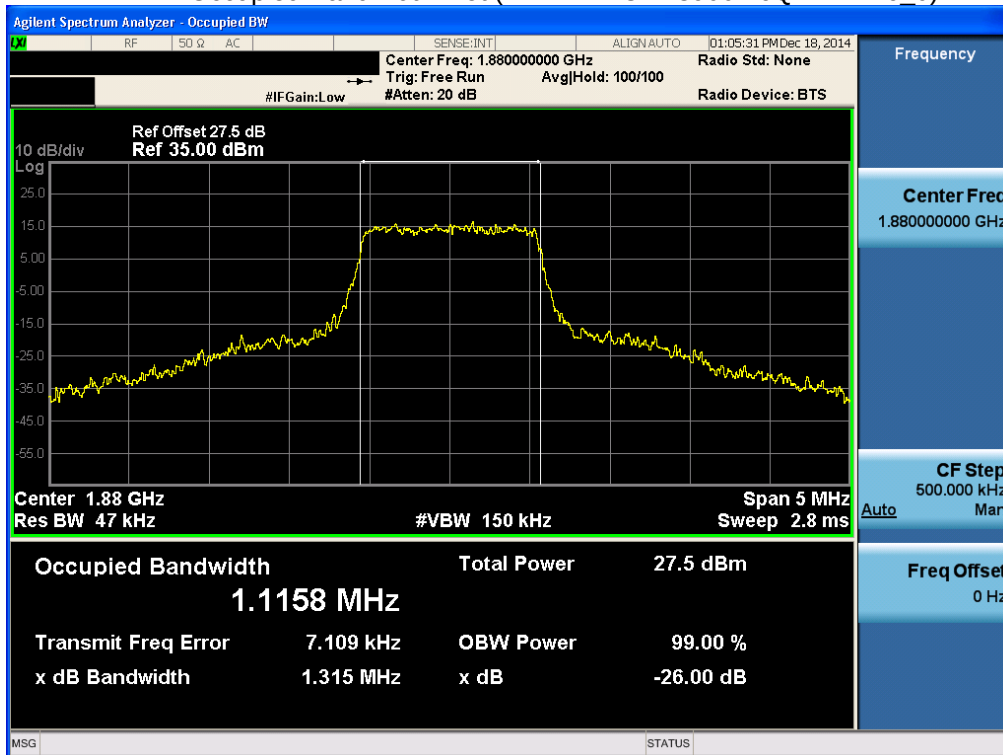


BAND 2. Occupied Bandwidth Plot (3M BW Ch.18900 QPSK RB 15_0)

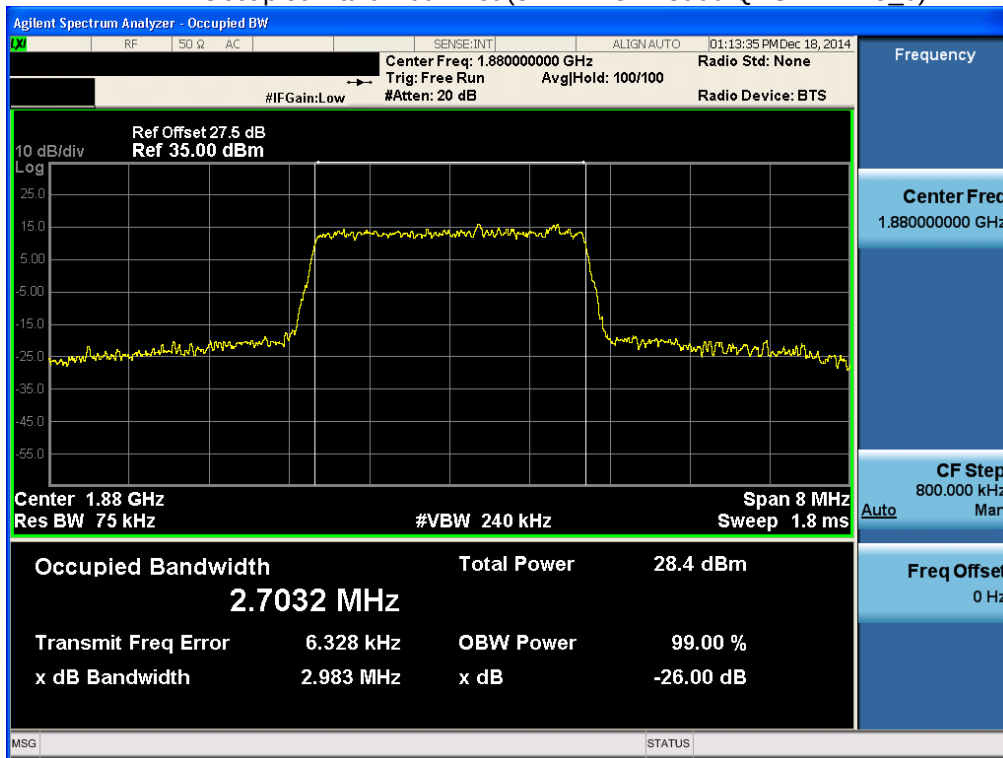


BAND 2. Occupied Bandwidth Plot (3M BW Ch.18900 16QAM RB 15_0)

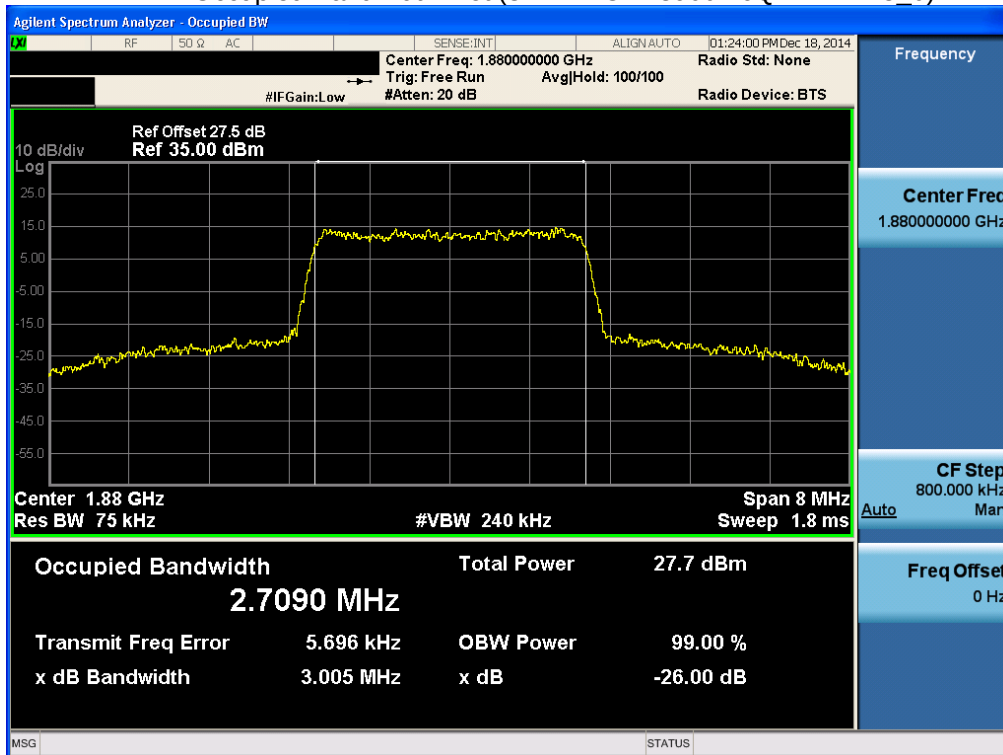


BAND 2. Occupied Bandwidth Plot (5M BW Ch.18900 16QAM RB 25_0)

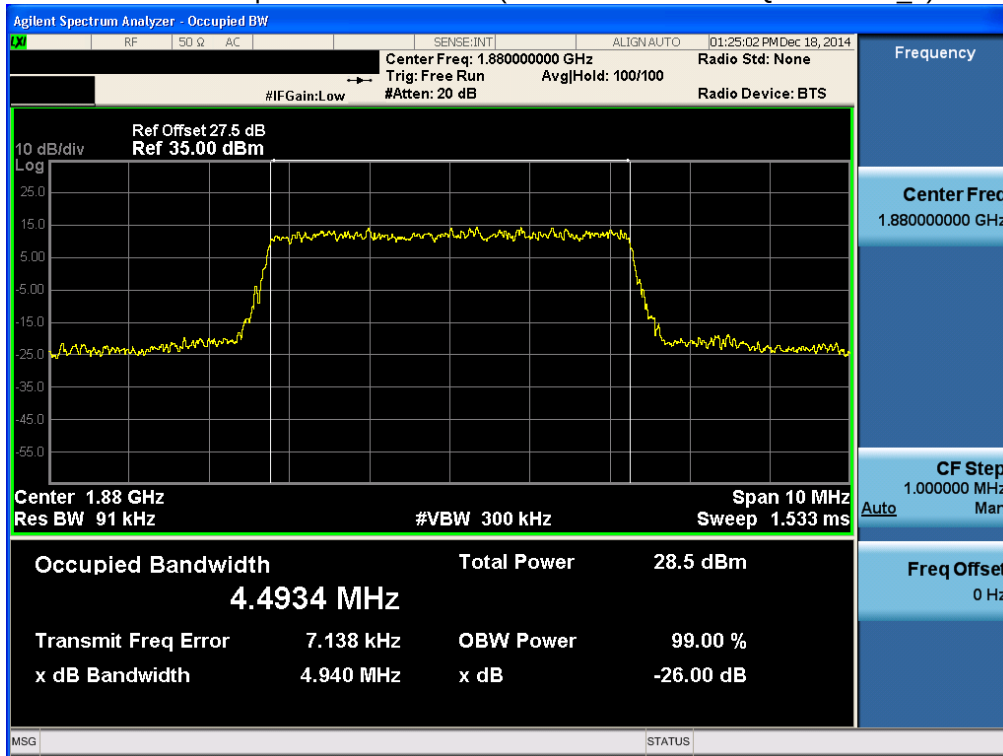


BAND 2. Occupied Bandwidth Plot (5M BW Ch.18900 QPSK RB 25_0)

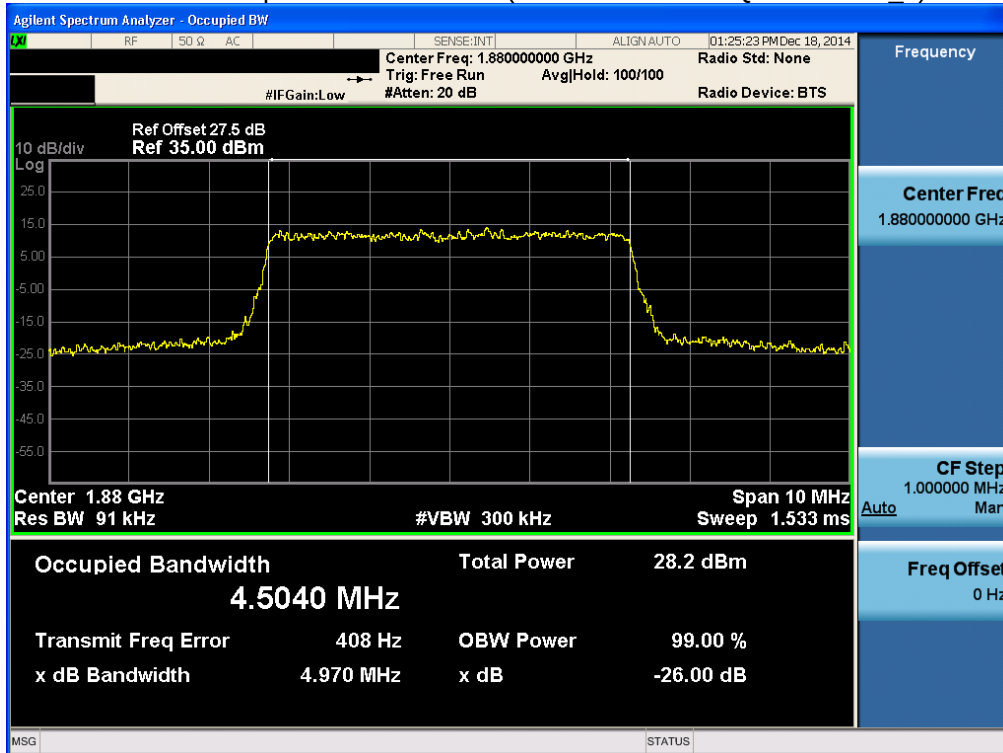


BAND 2. Occupied Bandwidth Plot (10M BW Ch.18900 QPSK RB 50_0)

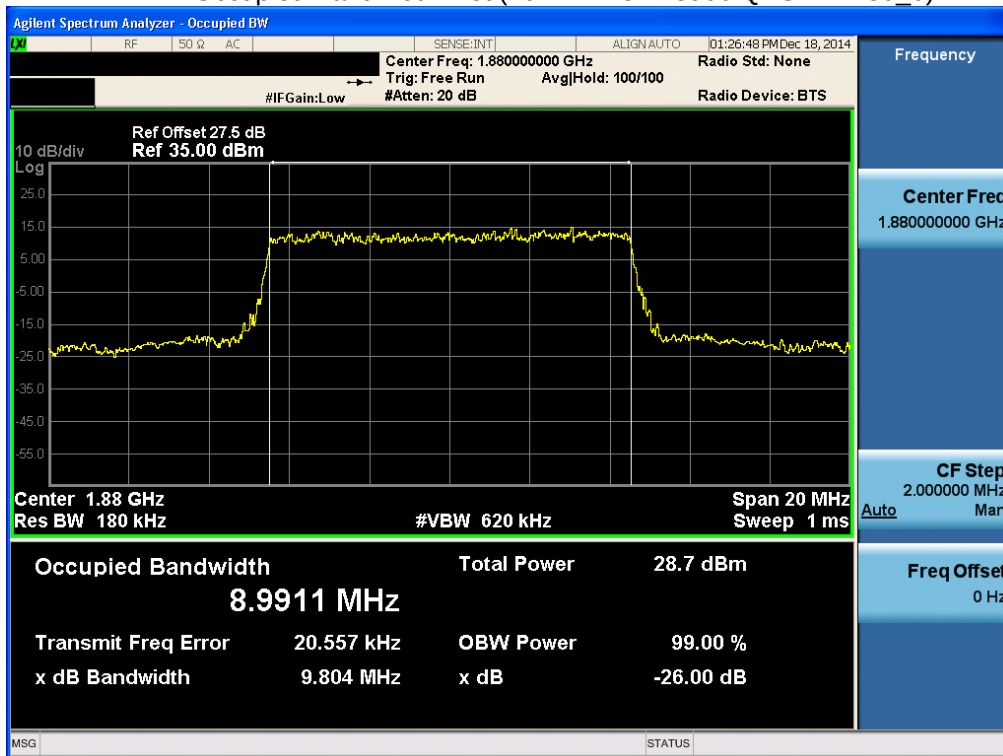


BAND 2. Occupied Bandwidth Plot (10M BW Ch.18900 16QAM RB 50_0)

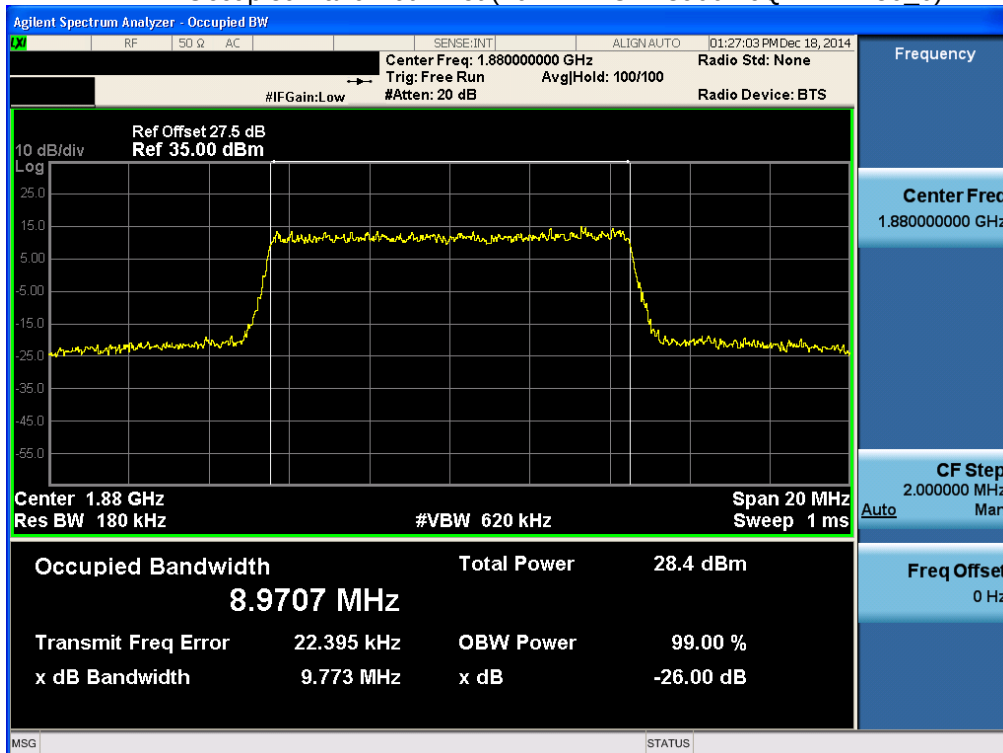


BAND 2. Occupied Bandwidth Plot (15M BW Ch.18900 QPSK RB 75_0)

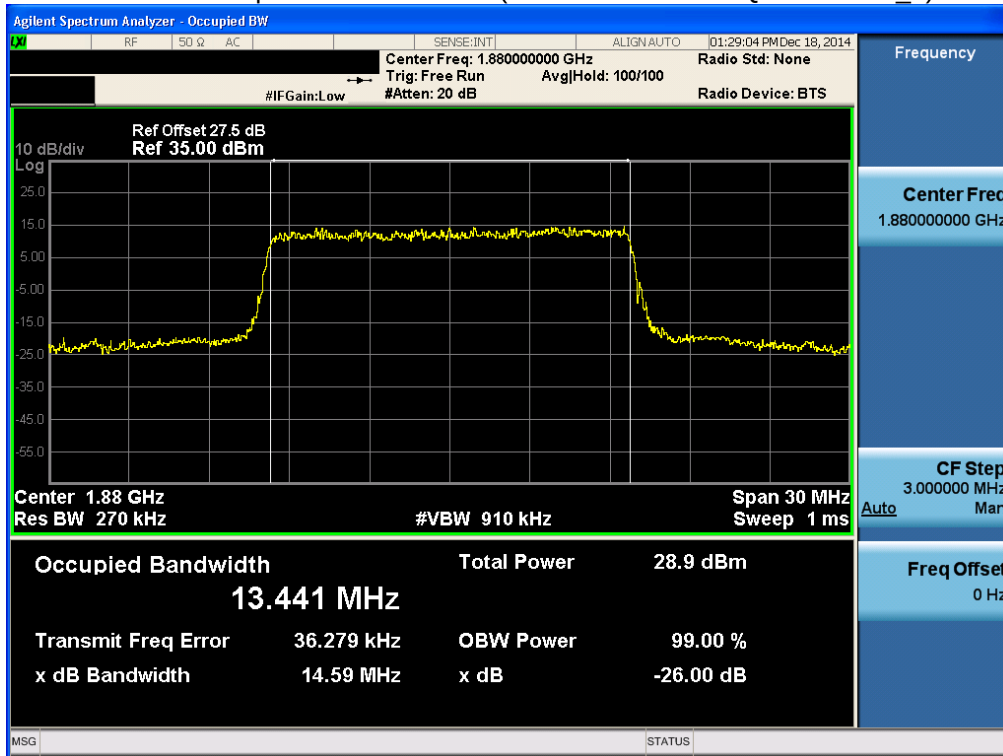


BAND 2. Occupied Bandwidth Plot (15M BW Ch.18900 16QAM RB 75_0)

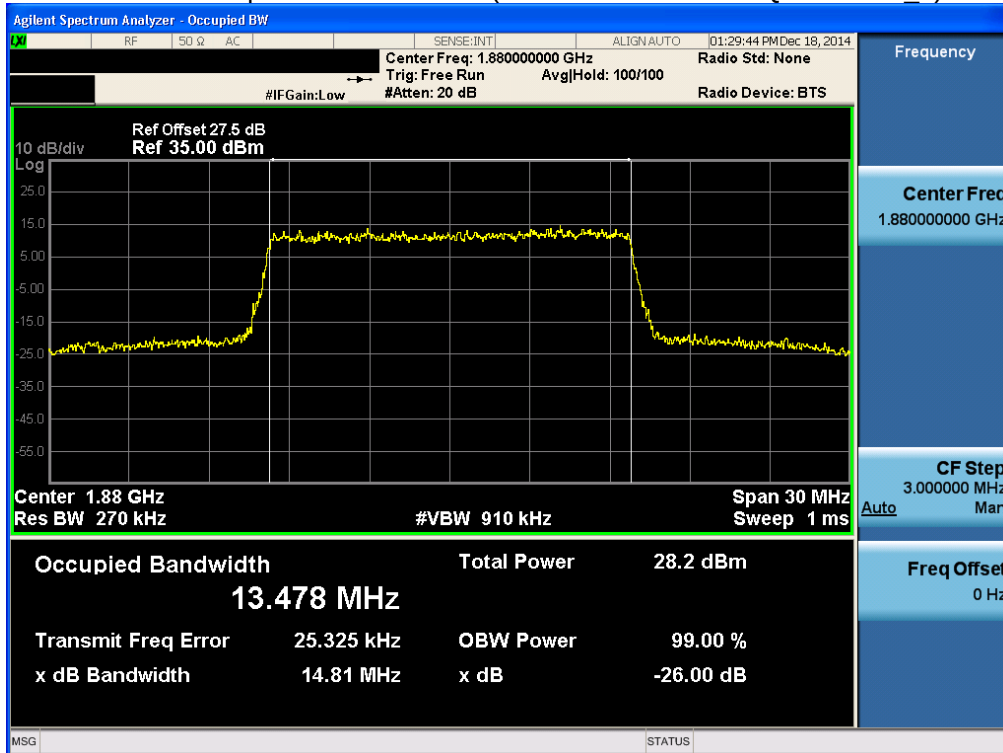


BAND 2. Occupied Bandwidth Plot (20M BW Ch.18900 QPSK RB 100_0)

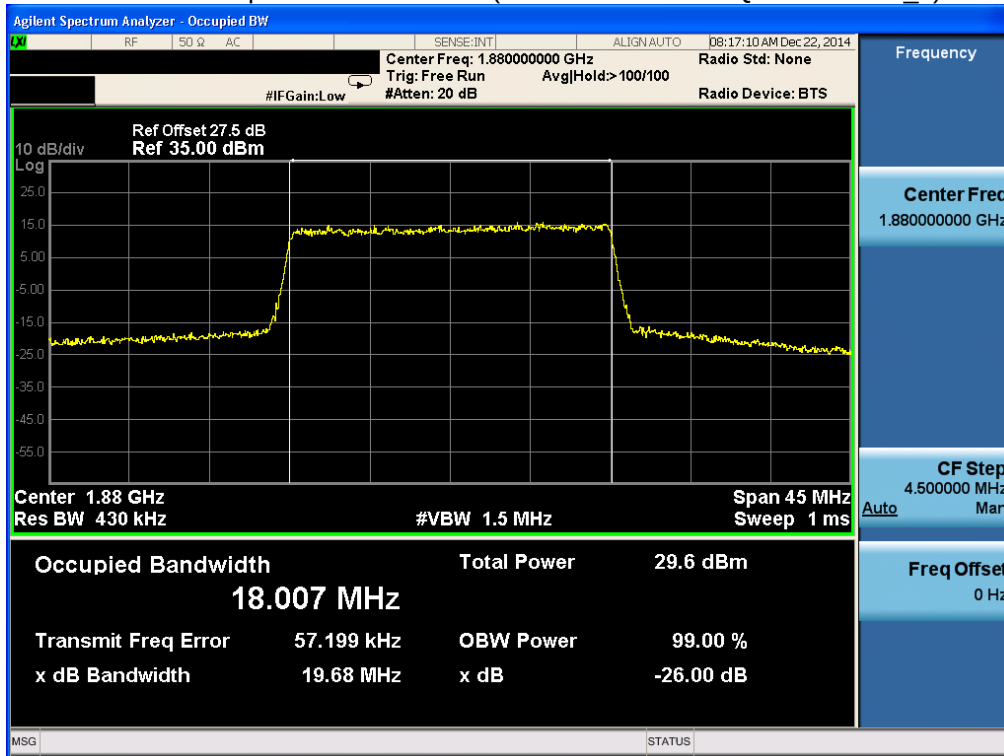


BAND 2. Occupied Bandwidth Plot (20M BW Ch.18900 16QAM RB 100_0)

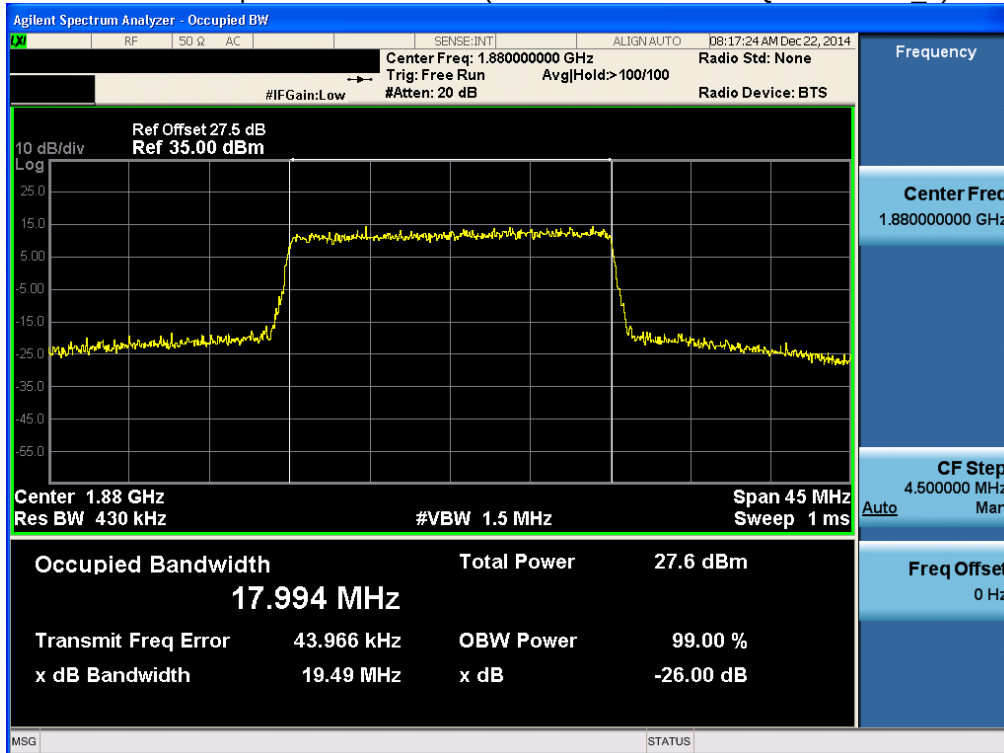


BAND 2. PAR Plot (1.4M BW Ch.18900 QPSK RB 6_0)

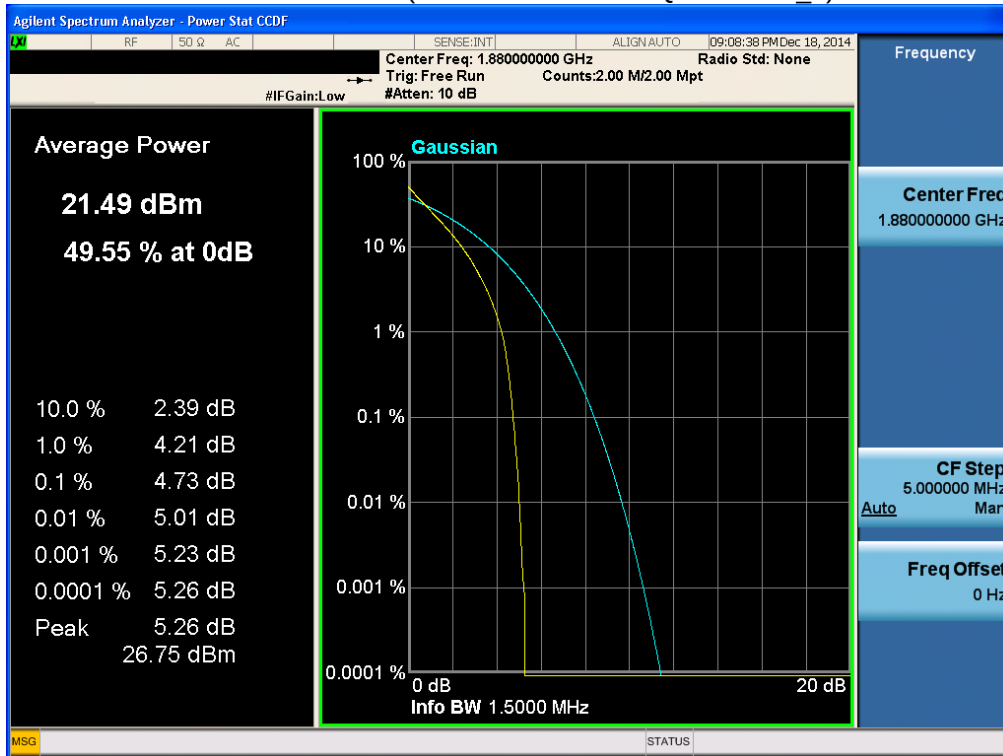


BAND 2. PAR Plot (1.4M BW Ch.18900 16QAM RB 6_0)

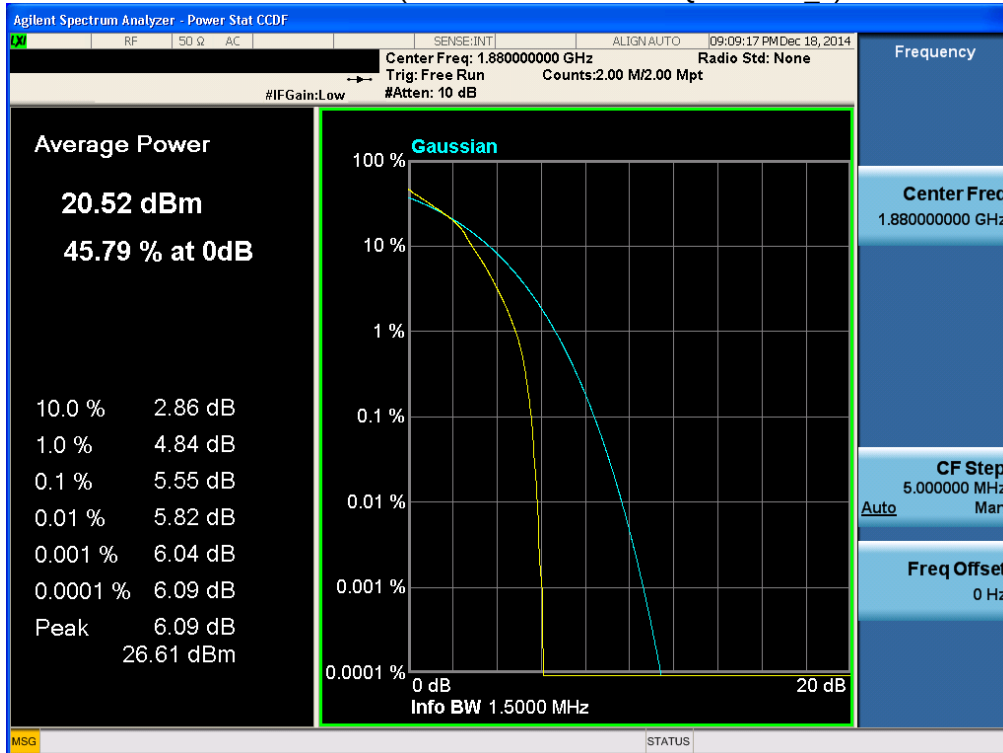


BAND 2. PAR Plot (3M BW Ch.18900 QPSK RB 15_0)

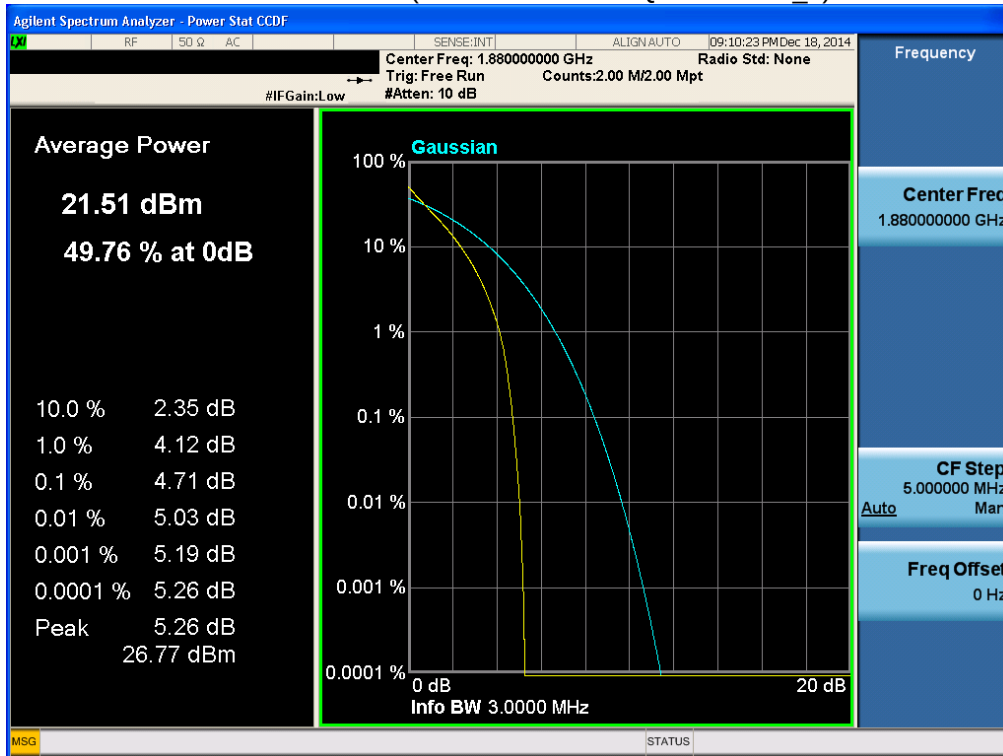


BAND 2. PAR Plot (3M BW Ch.18900 16QAM RB 15_0)

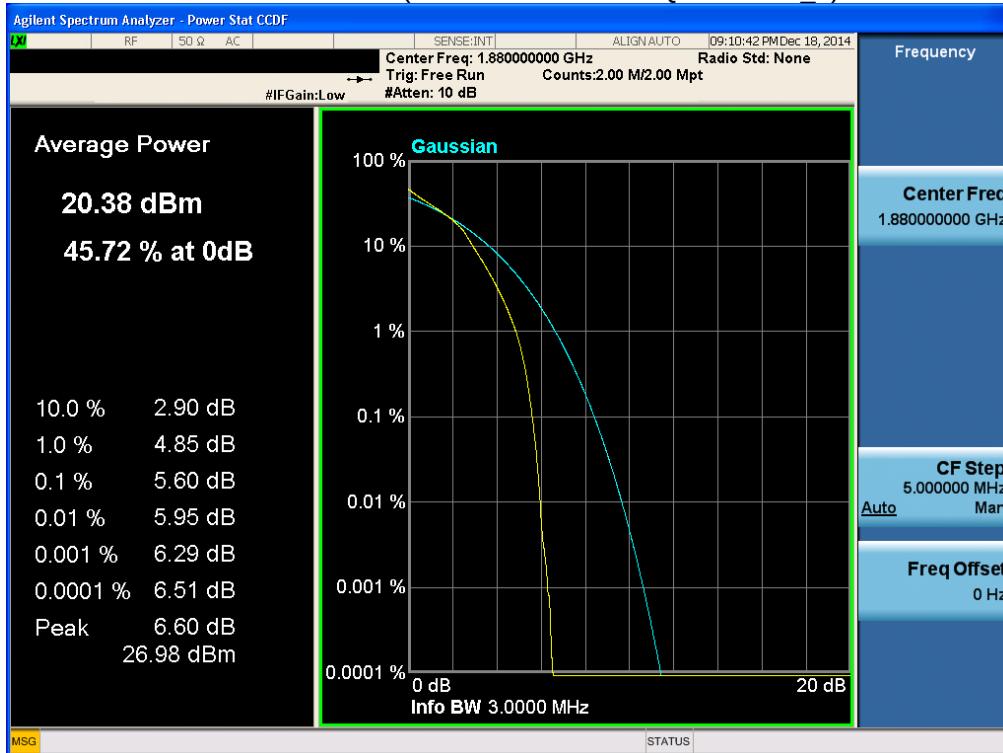


BAND 2. PAR Plot (5M BW Ch.18900 QPSK RB 25_0)

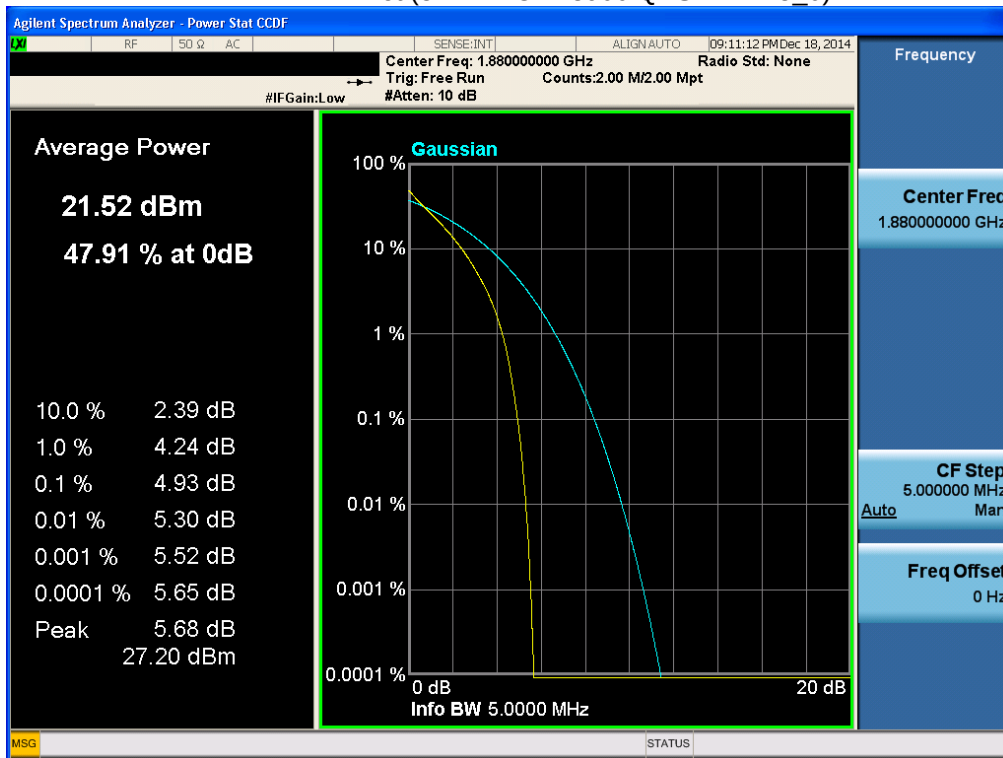


BAND 2. PAR Plot (5M BW Ch.18900 16QAM RB 25_0)

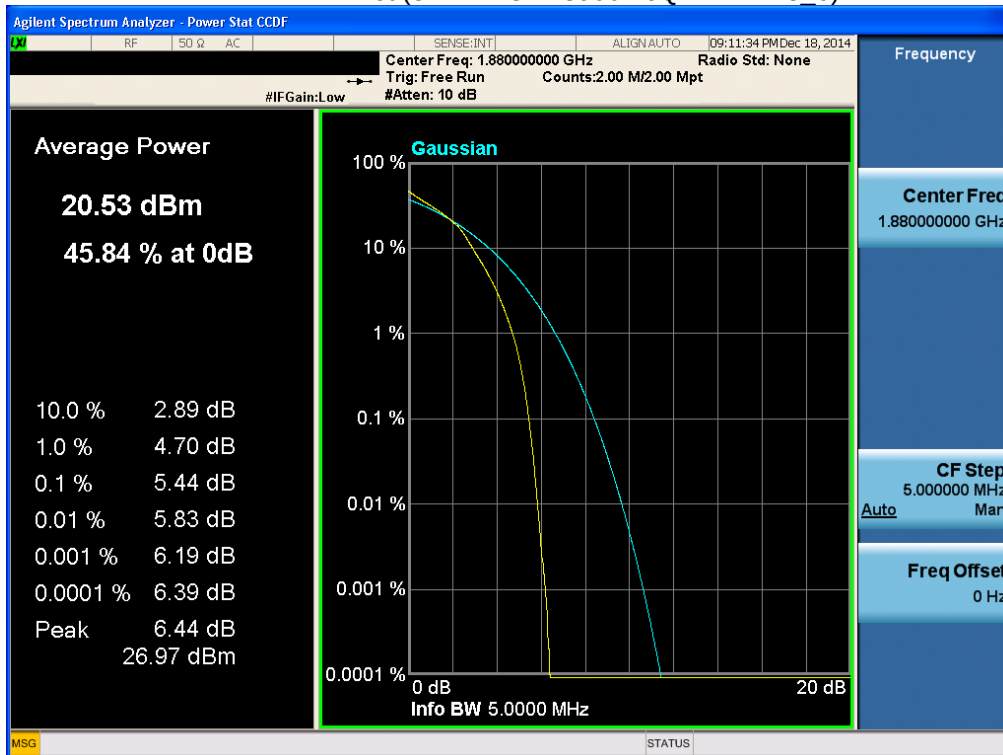


BAND 2. PAR Plot (10M BW Ch.18900 QPSK RB 50_0)

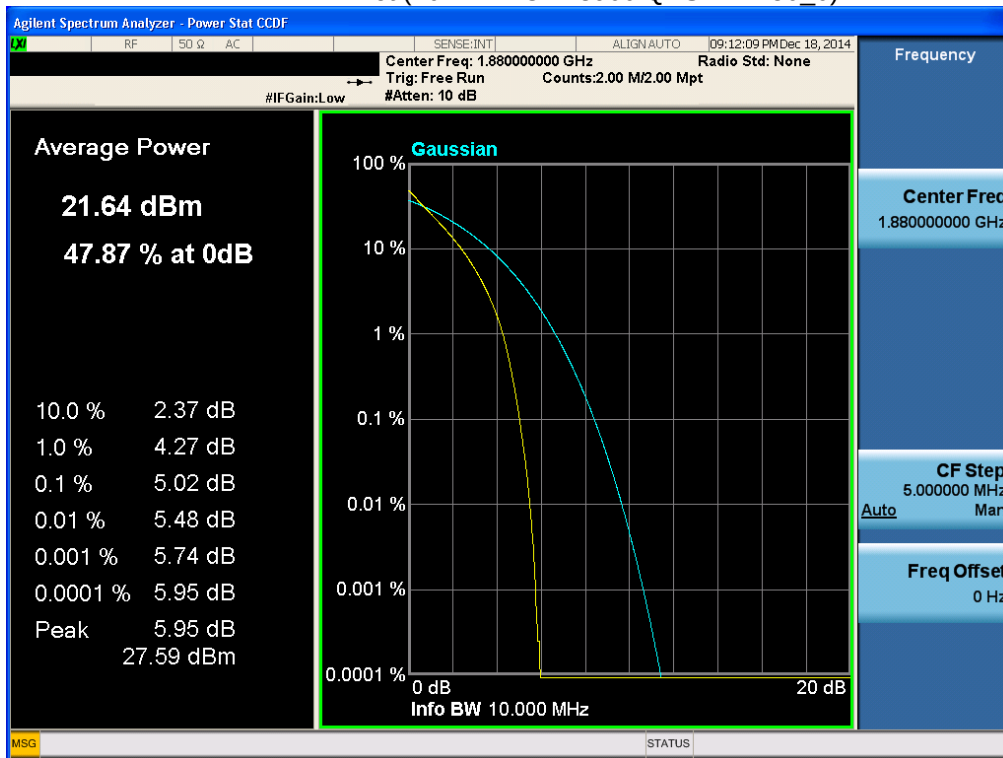


BAND 2. PAR Plot (10M BW Ch.18900 16QAM RB 50_0)

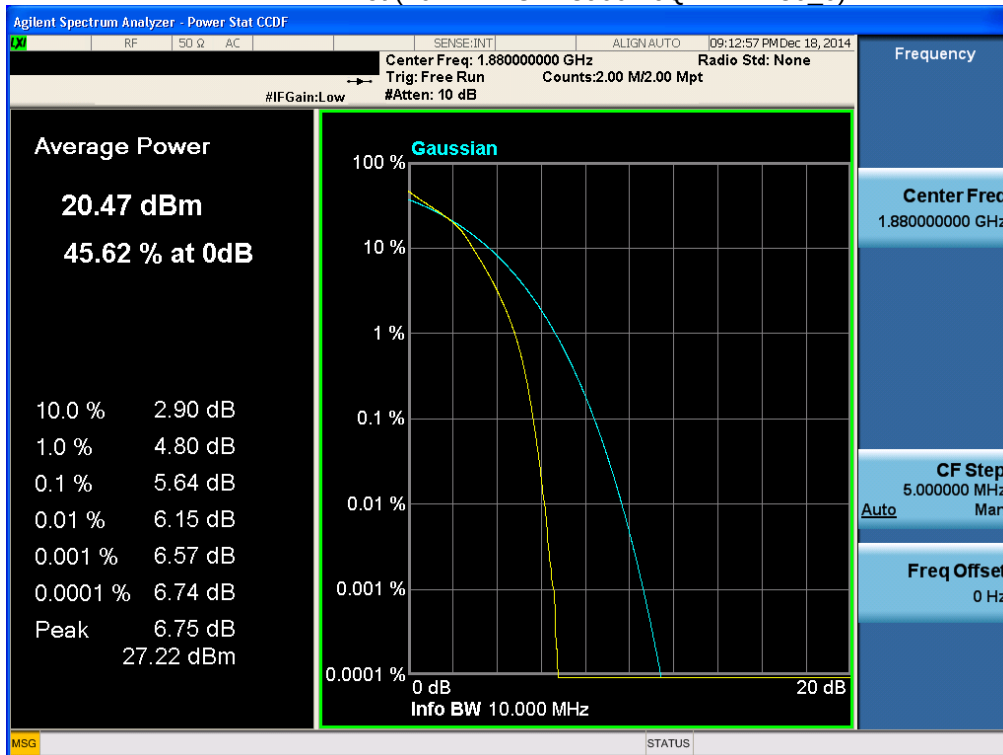


BAND 2. PAR Plot (15M BW Ch.18900 QPSK RB 75_0)

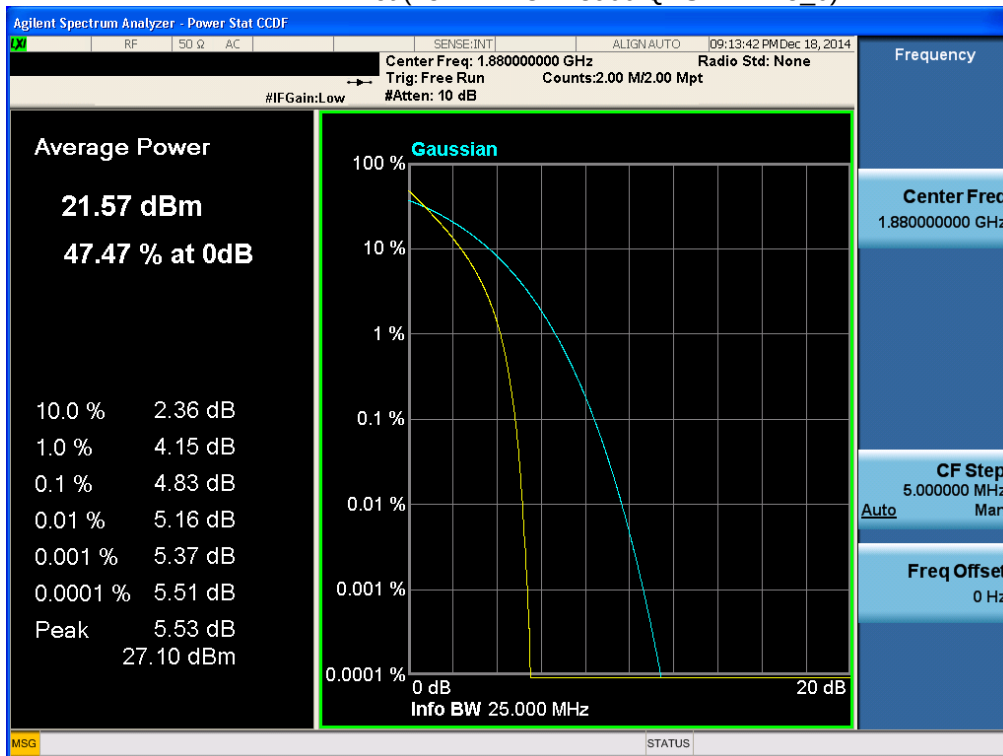


BAND 2. PAR Plot (15M BW Ch.18900 16QAM RB 75_0)

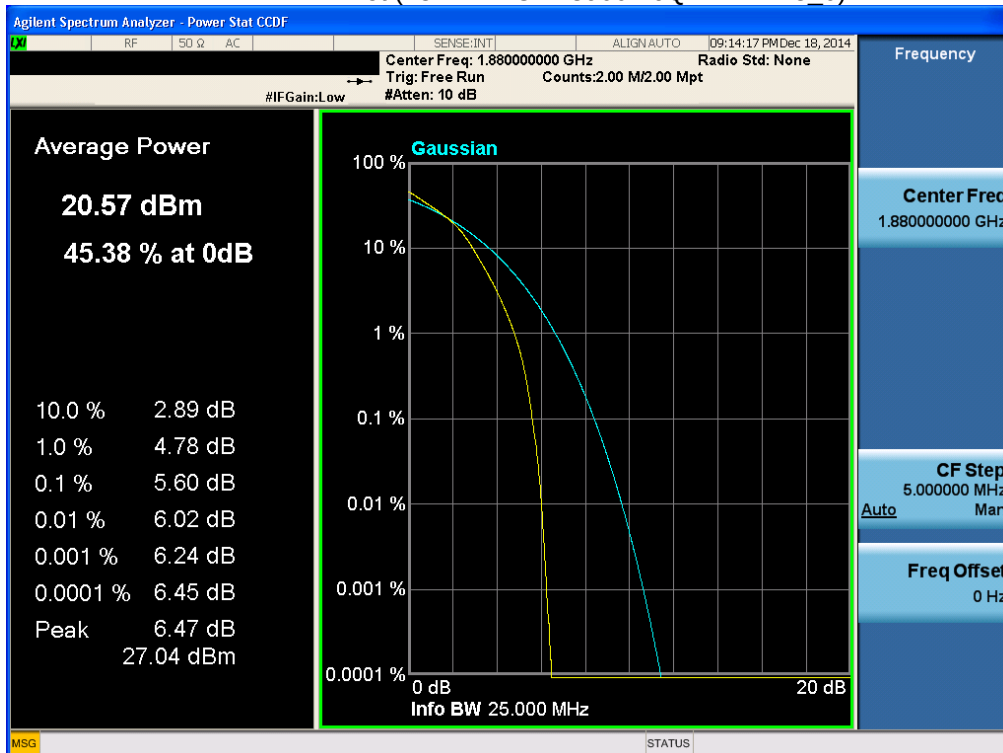


BAND 2. PAR Plot (20M BW Ch.18900 QPSK RB 100_0)

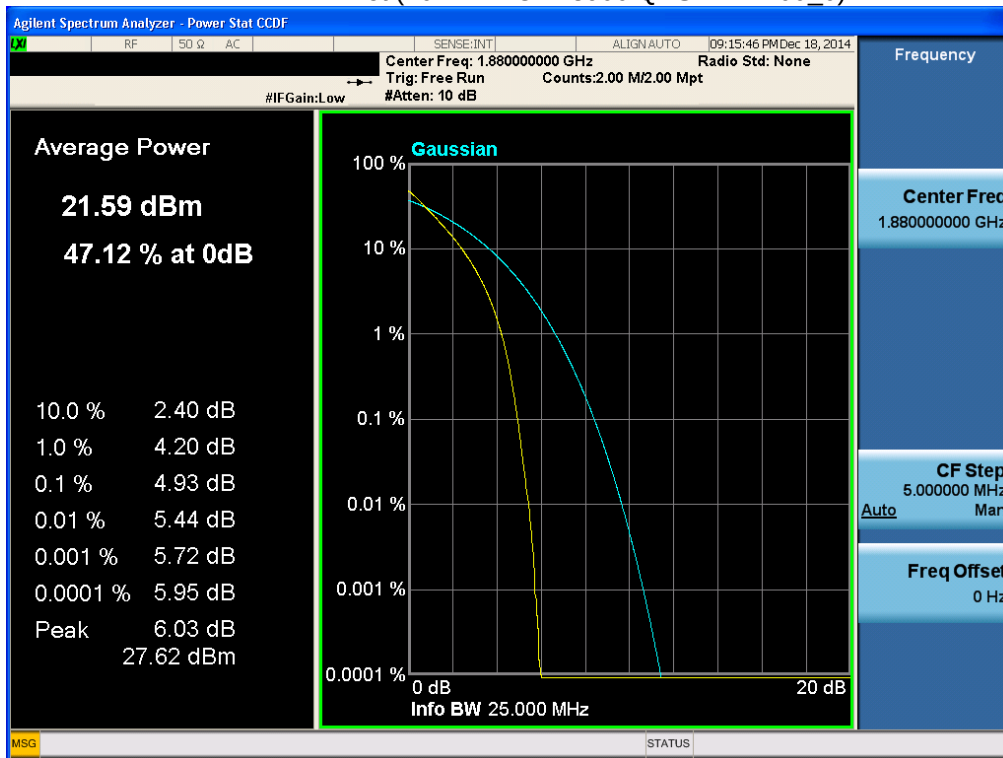


BAND 2. PAR Plot (20M BW Ch.18900 16QAM RB 100_0)

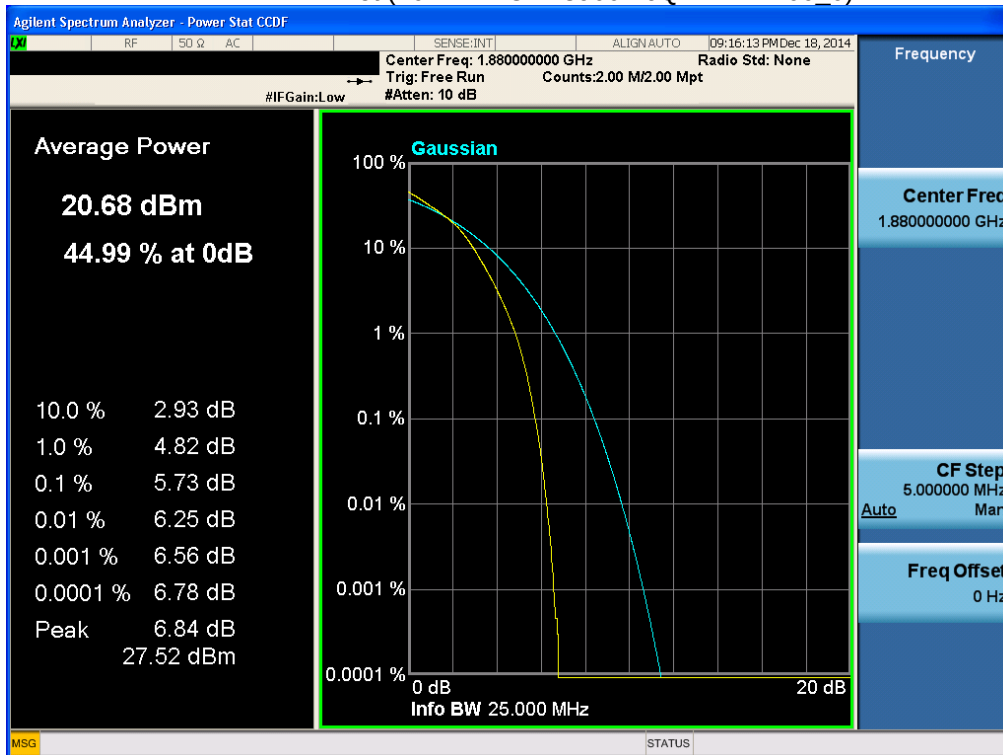

BAND 2. Lower Band Edge Plot (1.4M BW Ch.18607 QPSK_RB1_Offset 0) -1

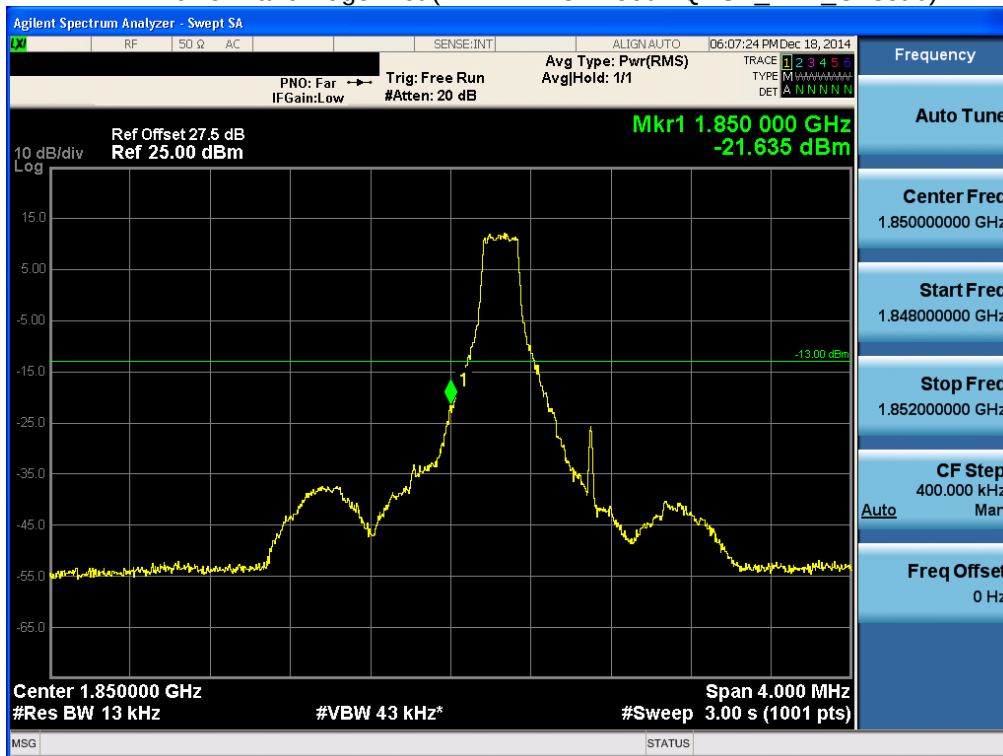


BAND 2. Lower Band Edge Plot (1.4M BW Ch.18607 QPSK_RB6_Offset 0) -2

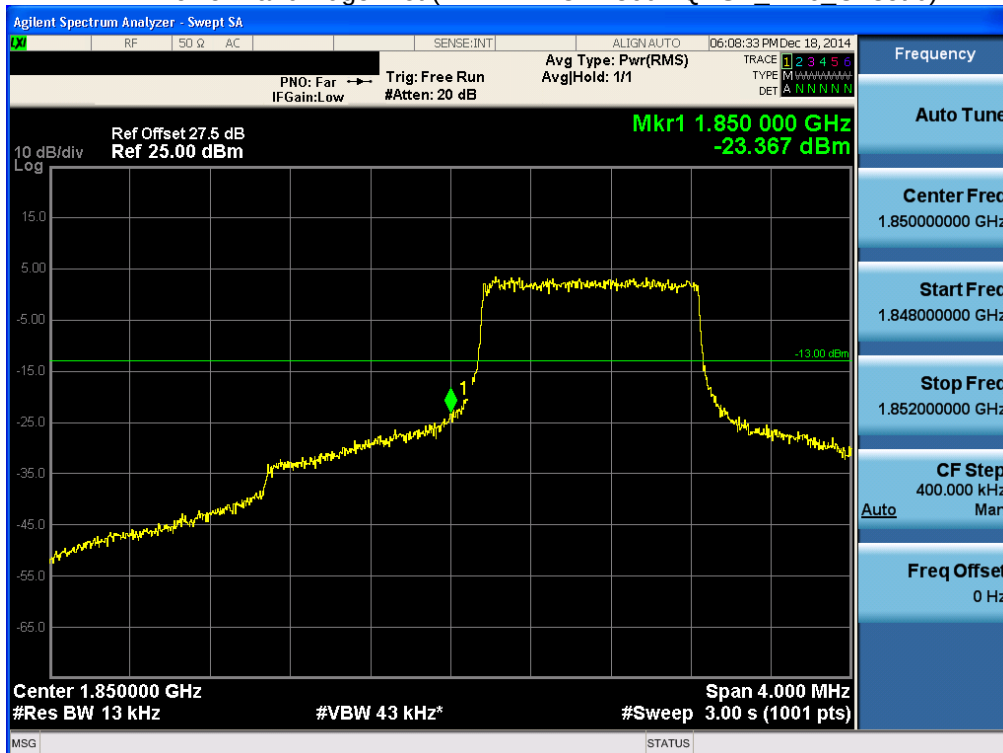


BAND 2. Lower Extended Band Edge Plot (1.4M BW Ch.18607 QPSK_RB6_0) -3




BAND 2. Lower Band Edge Plot (3M BW Ch.18615 QPSK_RB1_Offset 0) -1

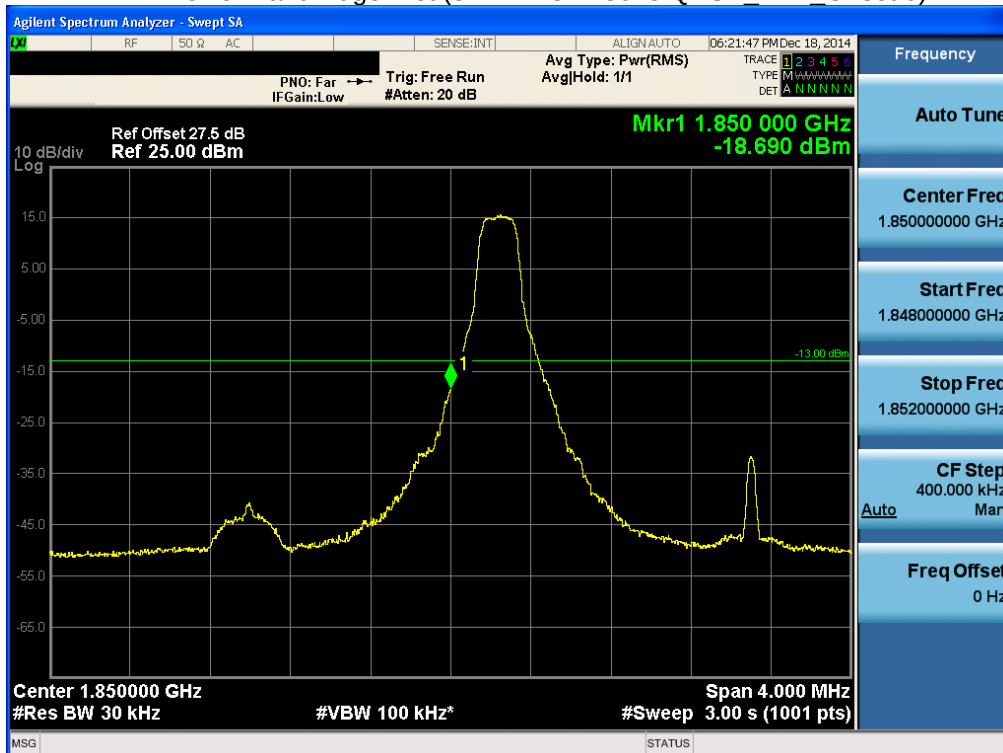


BAND 2. Lower Band Edge Plot (3M BW Ch.18615 QPSK_RB15_Offset 0) -2

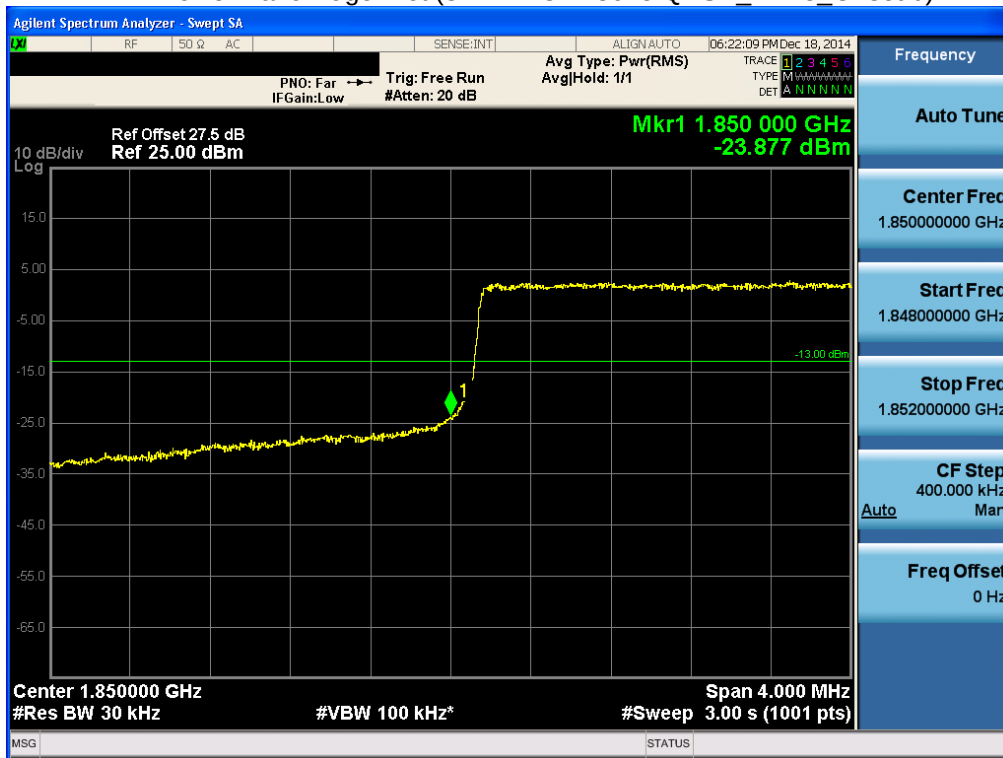


BAND 2. Lower Extended Band Edge Plot (3M BW Ch.18615 QPSK_RB15_0) -3

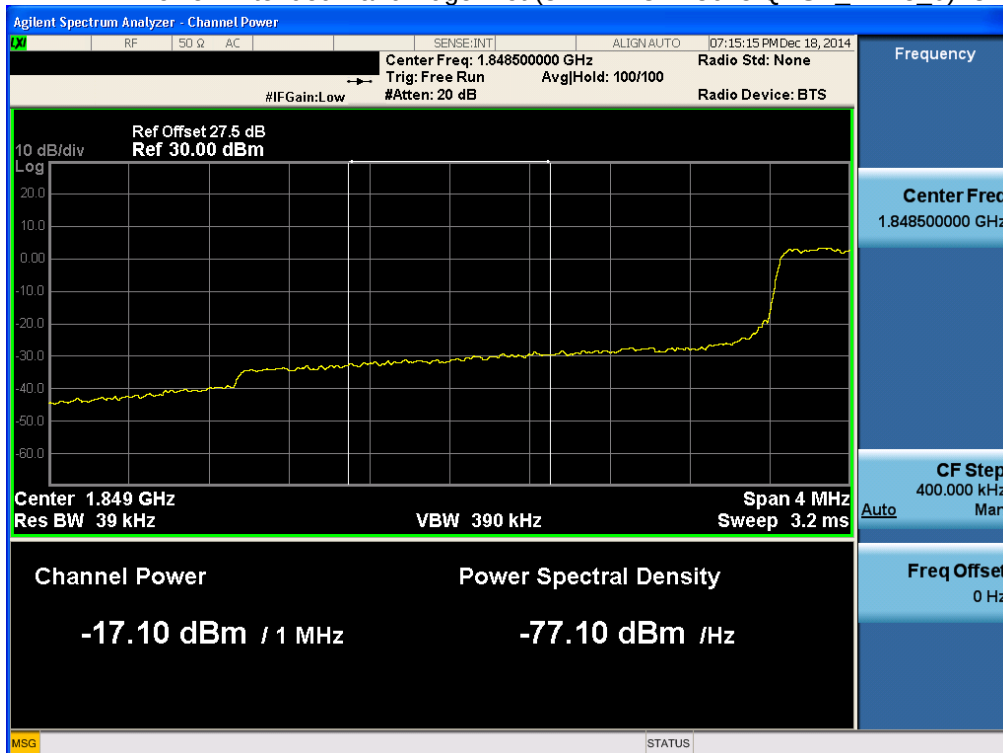


BAND 2. Lower Band Edge Plot (5M BW Ch.18625 QPSK_RB1_Offset 0) -1

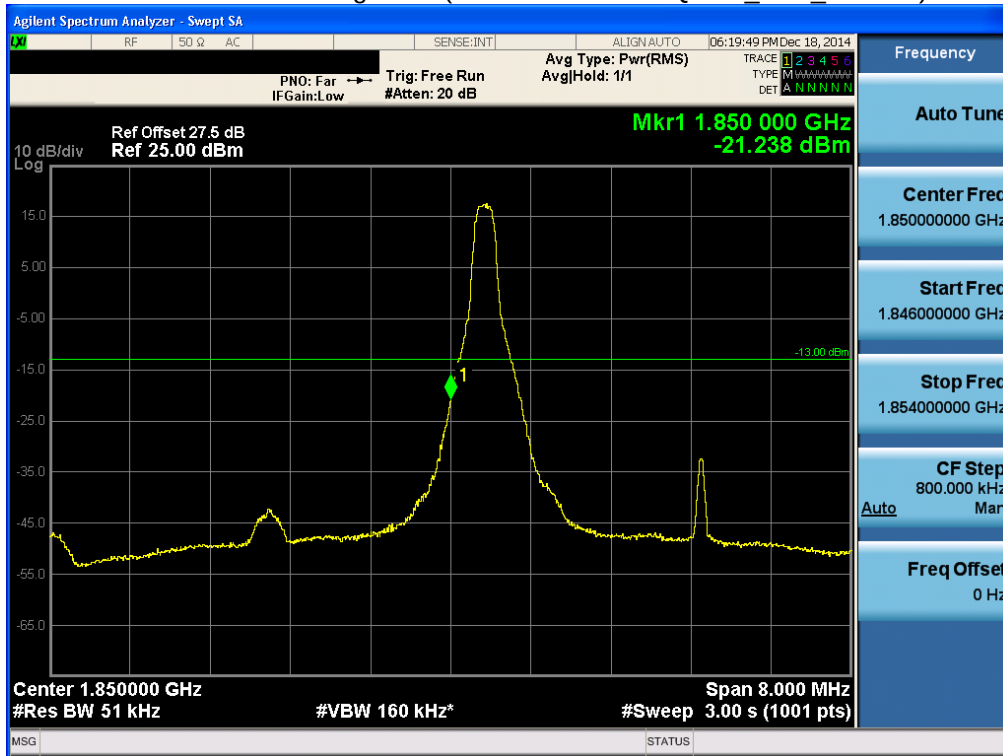


BAND 2. Lower Band Edge Plot (5M BW Ch.18625 QPSK_RB25_Offset 0) -2

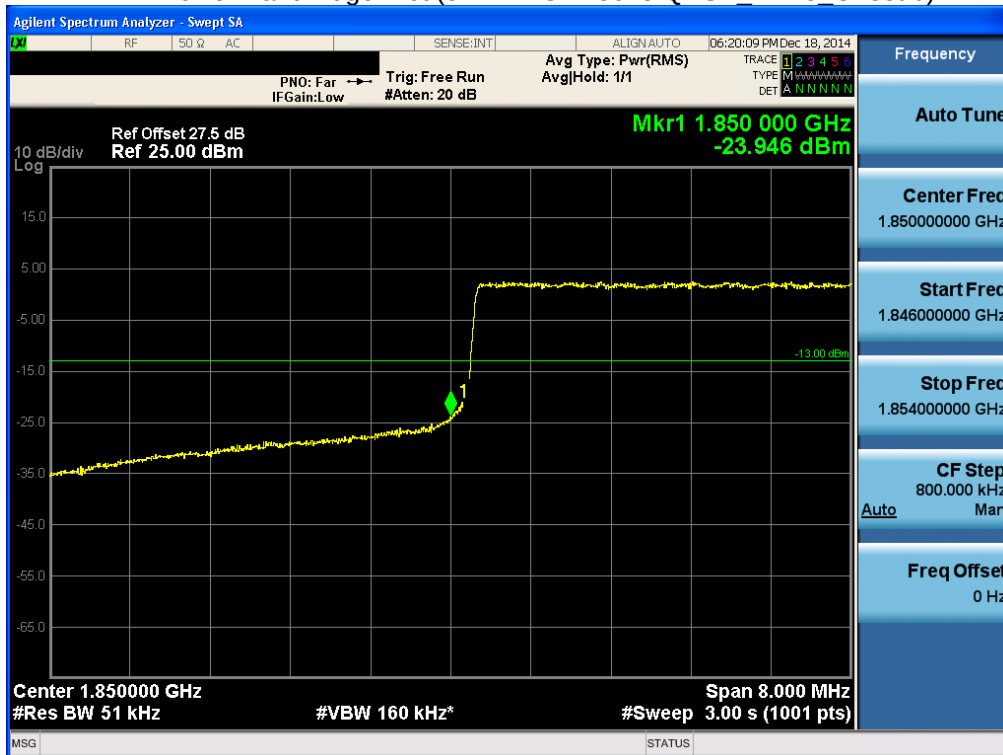


BAND 2. Lower Extended Band Edge Plot (5M BW Ch.18625 QPSK_RB25_0) -3

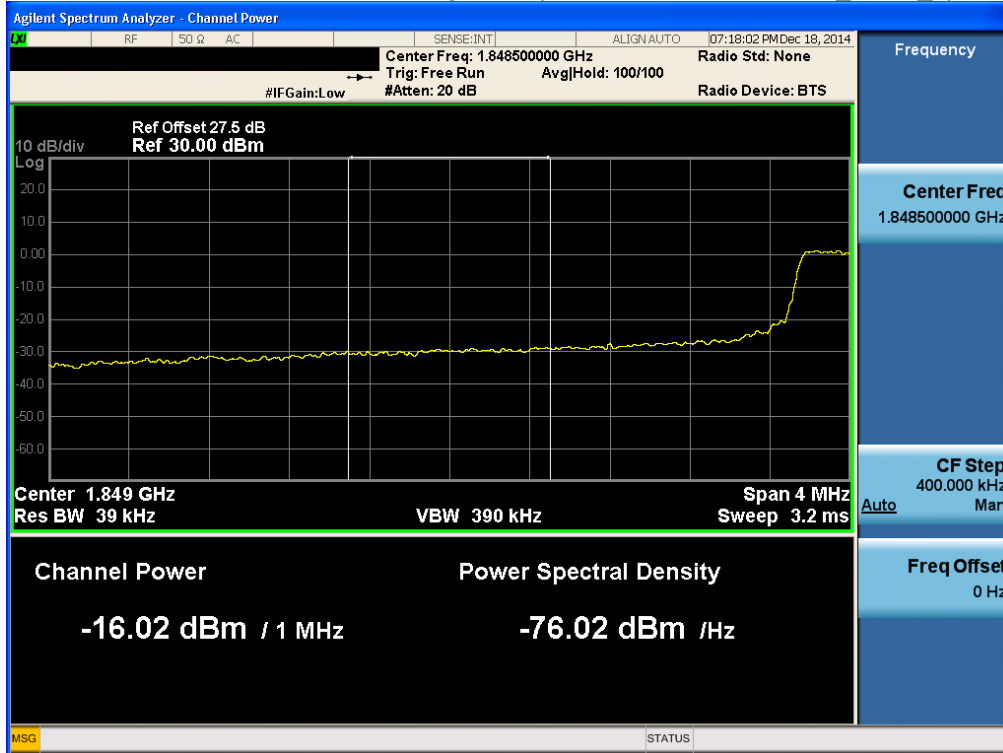

BAND 2. Lower Band Edge Plot (10M BW Ch.18650 QPSK_RB1_Offset 0) -1

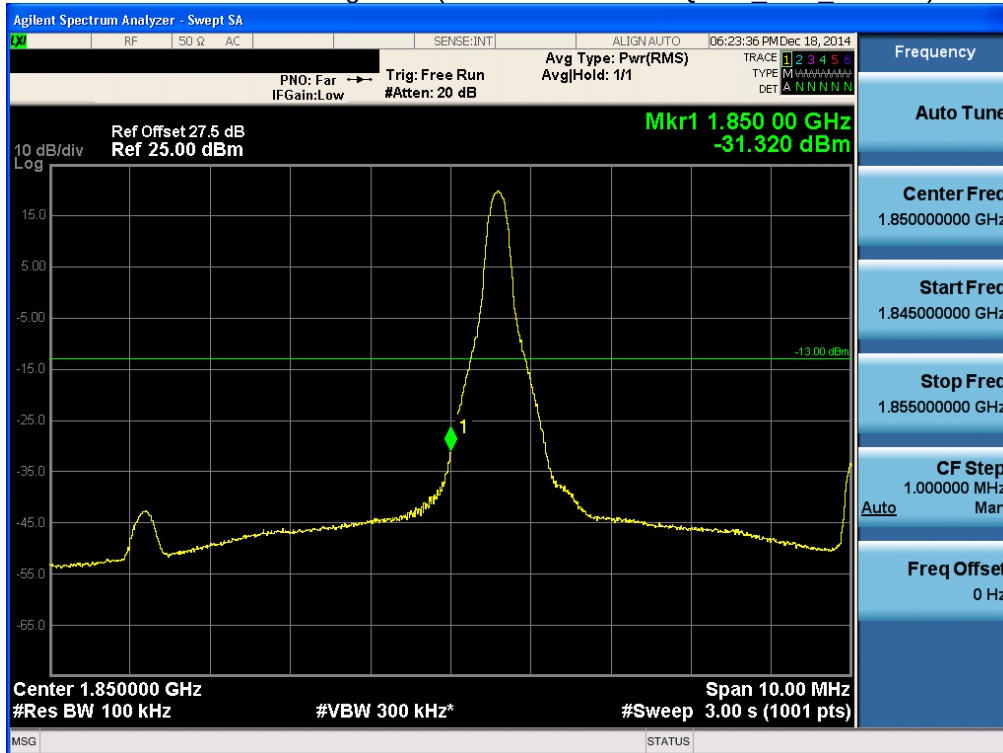


BAND 2. Lower Band Edge Plot (10M BW Ch.18650 QPSK_RB50_Offset 0) -2

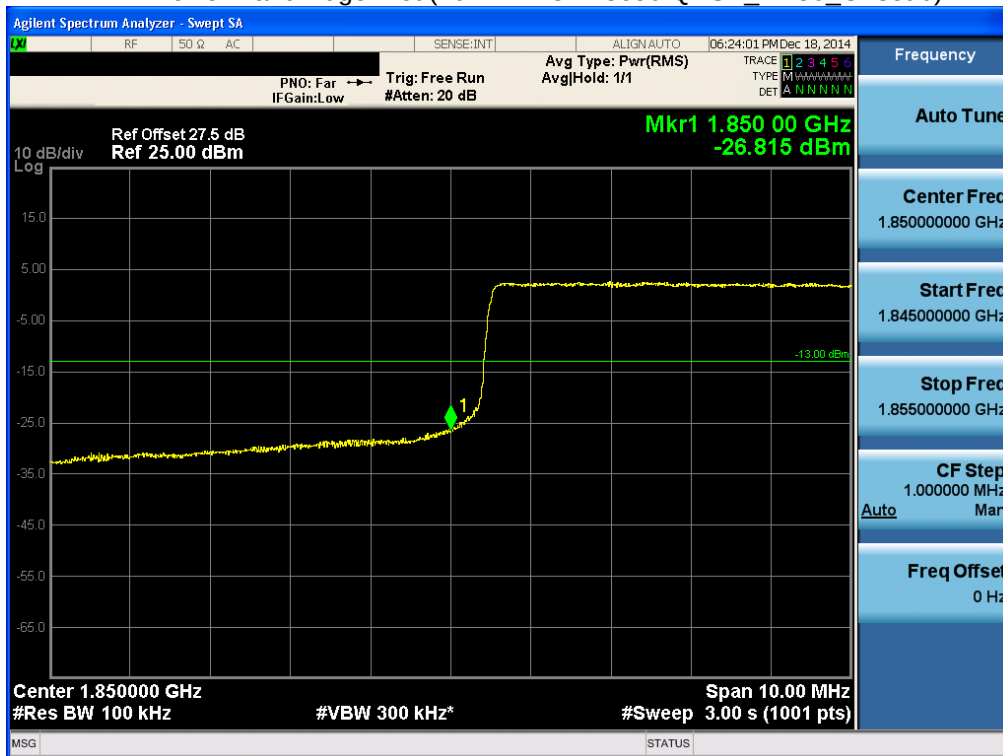


BAND 2. Lower Extended Band Edge Plot (10M BW Ch.18650 QPSK_RB50_0) -3




BAND 2. Lower Band Edge Plot (15M BW Ch.18675 QPSK_RB1_Offset 0) -1

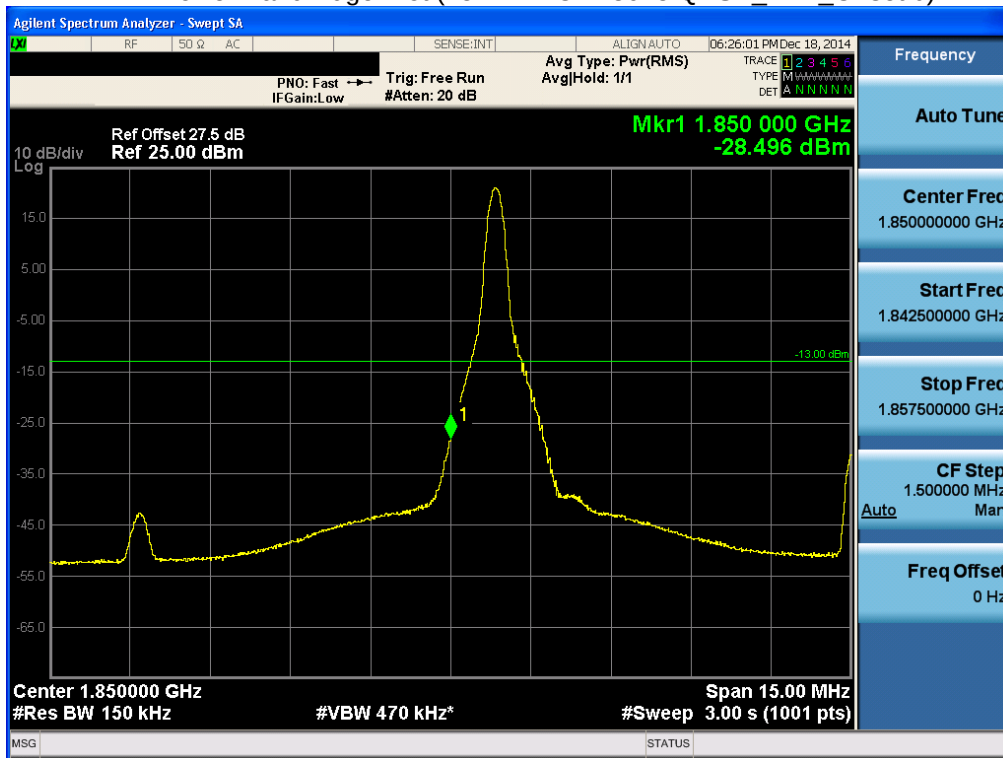


BAND 2. Lower Band Edge Plot (15M BW Ch.18675 QPSK_RB75_Offset 0) -2

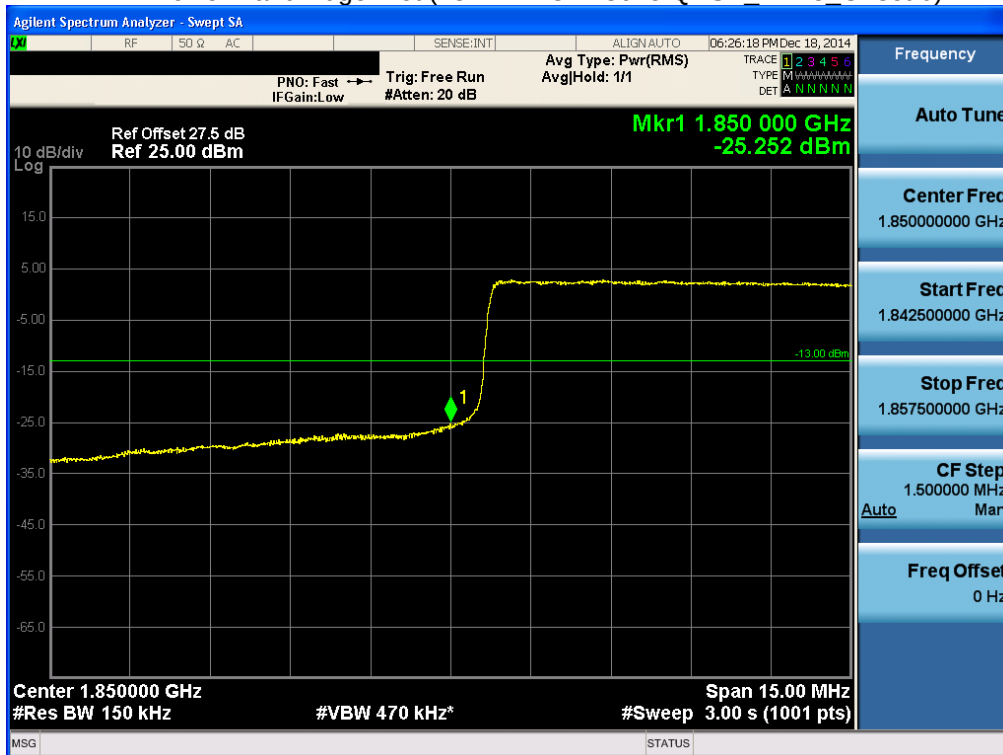


BAND 2. Lower Extended Band Edge Plot (15M BW Ch.18675 QPSK_RB75_0) -3

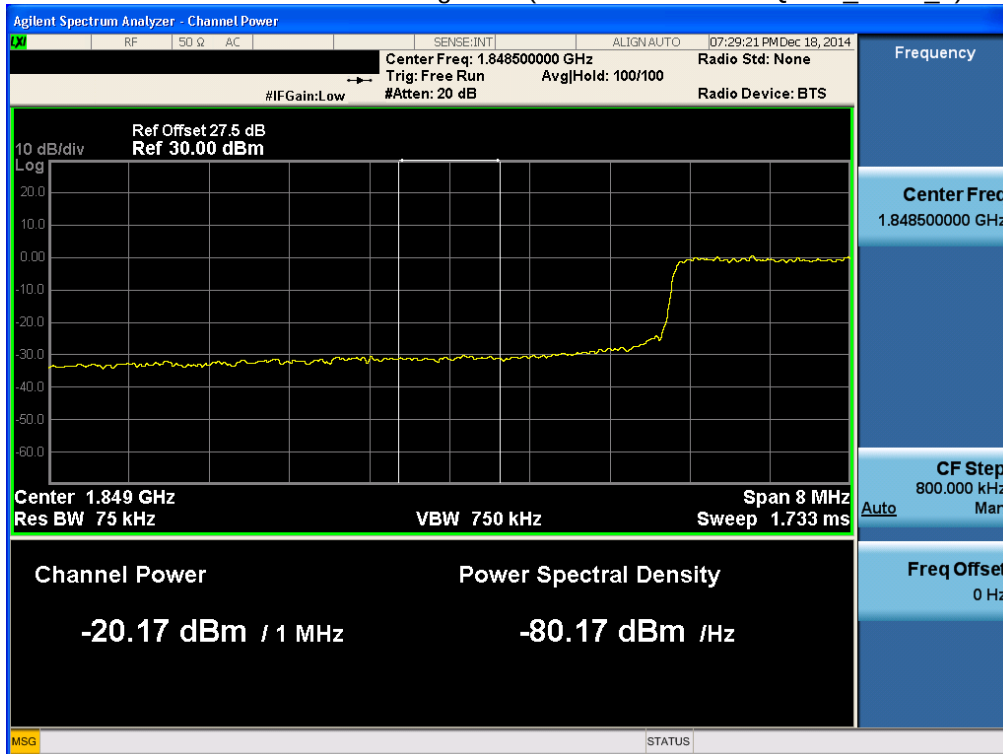


BAND 2. Lower Band Edge Plot (20M BW Ch.18700 QPSK_RB1_Offset 0) -1

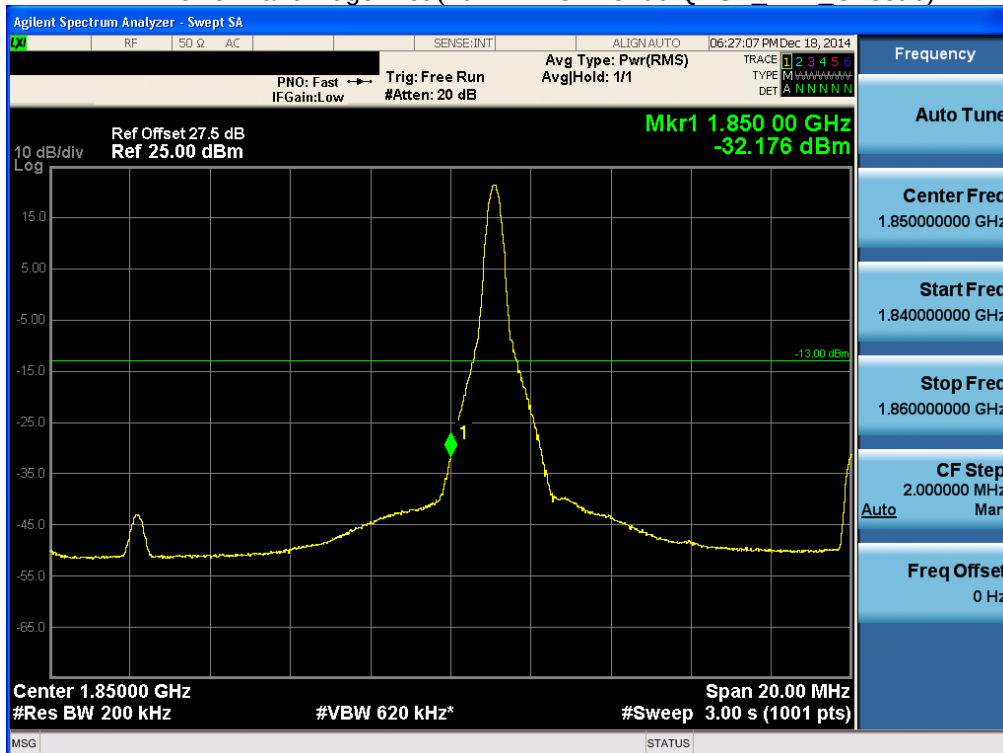


BAND 2. Lower Band Edge Plot (20M BW Ch.18700 QPSK_RB100_Offset 0) -2

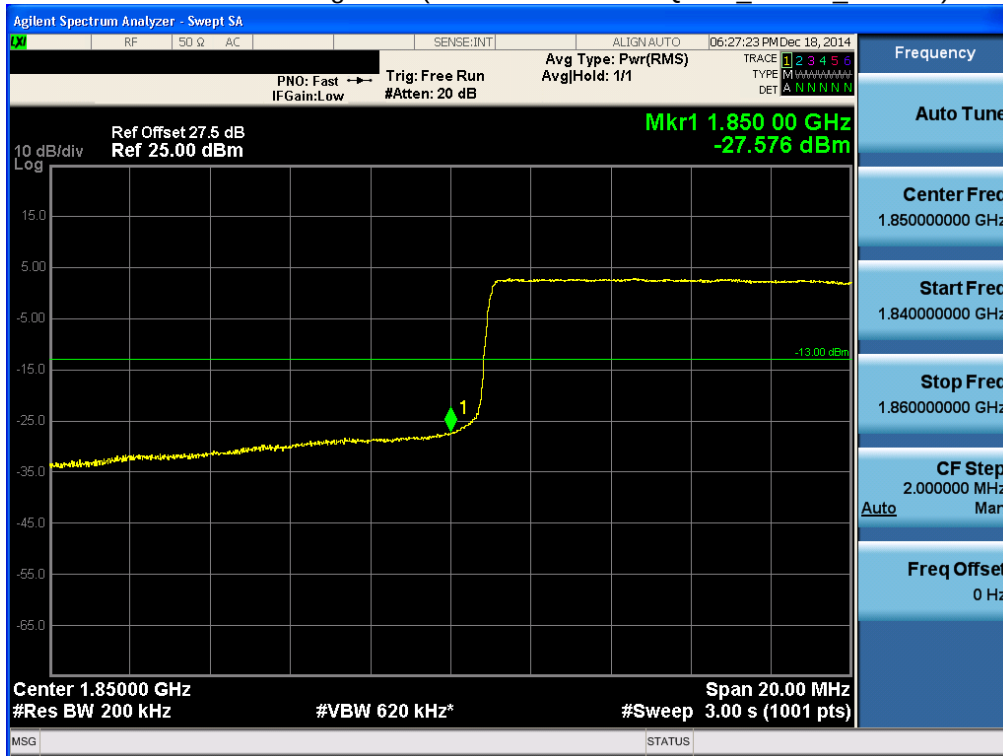


BAND 2. Lower Extended Band Edge Plot (20M BW Ch.18700 QPSK_RB100_0) -3

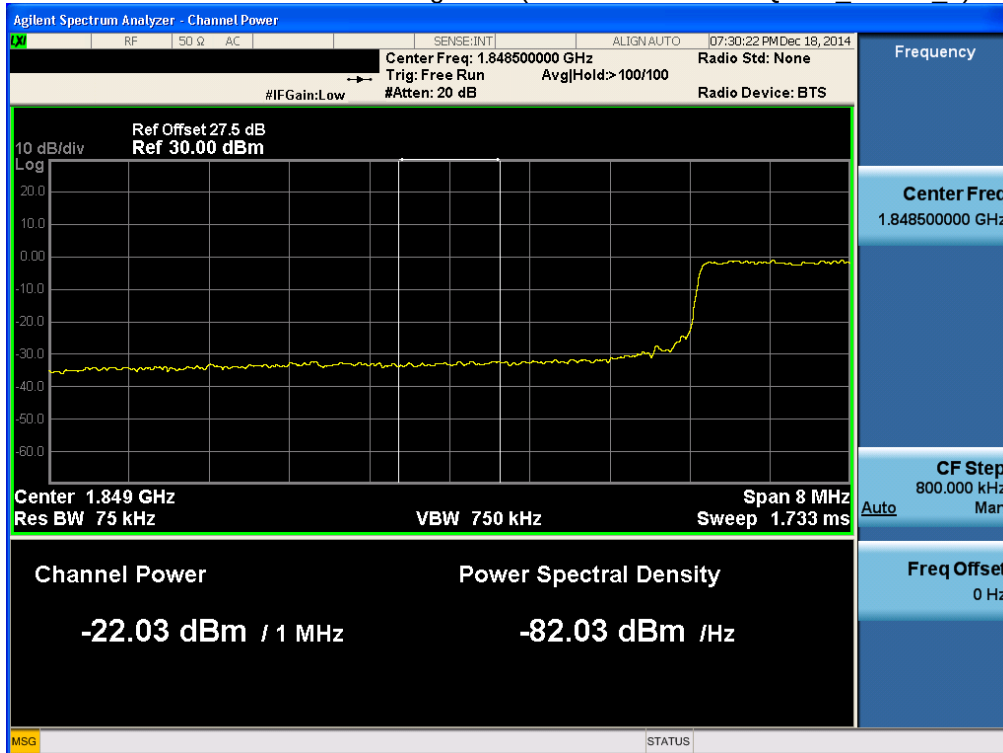

BAND 2. Upper Band Edge Plot (1.4M BW Ch.19193 QPSK_RB1_Offset 5) -1

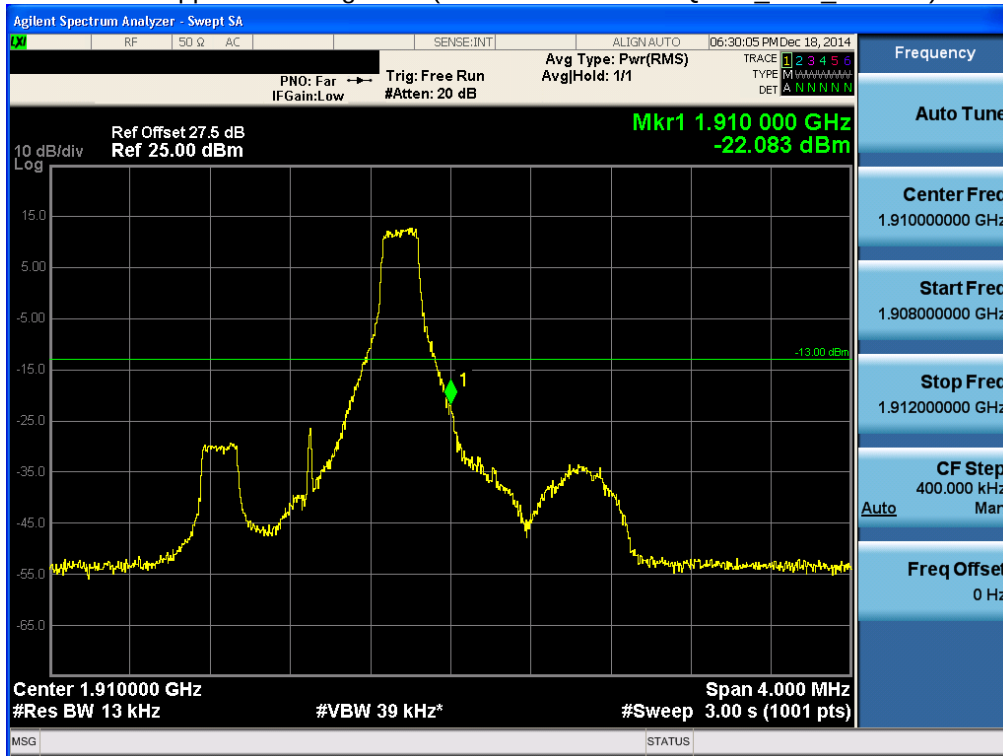


BAND 2. Upper Band Edge Plot (1.4M BW Ch.19193 QPSK_RB6_Offset 0) -2

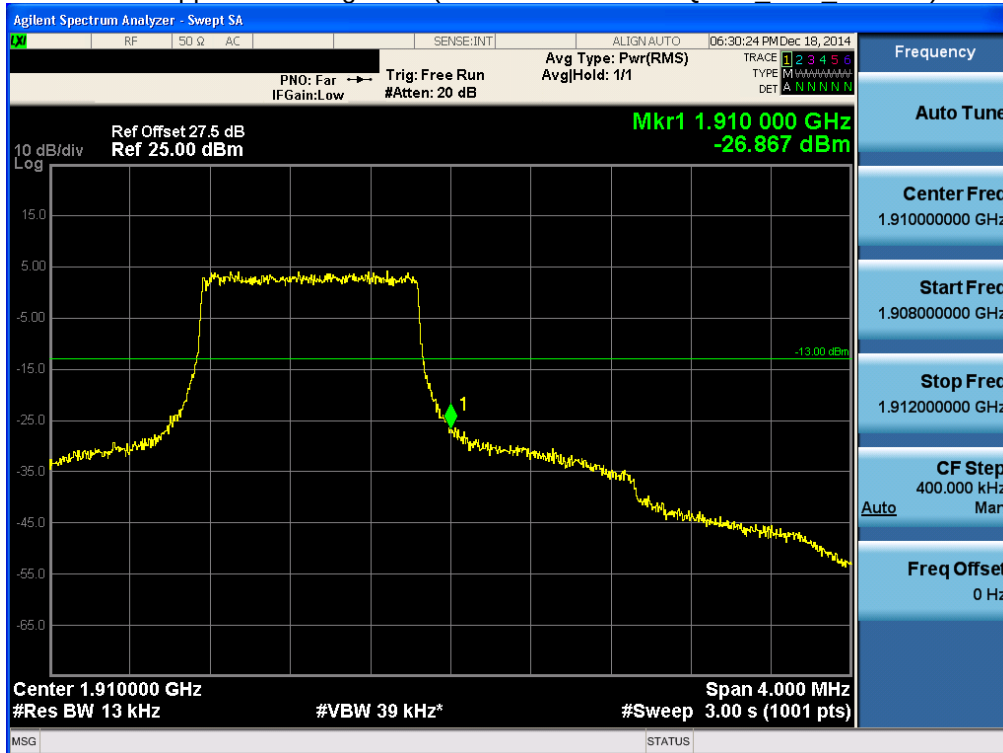

BAND 2. Upper Extended Band Edge Plot (1.4M BW Ch.19193 QPSK_RB6_0) -3




BAND 2. Upper Band Edge Plot (3M BW Ch.19185 QPSK_RB1_Offset 14) -1

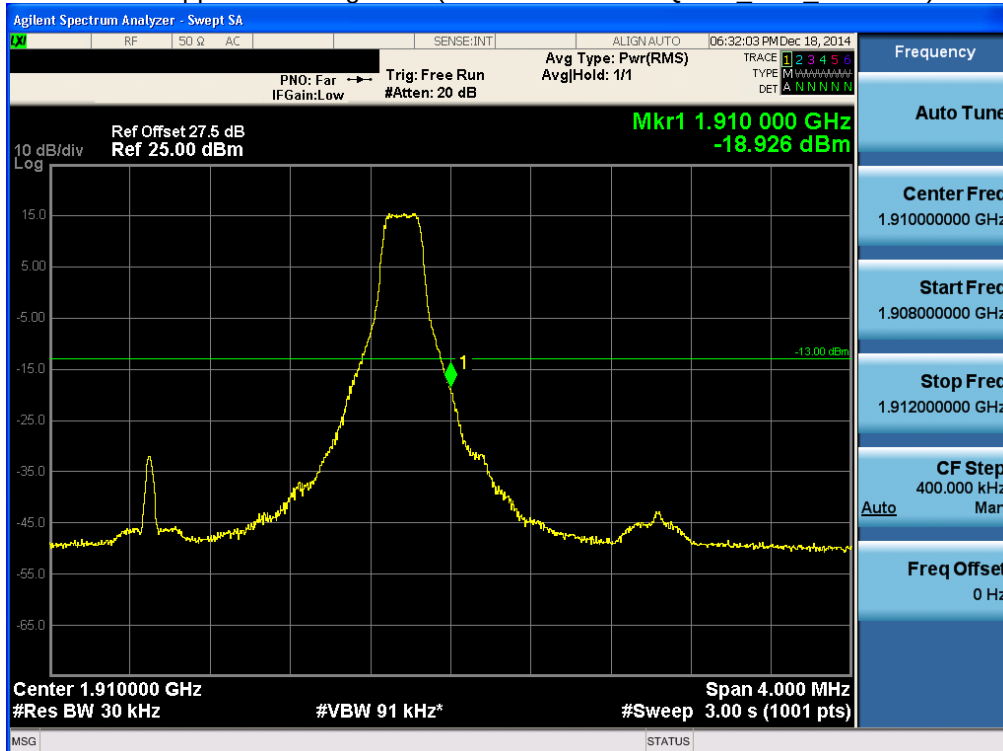


BAND 2. Upper Band Edge Plot (3M BW Ch.19185 QPSK_RB15_Offset 0) -2




BAND 2. Upper Extended Band Edge Plot (3M BW Ch.19185 QPSK_RB15 0) -3

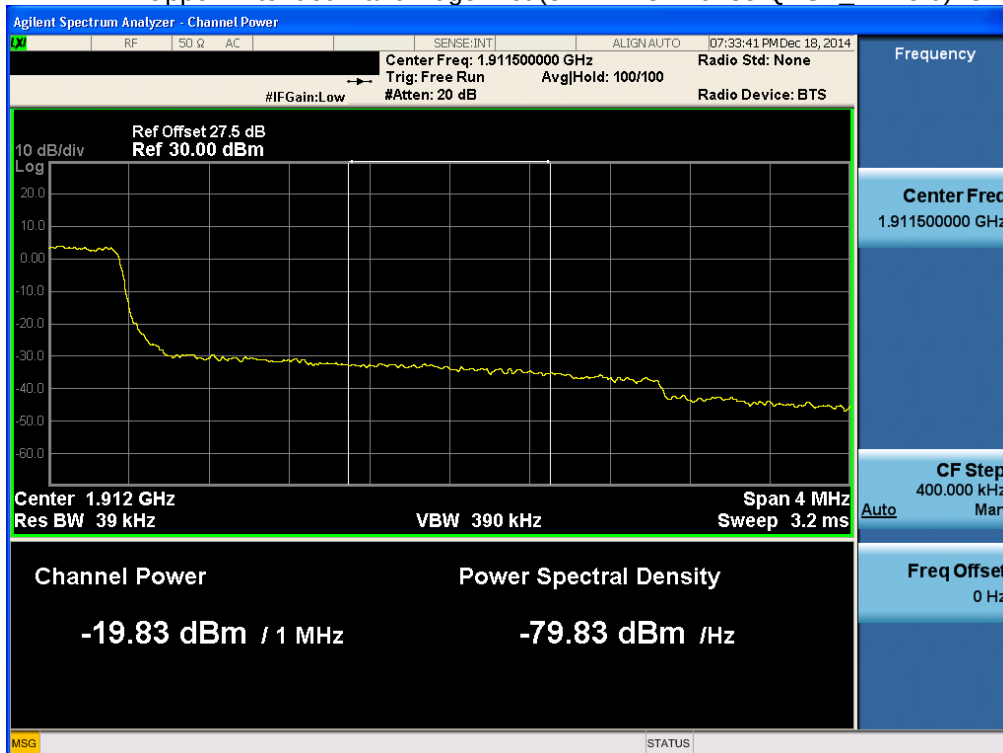


BAND 2. Upper Band Edge Plot (5M BW Ch.19175 QPSK_RB1_Offset 24) -1

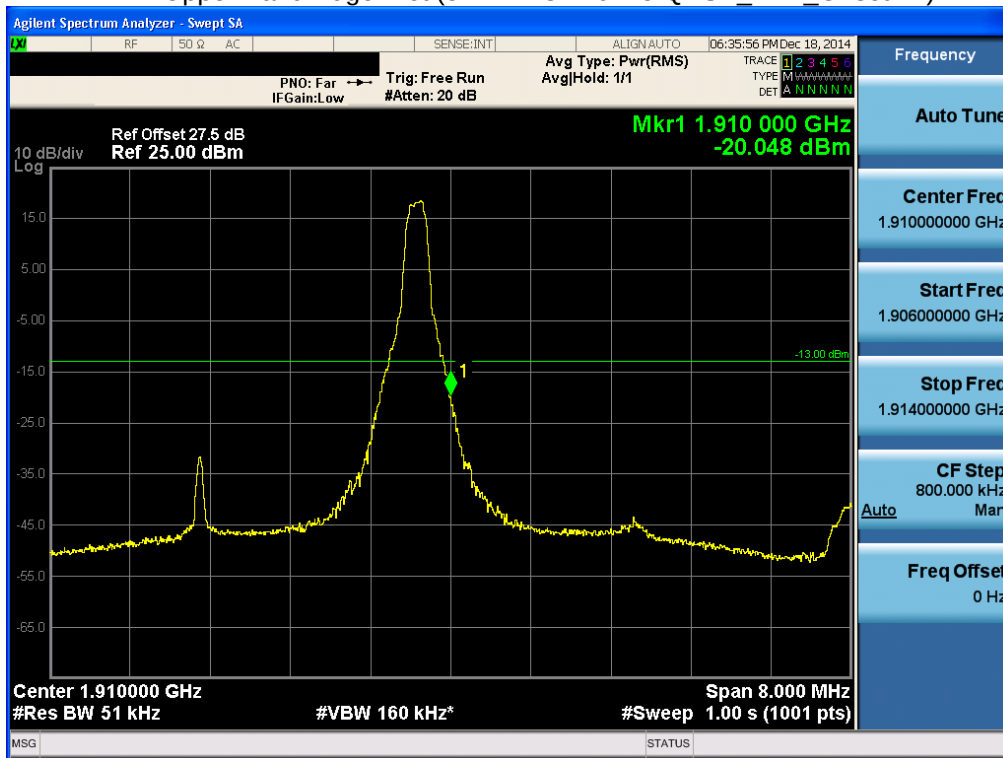


BAND 2. Upper Band Edge Plot (5M BW Ch.19175 QPSK_RB25_Offset 0) -2

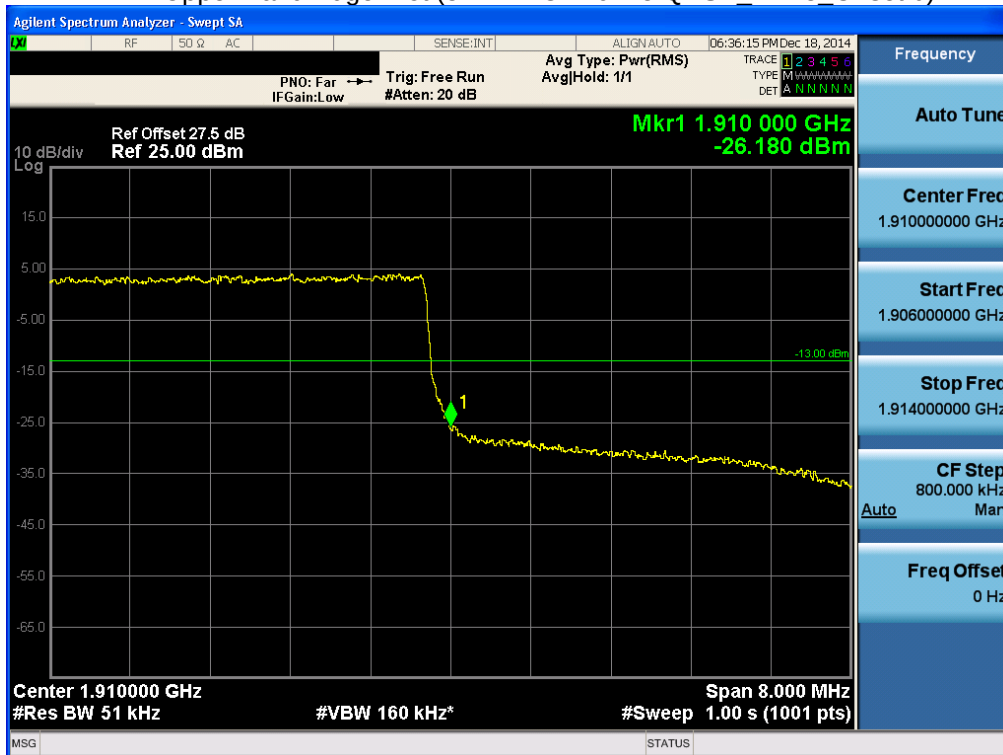


BAND 2. Upper Extended Band Edge Plot (5M BW Ch.19175 QPSK_RB25_0) -3

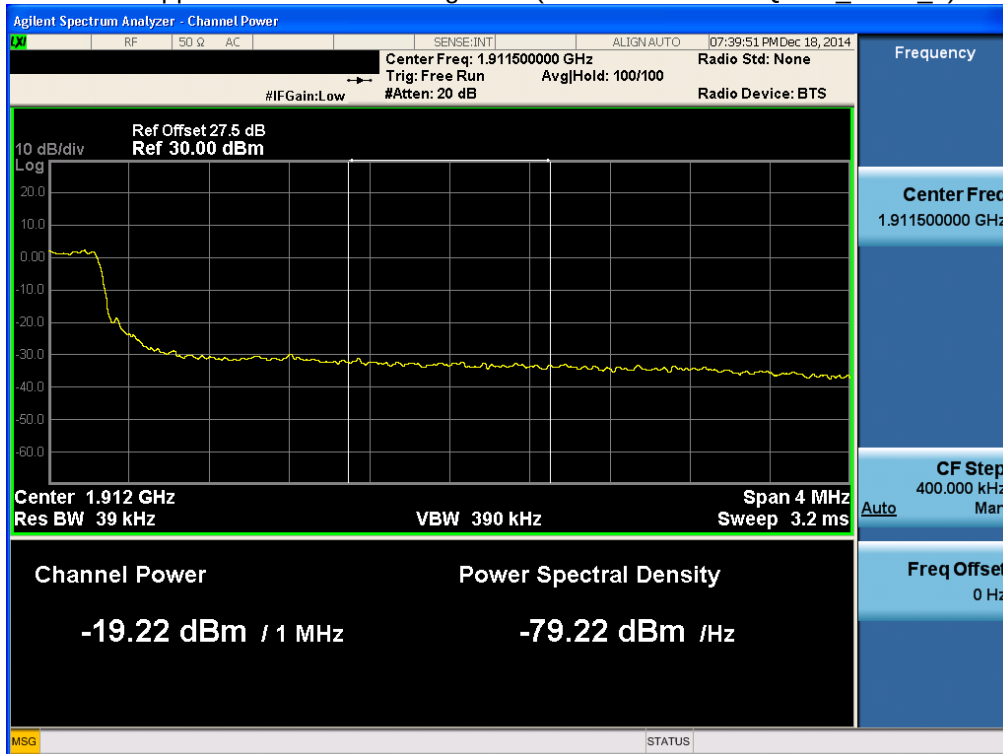


BAND 2. Upper Band Edge Plot (10M BW Ch.19150 QPSK_RB1_Offset 49) -1

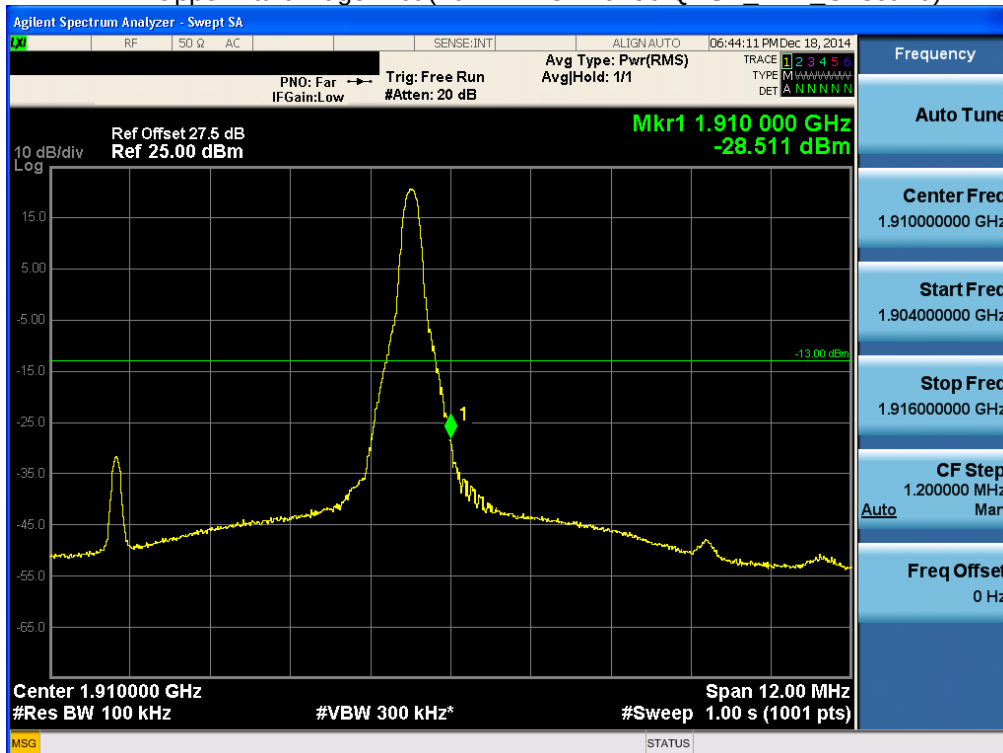


BAND 2. Upper Band Edge Plot (10M BW Ch.19150 QPSK_RB50_Offset 0) -2

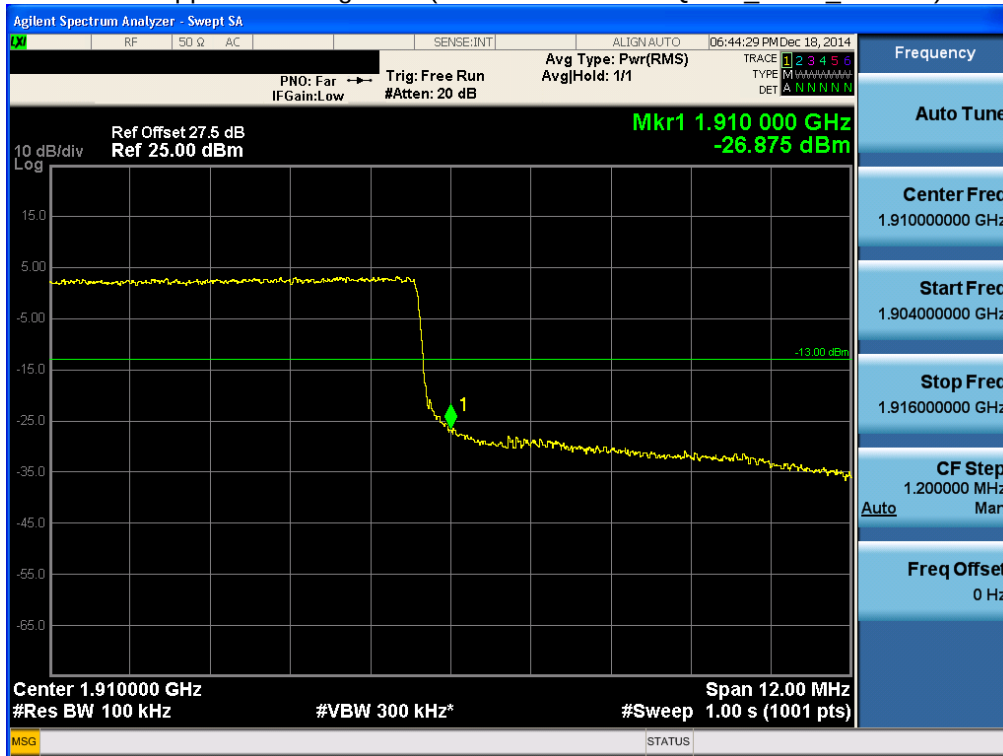


BAND 2. Upper Extended Band Edge Plot (10M BW Ch.19150 QPSK_RB50_0) -3

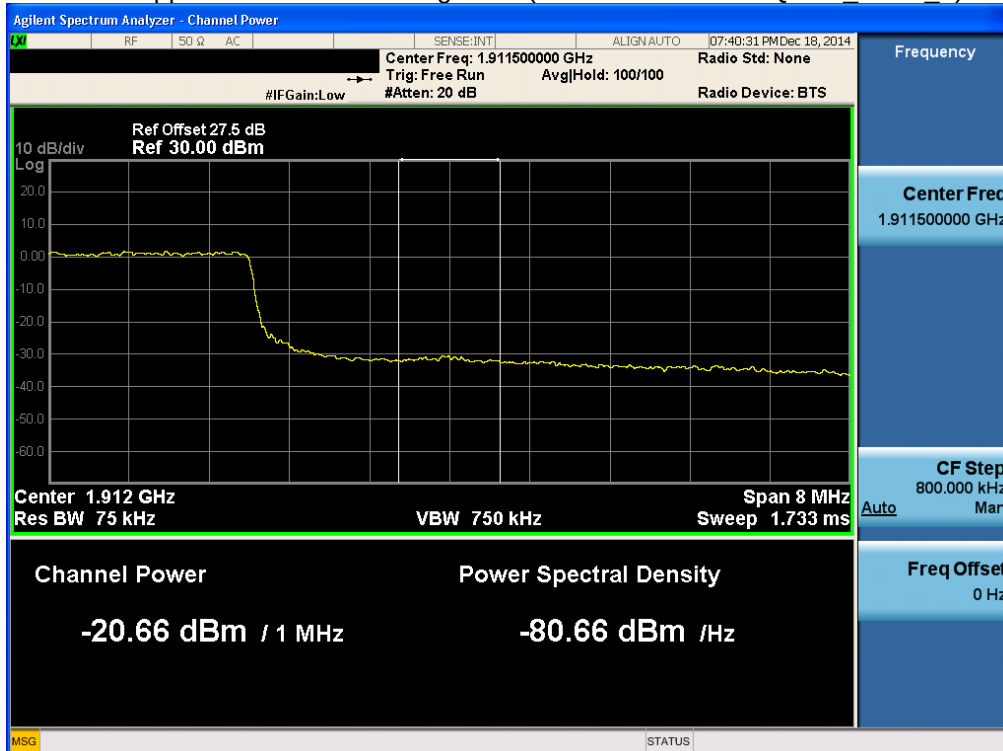


BAND 2. Upper Band Edge Plot (15M BW Ch.19125 QPSK_RB1_Offset 74) -1

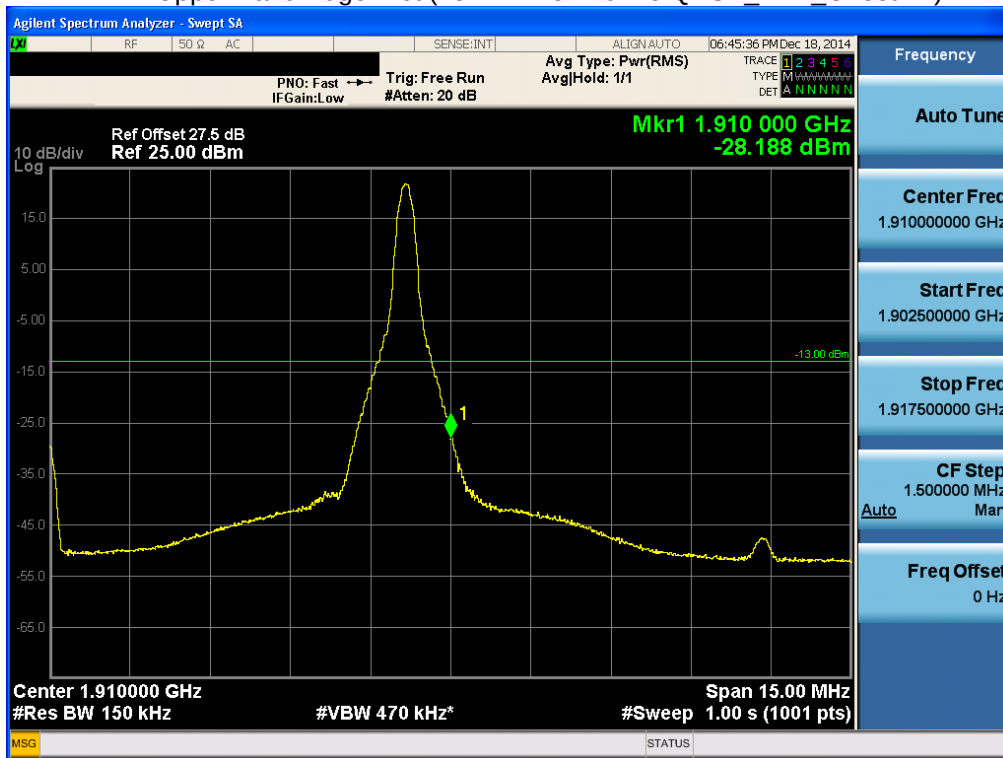


BAND 2. Upper Band Edge Plot (15M BW Ch.19125 QPSK_RB75_Offset 0) -2

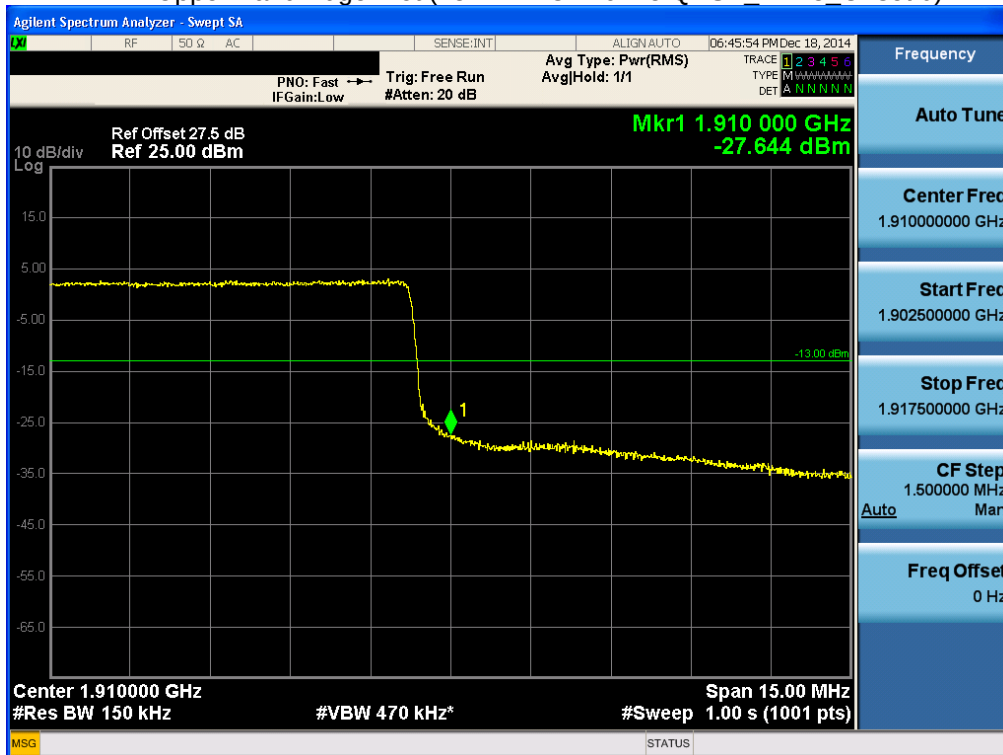

BAND 2. Upper Extended Band Edge Plot (15M BW Ch.19125 QPSK_RB75_0) -3

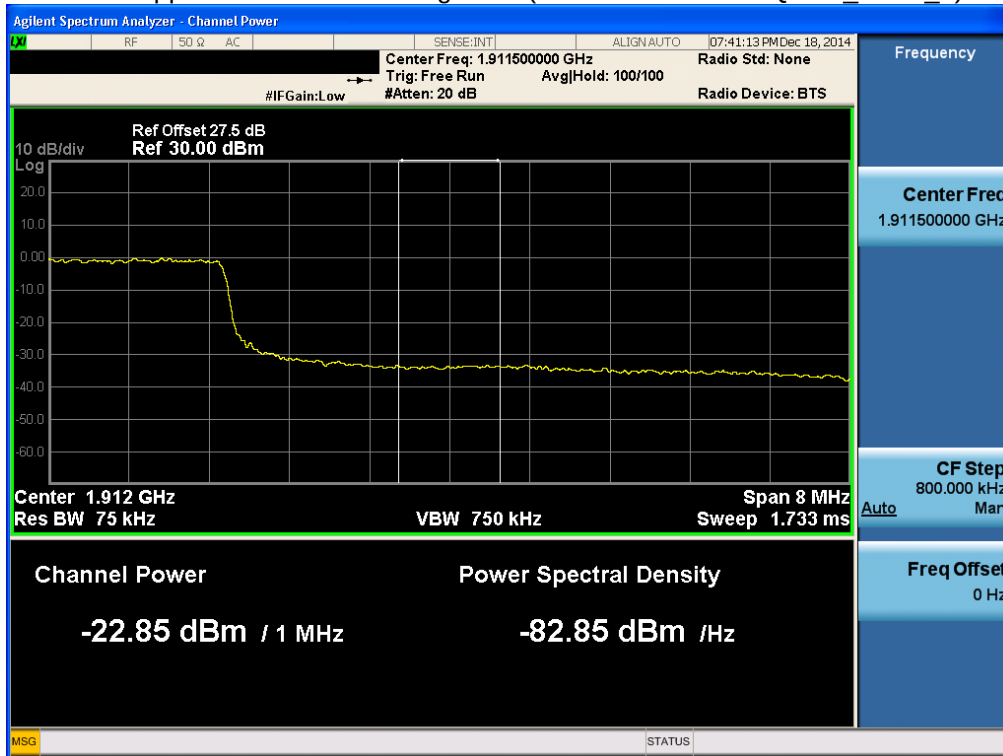

BAND 2. Upper Band Edge Plot (20M BW Ch.19100 QPSK_RB1_Offset 99) -1

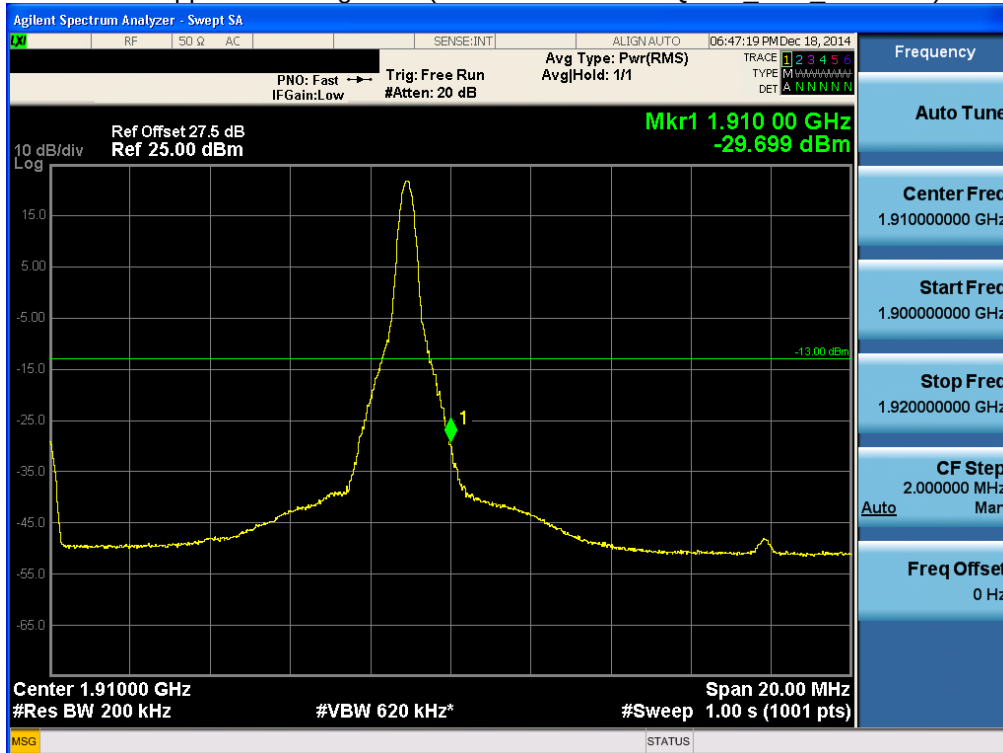

BAND 2. Upper Band Edge Plot (20M BW Ch.19100 QPSK_RB100_Offset 0) -2



BAND 2. Upper Extended Band Edge Plot (20M BW Ch.19100 QPSK_RB100_0) -3

