


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
163.08	Quasi-Peak	V	-	-	-92.86	19.73	33.87	43.52	-9.65

Table 7-29. Radiated Spurious Emissions Below 1GHz – Ant 2

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
163.08	Quasi-Peak	V	-	-	-92.65	19.73	34.08	43.52	-9.44

Table 7-30. Radiated Spurious Emissions Below 1GHz – Ant 2 – WCP

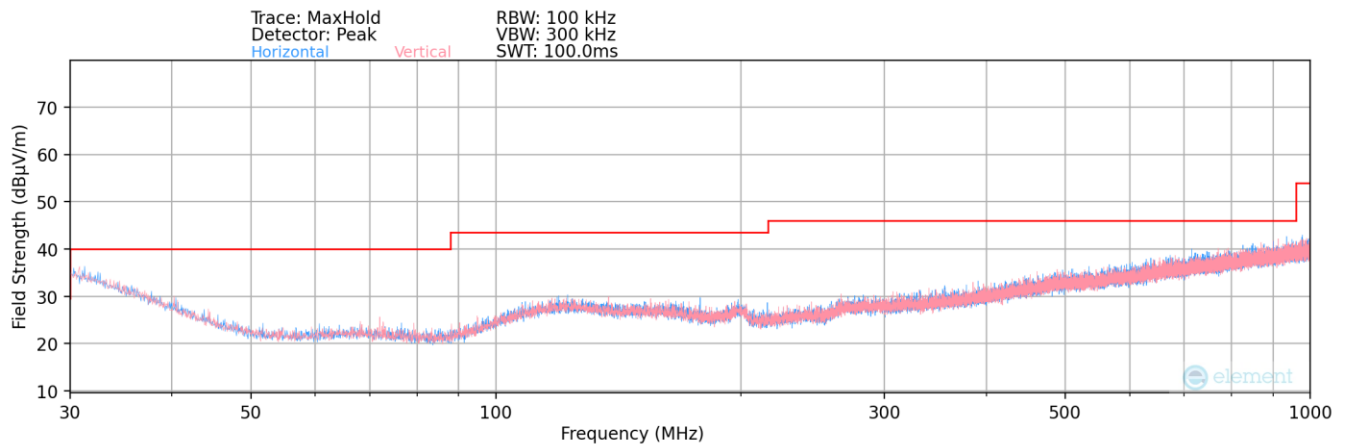

Plot 7-183. Radiated Spurious Plot below 1GHz – Dual

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
67.40	Quasi-Peak	V	-	-	-93.08	14.58	28.50	40.00	-11.50

Table 7-31. Radiated Spurious Emissions Below 1GHz – Dual

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
67.40	Quasi-Peak	V	-	-	-93.44	14.58	28.14	40.00	-11.86

Table 7-32. Radiated Spurious Emissions Below 1GHz – Dual - WCP

FCC ID: A3LSMF776B	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/11/26 - 5/6/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2603110020-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		

7.10 Line-Conducted Test Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-33. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMF776B	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/11/26 - 5/6/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2603110020-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 135 of 139

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


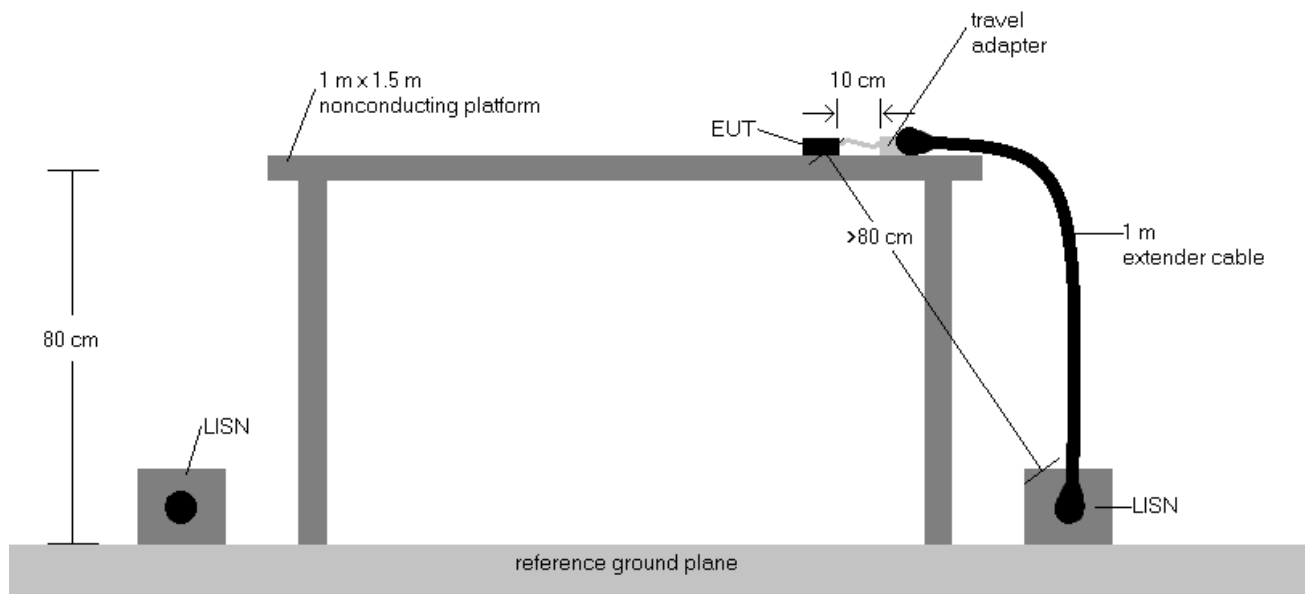


Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMF776B	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/11/26 - 5/6/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2603110020-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 136 of 139

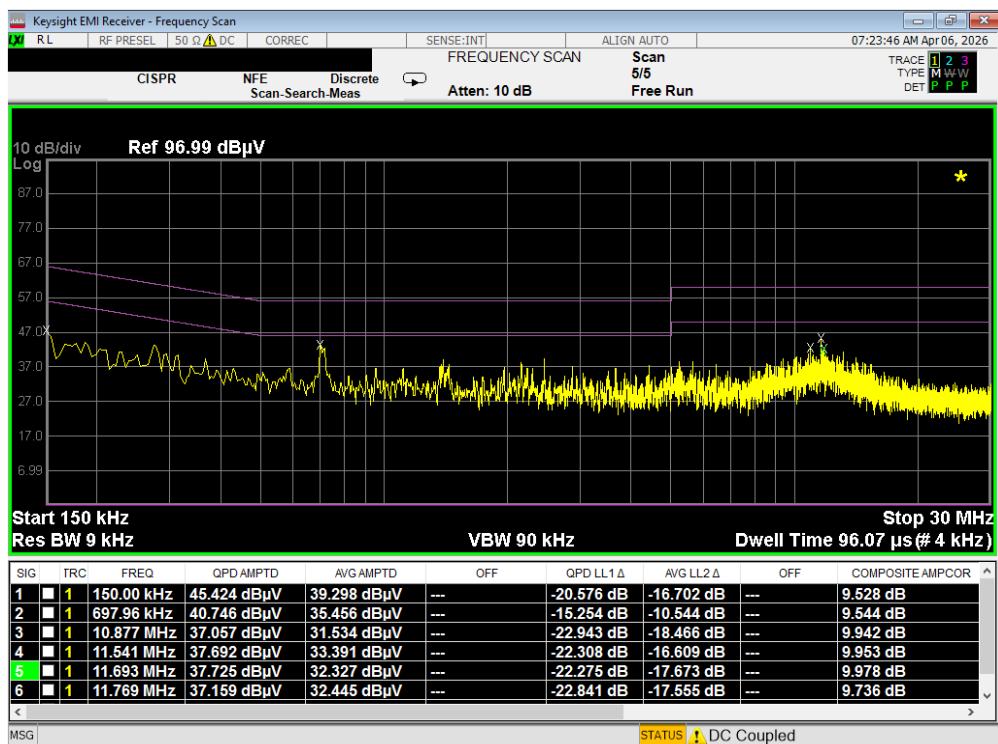

Plot 7-184. Line-Conducted Test Plot (L1)


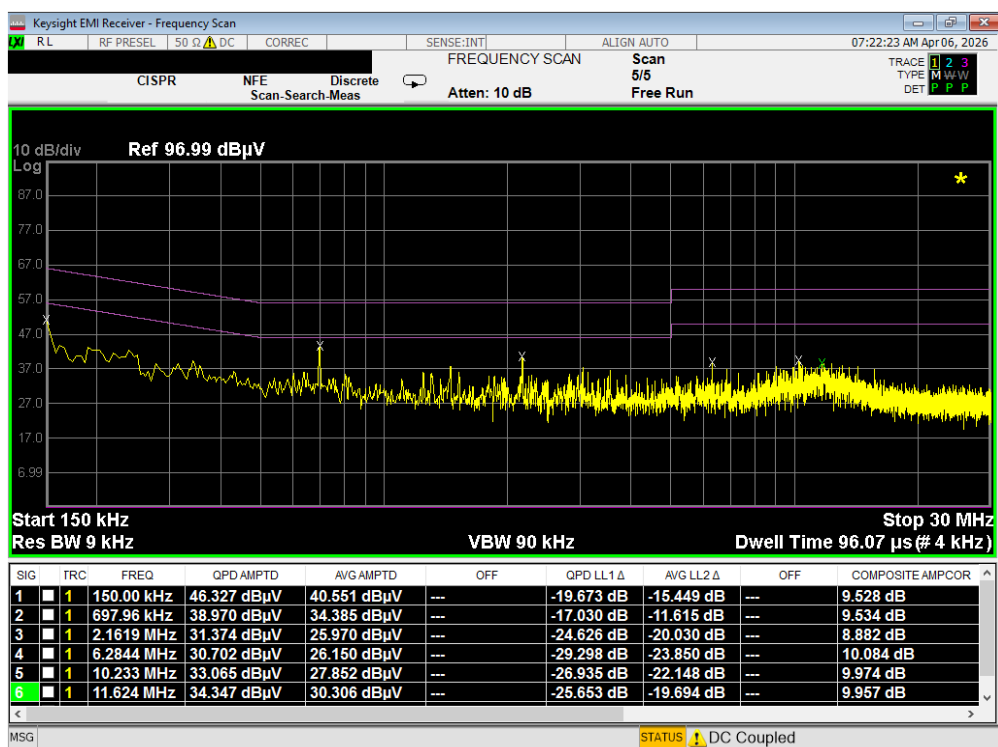


Table 7-34. Line-Conducted Test Data (N)

FCC ID: A3LSMF776B	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/11/26 - 5/6/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2603110020-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 137 of 139

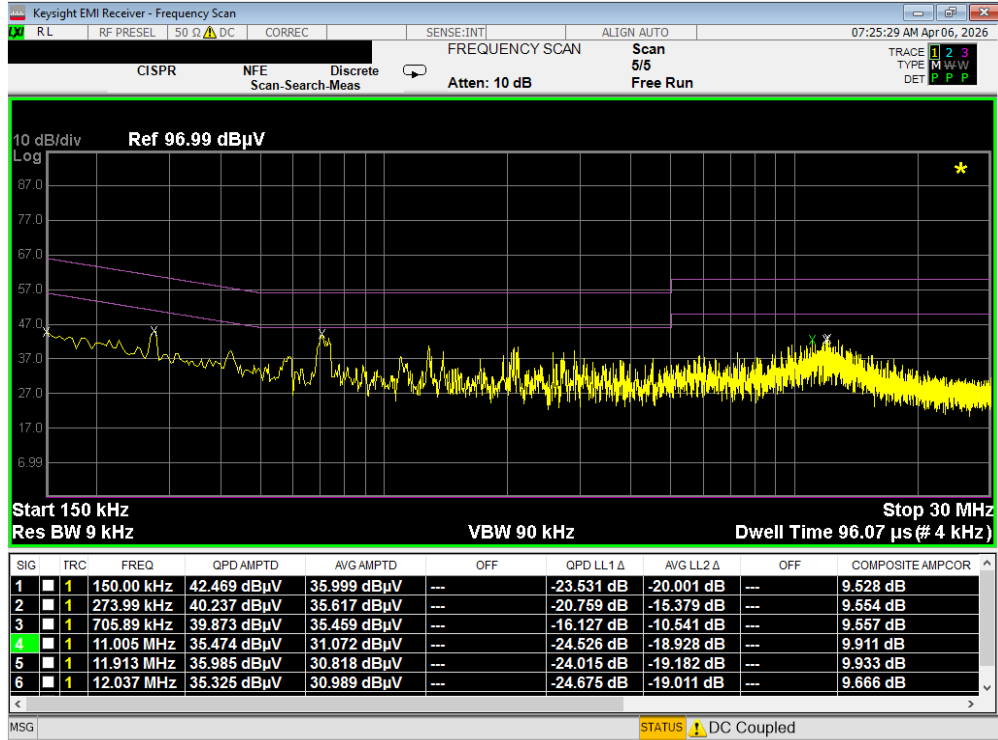

Plot 7-185. Line-Conducted Test Plot (L1) - WCP

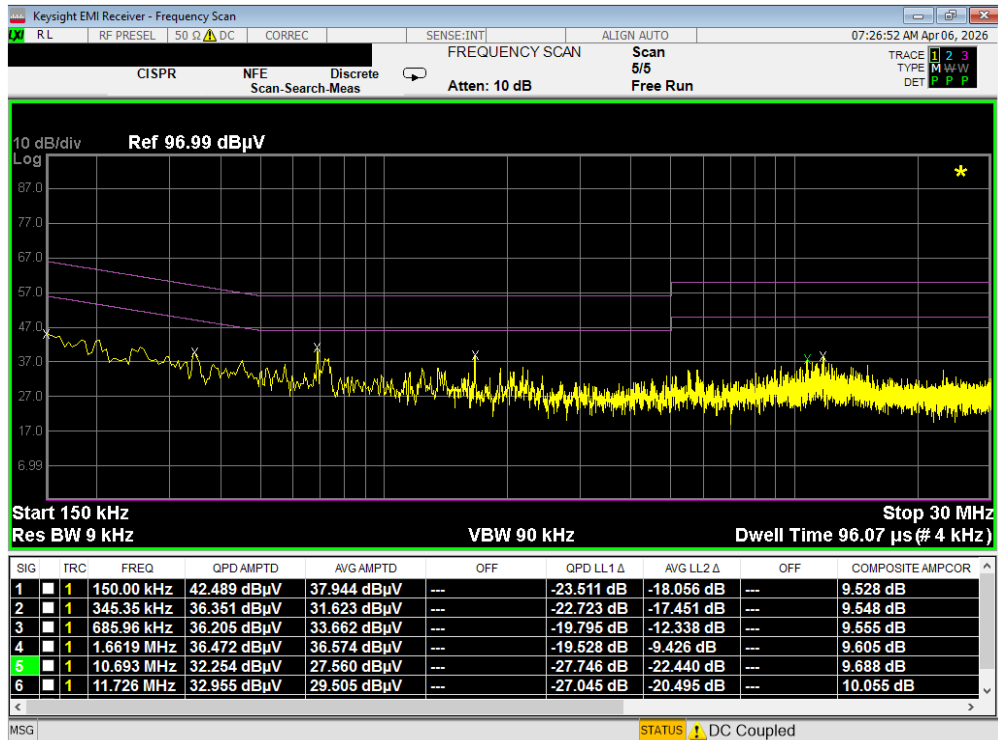


Table 7-35. Line-Conducted Test Data (N) - WCP

FCC ID: A3LSMF776B	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/11/26 - 5/6/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2603110020-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 138 of 139

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF776B** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

- END OF TEST REPORT -

FCC ID: A3LSMF776B	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 3/11/26 - 5/6/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2603110020-12-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 139 of 139