

EMC TEST REPORT

Project No.	LBE20190630	Issue No.	0
Applicant	Name of organization	Samsung Electronics Co., Ltd.	
	Address	(Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea	
	Date of application	April 25, 2019	
EUT	Type of device	☒ All other Receivers subject to part15 ☒ Class B Personal Computers and peripherals ☒ Other Class B digital devices and peripherals ☐ FM Broadcast Receiver	
	Equipment authorization	☒ Certification ☐ Supplier's Declaration of Conformity	
	FCC ID	A3LSMF907B	
	Kind of product	Mobile Phone	
	Model No.	SM-F907B	
	Variant Model No.	Refer to clause 4.6	
	Manufacturer	SAMSUNG ELECTRONICS CO., LTD 94-1, Imsu-dong, Gumi-si, Gyengsangbuk-do, 730-722, Republic of Korea SAMSUNG ELECTRONICS HUIZHOU CO.,LTD. 516229, Chenjiang Town, HuiZhou City, Guangdong Province, China	
Applied Standards		47 CFR Part 15, Subpart B, Class B / ANSI C63.4-2014	
Test Period		April 29, 2019 ~ May 8, 2019	
Issue date		June 3, 2019	
Test result : Complied The equipment under test has found to be compliant with the applied standards. (Refer to the attached test result for more detail.)			
Tested by : Soo-Joon Kim 		Reviewed by : Young-Hun Kim 	
The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from Global CS Center.			
Global CS Center of Samsung Electronics Co., Ltd. (Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea			

Table of contents

1. Report Information

1.1 Revision history	3
----------------------------	---

2. Summary of test results

2.1 Emission	3
--------------------	---

3. General Information

3.1 Test facility	3
-------------------------	---

4. Test Configuration

4.1 Test Peripherals	4
4.2 EUT operating mode	5
4.3 Details of Sampling	5
4.4 Used cable description	6
4.5 Test arrangement	7
4.6 EUT Description	11
4.7 EUT Frequencies	11
4.8 Test configuration and condition	12
4.9 Measurement uncertainty	12

5. Result of individual tests

5.1 Conducted disturbance	13
5.2 Radiated disturbance	19

1. Report Information

1.1 Revision history

No.	Revised detailed information
Issue 0	There are no revisions and this version is basic test report.

1.2 RSE test report no.

No.	Remark
1M1904220064-14	The cellular receiver mode refers to the radiated spurious emissions test report.

2. Summary of test results

2.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result
☒	Conducted Disturbance (Mains port)	47 CFR Part 15 Subpart B / ANSI C63.4-2014 (Class B)	Complied
☒	Radiated Disturbance		Complied

3. General Information

3.1 Test facility

The Global CS Center is located on Samsung Electronics Co., Ltd. at (Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea. All testing are performed in Semi-anechoic chambers conforming to the site attenuation characteristics defined by ANSI C63.4, CISPR 32, CISPR 16-1-4 and Shielded rooms. And all antennas are properly calibrated using ANSI C63.5:2017.

The Global CS Center is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

4. Test Setup configuration

4.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Mark	Description	Model No.	Serial No.	Manufacturer / Trademark	FCC ID
A	Mobile Phone	SM-F907B	-	SAMSUNG	A3LSMF907B
B	Battery	Main: EB-BF907ABA Sub: EB-BF901ABA	-	SAMSUNG	-
C	Headset	SM-R170	-	SAMSUNG	-
D	Data Cable	EP-DG970BBE	-	SAMSUNG	-
E	Travel Adapter	EP-TA200	R37M19A0051DK3	SAMSUNG	-
F	Laptop Computer	Latitude5580	1CHRYM2	Dell	-
			D3HRYM2	Dell	-
G	Router	DIR-806A	RF0F1D5000688	D-Link	-
			RF0F1D8011504	ASUS	-
H	Mouse	AA-SM7PCP	BDV8J48P4393	SAMSUNG	-
		SC-1000	1034000281	SAMSUNG	-
I	Laptop AC Adapter	LA65NM130	5D77	Dell	-
			5DEA	Dell	-
J	OTG Gender	EE-UG970	-	SAMSUNG	-
K	DP Cable	JCA141	BW1B1607001082	J5create	-
L	Monitor	27UD88	605NTHM9B769	LG	-
M	Monitor AC Adaptor	LCAP31	EG3VN629490050658	LG	-
N	USB memory stick	64GB	-	Sandisk	-

4.2 EUT operating mode

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

4.2.1 Conducted Emission

No.	Operating mode
1	Camera (tripple) + Charging (w/ TA) + Cellular receiver (GSM850 Center Frequency)
2	Camera (dual) + Charging (w/ TA)
3	Camera (single) + Charging (w/ TA)
4	Video + Audio playback from internal memory data + Charging (w/ TA)
5	USB Data Communication with PC (from external memory data)

4.2.2 Radiated Emission

No.	Operating mode
1	Camera (tripple) + Charging (w/ TA)
2	Camera (dual) +USB OTG (USB memory stick)
3	Camera (single)
4	Video + Audio playback from internal memory data + Display out(Direct DP Cable)
5	USB Data Communication with PC (from external memory data)

4.3 Details of Sampling

Customer selected, single unit.


4.4 Used cable description

The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected:


No.	Connected cable	Length [m]	Shielded [Y/N]	Note
1	Data Cable	1.0	Yes	From EUT to Laptop Computer
2	DP Cable	1.1	Yes	From EUT to DP Monitor
3	Power	1.8	No	From Laptop Computer to AC Adapter
4	Power	1.2	No	From Monitor to AC Adapter
5	Power	1.5	No	For Laptop AC Adapter
6	Power	1.8	No	For Monitor AC Adpater
7	LAN	1.5	No	From Laptop Computer to Router
8	USB	0.8	Yes	From Laptop Computer PC to Router
9	USB	1.8	Yes	From Laptop Computer to Mouse

4.5 Test arrangement

4.5.1 Conducted Emission

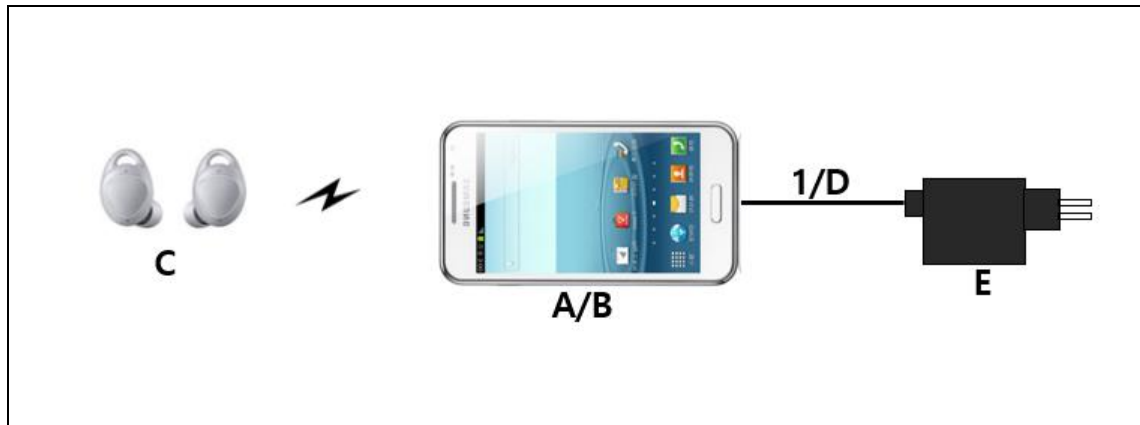


[Mode 1 - 4]

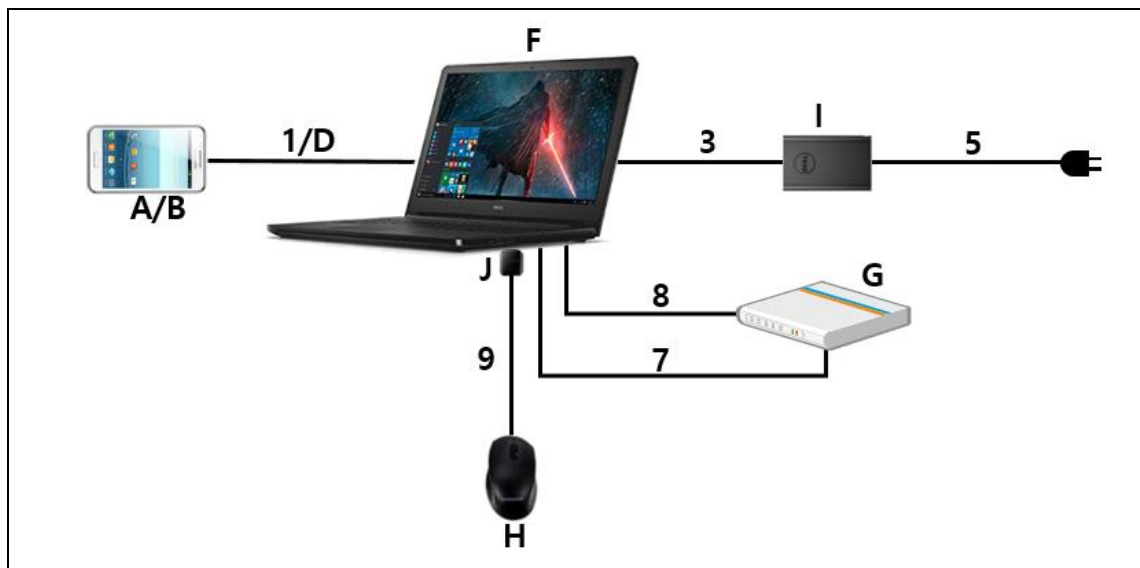

[Mode 5]


4.5.2 Radiated Emission

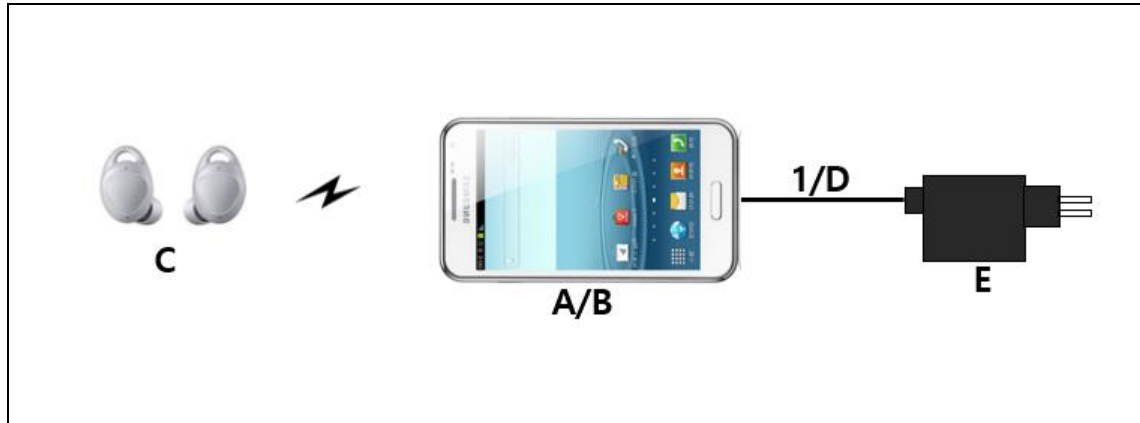


[Mode 1]




[Mode 2]

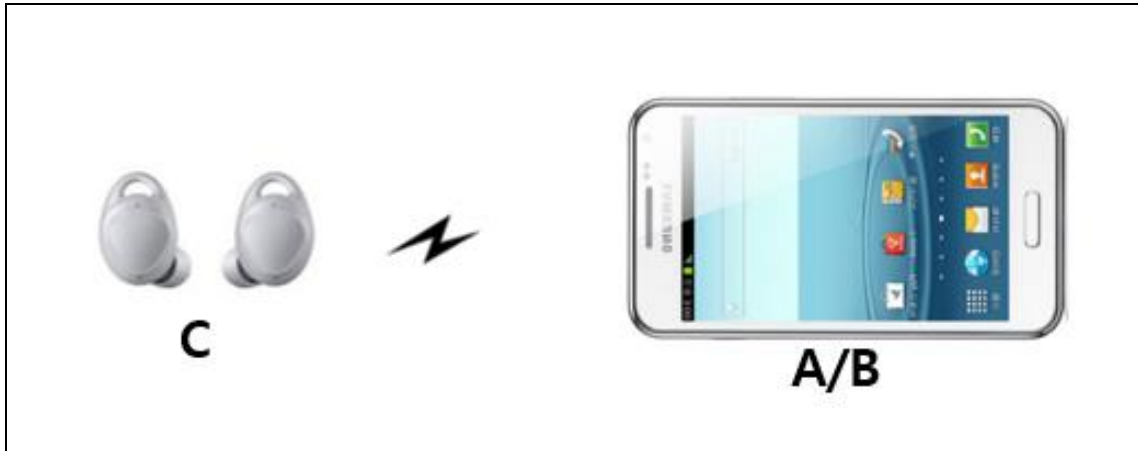

[Mode 3]

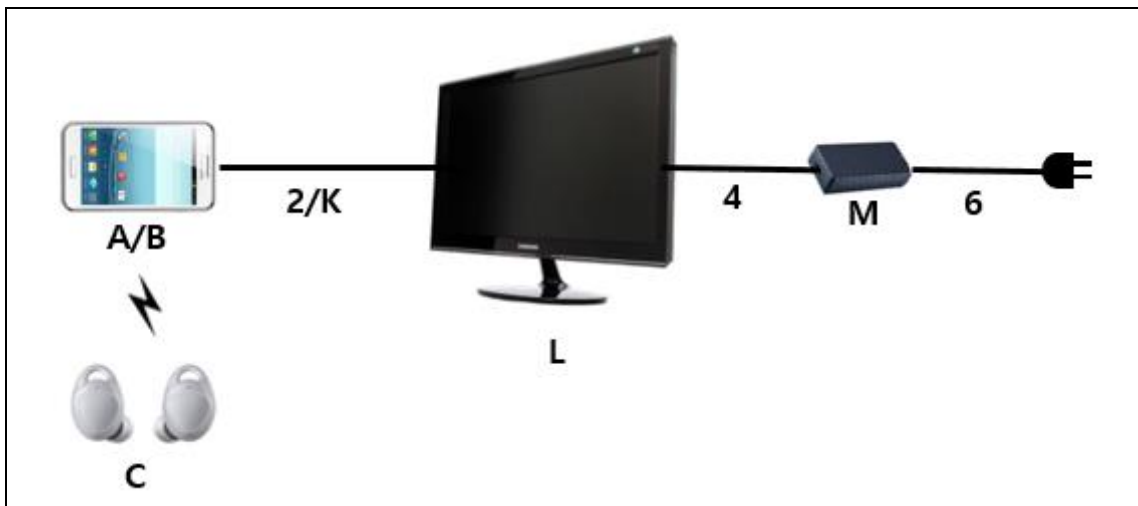

[Mode 4]

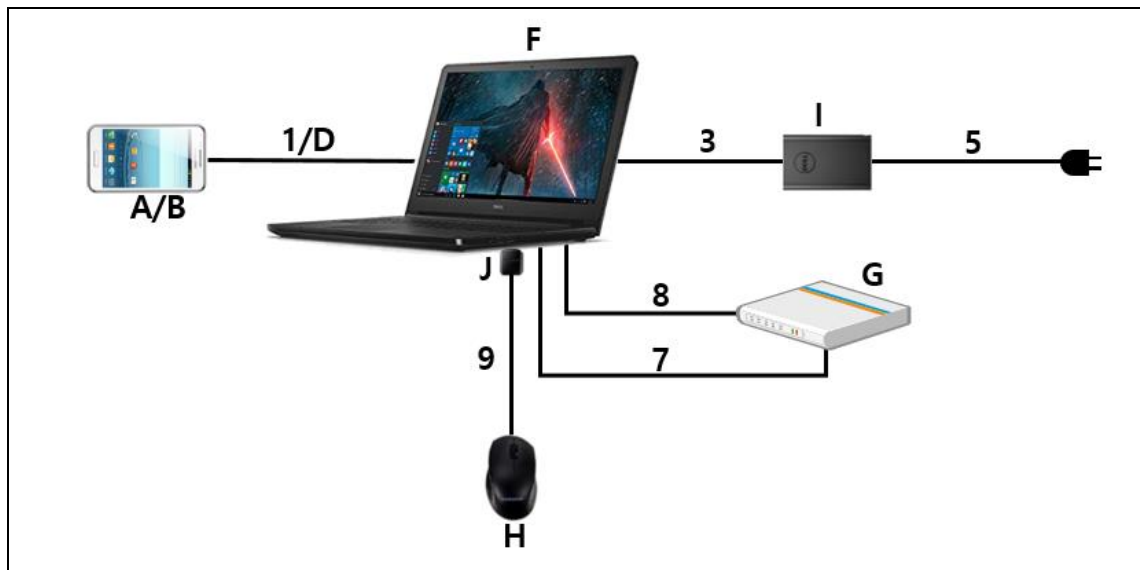

[Mode 5]

4.6 EUT Description

The EUT is a foldable type mobile phone which can operate on GSM850/900/1800/1900, WCDMA FDD1/2/4/5/8, LTE FDD1/2/3/4/5/7/8/12/13/18/19/20/25/26/28/66, LTE TDD38/39/40/41, TD-SCDMA B34/39 bands and incorporates a Camera, Bluetooth, Wi-Fi, ANT+, MST, NFC, GNSS, DP, OTG, Audio and Video.

4.6.1 The variant models

- None

4.7 EUT Frequencies

The highest frequencies (Generated and used)	Frequency [MHz]
Wi-Fi	5 825

4.8 Test configuration and condition

The system was configured for testing in a typical fashion that a customer would normally use. Cables were attached to each of the available I/O Ports. Where applicable, peripherals were attached to the I/O cables. All the external I/O ports are exercised, as well as internal and the external SD card if available, by writing and reading arbitrary data or charging with TA.

The EUT was investigated in three orientations and the worst case orientation is reported.

RX mode(850MHz) testing was performed with the GSM850 RX Test mode at center frequency. All licensed communication (850MHz) RX mode, GSM/WCDMA/LTE, test results are not significantly different.

The FM radio mode radiated testing was performed with the Low/Mid/High channel.

The video and music were repetitively played with the wirelessly connected earphone.

The video and music were played on monitor through Display Out function using direct DP Cable or DP converter.

The EUT was connected to USB memory stick using USB OTG gender

The camera of the EUT was operated continuously.

Power source for the EUT operating was supplied by CVCF made by the Pacific Corp.

- Test Voltage : AC 120 V, 60 Hz

4.9 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4-2 and UKAS M3003)

4.9.1 Emission

Test type		Measurement uncertainty (C.L. 95 %, k = 2)
Conducted disturbance	AC Mains	2.83 dB
Radiated Disturbance (Below 1 GHz)	Horizontal	4.99 dB
	Vertical	4.90 dB
Radiated Disturbance (Above 1 GHz)	Horizontal	5.33 dB
	Vertical	5.32 dB

5. Results of individual test

5.1 Conducted disturbance

The EUT is connected to a LISN via travel adapter. If the EUT is connected to the Laptop Computer USB port, the Laptop AC adapter is connected to a LISN.

Both conducted lines are measured in Quasi-Peak and CISPR-Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

Limits for conducted disturbance at the mains ports of Class B ITE

Frequency range Limits [MHz]	Resolution Bandwidth [kHz]	Limits [dB(μV)]	
		Quasi-peak	Average
0,15 to 0,50	9	66 to 56	56 to 46
0,50 to 5	9	56	46
5 to 30	9	60	50

NOTE 1 The lower limit shall apply at the transition frequency.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.1.1 Test instrumentation


EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E5I-127	Two-Line -Network	ENV216	R&S	102061	2018-07-23	12
E5I-017	EMI Test Receiver	ESU8	R&S	100483	2019-01-16	12
-	Test software	EMC32	R&S	Ver 9.26.01	-	-

5.1.2 Temperature and humidity condition

Test date	2019-05-08	Test engineer	Soo-Joon Kim
Climate condition	Ambient temperature	(22.1 ~ 22.4) °C	Limit (15.0 to 35.0) °C
	Relative humidity	(41.8 ~ 42.5) % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	(101.0 ~ 101.6) kPa	Limit (86.0 to 106.0) kPa
Test place	Shield Room (SR8)		

5.1.3 Test results

☐ Operating Mode 1: AC Mains

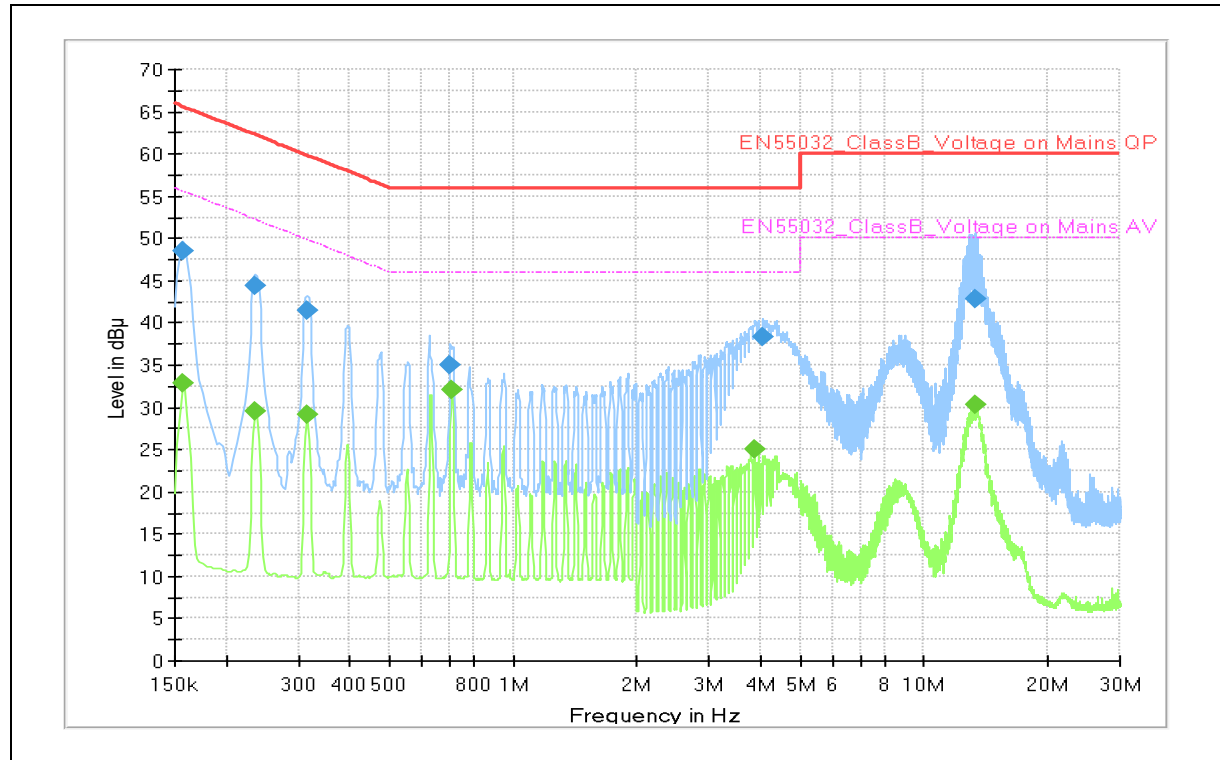


Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dBμV)	CAV (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.157	---	32.9	55.6	22.7	L1	9.9
0.157	48.5	---	65.6	17.1	L1	9.9
0.236	---	29.5	52.3	22.8	L1	9.9
0.236	44.4	---	62.3	17.9	L1	9.9
0.314	---	29.0	49.9	20.9	L1	10.1
0.317	41.5	---	59.8	18.3	L1	10.1
0.704	34.9	---	56.0	21.1	L1	10.1
0.710	---	32.0	46.0	14.0	L1	10.1
3.874	---	25.0	46.0	21.0	L1	10.0
4.065	38.3	---	56.0	17.7	L1	10.0
13.283	42.8	---	60.0	17.2	N	10.4
13.308	---	30.2	50.0	19.8	N	10.4

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)
 Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)
 QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

□ Operating Mode 2: AC Mains

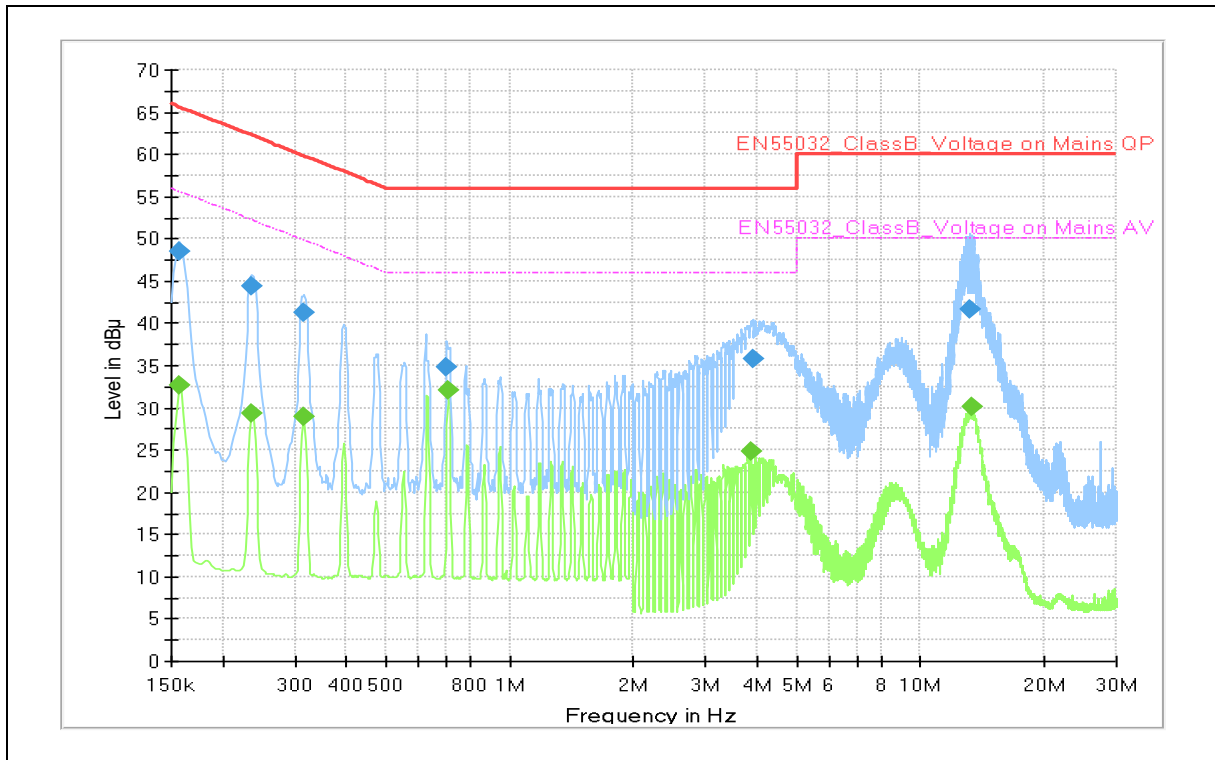


Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dBμV)	CAV (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.157	---	32.7	55.6	22.9	L1	9.9
0.157	48.4	---	65.6	17.2	L1	9.9
0.236	---	29.3	52.3	23.0	L1	9.9
0.236	44.3	---	62.3	18.0	L1	9.9
0.314	---	28.9	49.9	21.0	L1	10.1
0.317	41.4	---	59.8	18.4	L1	10.1
0.704	34.9	---	56.0	21.1	L1	10.1
0.710	---	32.0	46.0	14.0	L1	10.1
3.878	---	24.9	46.0	21.1	L1	10.0
3.896	35.7	---	56.0	20.3	L1	10.0
13.263	41.6	---	60.0	18.4	N	10.4
13.297	---	30.0	50.0	20.0	N	10.4

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)
 Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)
 QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

□ Operating Mode 3: AC Mains

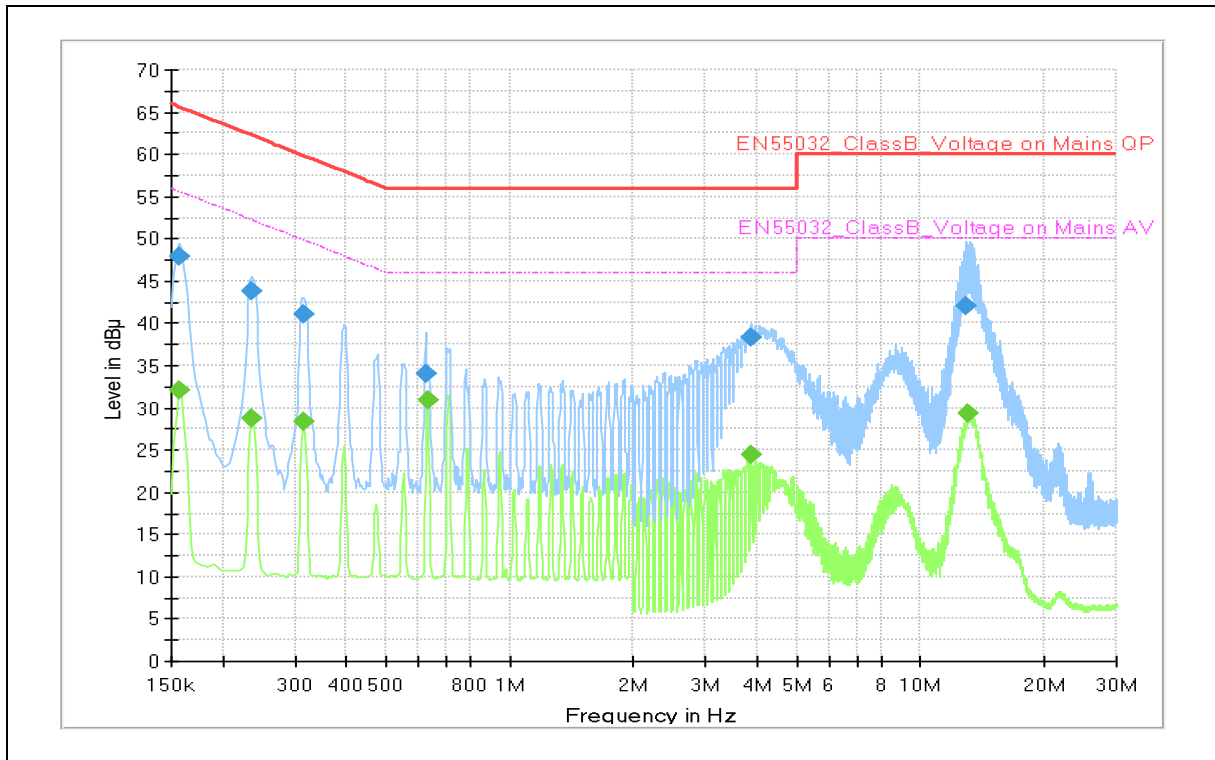

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:


Frequency (MHz)	QP (dBμV)	CAV (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.157	---	32.1	55.6	23.5	L1	9.9
0.157	48.0	---	65.6	17.6	L1	9.9
0.236	---	28.7	52.3	23.6	L1	9.9
0.236	43.9	---	62.3	18.4	L1	9.9
0.314	---	28.4	49.9	21.5	L1	10.1
0.317	41.0	---	59.8	18.8	L1	10.1
0.625	34.0	---	56.0	22.0	N	10.1
0.632	---	30.9	46.0	15.1	L1	10.2
3.881	38.3	---	56.0	17.7	L1	10.0
3.881	---	24.3	46.0	21.7	L1	10.0
12.962	42.1	---	60.0	17.9	N	10.4
13.000	---	29.4	50.0	20.6	N	10.4

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

☐ Operating Mode 4: AC Mains

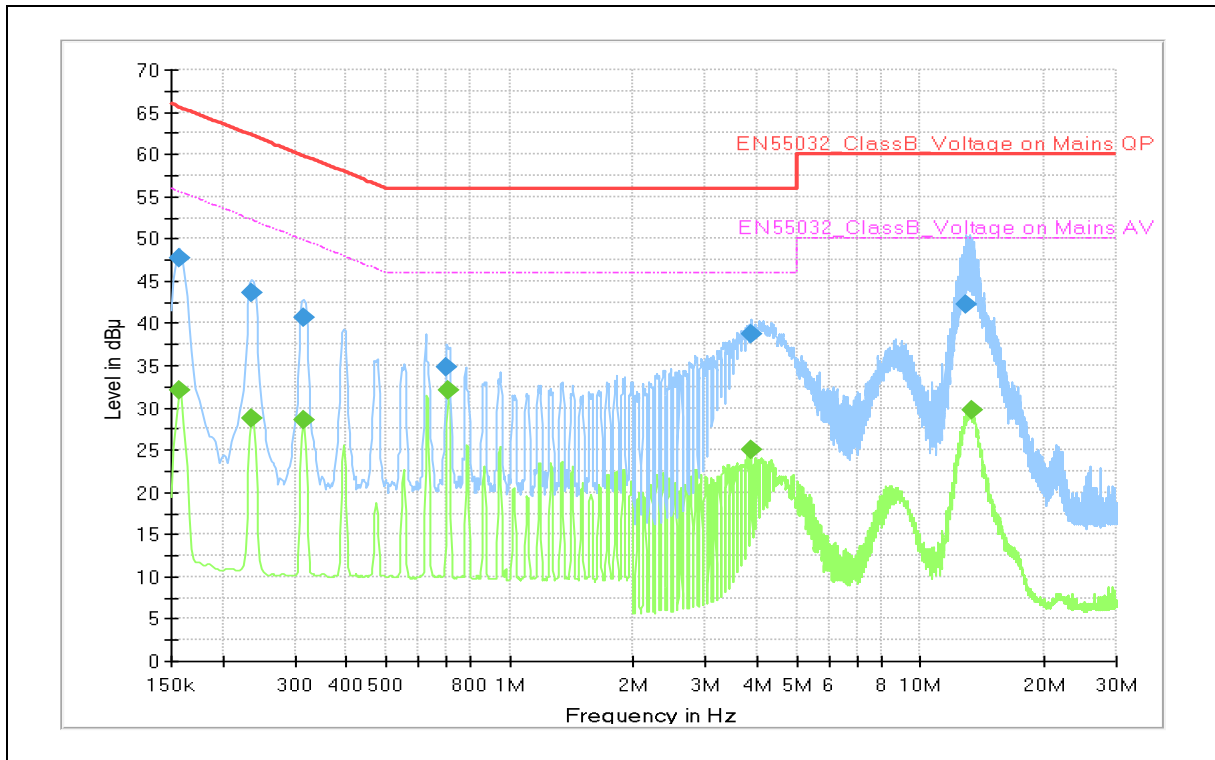

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:


Frequency (MHz)	QP (dB μ V)	CAV (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Corr. (dB)
0.157	---	32.0	55.6	23.6	L1	9.9
0.157	47.6	---	65.6	18.0	L1	9.9
0.236	---	28.8	52.3	23.5	L1	9.9
0.236	43.6	---	62.3	18.7	L1	9.9
0.314	---	28.6	49.9	21.3	L1	10.1
0.317	40.8	---	59.8	19.0	L1	10.1
0.704	34.8	---	56.0	21.2	L1	10.1
0.708	---	32.0	46.0	14.0	L1	10.1
3.874	---	25.0	46.0	21.0	L1	10.0
3.885	38.7	---	56.0	17.3	L1	10.0
12.957	42.3	---	60.0	17.7	N	10.4
13.299	---	29.7	50.0	20.3	N	10.4

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

☐ Operating Mode 5: AC Mains

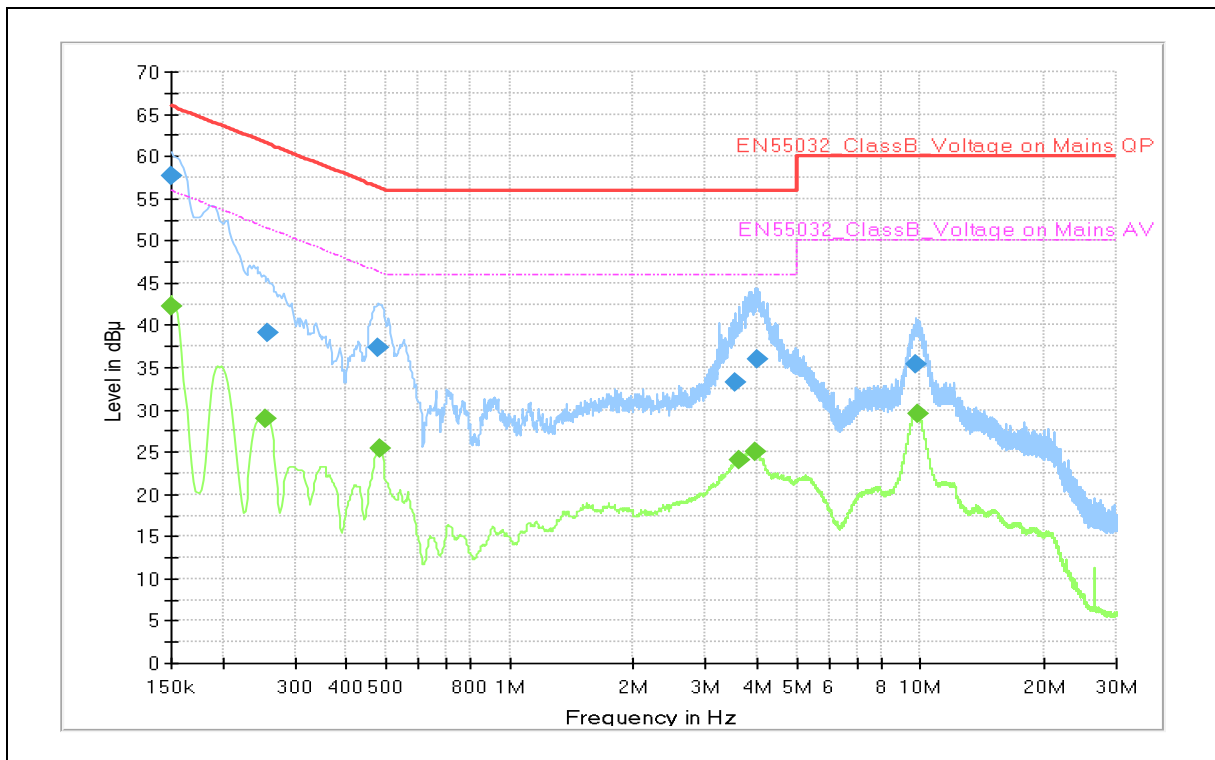

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dBμV)	CAV (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.150	---	42.2	56.0	13.8	L1	9.8
0.150	57.7	---	66.0	8.3	L1	9.8
0.256	---	28.9	51.6	22.7	L1	9.7
0.258	39.1	---	61.5	22.4	N	9.7
0.479	37.3	---	56.4	19.1	L1	10.0
0.485	---	25.5	46.2	20.7	L1	10.0
3.534	33.2	---	56.0	22.8	N	9.7
3.602	---	24.1	46.0	21.9	N	9.7
3.957	---	25.1	46.0	20.9	N	9.7
4.016	36.0	---	56.0	20.0	L1	9.8
9.717	35.3	---	60.0	24.7	L1	9.8
9.821	---	29.5	50.0	20.5	L1	9.8

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

5.2 Radiated disturbance

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin.

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 10 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [kHz]	Video Bandwidth [kHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	120	300	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using quasi-peak detector.

Peak/CISPR-Average measurements were made over the changeable frequency range 1 GHz to 40 GHz or 5th harmonics of the highest frequency generated or used in the device or on which the device operate or tunes at a measurement distance of 3 m for the following antenna and turntable arrangements. The measurements above 1 GHz were performed with the bore-sighting antenna aimed at the EUT.

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [MHz]	Video Bandwidth [MHz]	Turntable position
100 ~ 400	Horizontal, Vertical	1	3	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using peak and CISPR-average detectors.

Limits for radiated disturbance of Class B ITE at a measuring distance of 3 m and 10 m

Frequency range Limits [MHz]	Field Strength		
	3 m [$\mu\text{V/m}$]	3 m [dB($\mu\text{V/m}$)]	10 m [dB($\mu\text{V/m}$)]
30 to 88	100	40.0	29.5
88 to 216	150	43.5	33.0
216 to 960	200	46.0	35.5
Above 960	500	54.0	43.5

Results checked manually; and points close to the limit line were re-measured.

5.2.1 Test instrumentation

EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E5I-021	EMI Test Receiver	ESU40	R&S	100376	2019-01-30	12
E5I-016	EMI Test Receiver	ESU8	R&S	100482	2018-06-08	12
E5I-149	Horn Antenna	HF907	R&S	102525	2018-06-15	24
E5I-039	Signal Conditioning Unit	SCU-18	R&S	10211	2019-01-22	12
E5I-037	Wide Band Horn Antenna	WBH 18-40K	R&S	11201	2019-01-31	24
E5I-042	Signal Conditioning Unit	SCU-40A	R&S	10004	2018-09-05	12
E5I-120	BiLog Antenna	CBL6112D	TESEQ	36997	2018-04-23	24
E5I-072	BiLog Antenna	CBL6112D	TESEQ	36009	2018-04-23	24
E5I-075	Preamplifier	310N	SONOMA	332018	2018-05-25	12
E5I-076	Preamplifier	310N	SONOMA	332019	2018-05-25	12
-	Test software	EP7RE	TOYO	Ver 5.8.2	-	-
-	Test software	EMC32	R&S	Ver 9.25.00	-	-


5.2.2 Temperature and humidity condition

Test date	2019-04-29 ~ 2019-05-03	Test engineer	Soo-Joon Kim
Climate condition	Ambient temperature	(22.6 ~ 23.0) °C	Limit (15.0 to 35.0) °C
	Relative humidity	(39.6 ~ 41.6) % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	(101.2 ~ 101.5) kPa	Limit (86.0 to 106.0) kPa
Test place	Semi-Anechoic Chamber (SAC4)		

5.2.3 Test results

☐ Operating Mode 1

- Frequencies below 1 GHz

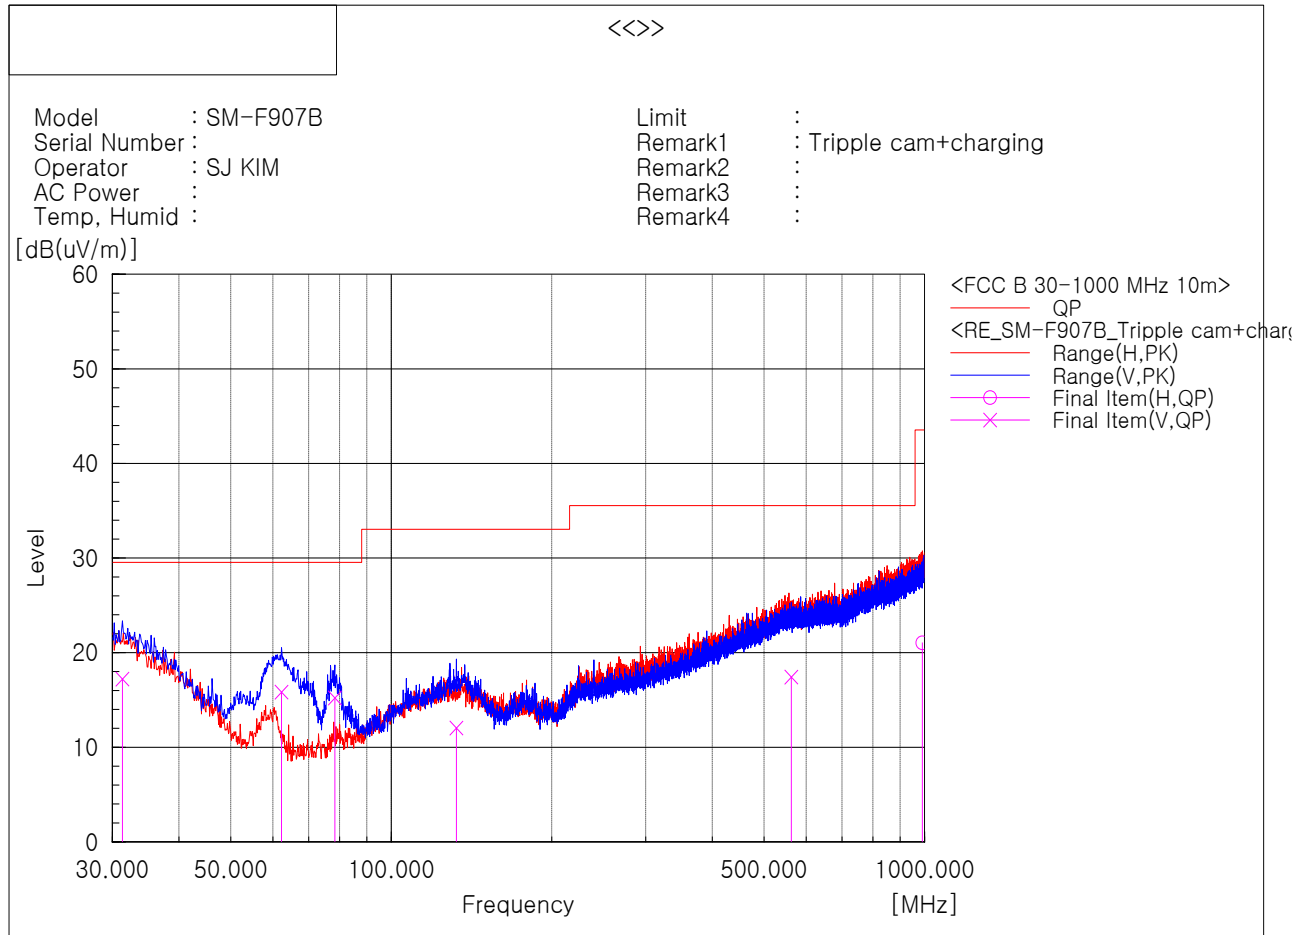

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	System
1	31.334	V	24.2	-7.0	17.2	29.5	12.3	100	95	2
2	62.253	V	34.6	-18.8	15.8	29.5	13.7	214	212	2
3	78.379	V	32.9	-17.7	15.2	29.5	14.3	231	57	2
4	132.456	V	23.9	-11.9	12.0	33.0	21.0	100	0	2
5	562.409	V	21.0	-3.6	17.4	35.5	18.1	313	295	2
6	990.542	H	19.6	1.4	21.0	43.5	22.5	134	131	1


Note1) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

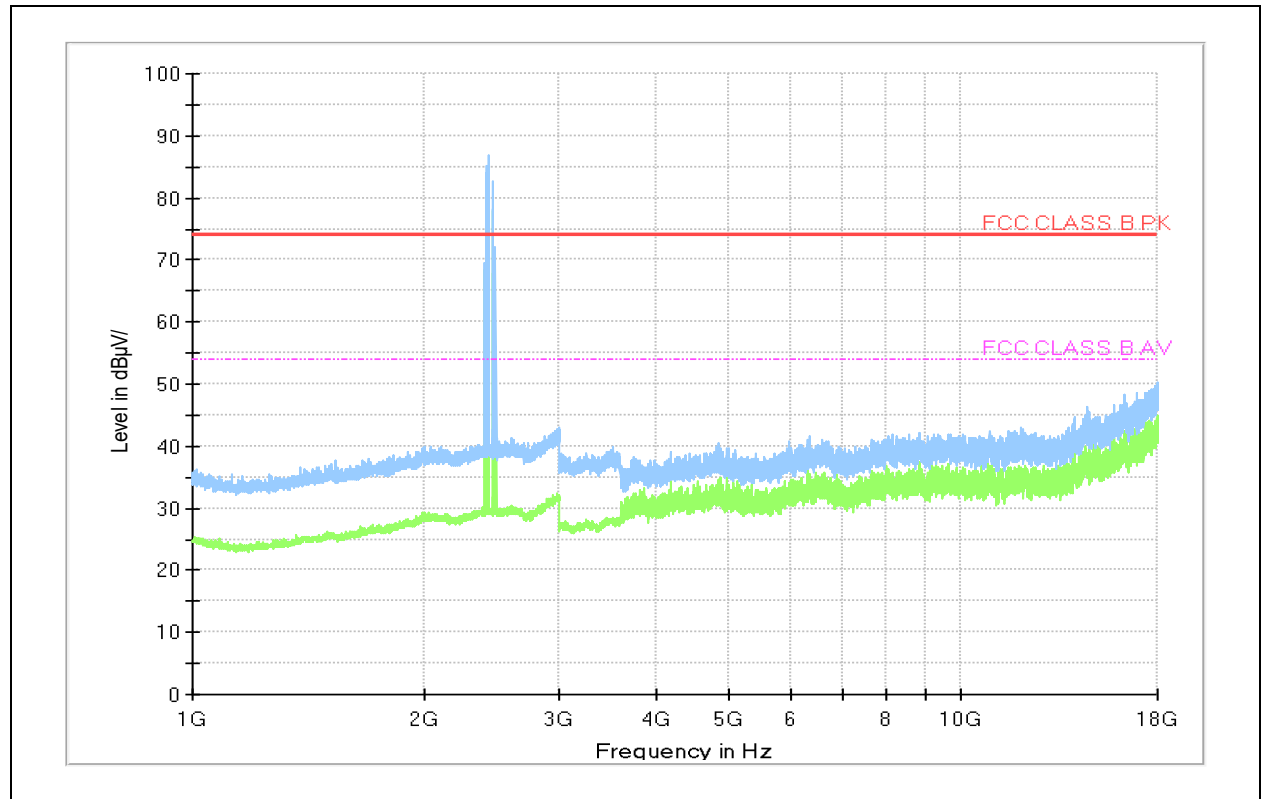- Frequencies above 1 GHz

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions.

Note 2) Radiated emissions (Tx/Rx frequency 2 400 MHz to 2 483.5 MHz) from the transceiver shall be ignored.


Note 3) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

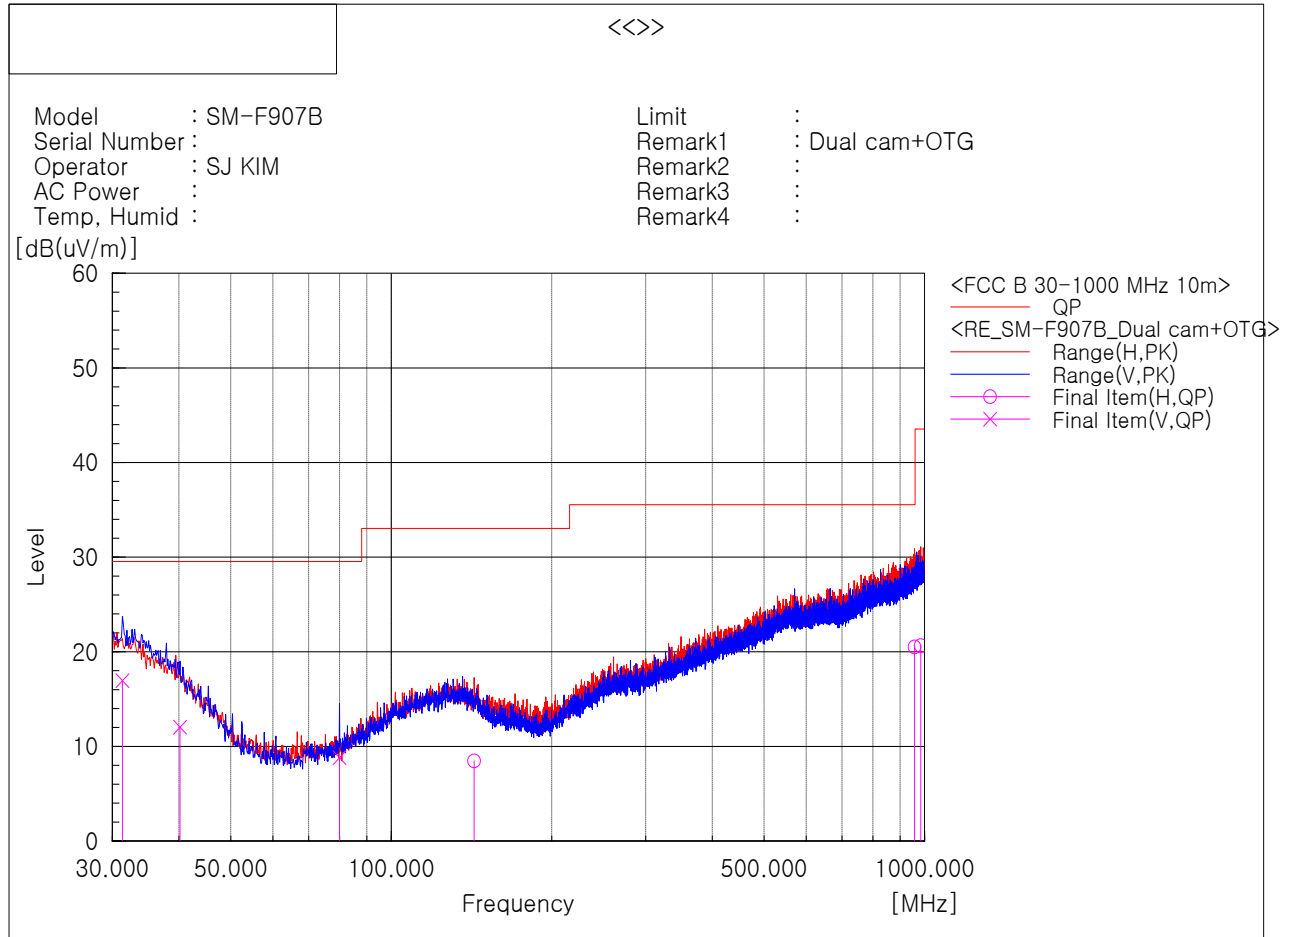☐ Operating Mode 2**- Frequencies below 1 GHz**

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	System
1	31.334	V	24.0	-7.0	17.0	29.5	12.5	101	347	2
2	40.185	V	22.7	-10.7	12.0	29.5	17.5	400	9	2
3	79.955	V	26.3	-17.5	8.8	29.5	20.7	344	44	2
4	143.005	H	22.0	-13.5	8.5	33.0	24.5	362	154	1
5	957.320	H	20.0	0.5	20.5	35.5	15.0	141	194	1
6	983.631	H	19.4	1.2	20.6	43.5	22.9	348	3	1

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

- Frequencies above 1 GHz

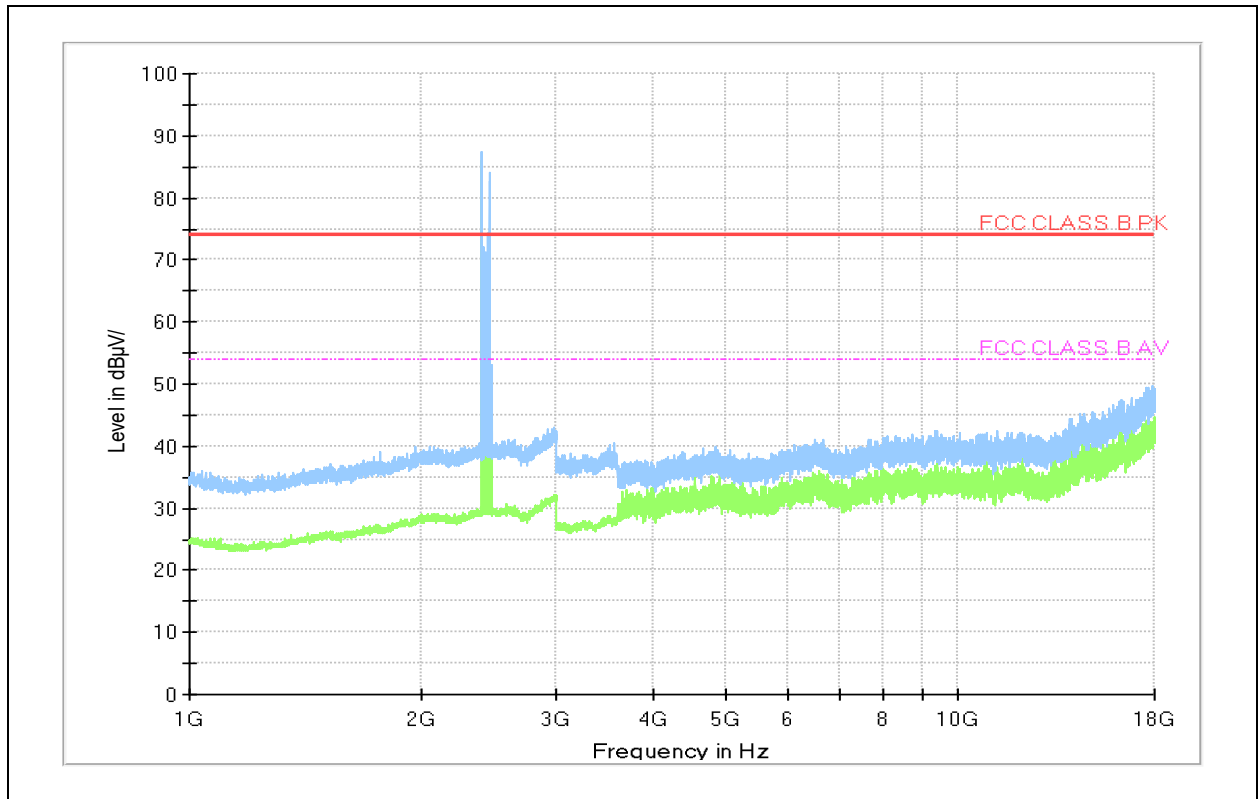

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions.

Note 2) Radiated emissions (Tx/Rx frequency 2 400 MHz to 2 483.5 MHz) from the transceiver shall be ignored.


Note 3) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

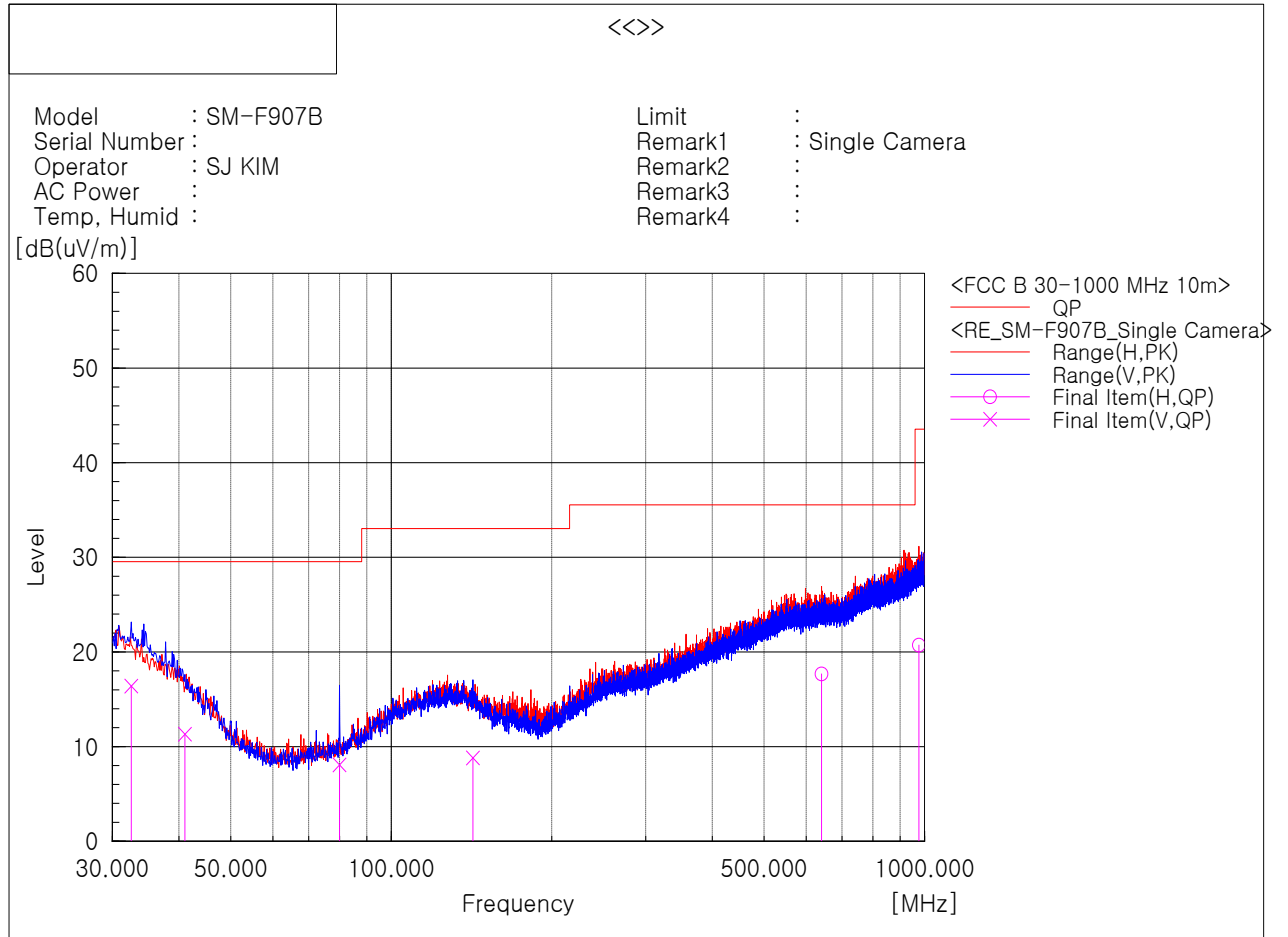☐ Operating Mode 3**- Frequencies below 1 GHz**

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	System
1	32.546	V	23.8	-7.4	16.4	29.5	13.1	251	102	2
2	41.034	V	22.5	-11.2	11.3	29.5	18.2	129	349	2
3	79.955	V	25.6	-17.5	8.1	29.5	21.4	352	260	2
4	142.278	V	21.3	-12.5	8.8	33.0	24.2	342	349	2
5	640.858	H	21.2	-3.5	17.7	35.5	17.8	206	7	1
6	975.507	H	19.7	1.0	20.7	43.5	22.8	171	58	1


Note1) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

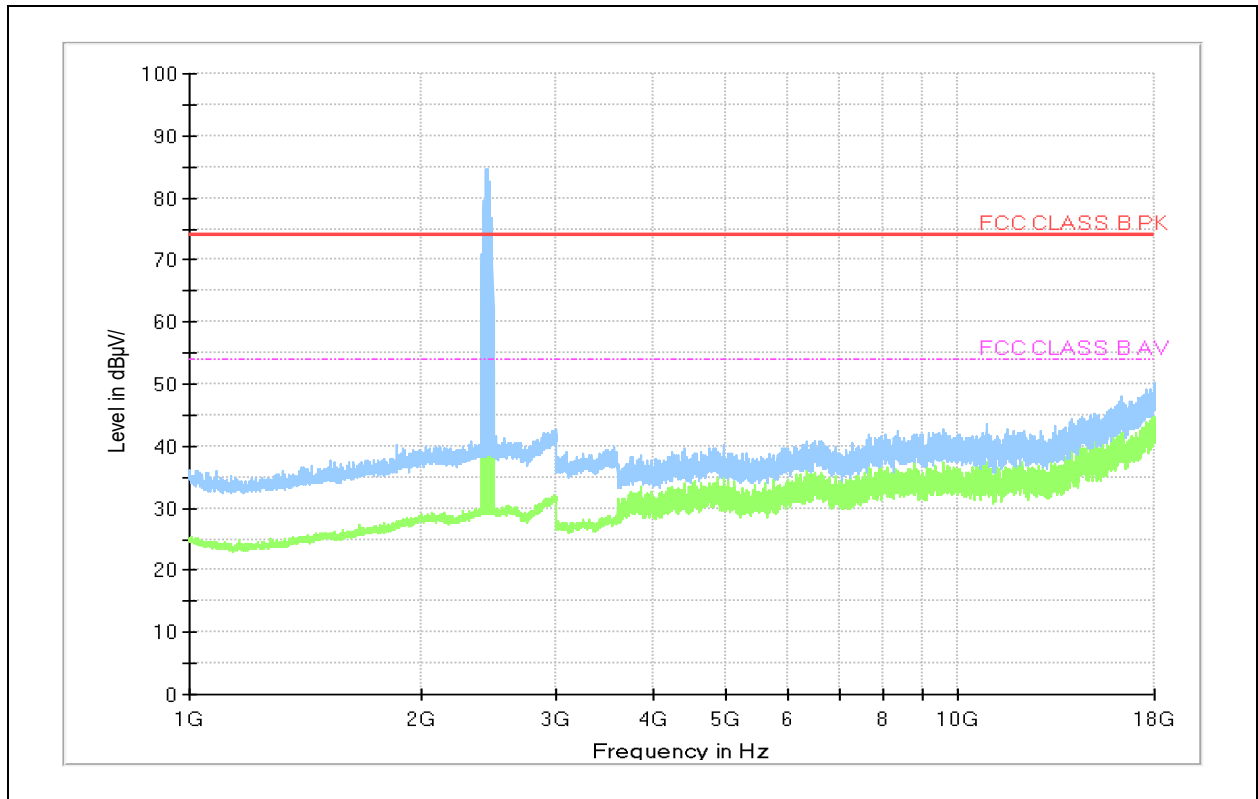- Frequencies above 1 GHz

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions.

Note 2) Radiated emissions (Tx/Rx frequency 2 400 MHz to 2 483.5 MHz) from the transceiver shall be ignored.


Note 3) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

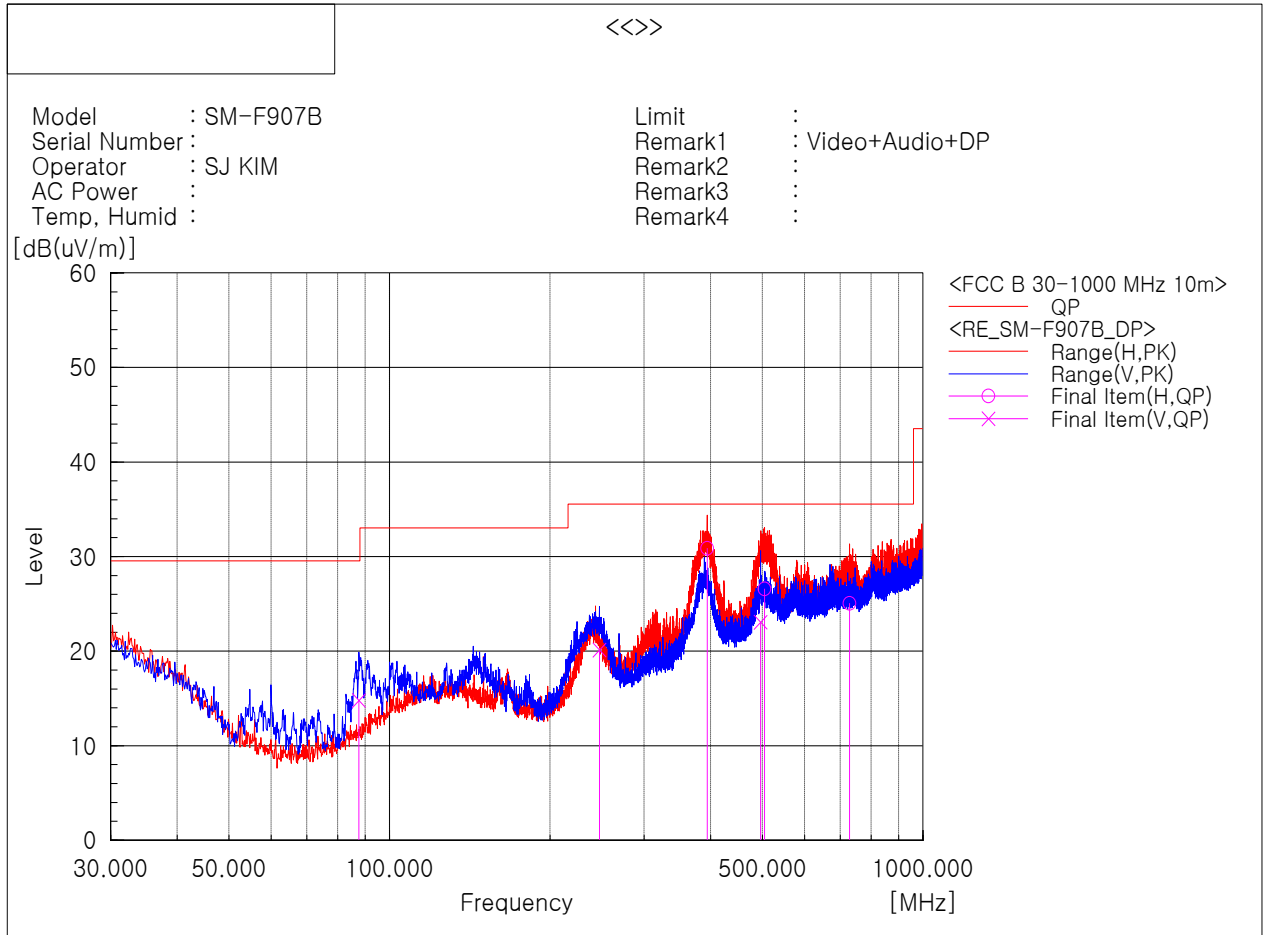☐ Operating Mode 4**- Frequencies below 1 GHz**

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	System
1	87.594	V	31.3	-16.5	14.8	29.5	14.7	170	3	2
2	247.401	V	31.3	-11.2	20.1	35.5	15.4	100	2	2
3	393.871	H	38.8	-7.9	30.9	35.5	4.6	187	221	1
4	496.085	V	28.1	-5.0	23.1	35.5	12.4	282	203	2
5	504.694	H	32.3	-5.7	26.6	35.5	8.9	275	308	1
6	728.643	H	28.4	-3.3	25.1	35.5	10.4	130	3	1


Note1) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

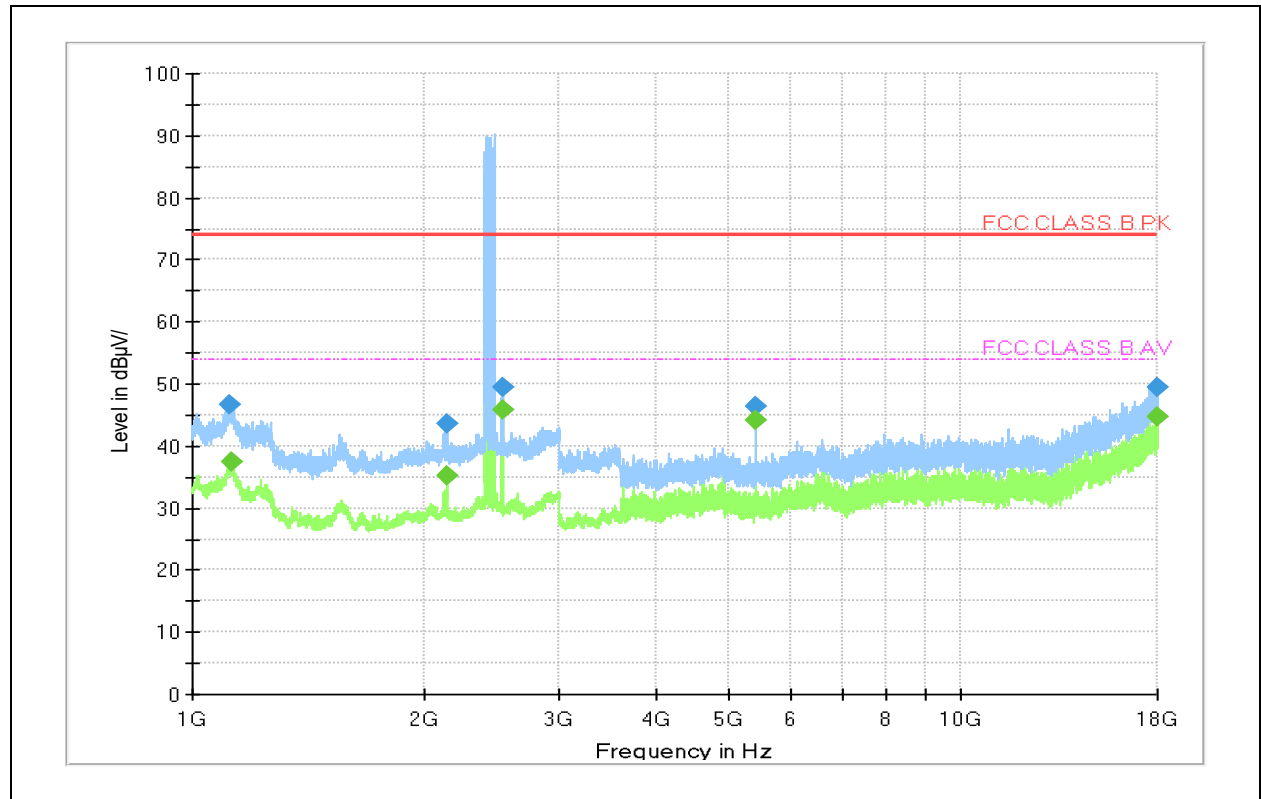- Frequencies above 1 GHz

Frequency (MHz)	PK (dBμV/m)	CAV (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1 120.400	46.8	---	74.0	27.2	100.0	V	302.0	6.5
1 123.600	---	37.4	54.0	16.6	100.0	V	302.0	6.4
2 146.000	---	35.1	54.0	18.9	100.0	H	309.0	12.8
2 147.200	43.6	---	74.0	30.4	100.0	H	210.0	12.8
2 538.800	49.5	---	74.0	24.5	100.0	H	190.0	14.3
2 539.200	---	45.9	54.0	8.1	100.0	H	190.0	14.3
5 400.000	---	44.1	54.0	9.9	100.0	H	112.0	6.5
5 400.000	46.3	---	74.0	27.7	100.0	H	112.0	6.5
17 956.000	---	44.6	54.0	9.4	100.0	V	56.0	34.6
17 967.000	49.3	---	74.0	24.7	100.0	V	70.0	34.8

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions

Note 2) Radiated emissions (Tx/Rx frequency 2 400 MHz to 2 483.5 MHz) from the transceiver shall be ignored.


Note 3) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

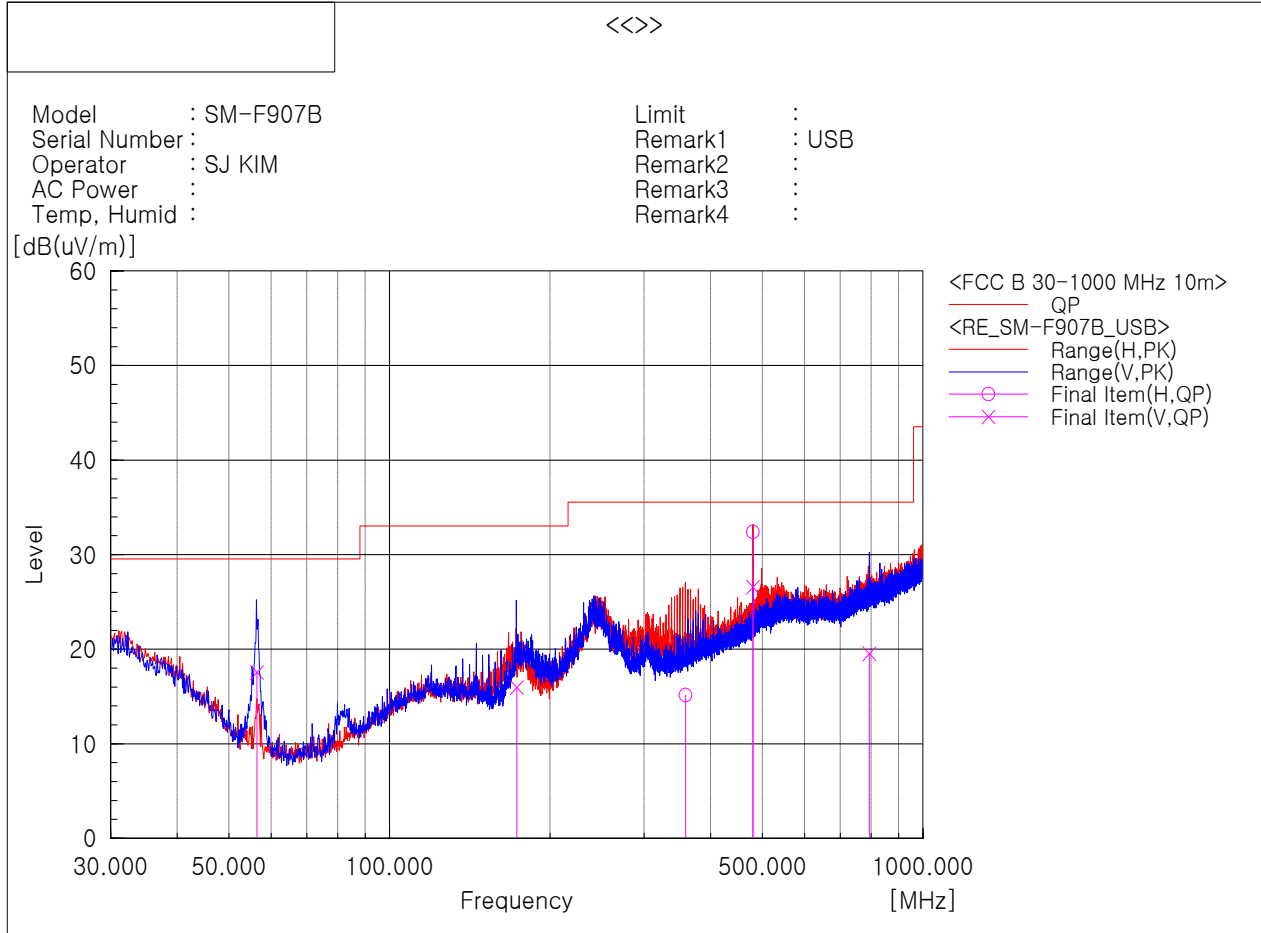☐ Operating Mode 5**- Frequencies below 1 GHz**

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	System
1	56.414	V	36.2	-18.7	17.5	29.5	12.0	195	102	2
2	173.154	V	30.4	-14.5	15.9	33.0	17.1	173	29	2
3	358.840	H	24.0	-8.9	15.1	35.5	20.4	282	19	1
4	479.995	H	38.7	-6.3	32.4	35.5	3.1	185	50	1
5	480.003	V	32.2	-5.6	26.6	35.5	8.9	356	239	2
6	793.322	V	20.9	-1.4	19.5	35.5	16.0	208	308	2


Note1) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

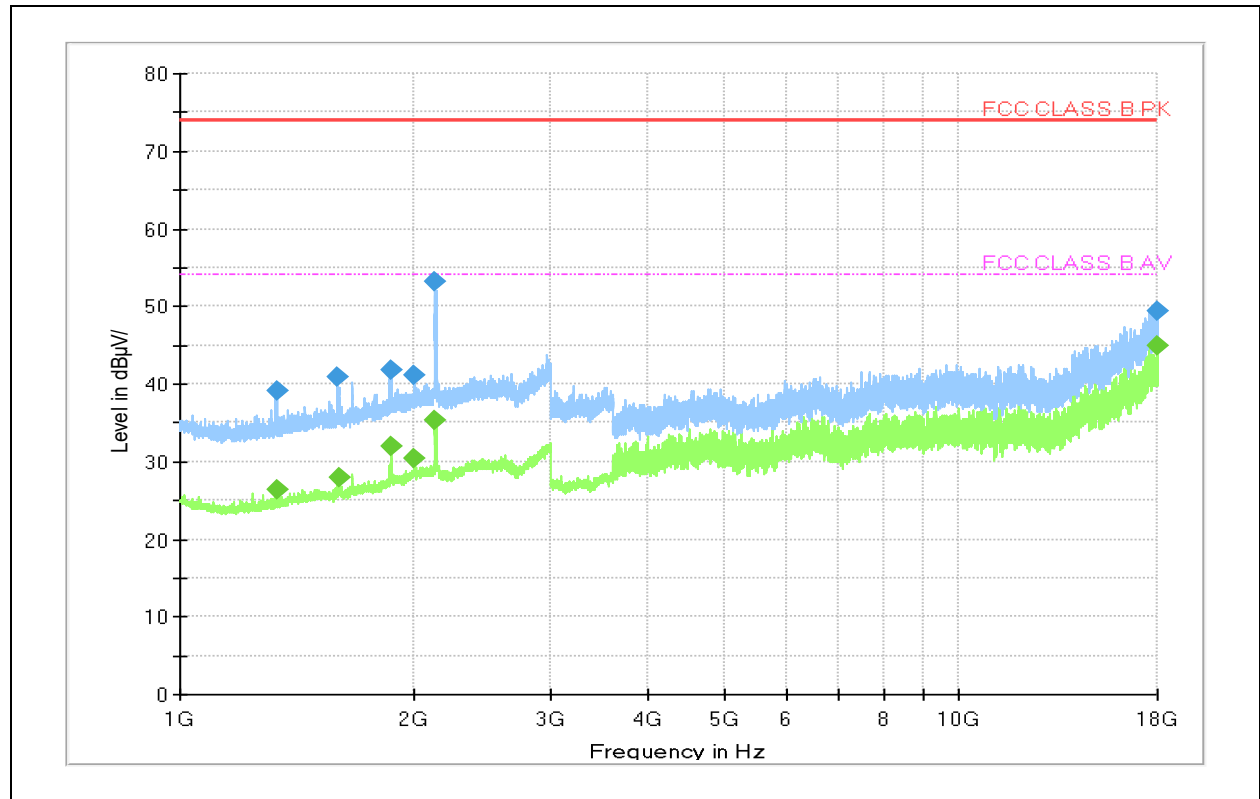- Frequencies above 1 GHz

Frequency (MHz)	PK (dBμV/m)	CAV (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1 329.600	39.2	---	74.0	34.8	100.0	V	128.0	7.8
1 329.600	---	26.4	54.0	27.6	100.0	V	128.0	7.8
1 596.400	40.9	---	74.0	33.1	100.0	V	184.0	9.8
1 598.400	---	27.9	54.0	26.1	100.0	V	84.0	9.8
1 862.000	41.8	---	74.0	32.2	100.0	V	120.0	11.7
1 864.400	---	32.0	54.0	22.0	100.0	V	25.0	11.7
1 992.400	41.1	---	74.0	32.9	100.0	V	173.0	13.0
1 995.200	---	30.5	54.0	23.5	100.0	V	173.0	13.0
2 127.200	53.1	---	74.0	20.9	100.0	V	344.0	12.9
2 127.600	---	35.3	54.0	18.7	100.0	V	6.0	12.9
17 994.500	49.4	---	74.0	24.6	100.0	H	0.0	35.2
17 999.000	---	44.9	54.0	9.1	100.0	H	1.0	35.3

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor