

TEST REPORT

Report Number: R16238088-E23

Applicant : Samsung Electronics Co Ltd
129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 16677, Rep. of Korea

MODEL : SM-F976B

FCC ID : A3LSMF976B

EUT Description : GSM/WCDMA/LTE/NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax/be, UWB,
WPT and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-210 ISSUE 11
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2026-05-06

Prepared by:
UL LLC
12 Laboratory Dr.
Durham, NC 27713, U.S.A.
TEL: (919) 549-1400



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2026-05-06	Initial Issue	Chandler Stanley

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	6
4.1. METROLOGICAL TRACEABILITY	6
4.2. DECISION RULES.....	6
4.3. MEASUREMENT UNCERTAINTY.....	6
4.4. SAMPLE CALCULATION	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM ELECTRIC FIELD STENGTH.....	7
5.3. WORST-CASE CONFIGURATION AND MODE.....	7
5.4. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	9
7. 20 dB BANDWIDTH	11
7.1.1. CONFIG 4.....	11
8. RADIATED EMISSION TEST RESULTS.....	12
8.1. LIMITS AND PROCEDURE.....	12
8.2. FCC IC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz	
13	
8.2.1. CONFIG 4.....	13
8.3. FCC IC TX SPURIOUS EMISSIONS FROM 30 TO 1000 MHz.....	14
8.3.1. CONFIG 4.....	14
9. AC MAINS LINE CONDUCTED EMISSIONS.....	16
9.1. CONFIG 4.....	17
10. SETUP PHOTOS	19
END OF TEST REPORT	19

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Samsung Electronics Co Ltd
129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 16677, Rep. of Korea

EUT DESCRIPTION: GSM/WCDMA/LTE/NR Phone + BT/BLE, DTS/UNII
a/b/g/n/ac/ax/be, UWB, WPT and NFC

MODEL: SM-F976B

SERIAL NUMBER: ZBQ0066M

SAMPLE RECEIPT DATE: 2026-03-10

DATE TESTED: 2026-03-31 to 2026-04-08

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Complies
ISED RSS-210 Issue 11, Annex B	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the U.S. government.

Approved & Released
For UL LLC By:

Prepared By:



Mike Antola
Sr. Staff Engineer
Consumer, Medical and IT Segment
UL LLC



Chandler Stanley
Engineer Project Associate
Consumer, Medical and IT Segment
UL LLC

2. TEST METHODOLOGY

This report contains data provided by the customer which can impact the validity of results. UL LLC. is only responsible for correctly integrating customer-provided data with measurements performed by UL LLC.

The tests documented in this report were performed in accordance with:

- FCC CFR 47 Part 2
- FCC CFR 47 Part 15
- FCC ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024
- ISED ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
- KDB 414788 D01 Radiated Test Site v01r01
- RSS-GEN Issue 5 + A1 + A2
- RSS-210 Issue 11 Annex B.6

3. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, Certificate Number 0751.06, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☐	Building: 12 Laboratory Dr Durham, NC 27713, U.S.A	US0067	2180C	825374
☒	Building 2800 Suite Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A		27265	

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U_{Lab}
Radio Frequency (Spectrum Analyzer)	141.2 Hz
Occupied Channel Bandwidth	1.22%
RF output power, conducted	1.3 dB (PK) 0.45 dB (AV)
Power Spectral Density, conducted	2.47 dB
Unwanted Emissions, conducted	1.94 dB
All emissions, radiated	6.01 dB
Conducted Emissions (0.150-30MHz) - LISN	3.40 dB
Temperature	0.57°C
Humidity	3.39%
DC Supply voltages	1.70%

Uncertainty figures are valid to a confidence level of 95%.

4.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE/NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax/be, UWB, WPT and NFC. This report covers WPT testing.

5.2. MAXIMUM ELECTRIC FIELD STENGTH

The transmitter has maximum peak radiated electric and magnetic field strength as follows:

Fundamental Frequency (kHz)	Mode	E field (300m distance) FCC (dBuV/m)
110-148	Charging Config 4	-5.94

5.3. WORST-CASE CONFIGURATION AND MODE

The EUT has a WPT charger operating between 110-148 kHz. Testing on the EUT was performed in the following configurations:

Config	Mode	Descriptions
1	Server: Charging Phone (parallel)	EUT charging phone in parallel position
2	Server: Charging Phone (parallel offset)	EUT charging phone in parallel offset position
3	Server: Charging Phone (perpendicular)	EUT charging phone in perpendicular position
4	Server: Charging Phone (perpendicular offset)	EUT charging phone in perpendicular offset position
5	Server: Charging Earbuds	EUT charging earbuds
6	Server: Charging Watch	EUT charging watch

For all radiated emissions tests, all configurations were investigated. The device being charged was also tested at several battery percentages. It was determined that a low battery state was the worst-case mode of operation. Therefore, all emissions testing was performed with the battery low. Configuration 4 showed worst case emissions; therefore, all final radiated emissions testing was performed in configuration 4.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Power Adapter	Sony	XQZ-UC11-010-236-21	NA	NA
Phone Being Charged for WPT	Samsung	Q8	ZBK0207M	NA
Earbuds	AKG	SM-R510	RF2WC06149E	NA
Watch	Samsung	SM-R930	RFAWC1HMHPX	NA

I/O CABLES

I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB-C	1	USB-C	Shielded	<3m	EUT to power adapter

TEST SETUP

The EUT is placed into configuration 4. The EUT was left charging another device throughout the duration of the test.

SETUP DIAGRAM

Refer to Setup Photo Exhibit R16238088-EP1d for setup diagrams and photos.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

Test Equipment Used - Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
Conducted Room 2					
90410	Spectrum Analyzer	Keysight Technologies	N9030A	2025-07-10	2026-07-10
248881	Environmental Meter	Control Company	06-662-4	2024-04-10	2026-04-10
SOFTEMI	Antenna Port Software	UL	Version 2024.2.23		
Additional Equipment used					
NA	Near Field Probe Kit	EMC Test Systems	7405	NA	

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 1)

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
0.009-30MHz					
65682	Active Loop Antenna	ETS-Lindgren	6502	2025-10-14	2027-10-14
30-1000 MHz					
90629	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2026-03-16	2028-03-16
Gain-Loss Chains					
91974	Gain-loss string: 0.009-30MHz	Various	Various	2025-05-31	2026-05-31
91976	Gain-loss string: 25-1000MHz	Various	Various	2025-05-31	2026-05-31
Receiver & Software					
197955	Spectrum Analyzer	Rohde & Schwarz	ESW44	2025-05-12	2026-05-12
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
Additional Equipment used					
241205	Environmental Meter	Fisher Scientific	15-077-963	2025-08-05	2027-08-05

Note: All equipment was in calibration at the time of tests.

Test Equipment Used - Line-Conducted Emissions – Voltage (Morrisville – Conducted 1)

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
CBL087	Coax cable, RG223, N-male to BNC-male, 20-ft.	Pasternack	PE3W06143-240	2025-04-17	2026-04-17
179892	Environmental Meter	Fisher Scientific	15-077-963	2025-08-5	2026-08-06
80391	LISN, 50-ohm/50-uH, 250uH 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50/250-25-2-01	2025-09-29	2026-09-29
75141	EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESCI 7	2025-7-30	2026-07-30
52859	Transient Limiter, 0.009-100MHz	Electro-Metrics	EM-7600	2025-7-30	2026-07-30
PS214	AC Power Source	Elgar	CW2501M	NA	NA
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
Miscellaneous (if needed)					
84681	ANSI C63.4 1m extension cable.	UL	Per Annex B of ANSI C63.4	2025-04-17	2026-04-17

Note: All equipment was in calibration at the time of tests.

7. 20 dB BANDWIDTH

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1-5% of the 20dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 20dB bandwidth function is utilized.


Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW. A minimum RBW of 100Hz is maintained per C63.10 Amendment 1 guidelines for operation in this frequency range.

RESULTS

7.1.1. CONFIG 4

Configuration	Frequency (kHz)	20 dB (kHz)
4	110-148	1.129

Tested By: 85502

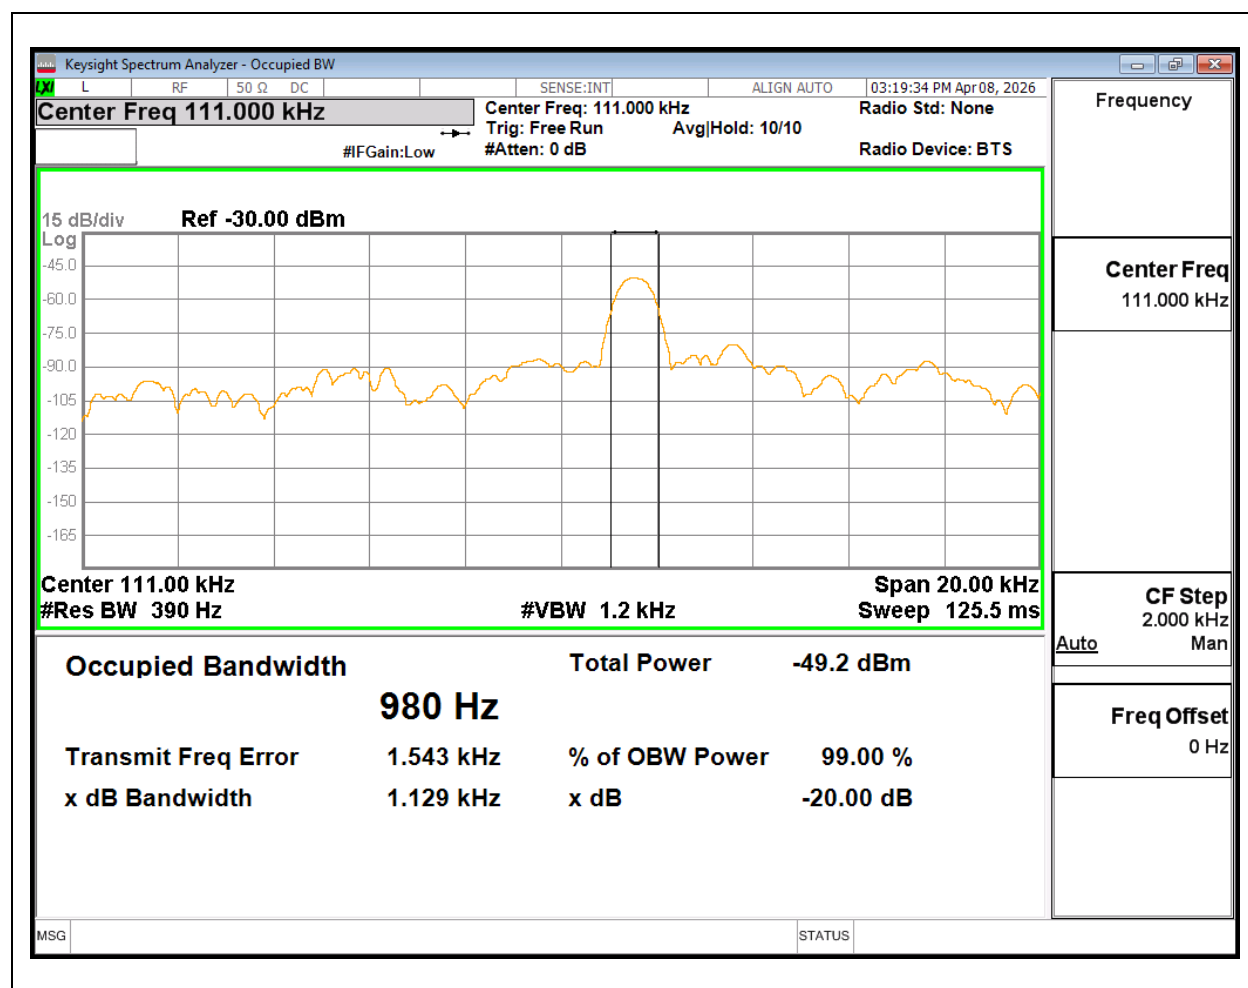

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

FCC §15.209 (a)

ICES-001 Section 6.2, IC RSS-216 6.2.2, and IC RSS-GEN Sections 8.9 and 8.10.


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960 MHz	500	3
Note: The lower limit shall apply at the transition frequency.		

RESULTS

8.2. FCC IC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz

Note: All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz – 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits was 40*Log (test distance / specification distance).

8.2.1. CONFIG 4

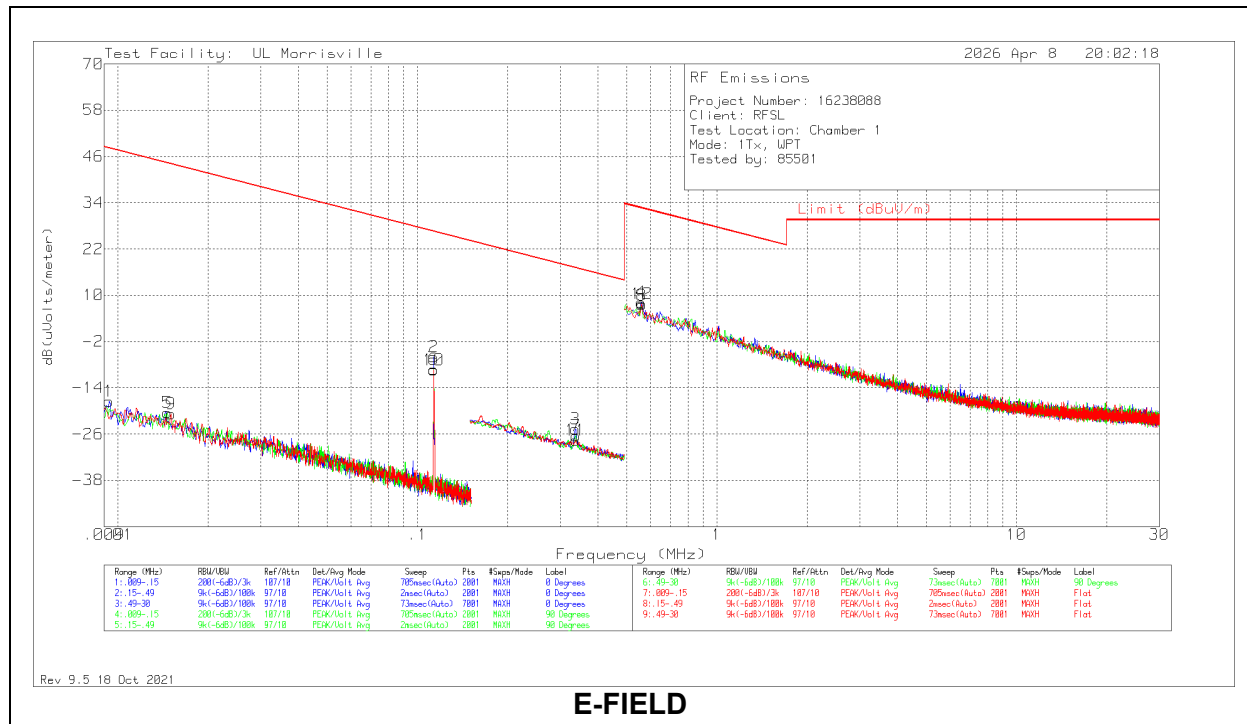



DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	ANT (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	QP/AV Limit (dBuV/m)	PK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
1	.00936	43.05	Pk	19.4	.1	-80	-17.45	48.18	68.18	-65.63	0-360	0 degs
5	.01461	42.81	Pk	16.6	.1	-80	-20.49	44.31	64.31	-64.8	0-360	90 degs
9	.01504	42.8	Pk	16.4	.1	-80	-20.7	44.06	64.06	-64.76	0-360	Flat
6	.11323	59.61	Pk	11.1	.1	-80	-9.19	26.53	46.53	-35.72	0-360	90 degs
2	.1133	62.86	Pk	11.1	.1	-80	-5.94	26.52	46.52	-32.46	0-360	0 degs
10	.1133	59.37	Pk	11.1	.1	-80	-9.43	26.52	46.52	-35.95	0-360	Flat
3	.33709	44.27	Pk	10.9	.1	-80	-24.73	17.05	37.05	-41.78	0-360	0 degs
11	.33734	41.34	Pk	10.9	.1	-80	-27.66	17.04	37.04	-44.7	0-360	Flat
7	.33743	42.57	Pk	10.9	.1	-80	-26.43	17.04	37.04	-43.47	0-360	90 degs
4	.55746	37.08	Pk	11	.1	-40	8.18	32.68	-	-24.5	0-360	0 degs
8	.56167	36.36	Pk	11	.1	-40	7.46	32.61	-	-25.15	0-360	90 degs
12	.56167	36.7	Pk	11	.1	-40	7.8	32.61	-	-24.81	0-360	Flat

Pk - Peak detector

8.3. FCC IC TX SPURIOUS EMISSIONS FROM 30 TO 1000 MHz

8.3.1. CONFIG 4

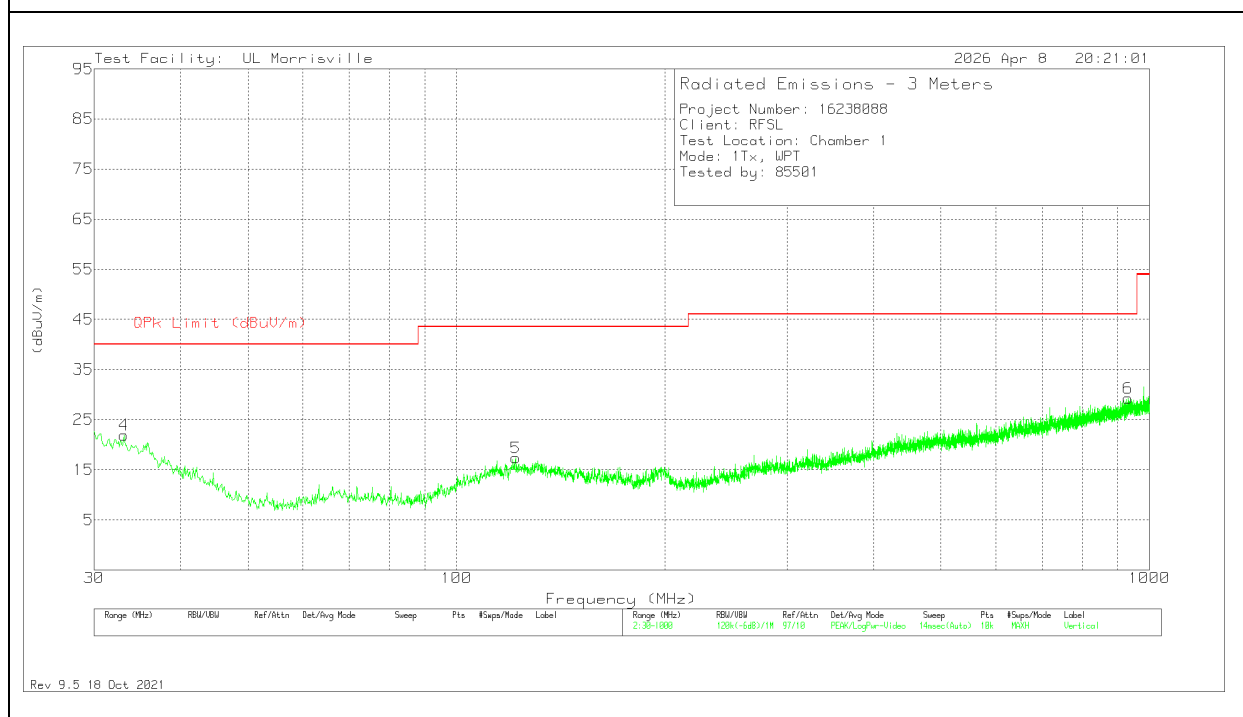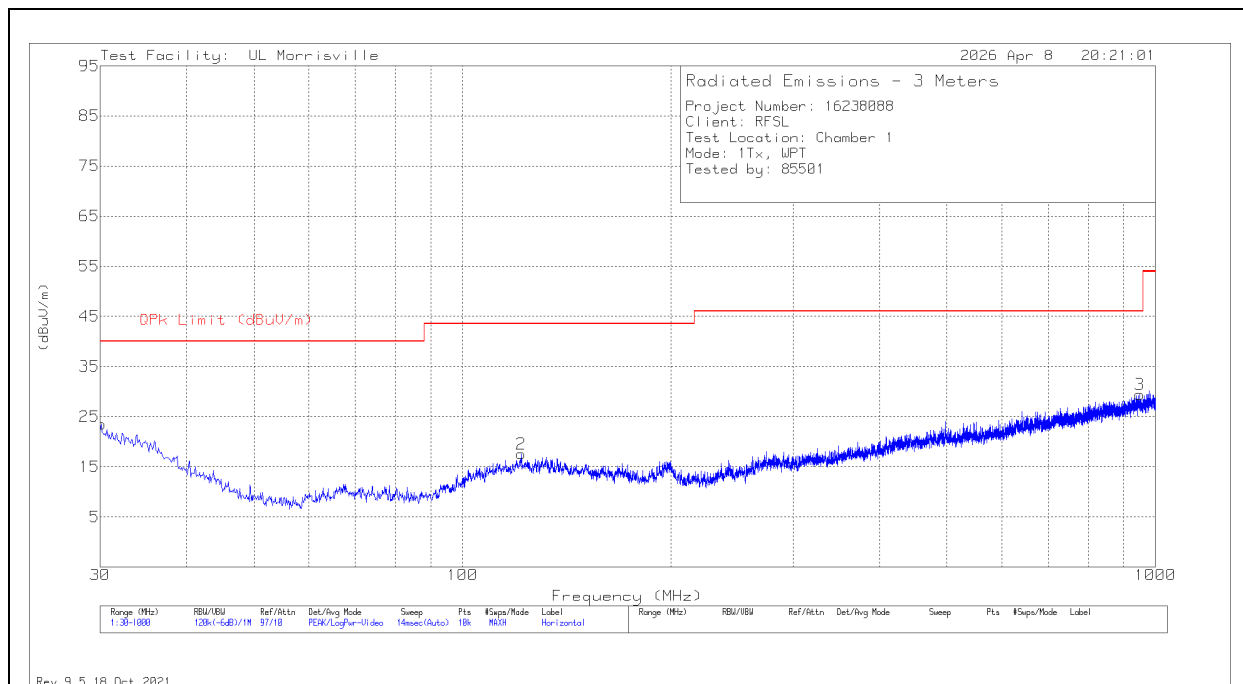

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	90628 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.097	27.91	Pk	26.8	-31.2	23.51	40	-16.49	0-360	100	H
4	33.104	28.71	Pk	24.8	-31.6	21.91	40	-18.09	0-360	101	V
2	121.568	28.38	Pk	19.7	-30.5	17.58	43.52	-25.94	0-360	200	H
5	121.665	28.24	Pk	19.7	-30.6	17.34	43.52	-26.18	0-360	101	V
6	932.197	26.04	Pk	28.5	-25.3	29.24	46.02	-16.78	0-360	101	V
3	948.978	25.99	Pk	28.8	-25.4	29.39	46.02	-16.63	0-360	200	H

Pk - Peak detector

9. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)
RSS-Gen 8.8

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Notes: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

9.1. CONFIG 4

LINE 1 RESULTS

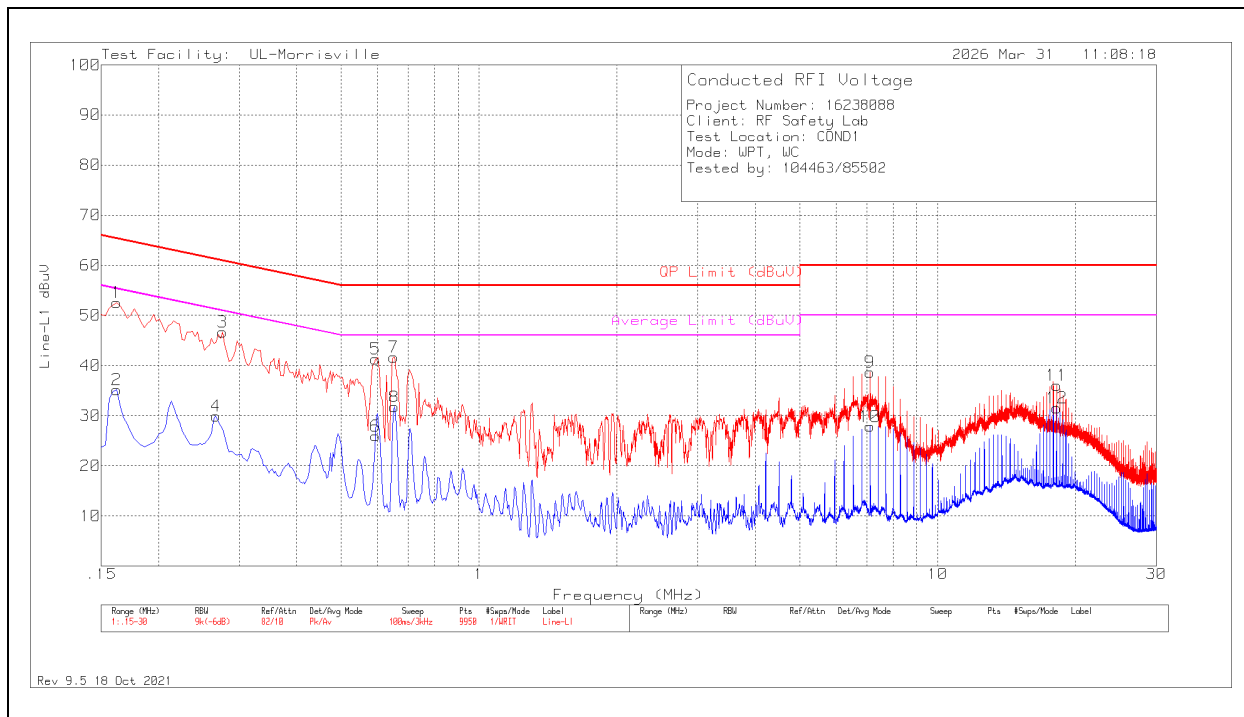


WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.162	42.64	Pk	.2	9.7	52.54	65.36	-12.82	-	-
2	.162	25.24	Av	.2	9.7	35.14	-	-	55.36	-20.22
4	.267	20.09	Av	.1	9.7	29.89	-	-	51.21	-21.32
3	.276	36.92	Pk	.1	9.7	46.72	60.94	-14.22	-	-
5	.594	31.62	Pk	0	9.7	41.32	56	-14.68	-	-
6	.594	16.26	Av	0	9.7	25.96	-	-	46	-20.04
7	.651	32.01	Pk	0	9.7	41.71	56	-14.29	-	-
8	.654	22.03	Av	0	9.7	31.73	-	-	46	-14.27
9	7.125	29.02	Pk	0	9.7	38.72	60	-21.28	-	-
10	7.125	18.14	Av	0	9.7	27.84	-	-	50	-22.16
11	18.165	26.16	Pk	.1	9.8	36.06	60	-23.94	-	-
12	18.165	21.63	Av	.1	9.8	31.53	-	-	50	-18.47

Pk - Peak detector

Av - Average detection

LINE 2 RESULTS

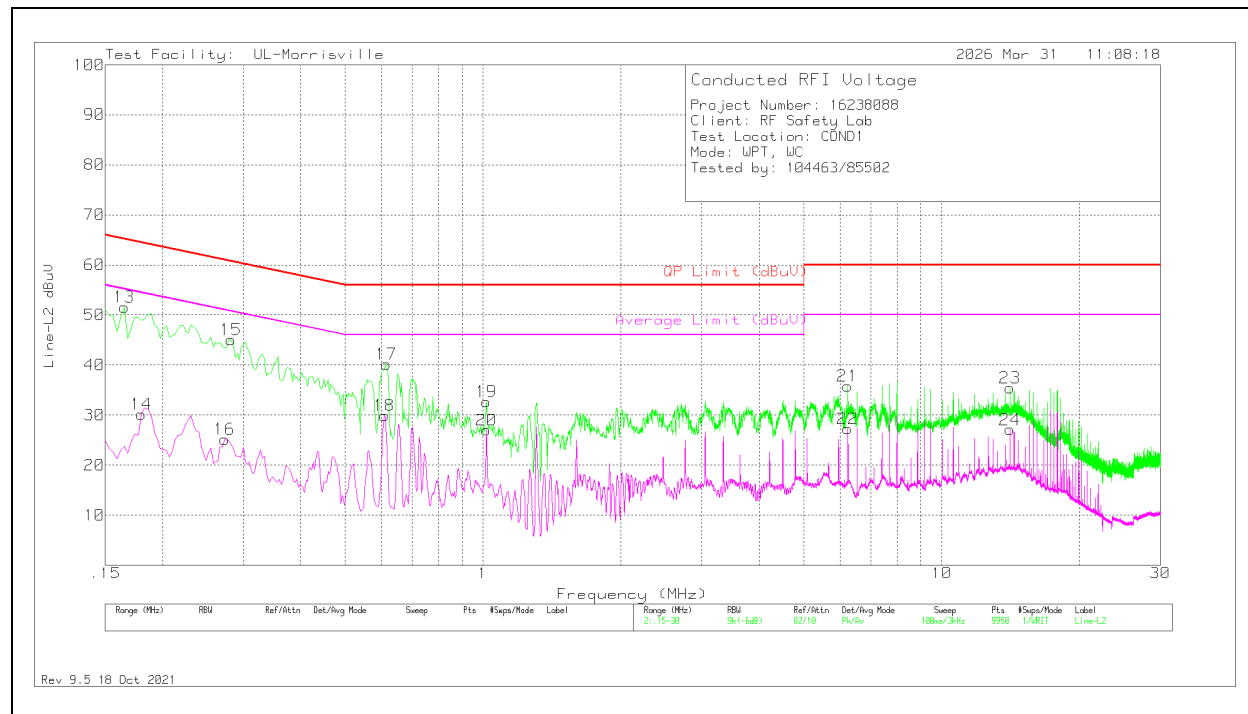

WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.165	41.69	Pk	.2	9.7	51.59	65.21	-13.62	-	-
14	.18	20.27	Av	.2	9.7	30.17	-	-	54.49	-24.32
16	.273	15.4	Av	.1	9.7	25.2	-	-	51.03	-25.83
15	.282	35.26	Pk	.1	9.7	45.06	60.76	-15.7	-	-
18	.609	20.23	Av	0	9.7	29.93	-	-	46	-16.07
17	.615	30.48	Pk	0	9.7	40.18	56	-15.82	-	-
19	1.017	22.93	Pk	0	9.7	32.63	56	-23.37	-	-
20	1.017	17.28	Av	0	9.7	26.98	-	-	46	-19.02
21	6.246	26.06	Pk	0	9.7	35.76	60	-24.24	-	-
22	6.246	17.53	Av	0	9.7	27.23	-	-	50	-22.77
23	14.097	25.52	Pk	.1	9.8	35.42	60	-24.58	-	-
24	14.097	17.19	Av	.1	9.8	27.09	-	-	50	-22.91

Pk - Peak detector

Av - Average detection

10. SETUP PHOTOS

Refer to Setup Photo Exhibit R16238088-EP1d for setup diagrams and photos.

END OF TEST REPORT