



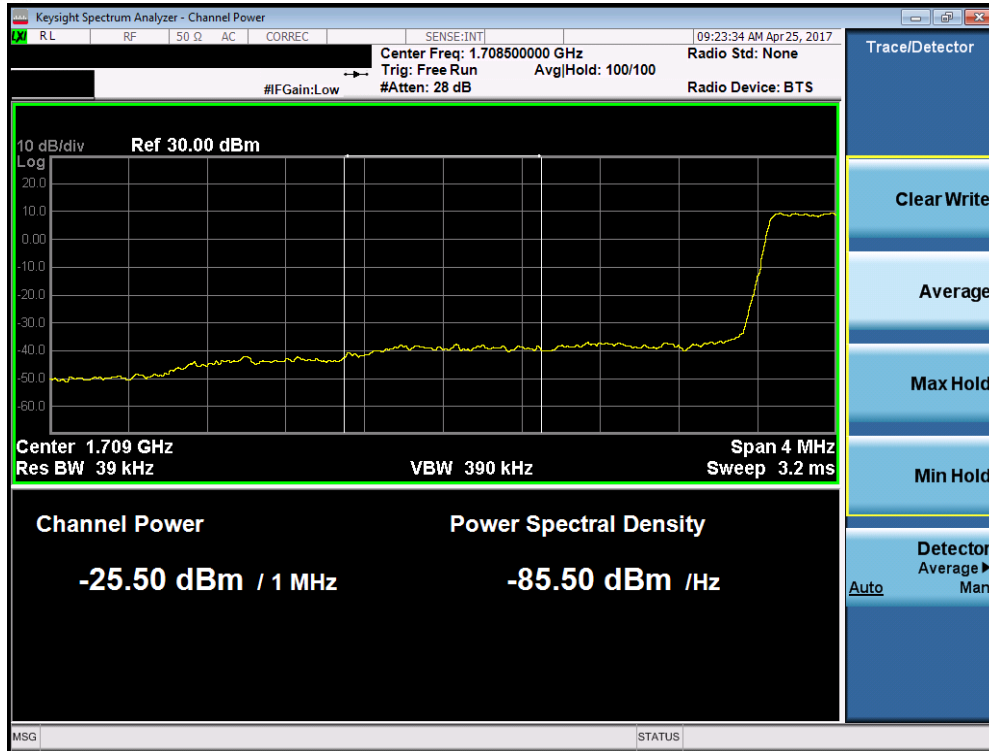


Plot 7-171. Lower Extended Band Edge Plot (Band 4/66 – 1.4MHz QPSK – RB Size 6)

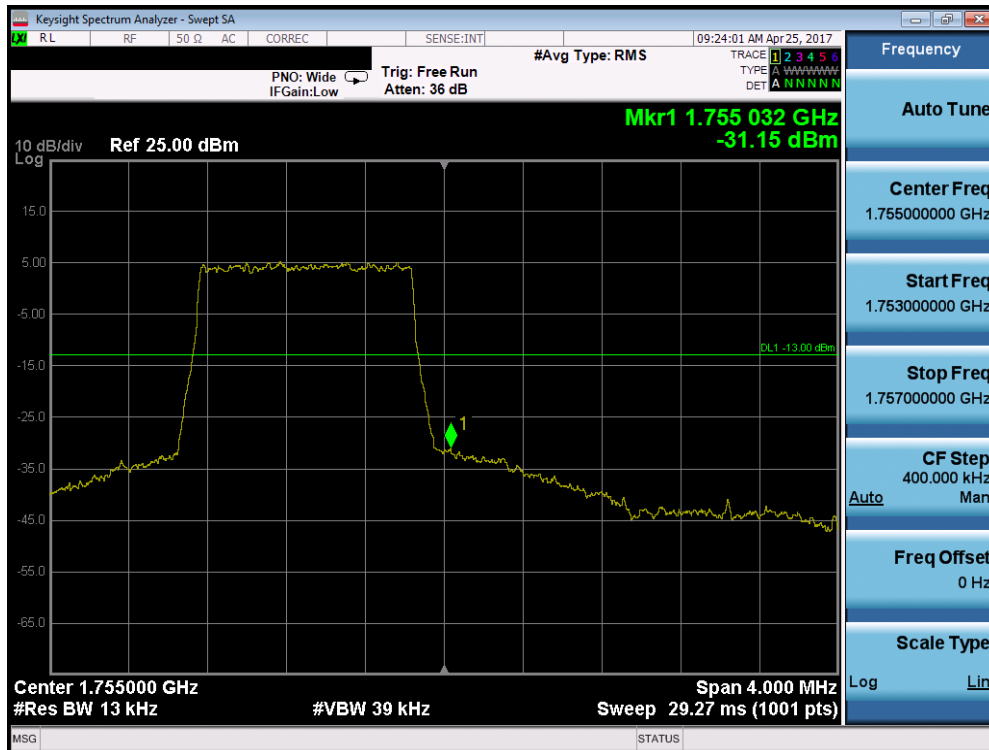


Plot 7-172. Upper Band Edge Plot (Band 4/66 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 105 of 193

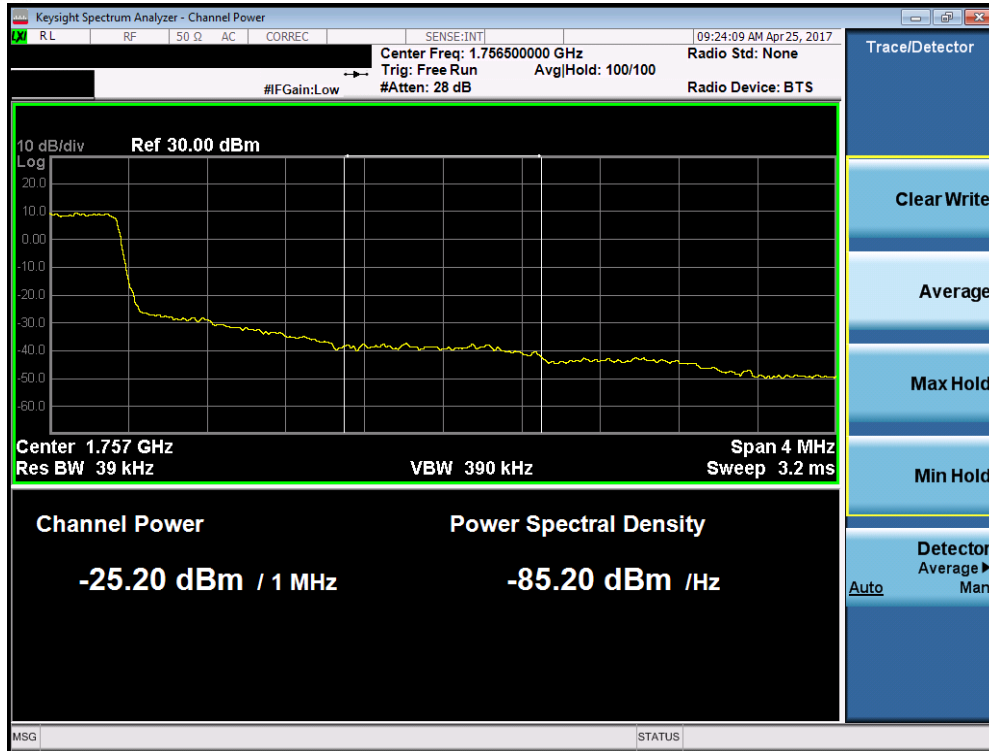


Plot 7-173. Upper Extended Band Edge Plot (Band 4/66 – 1.4MHz QPSK – RB Size 6)

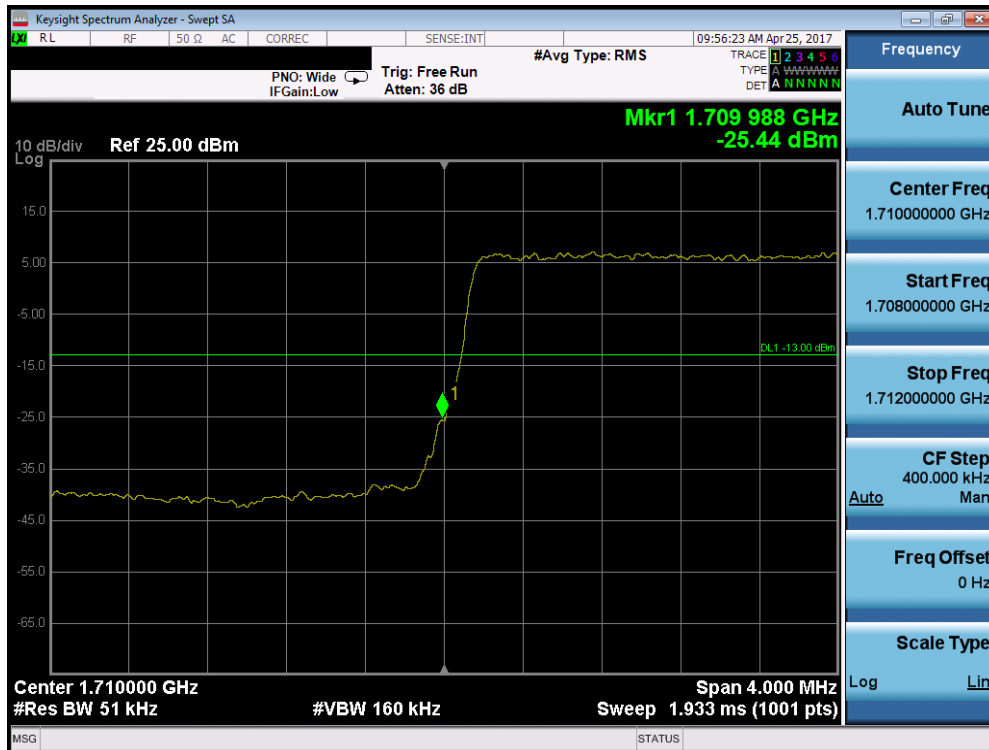

Plot 7-174. Lower Band Edge Plot (Band 4/66 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 106 of 193

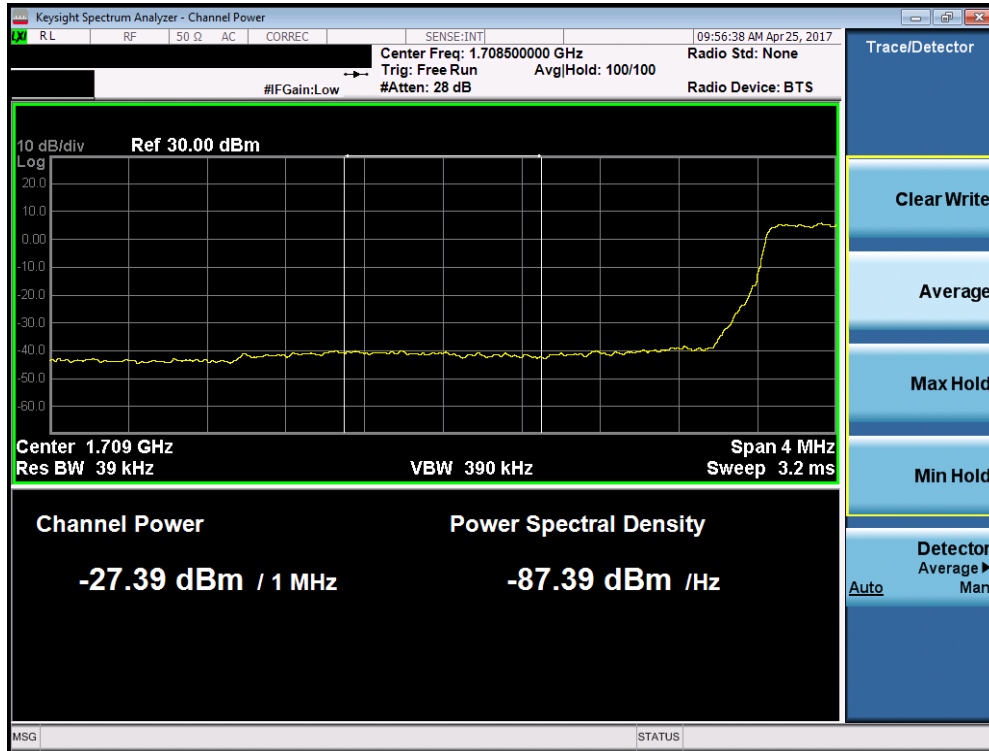


Plot 7-175. Lower Extended Band Edge Plot (Band 4/66 – 3.0MHz QPSK – RB Size 15)




Plot 7-176. Upper Band Edge Plot (Band 4/66 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 107 of 193

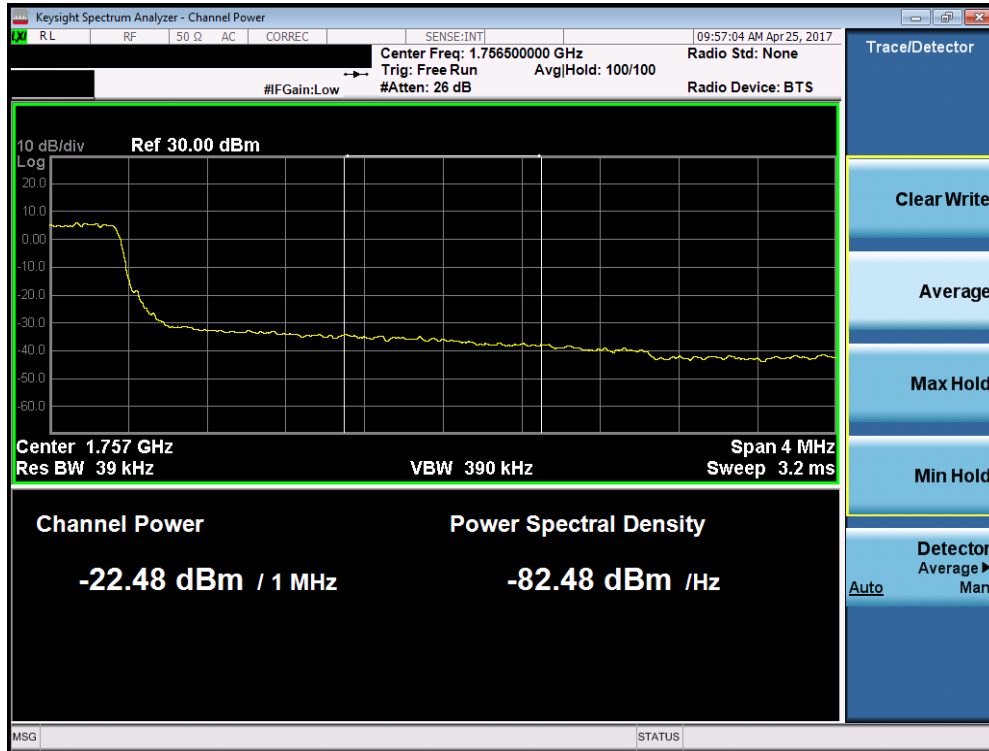


Plot 7-177. Upper Extended Band Edge Plot (Band 4/66 – 3.0MHz QPSK – RB Size 15)

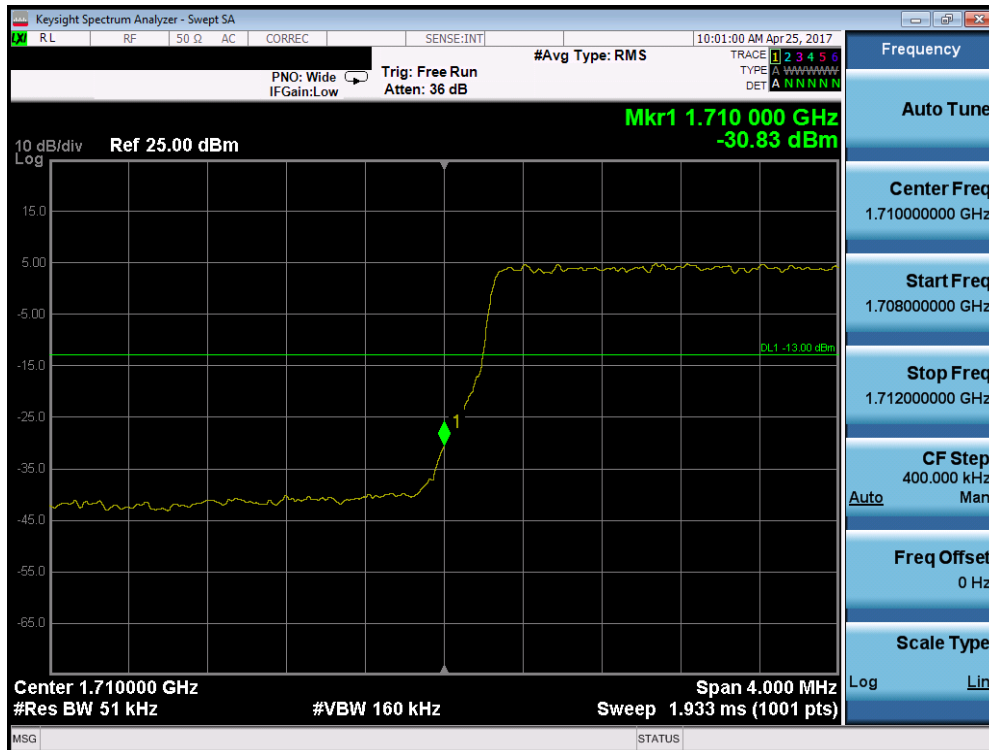

Plot 7-178. Lower Band Edge Plot (Band 4/66 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 108 of 193

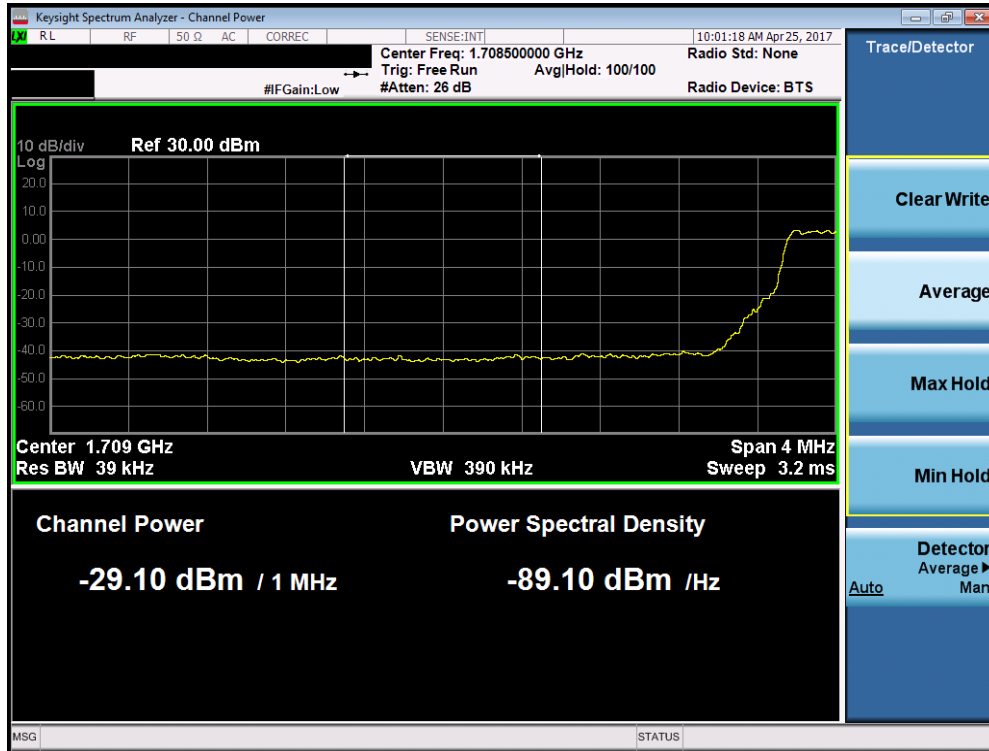


Plot 7-179. Lower Extended Band Edge Plot (Band 4/66 – 5.0MHz QPSK – RB Size 25)




Plot 7-180. Upper Band Edge Plot (Band 4/66 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 109 of 193

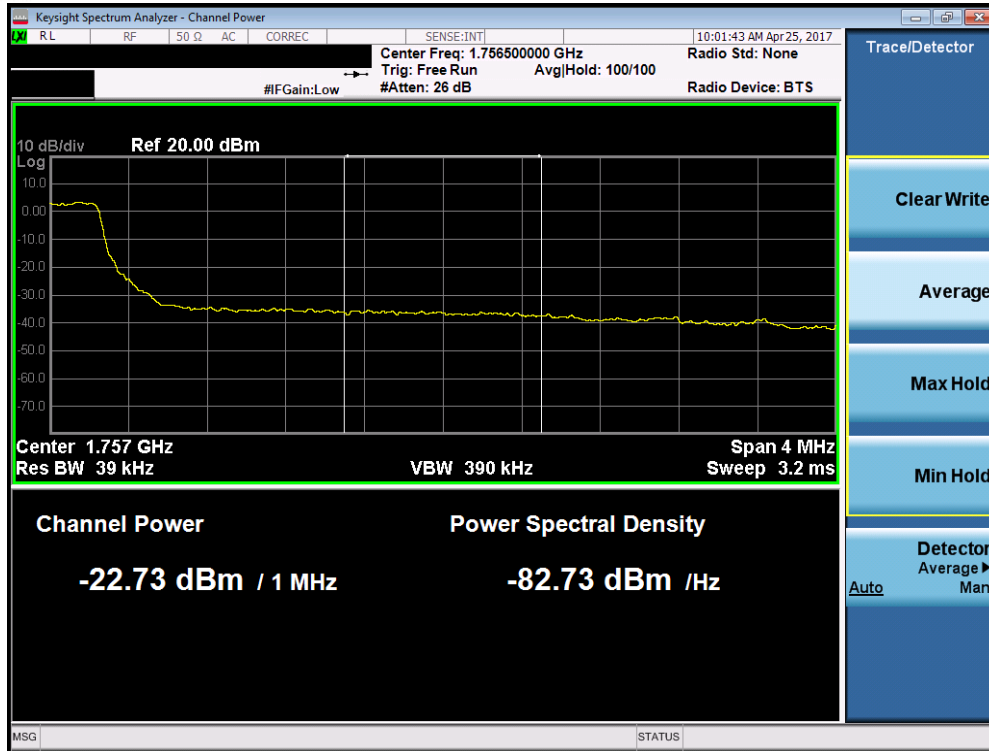


Plot 7-181. Upper Extended Band Edge Plot (Band 4/66 – 5.0MHz QPSK – RB Size 25)

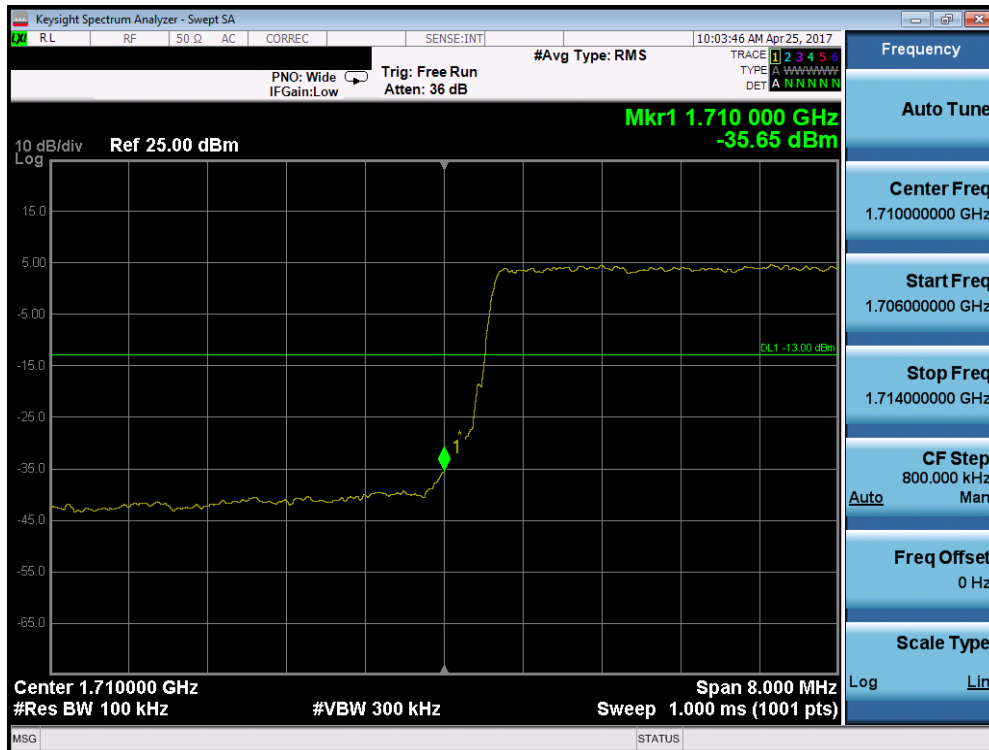

Plot 7-182. Lower Band Edge Plot (Band 4/66 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 110 of 193

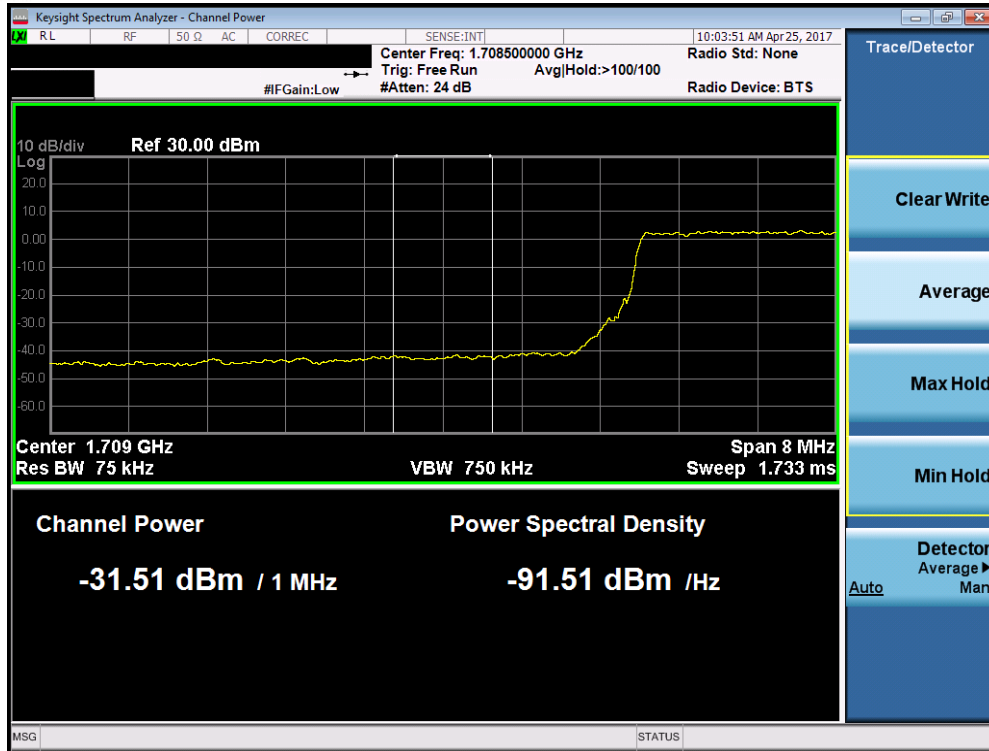


Plot 7-183. Lower Extended Band Edge Plot (Band 4/66 – 10.0MHz QPSK – RB Size 50)




Plot 7-184. Upper Band Edge Plot (Band 4/66 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 111 of 193

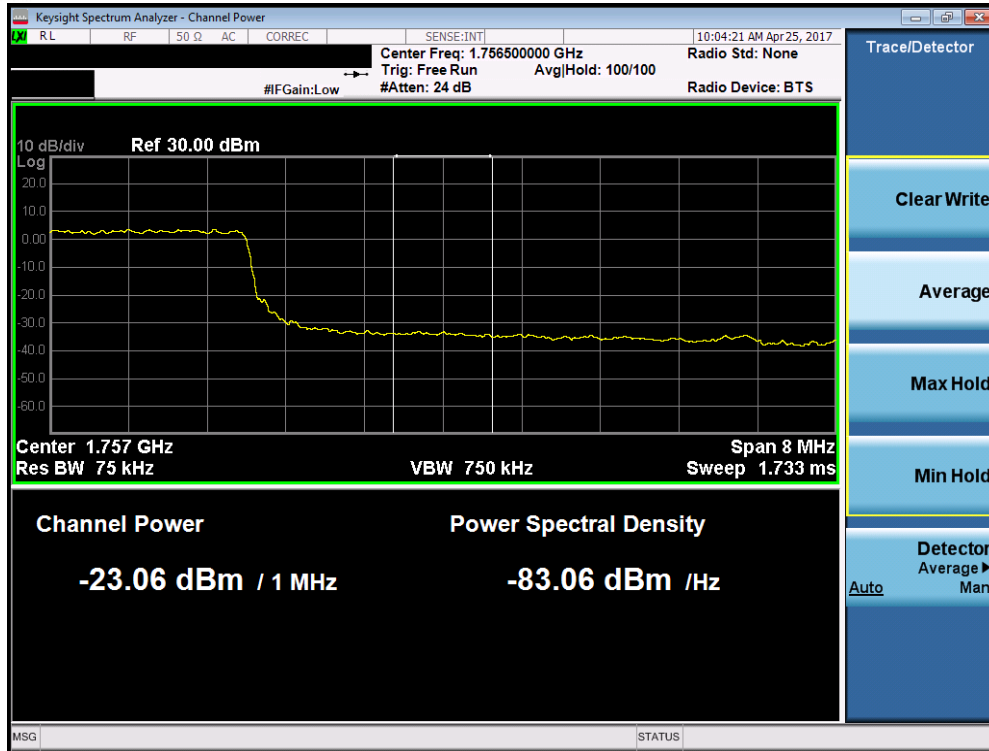


Plot 7-185. Upper Extended Band Edge Plot (Band 4/66 – 10.0MHz QPSK – RB Size 50)

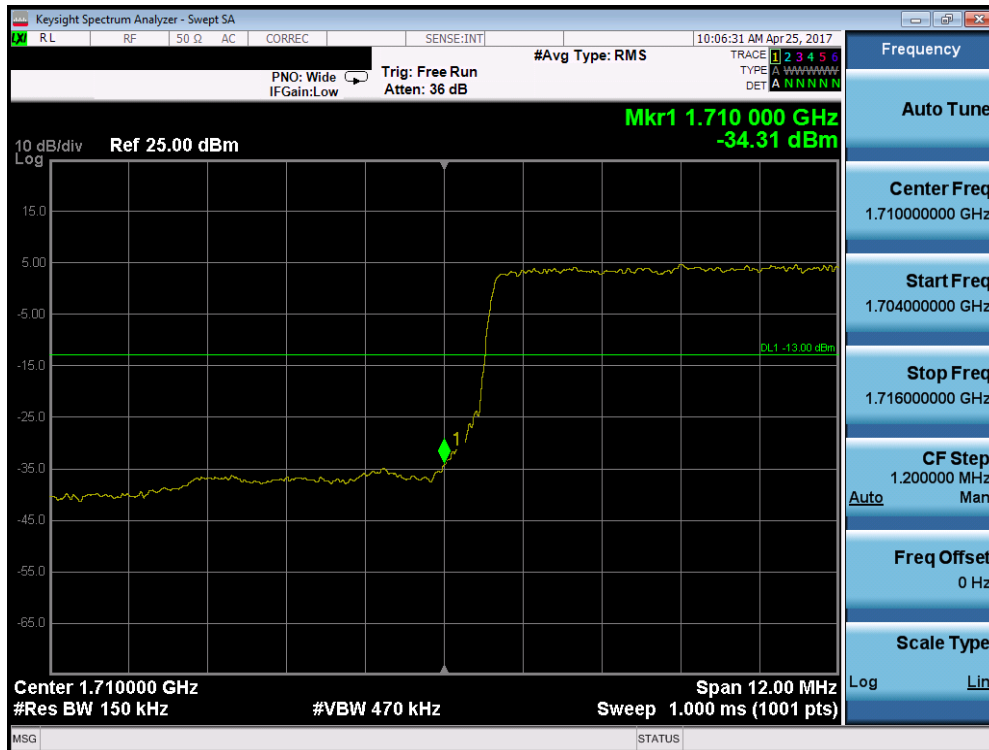


Plot 7-186. Lower Band Edge Plot (Band 4/66 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 112 of 193

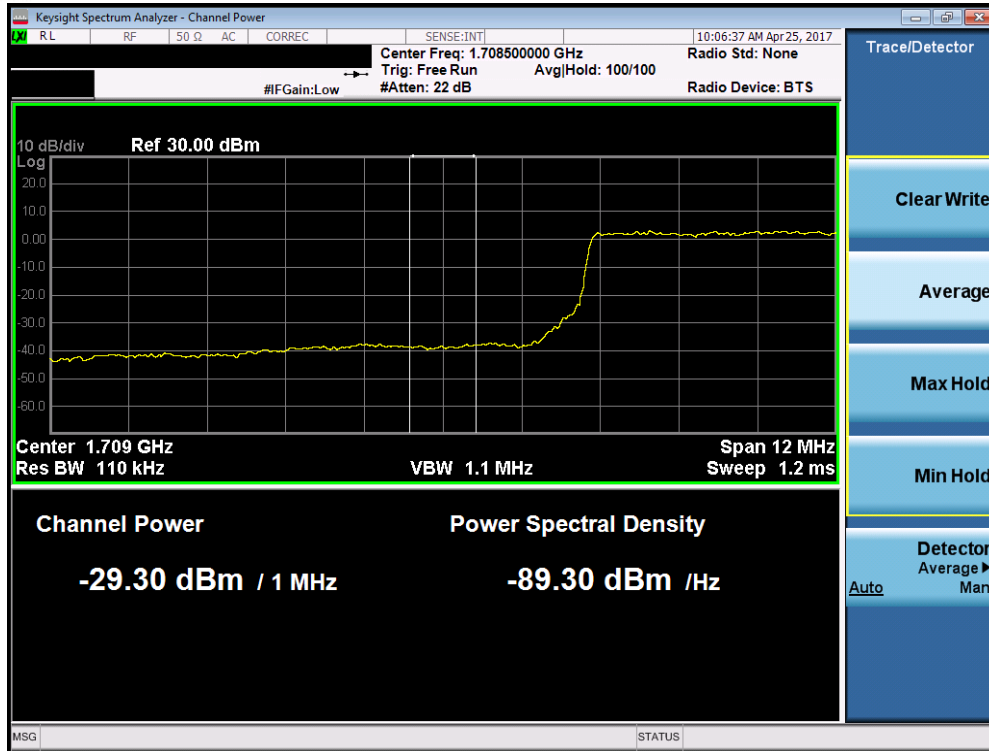


Plot 7-187. Lower Extended Band Edge Plot (Band 4/66 – 15.0MHz QPSK – RB Size 75)

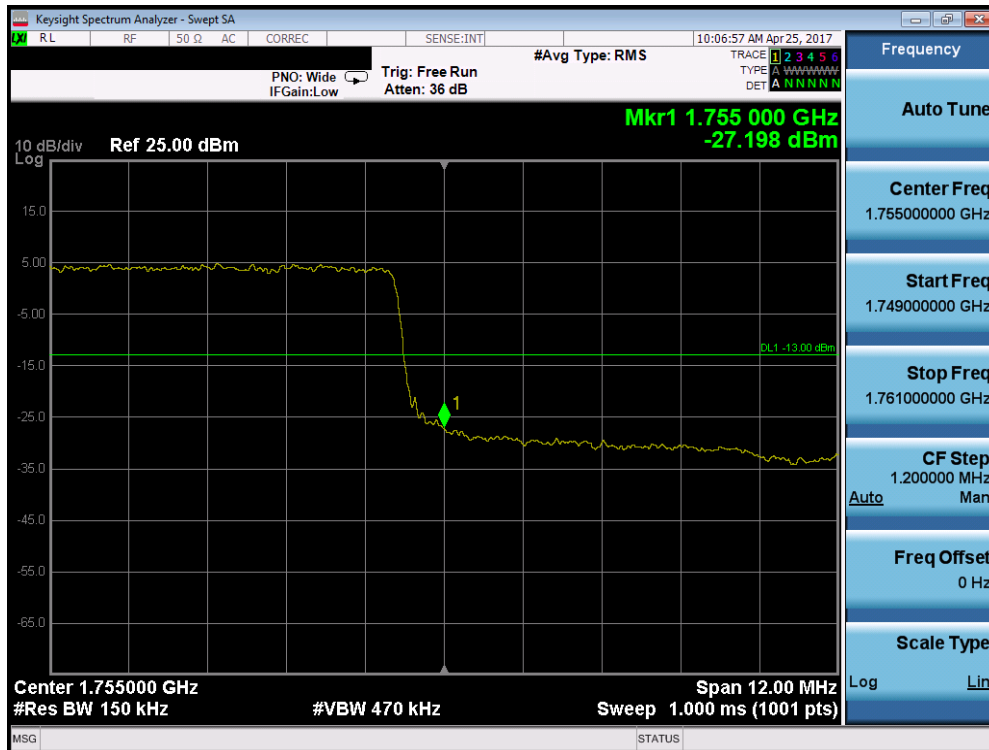


Plot 7-188. Upper Band Edge Plot (Band 4/66 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 113 of 193

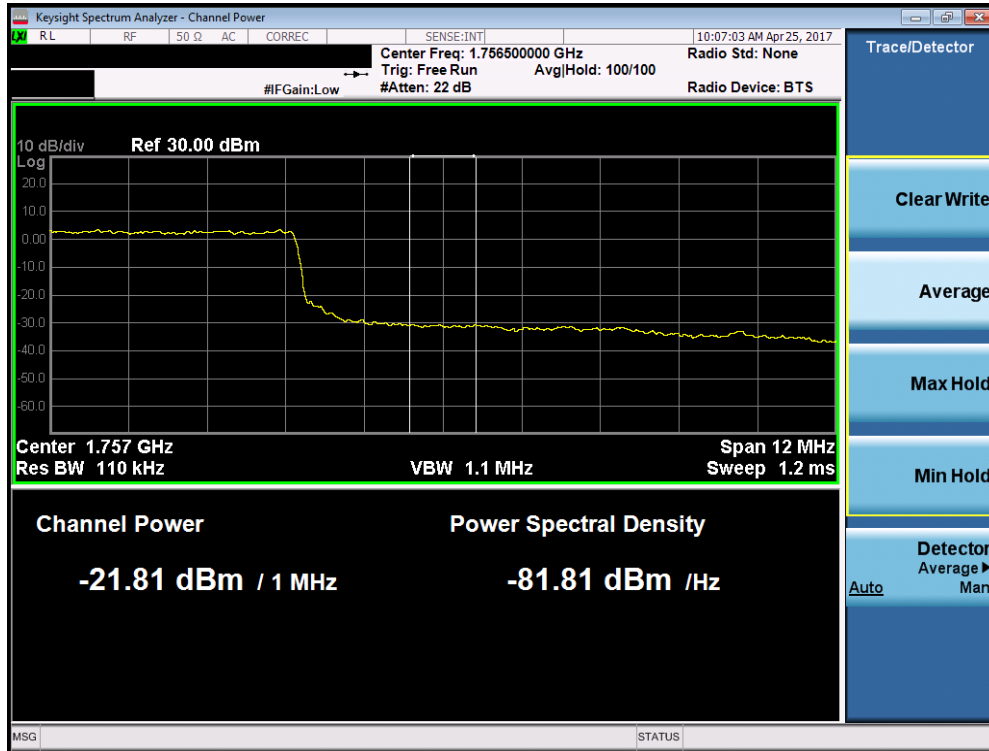


Plot 7-189. Upper Extended Band Edge Plot (Band 4/66 – 15.0MHz QPSK – RB Size 75)

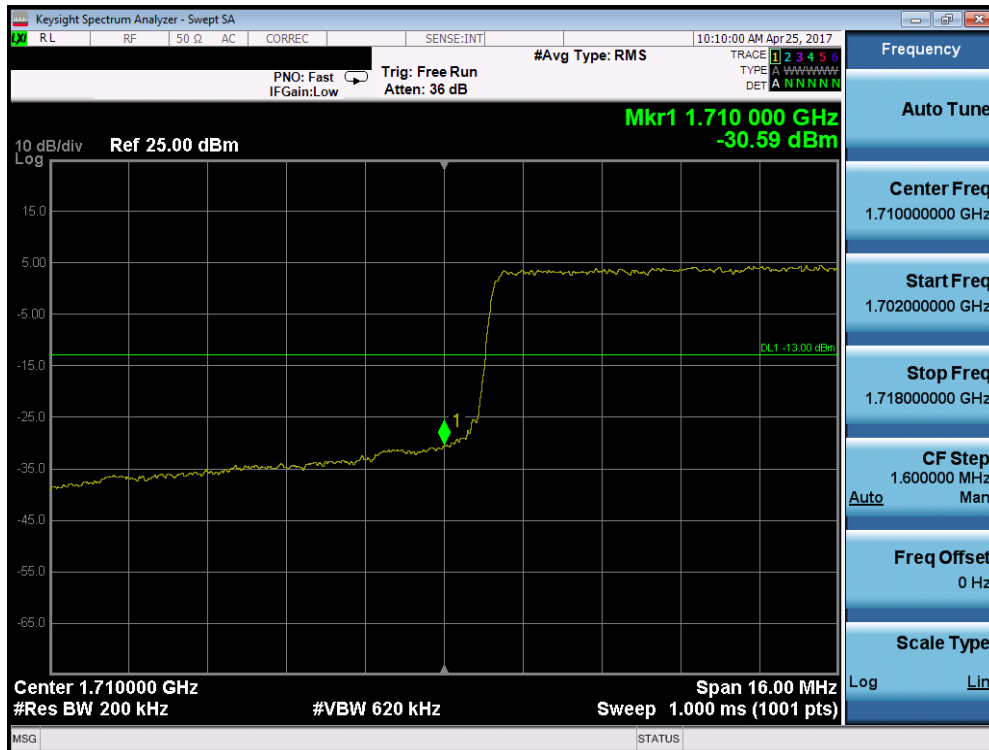


Plot 7-190. Lower Band Edge Plot (Band 4/66 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 114 of 193

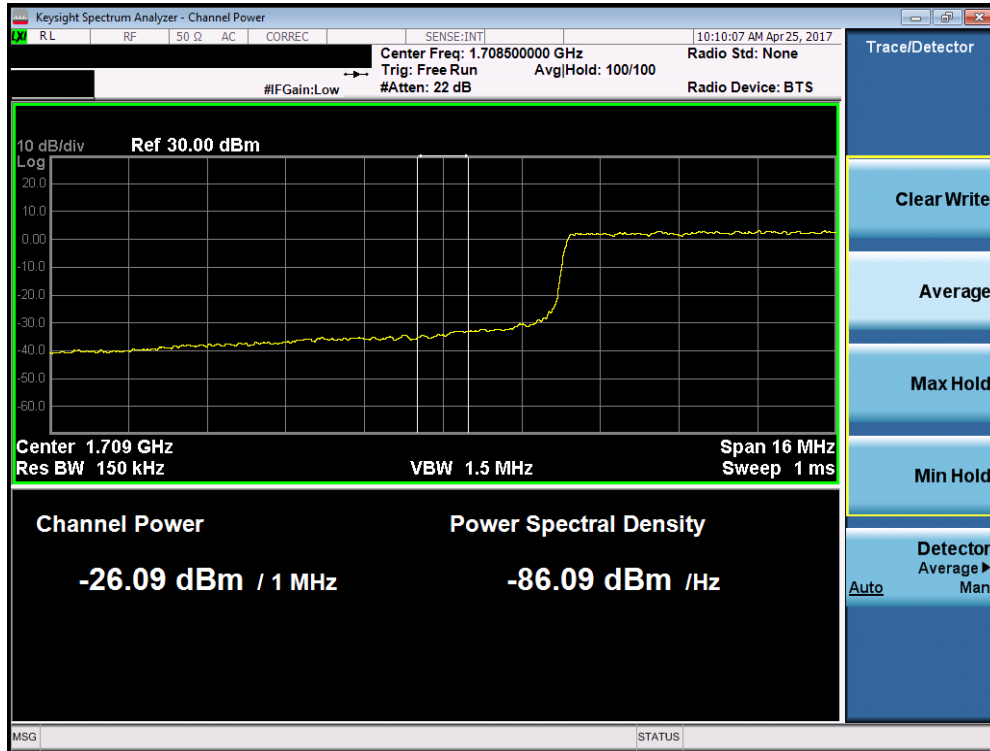


Plot 7-191. Lower Extended Band Edge Plot (Band 4/66 – 20.0MHz QPSK – RB Size 100)

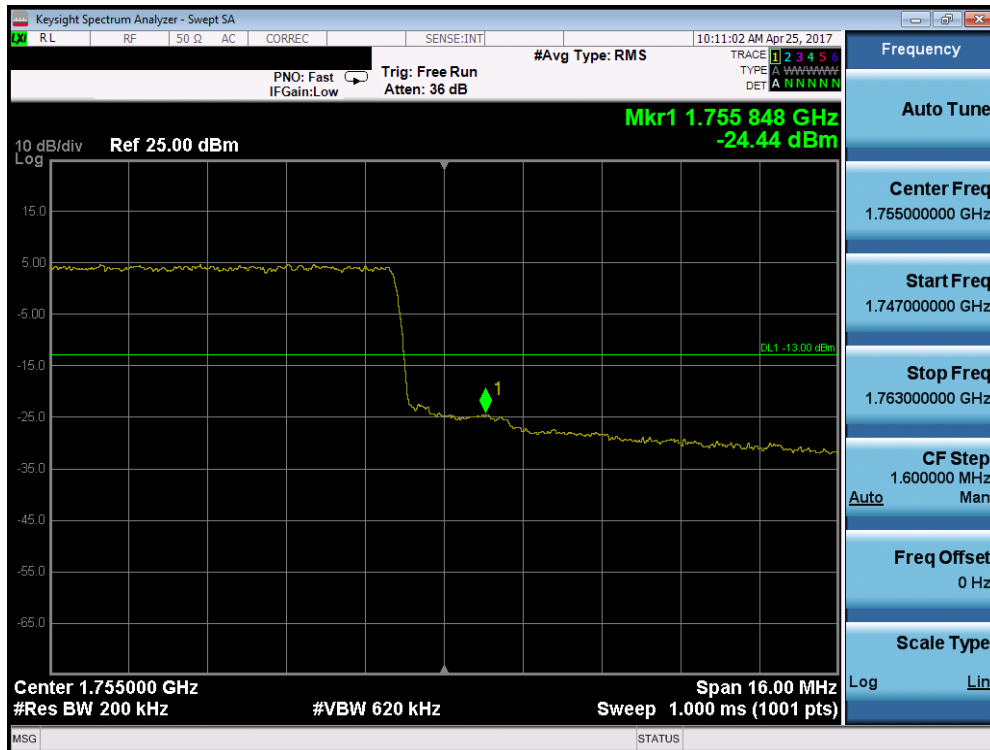


Plot 7-192. Upper Band Edge Plot (Band 4/66 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 115 of 193

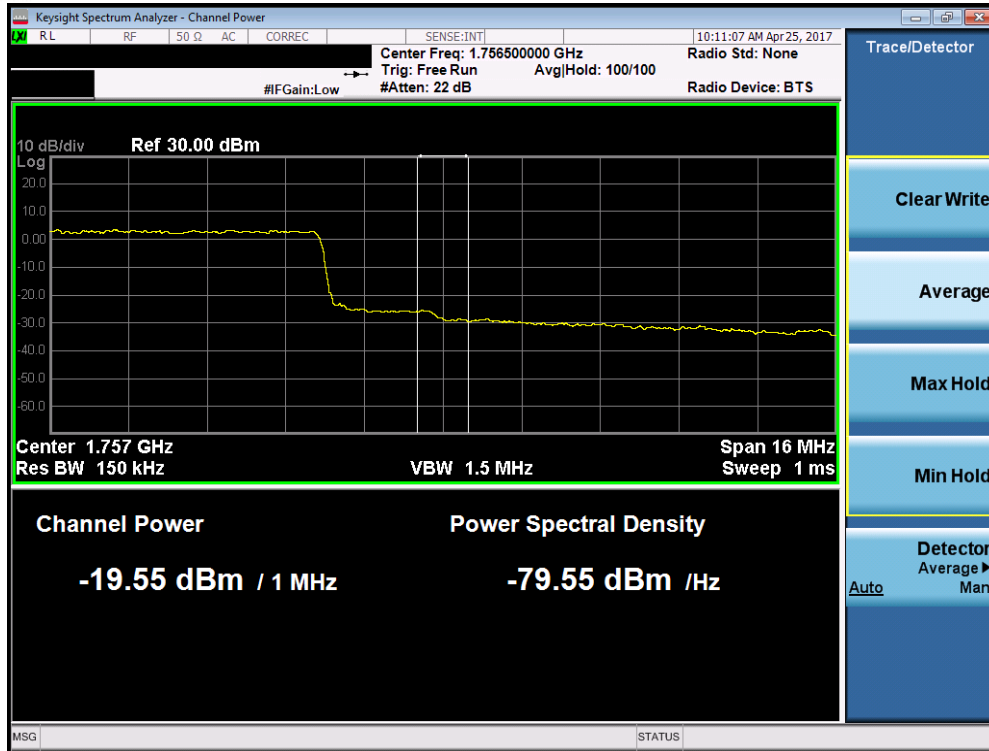


Plot 7-193. Upper Extended Band Edge Plot (Band 4/66 – 20.0MHz QPSK – RB Size 100)

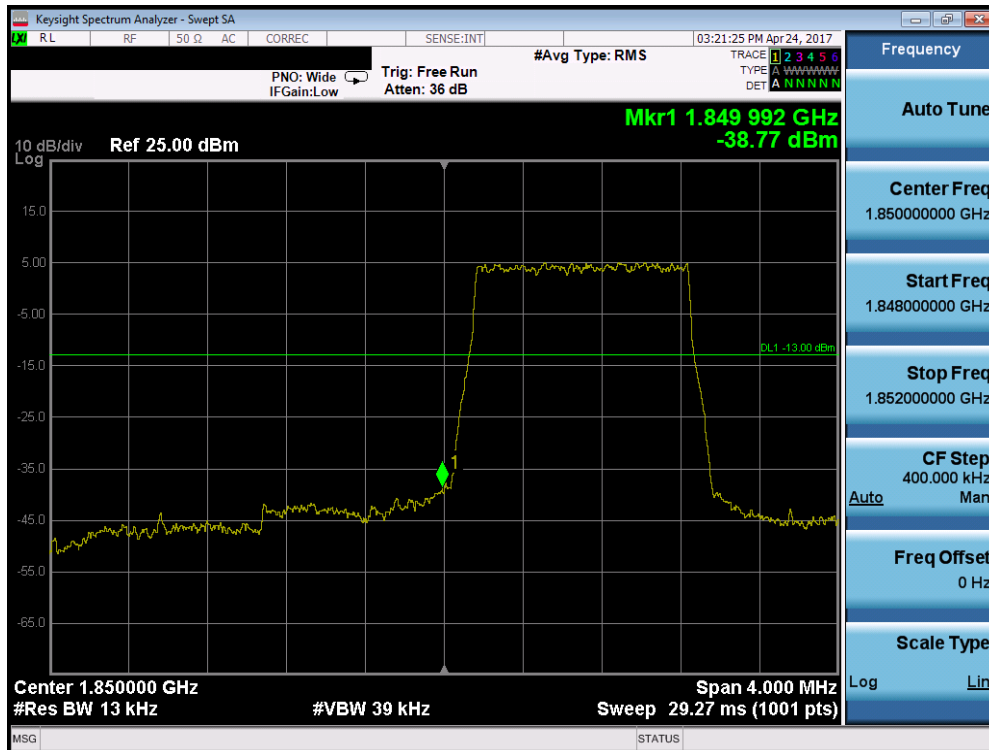


Plot 7-194. Lower Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 116 of 193

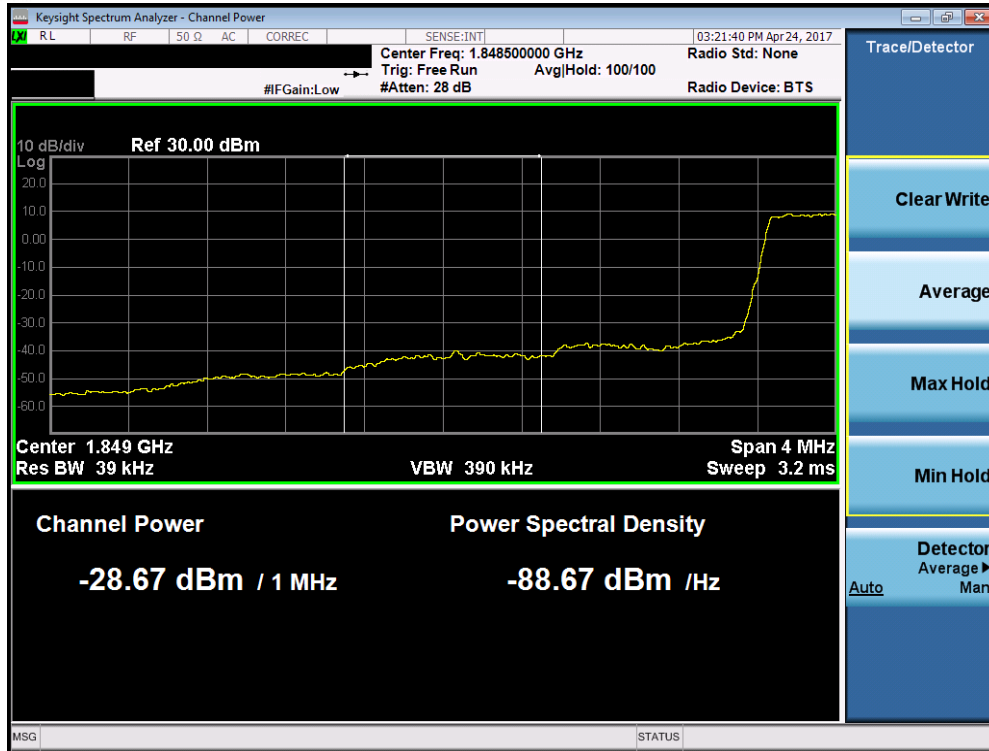


Plot 7-195. Lower Extended Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

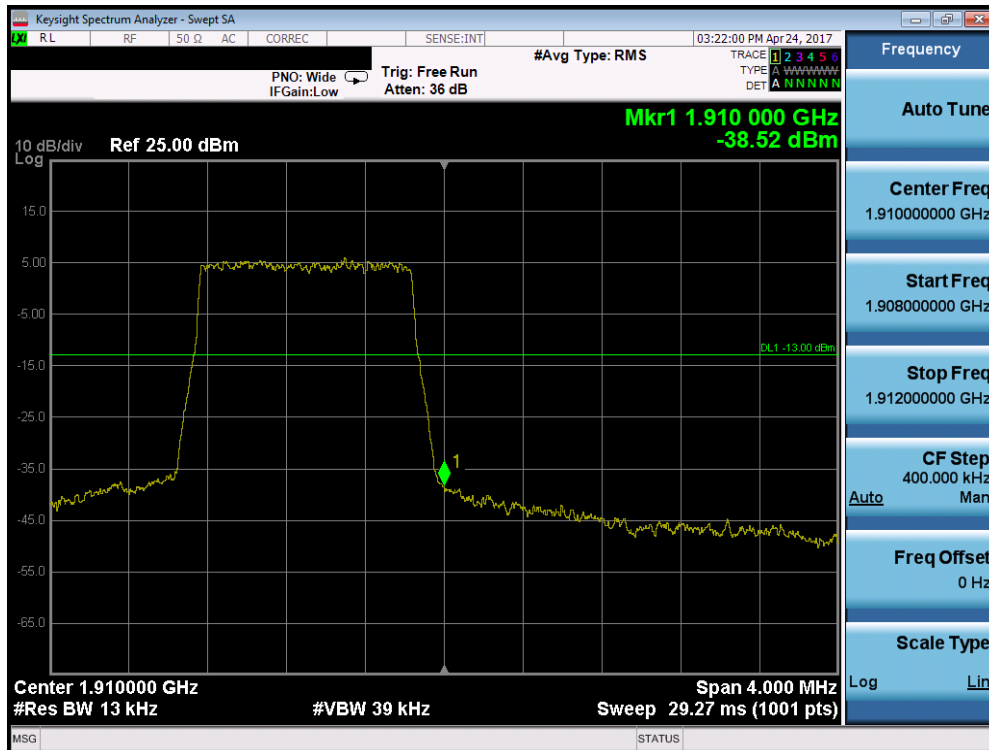


Plot 7-196. Upper Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 117 of 193

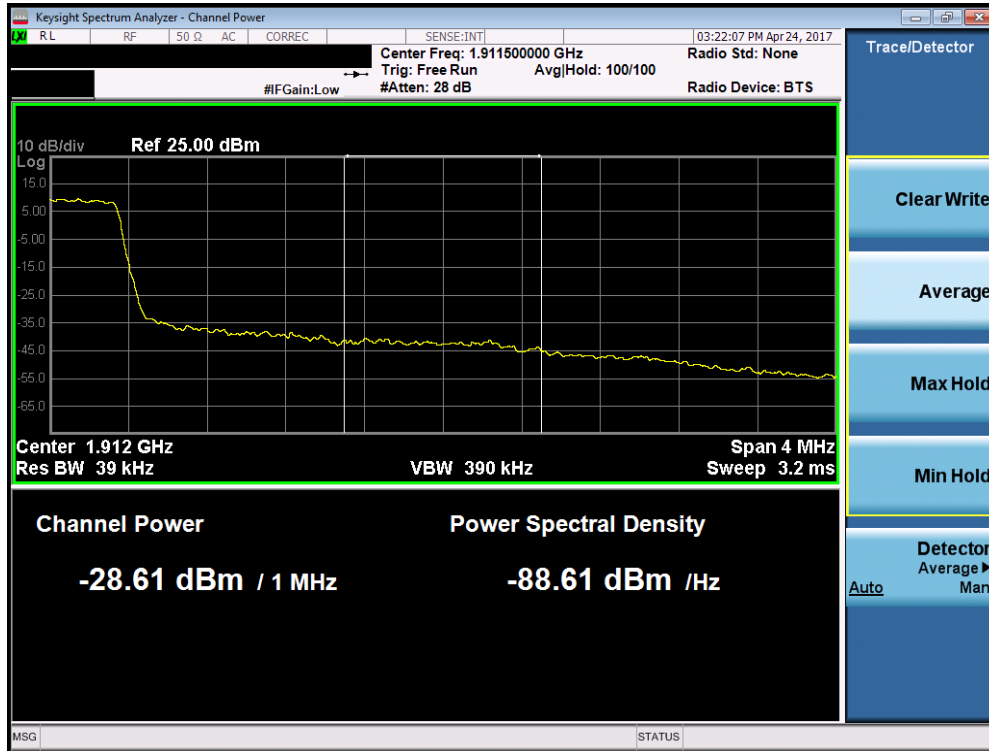


Plot 7-197. Upper Extended Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

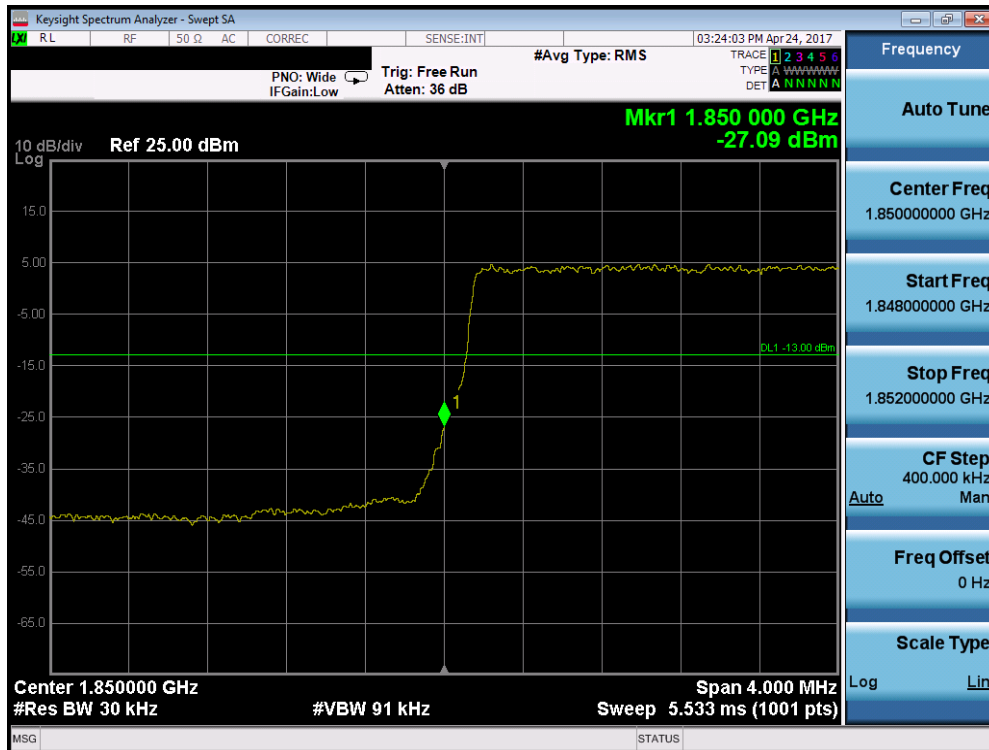

Plot 7-198. Lower Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 118 of 193

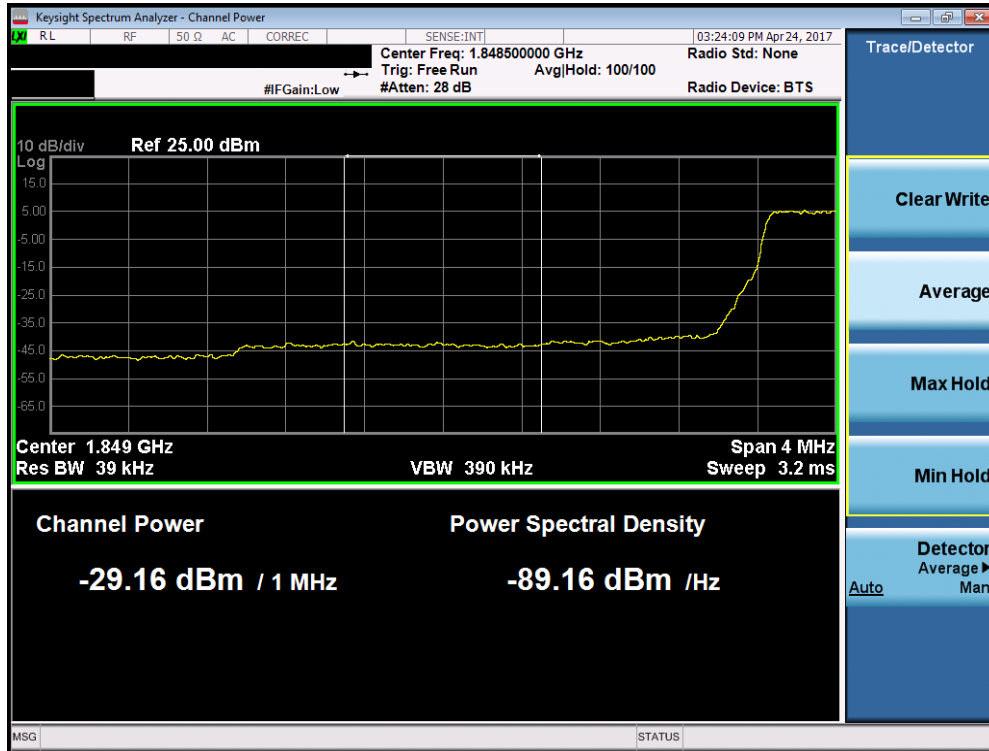


Plot 7-199. Lower Extended Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)




Plot 7-200. Upper Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 119 of 193

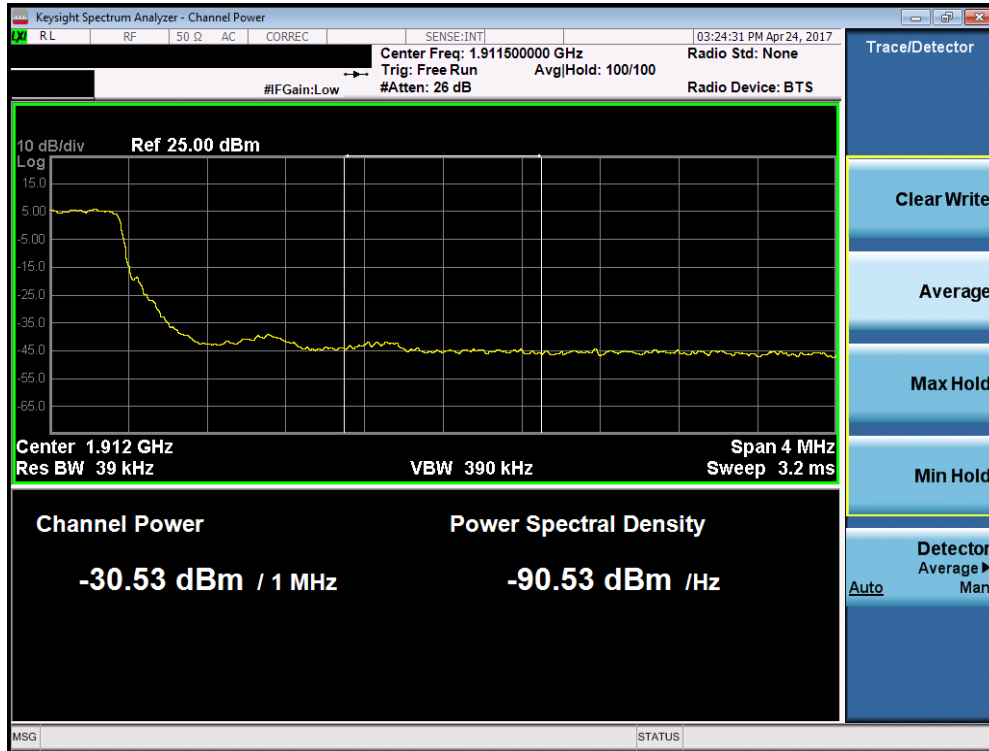


Plot 7-201. Upper Extended Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

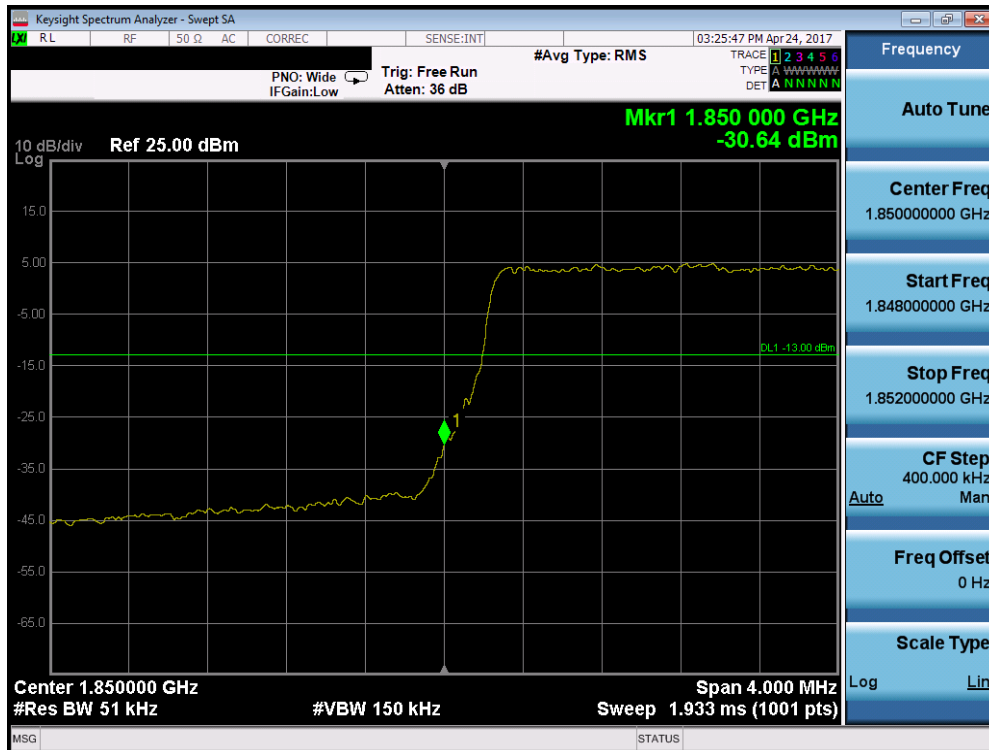


Plot 7-202. Lower Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 120 of 193

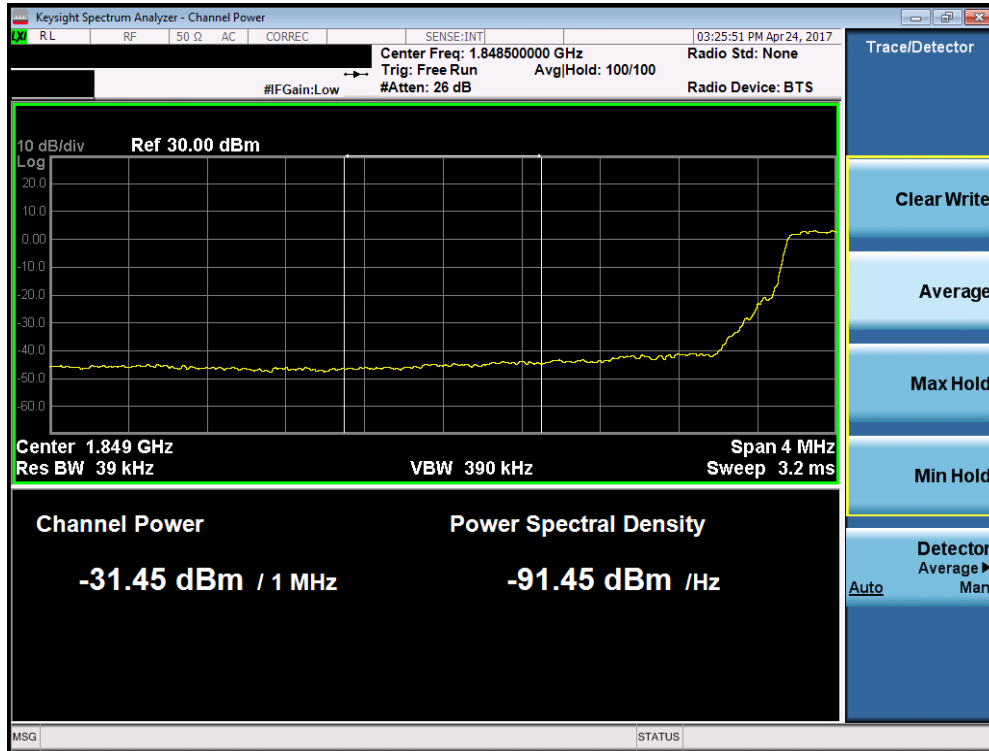


Plot 7-203. Lower Extended Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

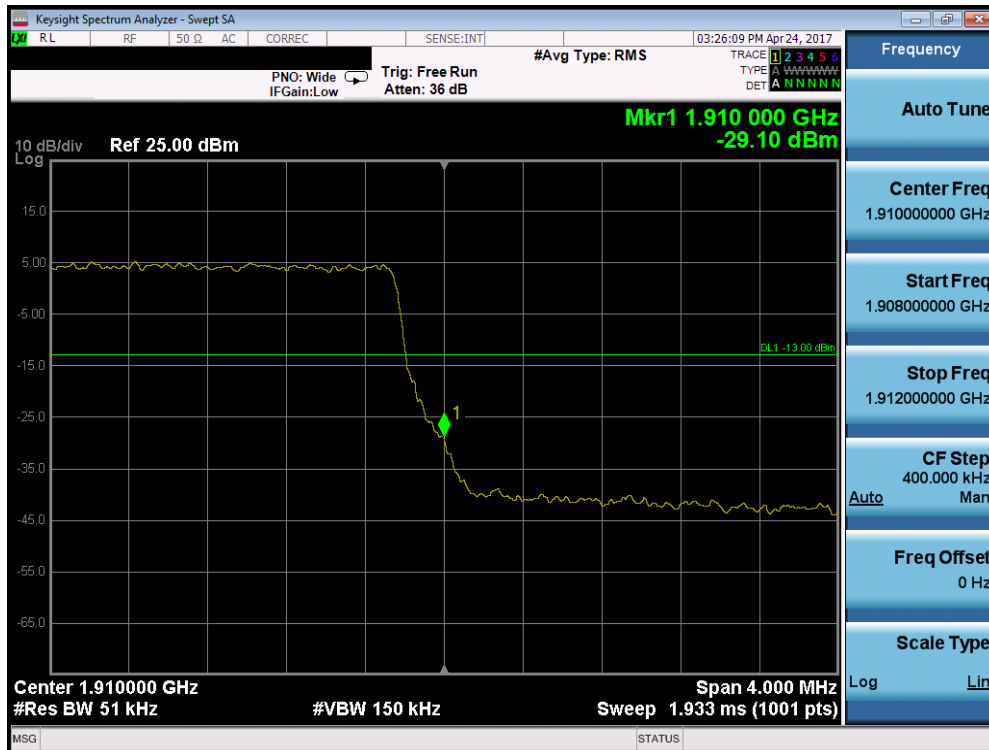


Plot 7-204. Upper Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 121 of 193

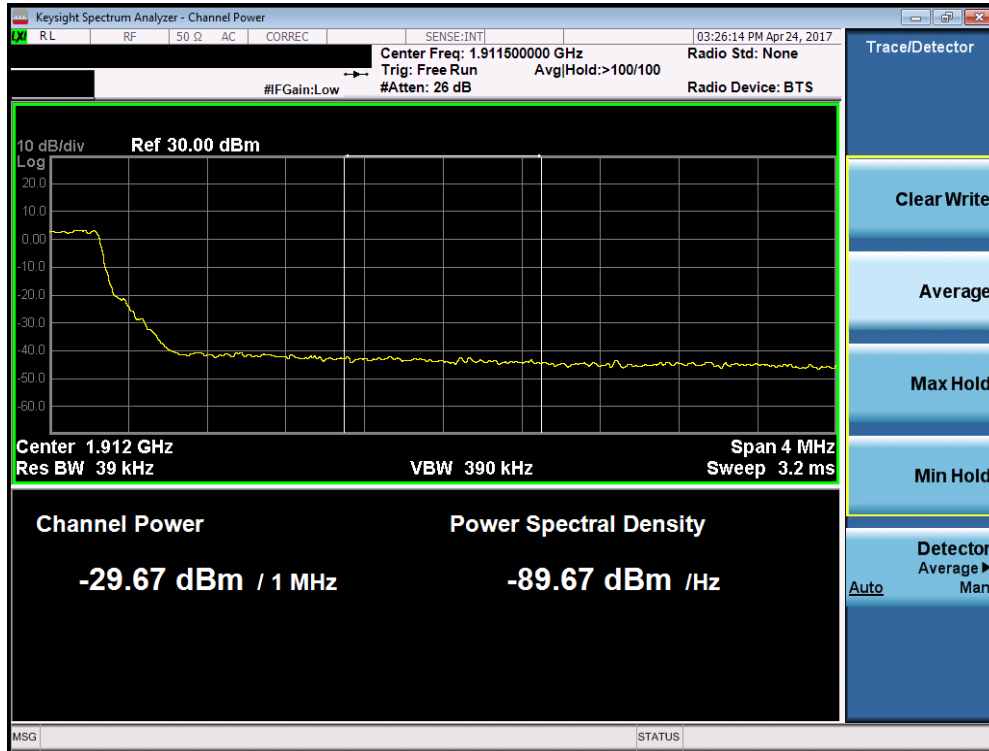


Plot 7-205. Upper Extended Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

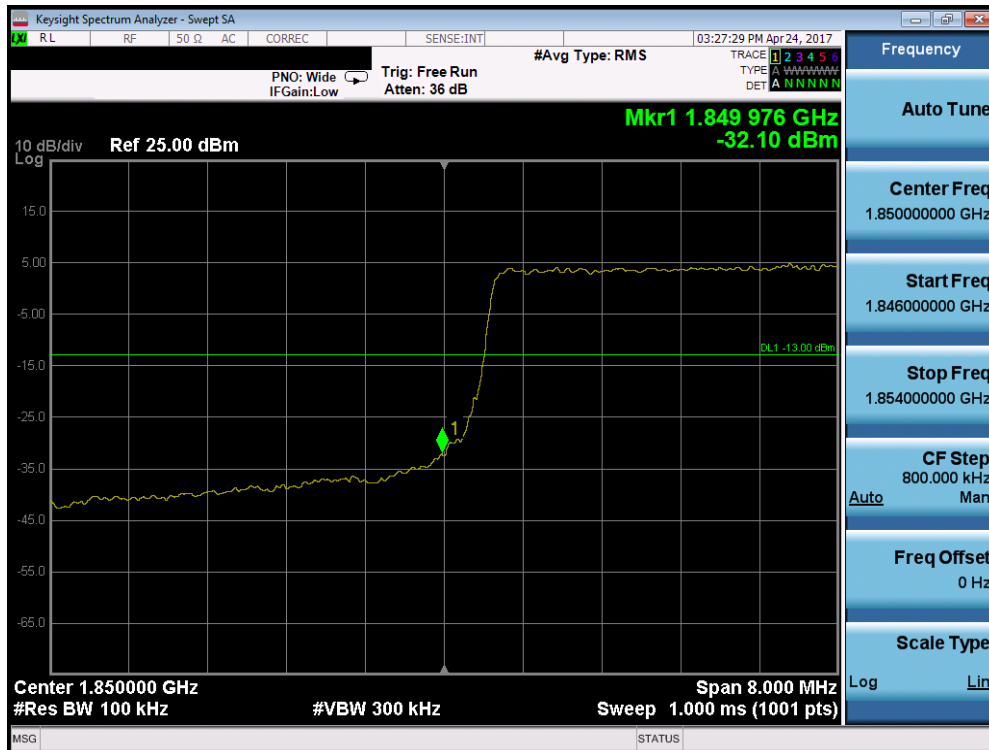

Plot 7-206. Lower Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 122 of 193

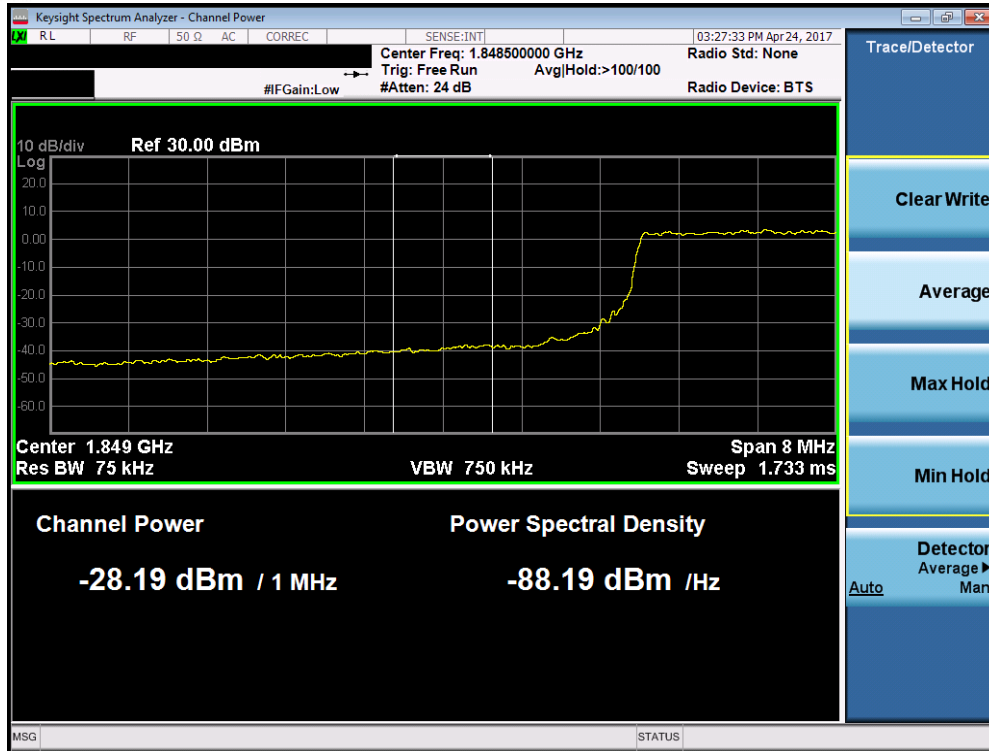


Plot 7-207. Lower Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)




Plot 7-208. Upper Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 123 of 193

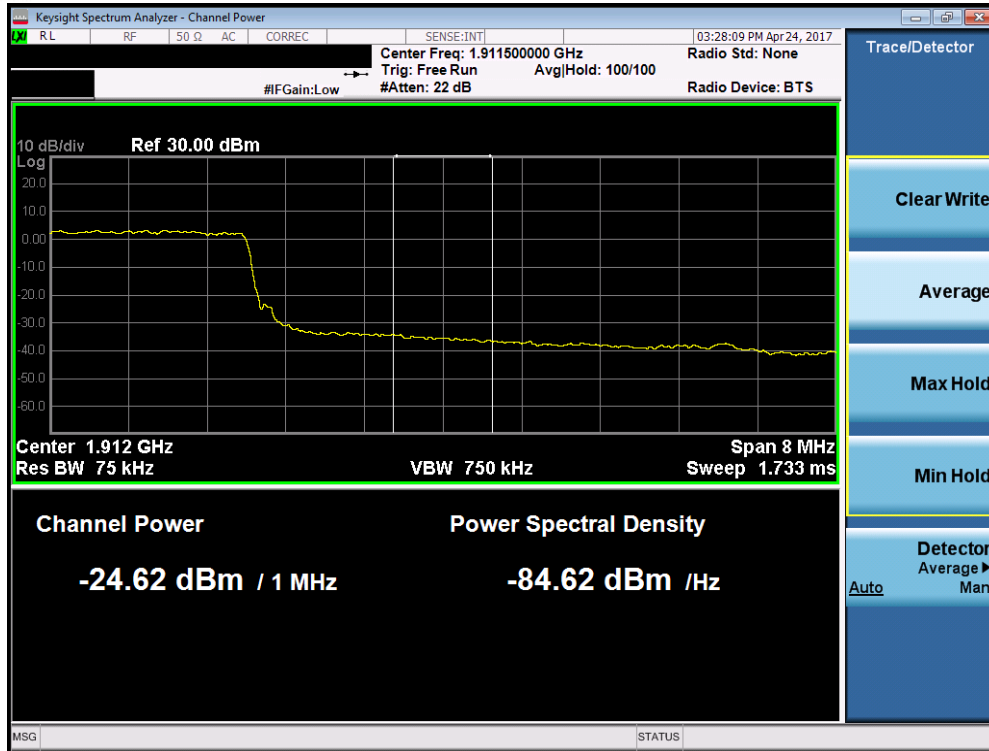


Plot 7-209. Upper Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

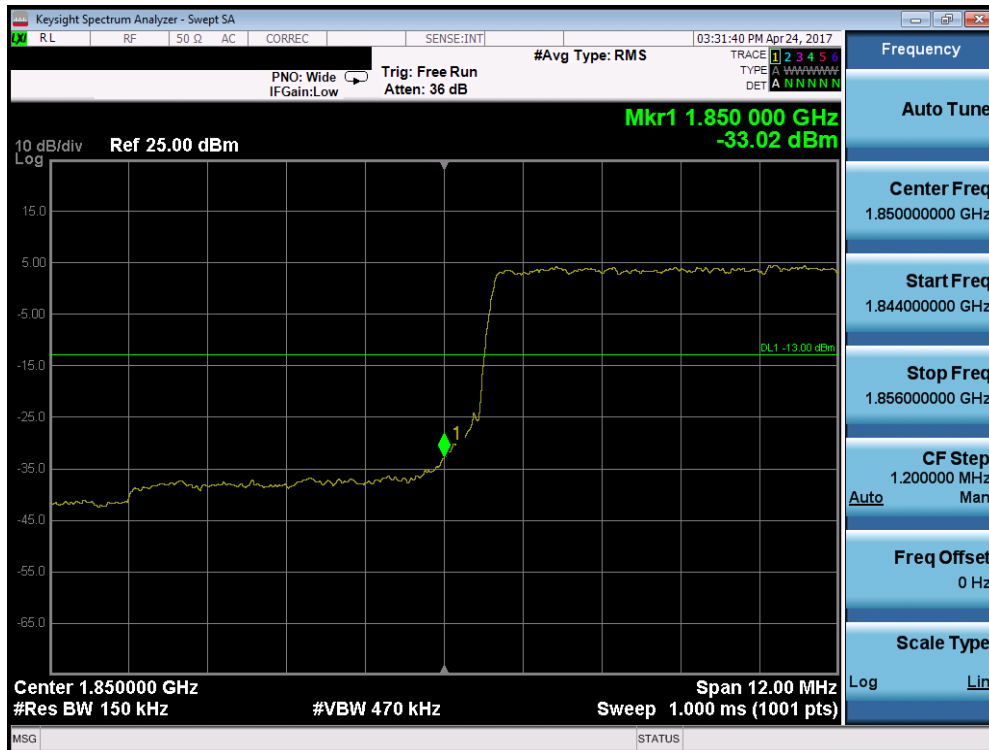

Plot 7-210. Lower Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 124 of 193

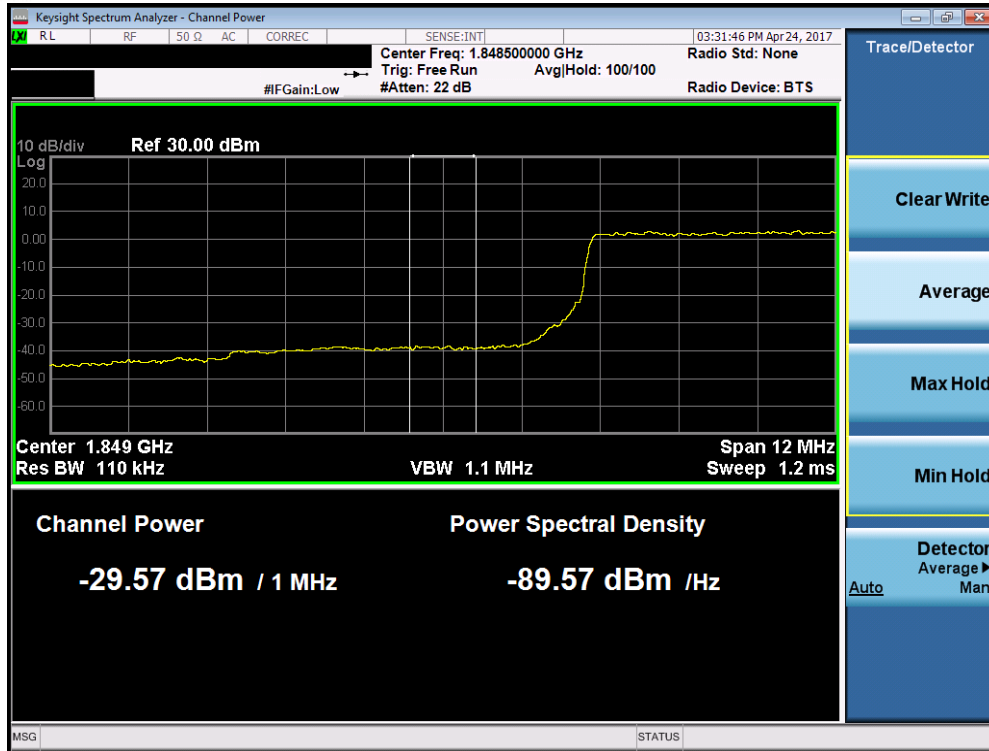


Plot 7-211. Lower Extended Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)




Plot 7-212. Upper Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 125 of 193

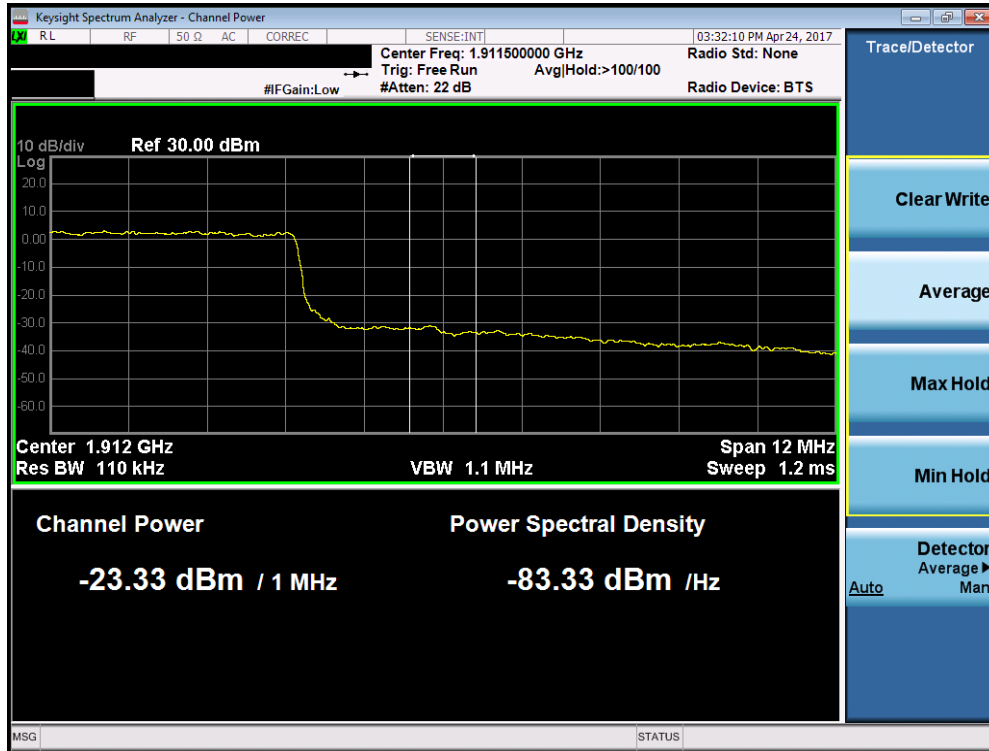


Plot 7-213. Upper Extended Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

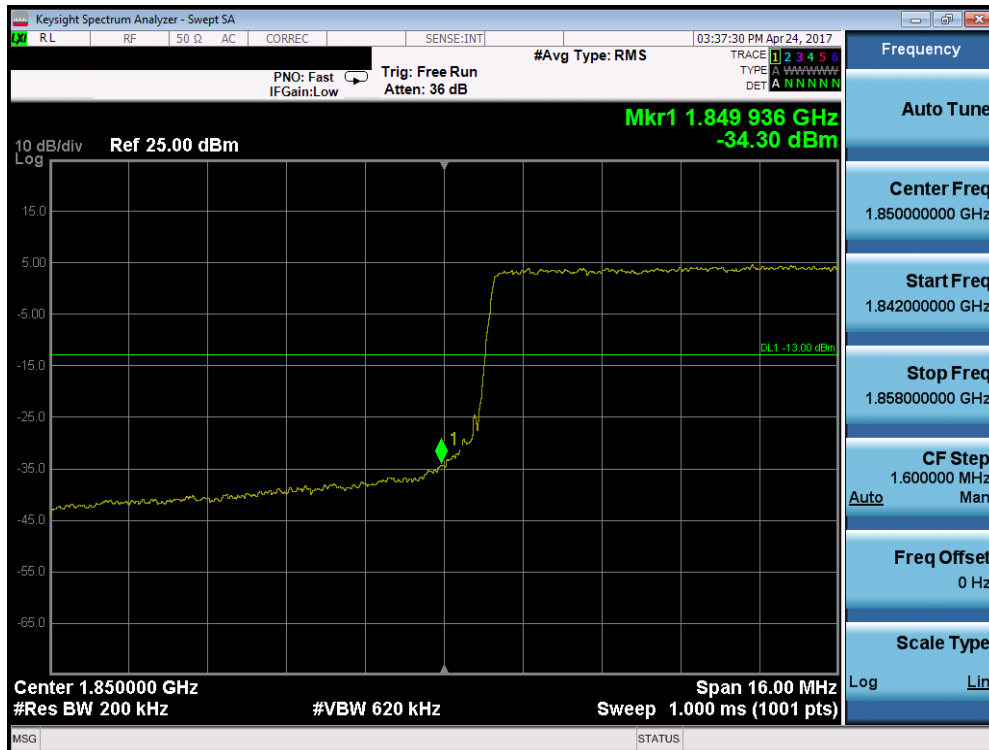

Plot 7-214. Lower Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 126 of 193

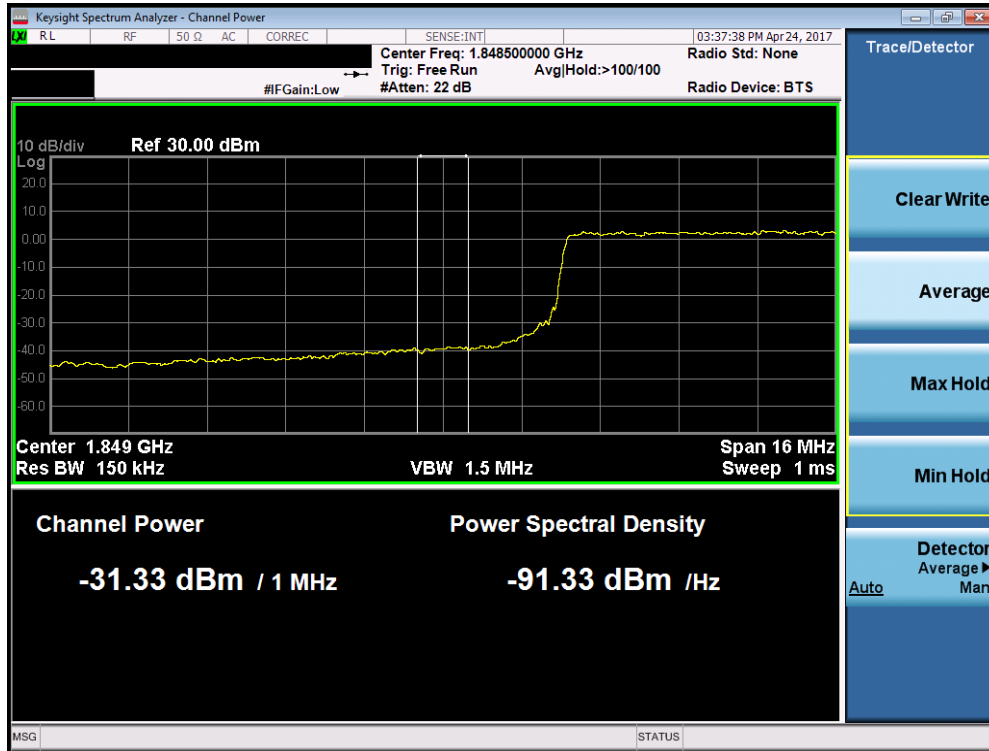


Plot 7-215. Lower Extended Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)




Plot 7-216. Upper Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 127 of 193

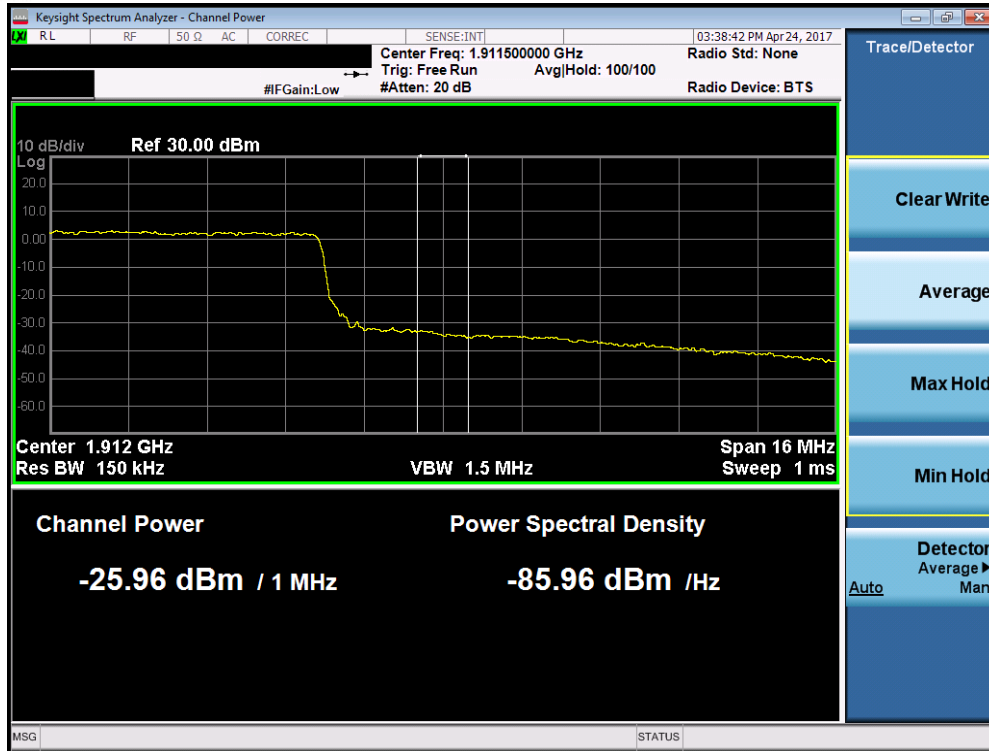

Plot 7-217. Upper Extended Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

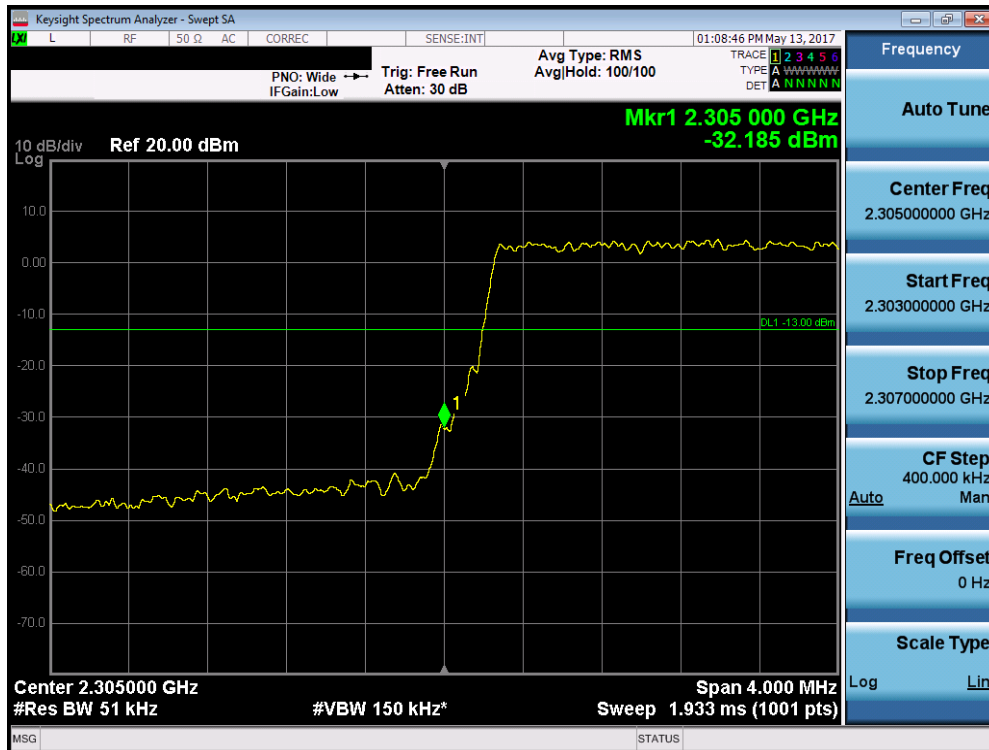

Plot 7-218. Lower Band Edge Plot (Band 30 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 128 of 193




Plot 7-219. Lower Extended Band Edge Plot (Band 30 – 5.0MHz QPSK – RB Size 25)




Plot 7-220. Upper Band Edge Plot (Band 30 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 129 of 193

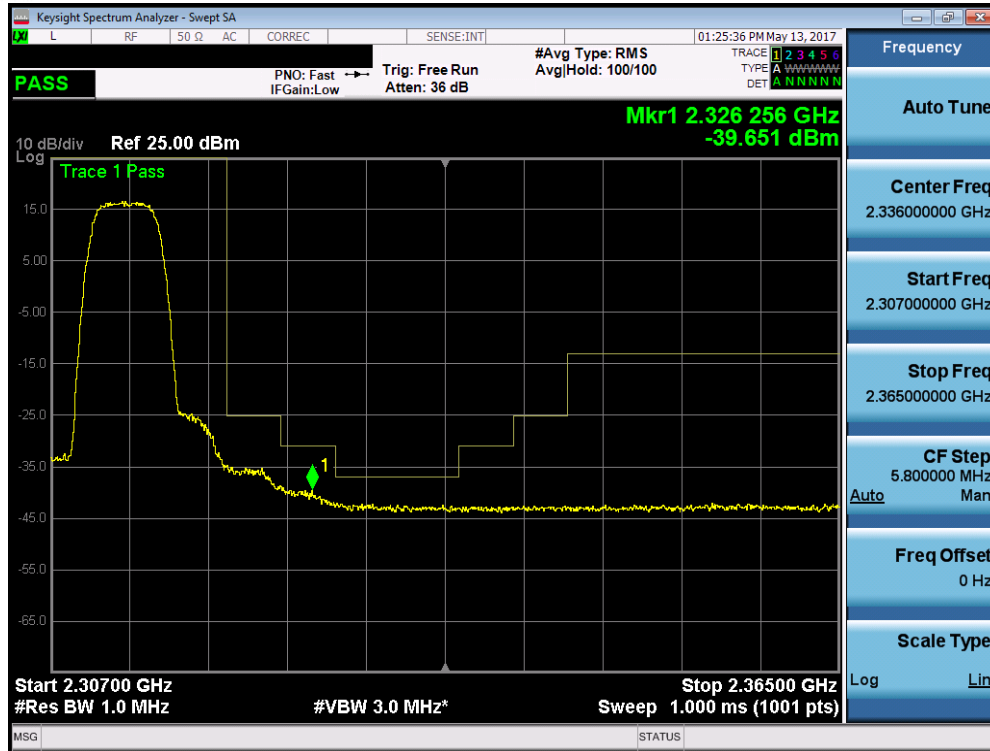

Plot 7-221. Upper Extended Band Edge Plot (Band 30 – 5.0MHz QPSK – RB Size 25)

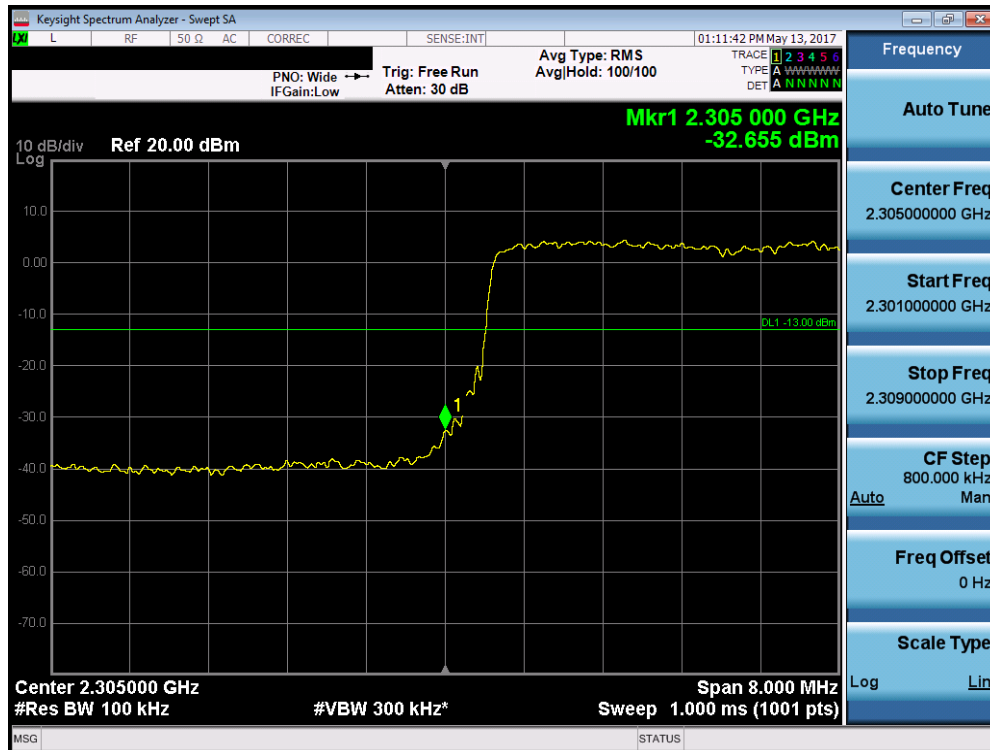


Plot 7-222. Lower Band Edge Plot (Band 30 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 130 of 193



Plot 7-223. Lower Extended Band Edge Plot (Band 30 – 10.0MHz QPSK – RB Size 50)

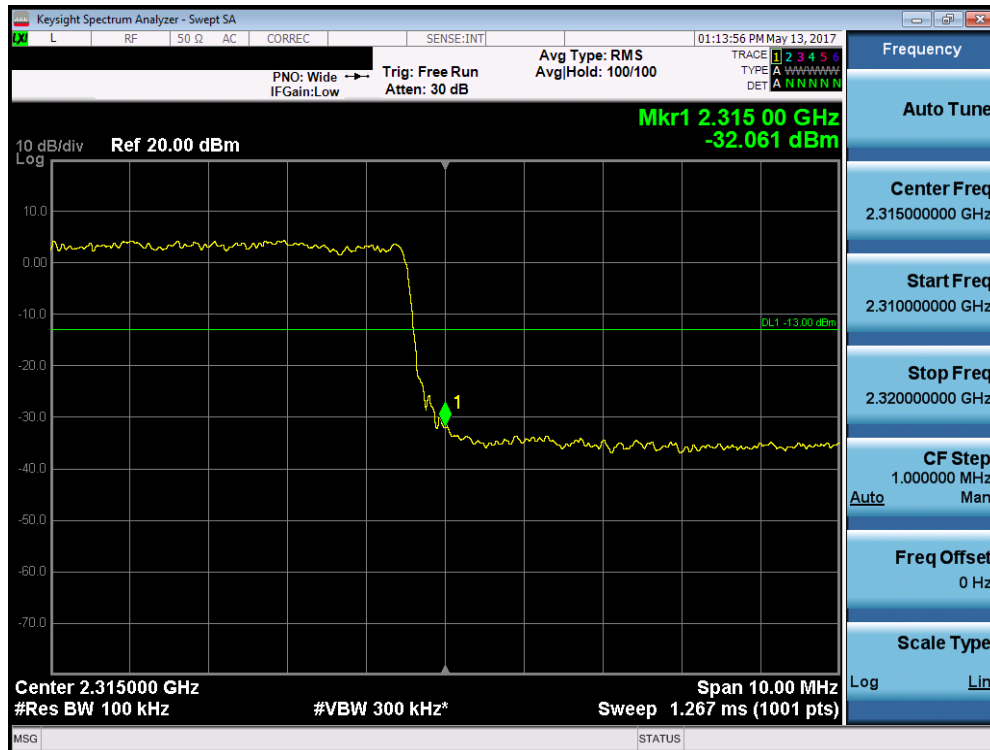


Plot 7-224. Upper Band Edge Plot (Band 30 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 131 of 193




Plot 7-225. Upper Extended Band Edge Plot (Band 30 – 10.0MHz QPSK – RB Size 50)

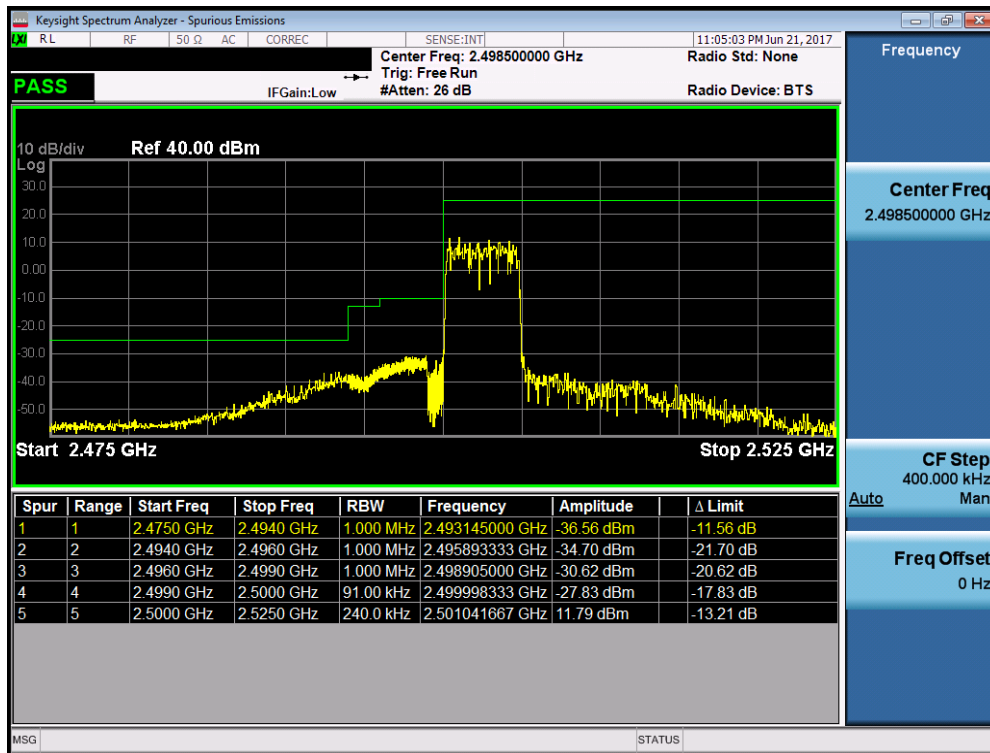


Plot 7-226. Lower ACP Plot (Band 7 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 132 of 193

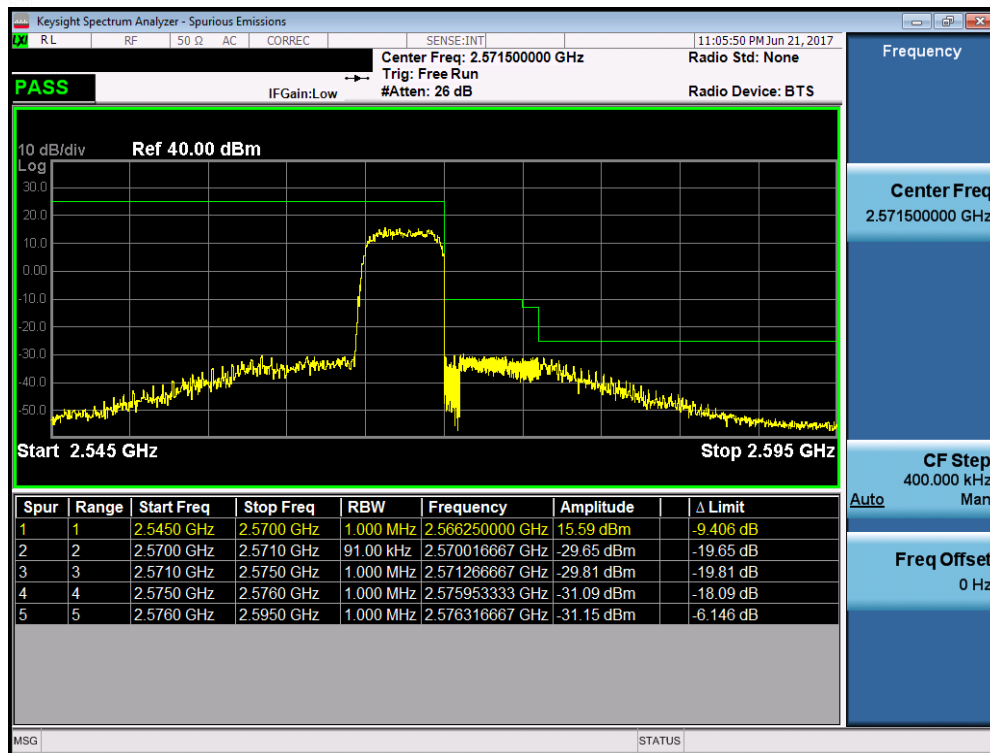


Plot 7-227. Upper ACP Plot (Band 7 – 5.0MHz QPSK – RB Size 25)

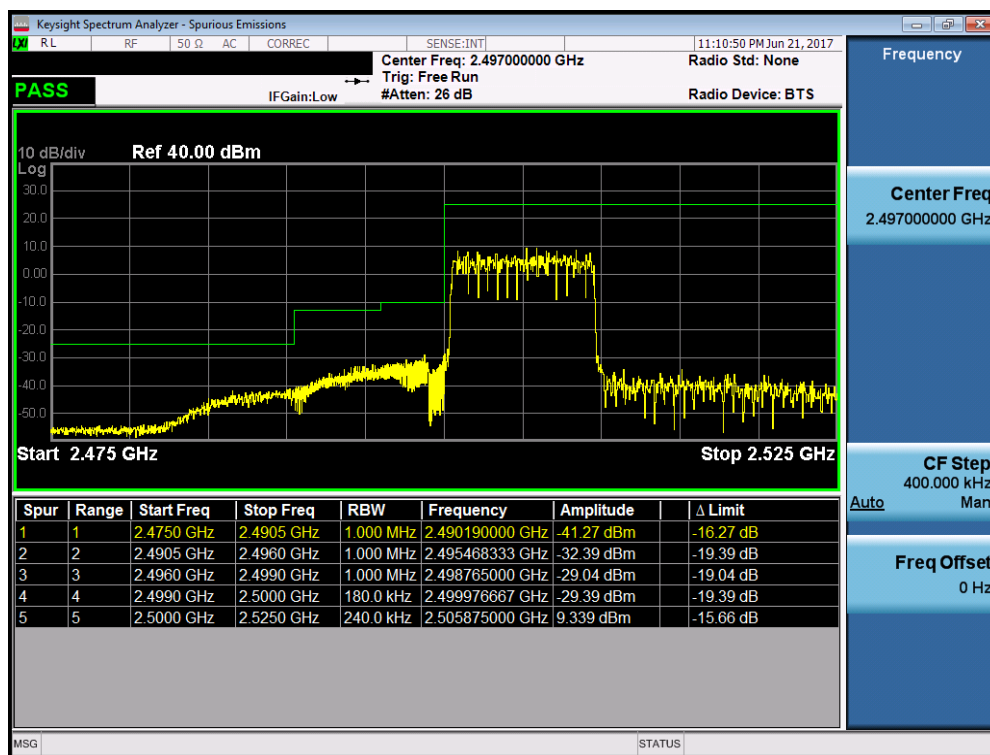


Plot 7-228. Lower ACP Plot (Band 7 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG892A			FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 133 of 193	

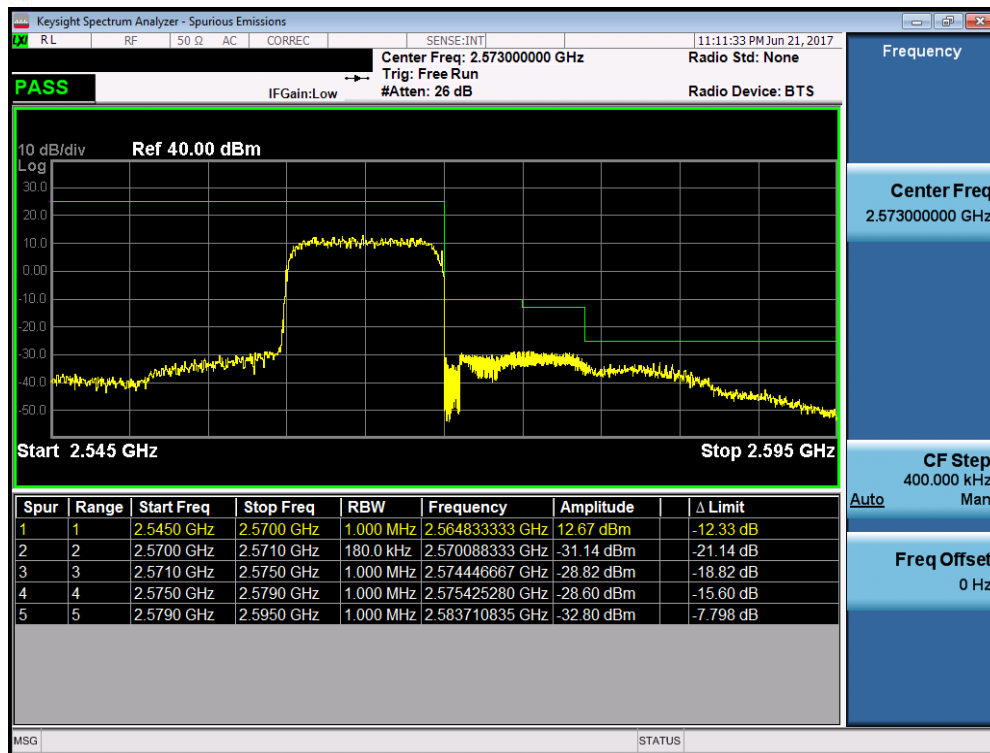


Plot 7-229. Upper ACP Plot (Band 7 – 10.0MHz QPSK – RB Size 50)

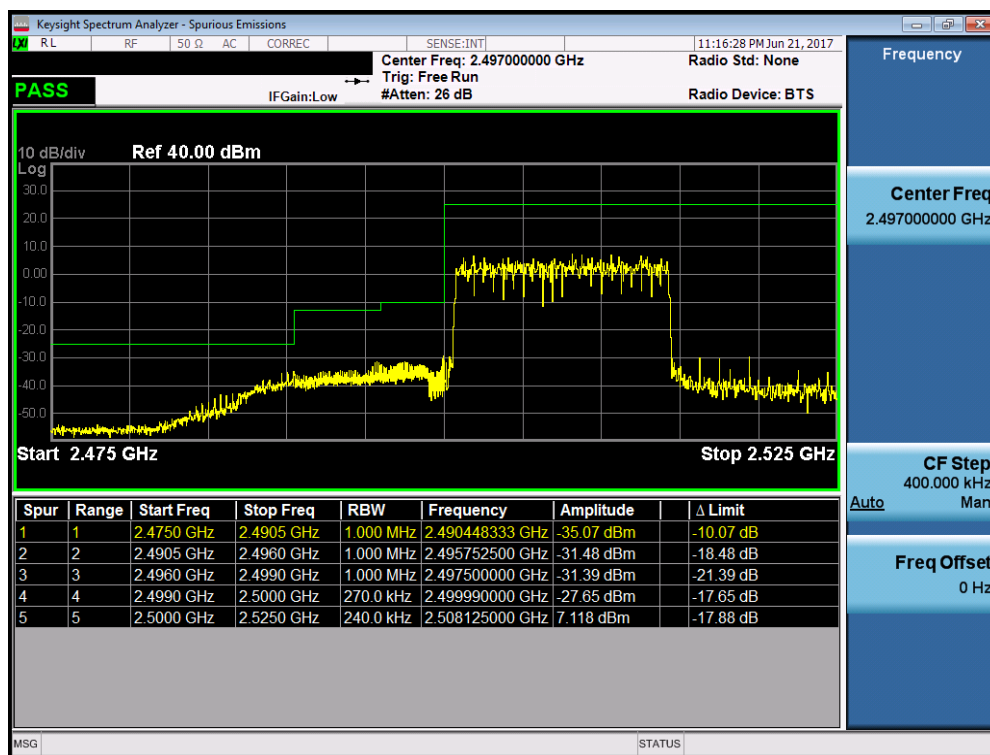


Plot 7-230. Lower ACP Plot (Band 7 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 134 of 193

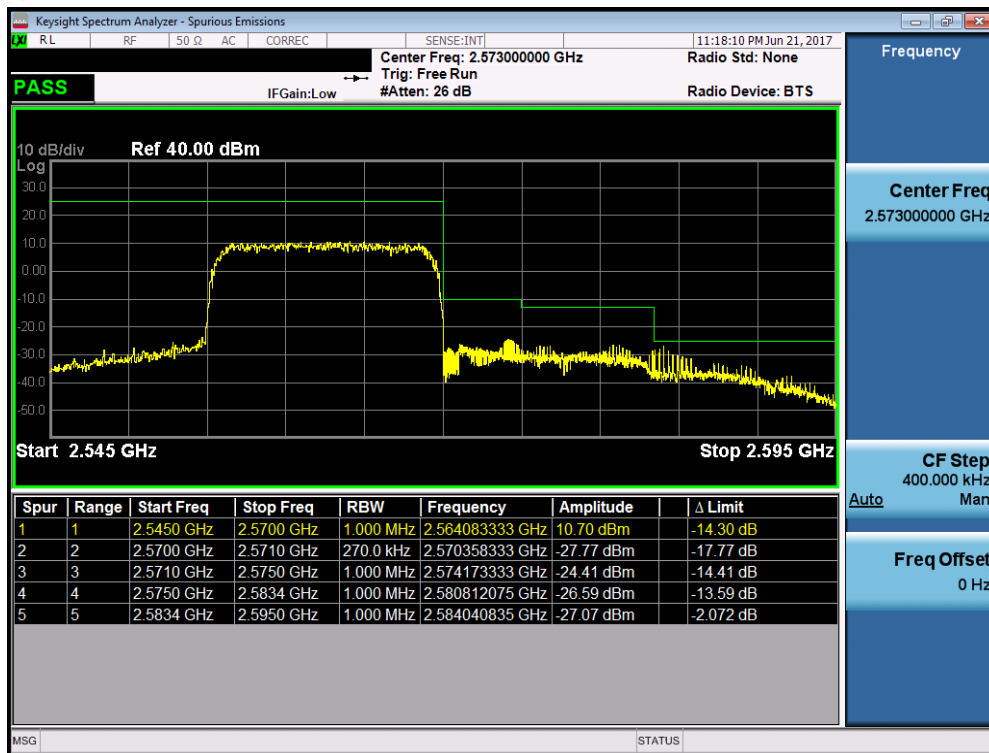


Plot 7-231. Upper ACP Plot (Band 7 – 15.0MHz QPSK – RB Size 75)

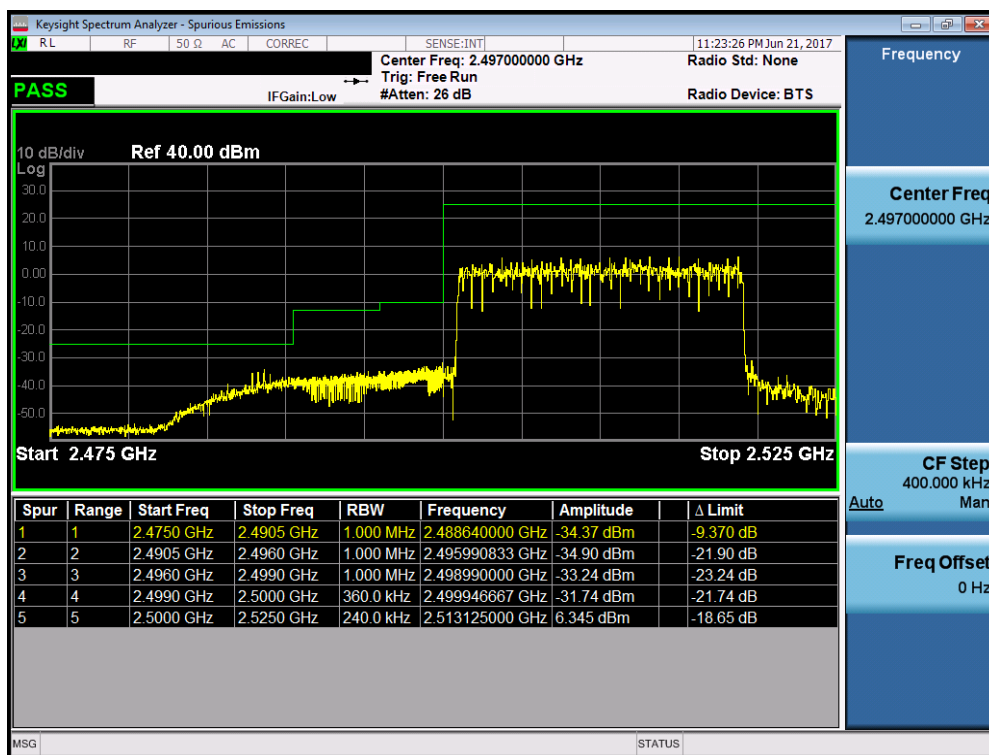


Plot 7-232. Lower ACP Plot (Band 7 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 135 of 193	

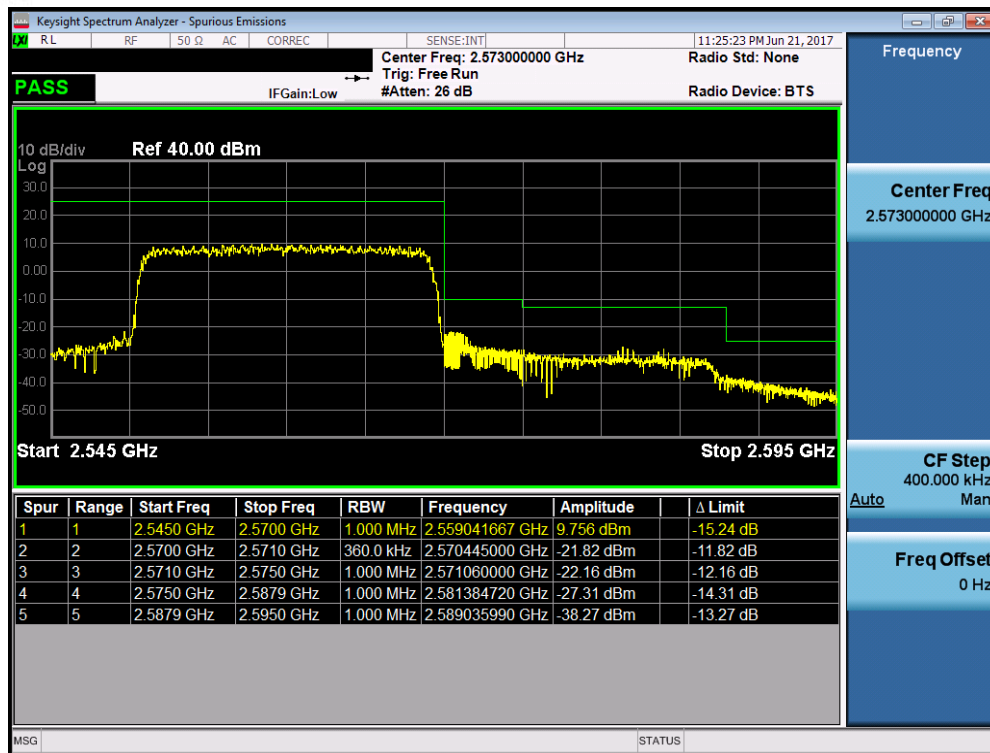


Plot 7-233. Upper ACP Plot (Band 7 – 20.0MHz QPSK – RB Size 100)

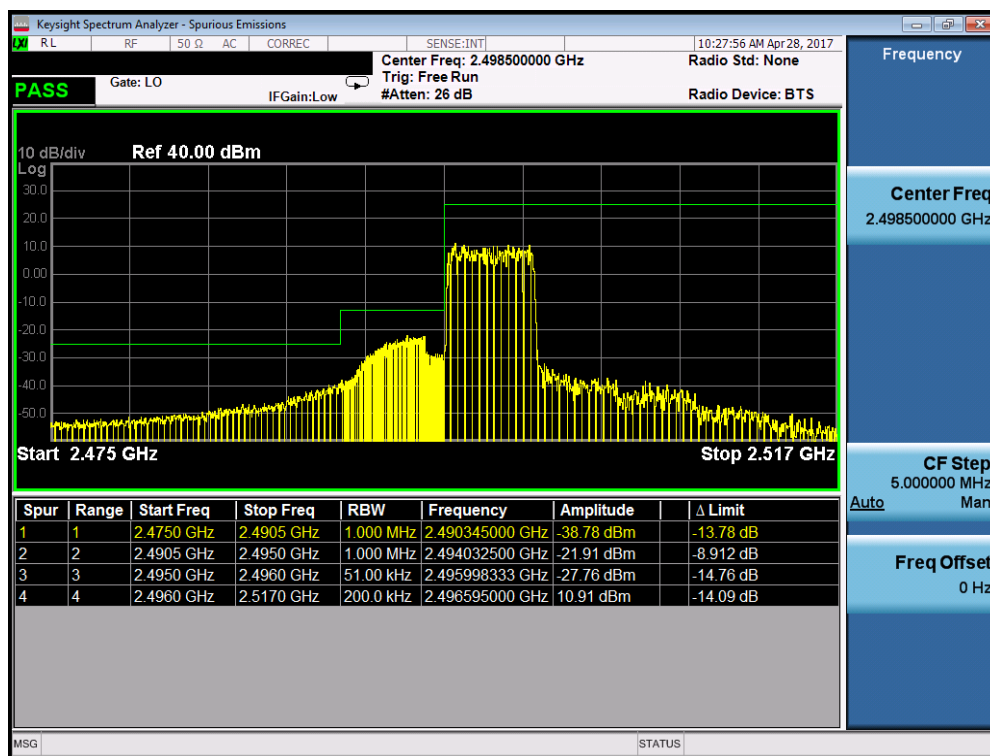


Plot 7-234. Lower ACP Plot (Band 41 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset			Page 136 of 193

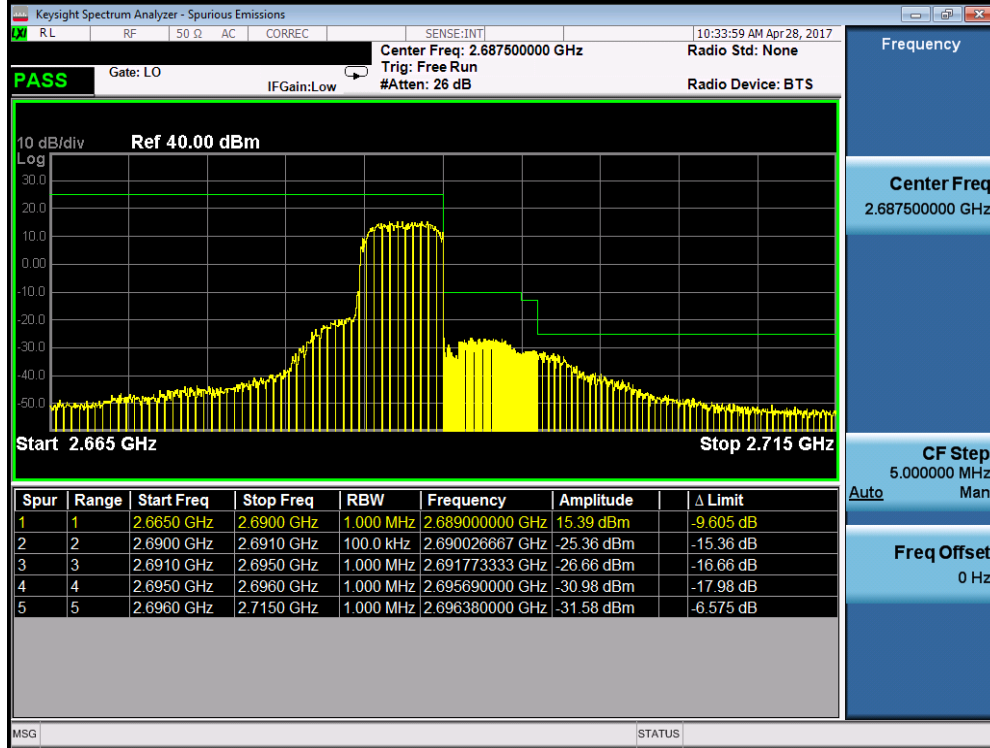


Plot 7-235. Upper ACP Plot (Band 41 – 5.0MHz QPSK – RB Size 25)

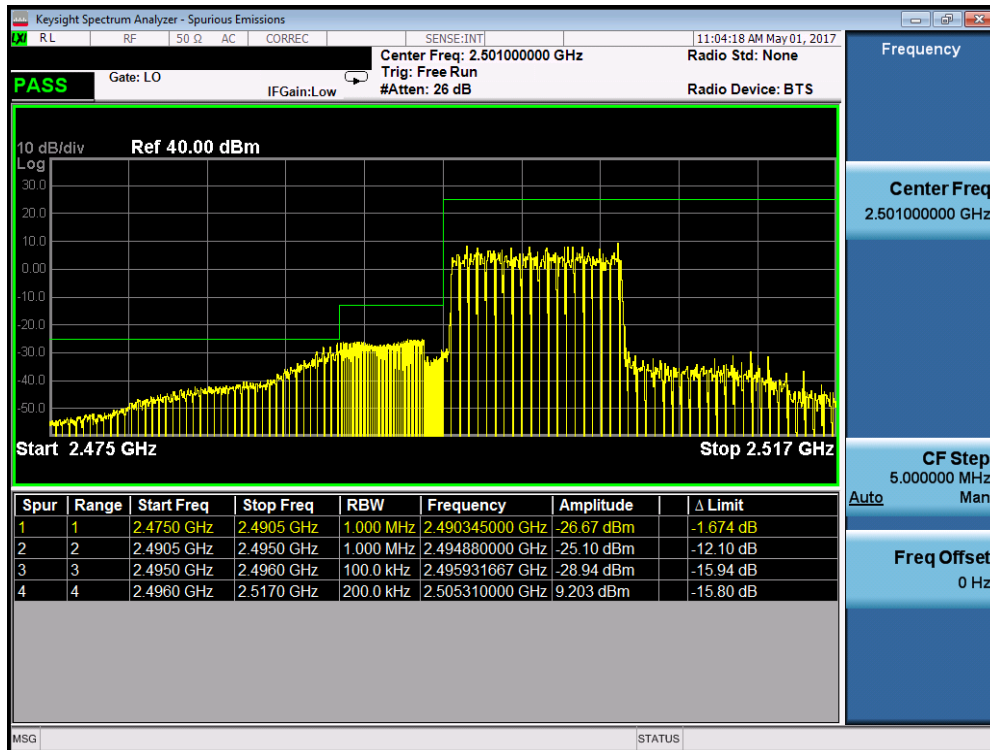


Plot 7-236. Lower ACP Plot (Band 41 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 137 of 193	

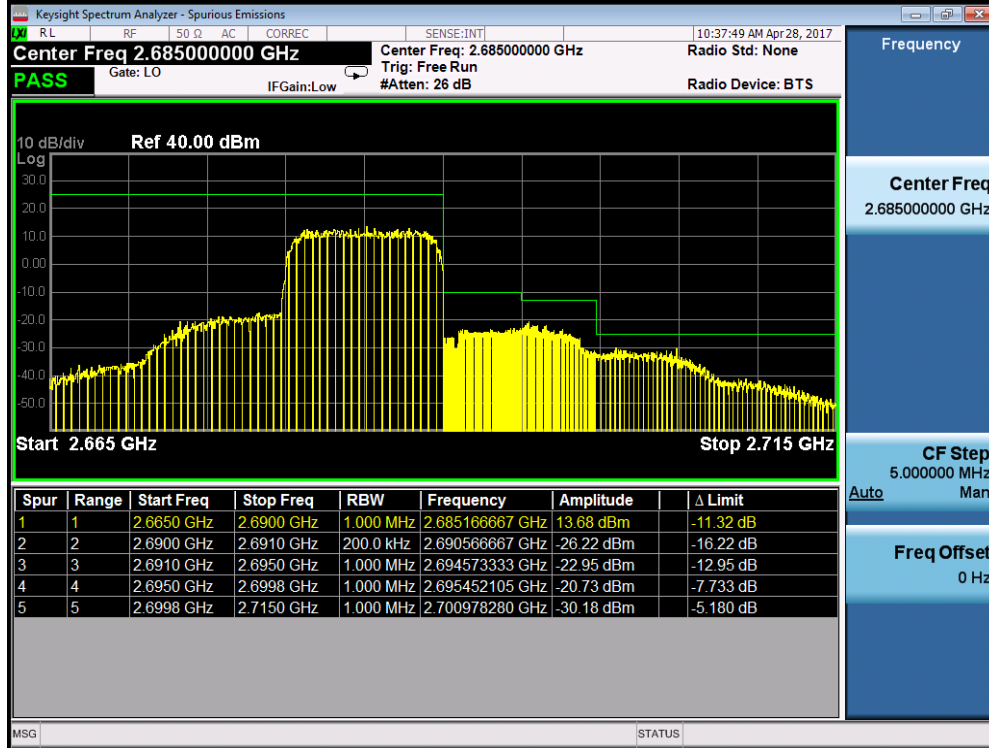


Plot 7-237. Upper ACP Plot (Band 41 – 10.0MHz QPSK – RB Size 50)

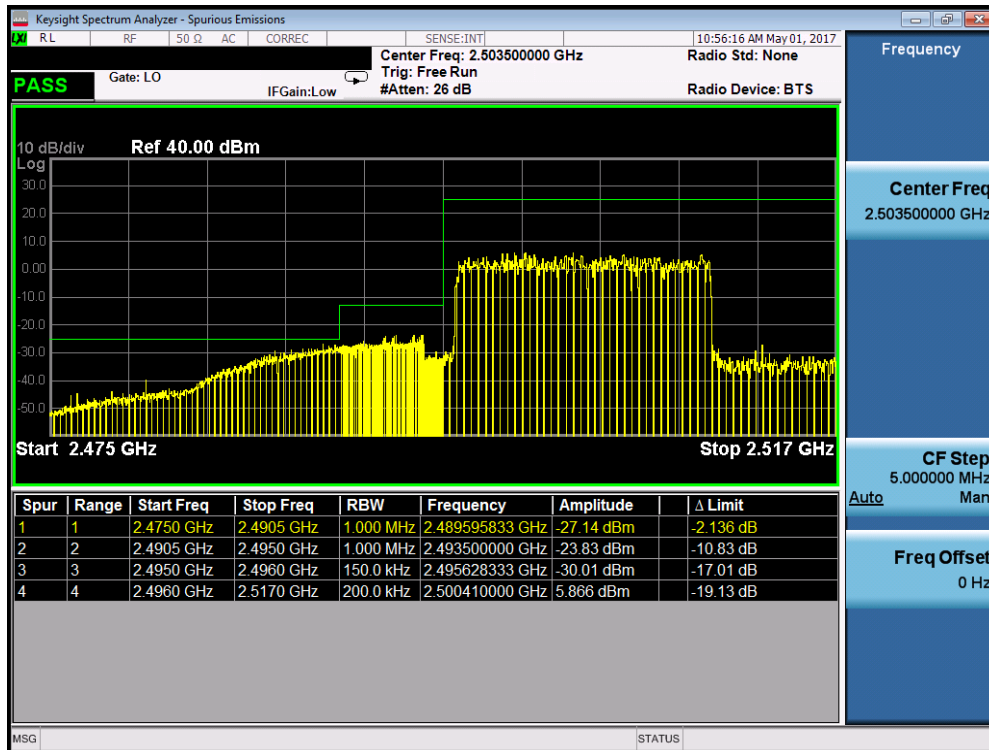


Plot 7-238. Lower ACP Plot (Band 41 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 138 of 193

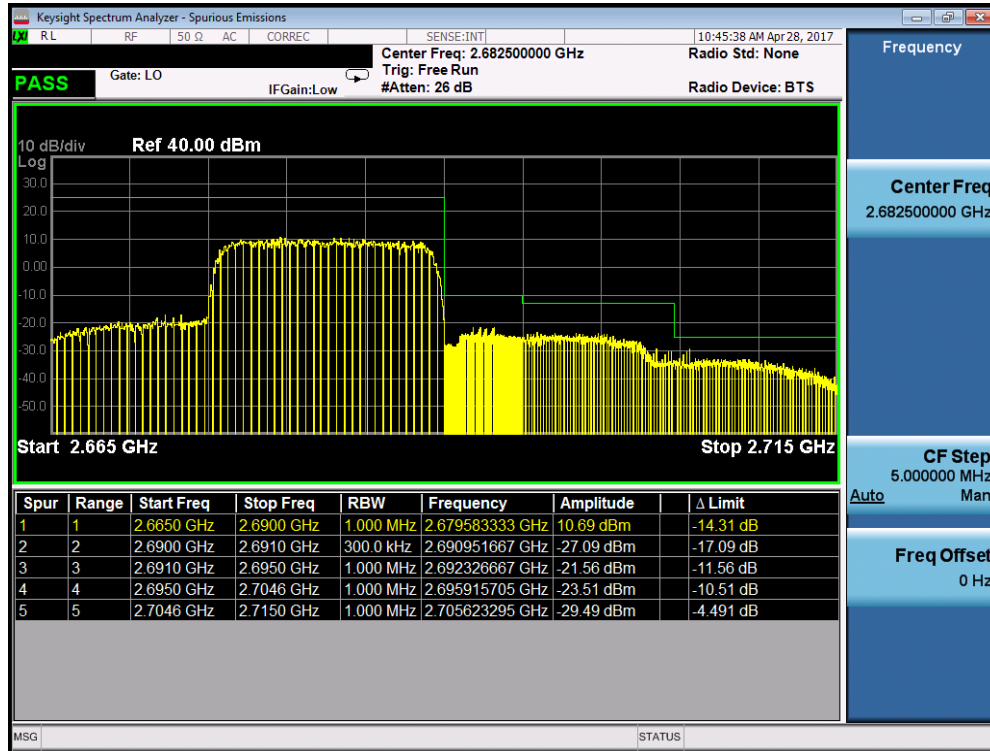


Plot 7-239. Upper ACP Plot (Band 41 – 15.0MHz QPSK – RB Size 75)

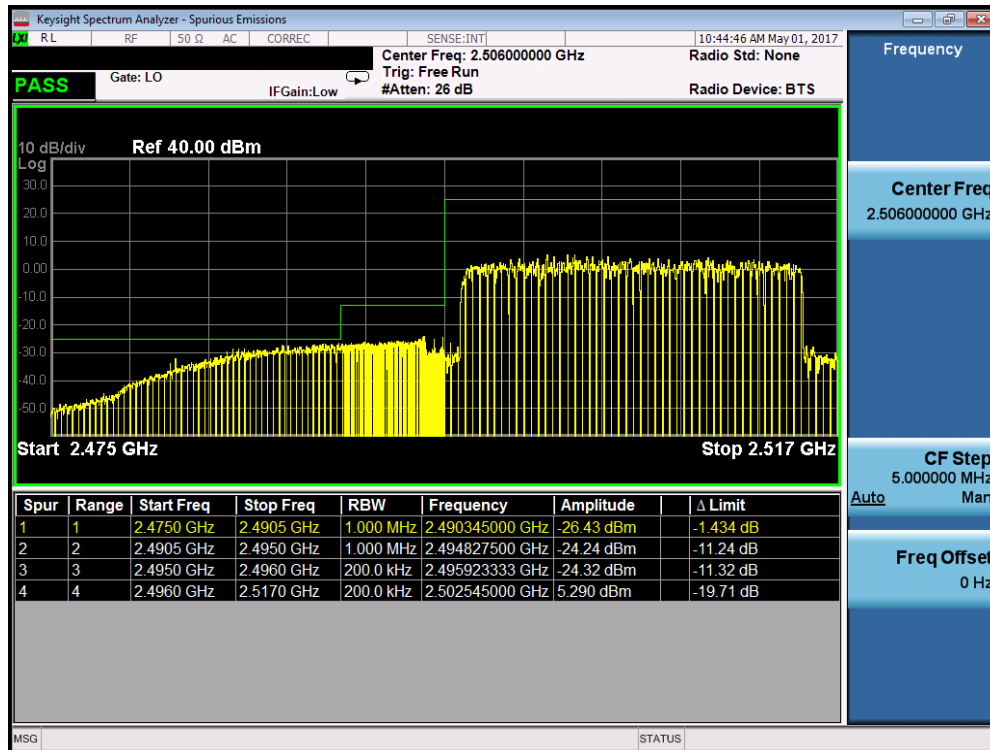

Plot 7-240. Lower ACP Plot (Band 41 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG892A			FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 139 of 193	

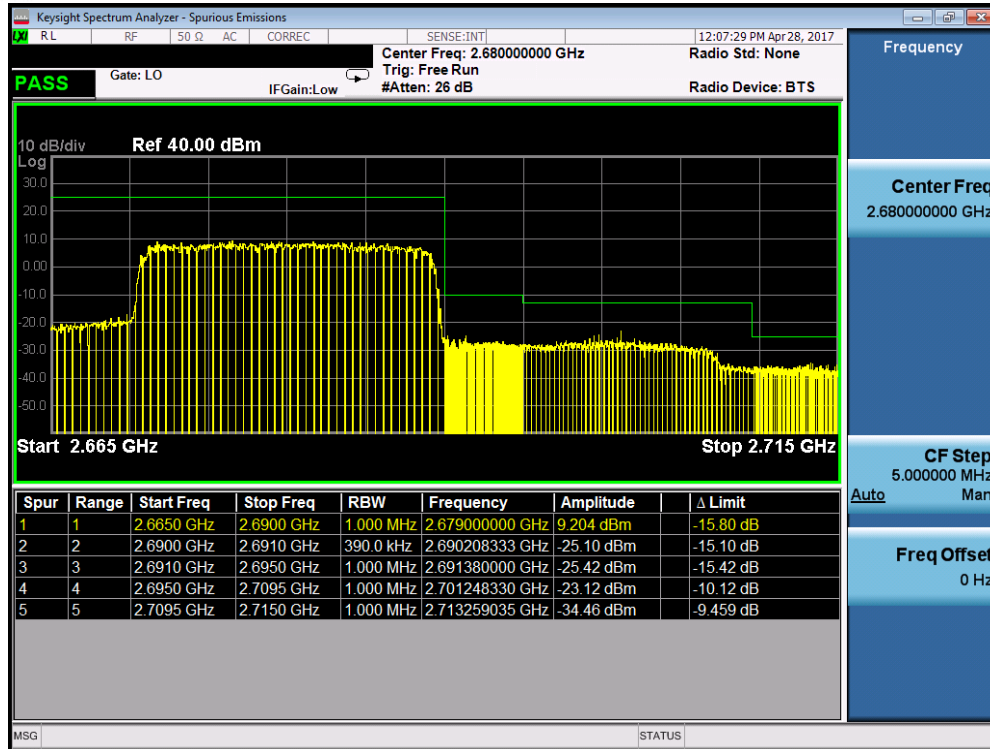

Plot 7-241. Upper ACP Plot (Band 41 – 20.0MHz QPSK – RB Size 100)




Plot 7-242. Lower Band Edge Plot (Band 38 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 140 of 193




Plot 7-243. Upper Band Edge Plot (Band 38 – 20.0MHz QPSK – RB Size 100)

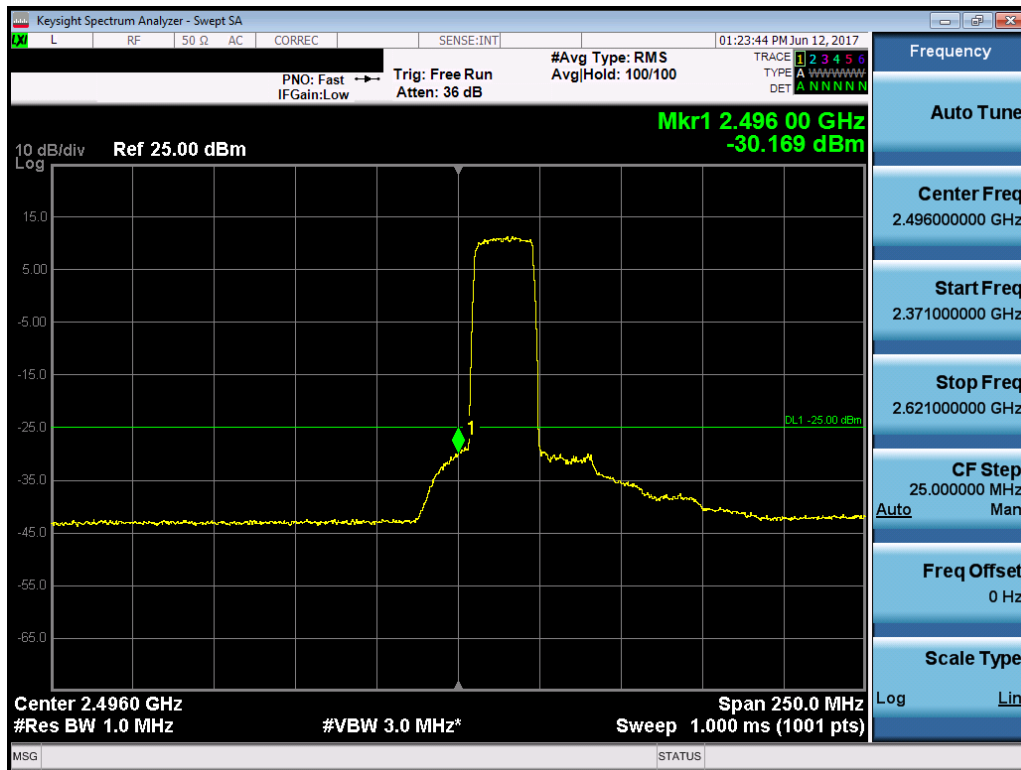

Plot 7-244. Lower Band Edge Plot (Band 7 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 141 of 193

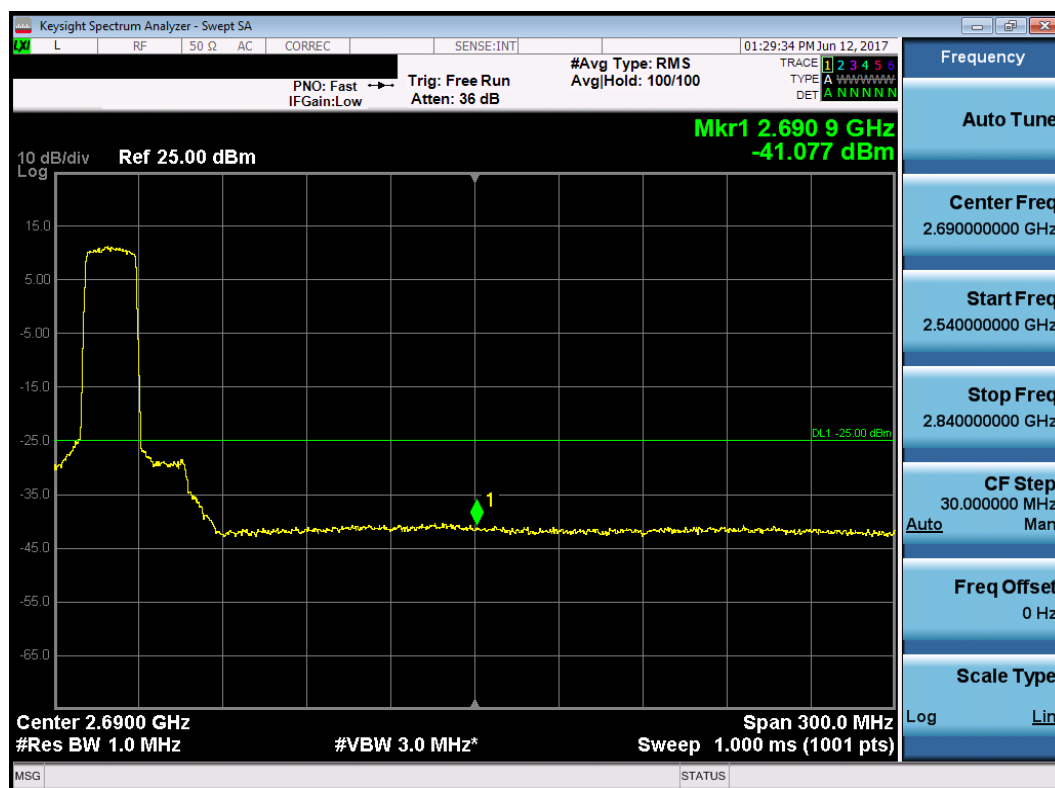

7.5 Peak-Average Ratio §24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


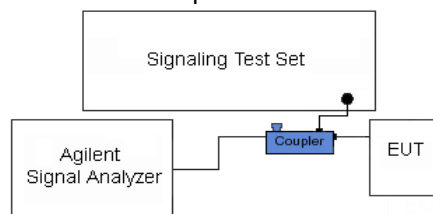


Figure 7-4. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 143 of 193	

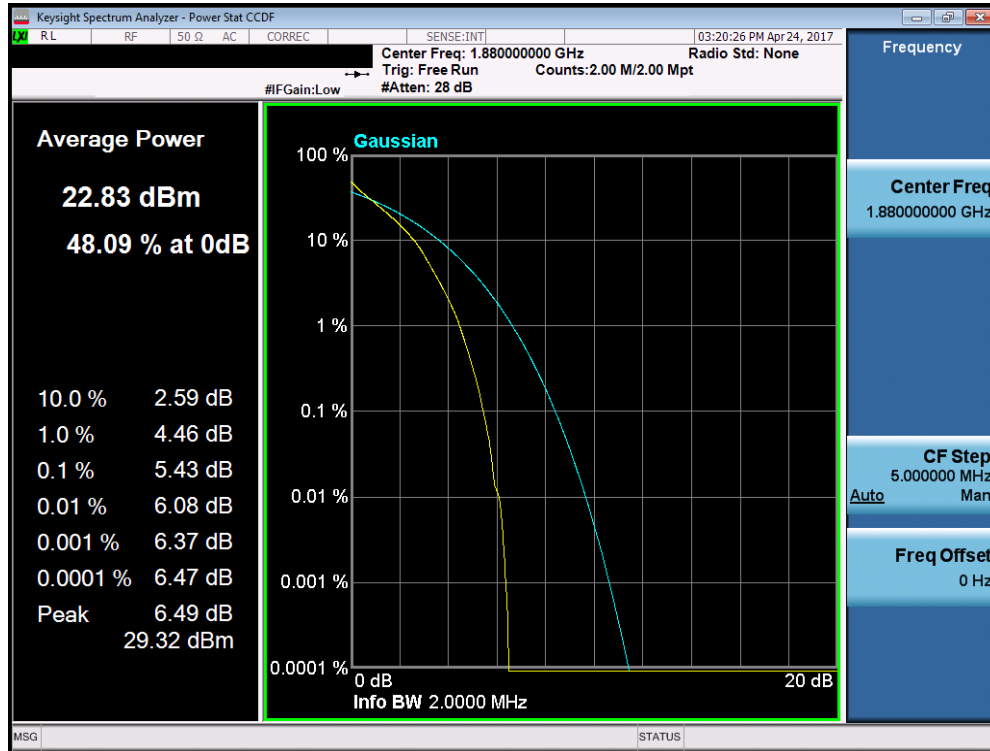


Plot 7-246. PAR Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

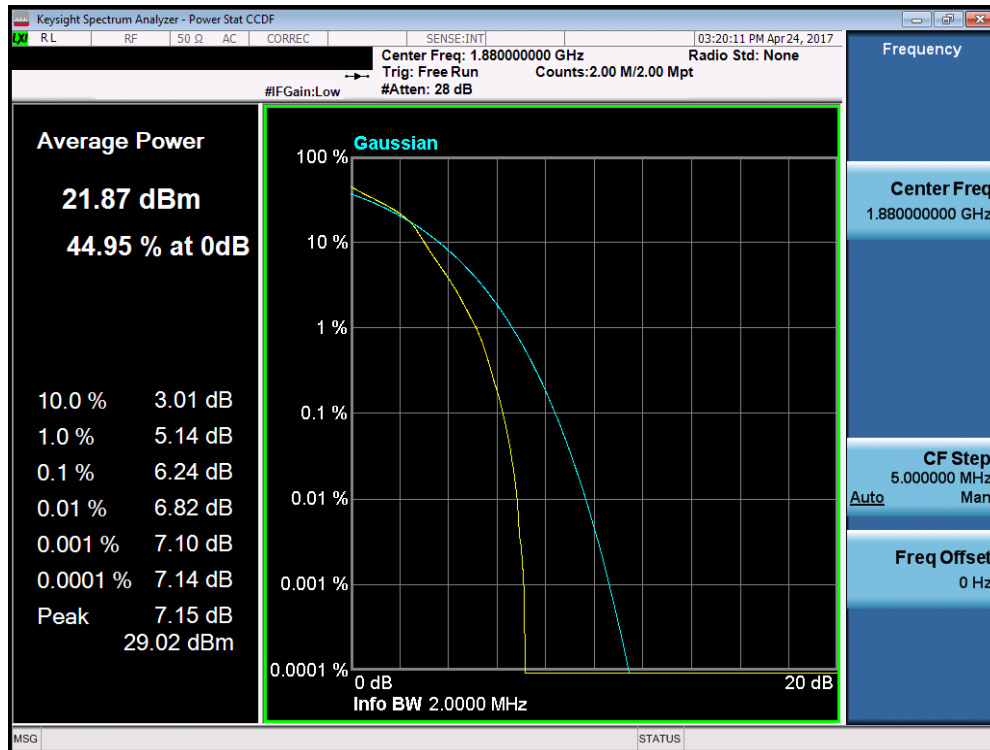


Plot 7-247. PAR Plot (Band 2 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 144 of 193

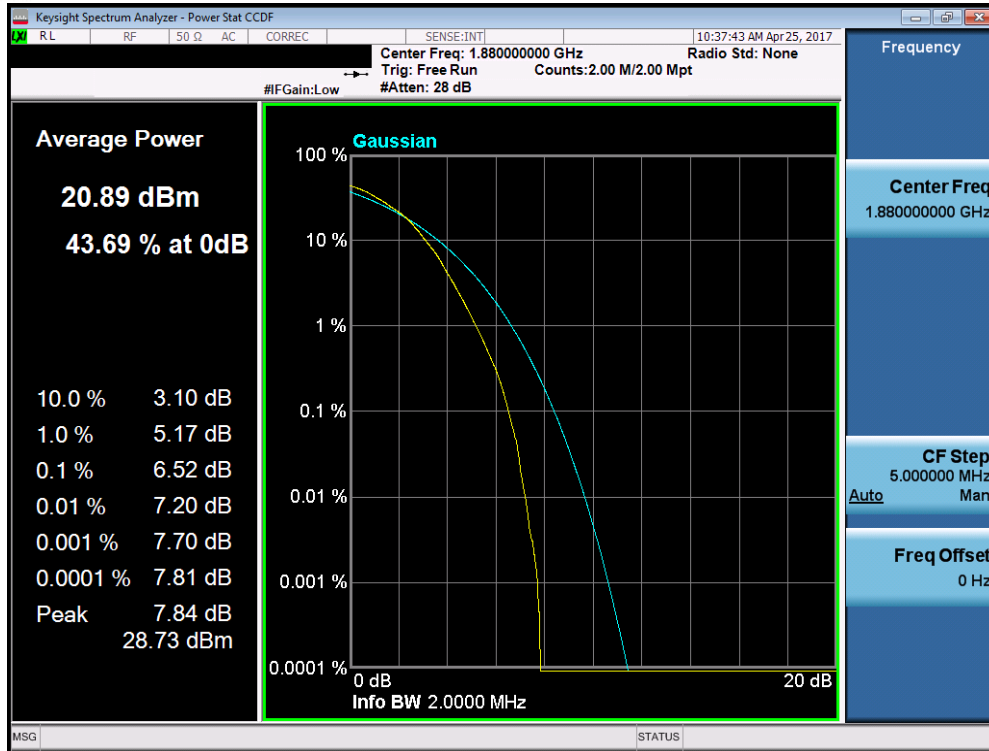


Plot 7-248. PAR Plot (Band 2 – 1.4MHz 64-QAM – RB Size 6)

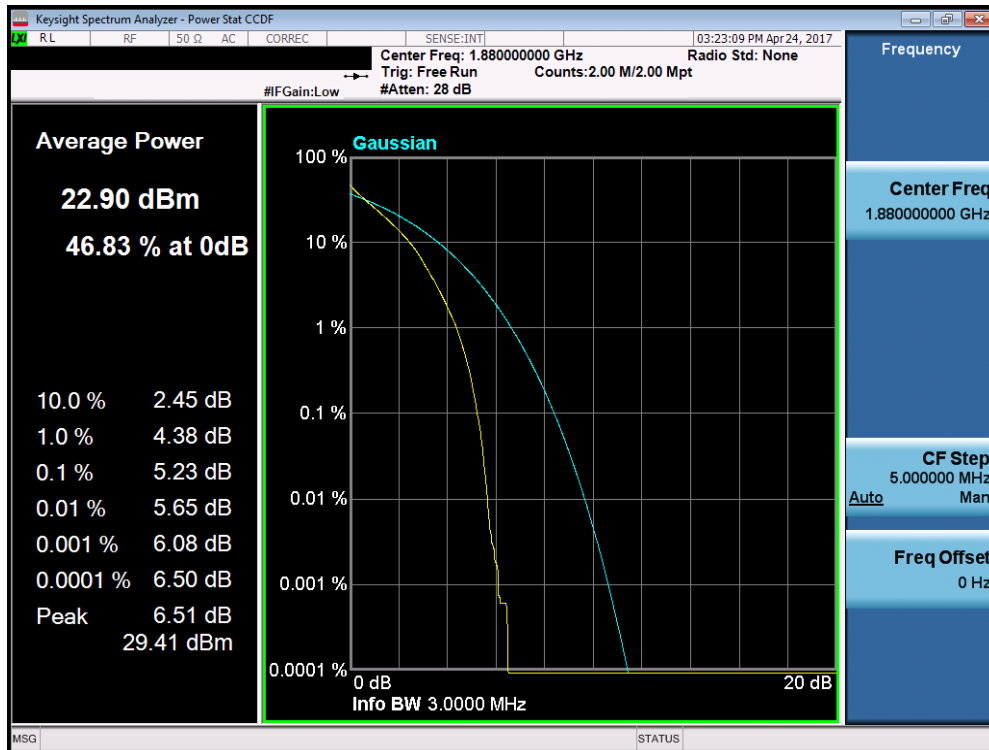


Plot 7-249. PAR Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 145 of 193

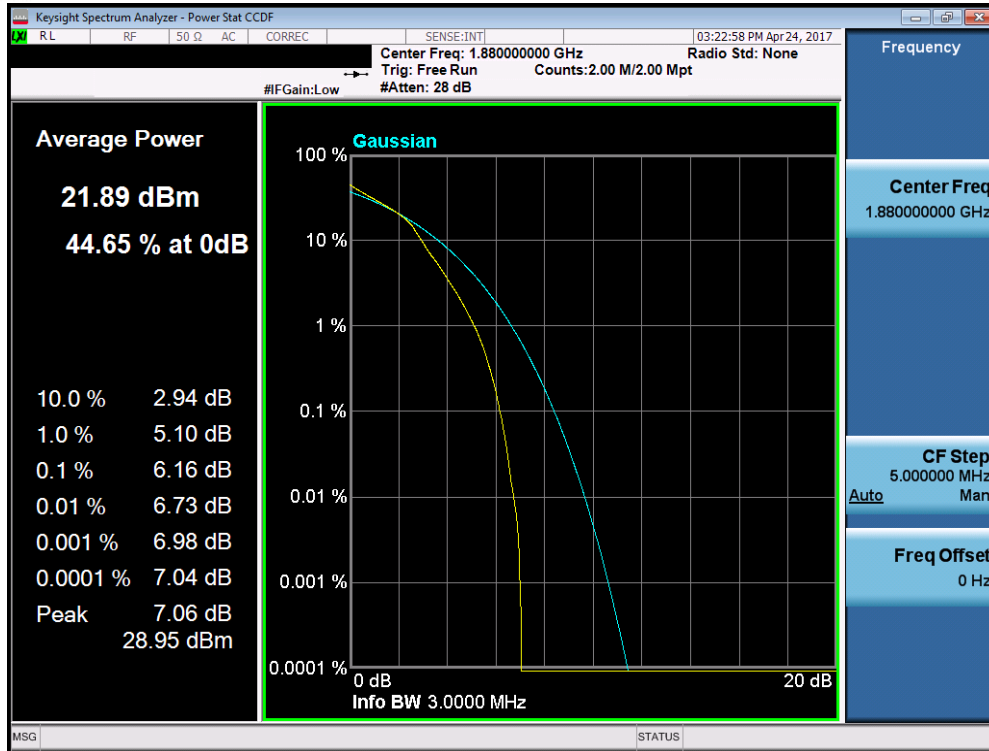


Plot 7-250. PAR Plot (Band 2 – 3.0MHz 16-QAM – RB Size 15)

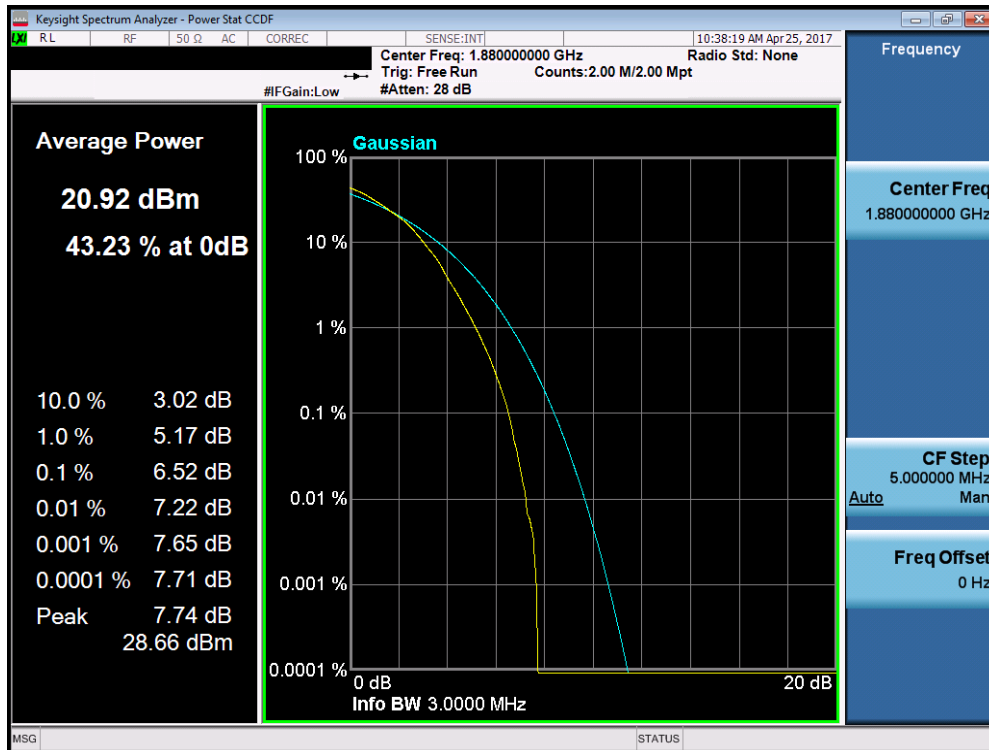


Plot 7-251. PAR Plot (Band 2 – 3.0MHz 64-QAM – RB Size 15)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 146 of 193

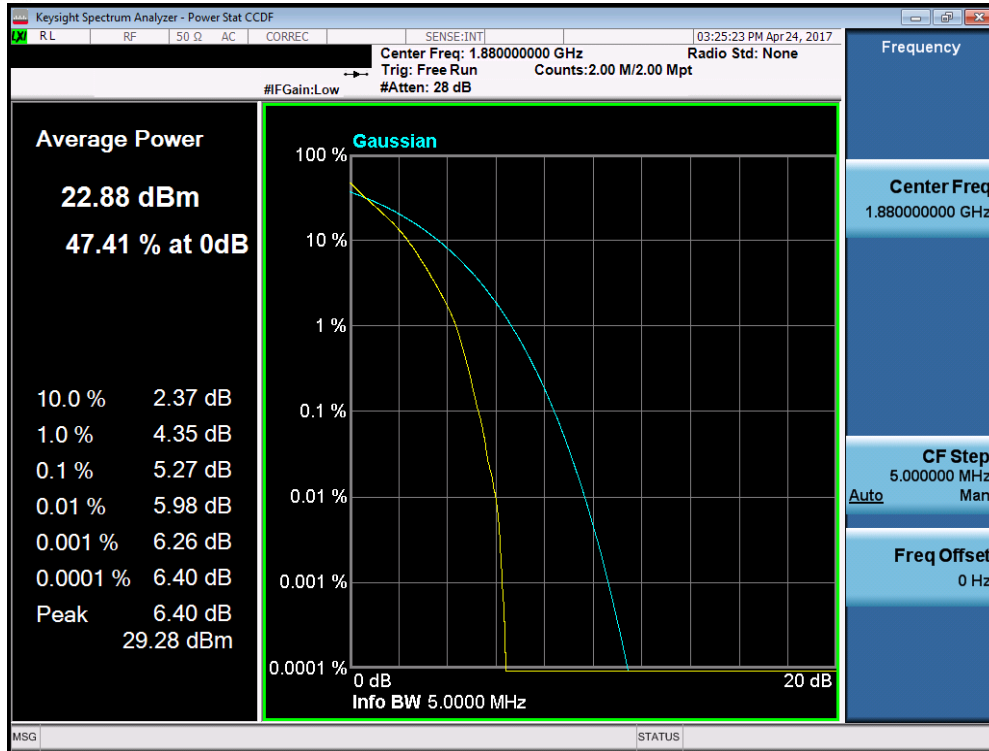


Plot 7-252. PAR Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

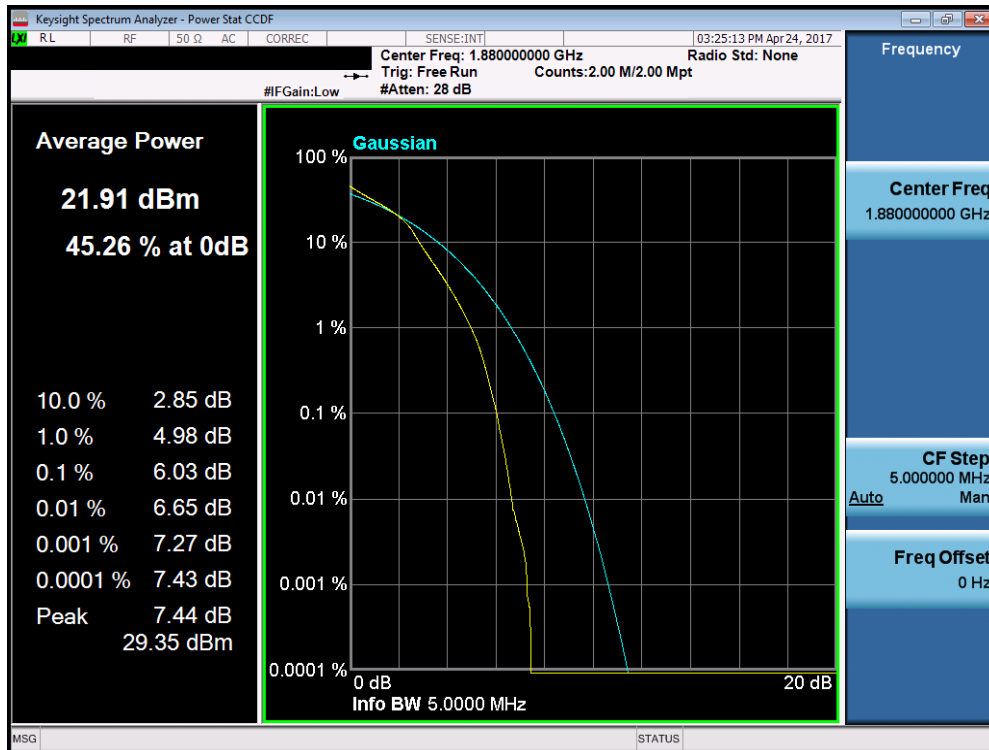


Plot 7-253. PAR Plot (Band 2 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 147 of 193


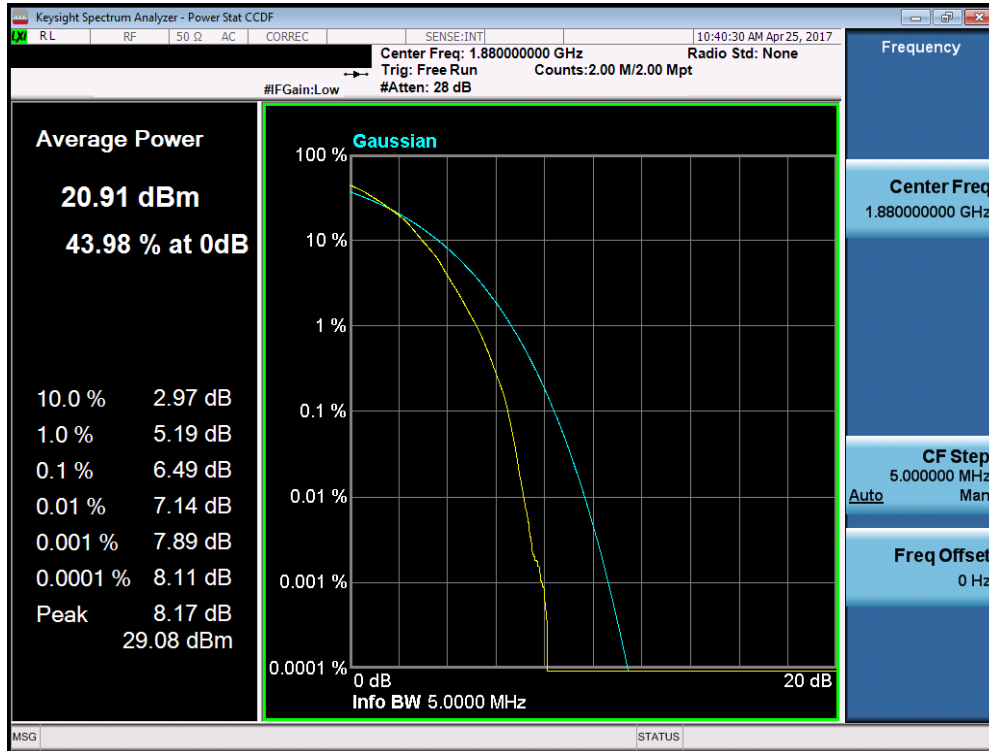


Plot 7-254. PAR Plot (Band 2 – 5.0MHz 64-QAM – RB Size 25)

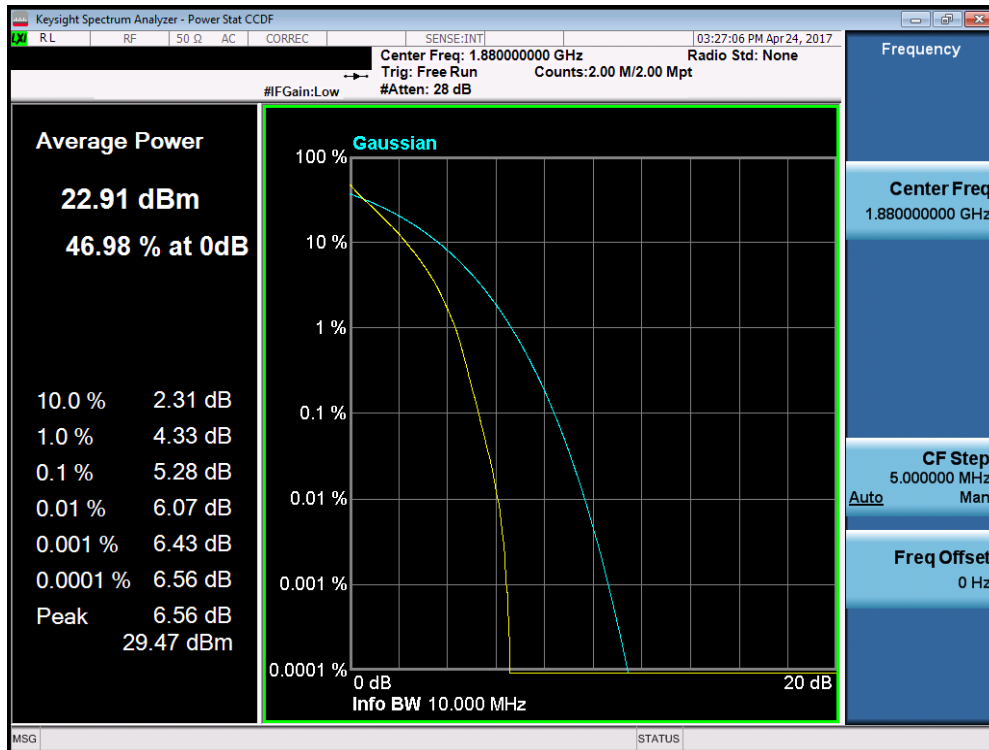


Plot 7-255. PAR Plot (Band 2 – 10.0MHz QPSK – RB Size 50)


FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 148 of 193

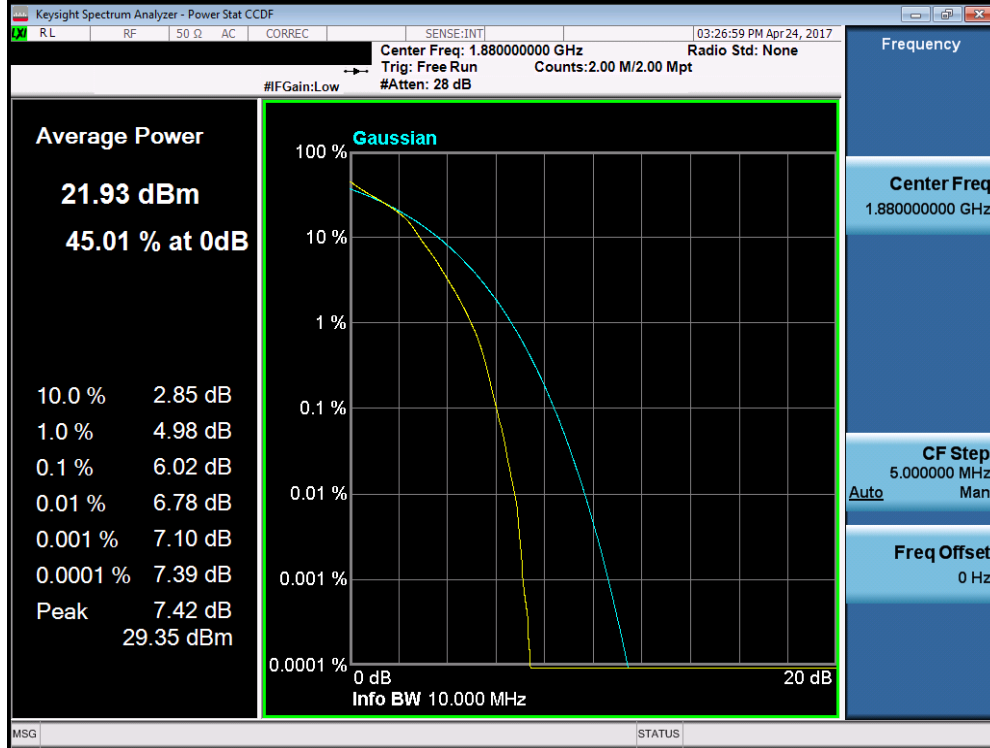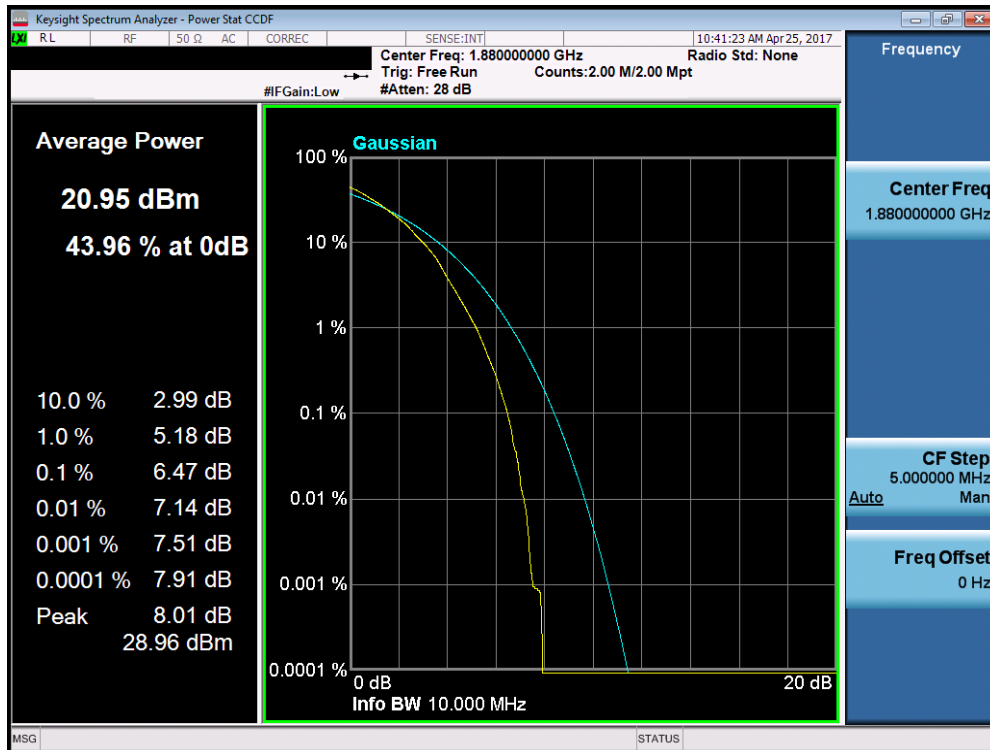

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 149 of 193

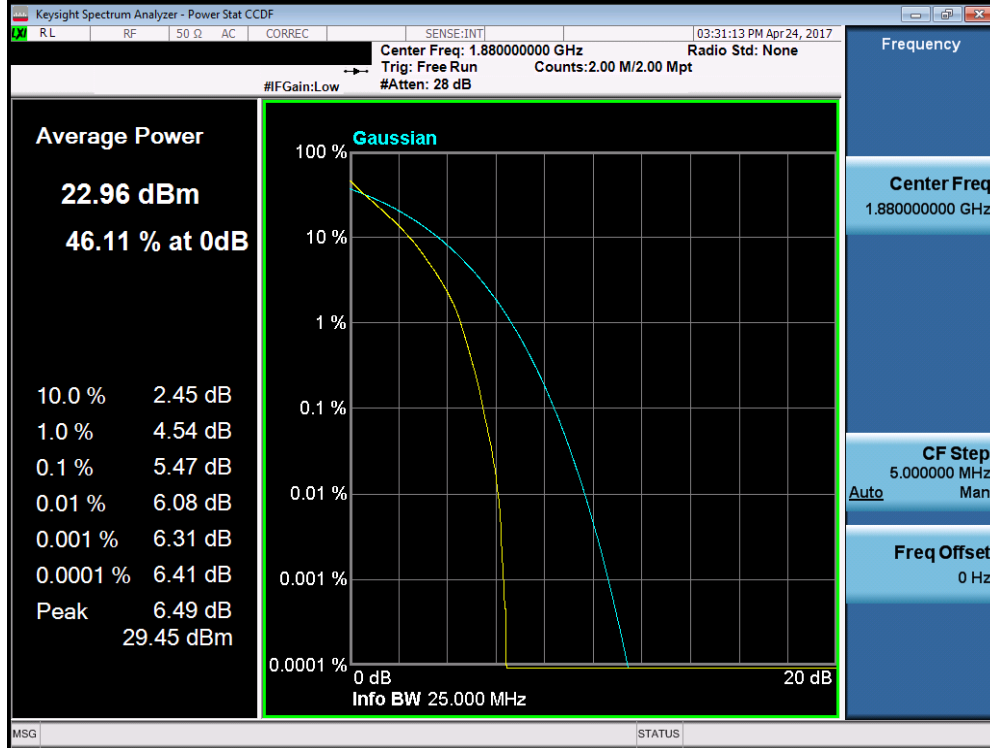


Plot 7-258. PAR Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

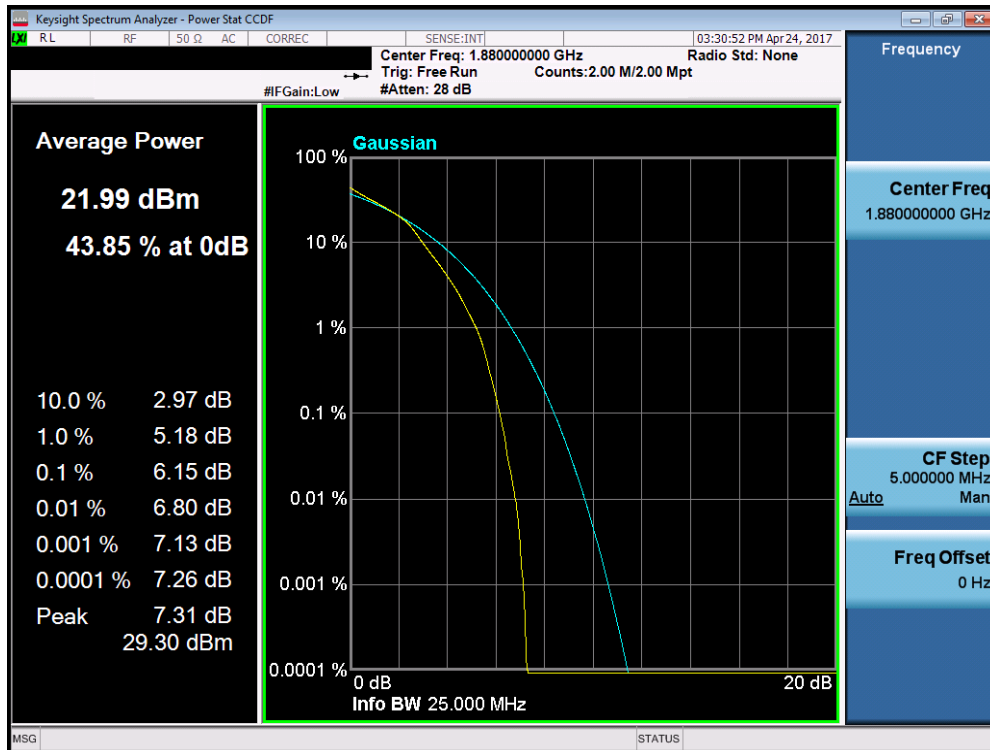


Plot 7-259. PAR Plot (Band 2 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 150 of 193

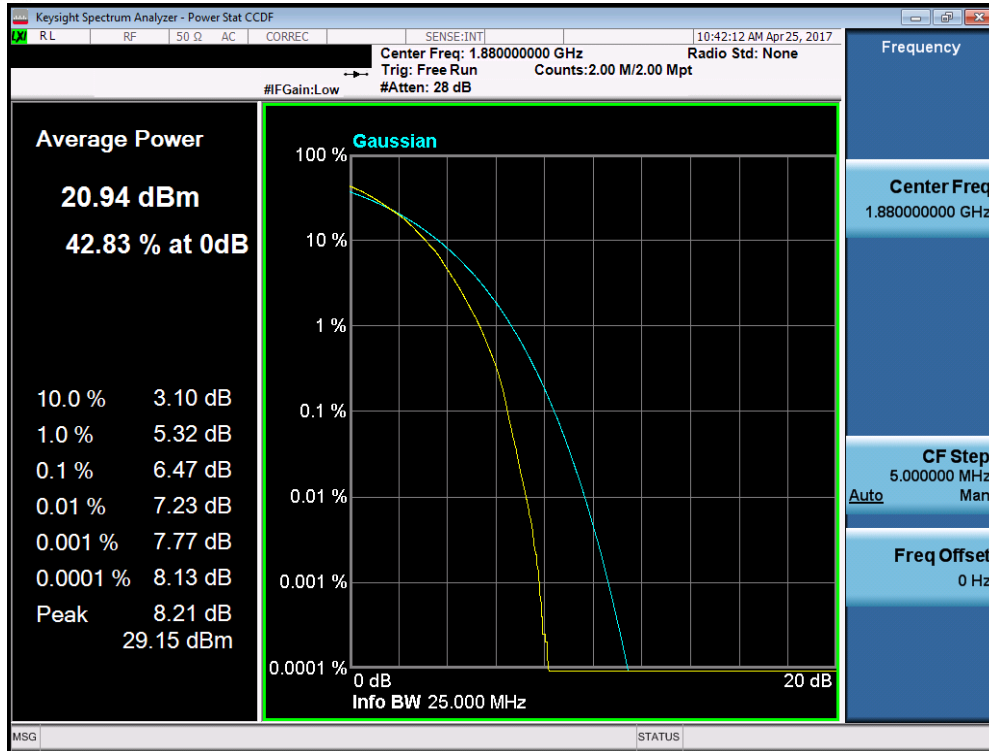


Plot 7-260. PAR Plot (Band 2 – 15.0MHz 64-QAM – RB Size 75)

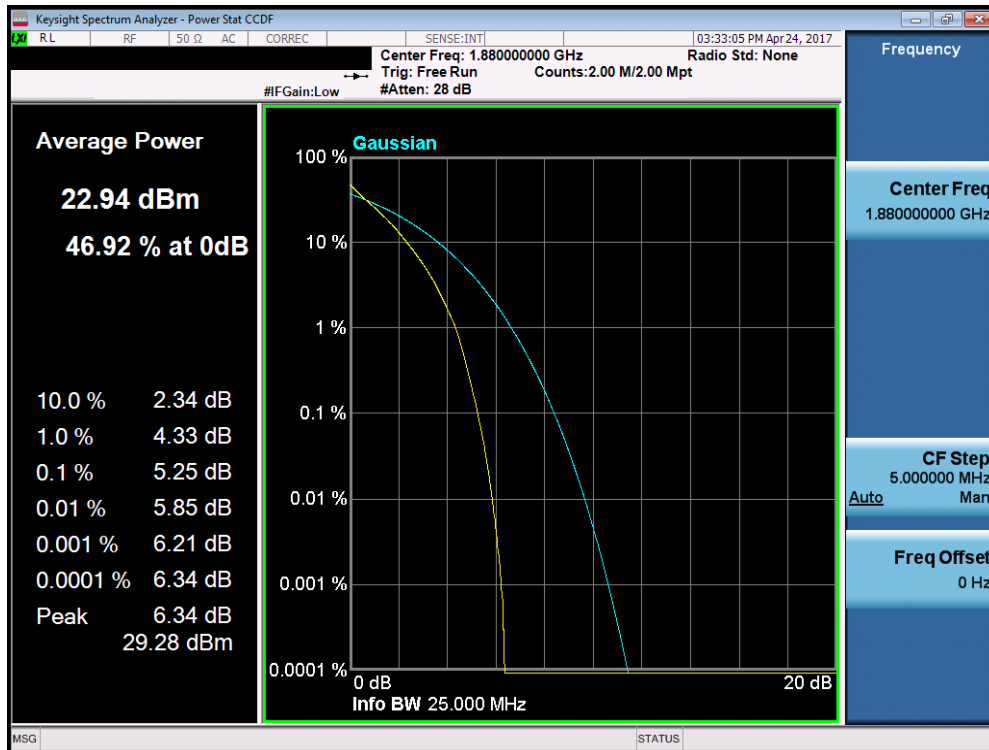


Plot 7-261. PAR Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 151 of 193

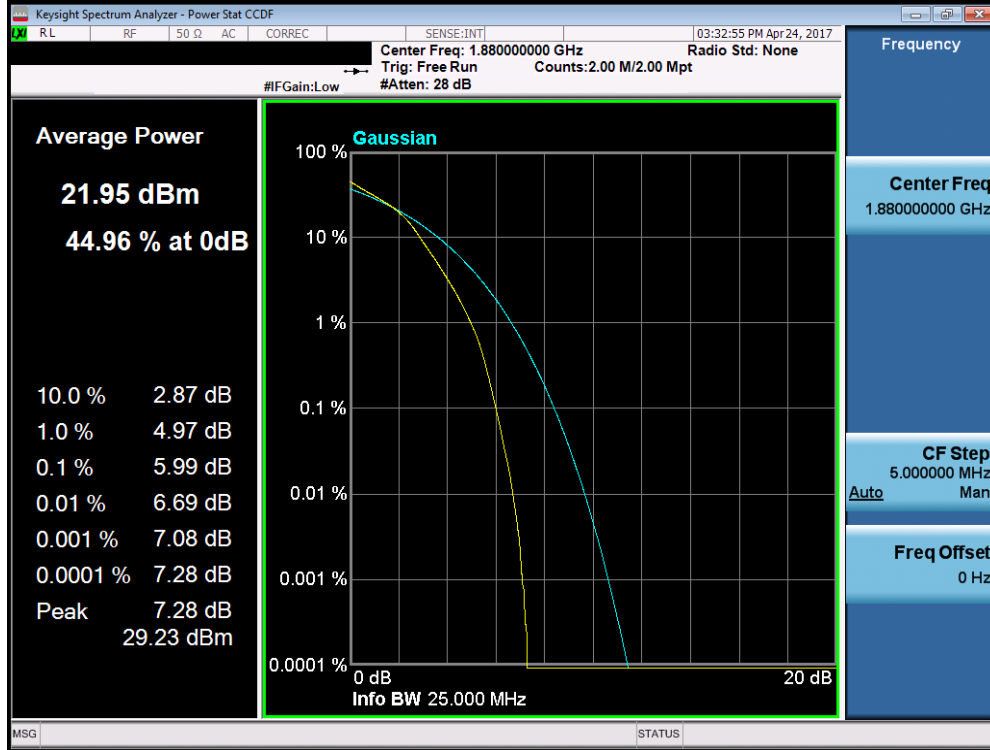

Plot 7-262. PAR Plot (Band 2 – 20.0MHz 16-QAM – RB Size 100)

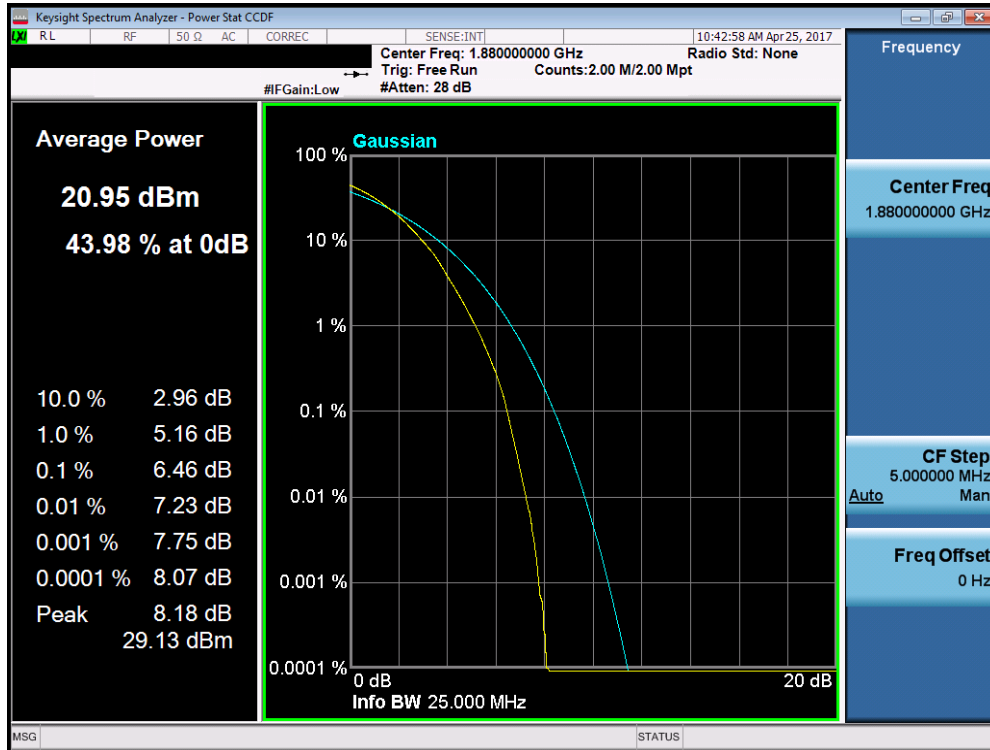

Plot 7-263. PAR Plot (Band 2 – 20.0MHz 64-QAM – RB Size 100)

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 152 of 193

7.6 Radiated Power (ERP/EIRP)

§22.913(a.2) §24.232(c.2) §27.50(h.2) §27.50(c.10) §27.50(d.4) §27.50(a.3)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.2.1

ANSI/TIA-603-D-2010 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 153 of 193	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

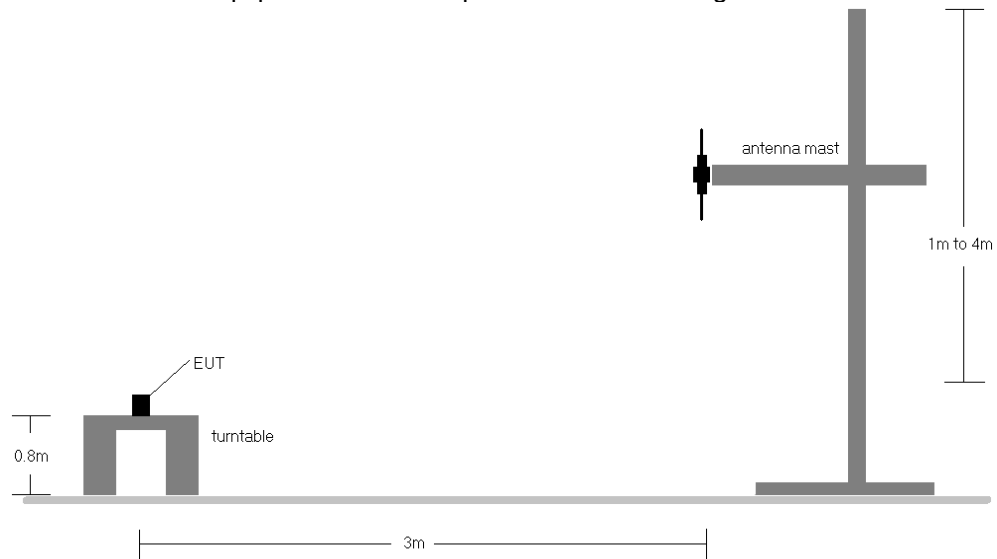


Figure 7-5. Radiated Test Setup <1GHz

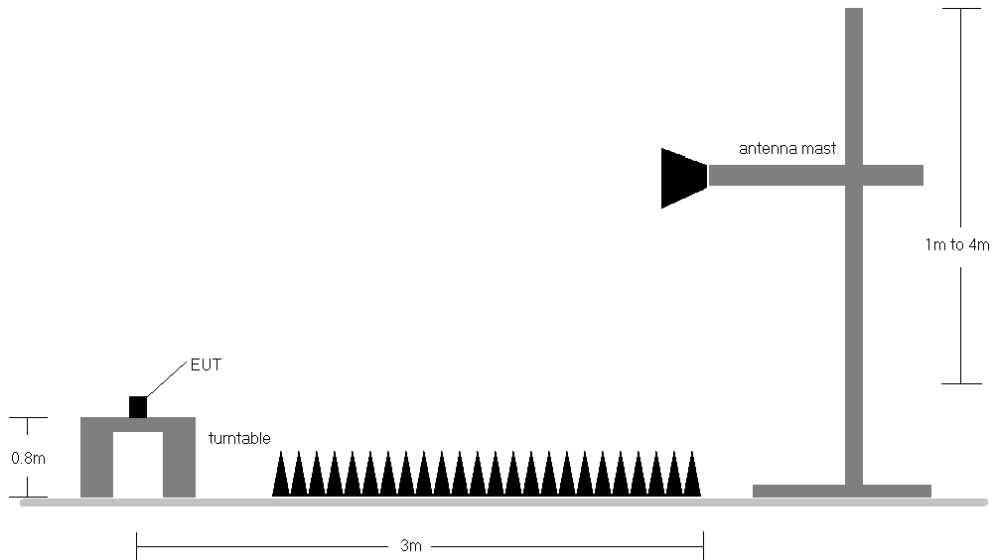


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 154 of 193	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
699.70	1.4	QPSK	H	149	356	1 / 0	17.04	2.48	19.52	34.77	-15.25
707.50	1.4	QPSK	H	149	8	1 / 0	17.91	2.56	20.47	34.77	-14.30
715.30	1.4	QPSK	H	136	6	1 / 0	17.55	2.60	20.15	34.77	-14.63
707.50	1.4	16-QAM	H	149	8	1 / 0	17.16	2.56	19.72	34.77	-15.05
707.50	1.4	64-QAM	H	149	8	1 / 0	16.09	2.56	18.65	34.77	-16.12
700.50	3	QPSK	H	145	0	1 / 0	17.50	2.48	19.98	34.77	-14.79
707.50	3	QPSK	H	145	5	1 / 0	18.12	2.56	20.68	34.77	-14.09
714.50	3	QPSK	H	139	0	1 / 0	17.82	2.60	20.42	34.77	-14.35
707.50	3	16-QAM	H	145	5	1 / 0	17.39	2.56	19.95	34.77	-14.82
707.50	3	64-QAM	H	145	5	1 / 0	16.29	2.56	18.85	34.77	-15.92
701.50	5	QPSK	H	147	1	1 / 0	17.54	2.49	20.03	34.77	-14.74
707.50	5	QPSK	H	145	5	1 / 0	18.08	2.56	20.64	34.77	-14.13
713.50	5	QPSK	H	147	6	1 / 0	17.51	2.60	20.11	34.77	-14.66
707.50	5	16-QAM	H	145	5	1 / 0	17.33	2.56	19.89	34.77	-14.88
707.50	5	64-QAM	H	145	5	1 / 0	16.26	2.56	18.82	34.77	-15.95
704.00	10	QPSK	H	149	0	1 / 0	17.18	2.51	19.69	34.77	-15.08
707.50	10	QPSK	H	149	5	1 / 0	17.89	2.56	20.45	34.77	-14.32
711.00	10	QPSK	H	145	0	1 / 0	17.77	2.60	20.37	34.77	-14.41
707.50	10	16-QAM	H	149	5	1 / 0	17.18	2.56	19.74	34.77	-15.03
707.50	10	64-QAM	H	149	5	1 / 0	16.11	2.56	18.67	34.77	-16.10
707.50	3	QPSK	V	162	219	1 / 74	14.49	2.99	17.48	34.77	-17.29
707.50	3 (WCP)	QPSK	V	250	119	1 / 0	8.75	2.99	11.74	34.77	-23.03

Table 7-2. ERP Data (Band 12)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 155 of 193	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
824.70	1.4	QPSK	H	206	185	3 / 2	15.08	5.51	20.59	38.45	-17.86
836.50	1.4	QPSK	H	203	184	3 / 2	15.88	5.14	21.02	38.45	-17.43
848.30	1.4	QPSK	H	206	184	1 / 0	14.14	4.68	18.82	38.45	-19.63
836.50	1.4	16-QAM	H	203	184	3 / 2	14.91	5.14	20.05	38.45	-18.40
836.50	1.4	64-QAM	H	203	184	3 / 2	14.02	5.14	19.16	38.45	-19.29
825.50	3	QPSK	H	193	186	1 / 0	14.51	5.52	20.03	38.45	-18.42
836.50	3	QPSK	H	200	181	1 / 0	15.64	5.14	20.78	38.45	-17.67
847.50	3	QPSK	H	193	186	1 / 0	14.48	4.67	19.15	38.45	-19.30
836.50	3	16-QAM	H	200	181	1 / 0	14.91	5.14	20.05	38.45	-18.40
836.50	3	64-QAM	H	200	181	1 / 0	13.82	5.14	18.96	38.45	-19.49
826.50	5	QPSK	H	201	186	1 / 24	15.90	5.51	21.41	38.45	-17.04
836.50	5	QPSK	H	206	179	1 / 0	15.86	5.14	21.00	38.45	-17.45
846.50	5	QPSK	H	206	186	1 / 0	14.99	4.66	19.65	38.45	-18.80
836.50	5	16-QAM	H	206	179	1 / 0	15.10	5.14	20.24	38.45	-18.21
836.50	5	64-QAM	H	206	179	1 / 0	14.06	5.14	19.20	38.45	-19.25
829.00	10	QPSK	H	198	185	1 / 0	15.42	5.49	20.91	38.45	-17.54
836.50	10	QPSK	H	206	182	1 / 0	15.88	5.14	21.02	38.45	-17.43
844.00	10	QPSK	H	207	187	1 / 0	15.11	4.70	19.81	38.45	-18.64
836.50	10	16-QAM	H	206	182	1 / 0	15.14	5.14	20.28	38.45	-18.17
836.50	10	64-QAM	H	206	182	1 / 0	14.04	5.14	19.18	38.45	-19.27
826.50	5	QPSK	V	132	242	1 / 0	15.09	5.15	20.24	38.45	-18.21
826.50	5 (WCP)	QPSK	V	193	195	1 / 0	14.96	5.15	20.11	38.45	-18.34

Table 7-3. ERP Data (Band 5)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 156 of 193	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1710.70	1.4	QPSK	H	100	121	3 / 2	15.72	9.62	25.34	30.00	-4.66
1745.00	1.4	QPSK	H	100	118	3 / 2	15.37	9.43	24.80	30.00	-5.20
1779.30	1.4	QPSK	H	100	121	3 / 2	15.36	9.25	24.61	30.00	-5.39
1710.70	1.4	16-QAM	H	100	121	3 / 2	14.82	9.62	24.44	30.00	-5.56
1710.70	1.4	64-QAM	H	100	121	3 / 2	13.92	9.62	23.54	30.00	-6.46
1711.50	3	QPSK	H	100	120	1 / 0	15.86	9.62	25.48	30.00	-4.52
1745.00	3	QPSK	H	100	120	1 / 14	15.86	9.43	25.29	30.00	-4.71
1778.50	3	QPSK	H	100	118	1 / 0	15.29	9.26	24.55	30.00	-5.45
1711.50	3	16-QAM	H	100	120	1 / 0	15.30	9.62	24.92	30.00	-5.08
1711.50	3	64-QAM	H	100	120	1 / 0	14.13	9.62	23.75	30.00	-6.25
1712.50	5	QPSK	H	100	121	1 / 0	15.97	9.61	25.58	30.00	-4.42
1745.00	5	QPSK	H	103	120	1 / 0	15.69	9.43	25.12	30.00	-4.88
1777.50	5	QPSK	H	100	120	1 / 0	15.86	9.26	25.12	30.00	-4.88
1712.50	5	16-QAM	H	100	121	1 / 0	15.45	9.61	25.06	30.00	-4.94
1712.50	5	64-QAM	H	100	121	1 / 0	14.28	9.61	23.89	30.00	-6.11
1715.00	10	QPSK	H	100	121	1 / 0	15.85	9.60	25.45	30.00	-4.55
1745.00	10	QPSK	H	100	124	1 / 0	15.63	9.43	25.06	30.00	-4.94
1775.00	10	QPSK	H	100	122	1 / 0	15.60	9.28	24.88	30.00	-5.12
1715.00	10	16-QAM	H	100	121	1 / 0	15.38	9.60	24.98	30.00	-5.02
1715.00	10	64-QAM	H	100	121	1 / 0	14.20	9.60	23.80	30.00	-6.20
1717.50	15	QPSK	H	100	122	1 / 0	15.81	9.58	25.39	30.00	-4.61
1745.00	15	QPSK	H	100	122	1 / 74	15.19	9.43	24.62	30.00	-5.38
1772.50	15	QPSK	H	100	122	1 / 0	15.40	9.29	24.69	30.00	-5.31
1717.50	15	16-QAM	H	100	122	1 / 0	15.29	9.58	24.87	30.00	-5.13
1717.50	15	64-QAM	H	100	122	1 / 0	14.14	9.58	23.72	30.00	-6.28
1720.00	20	QPSK	H	100	120	1 / 0	15.96	9.57	25.53	30.00	-4.47
1745.00	20	QPSK	H	100	118	1 / 0	15.57	9.43	25.00	30.00	-5.00
1770.00	20	QPSK	H	100	118	1 / 0	15.24	9.30	24.54	30.00	-5.46
1720.00	20	16-QAM	H	100	120	1 / 0	15.42	9.57	24.99	30.00	-5.01
1720.00	20	64-QAM	H	100	120	1 / 0	14.24	9.57	23.81	30.00	-6.19
1712.50	5	QPSK	V	100	144	1 / 0	14.20	9.43	23.63	30.00	-6.37
1712.50	5 (WCP)	QPSK	H	100	117	1 / 99	8.44	9.61	18.05	30.00	-11.95

Table 7-4. EIRP Data (Band 4/66)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 157 of 193	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1850.70	1.4	QPSK	H	100	132	3 / 2	16.30	9.12	25.42	33.01	-7.59
1880.00	1.4	QPSK	H	100	132	3 / 2	15.90	9.10	25.00	33.01	-8.01
1909.30	1.4	QPSK	H	100	132	3 / 2	16.40	9.16	25.56	33.01	-7.45
1909.30	1.4	16-QAM	H	100	132	3 / 2	15.45	9.16	24.61	33.01	-8.40
1909.30	1.4	64-QAM	H	100	132	3 / 2	14.52	9.16	23.68	33.01	-9.33
1851.50	3	QPSK	H	100	135	1 / 0	16.46	9.12	25.58	33.01	-7.43
1880.00	3	QPSK	H	100	135	1 / 0	16.05	9.10	25.15	33.01	-7.86
1908.50	3	QPSK	H	100	135	1 / 0	16.52	9.15	25.67	33.01	-7.34
1851.50	3	16-QAM	H	100	135	1 / 0	15.70	9.12	24.82	33.01	-8.19
1851.50	3	64-QAM	H	100	135	1 / 0	14.65	9.12	23.77	33.01	-9.24
1852.50	5	QPSK	H	100	129	1 / 0	16.61	9.12	25.73	33.01	-7.28
1880.00	5	QPSK	H	100	130	1 / 0	16.33	9.10	25.43	33.01	-7.58
1907.50	5	QPSK	H	100	129	1 / 0	16.58	9.15	25.73	33.01	-7.28
1852.50	5	16-QAM	H	100	129	1 / 0	15.88	9.12	25.00	33.01	-8.01
1852.50	5	64-QAM	H	100	129	1 / 0	14.79	9.12	23.91	33.01	-9.10
1855.00	10	QPSK	H	100	135	1 / 0	16.29	9.12	25.41	33.01	-7.60
1880.00	10	QPSK	H	100	135	1 / 0	16.14	9.10	25.24	33.01	-7.77
1905.00	10	QPSK	H	100	116	1 / 0	15.71	9.13	24.84	33.01	-8.17
1855.00	10	16-QAM	H	100	135	1 / 0	15.55	9.12	24.67	33.01	-8.34
1855.00	10	64-QAM	H	100	135	1 / 0	14.48	9.12	23.60	33.01	-9.41
1857.50	15	QPSK	H	100	127	1 / 0	16.09	9.11	25.20	33.01	-7.81
1880.00	15	QPSK	H	100	134	1 / 0	16.02	9.10	25.12	33.01	-7.89
1902.50	15	QPSK	H	100	13	1 / 0	16.28	9.11	25.39	33.01	-7.62
1902.50	15	16-QAM	H	100	13	1 / 0	15.52	9.11	24.63	33.01	-8.38
1902.50	15	64-QAM	H	100	13	1 / 0	14.45	9.11	23.56	33.01	-9.45
1860.00	20	QPSK	H	100	127	1 / 0	16.18	9.11	25.29	33.01	-7.72
1880.00	20	QPSK	H	100	131	1 / 0	16.25	9.10	25.35	33.01	-7.66
1900.00	20	QPSK	H	100	127	1 / 0	15.86	9.09	24.95	33.01	-8.06
1880.00	20	16-QAM	H	100	131	1 / 0	15.53	9.10	24.63	33.01	-8.38
1880.00	20	64-QAM	H	100	131	1 / 0	14.47	9.10	23.57	33.01	-9.44
1852.50	5	QPSK	V	100	16	1 / 99	14.78	7.99	22.77	33.01	-10.24
1852.50	5 (WCP)	QPSK	H	127	336	1 / 0	12.63	9.12	21.75	33.01	-11.26

Table 7-5. EIRP Data (Band 2)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 158 of 193	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
2307.50	5	QPSK	H	108	300	1 / 0	11.99	8.72	20.71	23.98	-3.27
2310.00	5	QPSK	H	106	303	1 / 0	12.11	8.73	20.84	23.98	-3.14
2312.50	5	QPSK	H	108	301	1 / 0	11.86	8.74	20.60	23.98	-3.38
2310.00	5	16-QAM	H	106	303	1 / 0	11.36	8.73	20.09	23.98	-3.89
2310.00	5	64-QAM	H	106	303	1 / 0	10.18	8.73	18.91	23.98	-5.07
2310.00	10	QPSK	H	106	304	1 / 0	11.67	8.73	20.40	23.98	-3.58
2310.00	10	16-QAM	H	106	304	1 / 0	10.95	8.73	19.68	23.98	-4.30
2310.00	10	64-QAM	H	106	304	1 / 0	9.87	8.73	18.60	23.98	-5.38
2310.00	5	QPSK	V	115	284	1 / 0	10.29	8.88	19.17	23.98	-4.81
2310.00	5 (WCP)	QPSK	V	101	305	1 / 0	8.54	8.88	17.42	23.98	-6.56

Table 7-6. EIRP Data (Band 30)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 159 of 193	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
2502.50	5	QPSK	H	150	315	1 / 0	14.96	5.74	20.70	33.01	-12.31
2535.00	5	QPSK	H	150	322	1 / 0	14.62	5.86	20.48	33.01	-12.53
2567.50	5	QPSK	H	150	321	1 / 0	13.94	5.98	19.92	33.01	-13.09
2502.50	5	16-QAM	H	150	315	1 / 0	14.24	5.74	19.98	33.01	-13.03
2502.50	5	64-QAM	H	150	315	1 / 0	12.87	5.74	18.61	33.01	-14.40
2505.00	10	QPSK	H	150	321	1 / 0	14.71	5.75	20.46	33.01	-12.55
2535.00	10	QPSK	H	150	308	1 / 0	14.56	5.86	20.42	33.01	-12.59
2565.00	10	QPSK	H	150	310	1 / 0	13.75	5.97	19.72	33.01	-13.29
2505.00	10	16-QAM	H	150	321	1 / 0	13.63	5.75	19.38	33.01	-13.63
2505.00	10	64-QAM	H	150	321	1 / 0	12.55	5.75	18.30	33.01	-14.71
2507.50	15	QPSK	H	150	304	1 / 0	14.41	5.76	20.17	33.01	-12.84
2535.00	15	QPSK	H	150	302	1 / 0	14.80	5.86	20.66	33.01	-12.35
2562.50	15	QPSK	H	150	309	1 / 0	13.83	5.96	19.79	33.01	-13.22
2535.00	15	16-QAM	H	150	302	1 / 0	14.25	5.86	20.11	33.01	-12.90
2535.00	15	64-QAM	H	150	302	1 / 0	12.54	5.86	18.40	33.01	-14.61
2510.00	20	QPSK	H	150	304	1 / 0	15.24	5.77	21.01	33.01	-12.00
2535.00	20	QPSK	H	150	308	1 / 0	14.81	5.86	20.67	33.01	-12.34
2560.00	20	QPSK	H	150	302	1 / 0	14.23	5.95	20.18	33.01	-12.83
2510.00	20	16-QAM	H	150	304	1 / 0	14.34	5.77	20.11	33.01	-12.90
2510.00	20	64-QAM	H	150	304	1 / 0	14.05	5.77	19.82	33.01	-13.19
2510.00	20	QPSK	V	150	153	1 / 0	14.40	5.66	20.06	33.01	-12.95
2510.00	20 (WCP)	QPSK	H	150	134	1 / 0	14.59	5.77	20.36	33.01	-12.65

Table 7-7. EIRP Data (Band 7)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 160 of 193

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
2498.50	5	QPSK	H	100	302	1 / 0	11.69	8.42	20.11	33.01	-12.90
2593.00	5	QPSK	H	100	303	1 / 24	12.25	8.65	20.90	33.01	-12.11
2687.50	5	QPSK	H	110	307	1 / 0	10.89	8.44	19.33	33.01	-13.68
2593.00	5	16-QAM	H	100	303	1 / 0	10.99	8.65	19.64	33.01	-13.37
2593.00	5	64-QAM	H	100	303	1 / 0	9.88	8.65	18.53	33.01	-14.48
2501.00	10	QPSK	H	100	303	1 / 49	11.79	8.41	20.20	33.01	-12.81
2593.00	10	QPSK	H	100	302	1 / 49	11.79	8.65	20.44	33.01	-12.57
2685.00	10	QPSK	H	108	304	1 / 0	10.79	8.45	19.24	33.01	-13.77
2501.00	10	16-QAM	H	100	303	1 / 49	11.02	8.41	19.43	33.01	-13.58
2501.00	10	64-QAM	H	100	303	1 / 49	10.12	8.41	18.53	33.01	-14.48
2503.50	15	QPSK	H	100	306	1 / 0	11.38	8.42	19.80	33.01	-13.21
2593.00	15	QPSK	H	100	306	1 / 0	11.98	8.65	20.63	33.01	-12.38
2682.50	15	QPSK	H	108	303	1 / 0	10.40	8.46	18.86	33.01	-14.15
2593.00	15	16-QAM	H	100	306	1 / 0	10.96	8.65	19.61	33.01	-13.40
2593.00	15	64-QAM	H	100	306	1 / 0	10.12	8.65	18.77	33.01	-14.24
2506.00	20	QPSK	H	100	308	1 / 0	11.19	8.42	19.61	33.01	-13.40
2593.00	20	QPSK	H	100	307	1 / 0	12.57	8.65	21.22	33.01	-11.79
2680.00	20	QPSK	H	108	305	1 / 0	10.52	8.46	18.98	33.01	-14.03
2593.00	20	16-QAM	H	100	307	1 / 0	11.34	8.65	19.99	33.01	-13.02
2593.00	20	64-QAM	H	100	307	1 / 0	10.54	8.65	19.19	33.01	-13.82
2593.00	20	QPSK	V	100	306	1 / 0	10.14	8.74	18.88	33.01	-14.13
2593.00	20 (WCP)	QPSK	V	100	0	1 / 0	10.82	8.74	19.56	33.01	-13.45

Table 7-8. EIRP Data (Band 41)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 161 of 193	

7.7 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a) §27.53(g) §27.53(h) §27.53(m) §27.53(a.4)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 162 of 193	

The EUT and measurement equipment were set up as shown in the diagram below.

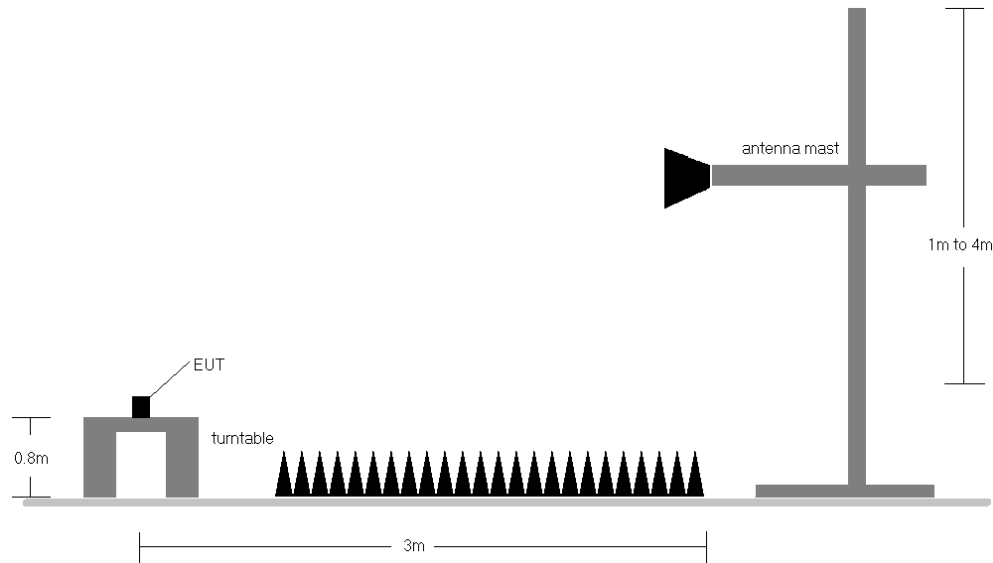


Figure 7-7. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMG892A	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 163 of 193

OPERATING FREQUENCY: 700.50 MHz
 CHANNEL: 23025
 MEASURED OUTPUT POWER: 19.98 dBm = 0.100 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.98 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1401.00	H	-	-	-74.55	5.91	-68.64	88.6
2101.50	H	-	-	-72.88	6.79	-66.09	86.1

Table 7-9. Radiated Spurious Data (Band 12 – Low Channel)

OPERATING FREQUENCY: 707.50 MHz
 CHANNEL: 23095
 MEASURED OUTPUT POWER: 20.68 dBm = 0.117 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 33.68 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1415.00	H	-	-	-74.73	5.96	-68.76	89.4
2122.50	H	-	-	-72.92	6.84	-66.07	86.8

Table 7-10. Radiated Spurious Data (Band 12 – Mid Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 164 of 193

OPERATING FREQUENCY: 714.50 MHz
 CHANNEL: 23165
 MEASURED OUTPUT POWER: 20.42 dBm = 0.110 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.42 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1429.00	H	147	82	-74.29	6.02	-68.27	88.7
2143.50	H	-	-	-72.90	6.90	-66.01	86.4

Table 7-11. Radiated Spurious Data (Band 12 – High Channel)

OPERATING FREQUENCY: 707.50 MHz
 CHANNEL: 23095
 MEASURED OUTPUT POWER: 11.74 dBm = 0.015 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 24.74 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1415.00	H	-	-	-77.04	5.96	-71.07	82.8
2122.50	H	-	-	-75.06	6.84	-68.21	80.0

Table 7-12. Radiated Spurious Data with WCP (Band 12 – Mid Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 165 of 193

OPERATING FREQUENCY: 826.50 MHz
 CHANNEL: 20425
 MEASURED OUTPUT POWER: 21.41 dBm = 0.138 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.41 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1653.00	H	-	-	-74.10	6.28	-67.82	89.2
2479.50	H	-	-	-70.17	6.84	-63.32	84.7

Table 7-13. Radiated Spurious Data (Band 5 – Low Channel)

OPERATING FREQUENCY: 836.50 MHz
 CHANNEL: 20525
 MEASURED OUTPUT POWER: 21.00 dBm = 0.126 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.00 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1673.00	H	-	-	-74.10	6.21	-67.89	88.9
2509.50	H	-	-	-70.66	6.86	-63.80	84.8

Table 7-14. Radiated Spurious Data (Band 5 – Mid Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 166 of 193

OPERATING FREQUENCY: 846.50 MHz
 CHANNEL: 20625
 MEASURED OUTPUT POWER: 19.65 dBm = 0.092 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.65 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1693.00	H	100	8	-68.74	6.14	-62.60	82.3
2539.50	H	-	-	-70.58	6.95	-63.63	83.3

Table 7-15. Radiated Spurious Data (Band 5 – High Channel)

OPERATING FREQUENCY: 826.50 MHz
 CHANNEL: 20425
 MEASURED OUTPUT POWER: 20.11 dBm = 0.103 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.11 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1653.00	V	-	-	-74.05	6.28	-67.77	87.9
2479.50	V	-	-	-71.27	6.84	-64.42	84.5

Table 7-16. Radiated Spurious Data with WCP (Band 5 – Low Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 167 of 193

OPERATING FREQUENCY: 1712.50 MHz
 CHANNEL: 131997
 MEASURED OUTPUT POWER: 25.58 dBm = 0.361 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.58 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3425.00	H	104	60	-65.55	9.65	-55.90	81.5
5137.50	H	-	-	-66.39	10.91	-55.48	81.1

Table 7-17. Radiated Spurious Data (Band 4/66 – Low Channel)

OPERATING FREQUENCY: 1745.00 MHz
 CHANNEL: 132322
 MEASURED OUTPUT POWER: 25.12 dBm = 0.325 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.12 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3490.00	H	-	-	-68.83	9.85	-58.98	84.1
5235.00	H	-	-	-65.84	10.88	-54.96	80.1

Table 7-18. Radiated Spurious Data (Band 4/66 – Mid Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 168 of 193

OPERATING FREQUENCY: 1777.50 MHz
 CHANNEL: 132647
 MEASURED OUTPUT POWER: 25.12 dBm = 0.325 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.12 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3555.00	H	-	-	-68.80	9.97	-58.83	84.0
5332.50	H	-	-	-66.50	11.05	-55.45	80.6

Table 7-19. Radiated Spurious Data (Band 4/66 – High Channel)

OPERATING FREQUENCY: 1712.50 MHz
 CHANNEL: 131997
 MEASURED OUTPUT POWER: 18.05 dBm = 0.064 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 31.05 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3425.00	V	147	54	-67.64	9.65	-57.99	76.0
5137.50	V	-	-	-66.55	10.91	-55.64	73.7

Table 7-20. Radiated Spurious Data with WCP (Band 4/66 – Low Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 169 of 193

OPERATING FREQUENCY: 1852.50 MHz
 CHANNEL: 18625
 MEASURED OUTPUT POWER: 25.73 dBm = 0.374 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.73 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3705.00	H	101	287	-67.38	10.01	-57.37	83.1
5557.50	H	-	-	-67.93	11.20	-56.74	82.5

Table 7-21. Radiated Spurious Data (Band 2 – Low Channel)

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 18900
 MEASURED OUTPUT POWER: 25.43 dBm = 0.349 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.43 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	H	101	307	-67.08	9.79	-57.30	82.7
5640.00	H	-	-	-67.64	11.35	-56.30	81.7

Table 7-22. Radiated Spurious Data (Band 2 – Mid Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 170 of 193

OPERATING FREQUENCY: 1907.50 MHz
 CHANNEL: 19175
 MEASURED OUTPUT POWER: 25.73 dBm = 0.374 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.73 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3815.00	H	101	334	-67.09	9.57	-57.52	83.2
5722.50	H	-	-	-67.01	11.43	-55.58	81.3

Table 7-23. Radiated Spurious Data (Band 2 – High Channel)

OPERATING FREQUENCY: 1852.50 MHz
 CHANNEL: 18625
 MEASURED OUTPUT POWER: 21.75 dBm = 0.150 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.75 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3705.00	V	127	153	-68.12	10.01	-58.11	79.9
5557.50	V	-	-	-67.68	11.20	-56.49	78.2

Table 7-24. Radiated Spurious Data with WCP (Band 2 – Low Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 171 of 193

OPERATING FREQUENCY: 2307.50 MHz
 CHANNEL: 27685
 MEASURED OUTPUT POWER: 20.71 dBm = 0.118 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $70 + 10 \log_{10}(W) =$ 60.71 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
4615.00	H	112	308	-61.38	11.32	-50.06	70.8
6922.50	H	-	-	-59.87	10.87	-49.00	69.7

Table 7-25. Radiated Spurious Data (Band 30 – Low Channel)

OPERATING FREQUENCY: 2310.00 MHz
 CHANNEL: 27710
 MEASURED OUTPUT POWER: 20.84 dBm = 0.121 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $70 + 10 \log_{10}(W) =$ 60.84 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
4620.00	H	108	307	-61.33	11.33	-50.00	70.8
6930.00	H	-	-	-59.67	10.89	-48.79	69.6

Table 7-26. Radiated Spurious Data (Band 30 – Mid Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 172 of 193

OPERATING FREQUENCY: 2312.50 MHz
 CHANNEL: 27735
 MEASURED OUTPUT POWER: 20.60 dBm = 0.115 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $70 + 10 \log_{10} (W) =$ 60.60 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
4625.00	H	130	123	-60.72	11.34	-49.38	70.0
6937.50	H	-	-	-59.86	10.90	-48.96	69.6

Table 7-27. Radiated Spurious Data (Band 30 – High Channel)

OPERATING FREQUENCY: 2310.00 MHz
 CHANNEL: 27710
 MEASURED OUTPUT POWER: 17.42 dBm = 0.055 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $70 + 10 \log_{10} (W) =$ 57.42 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
4620.00	H	176	63	-62.78	11.33	-51.45	68.9
6930.00	H	-	-	-59.87	10.89	-48.99	66.4

Table 7-28. Radiated Spurious Data with WCP (Band 30 – Mid Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 173 of 193

OPERATING FREQUENCY: 2510.00 MHz
 CHANNEL: 20850
 MEASURED OUTPUT POWER: 21.01 dBm = 0.126 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W)$ 46.01 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5020.00	H	150	320	-60.32	10.72	-49.60	70.6
7530.00	H	-	-	-69.48	9.70	-59.78	80.8

Table 7-29. Radiated Spurious Data (Band 7 – Low Channel)

OPERATING FREQUENCY: 2535.00 MHz
 CHANNEL: 21100
 MEASURED OUTPUT POWER: 20.67 dBm = 0.117 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W)$ 45.67 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5070.00	H	150	319	-59.60	10.76	-48.85	69.5
7605.00	H	-	-	-70.71	9.94	-60.77	81.4

Table 7-30. Radiated Spurious Data (Band 7 – Mid Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 174 of 193

OPERATING FREQUENCY: 2560.00 MHz
 CHANNEL: 21350
 MEASURED OUTPUT POWER: 20.18 dBm = 0.104 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W)$ 45.18 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5120.00	H	150	307	-55.98	10.80	-45.18	65.4
7680.00	H	-	-	-70.71	10.18	-60.53	80.7

Table 7-31. Radiated Spurious Data (Band 7 – High Channel)

OPERATING FREQUENCY: 2510.00 MHz
 CHANNEL: 20850
 MEASURED OUTPUT POWER: 20.36 dBm = 0.109 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W)$ 45.36 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5020.00	H	150	235	-60.85	10.72	-50.13	70.5
7530.00	H	-	-	-69.01	9.70	-59.31	79.7

Table 7-32. Radiated Spurious Data with WCP (Band 7 –20850 Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 175 of 193

OPERATING FREQUENCY: 2506.00 MHz
 CHANNEL: 39750
 MEASURED OUTPUT POWER: 19.61 dBm = 0.092 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10} (W)$ 44.61 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5012.00	H	104	321	-61.43	11.16	-50.26	69.9
7518.00	H	-	-	-58.46	11.21	-47.25	66.9
10024.00	H	-	-	-56.98	12.57	-44.41	64.0

Table 7-33. Radiated Spurious Data (Band 41 – Low Channel)

OPERATING FREQUENCY: 2593.00 MHz
 CHANNEL: 40620
 MEASURED OUTPUT POWER: 21.22 dBm = 0.132 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10} (W)$ 46.22 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5186.00	H	119	305	-49.45	10.83	-38.62	59.8
7779.00	H	101	302	-51.23	11.60	-39.63	60.9
10372.00	H	-	-	-57.66	12.74	-44.92	66.1

Table 7-34. Radiated Spurious Data (Band 41 – Mid Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 176 of 193

OPERATING FREQUENCY: 2680.00 MHz
 CHANNEL: 41490
 MEASURED OUTPUT POWER: 18.98 dBm = 0.079 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10} (W)$ 43.98 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5360.00	H	108	301	-60.69	11.08	-49.61	68.6
8040.00	H	-	-	-57.50	11.54	-45.96	64.9
10720.00	H	-	-	-57.85	12.97	-44.88	63.9

Table 7-35. Radiated Spurious Data (Band 41 – High Channel)

OPERATING FREQUENCY: 2593.00 MHz
 CHANNEL: 40620
 MEASURED OUTPUT POWER: 19.56 dBm = 0.090 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10} (W)$ 44.56 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
5186.00	V	101	14	-53.80	10.83	-42.97	62.5
7779.00	V	100	8	-54.02	11.60	-42.42	62.0
10372.00	V	-	-	-58.09	12.74	-45.35	64.9

Table 7-36. Radiated Spurious Data with WCP (Band 41 – Mid Channel)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset		Page 177 of 193

7.8 Frequency Stability / Temperature Variation

\$2.1055 \$22.355 \$24.235 \$27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-D-2010

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 178 of 193	

Band 12 Frequency Stability Measurements

\$2.1055 \$27.54

OPERATING FREQUENCY: 707,500,000 Hz
 CHANNEL: 23790
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	707,500,274	274	0.0000387
100 %		- 30	707,499,818	-182	-0.0000257
100 %		- 20	707,499,924	-76	-0.0000107
100 %		- 10	707,499,974	-26	-0.0000037
100 %		0	707,499,766	-234	-0.0000331
100 %		+ 10	707,499,695	-305	-0.0000431
100 %		+ 20	707,500,129	129	0.0000182
100 %		+ 30	707,500,071	71	0.0000100
100 %		+ 40	707,500,011	11	0.0000016
100 %		+ 50	707,500,069	69	0.0000098
BATT. ENDPOINT	3.45	+ 20	707,499,518	-482	-0.0000681

Table 7-37. Frequency Stability Data (Band 12)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 179 of 193	

Band 12 Frequency Stability Measurements

\$2.1055 \$27.54

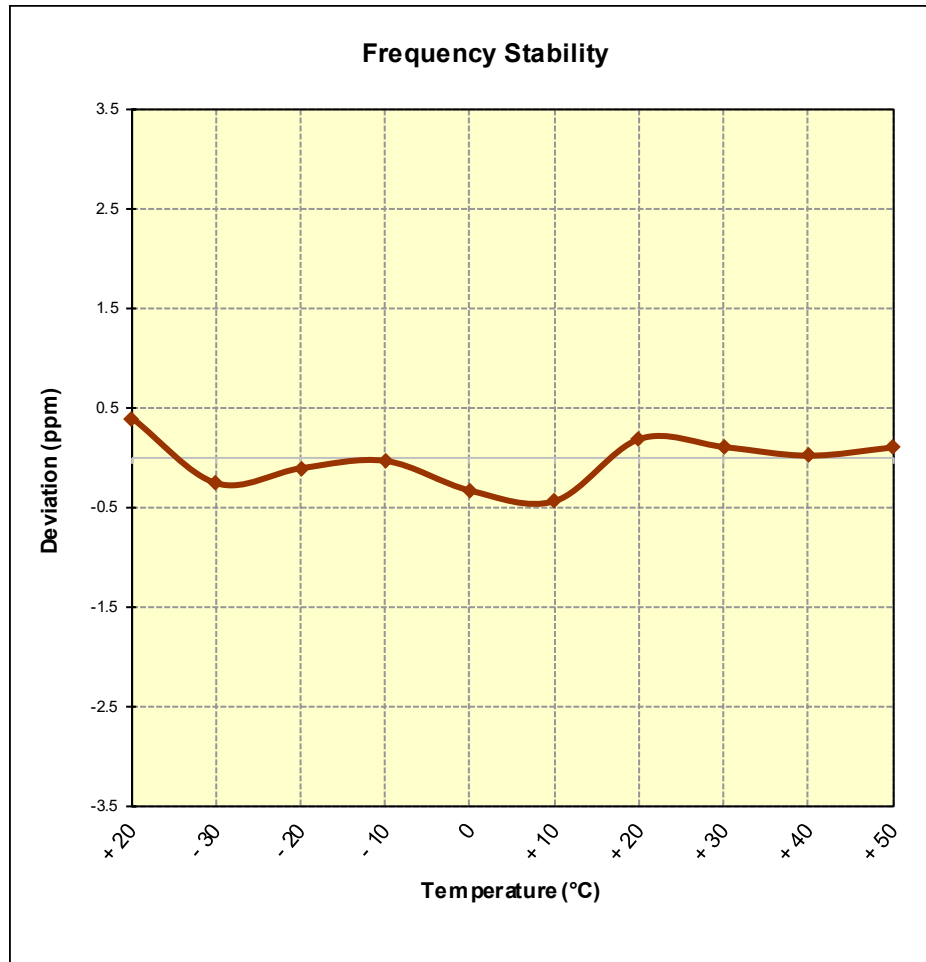


Figure 7-8. Frequency Stability Graph (Band 12)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset			Page 180 of 193

Band 5 Frequency Stability Measurements

\$2.1055 \$22.355

OPERATING FREQUENCY: 836,500,000 Hz
 CHANNEL: 20525
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,499,899	-101	-0.0000121
100 %		- 30	836,500,134	134	0.0000160
100 %		- 20	836,500,066	66	0.0000079
100 %		- 10	836,499,758	-242	-0.0000289
100 %		0	836,499,972	-28	-0.0000033
100 %		+ 10	836,499,987	-13	-0.0000016
100 %		+ 20	836,500,007	7	0.0000008
100 %		+ 30	836,499,975	-25	-0.0000030
100 %		+ 40	836,499,944	-56	-0.0000067
100 %		+ 50	836,500,030	30	0.0000036
BATT. ENDPOINT	3.45	+ 20	836,500,334	334	0.0000399

Table 7-38. Frequency Stability Data (Band 5)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 181 of 193	

Band 5 Frequency Stability Measurements

\$2.1055 \$22.355

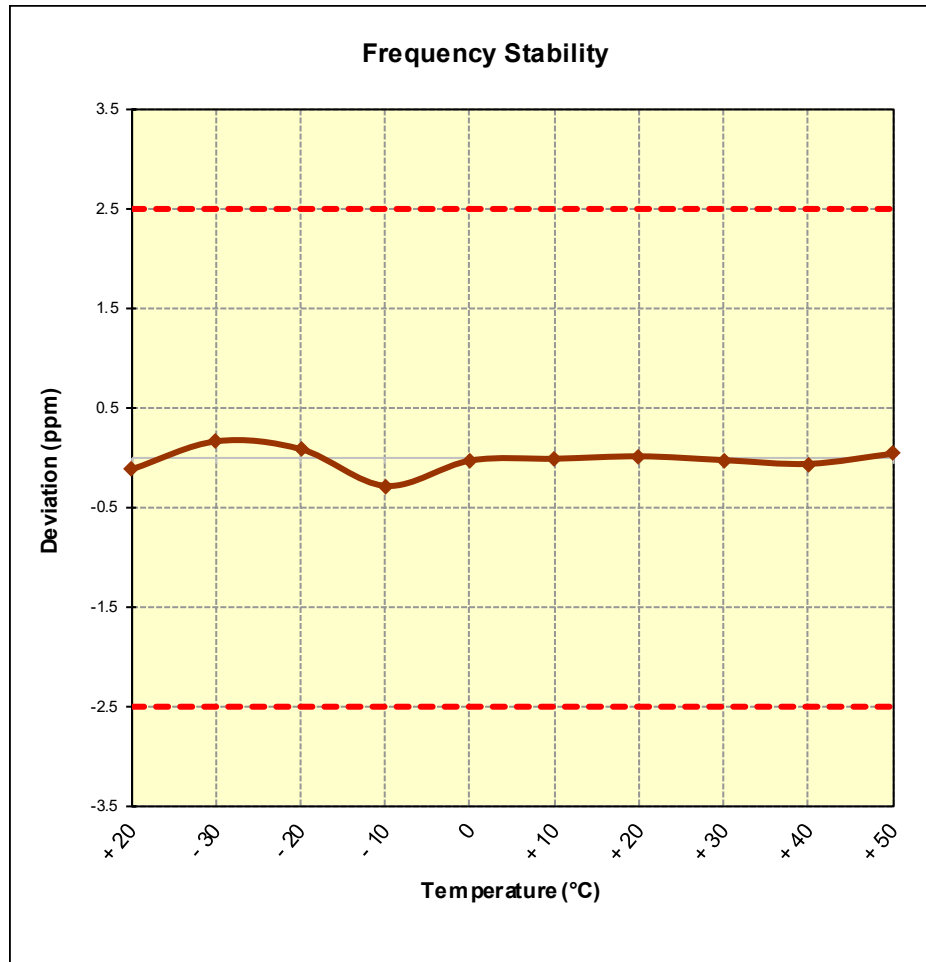


Figure 7-9. Frequency Stability Graph (Band 5)

FCC ID: A3LSMG892A			FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 182 of 193	

Band 4/66 Frequency Stability Measurements

\$2.1055 \$27.54

OPERATING FREQUENCY: 1,745,000,000 Hz
 CHANNEL: 132322
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,745,000,191	191	0.0000109
100 %		- 30	1,745,000,007	7	0.0000004
100 %		- 20	1,745,000,146	146	0.0000084
100 %		- 10	1,745,000,188	188	0.0000108
100 %		0	1,745,000,324	324	0.0000186
100 %		+ 10	1,744,999,975	-25	-0.0000014
100 %		+ 20	1,745,000,073	73	0.0000042
100 %		+ 30	1,745,000,190	190	0.0000109
100 %		+ 40	1,745,000,089	89	0.0000051
100 %		+ 50	1,745,000,185	185	0.0000106
BATT. ENDPOINT	3.45	+ 20	1,744,999,778	-222	-0.0000127

Table 7-39. Frequency Stability Data (Band 4/66)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 183 of 193	

Band 4/66 Frequency Stability Measurements
\$2.1055 \$27.54

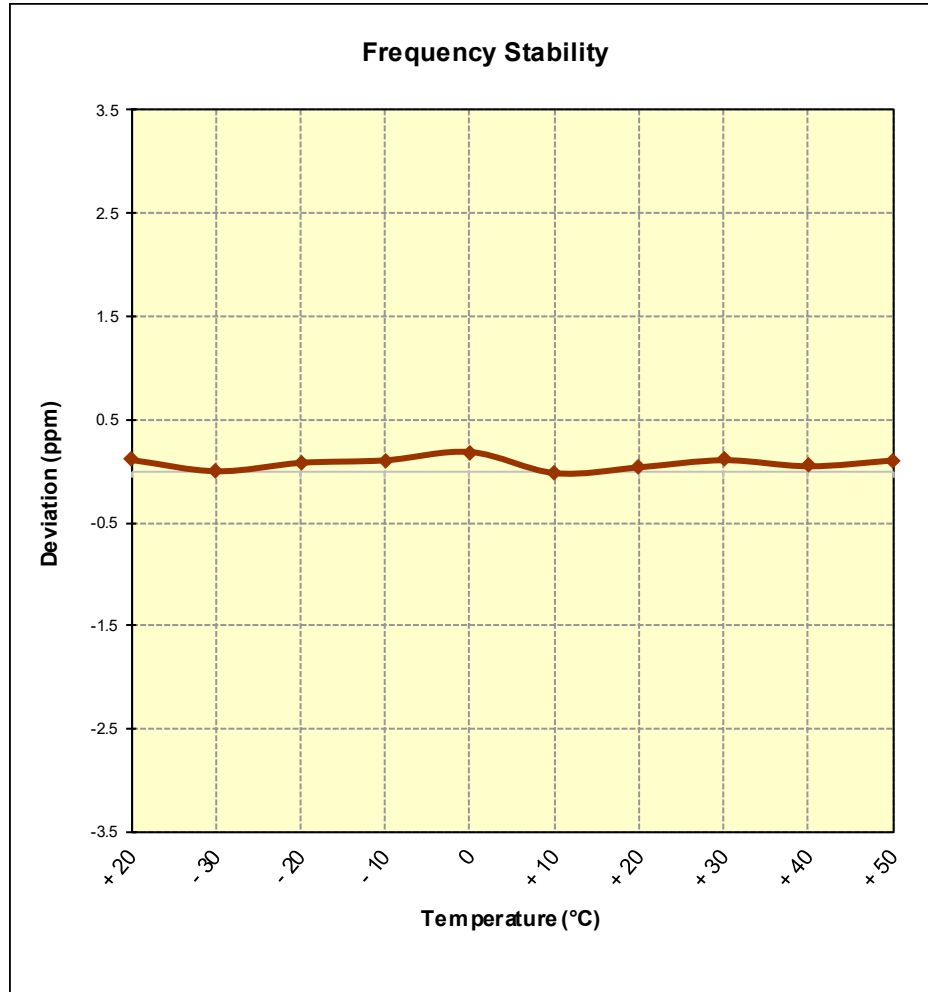


Figure 7-10. Frequency Stability Graph (Band 4/66)

FCC ID: A3LSMG892A	 FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 184 of 193	

Band 2 Frequency Stability Measurements

\$2.1055 \$24.235

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 18900
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,880,000,314	314	0.0000167
100 %		- 30	1,879,999,757	-243	-0.0000129
100 %		- 20	1,880,000,148	148	0.0000079
100 %		- 10	1,880,000,332	332	0.0000177
100 %		0	1,879,999,656	-344	-0.0000183
100 %		+ 10	1,879,999,659	-341	-0.0000181
100 %		+ 20	1,879,999,927	-73	-0.0000039
100 %		+ 30	1,879,999,970	-30	-0.0000016
100 %		+ 40	1,880,000,191	191	0.0000102
100 %		+ 50	1,879,999,970	-30	-0.0000016
BATT. ENDPOINT	3.45	+ 20	1,879,999,805	-195	-0.0000104

Table 7-40. Frequency Stability Data (Band 2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 185 of 193	

Band 2 Frequency Stability Measurements

§2.1055 §24.235

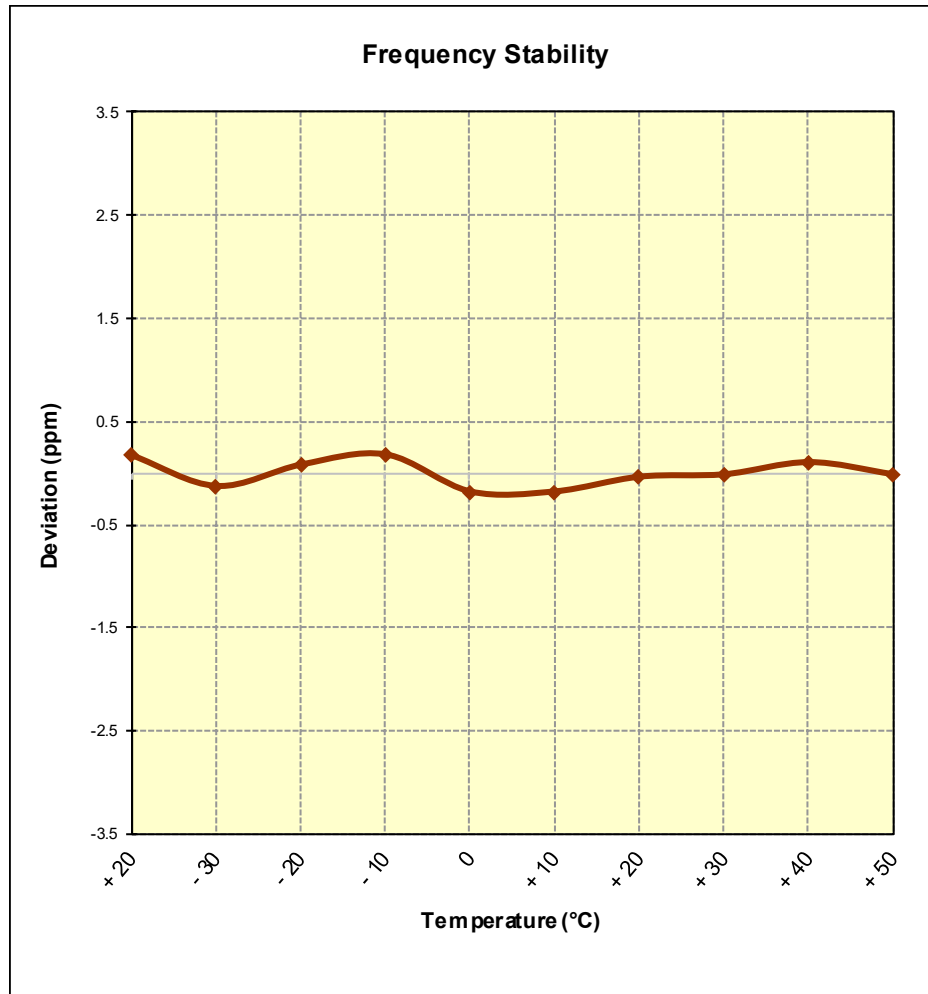


Figure 7-11. Frequency Stability Graph (Band 2)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset			Page 186 of 193

Band 30 Frequency Stability Measurements

§2.1055 §24.235

OPERATING FREQUENCY: 2,310,000,000 Hz
 CHANNEL: 27710
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	2,310,000,257	257	0.0000111
100 %		- 30	2,309,999,869	-131	-0.0000057
100 %		- 20	2,309,999,898	-102	-0.0000044
100 %		- 10	2,310,000,211	211	0.0000091
100 %		0	2,310,000,104	104	0.0000045
100 %		+ 10	2,309,999,713	-287	-0.0000124
100 %		+ 20	2,310,000,084	84	0.0000036
100 %		+ 30	2,310,000,043	43	0.0000019
100 %		+ 40	2,309,999,606	-394	-0.0000171
100 %		+ 50	2,310,000,090	90	0.0000039
BATT. ENDPOINT	3.45	+ 20	2,310,000,017	17	0.0000007

Table 7-41. Frequency Stability Data (Band 30)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 187 of 193	

Band 30 Frequency Stability Measurements

§2.1055 §24.235

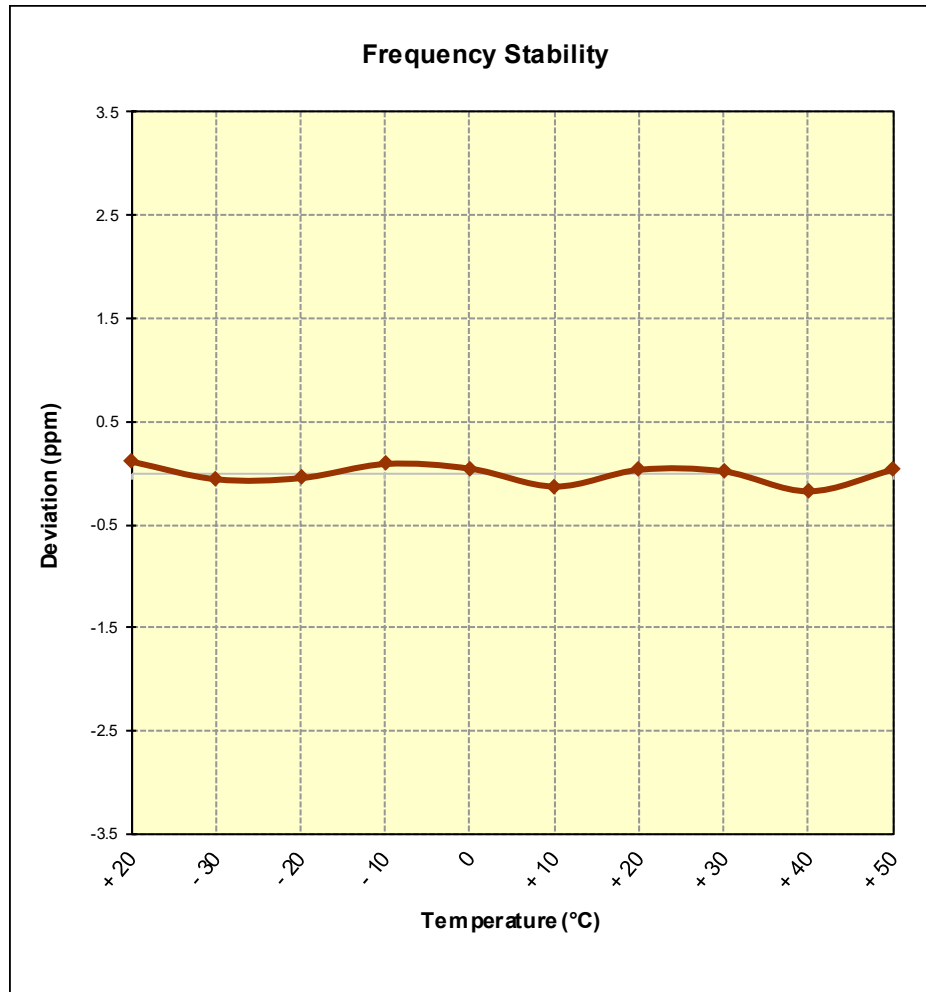


Figure 7-12. Frequency Stability Graph (Band 30)

FCC ID: A3LSMG892A			FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset			Page 188 of 193

Band 7 Frequency Stability Measurements

\$2.1055 \$27.54

OPERATING FREQUENCY: 2,535,000,000 Hz
 CHANNEL: 21100
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	2,534,999,909	-91	-0.0000036
100 %		- 30	2,534,999,880	-120	-0.0000047
100 %		- 20	2,535,000,163	163	0.0000064
100 %		- 10	2,535,000,152	152	0.0000060
100 %		0	2,535,000,088	88	0.0000035
100 %		+ 10	2,535,000,173	173	0.0000068
100 %		+ 20	2,535,000,059	59	0.0000023
100 %		+ 30	2,534,999,901	-99	-0.0000039
100 %		+ 40	2,534,999,665	-335	-0.0000132
100 %		+ 50	2,534,999,935	-65	-0.0000026
BATT. ENDPOINT		+ 20	2,535,000,073	73	0.0000029

Table 7-42. Frequency Stability Data (Band 7)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 189 of 193	

Band 7 Frequency Stability Measurements

\$2.1055 \$27.54

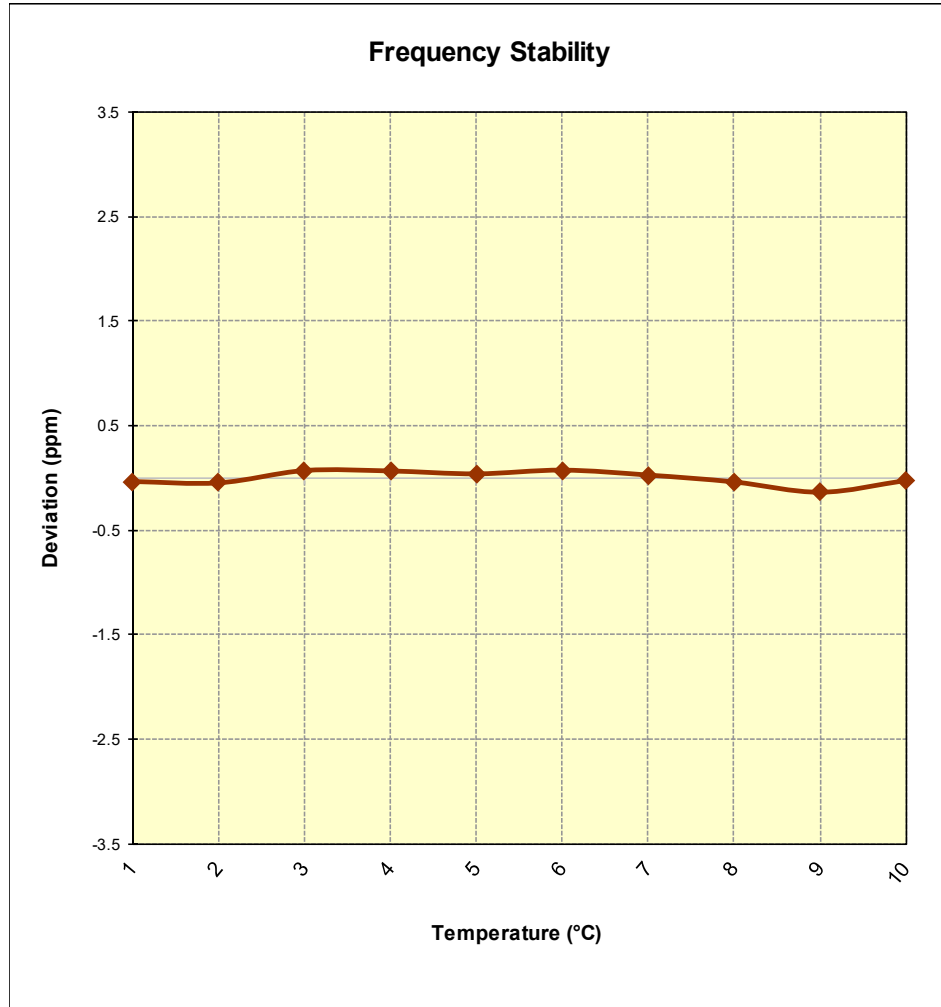


Figure 7-13. Frequency Stability Graph (Band 7)

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset			Page 190 of 193

Band 41 Frequency Stability Measurements

\$2.1055 \$27.54

OPERATING FREQUENCY: 2,593,000,000 Hz
 CHANNEL: 40620
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	2,592,999,976	-24	-0.0000009
100 %		- 30	2,592,999,931	-69	-0.0000027
100 %		- 20	2,592,999,979	-21	-0.0000008
100 %		- 10	2,592,999,980	-20	-0.0000008
100 %		0	2,592,999,781	-219	-0.0000084
100 %		+ 10	2,592,999,718	-282	-0.0000109
100 %		+ 20	2,592,999,669	-331	-0.0000128
100 %		+ 30	2,592,999,941	-59	-0.0000023
100 %		+ 40	2,592,999,821	-179	-0.0000069
100 %		+ 50	2,592,999,754	-246	-0.0000095
BATT. ENDPOINT	3.45	+ 20	2,592,999,732	-268	-0.0000103

Table 7-43. Frequency Stability Data (Band 41)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 191 of 193	

Band 41 Frequency Stability Measurements

\$2.1055 \$27.54

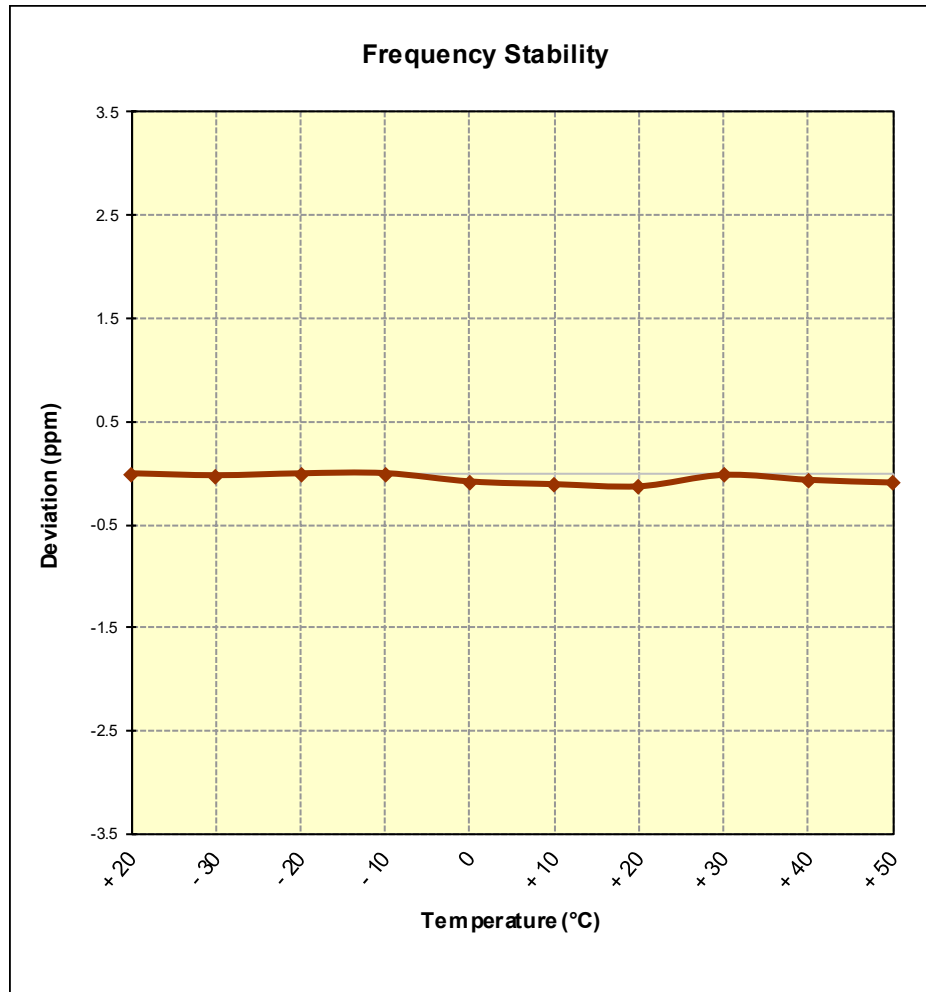


Figure 7-14. Frequency Stability Graph (Band 41)

FCC ID: A3LSMG892A			FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset	Page 192 of 193	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMG892A** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules for LTE operation only.

FCC ID: A3LSMG892A		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1704170147-03.A3L	Test Dates: 4/17-6/26/2017	EUT Type: Portable Handset			Page 193 of 193