

FCC DTS REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

August 29, 2018

Address:

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-1808-FC042**FCC ID:** A3LSMJ610F**APPLICANT:** SAMSUNG Electronics Co., Ltd.**Model:** SM-J610F/DS**Additional Model:** SM-J610F, SM-J415F/DS, SM-J415F**EUT Type:** Mobile Phone**Average Output Power:**
802.11b : 16.02 dBm
802.11g : 14.49 dBm
802.11n(HT20) : 15.52 dBm**Frequency Range:** 2412 MHz - 2462 MHz**Modulation type:** CCK/DSSS/OFDM**FCC Classification:** Digital Transmission System(DTS)**FCC Rule Part(s):** Part 15.247**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

**Report prepared by : Kwon Jeong**
Engineer of Telecommunication testing center**Approved by : Jong Seok Lee**
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1808-FC042	August 29, 2018	- First Approval Report

Table of Contents

1. EUT DESCRIPTION	4
2. TEST METHODOLOGY	5
EUT CONFIGURATION	5
EUT EXERCISE	5
GENERAL TEST PROCEDURES	5
DESCRIPTION OF TEST MODES	5
3. INSTRUMENT CALIBRATION.....	6
4. FACILITIES AND ACCREDITATIONS	6
FACILITIES	6
EQUIPMENT	6
5. ANTENNA REQUIREMENTS	6
6. MEASUREMENT UNCERTAINTY	7
7. DESCRIPTION OF TESTS	8
8. SUMMARY TEST OF RESULTS	22
9. TEST RESULT	23
9.1 DUTY CYCLE.....	23
9.2 6dB BANDWIDTH.....	24
9.3 OUTPUT POWER	27
9.4 POWER SPECTRAL DENSITY	33
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	36
9.6 RADIATED SPURIOUS EMISSIONS	50
9.7 RADIATED RESTRICTED BAND EDGES	60
9.8 POWERLINE CONDUCTED EMISSIONS	67
9.9 CONFIRMATION OF GEO-LOCATION MECHANISM	71
10. LIST OF TEST EQUIPMENT	74
11. ANNEX A_ TEST SETUP PHOTO	76

1. EUT DESCRIPTION

Model	SM-J610F/DS
Additional Model	SM-J610F, SM-J415F/DS, SM-J415F
EUT Type	Mobile Phone
Power Supply	DC 3.80 V
Battery Information	Model: EB-BG610ABE Type: Li-ion Battery
Travel Adapter Information	Model : ETA0U84IWE Manufacture: SAMSUNG
Frequency Range	2412 MHz - 2462 MHz
Max. RF Output Power	<u>Peak Power</u> 802.11b : 19.40 dBm 802.11g : 23.93 dBm 802.11n(HT20) : 24.31 dBm <u>Average Power</u> 802.11b : 16.02 dBm 802.11g : 14.49 dBm 802.11n(HT20) : 15.52 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n
Number of Channels	11 Channels
Antenna Specification	Antenna type: LDS / PIFA (Planar Inverted F Antenna) Peak Gain : -0.51 dBi
Date(s) of Tests	August 10, 2018~ August 28, 2018

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05 dated August 24, 2018 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

See Section from 8.3.(KDB 558074 v05)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

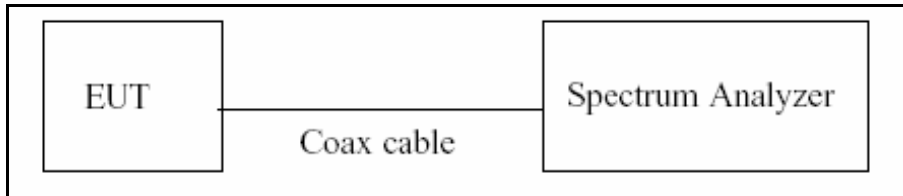

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05, Procedure 11.8.1 in ANSI 63.10-2013)


- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 8.3.1.3 in KDB 558074 v05, Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.
- Average Power (Procedure 8.3.2.3 in KDB 558074 v05, Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05, Procedure 11.10.2 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
 - 2) Span = 1.5 times the DTS channel bandwidth.
 - 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
 - 4) $VBW \geq 3 \times RBW$.
 - 5) Sweep = auto couple
 - 6) Detector = peak
 - 7) Trace Mode = max hold
 - 8) Allow trace to fully stabilize.
 - 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times \text{Span} / \text{RBW}$
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	11.30
100	9.83
200	10.19
300	10.13
400	10.23
500	10.25
600	10.32
700	10.35
800	10.35
900	10.34
1000	10.39
2000	10.64
2400*	10.65
2500*	10.67
3000	10.68
4000	10.89
5000	11.07
6000	11.06
7000	11.35
8000	11.32
9000	11.48
10000	11.56
11000	11.56
12000	11.68
13000	11.83
14000	11.90
15000	11.98
16000	12.04
17000	12.02
18000	12.08
19000	12.07
20000	12.14
21000	12.17
22000	12.31
23000	12.60
24000	12.34
25000	12.53
26000	12.02

Note : 1. '*' is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

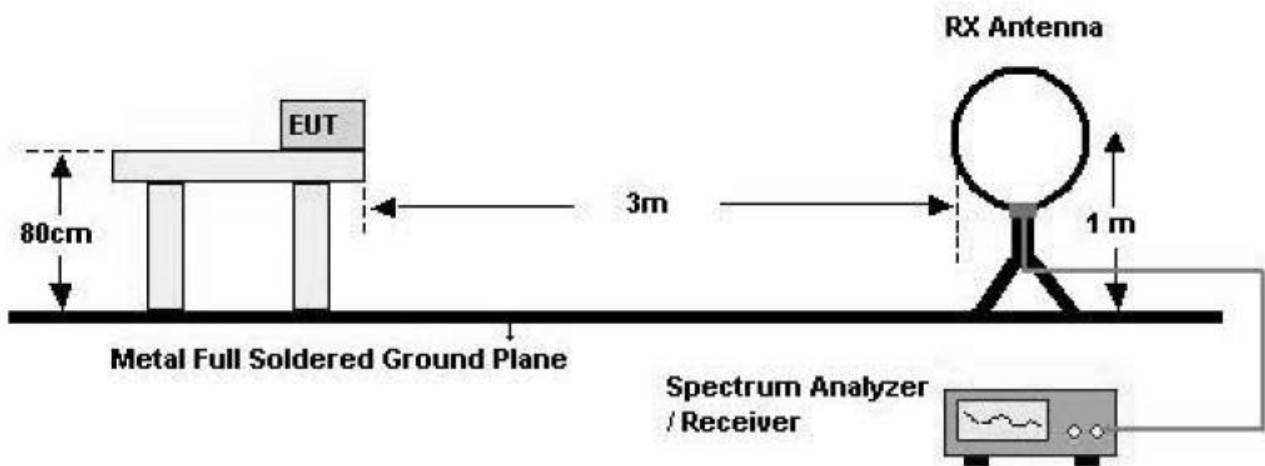

30 MHz - 1 GHz

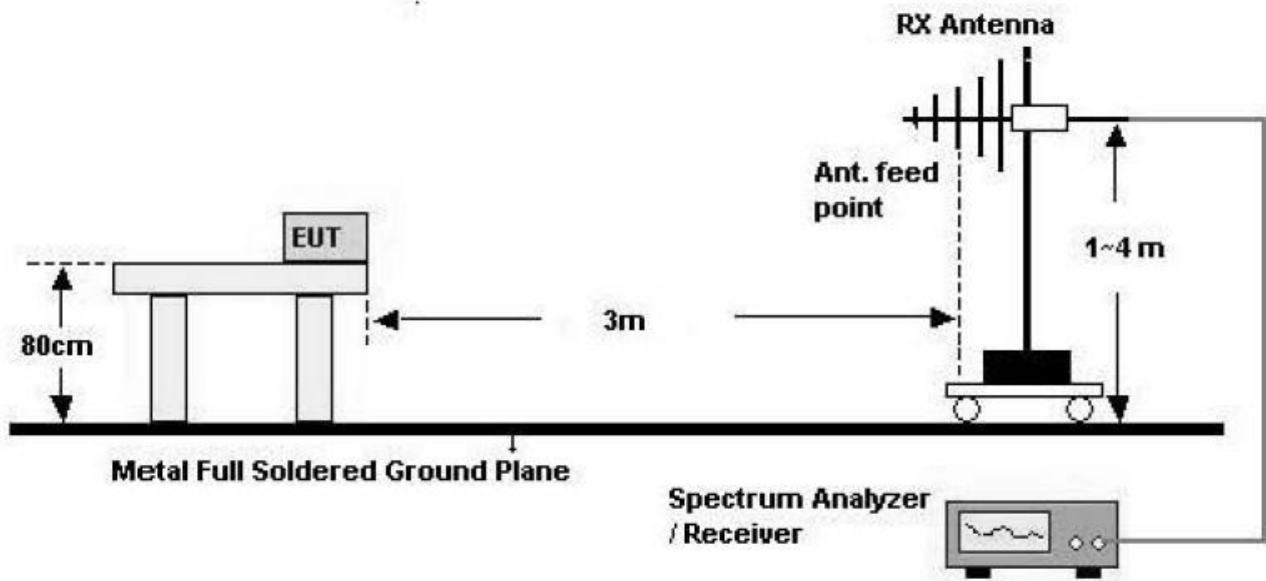

Above 1 GHz

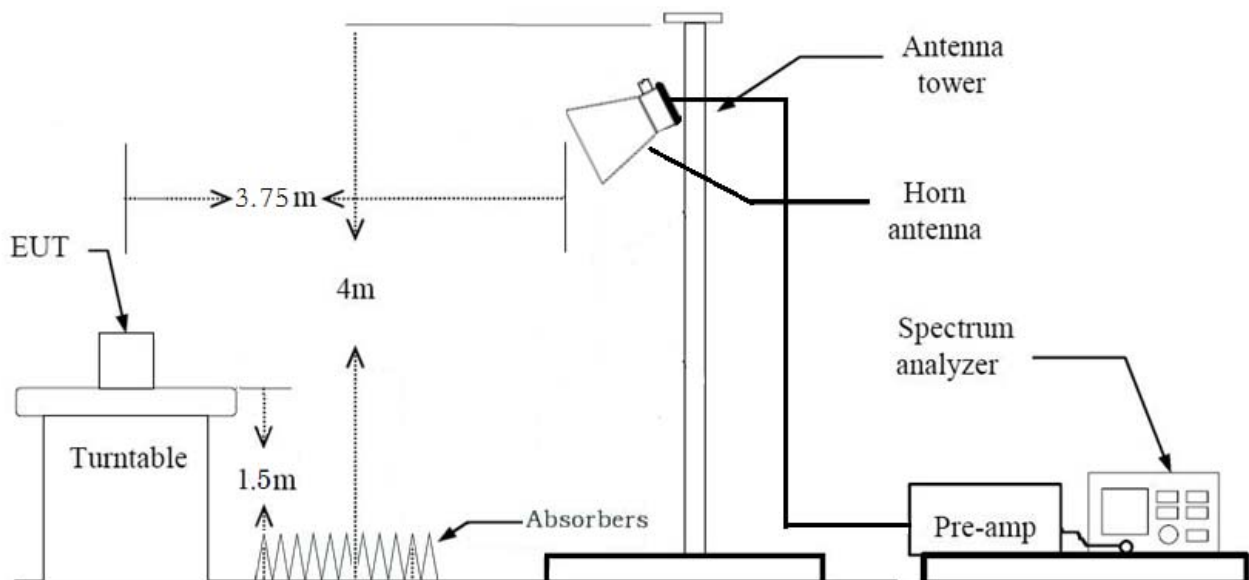

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log (\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \cdot \text{RBW}$
 - (2) Measurement Type(Average): Duty cycle $\geq 98\%$
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (i.e., RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \cdot \text{RBW}$
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (i.e., RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log (\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq$ 3*RBW
 - (2) Measurement Type(Average): Duty cycle $\geq$ 98%,
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (i.e., RMS)
 - RBW = 1 MHz
 - VBW $\geq$ 3*RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (i.e., RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + external accessories(earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : Z
3. Duty cycle factor applies only 802.11g/n(Duty cycle < 98%).
4. All data rate of operation were investigated and the test results are worst case in lowest datarate of each mode.
 - 802.11b : 1Mbps
 - 802.11g : 6Mbps
 - 802.11n : MCS0
5. SM-J610F/DS & Additional Models were tested and the worst case results are reported.
(Worst case : SM-J610F/DS)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone+Earphone+Travel Adapter, Stand alone+Travel Adapter
 - Worstcase : Stand alone+Travel Adapter
2. SM-J610F/DS & Additional Models were tested and the worst case results are reported.
(Worst case : SM-J610F/DS)

Conducted test

1. The EUT was configured with data rate of highest power.
2. SM-J610F/DS & Additional Models were tested and the worst case results are reported.
(Worst case : SM-J610F/DS)

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		N/A
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

9. TEST RESULT

9.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.400	8.520	0.98591549	0.062
	2	4.215	4.305	0.97909408	0.092
	5.5	1.590	1.687	0.94250148	0.257
	11	0.843	0.941	0.89585547	0.478
802.11g	6	1.394	1.492	0.93431635	0.295
	9	0.941	1.040	0.90480769	0.434
	12	0.708	0.807	0.87732342	0.568
	18	0.480	0.579	0.82901554	0.814
	24	0.363	0.462	0.78571429	1.047
	36	0.252	0.351	0.71794872	1.439
	48	0.192	0.290	0.66206897	1.791
	54	0.176	0.274	0.64233577	1.922
802.11n (HT20)	6.5 (MCS0)	1.296	1.394	0.92969871	0.317
	13 (MCS1)	0.655	0.753	0.86985392	0.606
	19.5 (MCS2)	0.448	0.546	0.82051282	0.859
	26 (MCS3)	0.344	0.442	0.77828054	1.089
	39 (MCS4)	0.236	0.334	0.70658683	1.508
	52 (MCS5)	0.184	0.282	0.65248227	1.854
	58.5 (MCS6)	0.168	0.266	0.63157895	1.996
	65 (MCS7)	0.152	0.250	0.60800000	2.161

9.2 6dB BANDWIDTH


802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	8.100	0.5
2417	2	8.550	0.5
2437	6	8.072	0.5
2457	10	8.093	0.5
2462	11	8.564	0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.42	0.5
2417	2	16.39	0.5
2437	6	16.47	0.5
2457	10	16.42	0.5
2462	11	16.42	0.5


802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.63	0.5
2417	2	17.62	0.5
2437	6	17.63	0.5
2457	10	17.63	0.5
2462	11	17.60	0.5

Test Plots


6dB Bandwidth plot (802.11b-CH 6)

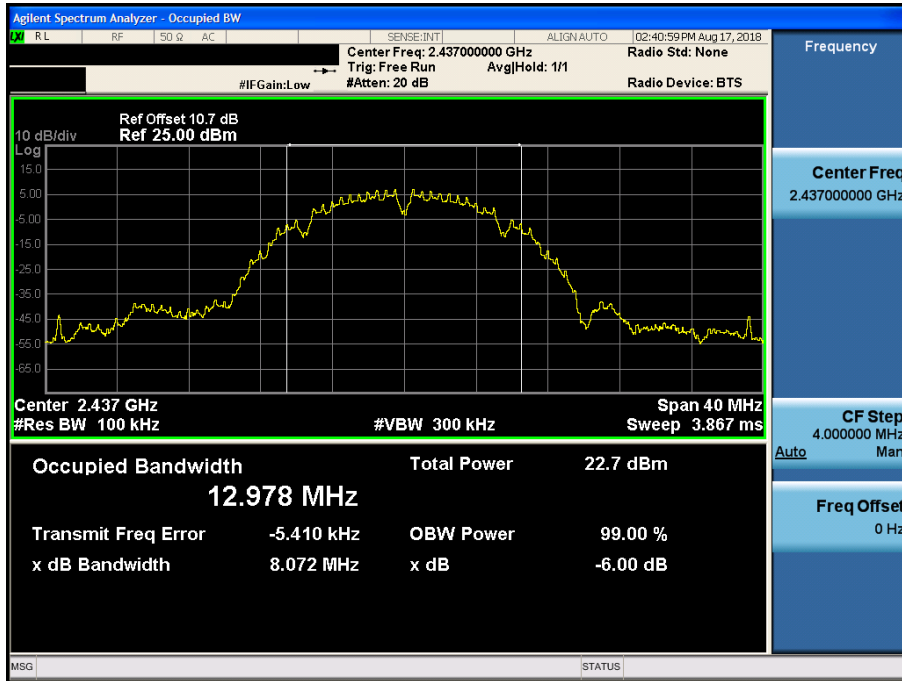

6dB Bandwidth plot (802.11g-CH 2)

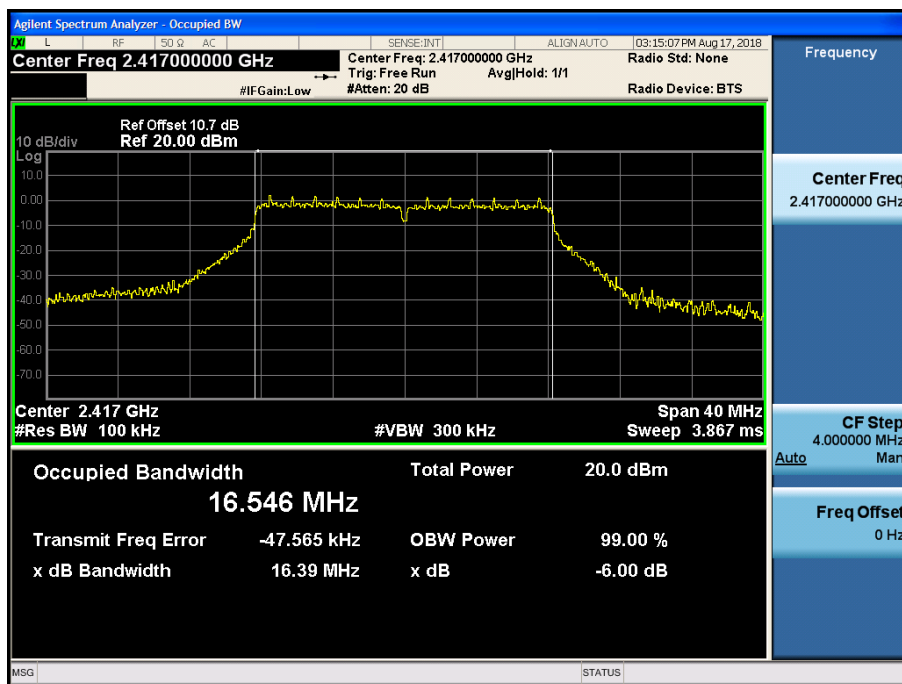

6dB Bandwidth plot (802.11n_HT20-CH 11)

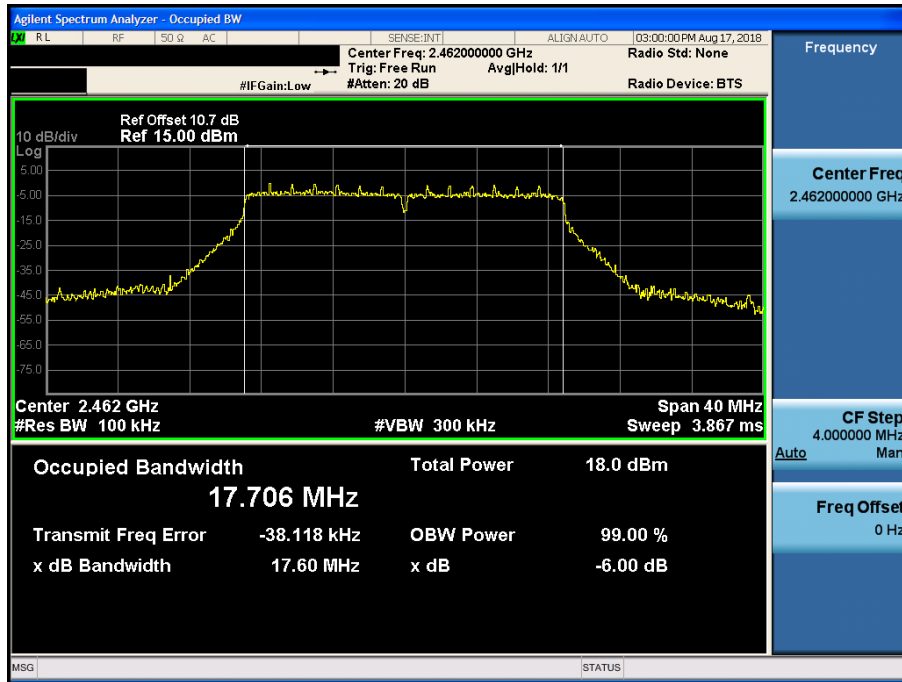
Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 10.7 dB is offset for 2.4 GHz Band.

802.11b Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Limit [dBm]
Frequency [MHz]	Channel No.				
2412	1	16	1	19.14	30
			2	19.35	30
			5.5	19.40	30
			11	19.21	30
2417	2	15	1	18.50	30
			2	18.44	30
			5.5	18.51	30
			11	18.50	30
2437	6	15	1	18.56	30
			2	18.42	30
			5.5	18.51	30
			11	18.59	30
2457	10	15	1	18.61	30
			2	18.58	30
			5.5	18.62	30
			11	18.67	30
2462	11	14	1	17.22	30
			2	17.24	30
			5.5	17.26	30
			11	17.40	30

802.11g Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Limit [dBm]
Frequency[M Hz]	Channel No.				
2412	1	10	6	20.93	30
			9	20.51	30
			12	21.52	30
			18	21.19	30
			24	21.16	30
			36	21.12	30
			48	21.01	30
			54	21.09	30
2417	2	13	6	23.00	30
			9	22.98	30
			12	23.03	30
			18	23.48	30
			24	23.30	30
			36	23.23	30
			48	23.33	30
			54	23.37	30
2437	6	14	6	23.75	30
			9	23.65	30
			12	23.86	30
			18	23.93	30
			24	23.84	30
			36	23.90	30
			48	23.81	30
			54	23.85	30
2457	10	14	6	23.45	30
			9	23.59	30
			12	23.84	30
			18	23.61	30
			24	23.75	30
			36	23.62	30
			48	23.81	30
			54	23.74	30
2462	11	12	6	22.49	30
			9	22.49	30
			12	22.89	30
			18	22.78	30
			24	22.85	30
			36	22.48	30
			48	22.54	30
			54	22.78	30

802.11n Mode		Power Level Setting	MCS Index	Measured Power[dBm]	Limit [dBm]
Frequency[M Hz]	Channel No.				
2412	1	9	0	20.78	30
			1	20.64	30
			2	21.54	30
			3	20.92	30
			4	20.67	30
			5	20.86	30
			6	20.53	30
			7	20.56	30
2417	2	12	0	22.28	30
			1	22.70	30
			2	22.80	30
			3	22.69	30
			4	22.97	30
			5	23.03	30
			6	22.65	30
			7	22.95	30
2437	6	15	0	24.14	30
			1	24.13	30
			2	24.09	30
			3	24.06	30
			4	24.08	30
			5	24.06	30
			6	24.31	30
			7	24.15	30
2457	10	14	0	23.68	30
			1	23.62	30
			2	23.67	30
			3	23.61	30
			4	23.98	30
			5	23.78	30
			6	23.90	30
			7	23.72	30
2462	11	11	0	21.52	30
			1	21.63	30
			2	21.97	30
			3	21.93	30
			4	21.96	30
			5	21.52	30
			6	22.12	30
			7	22.38	30

Average Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 10.7 dB is offset for 2.4 GHz Band.

802.11b Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	16	1	15.80	0.062	15.86	30
			2	15.90	0.092	15.99	30
			5.5	15.76	0.257	16.02	30
			11	15.42	0.478	15.90	30
2417	2	15	1	15.10	0.062	15.16	30
			2	14.94	0.092	15.03	30
			5.5	14.83	0.257	15.09	30
			11	14.68	0.478	15.16	30
2437	6	15	1	15.38	0.062	15.44	30
			2	15.07	0.092	15.16	30
			5.5	14.92	0.257	15.18	30
			11	14.98	0.478	15.46	30
2457	10	15	1	15.18	0.062	15.24	30
			2	15.25	0.092	15.34	30
			5.5	15.12	0.257	15.38	30
			11	14.98	0.478	15.46	30
2462	11	14	1	14.11	0.062	14.17	30
			2	13.94	0.092	14.03	30
			5.5	13.86	0.257	14.12	30
			11	13.62	0.478	14.10	30

802.11g Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	10	6	9.25	0.295	9.55	30
			9	9.07	0.434	9.50	30
			12	8.95	0.568	9.52	30
			18	8.75	0.814	9.56	30
			24	8.56	1.047	9.61	30
			36	8.22	1.439	9.66	30
			48	7.90	1.791	9.69	30
			54	7.78	1.922	9.70	30
2417	2	13	6	12.53	0.295	12.83	30
			9	12.43	0.434	12.86	30
			12	12.30	0.568	12.87	30
			18	12.10	0.814	12.91	30
			24	11.92	1.047	12.97	30
			36	11.60	1.439	13.04	30
			48	11.30	1.791	13.09	30
			54	11.19	1.922	13.11	30
2437	6	14	6	13.74	0.295	14.04	30
			9	13.70	0.434	14.13	30
			12	13.59	0.568	14.16	30
			18	13.40	0.814	14.21	30
			24	13.18	1.047	14.23	30
			36	12.85	1.439	14.29	30
			48	12.54	1.791	14.33	30
			54	12.44	1.922	14.36	30
2457	10	14	6	13.54	0.295	13.84	30
			9	13.85	0.434	14.28	30
			12	13.78	0.568	14.35	30
			18	13.58	0.814	14.39	30
			24	13.33	1.047	14.38	30
			36	12.97	1.439	14.41	30
			48	12.44	1.791	14.23	30
			54	12.57	1.922	14.49	30
2462	11	12	6	11.35	0.295	11.65	30
			9	11.55	0.434	11.98	30
			12	11.41	0.568	11.98	30
			18	11.26	0.814	12.07	30
			24	11.06	1.047	12.11	30
			36	10.55	1.439	11.99	30
			48	10.38	1.791	12.17	30
			54	10.30	1.922	12.22	30

802.11n Mode		Power Level Setting	MCS Index	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	9	0	8.95	0.317	9.27	30
			1	8.73	0.606	9.34	30
			2	8.59	0.859	9.45	30
			3	8.33	1.089	9.42	30
			4	7.96	1.508	9.47	30
			5	7.62	1.854	9.47	30
			6	7.54	1.996	9.54	30
			7	7.40	2.161	9.56	30
2417	2	12	0	11.40	0.317	11.72	30
			1	11.43	0.606	12.04	30
			2	11.17	0.859	12.03	30
			3	10.93	1.089	12.02	30
			4	10.61	1.508	12.12	30
			5	10.30	1.854	12.15	30
			6	10.21	1.996	12.21	30
			7	10.05	2.161	12.21	30
2437	6	15	0	14.69	0.317	15.01	30
			1	14.67	0.606	15.28	30
			2	14.52	0.859	15.38	30
			3	14.28	1.089	15.37	30
			4	13.93	1.508	15.44	30
			5	13.63	1.854	15.48	30
			6	13.50	1.996	15.50	30
			7	13.36	2.161	15.52	30
2457	10	14	0	13.88	0.317	14.20	30
			1	13.68	0.606	14.29	30
			2	13.45	0.859	14.31	30
			3	13.23	1.089	14.32	30
			4	12.84	1.508	14.35	30
			5	12.57	1.854	14.42	30
			6	12.45	1.996	14.45	30
			7	12.31	2.161	14.47	30
2462	11	11	0	10.55	0.317	10.87	30
			1	10.37	0.606	10.98	30
			2	10.15	0.859	11.01	30
			3	9.92	1.089	11.01	30
			4	9.56	1.508	11.07	30
			5	9.24	1.854	11.09	30
			6	9.14	1.996	11.14	30
			7	9.00	2.161	11.16	30

9.4 POWER SPECTRAL DENSITY


Mode	Frequency (MHz)	Channel No.	Test Result	
			PSD (dBm)	Limit (dBm)
802.11b	2412	1	-7.369	8
	2417	2	-7.259	8
	2437	6	-7.902	8
	2457	10	-7.271	8
	2462	11	-7.532	8
802.11g	2412	1	-16.890	8
	2417	2	-12.905	8
	2437	6	-12.457	8
	2457	10	-11.645	8
	2462	11	-12.489	8
802.11n (HT20)	2412	1	-16.813	8
	2417	2	-13.879	8
	2437	6	-10.720	8
	2457	10	-12.551	8
	2462	11	-15.044	8

Note :


- Spectrum reading values are not plot data.
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
- Spectrum offset = Attenuator loss + Cable loss
- We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 10.7 dB is offset for 2.4 GHz Band.

Test Plots


Power Spectral Density (802.11b-CH 2)

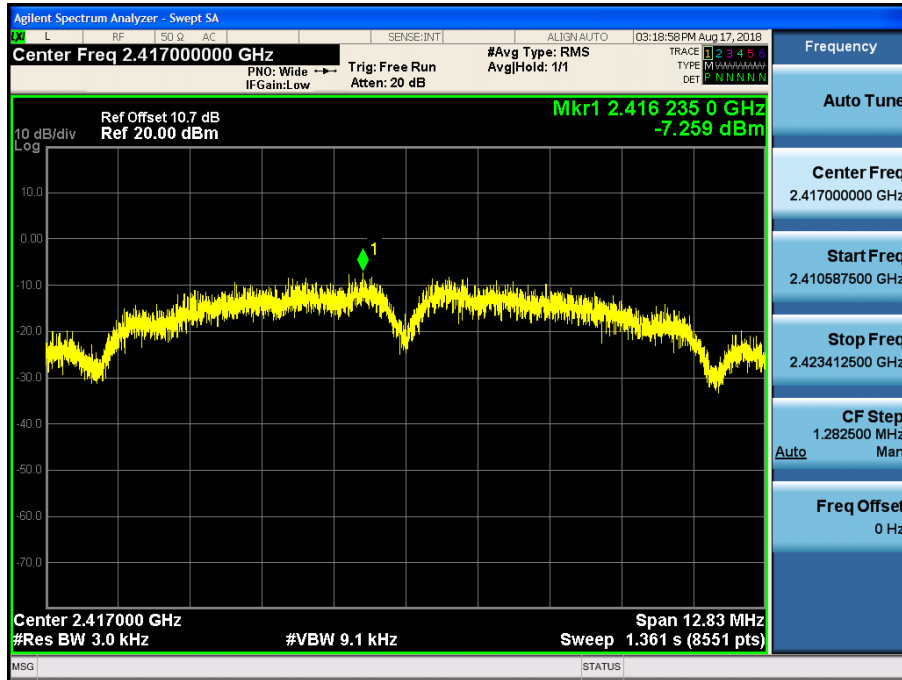

Power Spectral Density (802.11g-CH 10)

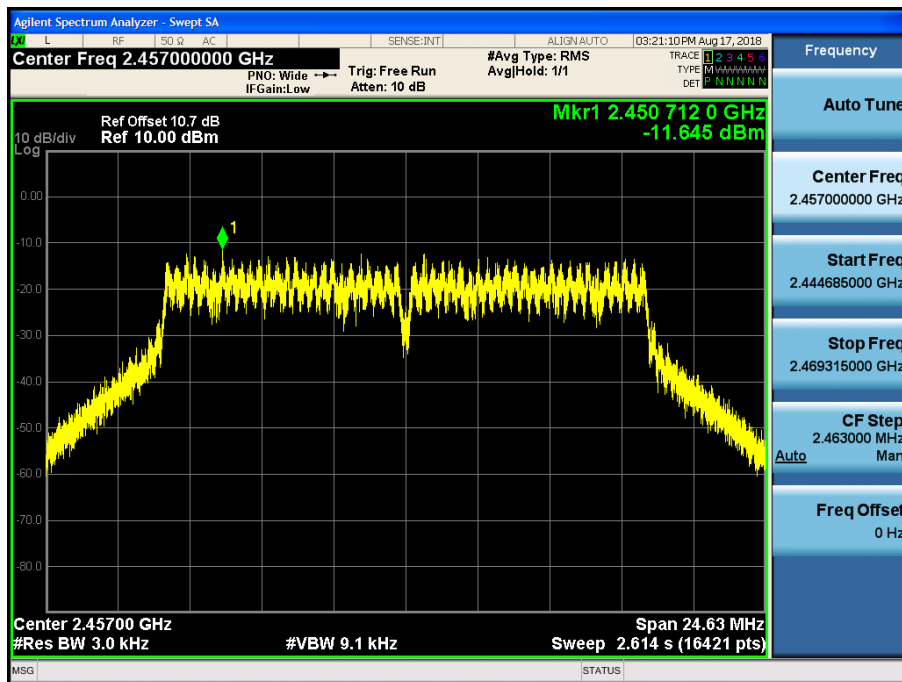

Power Spectral Density (802.11n_HT20 -CH 6)

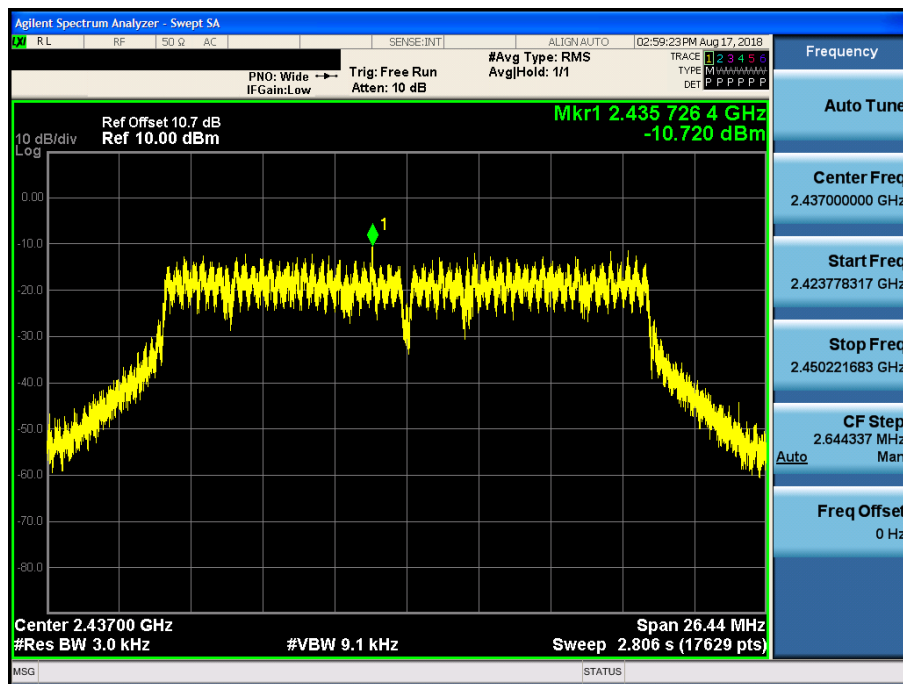

Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.


9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

Test Plots(BandEdge)

Band Edge (802.11b-CH1)

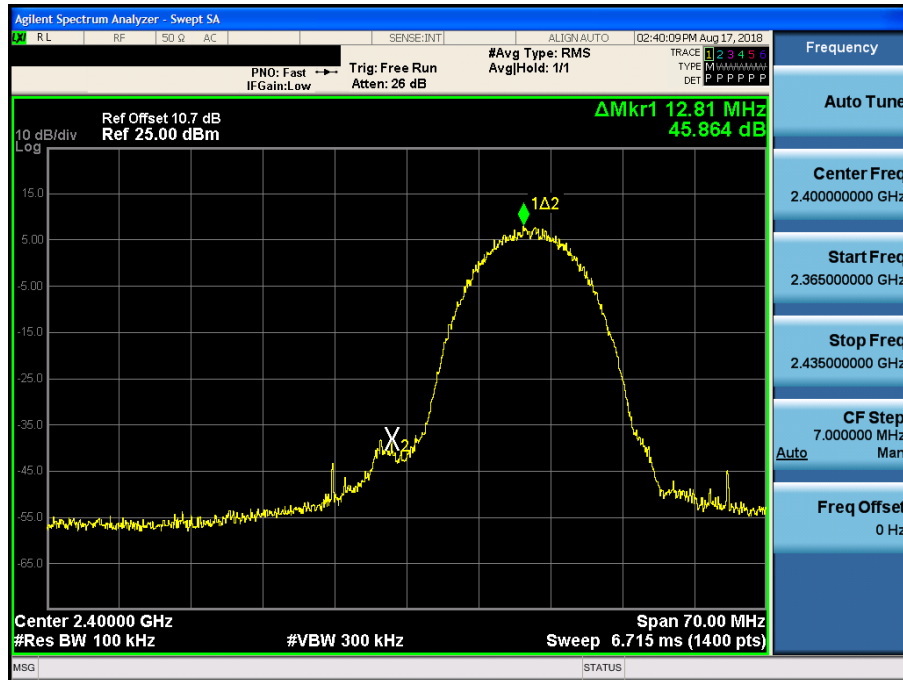

Band Edge (802.11b-CH2)



Band Edge (802.11b-CH10)



Band Edge (802.11b-CH11)



Band Edge (802.11g-CH1)




Band Edge (802.11g-CH2)



Band Edge (802.11g-CH10)



Band Edge (802.11g-CH11)

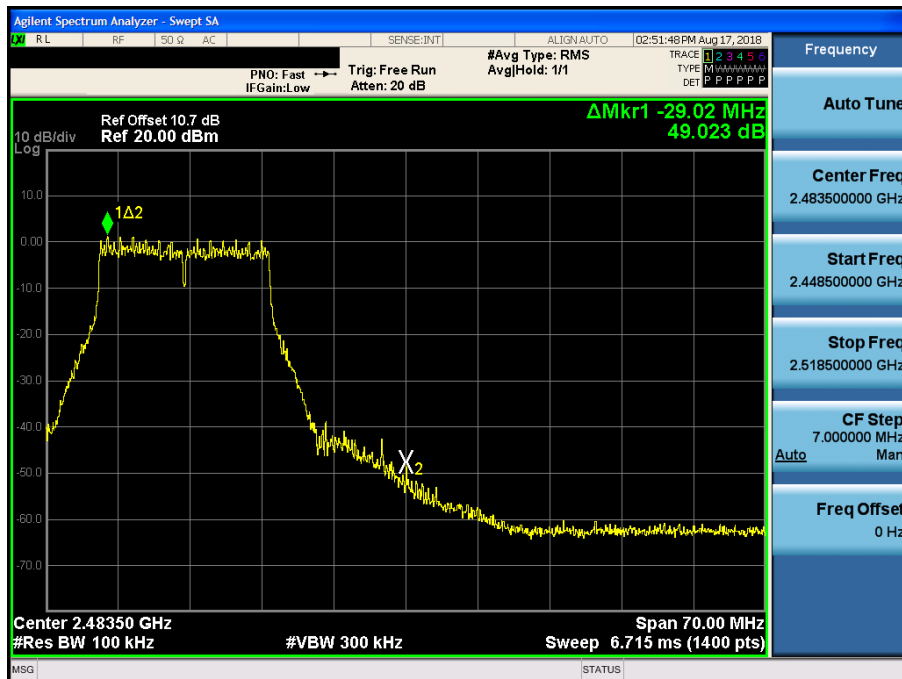

Band Edge (802.11n_HT20-CH1)




Band Edge (802.11n_HT20-CH2)



Band Edge (802.11n_HT20-CH10)




Band Edge (802.11n_HT20-CH11)

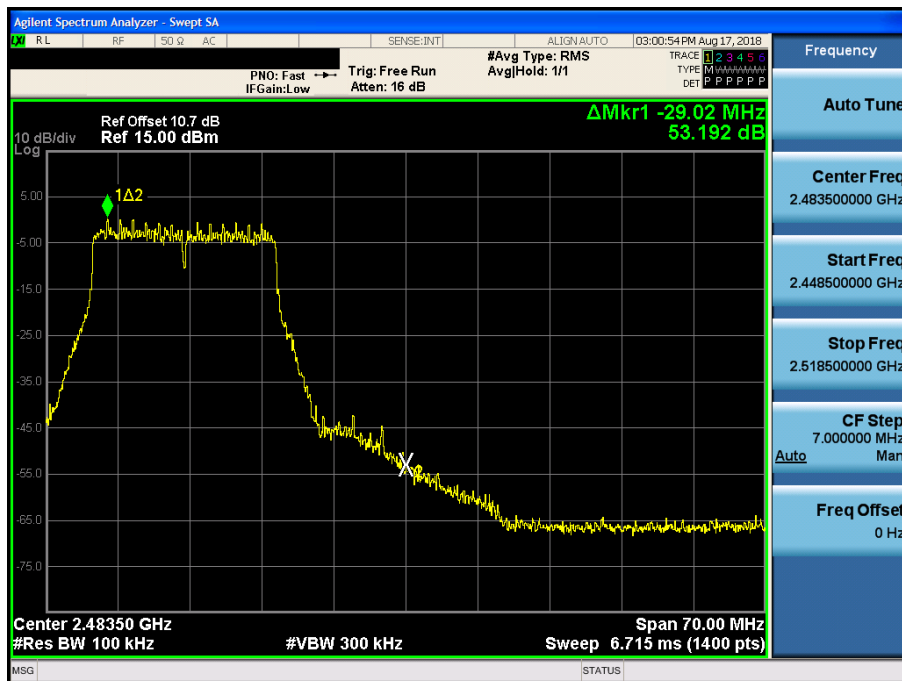

Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

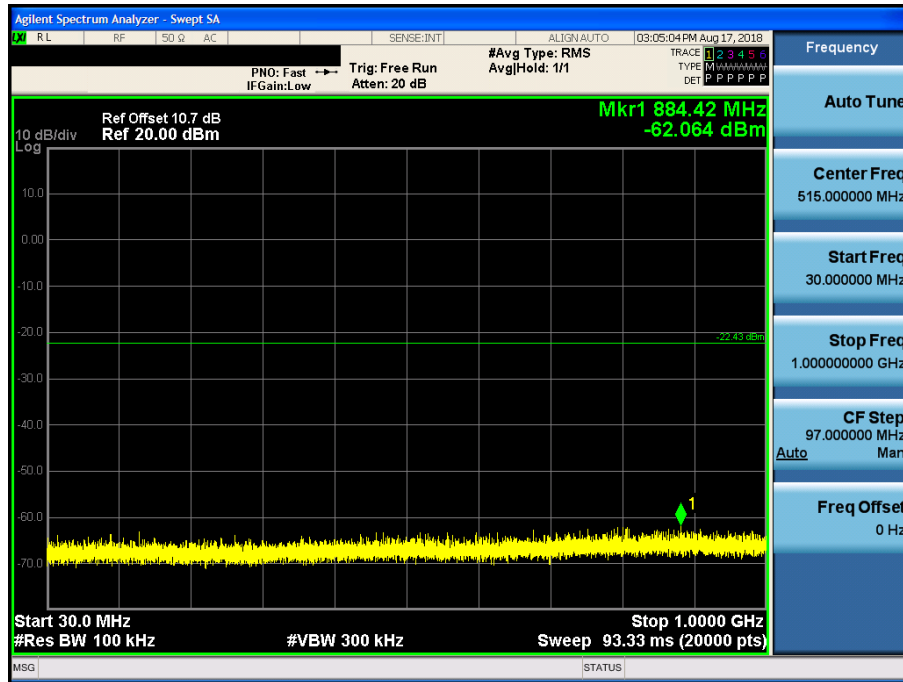


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

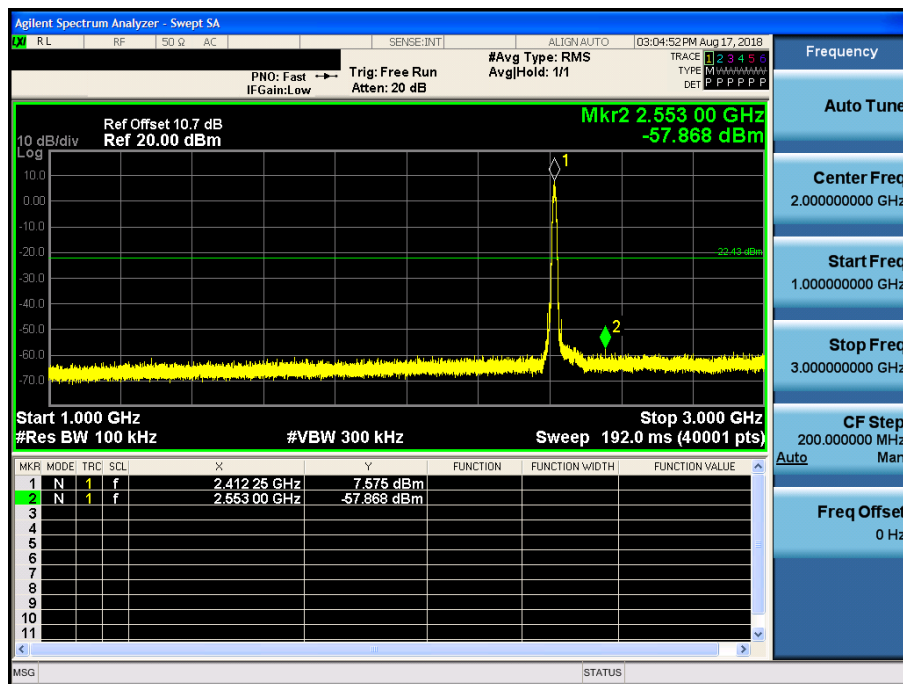


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

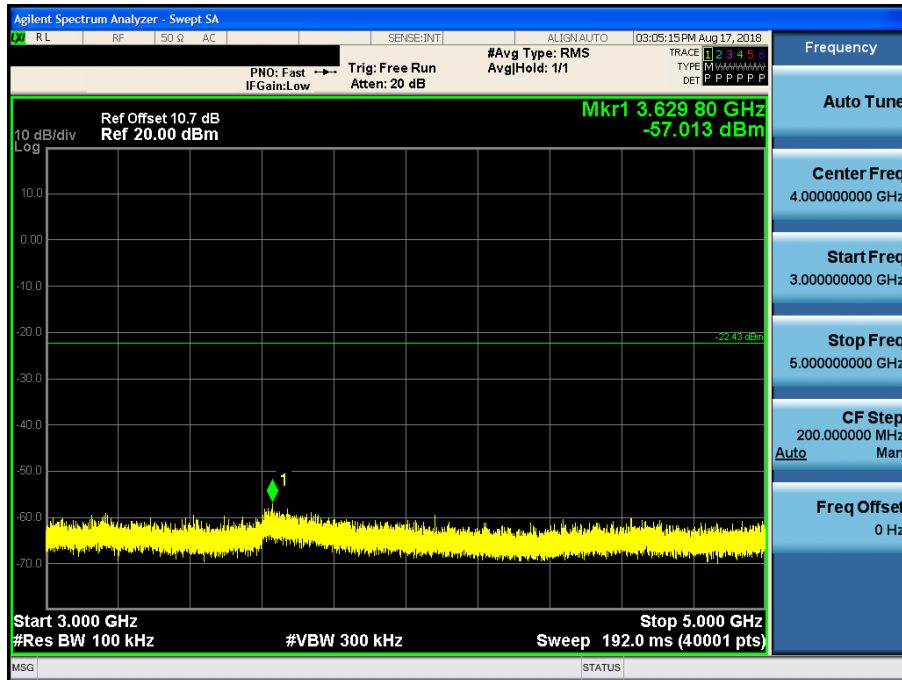


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

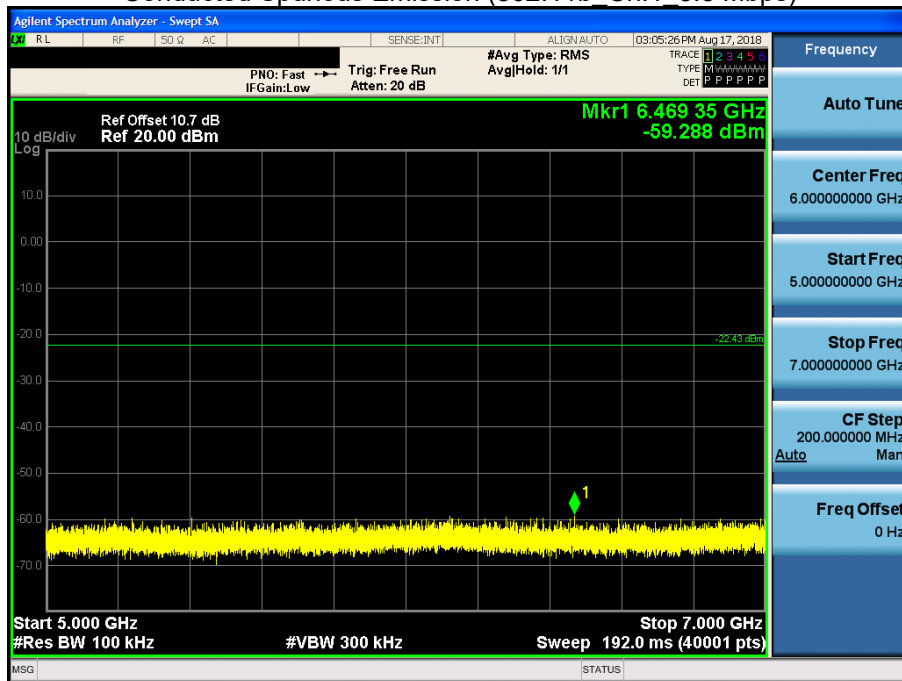


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

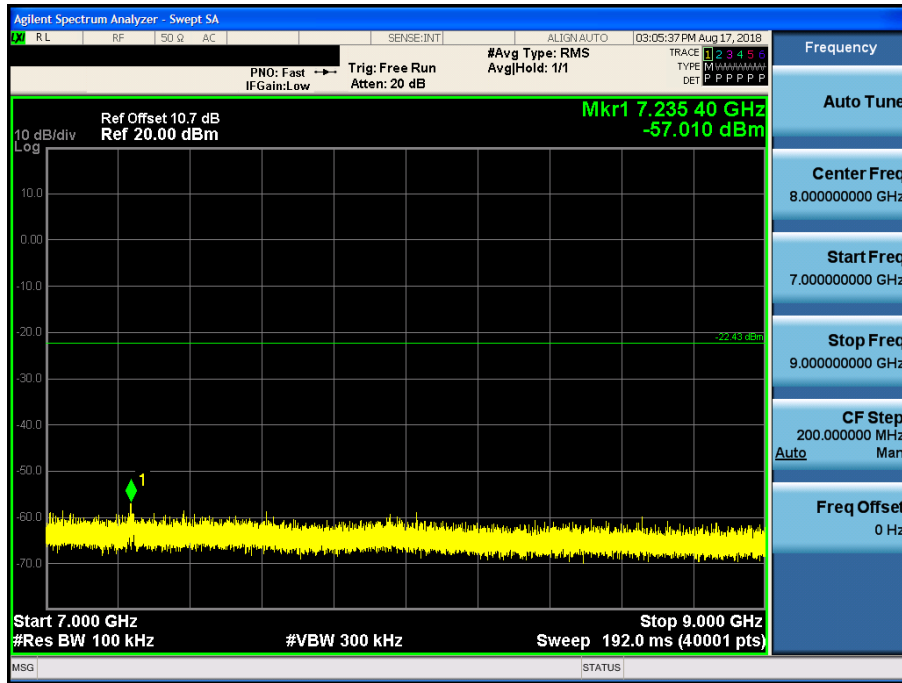


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

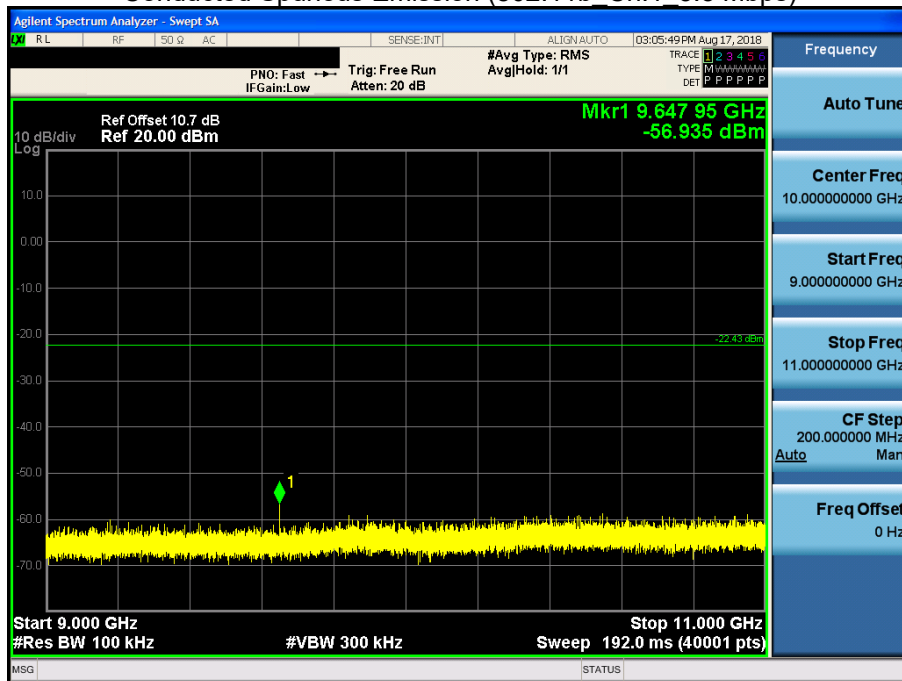


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

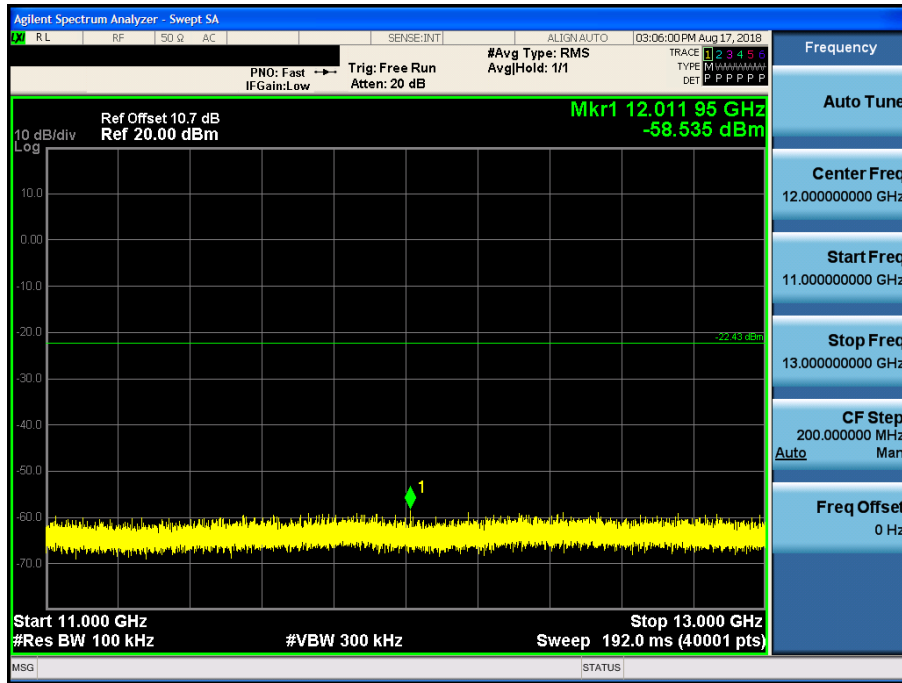


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

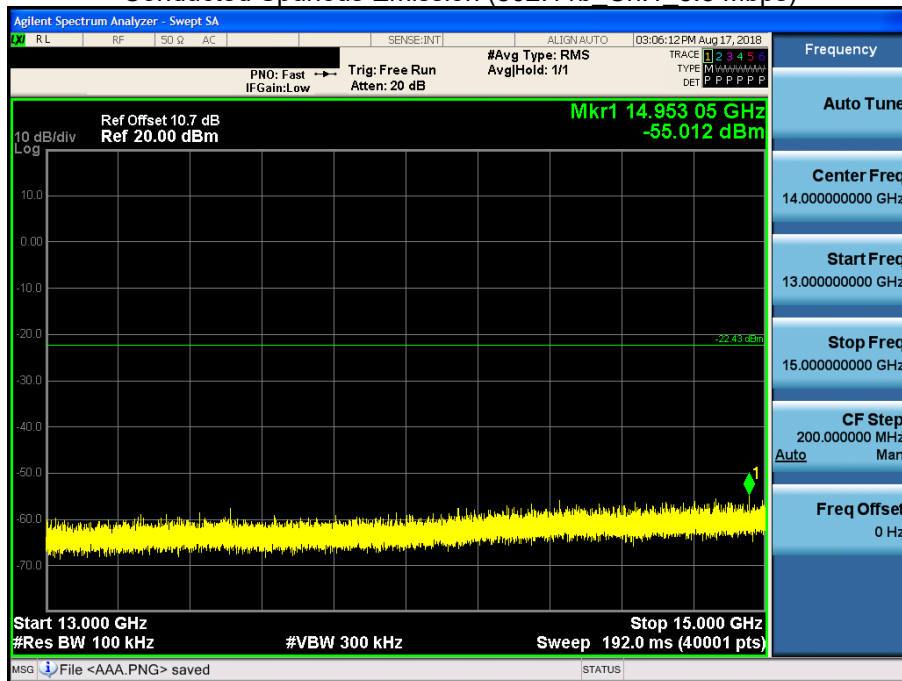


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b Ch.1 5.5 Mbps)

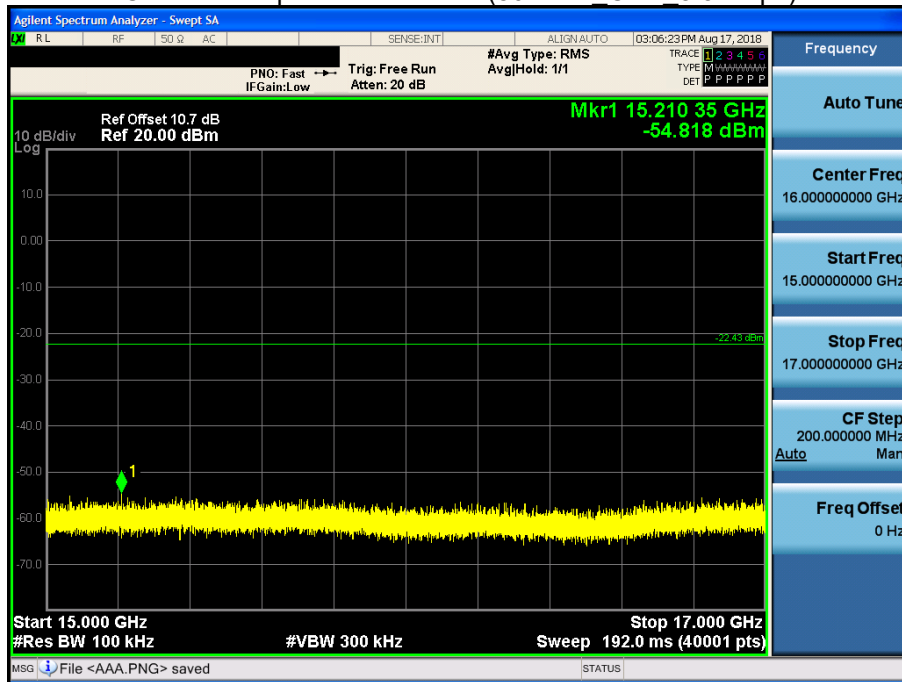


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b Ch.1 5.5 Mbps)

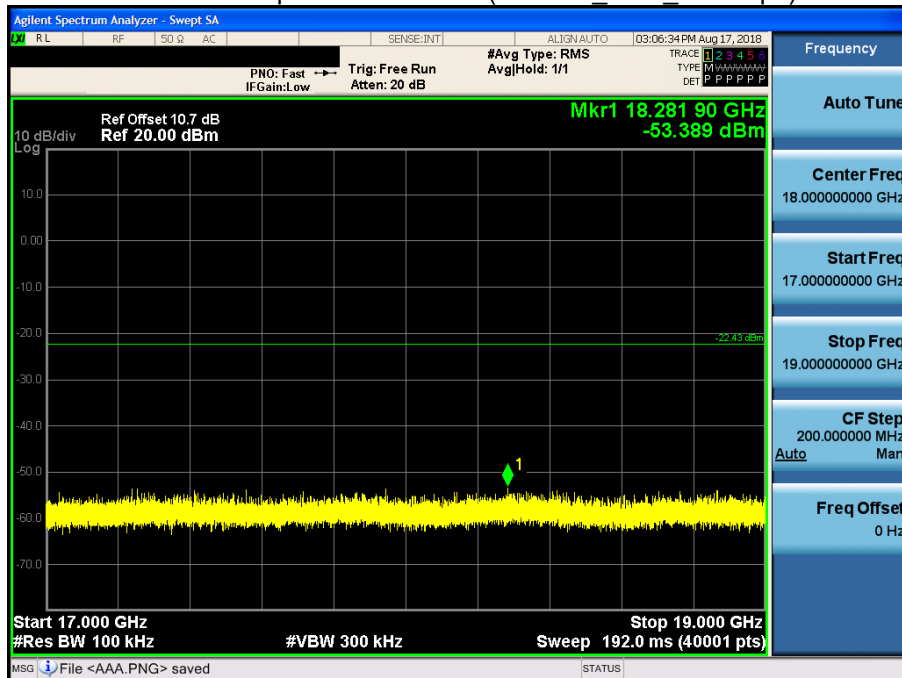


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

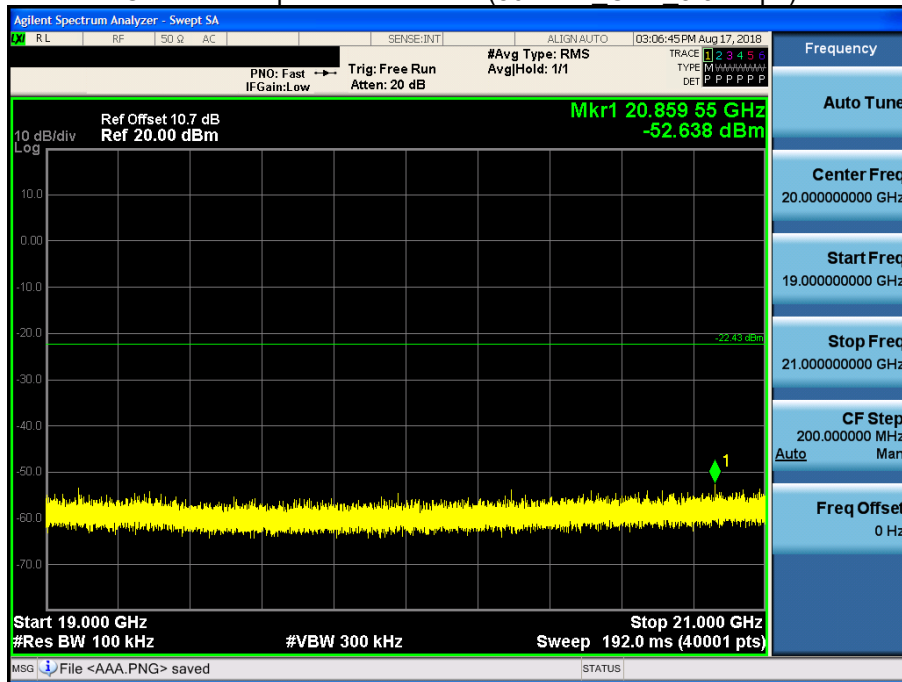


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

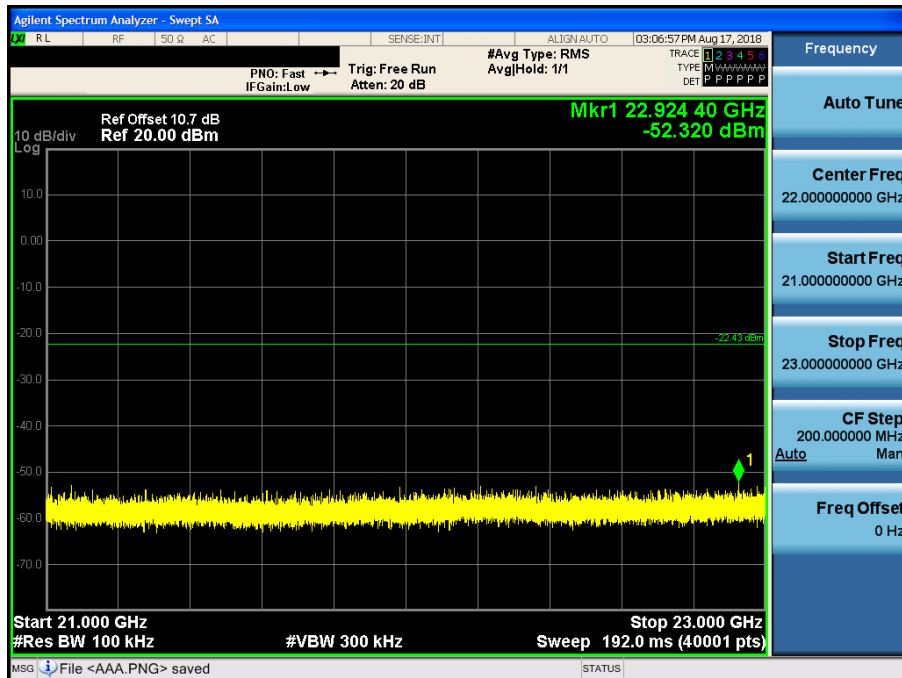

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

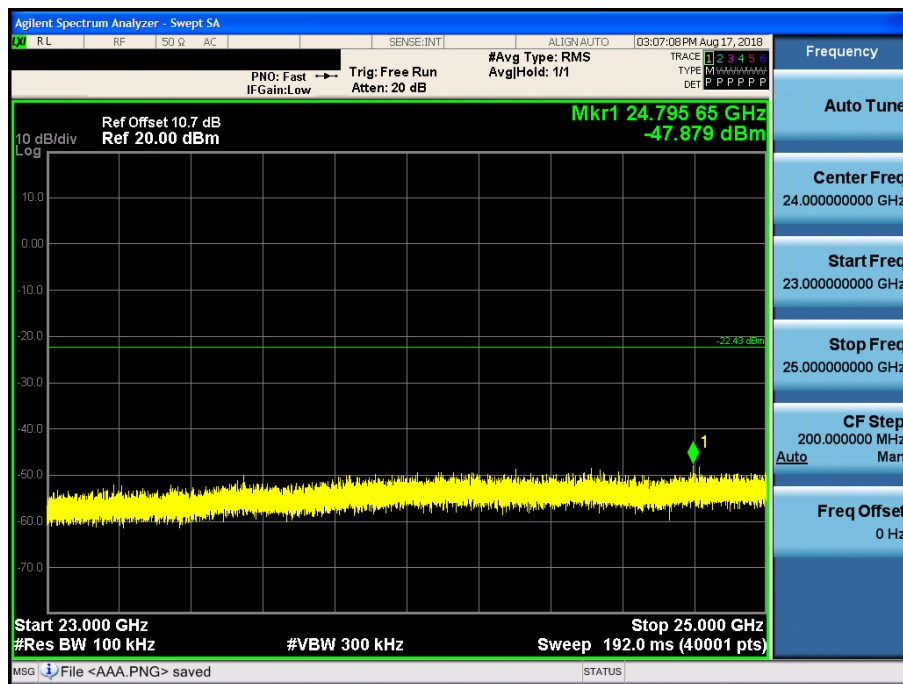

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40 \cdot \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. The test results for below 30 MHz is correlated to an open site.
The result on OATS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	52.98	2.24	V	55.22	73.98	18.76	PK
4824	45.34	2.24	V	47.58	53.98	6.40	AV
7236	50.85	9.70	V	60.55	73.98	13.43	PK
7236	40.12	9.70	V	49.82	53.98	4.16	AV
4824	53.61	2.24	H	55.85	73.98	18.13	PK
4824	45.58	2.24	H	47.82	53.98	6.16	AV
7236	51.88	9.70	H	61.58	73.98	12.40	PK
7236	40.30	9.70	H	50.00	53.98	3.98	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	50.56	0.00	2.24	V	52.80	73.98	21.18	PK
4824	39.15	0.30	2.24	V	41.69	53.98	12.29	AV
7236	49.61	0.00	9.70	V	59.31	73.98	14.67	PK
7236	37.92	0.30	9.70	V	47.92	53.98	6.06	AV
4824	51.92	0.00	2.24	H	54.16	73.98	19.82	PK
4824	39.24	0.30	2.24	H	41.78	53.98	12.20	AV
7236	50.01	0.00	9.70	H	59.71	73.98	14.27	PK
7236	38.15	0.30	9.70	H	48.15	53.98	5.83	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	51.34	0.00	2.24	V	53.58	73.98	20.40	PK
4824	38.85	0.32	2.24	V	41.41	53.98	12.57	AV
7236	49.34	0.00	9.70	V	59.04	73.98	14.94	PK
7236	38.05	0.32	9.70	V	48.07	53.98	5.91	AV
4824	51.59	0.00	2.24	H	53.83	73.98	20.15	PK
4824	39.20	0.32	2.24	H	41.76	53.98	12.22	AV
7236	50.41	0.00	9.70	H	60.11	73.98	13.87	PK
7236	38.11	0.32	9.70	H	48.13	53.98	5.85	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	53.98	2.62	V	56.60	73.98	17.38	PK
4874	45.61	2.62	V	48.23	53.98	5.75	AV
7311	51.07	9.86	V	60.93	73.98	13.05	PK
7311	40.32	9.86	V	50.18	53.98	3.80	AV
4874	54.17	2.62	H	56.79	73.98	17.19	PK
4874	45.88	2.62	H	48.50	53.98	5.48	AV
7311	51.53	9.86	H	61.39	73.98	12.59	PK
7311	40.45	9.86	H	50.31	53.98	3.67	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	51.98	0.00	2.62	V	54.60	73.98	19.38	PK
4874	39.74	0.30	2.62	V	42.66	53.98	11.32	AV
7311	54.95	0.00	9.86	V	64.81	73.98	9.17	PK
7311	39.68	0.30	9.86	V	49.84	53.98	4.14	AV
4874	52.31	0.00	2.62	H	54.93	73.98	19.05	PK
4874	39.80	0.30	2.62	H	42.72	53.98	11.26	AV
7311	55.85	0.00	9.86	H	65.71	73.98	8.27	PK
7311	39.72	0.30	9.86	H	49.88	53.98	4.10	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	51.56	0.00	2.62	V	54.18	73.98	19.80	PK
4874	39.43	0.32	2.62	V	42.37	53.98	11.61	AV
7311	55.74	0.00	9.86	V	65.60	73.98	8.38	PK
7311	40.38	0.32	9.86	V	50.56	53.98	3.42	AV
4874	52.30	0.00	2.62	H	54.92	73.98	19.06	PK
4874	39.60	0.32	2.62	H	42.54	53.98	11.44	AV
7311	56.04	0.00	9.86	H	65.90	73.98	8.08	PK
7311	40.42	0.32	9.86	H	50.60	53.98	3.38	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	52.91	2.69	V	55.60	73.98	18.38	PK
4924	44.89	2.69	V	47.58	53.98	6.40	AV
7386	49.76	10.21	V	59.97	73.98	14.01	PK
7386	40.12	10.21	V	50.33	53.98	3.65	AV
4924	53.23	2.69	H	55.92	73.98	18.06	PK
4924	45.15	2.69	H	47.84	53.98	6.14	AV
7386	50.76	10.21	H	60.97	73.98	13.01	PK
7386	40.18	10.21	H	50.39	53.98	3.59	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2462
Channel No.	11 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	49.79	0.00	2.69	V	52.48	73.98	21.50	PK
4924	38.55	0.30	2.69	V	41.54	53.98	12.44	AV
7386	54.31	0.00	10.21	V	64.52	73.98	9.46	PK
7386	37.59	0.30	10.21	V	48.10	53.98	5.88	AV
4924	50.39	0.00	2.69	H	53.08	73.98	20.90	PK
4924	38.75	0.30	2.69	H	41.74	53.98	12.24	AV
7386	54.50	0.00	10.21	H	64.71	73.98	9.27	PK
7386	38.02	0.30	10.21	H	48.53	53.98	5.45	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	50.31	0.00	2.69	V	53.00	73.98	20.98	PK
4924	38.31	0.32	2.69	V	41.32	53.98	12.66	AV
7386	51.49	0.00	10.21	V	61.70	73.98	12.28	PK
7386	37.38	0.32	10.21	V	47.91	53.98	6.07	AV
4924	50.39	0.00	2.69	H	53.08	73.98	20.90	PK
4924	38.51	0.32	2.69	H	41.52	53.98	12.46	AV
7386	51.51	0.00	10.21	H	61.72	73.98	12.26	PK
7386	37.55	0.32	10.21	H	48.08	53.98	5.90	AV


■ Test Plots (Worst case : X-H)

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.11 3rd Harmonic)

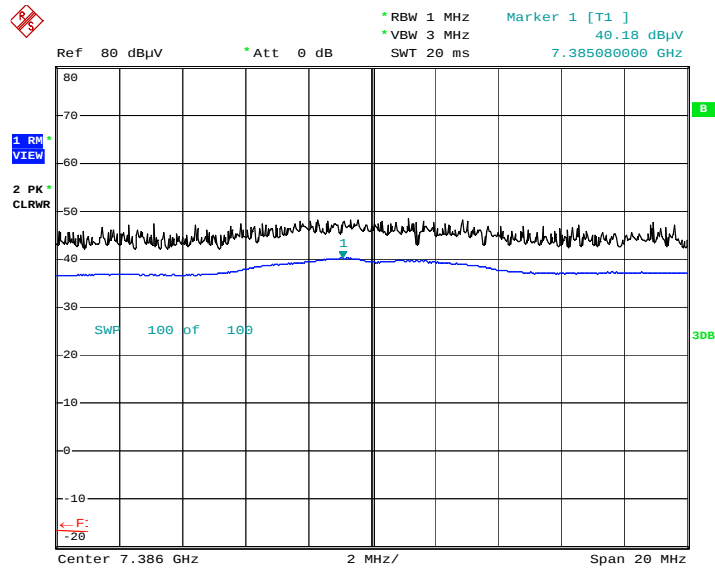


Date: 28.JUN.2003 05:39:11

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.11 3rd Harmonic)

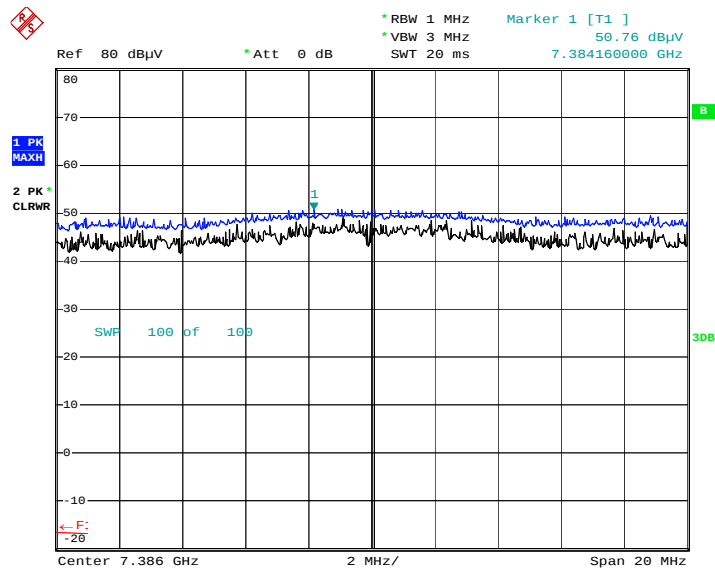


Date: 28.JUN.2003 05:39:39

Radiated Spurious Emissions plot – Average Reading (802.11g, Ch.6 3rd Harmonic)

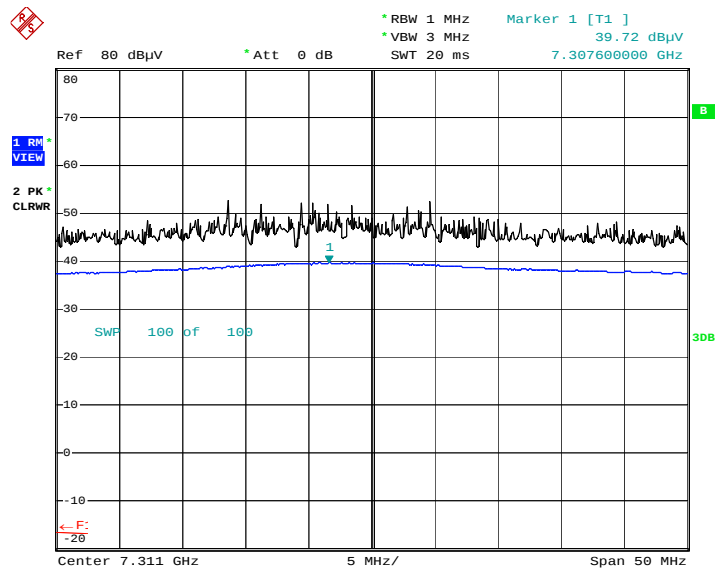


Date: 28.JUN.2003 05:51:46

Radiated Spurious Emissions plot – Peak Reading (802.11g, Ch.6 3rd Harmonic)

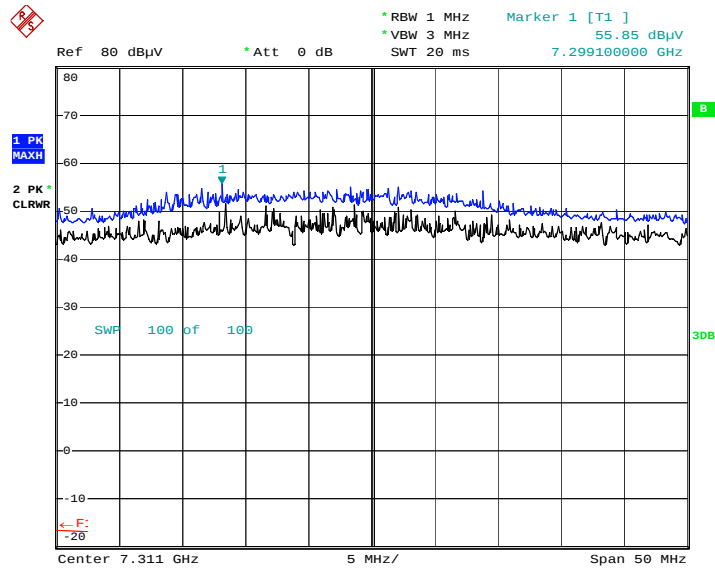


Date: 28.JUN.2003 05:52:18

Radiated Spurious Emissions plot – Average Reading (802.11n, Ch.6 3rd Harmonic)

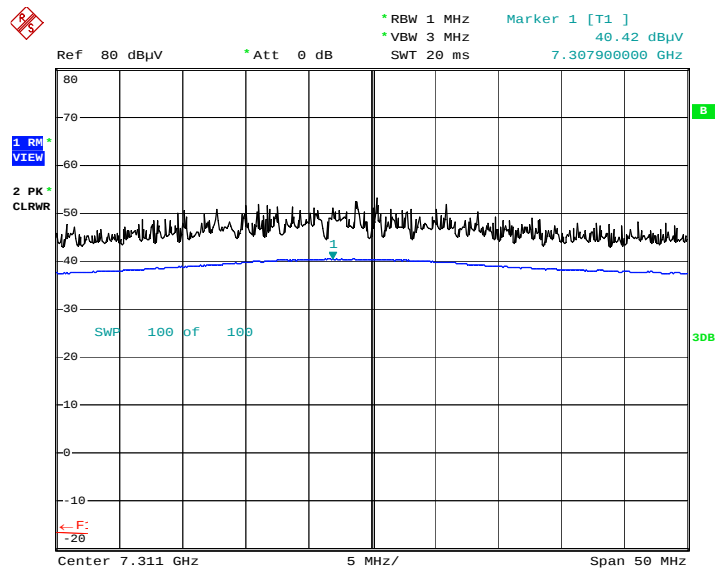

Date: 28.JUN.2003 05:54:05

Radiated Spurious Emissions plot – Peak Reading (802.11n, Ch.6 3rd Harmonic)

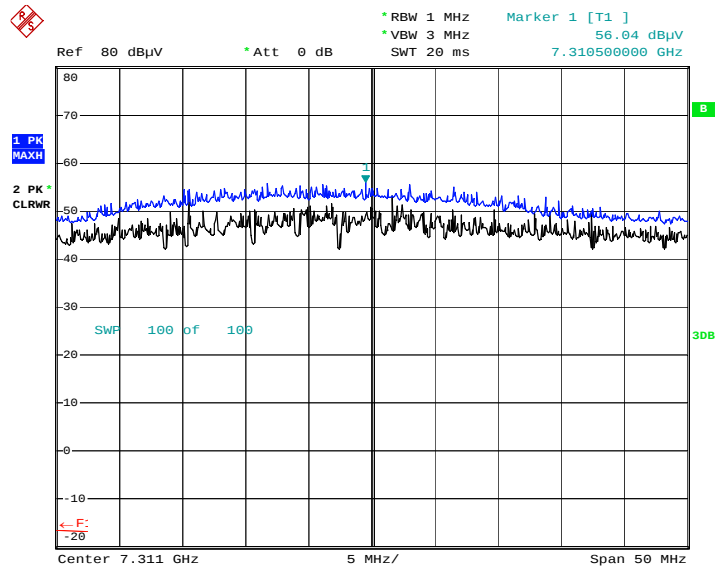

Date: 28.JUN.2003 05:54:35

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	56.87	1.12	H	57.99	73.98	15.99	PK
2390.0	48.75	1.12	H	49.87	53.98	4.11	AV
2390.0	58.20	1.12	V	59.32	73.98	14.66	PK
2390.0	49.20	1.12	V	50.32	53.98	3.66	AV
2483.5	56.31	1.38	H	57.69	73.98	16.29	PK
2483.5	46.25	1.38	H	47.63	53.98	6.35	AV
2483.5	56.05	1.38	V	57.43	73.98	16.55	PK
2483.5	48.43	1.38	V	49.81	53.98	4.17	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	66.56	0.00	1.12	H	67.68	73.98	6.30	PK
2390.0	49.58	0.30	1.12	H	51.00	53.98	2.98	AV
2390.0	68.03	0.00	1.12	V	69.15	73.98	4.83	PK
2390.0	49.60	0.30	1.12	V	51.02	53.98	2.96	AV
2483.5	64.90	0.00	1.38	H	66.28	73.98	7.70	PK
2483.5	44.86	0.30	1.38	H	46.54	53.98	7.44	AV
2483.5	68.38	0.00	1.38	V	69.76	73.98	4.22	PK
2483.5	46.55	0.30	1.38	V	48.23	53.98	5.75	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	68.19	0.00	1.12	H	69.31	73.98	4.67	PK
2390.0	49.75	0.32	1.12	H	51.19	53.98	2.79	AV
2390.0	68.49	0.00	1.12	V	69.61	73.98	4.37	PK
2390.0	49.83	0.32	1.12	V	51.27	53.98	2.71	AV
2483.5	65.59	0.00	1.38	H	66.97	73.98	7.01	PK
2483.5	43.40	0.32	1.38	H	45.10	53.98	8.88	AV
2483.5	67.45	0.00	1.38	V	68.83	73.98	5.15	PK
2483.5	43.85	0.32	1.38	V	45.55	53.98	8.43	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2422 MHz
Channel No.	2 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	55.28	1.12	H	56.40	73.98	17.58	PK
2390.0	47.25	1.12	H	48.37	53.98	5.61	AV
2390.0	56.41	1.12	V	57.53	73.98	16.45	PK
2390.0	49.25	1.12	V	50.37	53.98	3.61	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2422 MHz
Channel No.	2 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	67.48	0.00	1.12	H	68.60	73.98	5.38	PK
2390.0	48.70	0.30	1.12	H	50.12	53.98	3.86	AV
2390.0	68.10	0.00	1.12	V	69.22	73.98	4.76	PK
2390.0	50.23	0.30	1.12	V	51.65	53.98	2.33	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2452 MHz
Channel No.	10 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	66.06	0.00	1.38	H	67.44	73.98	6.54	PK
2483.5	49.45	0.30	1.38	H	51.13	53.98	2.85	AV
2483.5	67.60	0.00	1.38	V	68.98	73.98	5.00	PK
2483.5	49.98	0.30	1.38	V	51.66	53.98	2.32	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2422 MHz
Channel No.	2 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	66.49	0.00	1.12	H	67.61	73.98	6.37	PK
2390.0	46.90	0.32	1.12	H	48.34	53.98	5.64	AV
2390.0	68.93	0.00	1.12	V	70.05	73.98	3.93	PK
2390.0	48.60	0.32	1.12	V	50.04	53.98	3.94	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2452 MHz
Channel No.	10 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	64.11	0.00	1.38	H	65.49	73.98	8.49	PK
2483.5	47.85	0.32	1.38	H	49.55	53.98	4.43	AV
2483.5	65.00	0.00	1.38	V	66.38	73.98	7.60	PK
2483.5	48.65	0.32	1.38	V	50.35	53.98	3.63	AV


■ Test Plots (Worst case : Z-V)

Radiated Restricted Band Edges plot – Average Reading (802.11g Ch.2)

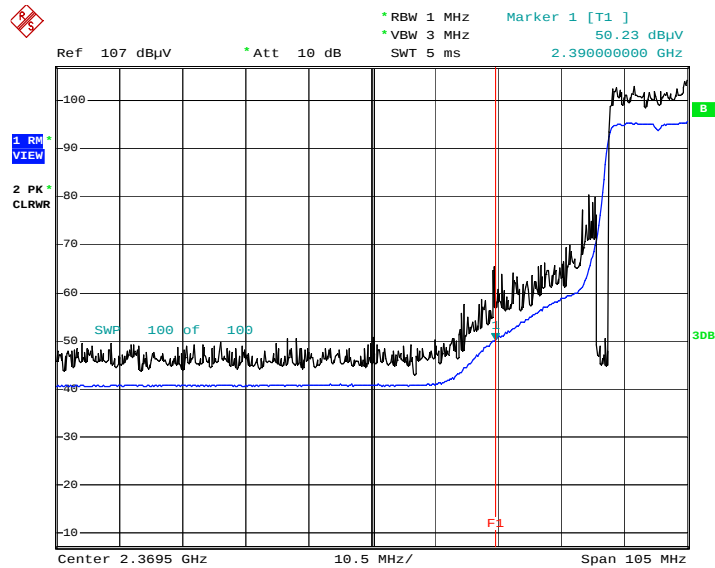


Date: 28.JUN.2003 02:06:21

Radiated Restricted Band Edges plot – Peak Reading (802.11g Ch.2)

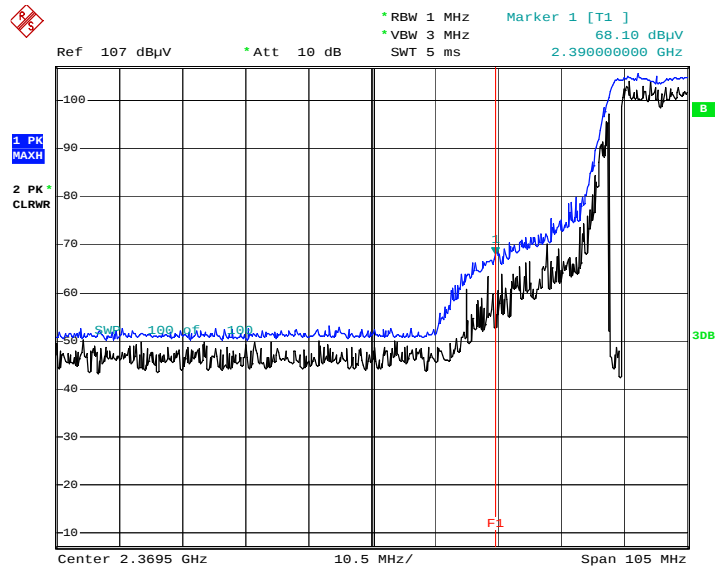


Date: 28.JUN.2003 02:06:58

Radiated Restricted Band Edges plot – Average Reading (802.11g Ch.10)

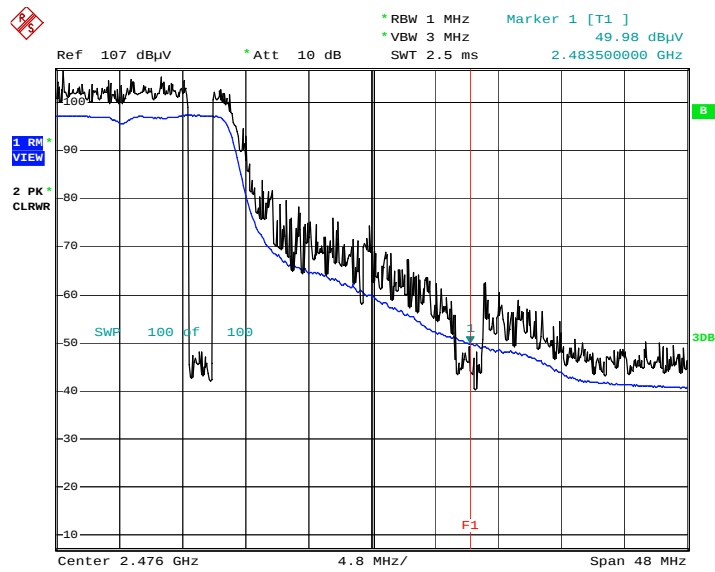


Date: 28.JUN.2003 01:41:01

Radiated Restricted Band Edges plot – Peak Reading (802.11g Ch.10)

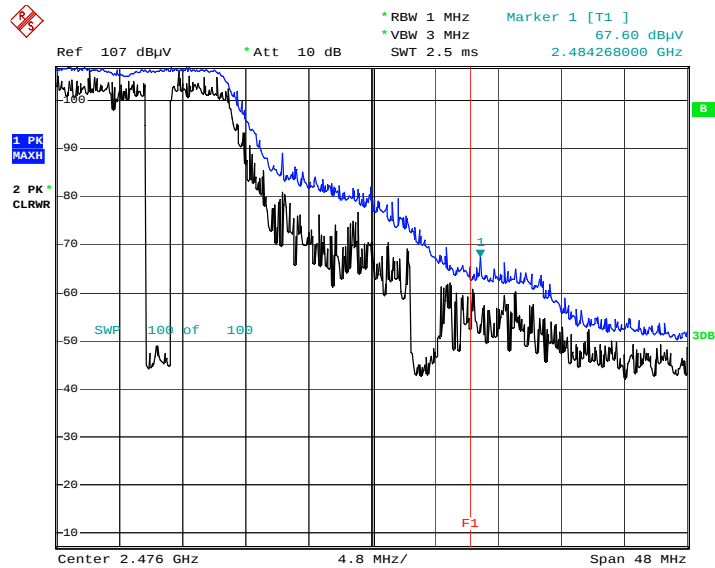


Date: 28.JUN.2003 01:41:39

Radiated Restricted Band Edges plot – Average Reading (802.11n Ch.1)

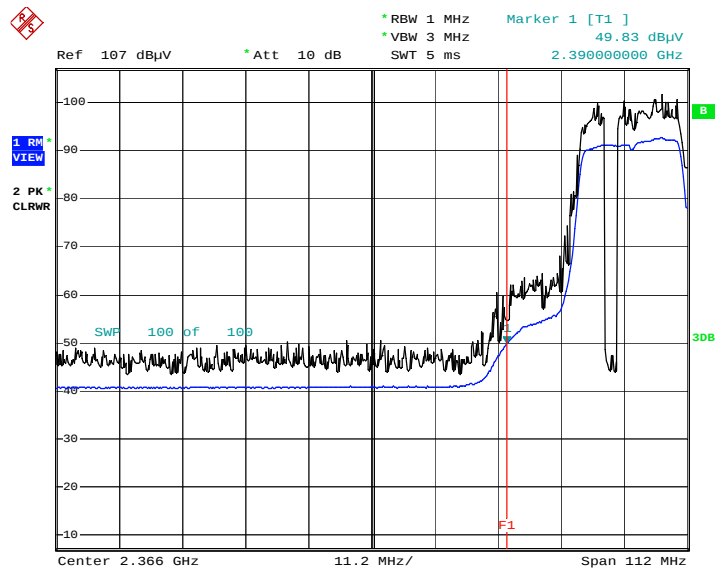

Date: 28.JUN.2003 01:21:08

Radiated Restricted Band Edges plot – Peak Reading (802.11n Ch.1)

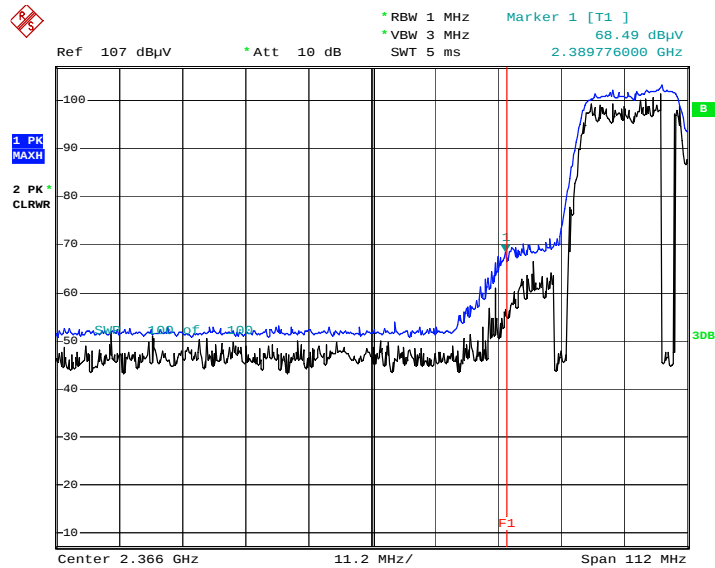

Date: 28.JUN.2003 01:22:50

Note:

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

2.4G_N


1 / 2

HCT TEST Report

Common Information

EUT: SM-J610F/DS
Manufacturer: SAMSUNG
Test Site: SHIELD ROOM
Operating Conditions: 2.4G_N

FCC CLASS B_Exten Cable

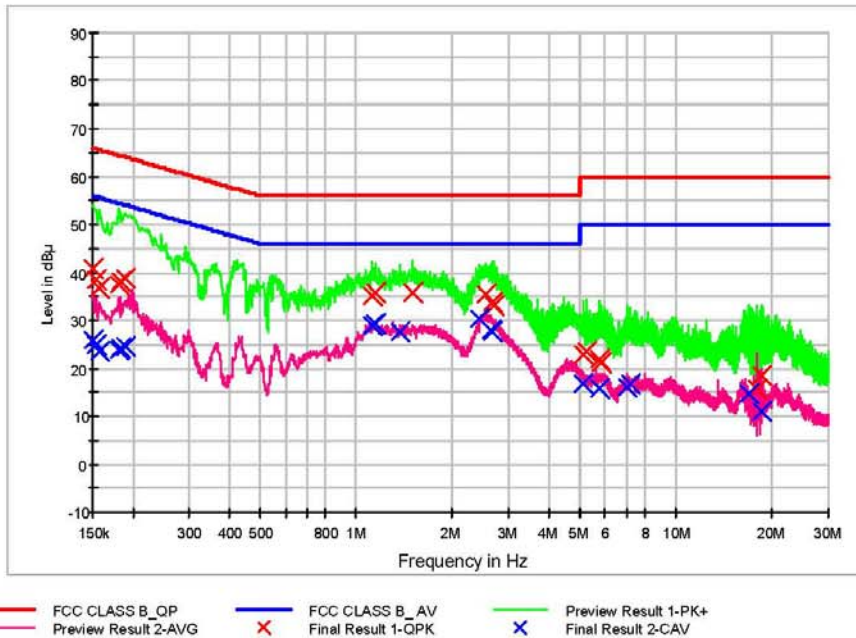

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	40.8	9.000	Off	N	9.7	25.2	66.0
0.154000	38.6	9.000	Off	N	9.7	27.2	65.8
0.158000	36.7	9.000	Off	N	9.7	28.9	65.6
0.180000	37.5	9.000	Off	N	9.7	27.0	64.5
0.184000	38.1	9.000	Off	N	9.7	26.2	64.3
0.190000	38.7	9.000	Off	N	9.7	25.4	64.0
1.122000	35.1	9.000	Off	N	9.8	20.9	56.0
1.148000	35.6	9.000	Off	N	9.8	20.4	56.0
1.502000	35.7	9.000	Off	N	9.9	20.3	56.0
2.554000	35.6	9.000	Off	N	9.9	20.4	56.0
2.650000	33.7	9.000	Off	N	9.9	22.3	56.0
2.688000	33.0	9.000	Off	N	9.9	23.0	56.0
5.132000	22.8	9.000	Off	N	10.0	37.2	60.0
5.240000	23.6	9.000	Off	N	10.0	36.4	60.0
5.752000	21.8	9.000	Off	N	10.1	38.2	60.0
5.868000	21.3	9.000	Off	N	10.1	38.7	60.0
17.964000	15.7	9.000	Off	N	10.6	44.3	60.0
18.562000	18.3	9.000	Off	N	10.6	41.7	60.0

2018-08-16

오전 9:20:33

2.4G_N

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	26.0	9.000	Off	N	9.7	30.0	56.0
0.154000	24.7	9.000	Off	N	9.7	31.0	55.8
0.158000	23.6	9.000	Off	N	9.7	32.0	55.6
0.180000	23.8	9.000	Off	N	9.7	30.7	54.5
0.184000	24.4	9.000	Off	N	9.7	29.9	54.3
0.190000	24.7	9.000	Off	N	9.7	29.3	54.0
1.122000	28.9	9.000	Off	N	9.8	17.1	46.0
1.148000	29.3	9.000	Off	N	9.8	16.7	46.0
1.368000	27.6	9.000	Off	N	9.8	18.4	46.0
2.434000	30.4	9.000	Off	N	9.9	15.6	46.0
2.642000	27.9	9.000	Off	N	9.9	18.1	46.0
2.650000	27.8	9.000	Off	N	9.9	18.2	46.0
5.132000	16.8	9.000	Off	N	10.0	33.2	50.0
5.752000	15.9	9.000	Off	N	10.1	34.1	50.0
7.012000	16.0	9.000	Off	N	10.1	34.0	50.0
7.204000	16.7	9.000	Off	N	10.1	33.3	50.0
16.990000	14.7	9.000	Off	N	10.6	35.3	50.0
18.562000	11.0	9.000	Off	N	10.6	39.0	50.0

2018-08-16

오전 9:20:33

Conducted Emissions (Line 2)

2.4G_L1


1 / 2

HCT TEST Report

Common Information

EUT: SM-J610F/DS
Manufacturer: SAMSUNG
Test Site: SHIELD ROOM
Operating Conditions: 2.4G_L1

FCC CLASS B_Exten Cable

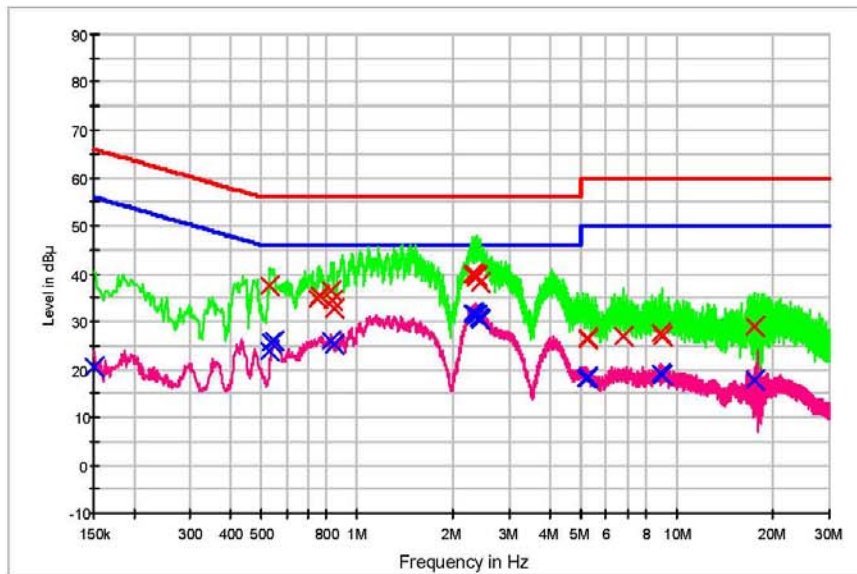

— FCC CLASS B_OP — FCC CLASS B_AV — Preview Result 1-PK+
— Preview Result 2-AVG — Final Result 1-QPK — Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.532000	37.6	9.000	Off	L1	9.8	18.4	56.0
0.754000	34.8	9.000	Off	L1	9.7	21.2	56.0
0.762000	35.4	9.000	Off	L1	9.7	20.6	56.0
0.830000	36.3	9.000	Off	L1	9.7	19.7	56.0
0.838000	34.3	9.000	Off	L1	9.8	21.7	56.0
0.846000	32.8	9.000	Off	L1	9.8	23.2	56.0
2.294000	40.0	9.000	Off	L1	9.8	16.0	56.0
2.328000	39.9	9.000	Off	L1	9.9	16.1	56.0
2.336000	39.1	9.000	Off	L1	9.9	16.9	56.0
2.352000	39.5	9.000	Off	L1	9.9	16.5	56.0
2.362000	39.4	9.000	Off	L1	9.9	16.6	56.0
2.424000	38.3	9.000	Off	L1	9.9	17.7	56.0
5.236000	26.7	9.000	Off	L1	10.0	33.3	60.0
5.250000	26.4	9.000	Off	L1	10.0	33.6	60.0
6.766000	26.9	9.000	Off	L1	10.1	33.1	60.0
8.910000	27.6	9.000	Off	L1	10.1	32.4	60.0
8.974000	27.1	9.000	Off	L1	10.1	32.9	60.0
17.568000	28.9	9.000	Off	L1	10.3	31.1	60.0

2018-08-16

오전 9:32:00

2.4G_L1

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	20.6	9.000	Off	L1	9.7	35.4	56.0
0.532000	23.8	9.000	Off	L1	9.8	22.2	46.0
0.536000	25.6	9.000	Off	L1	9.8	20.4	46.0
0.550000	25.8	9.000	Off	L1	9.8	20.2	46.0
0.832000	26.0	9.000	Off	L1	9.7	20.0	46.0
0.846000	25.2	9.000	Off	L1	9.8	20.8	46.0
2.294000	31.7	9.000	Off	L1	9.8	14.3	46.0
2.328000	31.6	9.000	Off	L1	9.9	14.4	46.0
2.336000	31.4	9.000	Off	L1	9.9	14.6	46.0
2.362000	31.4	9.000	Off	L1	9.9	14.6	46.0
2.388000	30.8	9.000	Off	L1	9.9	15.2	46.0
2.424000	30.4	9.000	Off	L1	9.9	15.6	46.0
5.200000	18.1	9.000	Off	L1	10.0	31.9	50.0
5.236000	18.4	9.000	Off	L1	10.0	31.6	50.0
5.250000	18.1	9.000	Off	L1	10.0	31.9	50.0
8.910000	19.3	9.000	Off	L1	10.1	30.7	50.0
8.974000	18.7	9.000	Off	L1	10.1	31.3	50.0
17.568000	17.9	9.000	Off	L1	10.3	32.1	50.0

2018-08-16

오전 9:32:00

9.9 CONFIRMATION OF GEO-LOCATION MECHANISM

The device uses a geo-location mechanism based on the Country in order to only enable certain WLAN DTS bands when the device is not in the USA.

WLAN	Country code = US	Country code = KR(Korea)
CH 12	Did not connect	Connected
CH 13	Did not connect	Connected

The verification tests confirmed the operational of the geo-location mechanism.

Setting the channel for Access point

- SSID : ap_2g_ht20

- Ch.12 setting

```
Debug:> wl -i radio_1 down
Debug:> wl -i radio_1 chanspec 12
Chanspec set to 0x100c
Debug:> wl -i radio_1 up
```



- Ch.13 setting

```
Debug:> wl -i radio_1 down
Debug:> wl -i radio_1 chanspec 13
Chanspec set to 0x100d
Debug:> wl -i radio_1 up
```

Setting the country for product

Country code = US	Country code = KR(Korea)
WlanConfiguration MAC ADDRESS 08:AE:D6:A6:8A:6F Legacy BackOff : ENABLED Hotspot BackOff : DISABLED ☐ Disable FccChannel TxPower BackOff WLAN RF Test Mode Setting (WLAN RF Test Mode disables PowerSave, Roaming and LPC) ☐ User Mode ☐ RF Test Mode + Enable Proximity Sensor ☒ RF Test Mode MODULE TYPE COB CHANGE THE MAC Current Phone's locale : US (Country) US REMOVE COUNTRY SET COUNTRY Country Code Change complete DOZEMODE-ON	WlanConfiguration MAC ADDRESS 08:AE:D6:A6:8A:6F Legacy BackOff : ENABLED Hotspot BackOff : DISABLED ☐ Disable FccChannel TxPower BackOff WLAN RF Test Mode Setting (WLAN RF Test Mode disables PowerSave, Roaming and LPC) ☐ User Mode ☐ RF Test Mode + Enable Proximity Sensor ☒ RF Test Mode MODULE TYPE COB CHANGE THE MAC Current Phone's locale : KR (Country) KR REMOVE COUNTRY SET COUNTRY DOZEMODE-ON

Verification test

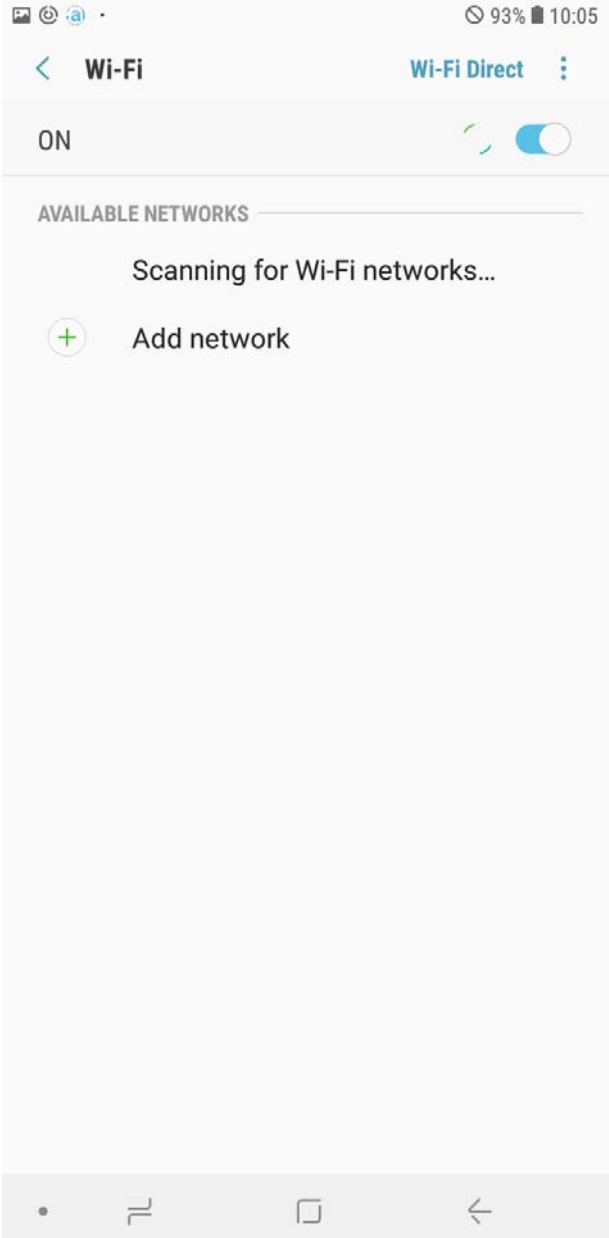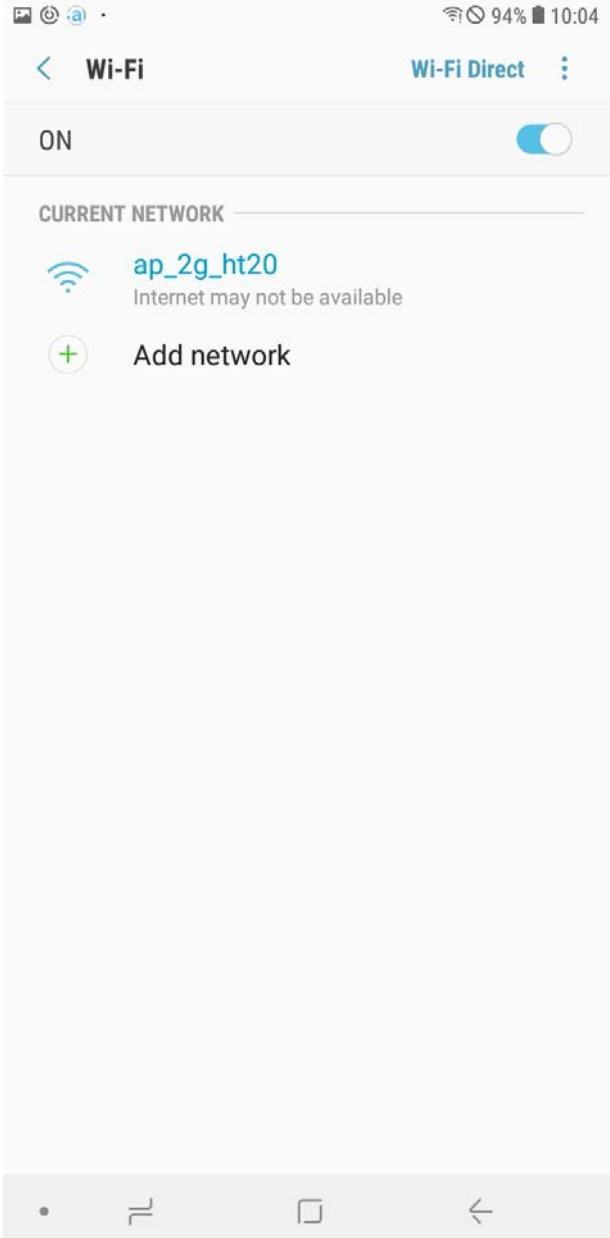Did not connect (Country code = US)	Connected (Country code = KR)
	

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/20/2017	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/27/2018	Annual	100033
ESPAC	SU-642 /Temperature Chamber	03/30/2018	Annual	0093008124
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/22/2017	Annual	MY49431210
Agilent	N1911A / Power Meter	04/16/2018	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/16/2018	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2017	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/07/2018	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/26/2018	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2018	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/17/2018	Annual	100422

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	04/19/2017	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	BBHA 9120D / Horn Antenna	05/02/2017	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/06/2017	Annual	100688
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/27/2017	Annual	101068-SZ
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	06/07/2018	Annual	8
Wainwright Instruments	WHFX7.0/18G-8SS / High Pass Filter	05/09/2018	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/29/2018	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2018	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/07/2018	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	07/17/2018	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	07/10/2018	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/10/2018	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/10/2018	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/29/2018	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/27/2018	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1808-FC042-P
2	HCT-RF-1808-FC043-P
3	HCT-RF-1808-FC044-P
4	HCT-RF-1808-FC045-P