



FCC CFR47 PART 15 SUBPART C

BLUETOOTH LOW ENERGY

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Tablet with Bluetooth, DTS/UNII a/b/g/n and ANT+

MODEL NUMBER: SM-P555

FCC ID: A3LSMP555

REPORT NUMBER: 15I19961-E3

ISSUE DATE: FEBRUARY 23, 2015

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Issue			
Rev.	Date	Revisions	Revised By
--	2/23/15	Initial Issue	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. WORST-CASE CONFIGURATION AND MODE	9
5.5. DESCRIPTION OF TEST SETUP.....	10
6. TEST AND MEASUREMENT EQUIPMENT	12
7. SUMMARY	13
8. ANTENNA PORT TEST RESULTS	13
8.1. 6 dB BANDWIDTH.....	14
8.2. 99% BANDWIDTH.....	18
8.3. OUTPUT POWER.....	22
8.4. AVERAGE POWER.....	26
8.5. POWER SPECTRAL DENSITY	27
8.6. CONDUCTED SPURIOUS EMISSIONS.....	31
9. RADIATED TEST RESULTS.....	38
9.1. LIMITS AND PROCEDURE	38
9.2. TRANSMITTER ABOVE 1 GHz	40
9.3. WORST-CASE BELOW 1 GHz.....	53
10. AC POWER LINE CONDUCTED EMISSIONS	56

11. SETUP PHOTOS61

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Tablet with Bluetooth, DTS/UNII a/b/g/n and ANT+
MODEL NUMBER: SM-P555

SERIAL NUMBER: R32G103MDE2 (Radiated), R32G103MD8A (Conducted)

DATE TESTED: FEBRUARY 3 – 23, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For

UL Verification Services Inc. By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:



JONATHAN HSU
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A(IC: 2324B-1)	☐ Chamber D(IC: 2324B-4)
☐ Chamber B(IC: 2324B-2)	☐ Chamber E(IC: 2324B-5)
☐ Chamber C(IC: 2324B-3)	☒ Chamber F(IC: 2324B-6)
	☐ Chamber G(IC: 2324B-7)
	☐ Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 26000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Tablet with Bluetooth, DTS/UNII a/b/g/n and ANT+.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402-2480	BLE	1.66	1.47

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -1.58 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SAMSUNG	EP-TA12EWE	N/A	N/A
Earphone	SAMSUNG	N/A	N/A	N/A

I/O CABLES


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.

EUT was set in the Hidden menu mode to enable BLE communications.

SETUP DIAGRAM FOR TESTS

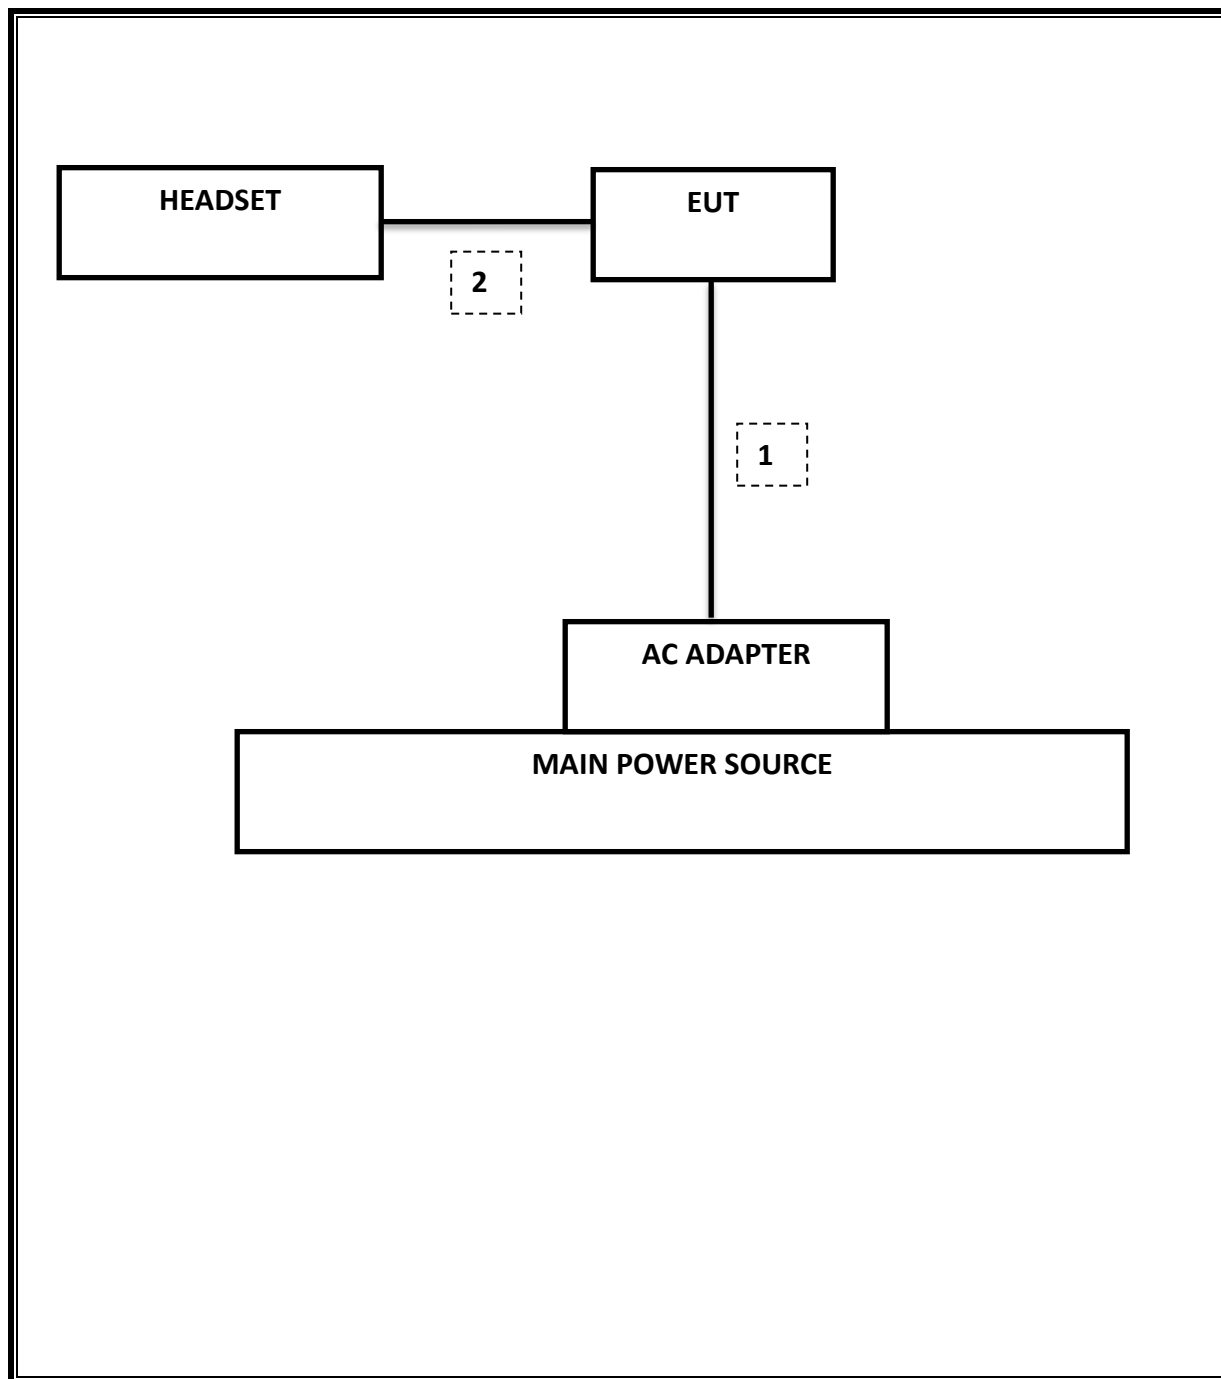

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/16
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 25.5 GHz	ARA	MWH-1826/B	C00980	11/14/15
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	04/03/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/15
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/15
CBT Bluetooth Tester	R & S	CBT	None	07/12/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/15
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/15
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/16
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Test Equipment List				
Description	Manufacturer	Model	Version	
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14	
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14	
CLT Software	UL	UL RF	Version 1.0, 02/02/15	
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15	

7. SUMMARY

8.

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	0.6491MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-40.83dBm
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	1.66dBm
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	-13.64dBm
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	43.43dBuV(PK)
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	42.9dBuV/m

ANTENNA PORT TEST RESULTS

8.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.6491	0.5
Middle	2440	0.6516	0.5
High	2480	0.6516	0.5


LOW CHANNEL

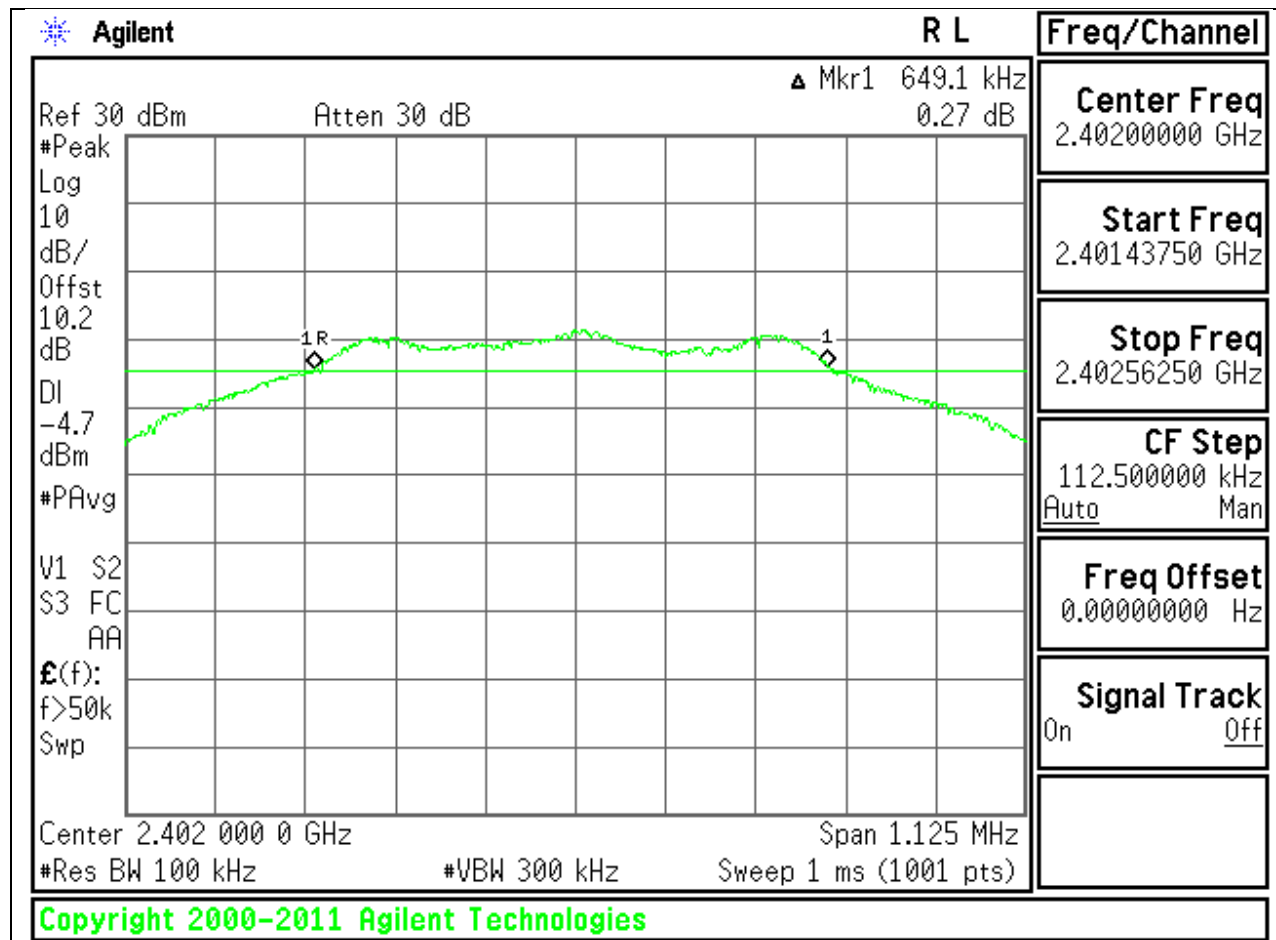

MID CHANNEL

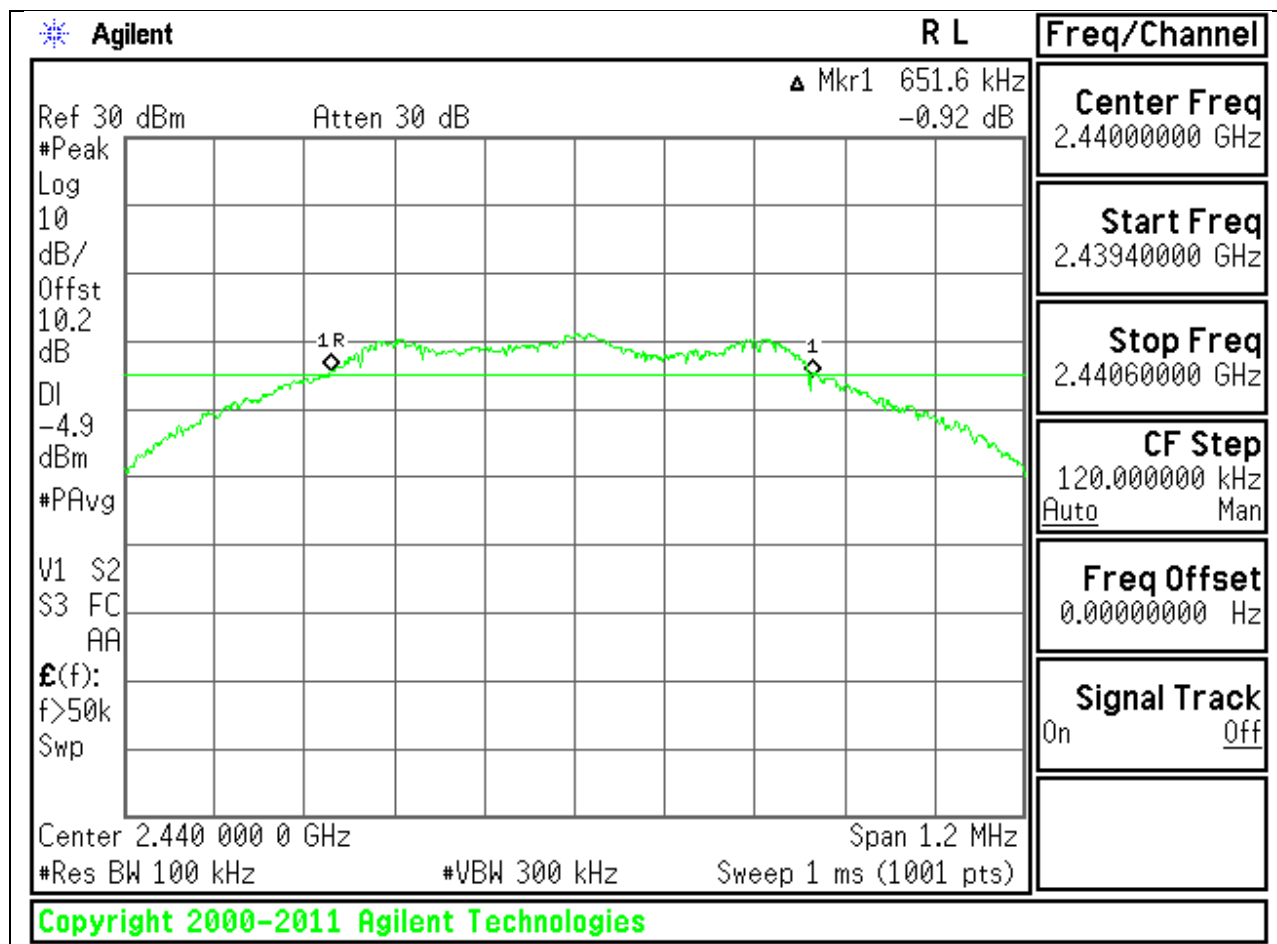

HIGH CHANNEL

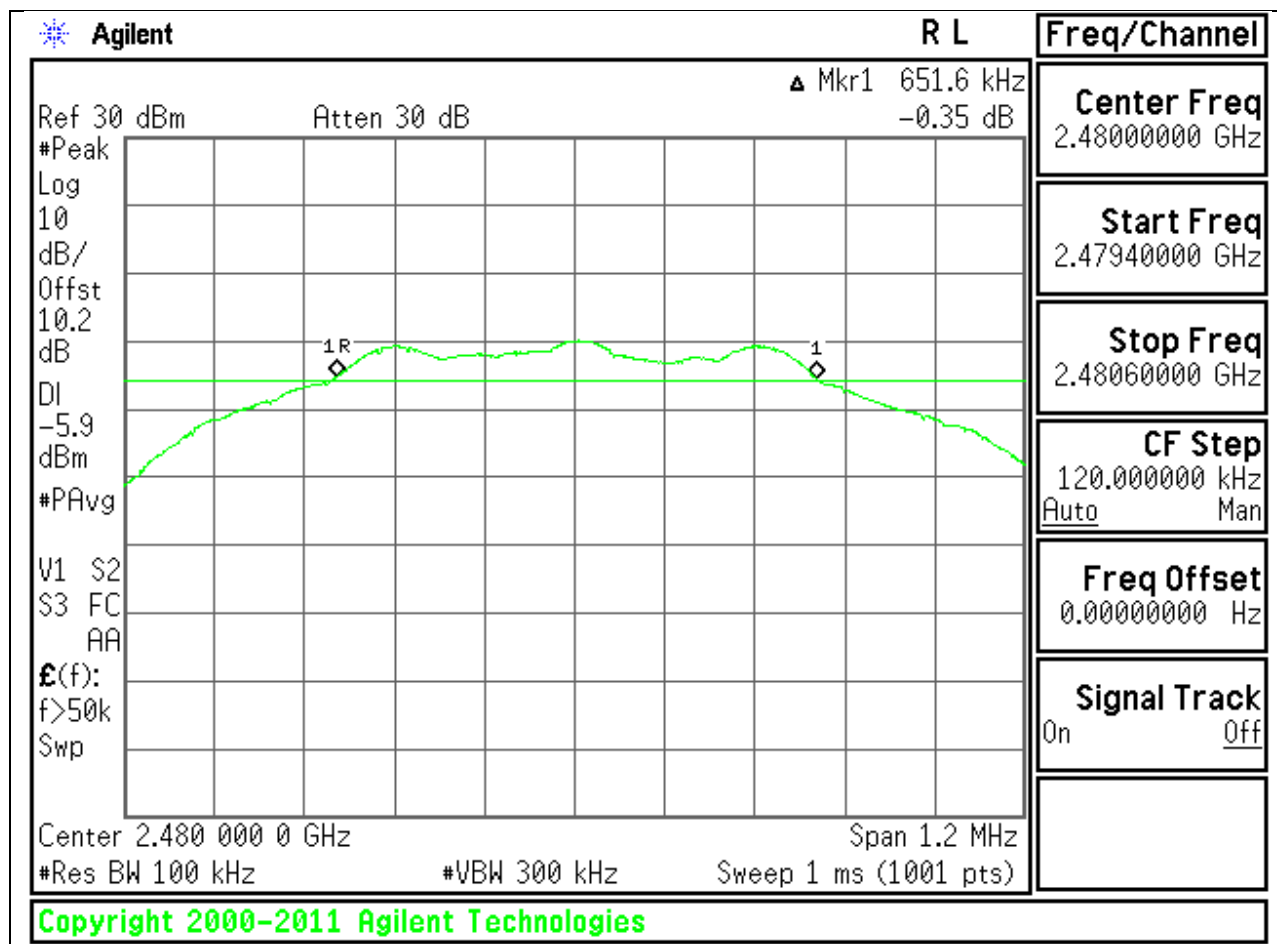

8.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE


Reference to KDB558074 D01 DTS Meas Guidance v03r02: The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0649
Middle	2440	1.0672
High	2480	1.0658

99% BANDWIDTH PLOTS


LOW CHANNEL

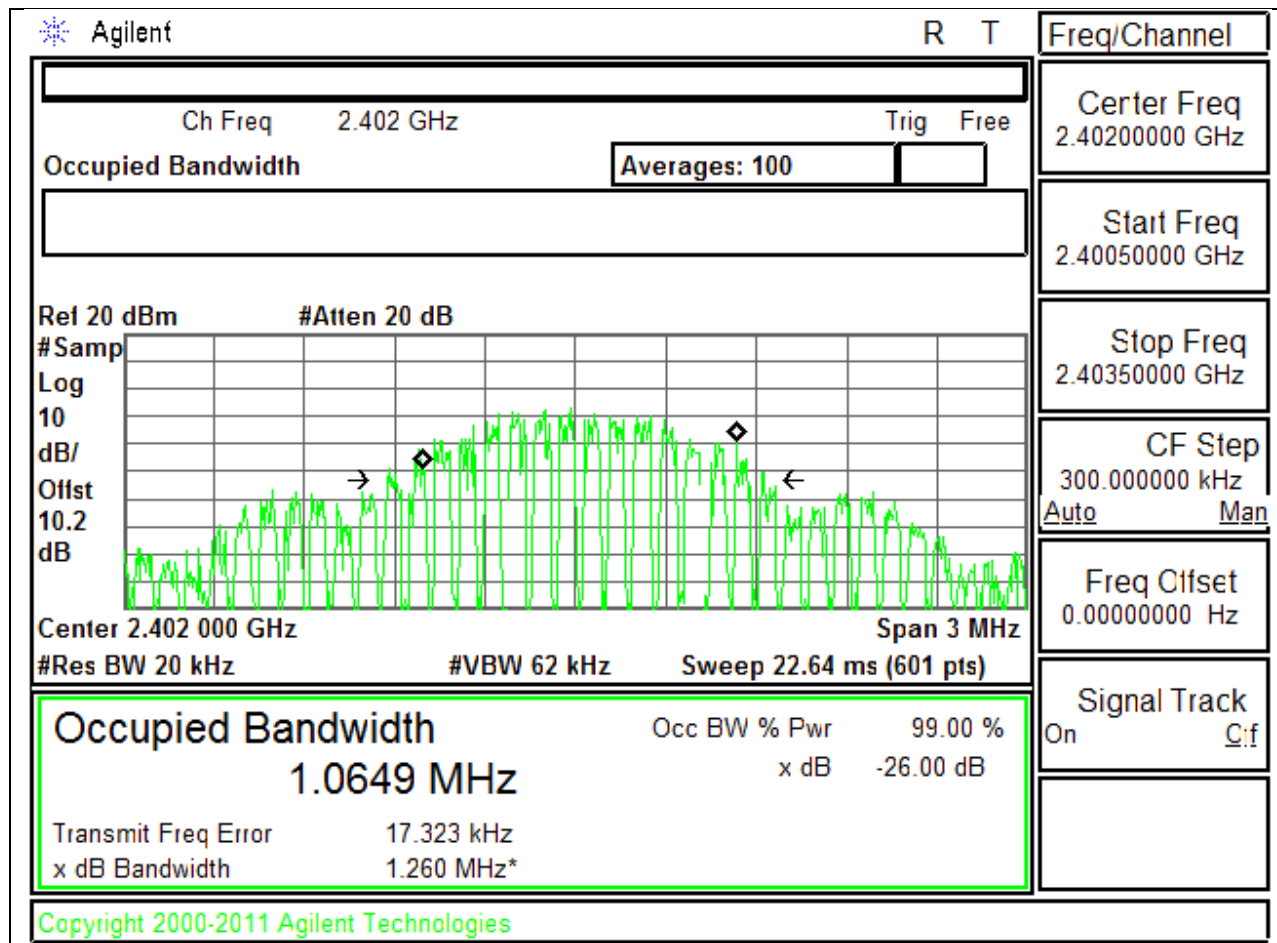

MID CHANNEL

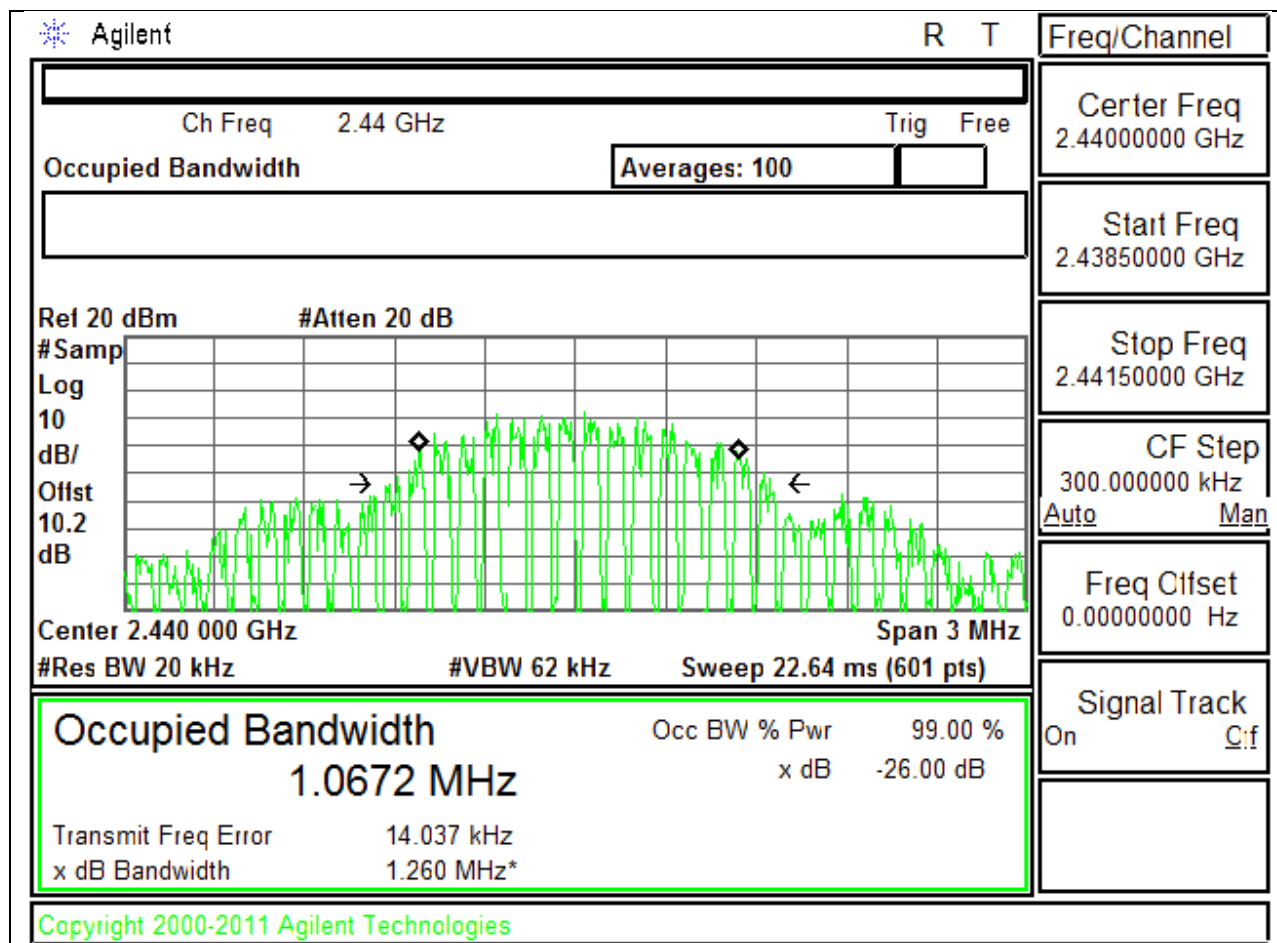

HIGH CHANNEL

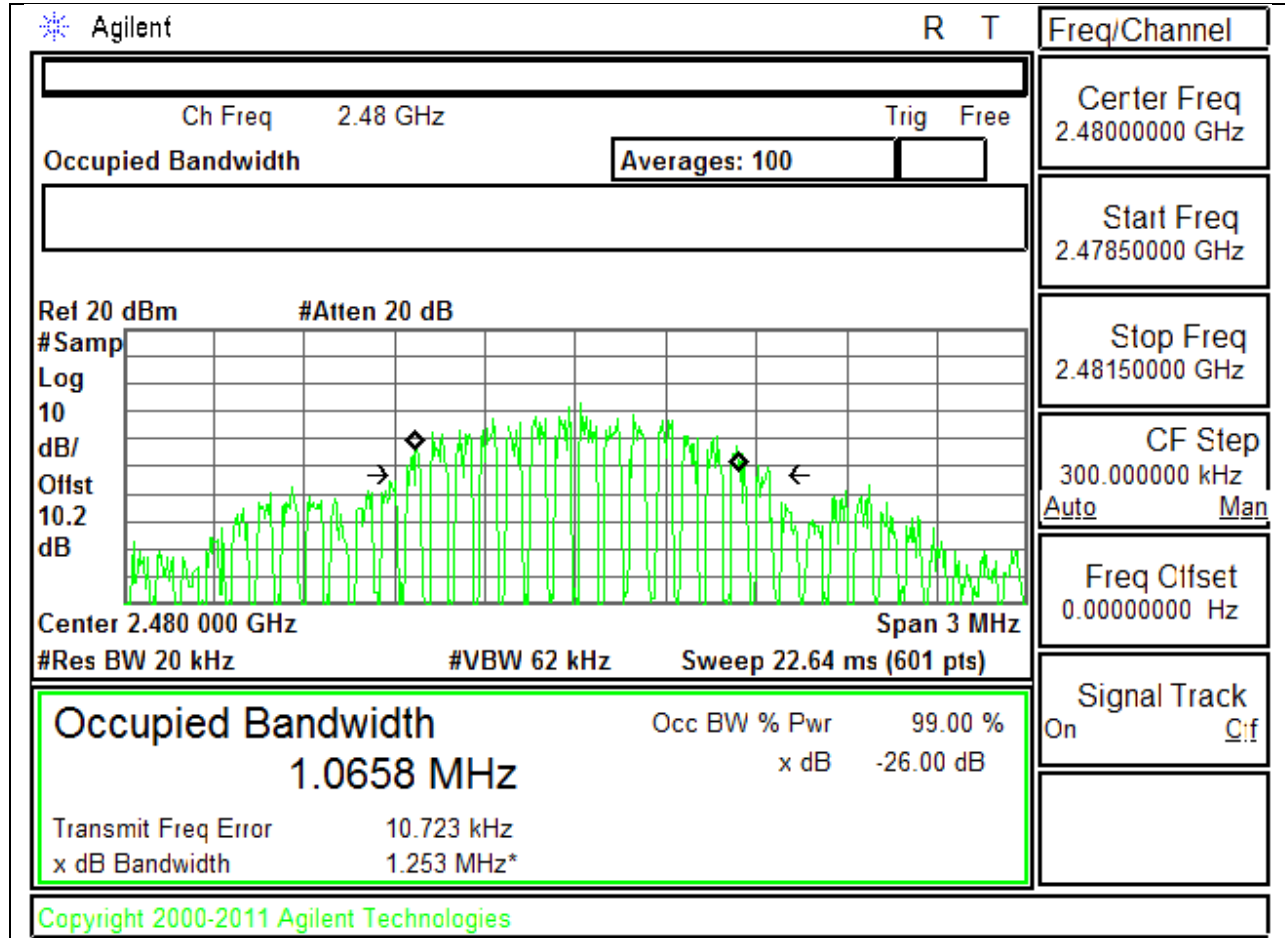

8.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE


Peak power is measured using KDB558074 D01 DTS Meas Guidance v03r02 under section 9.1.1 utilizing spectrum analyze.

RESULTS


Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	1.660	30	-28.340
Middle	2440	1.410	30	-28.590
High	2480	0.450	30	-29.550

OUTPUT POWER PLOTS


LOW CHANNEL

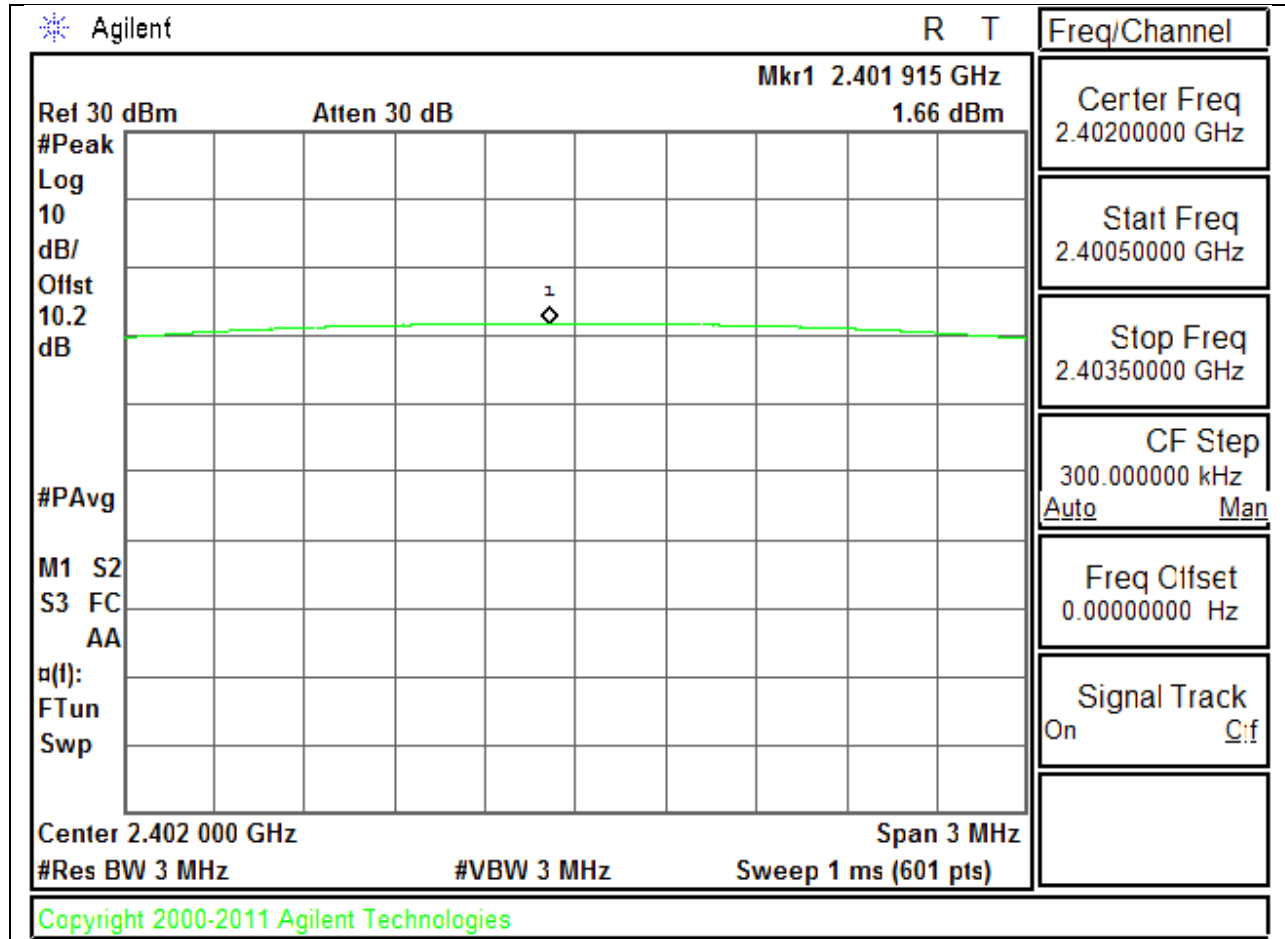

MID CHANNEL

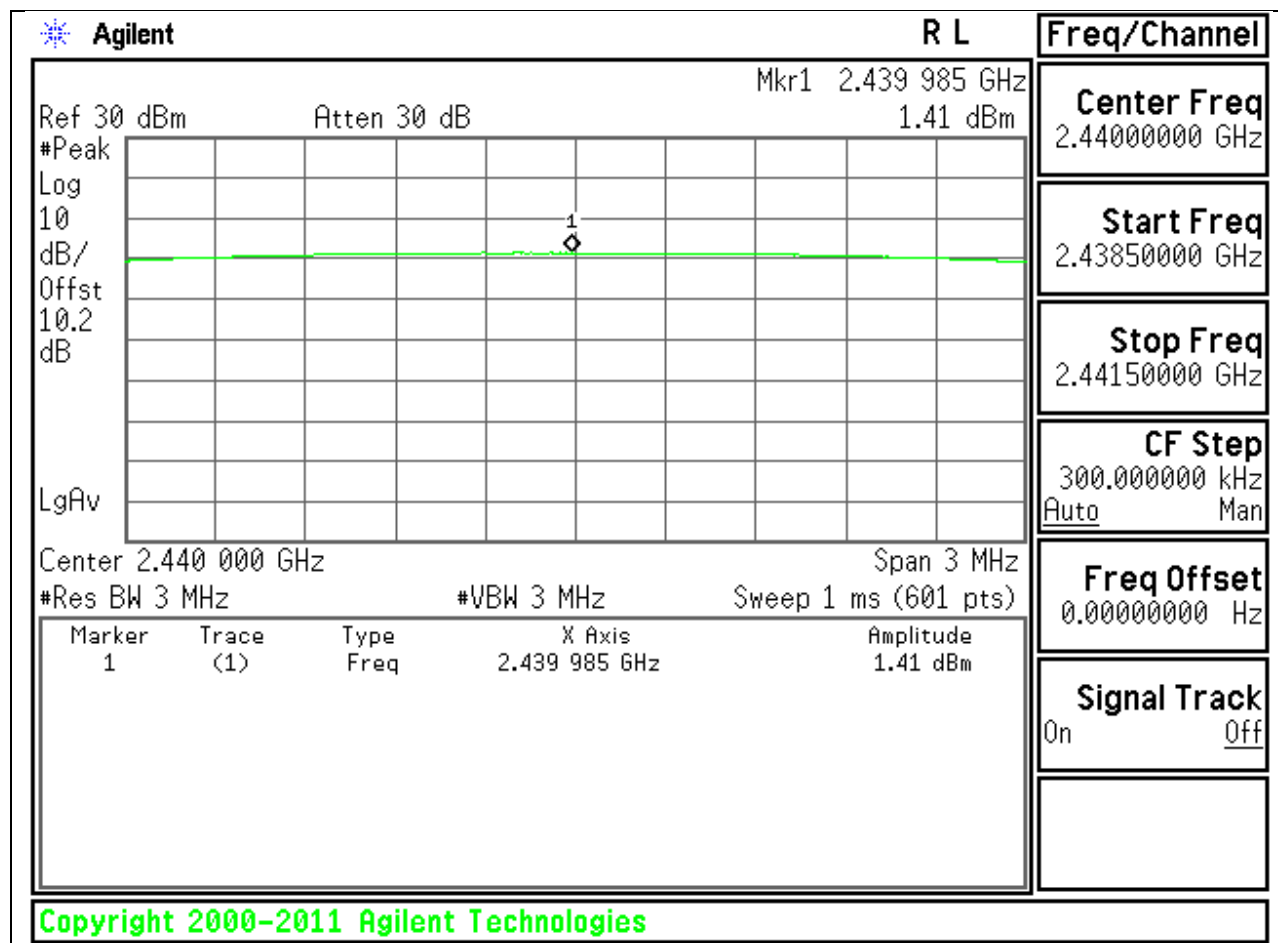

HIGH CHANNEL

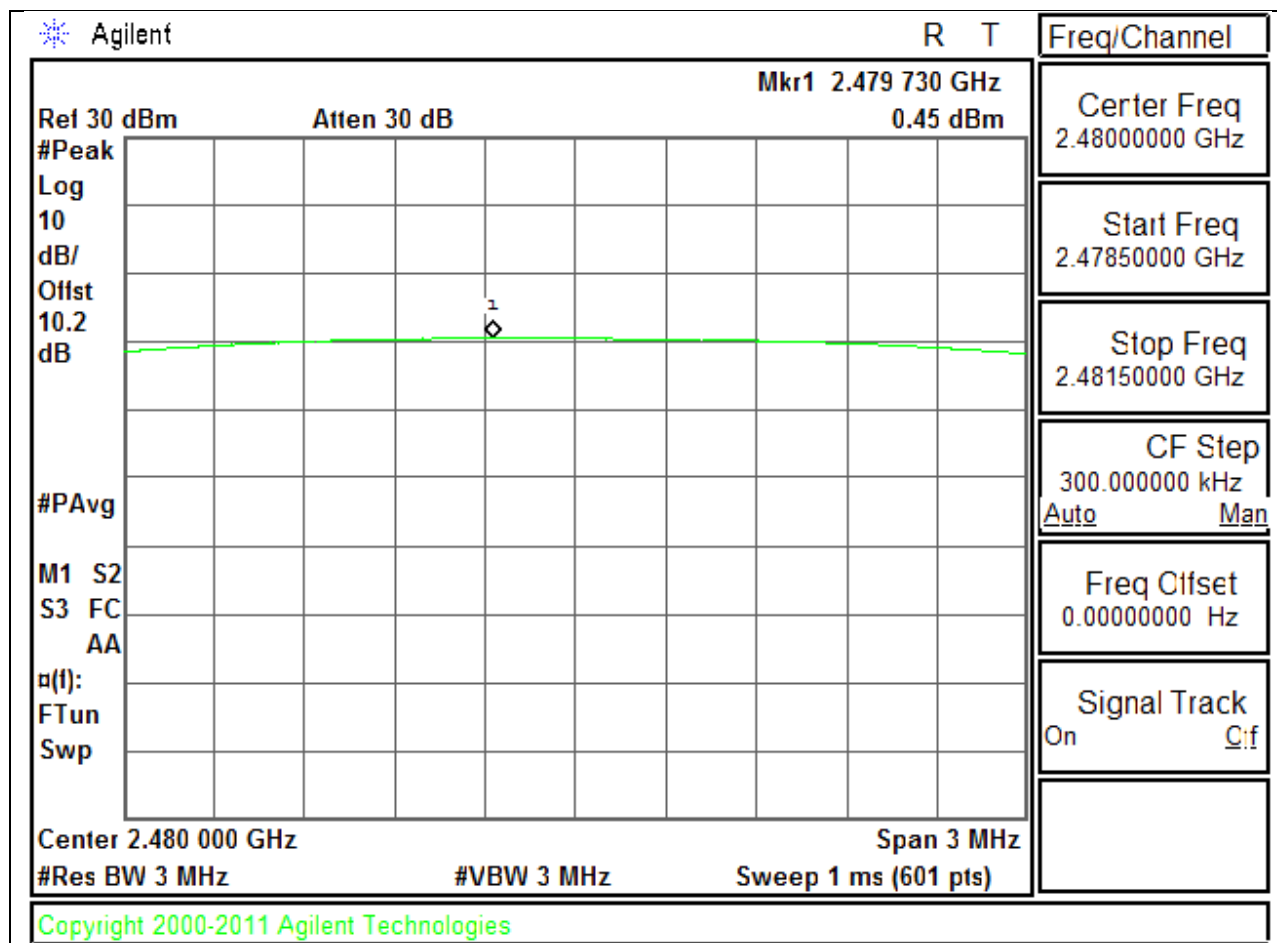

8.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	1.13
Middle	2440	1.06
High	2480	0.16

8.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE


Power Spectral Density was performed utilizing the "Method PKPSD (Peak PSD)" under KDB558074 D01 DTS Meas Guidance v03r02

RESULTS


Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-13.64	8	-21.64
Middle	2440	-13.70	8	-21.70
High	2480	-14.76	8	-22.76

POWER SPECTRAL DENSITY PLOTS


LOW CHANNEL

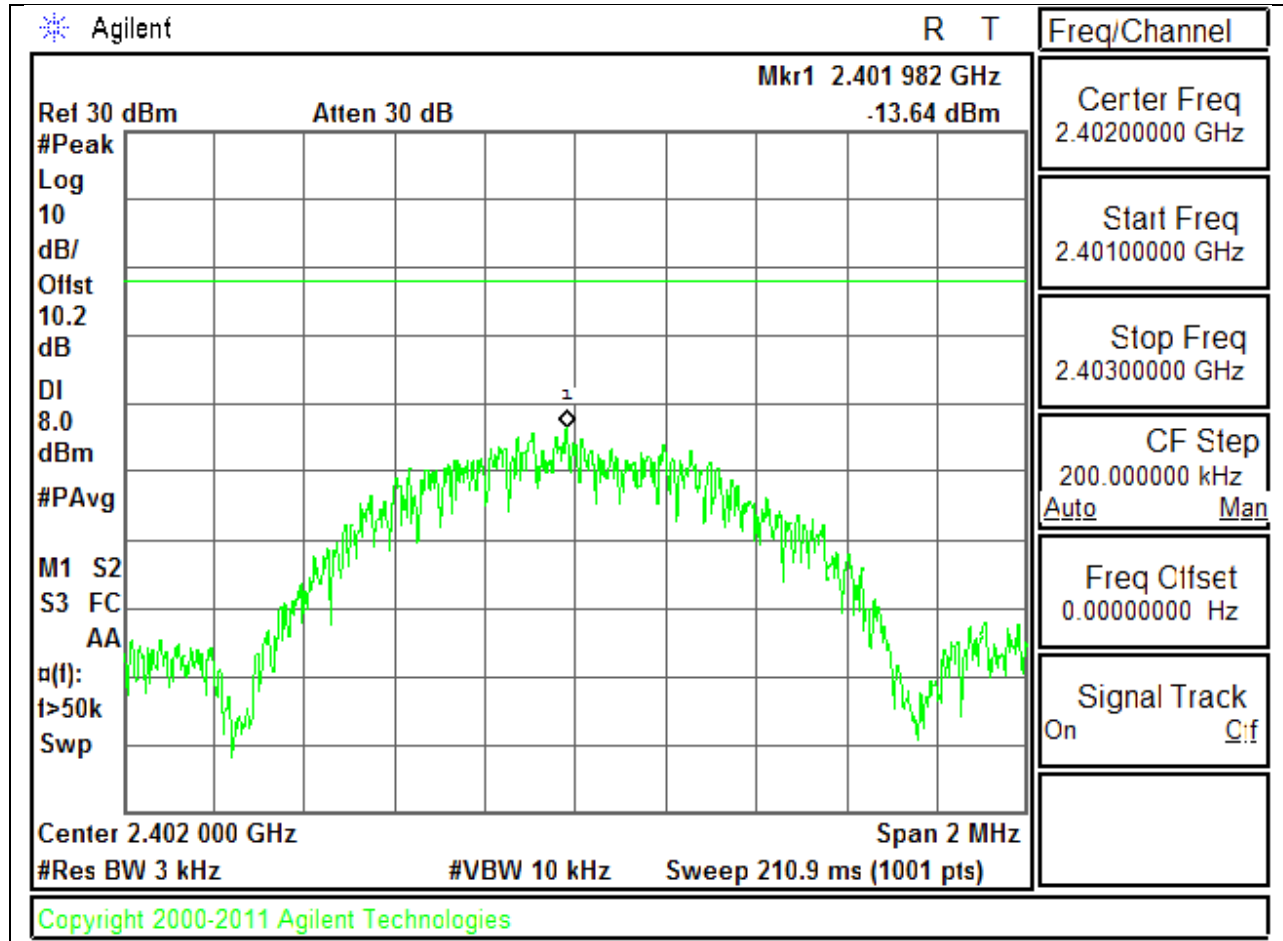

MID CHANNEL

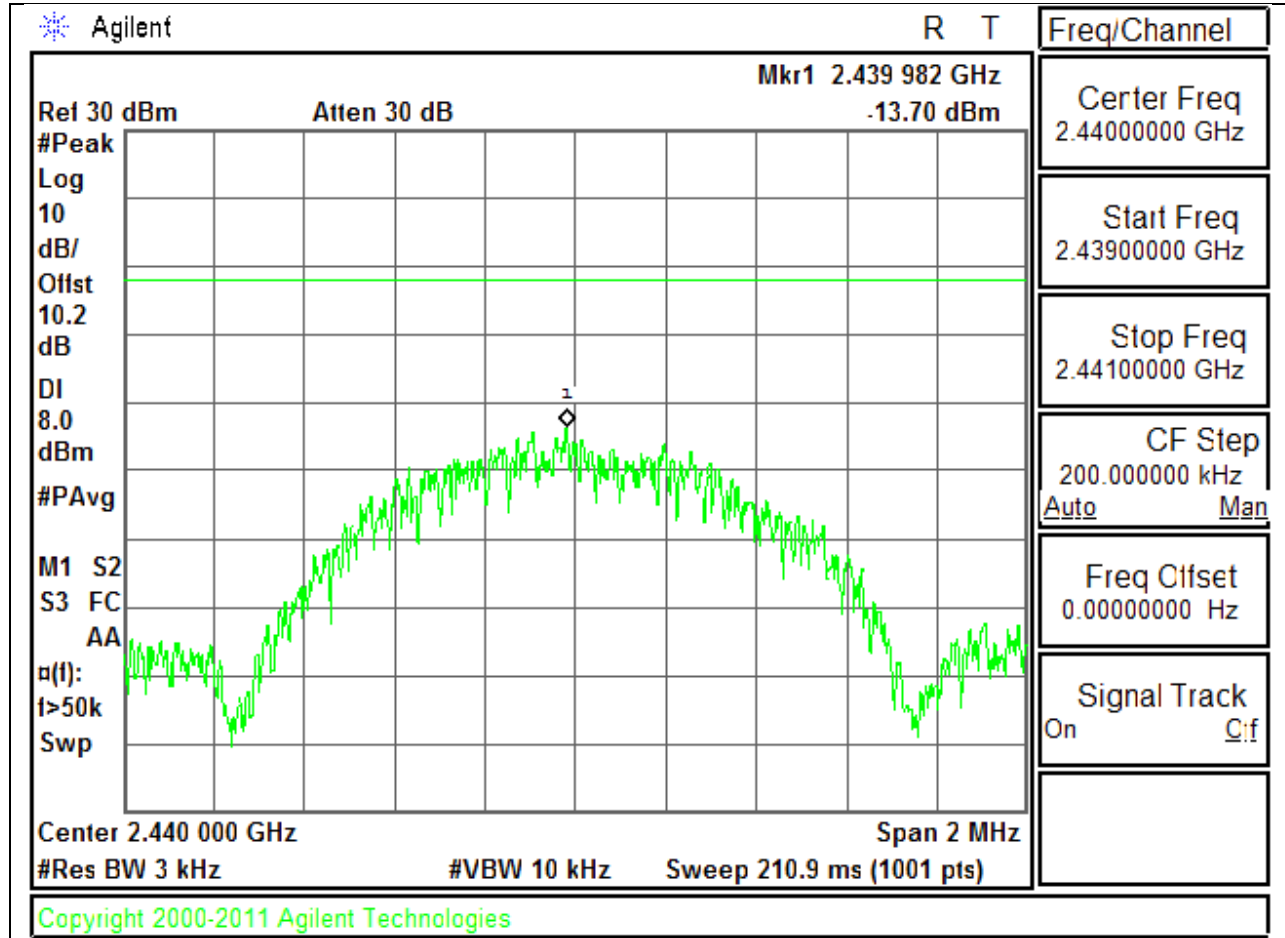

HIGH CHANNEL

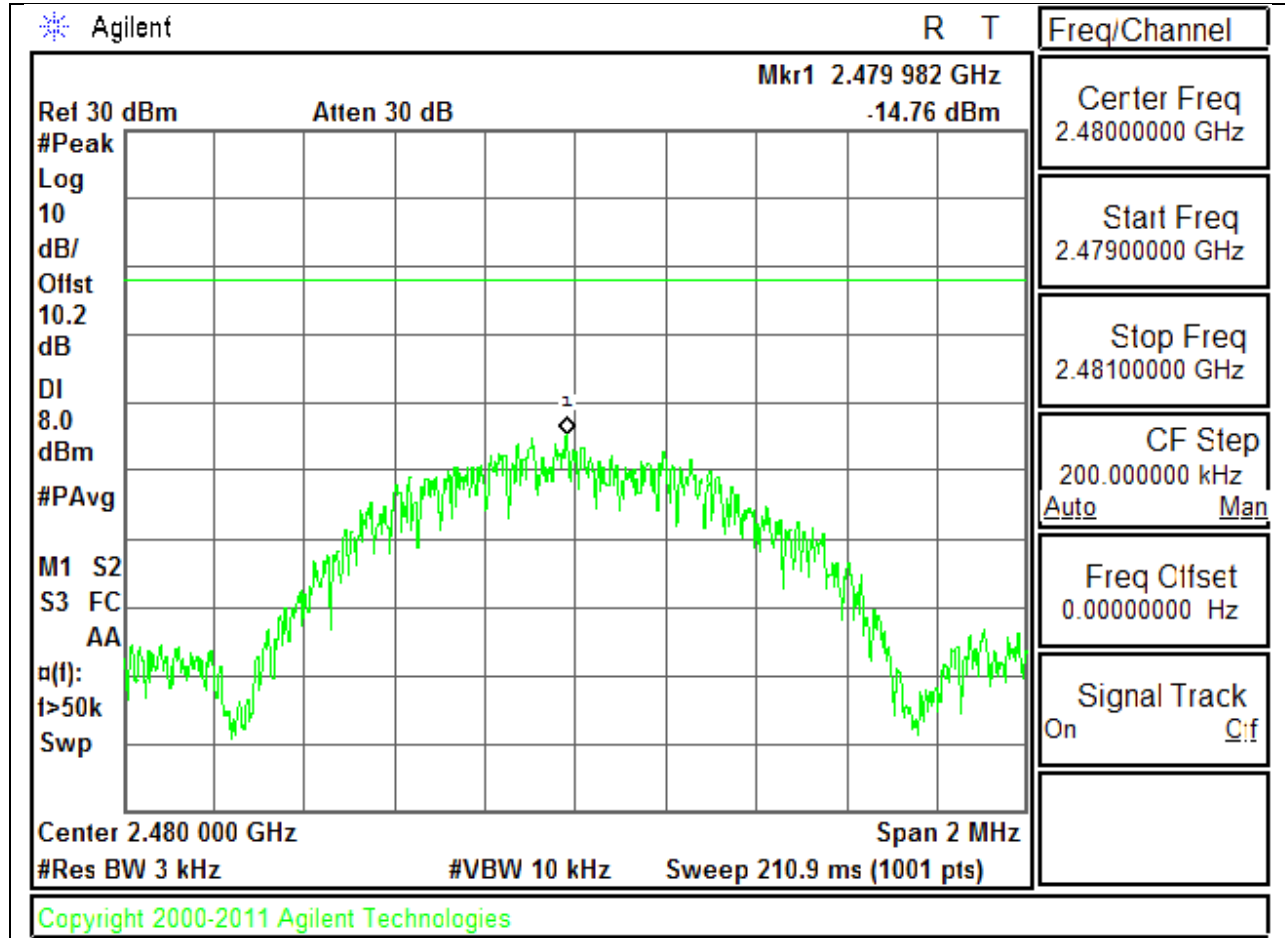

8.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS

SPURIOUS EMISSIONS, LOW CHANNEL

LOW CHANNEL BANDEDGE

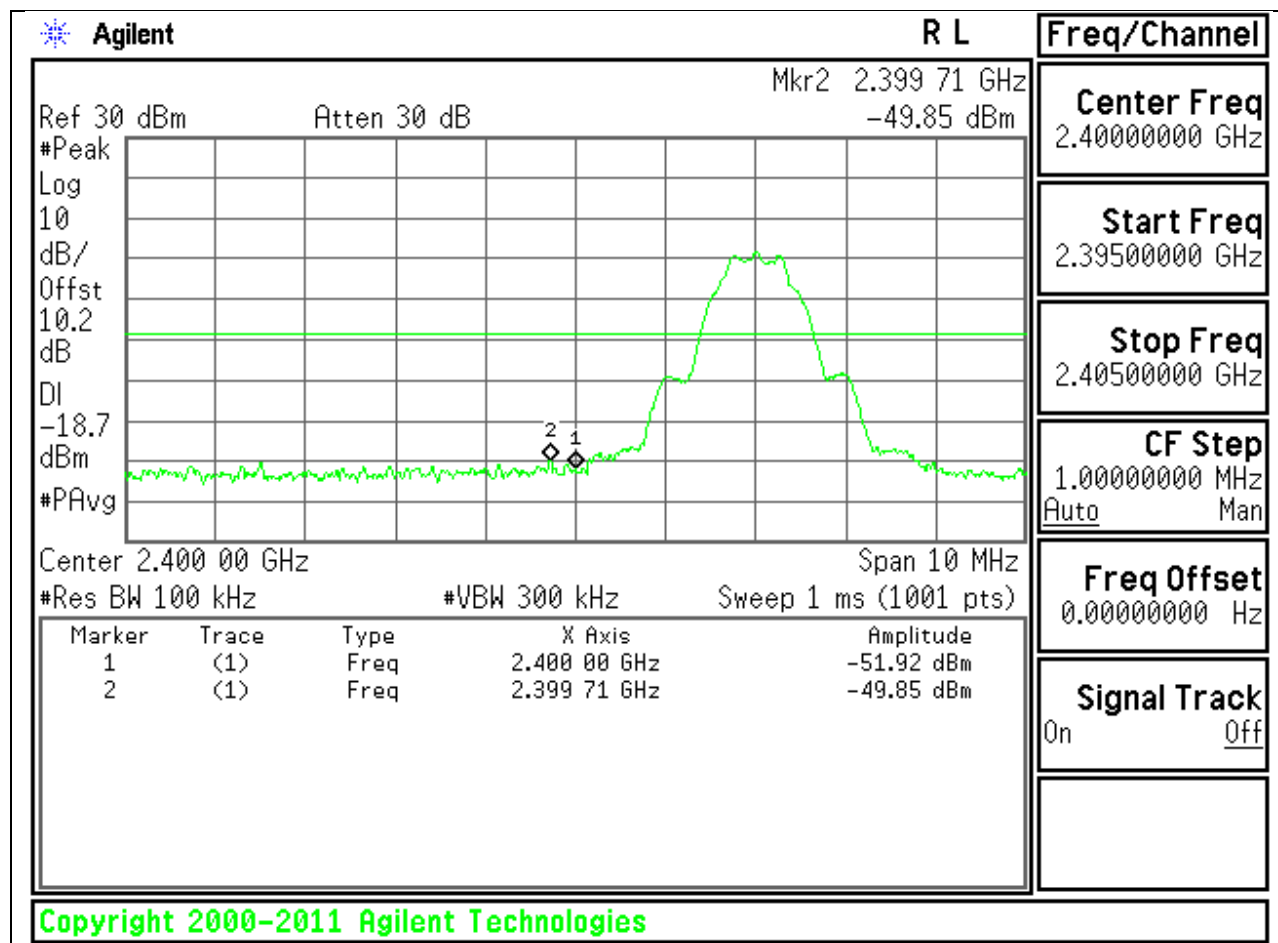


LOW CHANNEL SPURIOUS

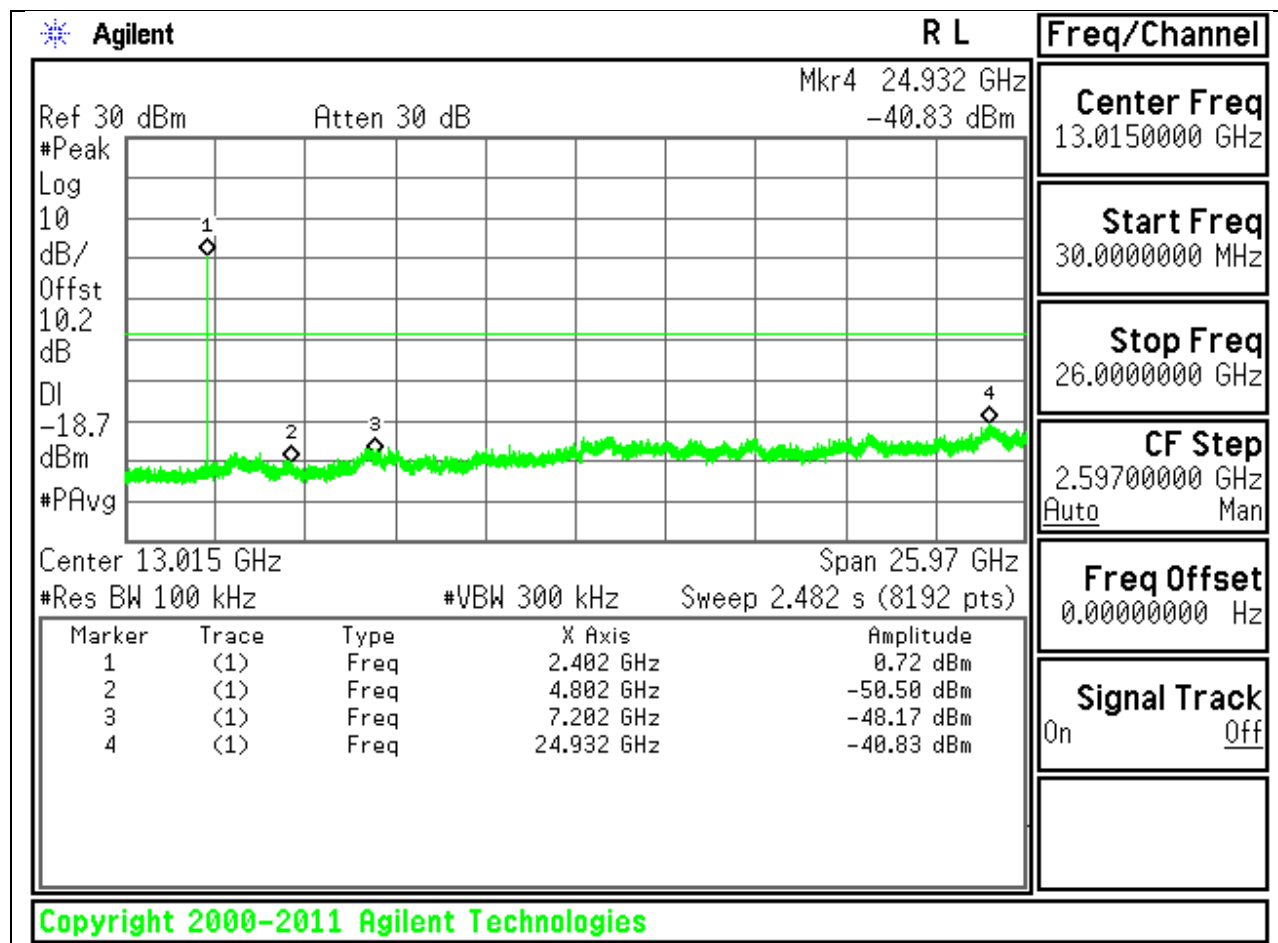


SPURIOUS EMISSIONS, MID CHANNEL

MID CHANNEL REFERENCE

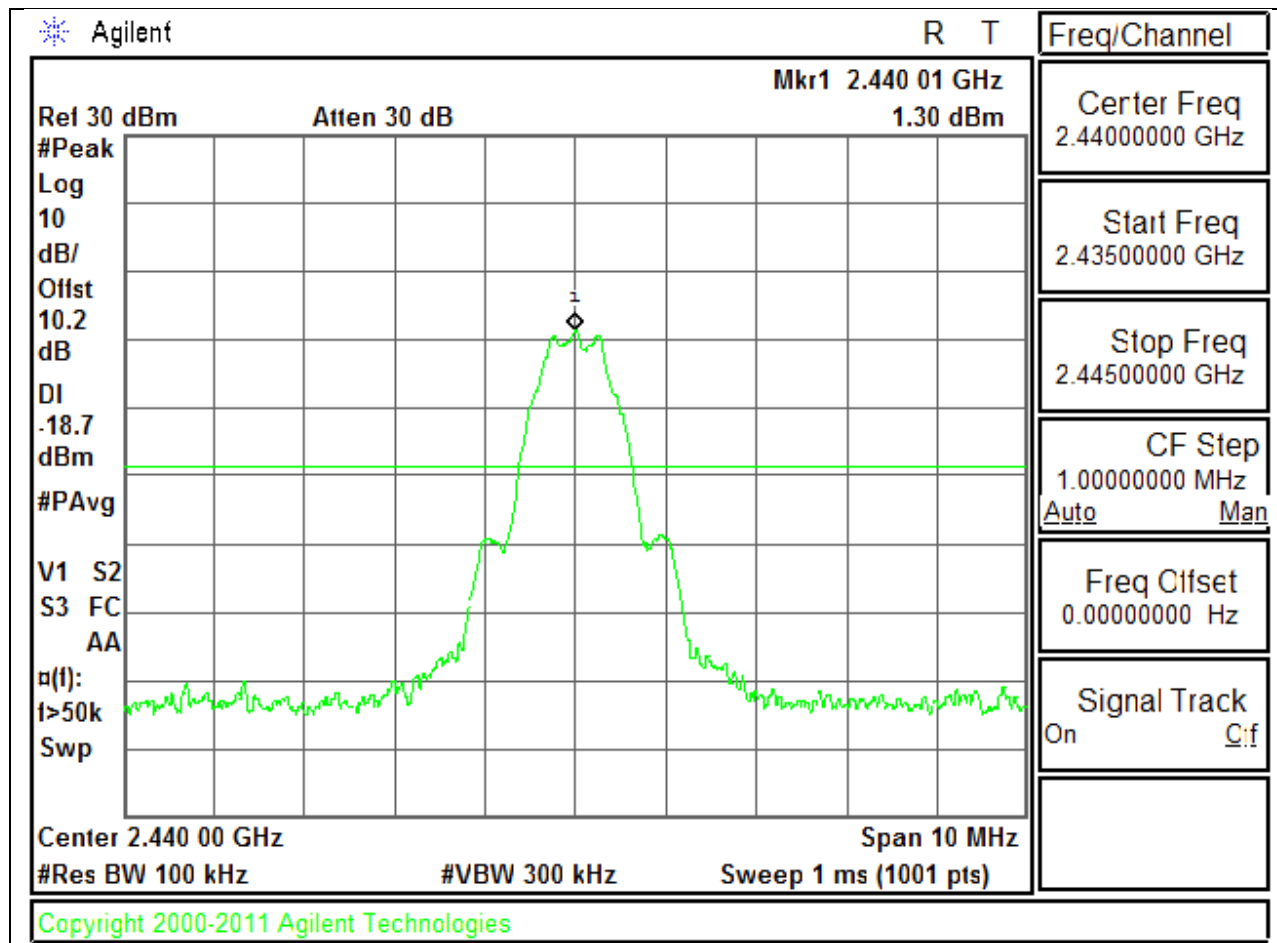


MID CHANNEL SPURIOUS

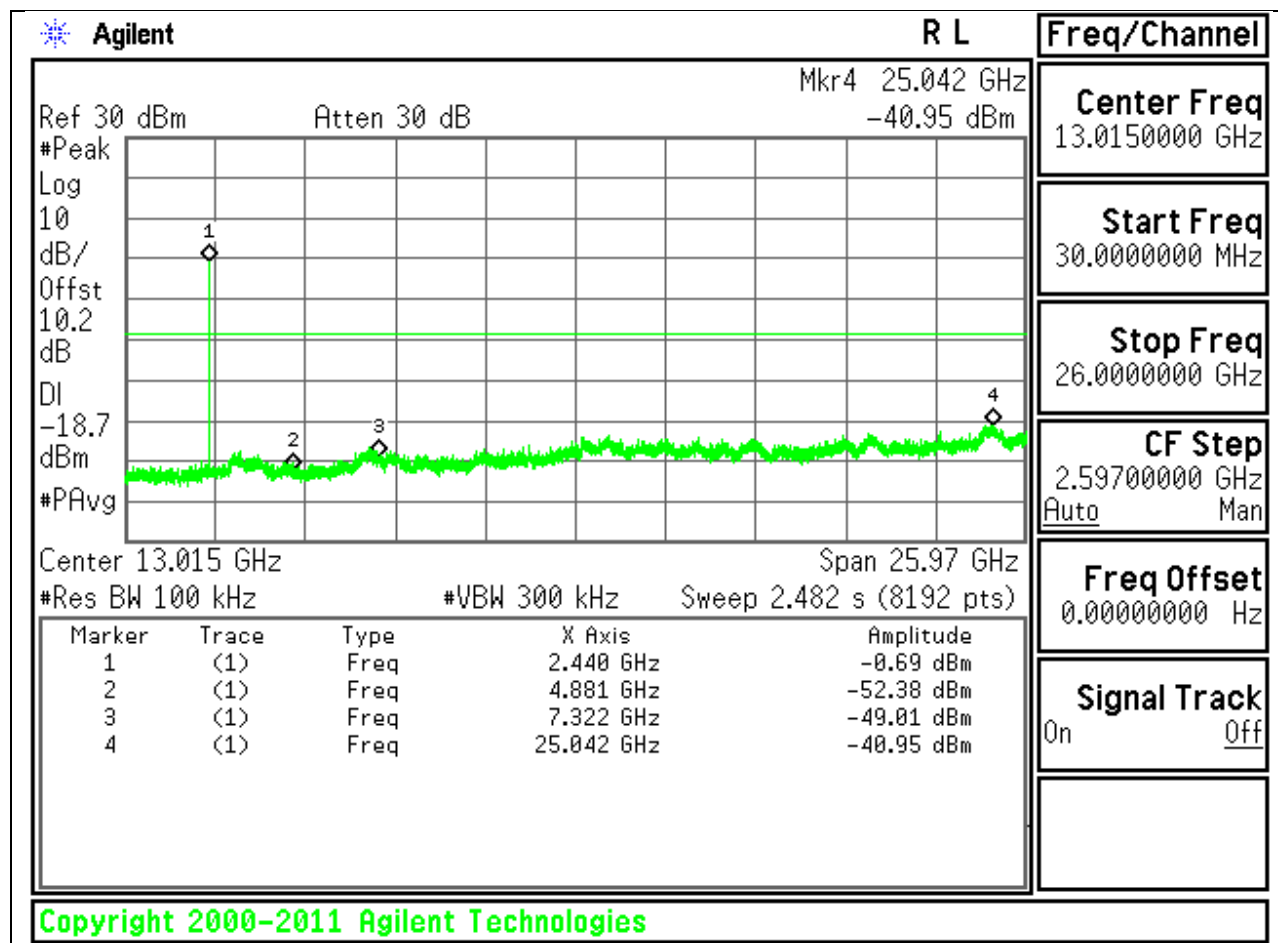


SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

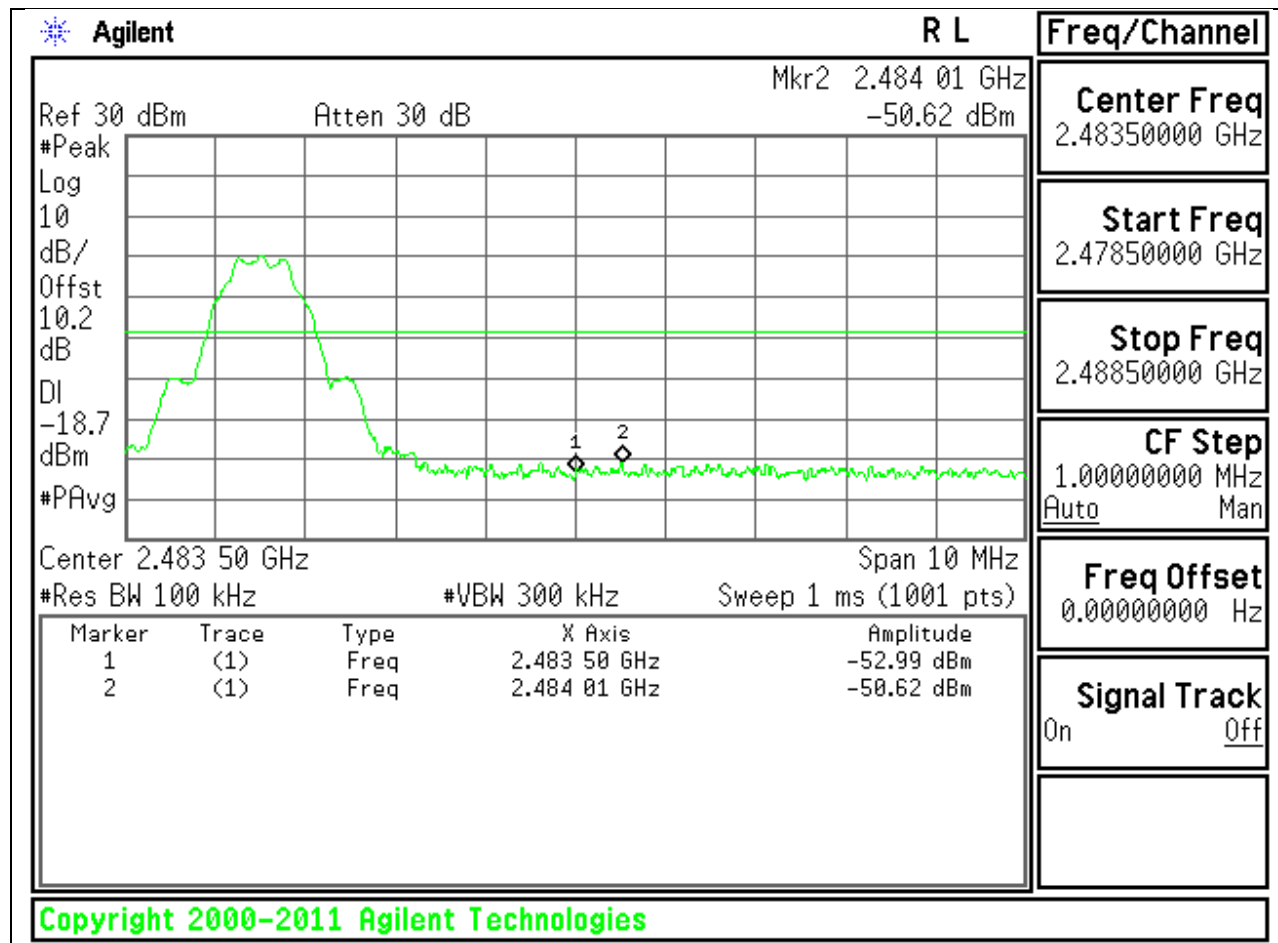

HIGH CHANNEL SPURIOUS

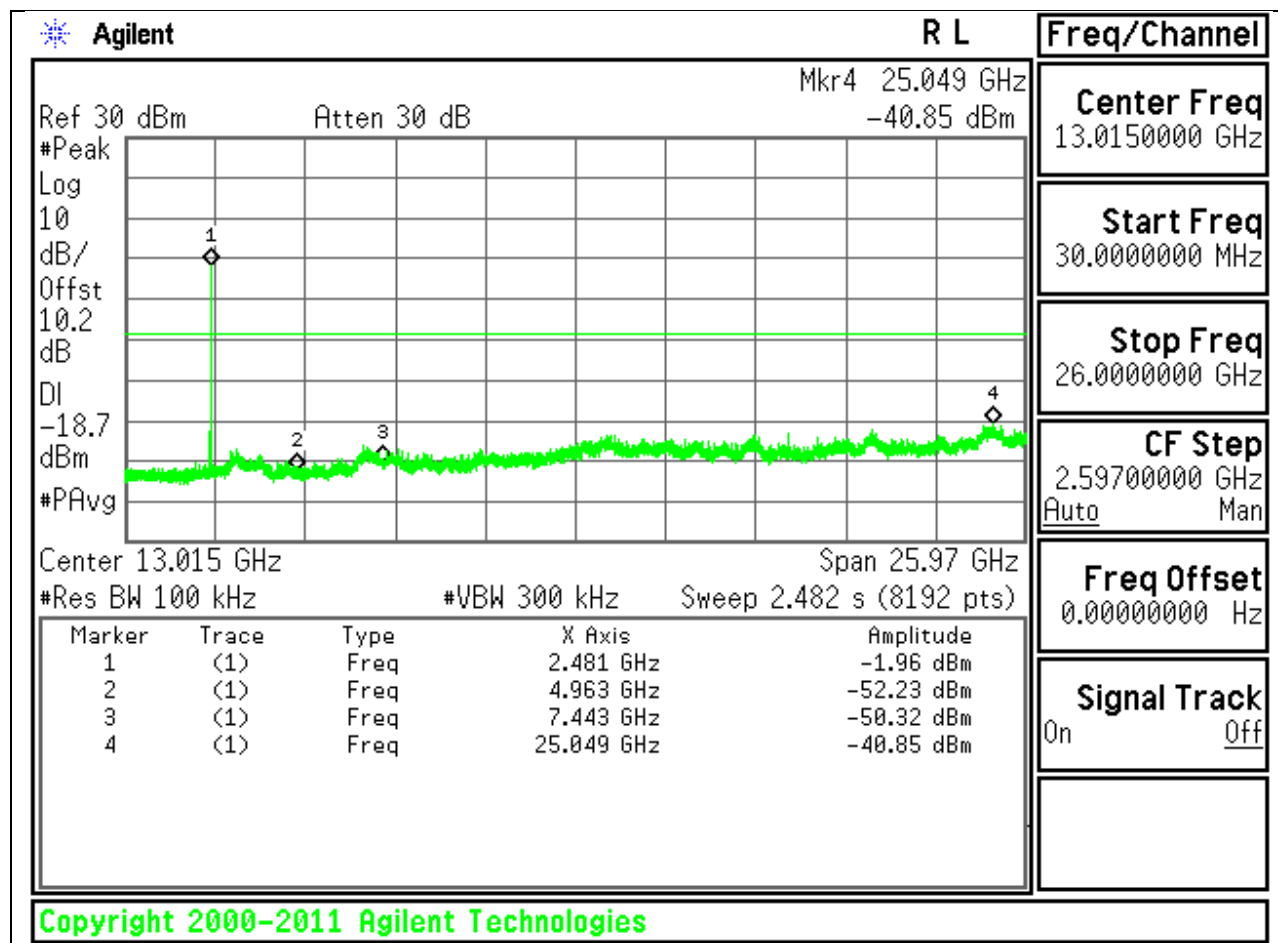

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-GEN Clause 8.9 (Transmitter)

IC RSS-GEN Clause 7 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4 - 2009. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor = $10 \log (1/x)$. For this sample: $DCF = 10 \log(1/0.618) = 2.08 \text{ dB}$

(Spectrum Analyzer round it up to 2.1dB)


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz RESTRICTED BANDEDGE (LOW CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

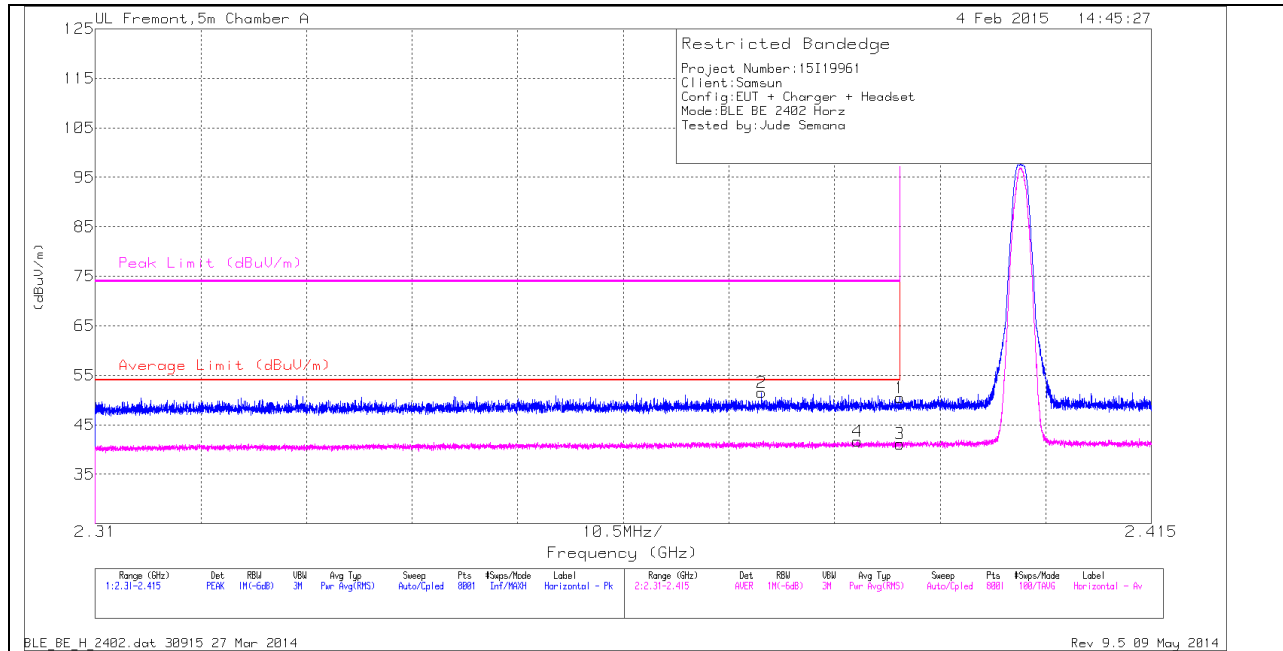

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	40.51	PK	32.2	-22.2	0	50.51	-	-	74	-23.49	73	190	H
2	2.376	41.64	PK	32.1	-22.2	0	51.54	-	-	74	-22.46	73	190	H
3	2.39	29.08	RMS	32.2	-22.2	2.1	41.18	54	-12.82	-	-	73	190	H
4	2.386	29.65	RMS	32.2	-22.2	2.1	41.75	54	-12.25	-	-	73	190	H

VERTICAL PEAK AND AVERAGE PLOT

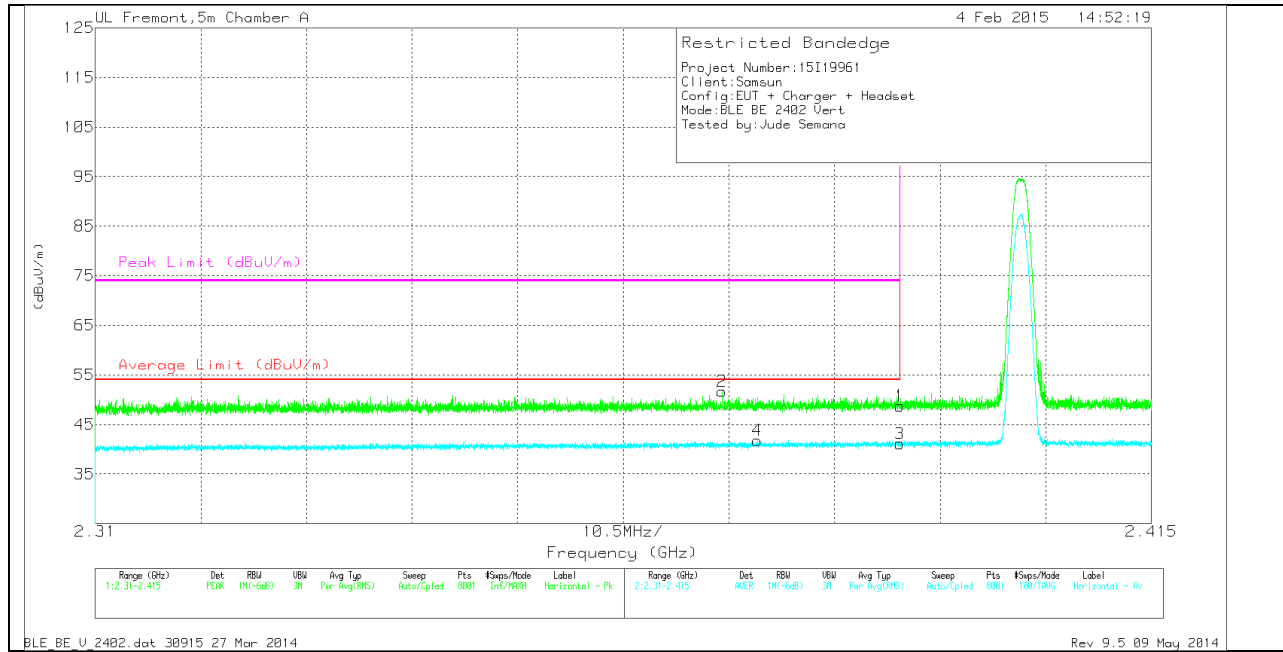


VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	38.74	PK	32.2	-22.2	0	48.74	-	-	74	-25.26	71	190	V
2	2.372	41.67	PK	32.1	-22.1	0	51.67	-	-	74	-22.33	71	190	V
3	2.39	29.07	RMS	32.2	-22.2	2.1	41.17	54	-12.83	-	-	71	190	V
4	2.376	29.81	RMS	32.1	-22.2	2.1	41.81	54	-12.19	-	-	71	190	V

AUTHORIZED BANDEDGE (HIGH CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

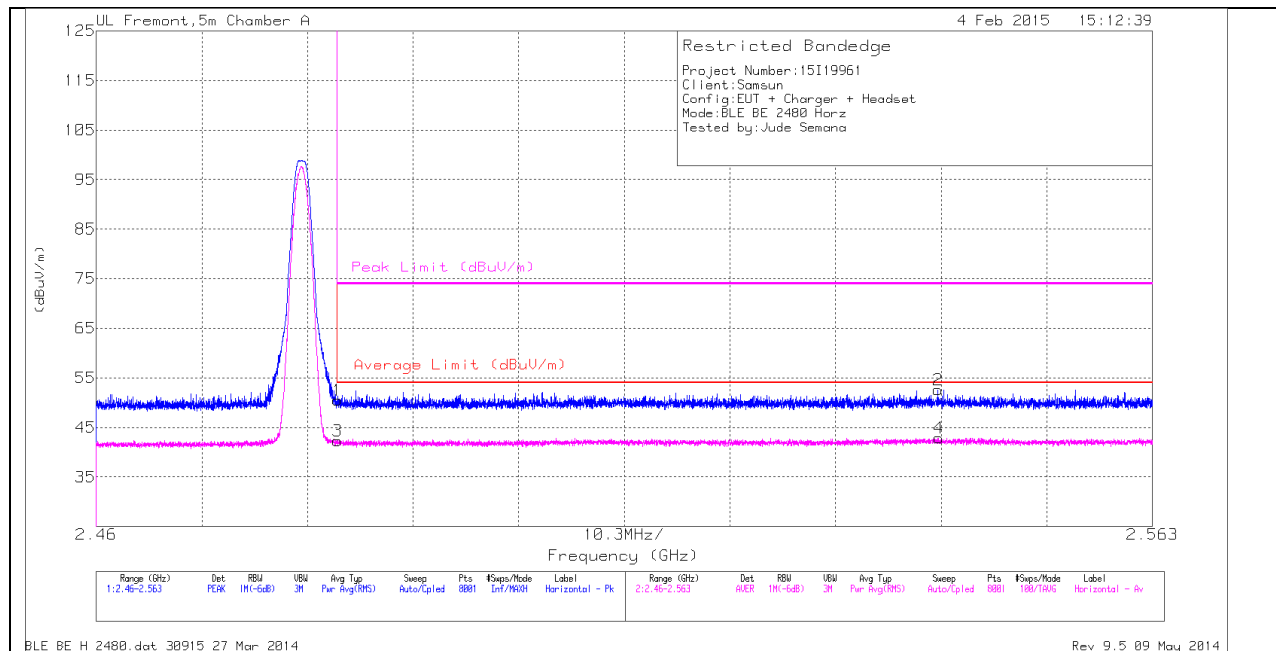

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	39.73	PK	32.7	-21.9	0	50.53	-	-	74	-23.47	73	285	H
2	2.542	41.3	PK	32.9	-21.6	0	52.6	-	-	74	-21.4	73	285	H
3	2.484	29.45	RMS	32.7	-21.9	2.1	42.35	54	-11.65	-	-	73	285	H
4	2.542	29.5	RMS	32.9	-21.6	2.1	42.9	54	-11.1	-	-	73	285	H

VERTICAL PEAK AND AVERAGE PLOT

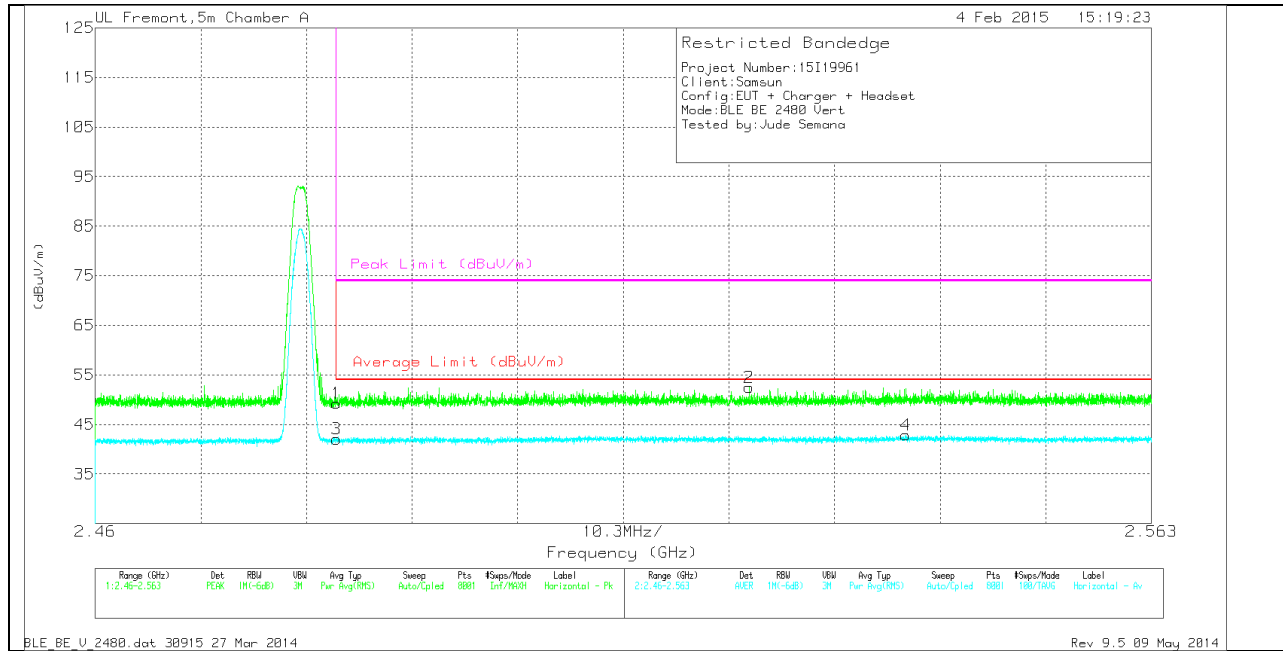


VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	38.44	PK	32.7	-21.9	0	49.24	-	-	74	-24.76	71	179	V
2	2.524	41.5	PK	32.9	-21.9	0	52.5	-	-	74	-21.5	71	179	V
3	2.484	29.2	RMS	32.7	-21.9	2.1	42.1	54	-11.9	-	-	71	179	V
4	2.539	29.48	RMS	32.9	-21.6	2.1	42.88	54	-11.12	-	-	71	179	V


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

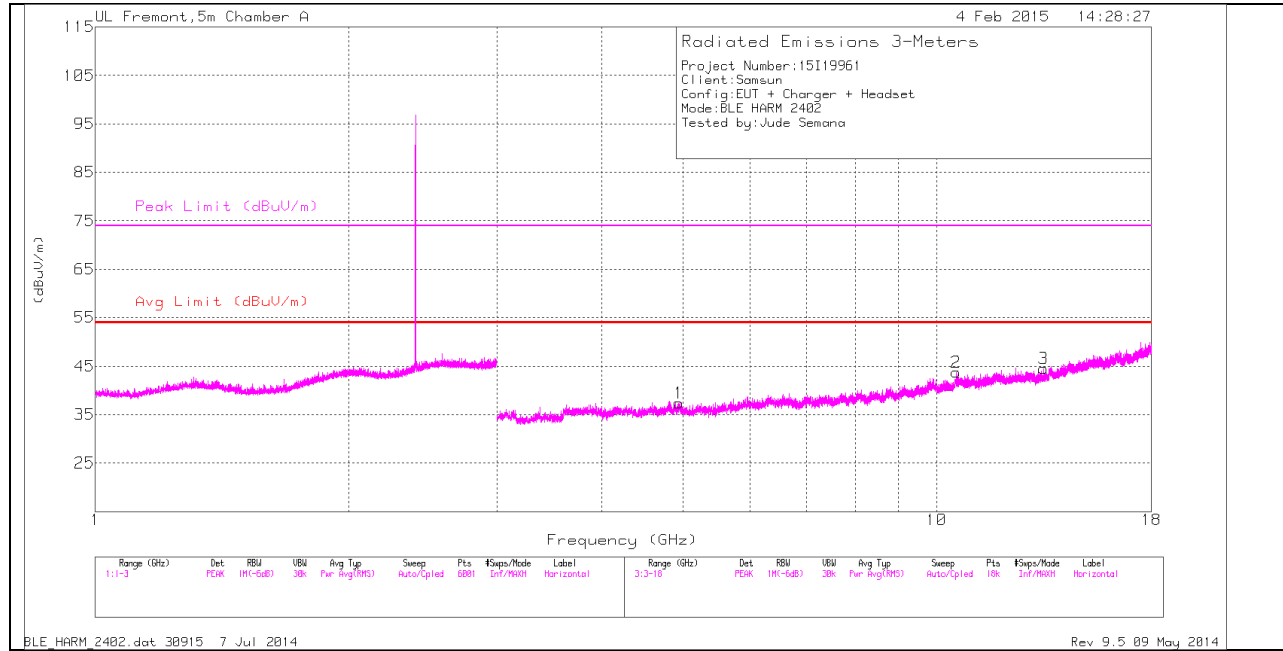

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

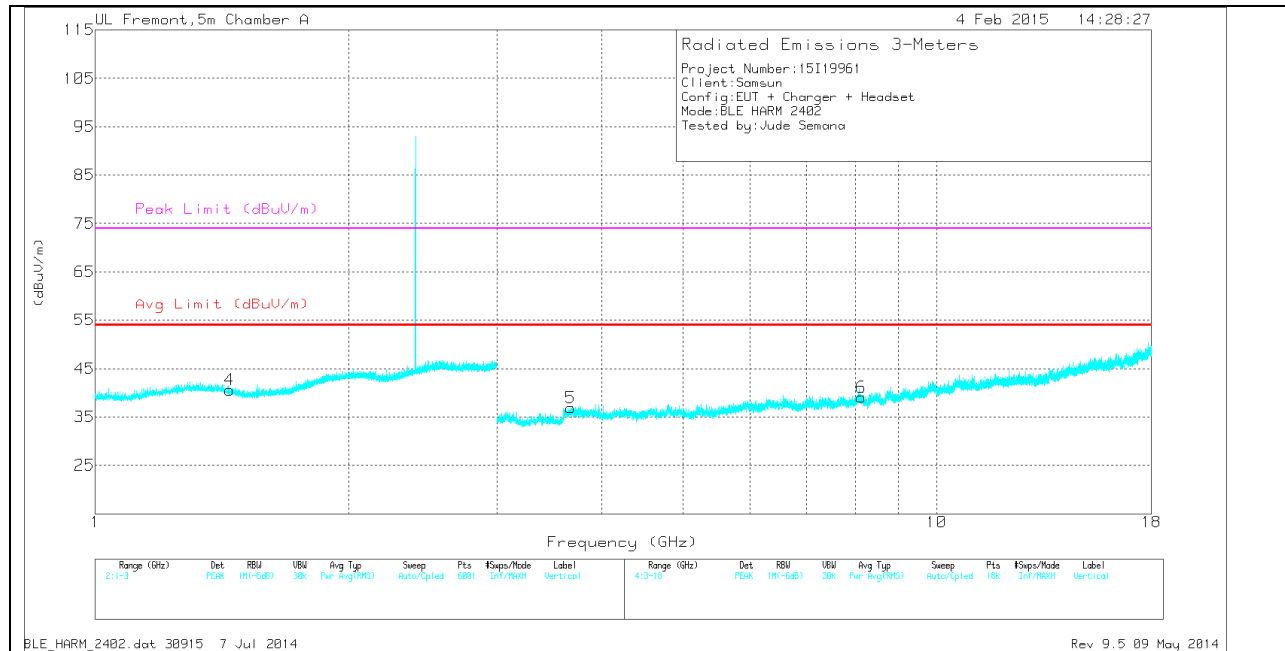

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Filt /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	1.444	35.19	PK	29.3	-23.9	0	40.59	-	-	74	-33.41	0-360	100	V
1	4.938	30.99	PK	33.9	-27.5	0	37.39	-	-	74	-36.61	0-360	201	H
2	10.555	27.16	PK	37.6	-21	0	43.76	-	-	-	-	0-360	100	H
3	13.399	26.81	PK	39	-21.3	0	44.51	-	-	74	-29.49	0-360	100	H
5	3.674	33.4	PK	33.3	-29.8	0	36.9	-	-	74	-37.1	0-360	100	V
6	8.139	27.56	PK	35.5	-24	0	39.06	-	-	74	-34.94	0-360	100	V


PK - Peak detector

MID CHANNEL HORIZONTAL

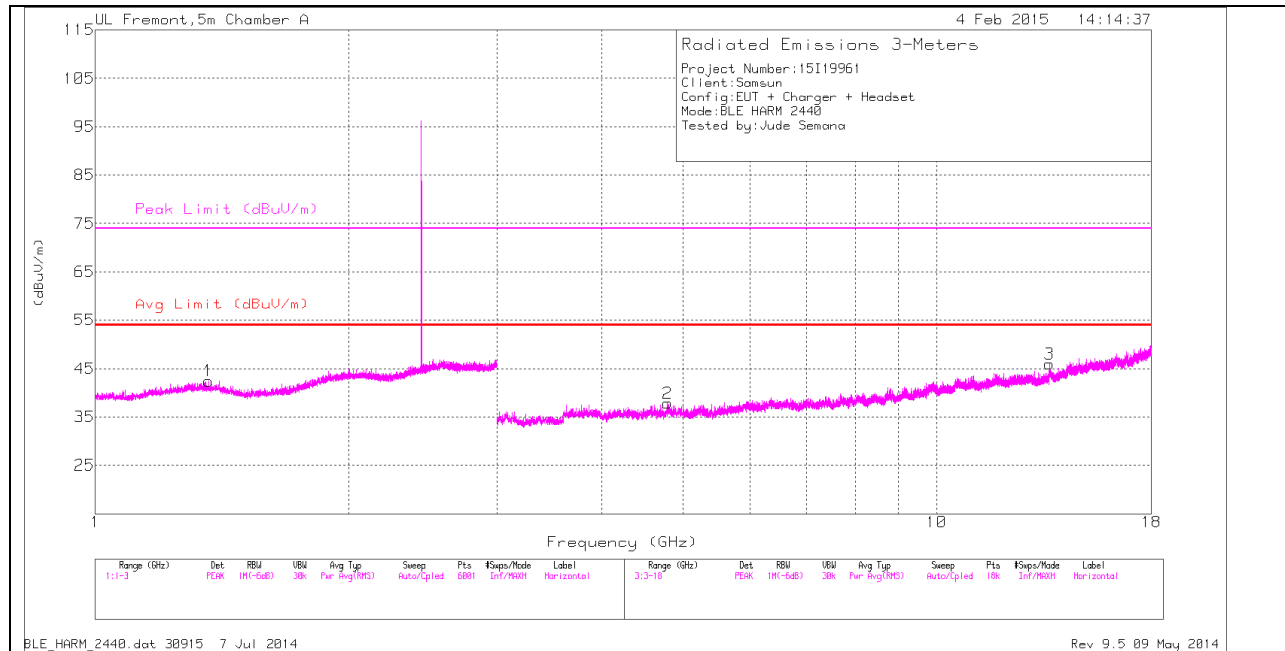

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

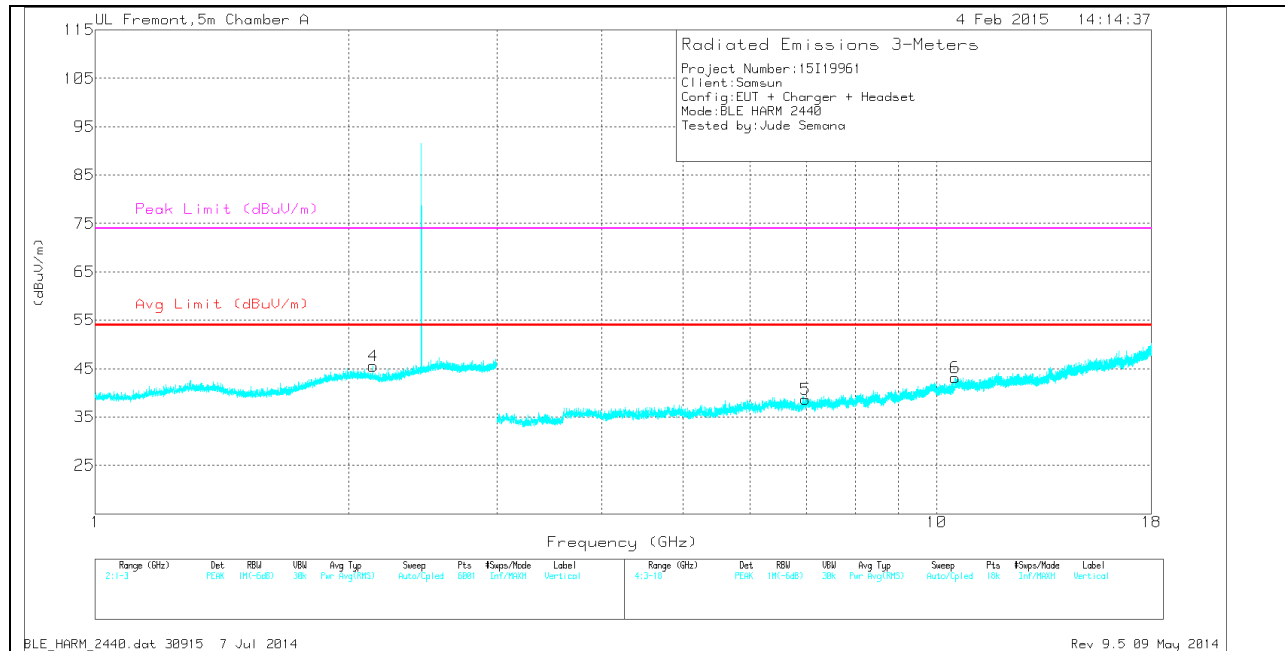

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.363	36.54	PK	30	-24.1	0	42.44	-	-	74	-31.56	0-360	201	H
4	2.138	36.64	PK	31.6	-22.7	0	45.54	-	-	-	-	0-360	100	V
2	4.787	32.46	PK	34	-28.6	0	37.86	-	-	74	-36.14	0-360	201	H
3	13.613	28.39	PK	38.8	-21.2	0	45.99	-	-	-	-	0-360	100	H
5	6.981	28.85	PK	35.3	-25.5	0	38.65	-	-	-	-	0-360	100	V
6	10.516	27.13	PK	37.5	-21.5	0	43.13	-	-	-	-	0-360	201	V


PK - Peak detector

HIGH CHANNEL HORIZONTAL

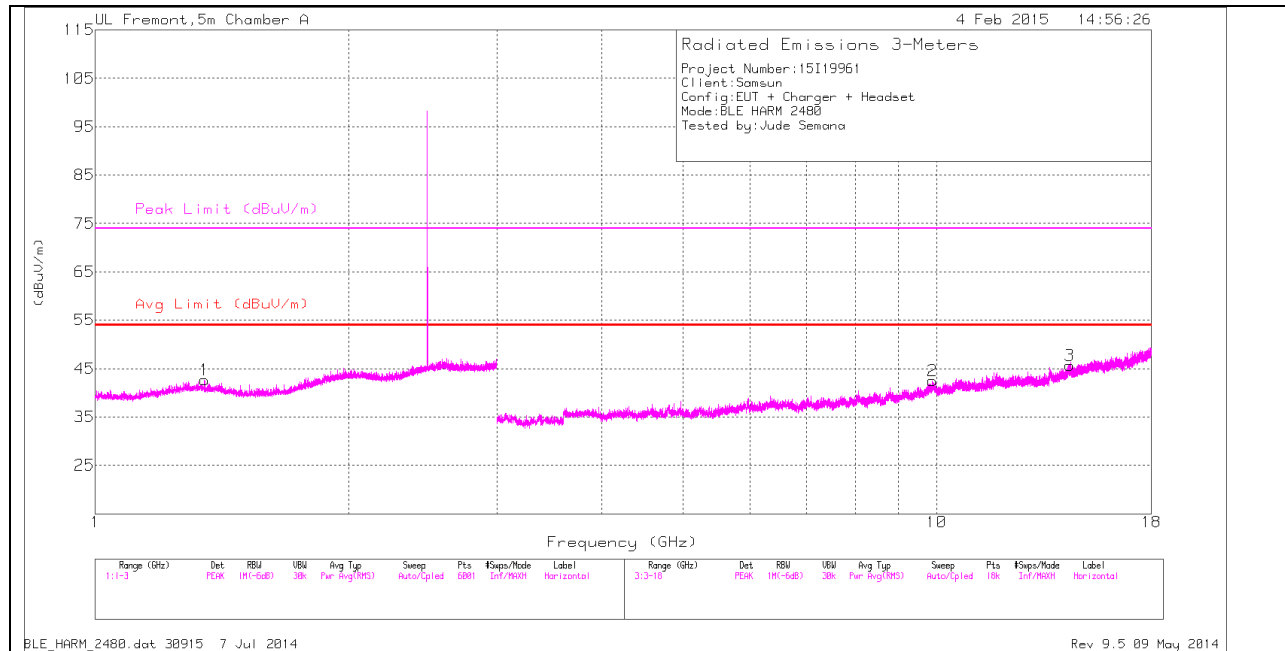

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

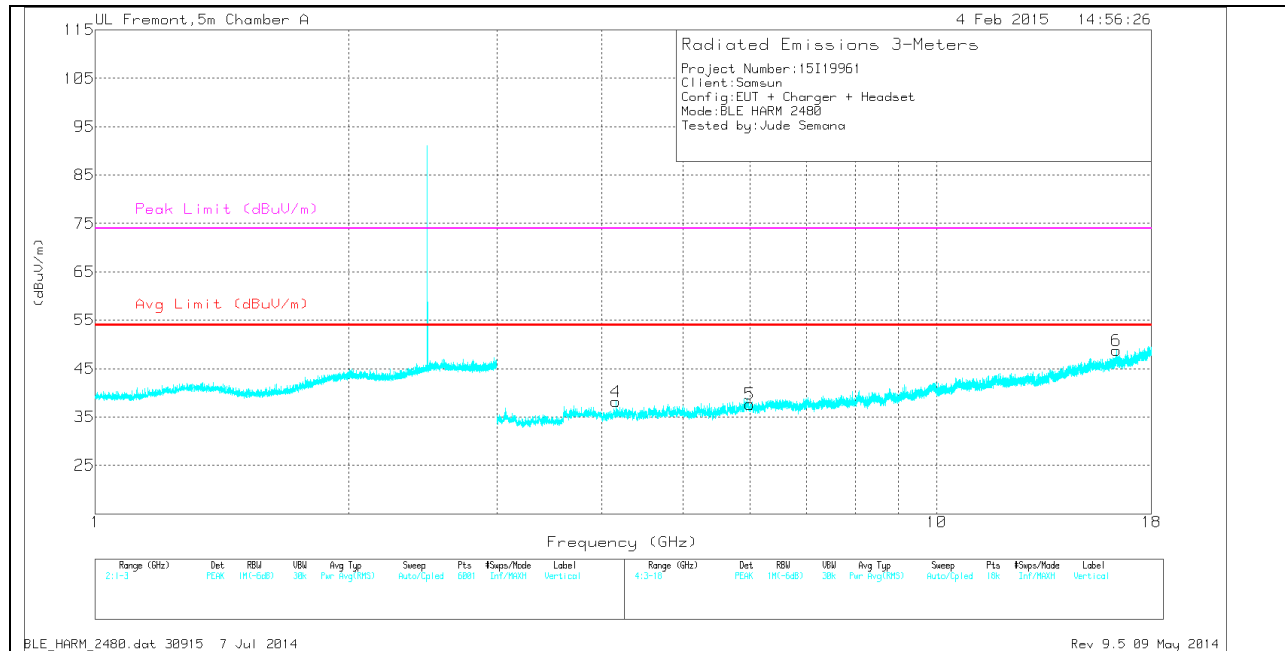

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.348	36.72	PK	30	-24.1	0	42.62	-	-	74	-31.38	0-360	201	H
2	9.884	27.07	PK	37	-21.6	0	42.47	-	-	-	-	0-360	201	H
3	14.397	26.58	PK	39.8	-20.7	0	45.68	-	-	-	-	0-360	201	H
4	4.159	33.6	PK	33.9	-29.3	0	38.2	-	-	74	-35.8	0-360	100	V
5	6.001	30.04	PK	35.3	-27.7	0	37.64	-	-	-	-	0-360	201	V
6	16.353	26.75	PK	40.7	-18.7	0	48.75	-	-	-	-	0-360	201	V

PK - Peak detector


9.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL PLOT

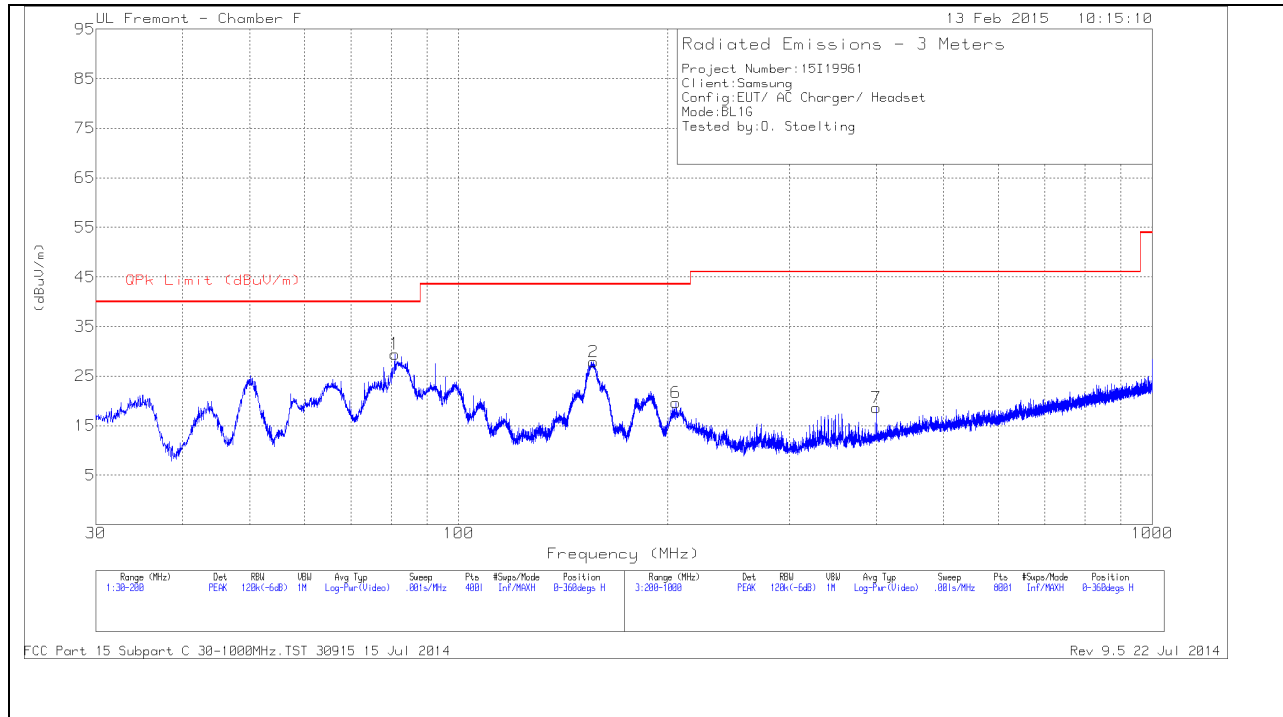

VERTICAL PLOT

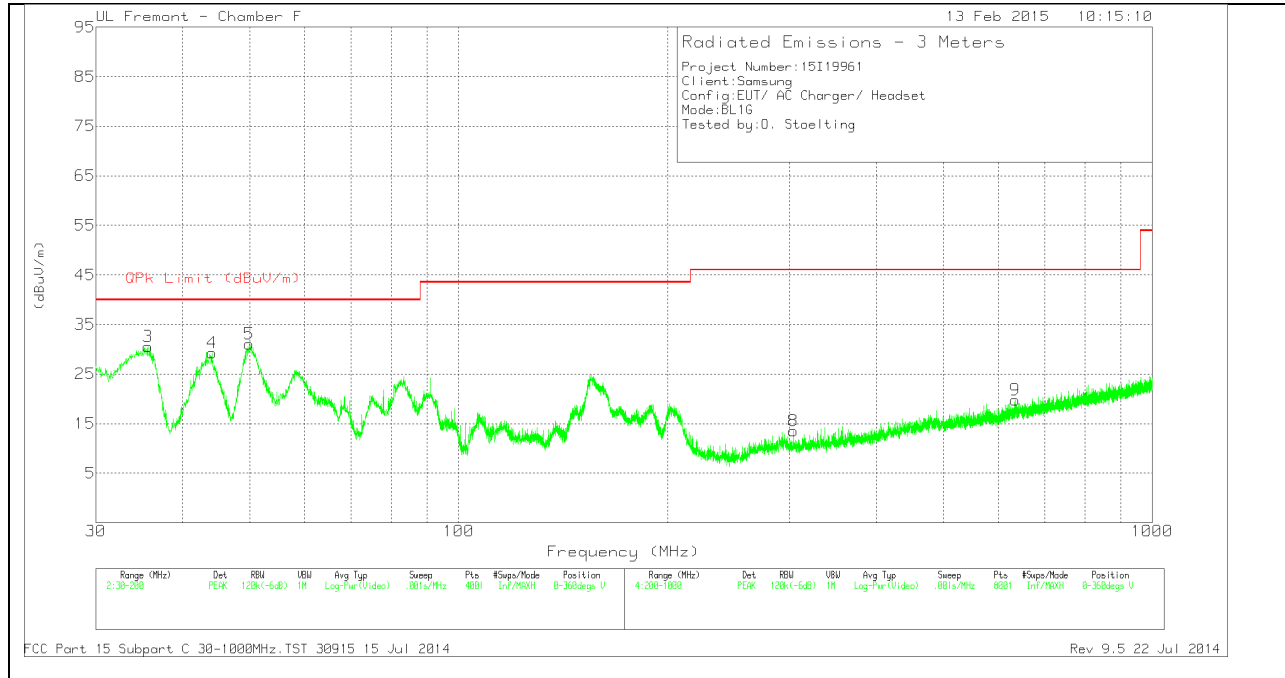

BELOW 1 GHz TABLE

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	80.8725	53.57	PK	7.6	-31.7	29.47	40	-10.53	0-360	401	H
2	156.395	46.8	PK	12.4	-31.3	27.9	43.52	-15.62	0-360	201	H
3	35.6525	45.45	PK	17.1	-32	30.55	40	-9.45	0-360	100	V
4	44.1525	50.33	PK	10.8	-31.9	29.23	40	-10.77	0-360	100	V
5	49.89	54.98	PK	7.9	-31.8	31.08	40	-8.92	0-360	100	V
6	205.7	39.76	PK	10.9	-31	19.66	43.52	-23.86	0-360	100	H
7	* 400	33.51	PK	15.5	-30.4	18.61	46.02	-27.41	0-360	100	H
8	303.8	30.64	PK	13.5	-30.6	13.54	46.02	-32.48	0-360	100	V
9	634.7	29.95	PK	19.7	-29.9	19.75	46.02	-26.27	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.


TEST PROCEDURE

ANSI C63.4 - 2009

RESULTS

6 WORST EMISSIONS

LINE 1 PLOT

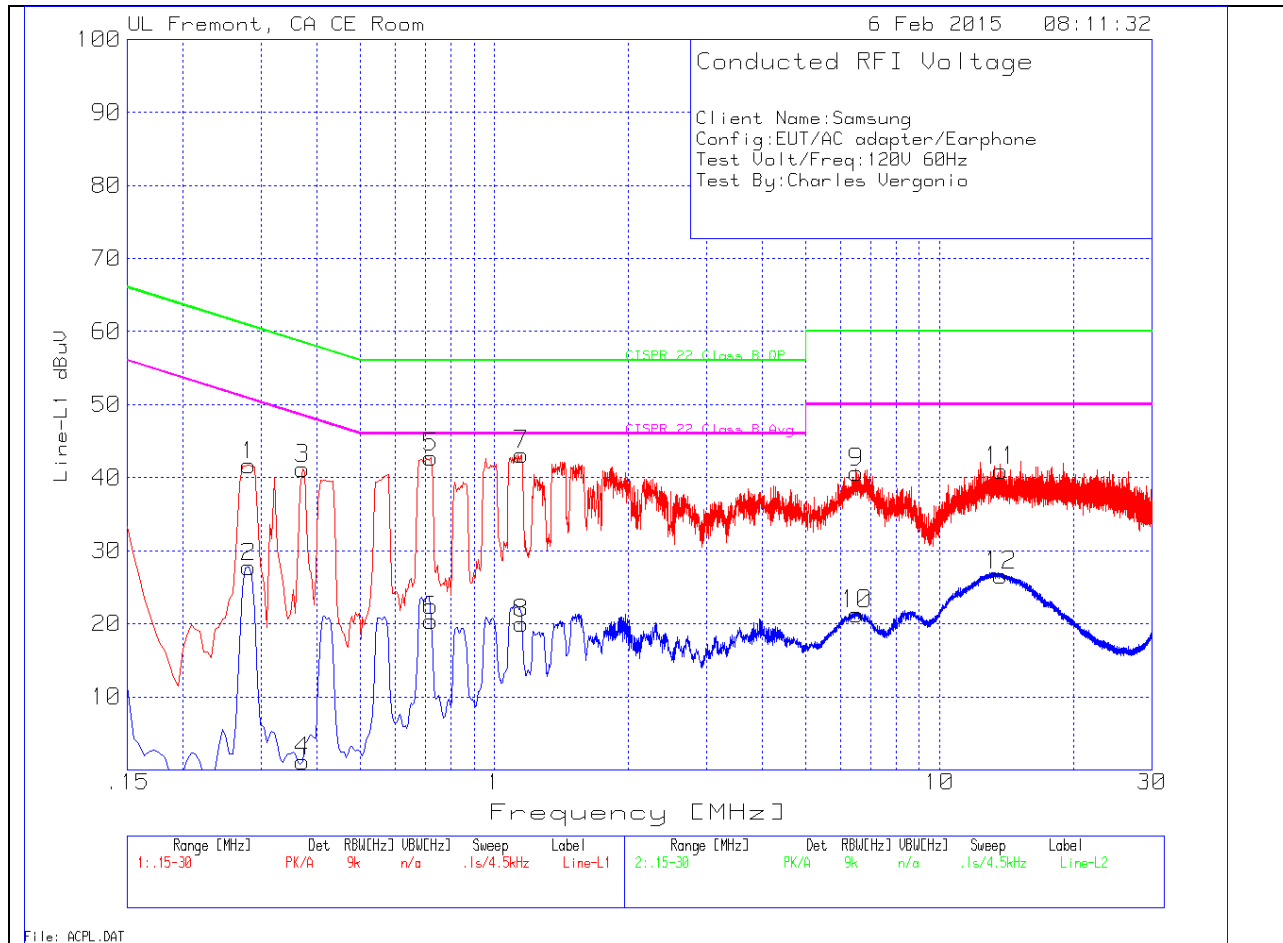

LINE 1 RESULTS

Line-L1 .15 - 30MHz


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.2805	41.06	PK	.6	0	41.66	60.8	-19.14	-	-
2	.2805	27.12	Av	.6	0	27.72	-	-	50.8	-23.08
3	.3705	40.8	PK	.4	0	41.2	58.5	-17.3	-	-
4	.3705	.76	Av	.4	0	1.16	-	-	48.5	-47.34
5	.7215	42.51	PK	.3	0	42.81	56	-13.19	-	-
6	.7215	20.08	Av	.3	0	20.38	-	-	46	-25.62
7	1.1535	42.98	PK	.2	0	43.18	56	-12.82	-	-
8	1.1535	19.8	Av	.2	0	20	-	-	46	-26
9	6.5265	40.39	PK	.2	.1	40.69	60	-19.31	-	-
10	6.5265	21.02	Av	.2	.1	21.32	-	-	50	-28.68
11	13.749	40.53	PK	.2	.2	40.93	60	-19.07	-	-
12	13.749	26.22	Av	.2	.2	26.62	-	-	50	-23.38

PK - Peak detector

Av - average detection

LINE 2 PLOT

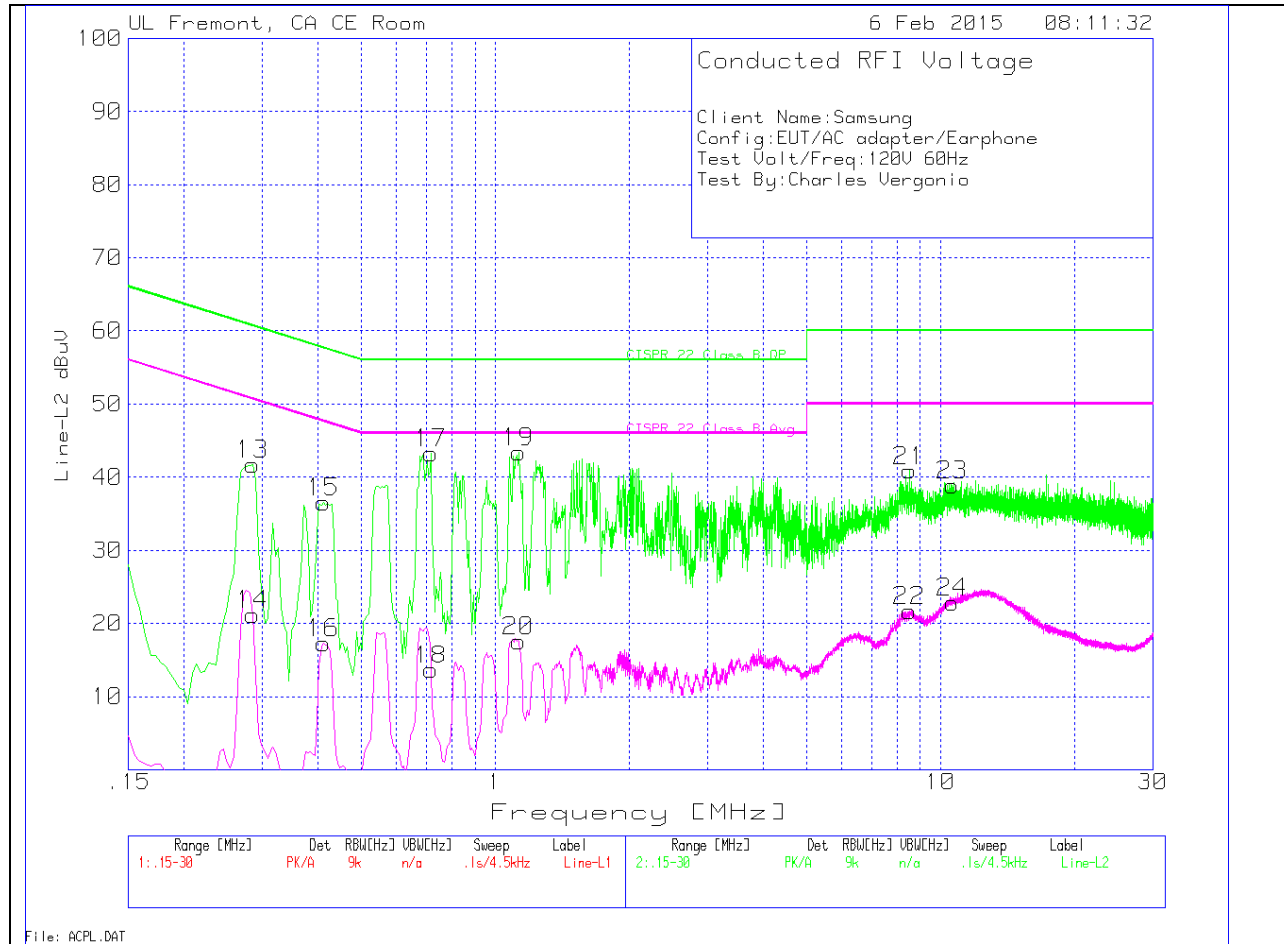

LINE 2 RESULTS

Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
13	.285	41.08	PK	.6	0	41.68	60.7	-19.02	-	-
14	.285	20.6	Av	.6	0	21.2	-	-	50.7	-29.5
15	.411	36.21	PK	.4	0	36.61	57.6	-20.99	-	-
16	.411	16.9	Av	.4	0	17.3	-	-	47.6	-30.3
17	.717	42.99	PK	.3	0	43.29	56	-12.71	-	-
18	.717	13.33	Av	.3	0	13.63	-	-	46	-32.37
19	1.1265	43.03	PK	.3	.1	43.43	56	-12.57	-	-
20	1.1265	17.15	Av	.3	.1	17.55	-	-	46	-28.45
21	8.511	40.58	PK	.2	.1	40.88	60	-19.12	-	-
22	8.511	21.39	Av	.2	.1	21.69	-	-	50	-28.31
23	10.635	38.45	PK	.2	.2	38.85	60	-21.15	-	-
24	10.635	22.49	Av	.2	.2	22.89	-	-	50	-27.11

PK - Peak detector

Av - average detection