



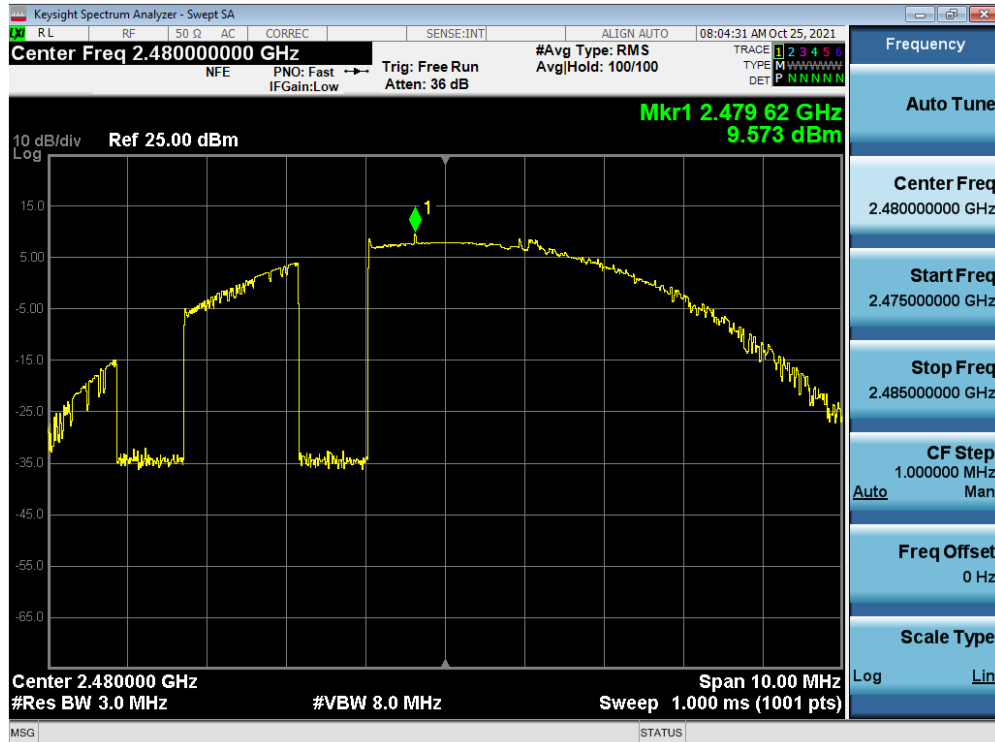


Plot 7-117. Dual Bluetooth Peak Conducted Power (3Mbps – Ch. 78) Antenna 2 iPA

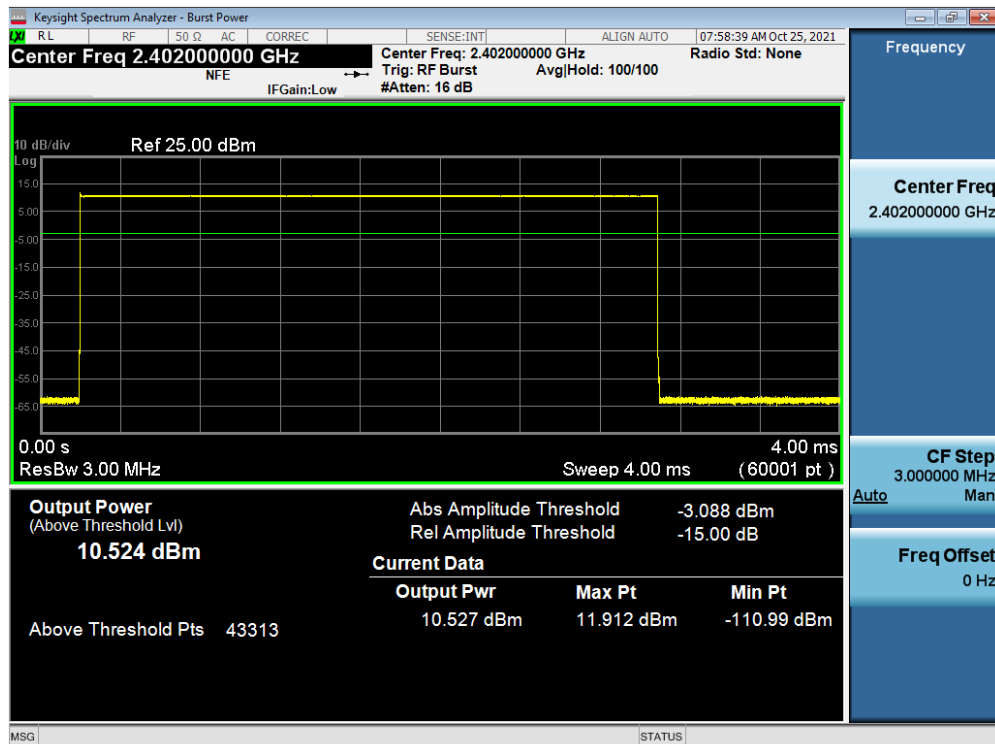


Plot 7-118. Dual Bluetooth Average Conducted Power (1Mbps – Ch. 0) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 77 of 129

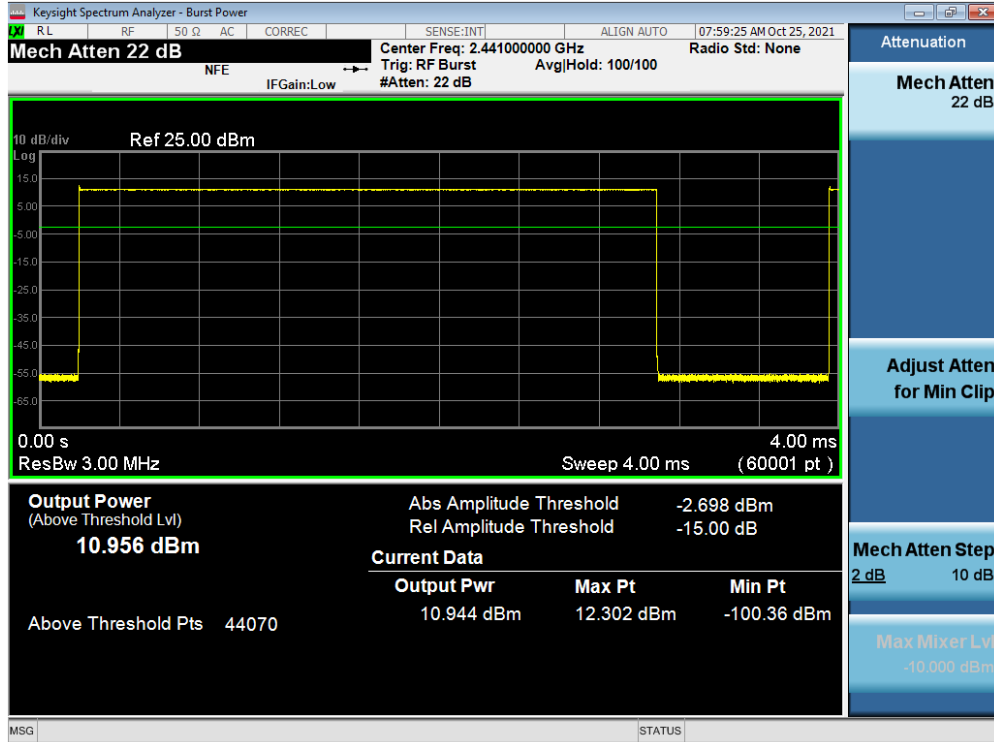


Plot 7-119. Dual Bluetooth Average Conducted Power (1Mbps – Ch. 39) Antenna 2 iPA

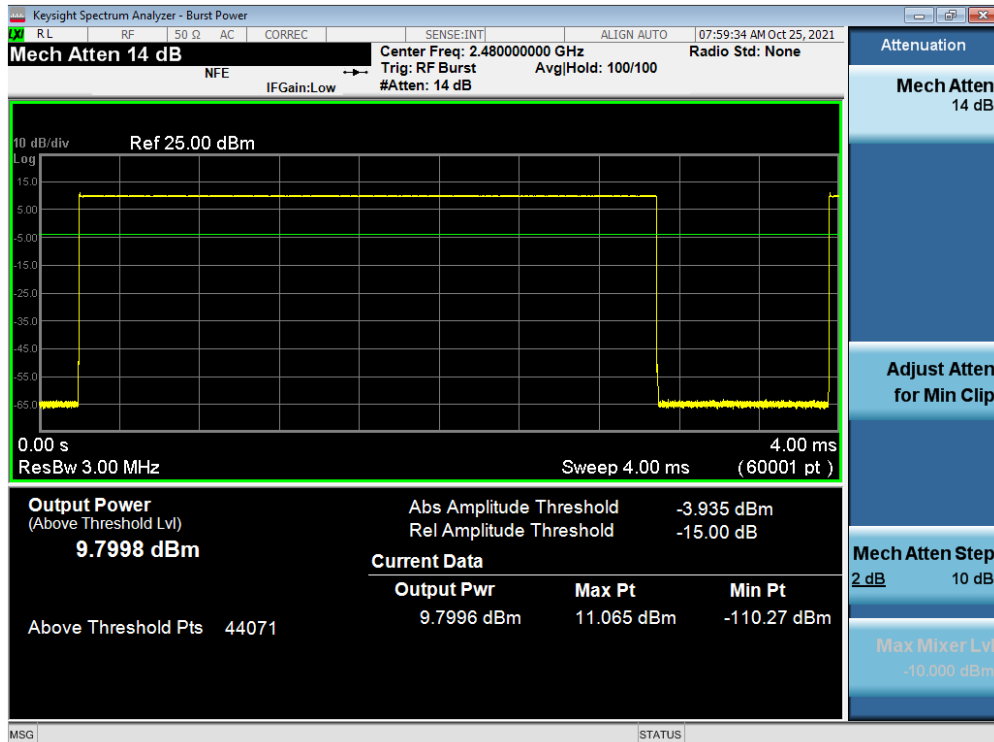


Plot 7-120. Dual Bluetooth Average Conducted Power (1Mbps – Ch. 78) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 78 of 129

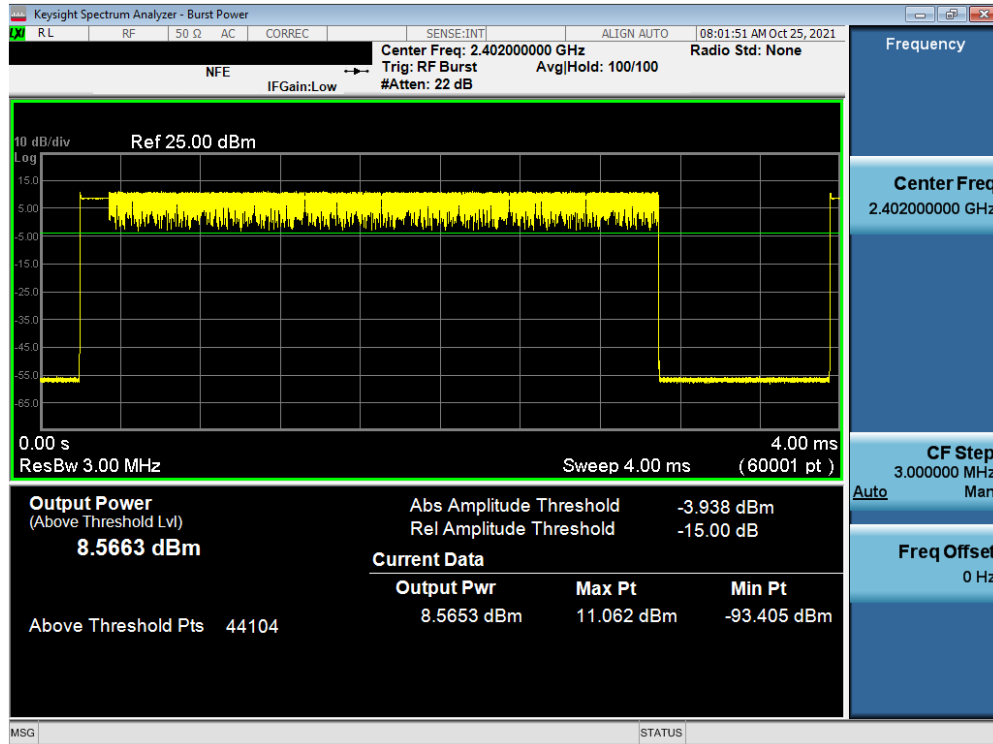


Plot 7-121. Dual Bluetooth Average Conducted Power (2Mbps – Ch. 0) Antenna 2 iPA

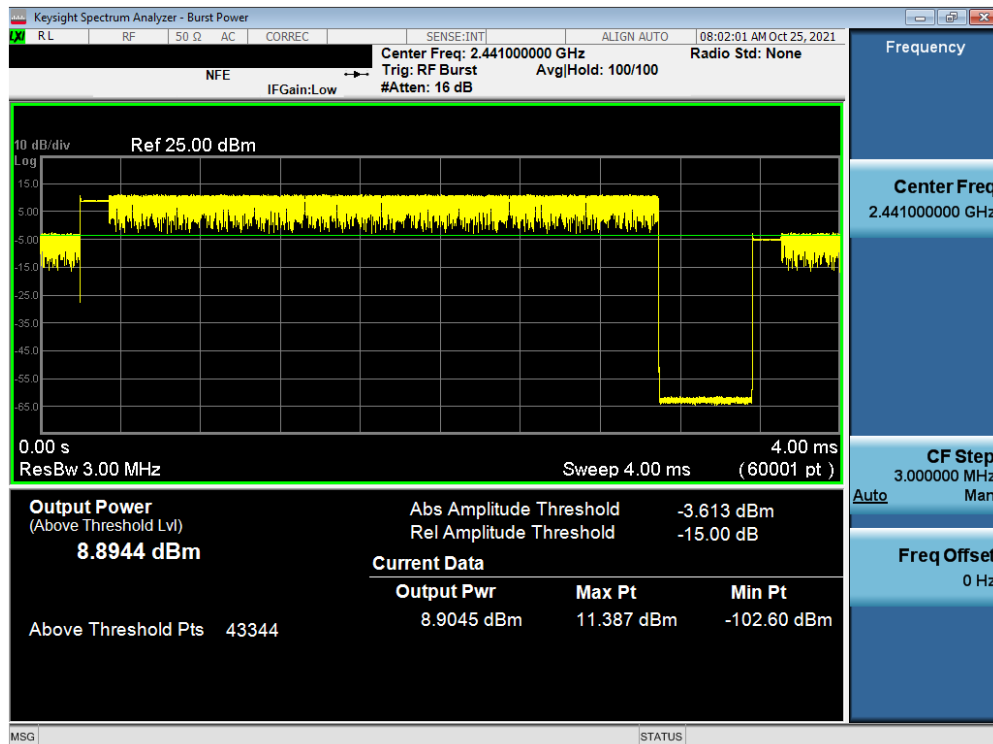


Plot 7-122. Dual Bluetooth Average Conducted Power (2Mbps – Ch. 39) Antenna 2 iPA

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 79 of 129

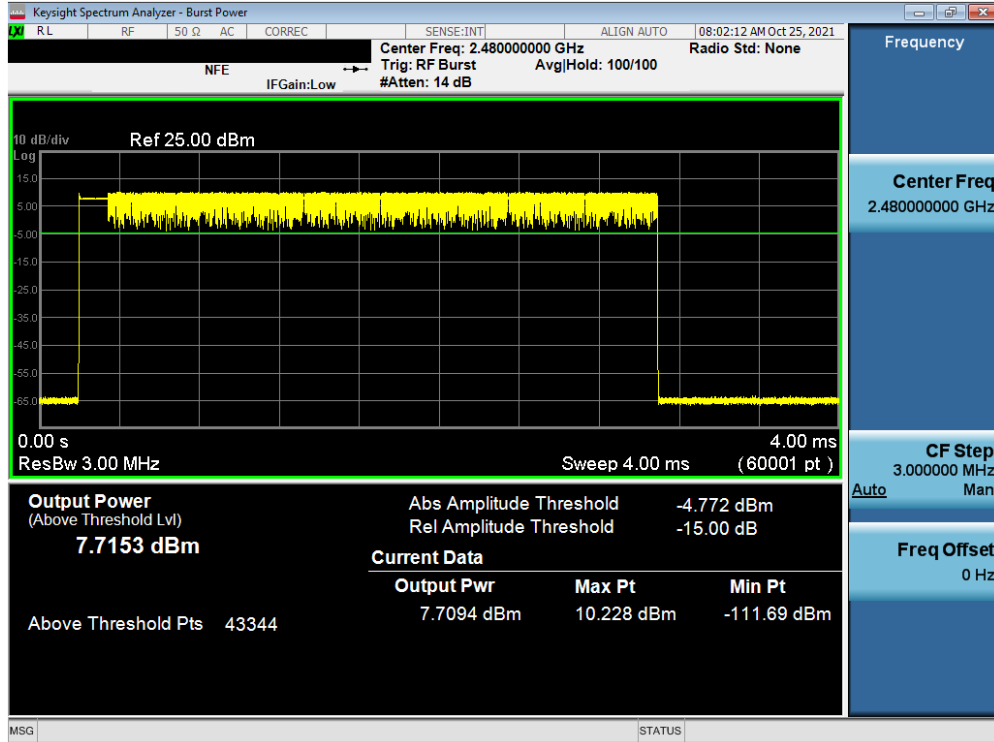


Plot 7-123. Dual Bluetooth Average Conducted Power (2Mbps – Ch. 78) Antenna 2 iPA

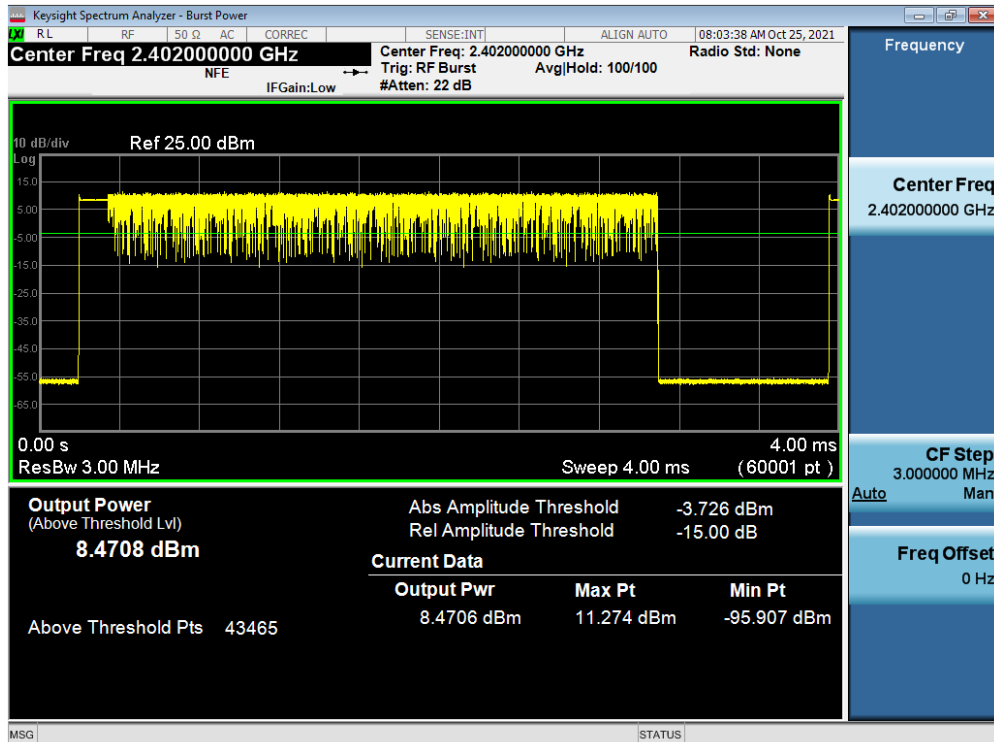


Plot 7-124. Dual Bluetooth Average Conducted Power (3Mbps – Ch. 0) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 80 of 129

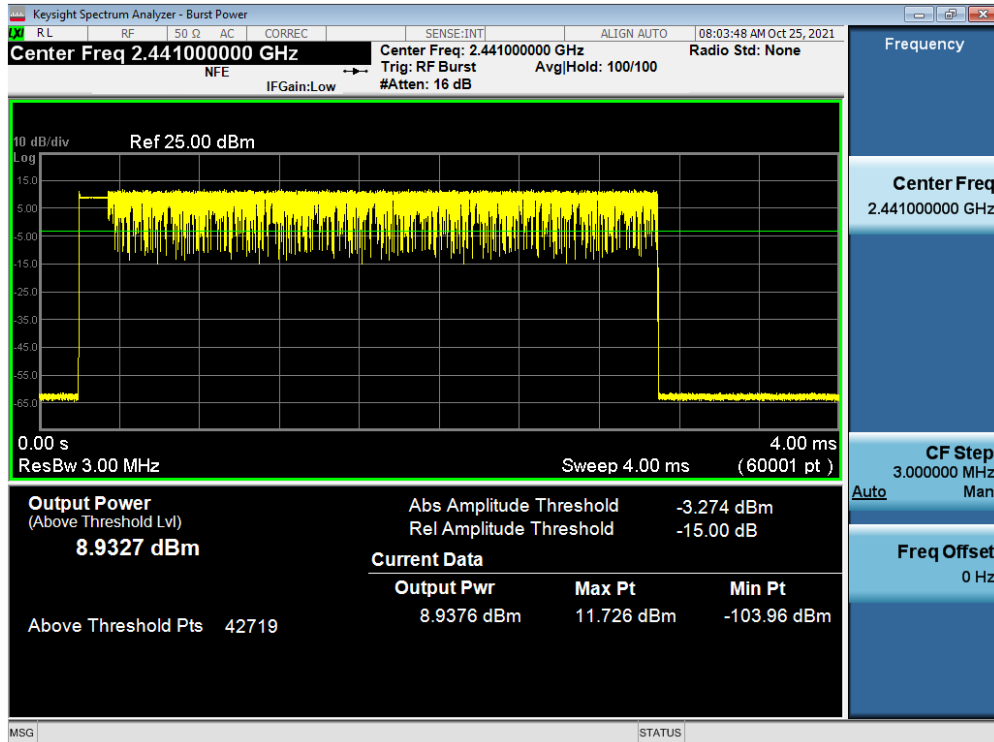

Plot 7-125. Dual Bluetooth Average Conducted Power (3Mbps – Ch. 39) Antenna 2 iPA

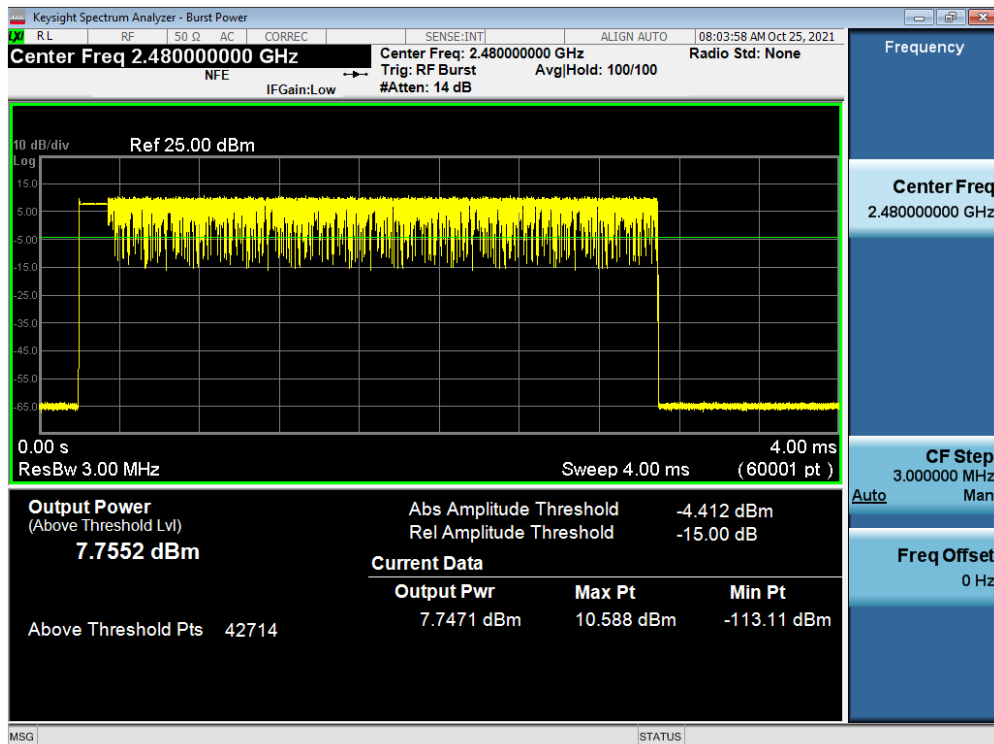

Plot 7-126. Dual Bluetooth Average Conducted Power (3Mbps – Ch. 79) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 81 of 129

7.4 Band Edge Compliance

§15.247 (d); RSS-247 [5.5]

Test Overview and Limits

EUT operates in hopping and non-hopping transmission mode. Measurement is taken at the highest point located outside of the emission bandwidth. ***The maximum permissible out-of-band emission level is 20 dBc.***

Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

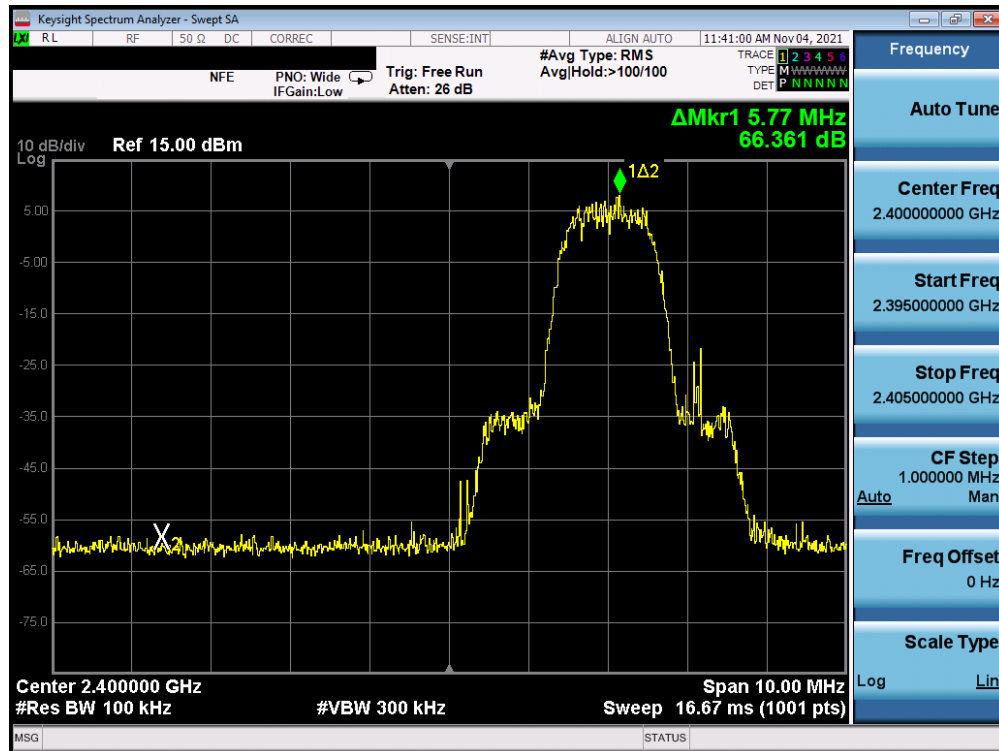


Figure 7-3. Test Instrument & Measurement Setup


Test Notes

Out of band conducted spurious emissions at the band edge were investigated for all data rates in hopping and non-hopping modes. The worst case emissions were found with the EUT transmitting at 3 Mbps. Band edge emissions were also investigated with the EUT transmitting in all data rates. Plots of the worst case emissions are shown below.

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 82 of 129




Plot 7-127. Band Edge Plot (Bluetooth with Hopping Disabled, 3Mbps- Ch. 0) Antenna 1

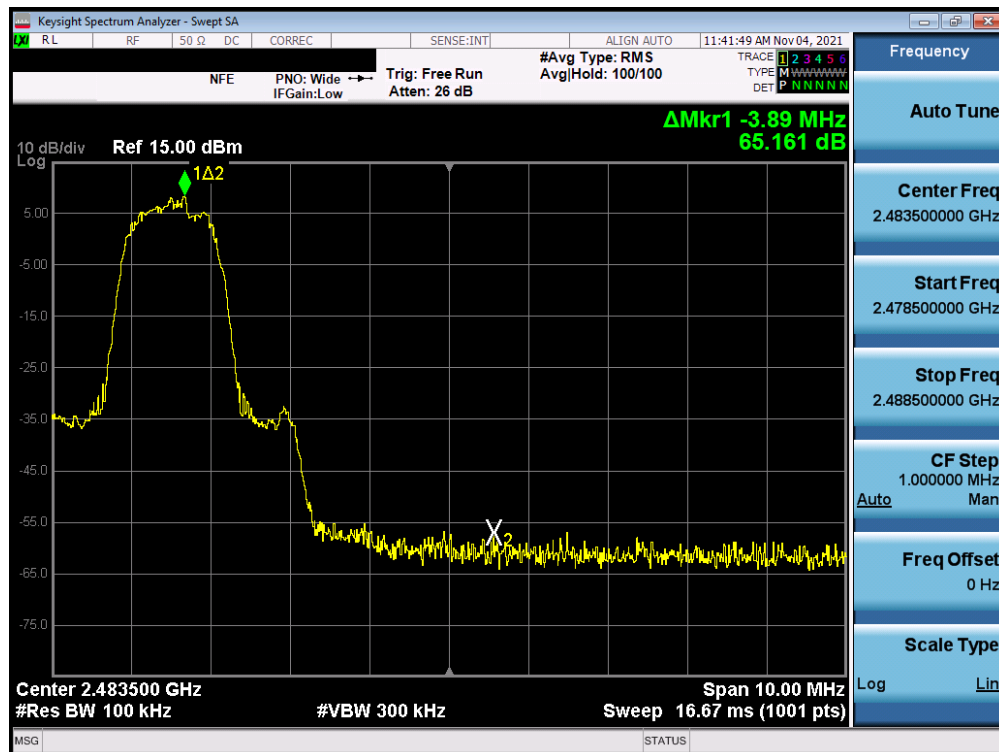


Plot 7-128. Band Edge Plot (Bluetooth with Hopping Disabled, 3Mbps- Ch. 78) Antenna 1

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 83 of 129

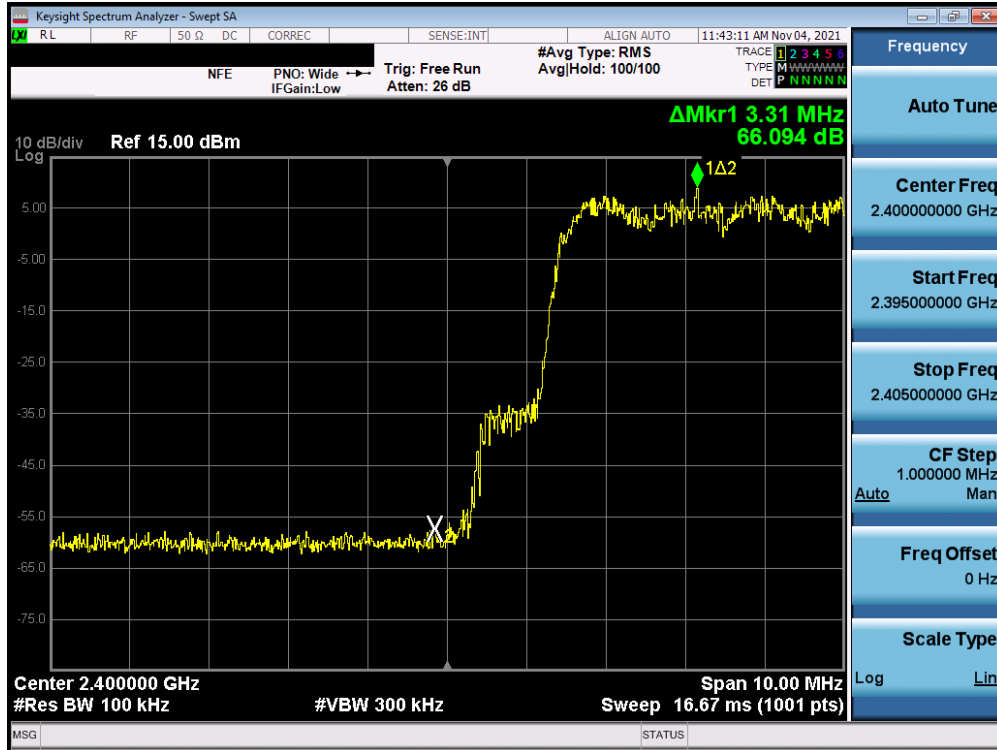


Plot 7-129. Band Edge Plot (Bluetooth with Hopping Enabled, 3Mbps- Ch. 0) Antenna 1

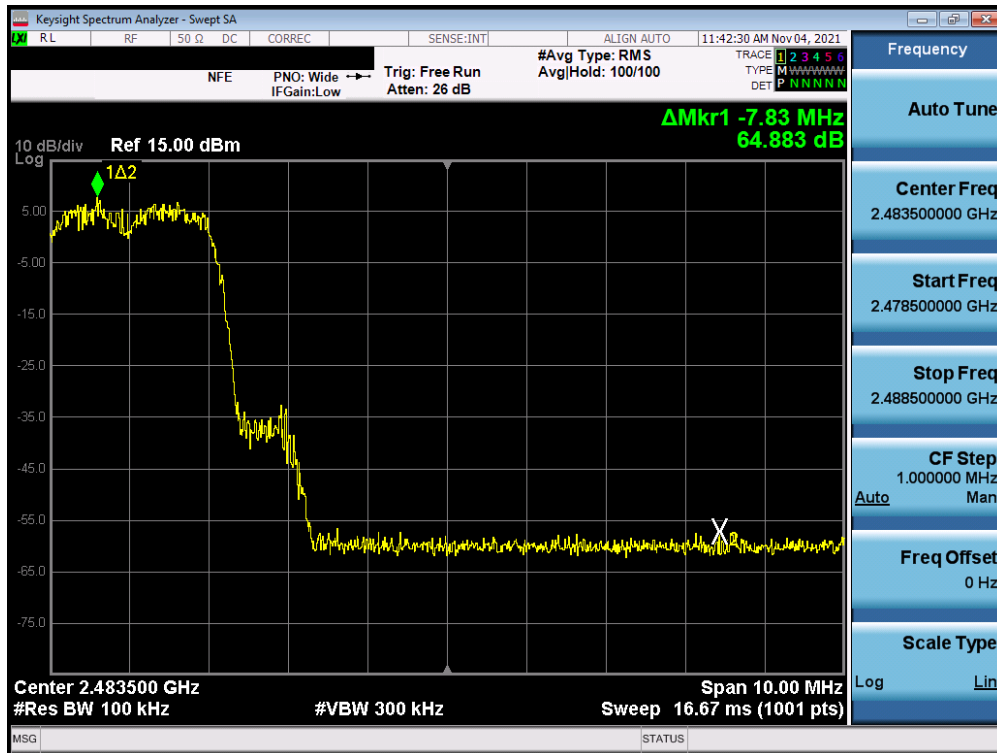


Plot 7-130. Band Edge Plot (Bluetooth with Hopping Enabled, 3Mbps- Ch. 78) Antenna 1

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 84 of 129

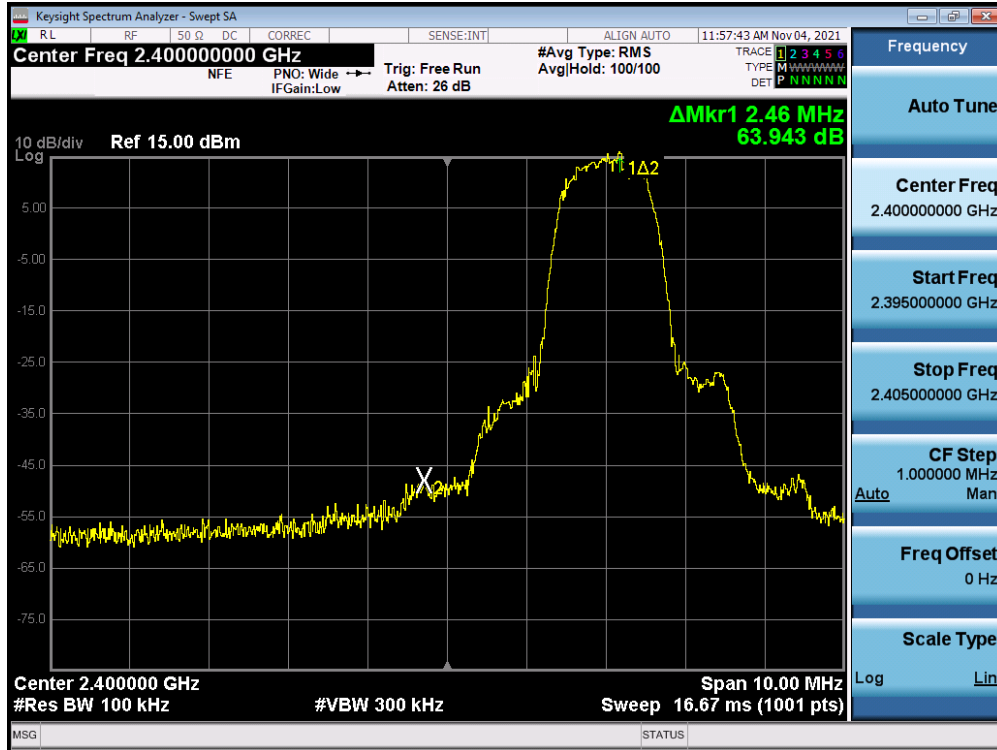


Plot 7-131. Band Edge Plot (Bluetooth with Hopping Disabled, 3Mbps– Ch. 0) Antenna 2

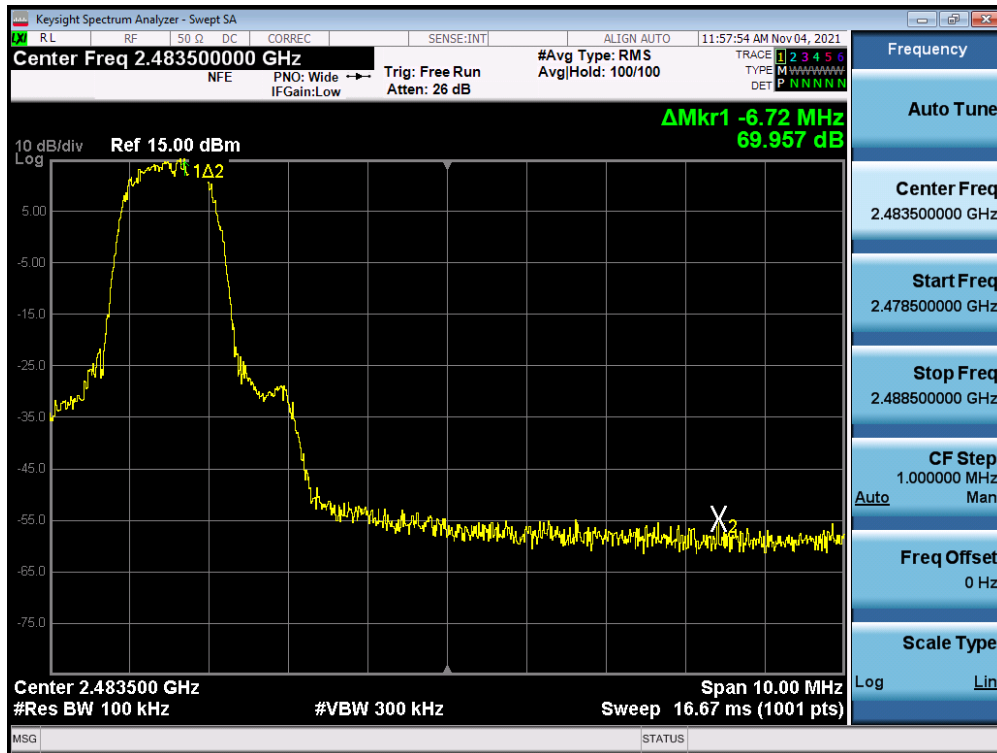


Plot 7-132. Band Edge Plot (Bluetooth with Hopping Disabled, 3Mbps– Ch. 78) Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 85 of 129

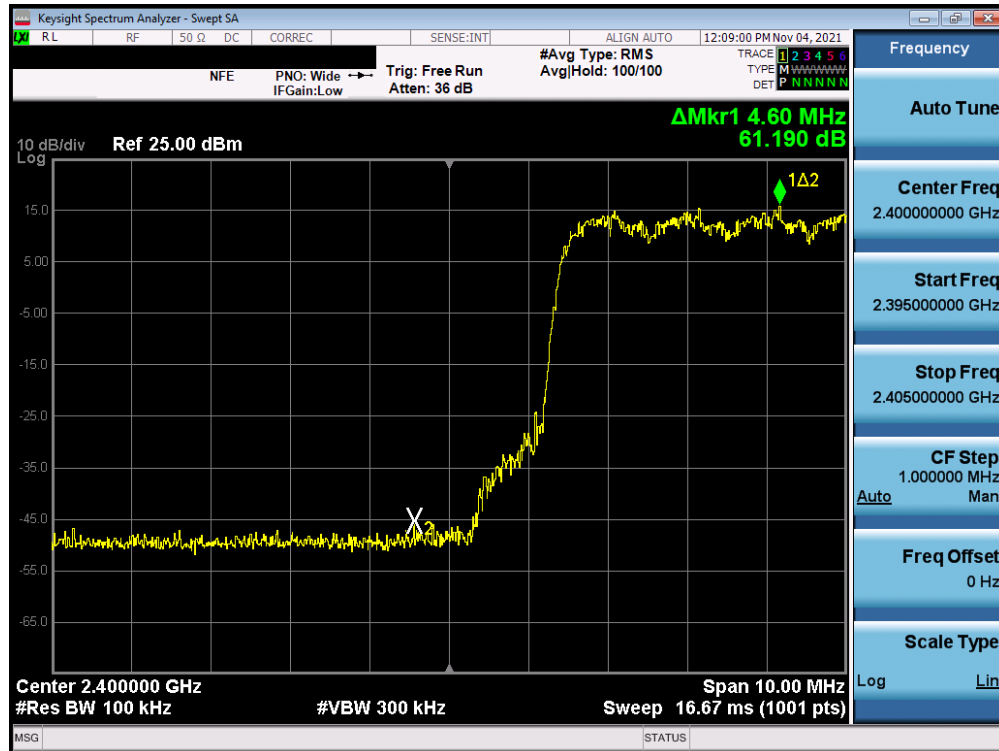

Plot 7-133. Band Edge Plot (Bluetooth with Hopping Enabled, 3Mbps- Ch. 0) Antenna 2

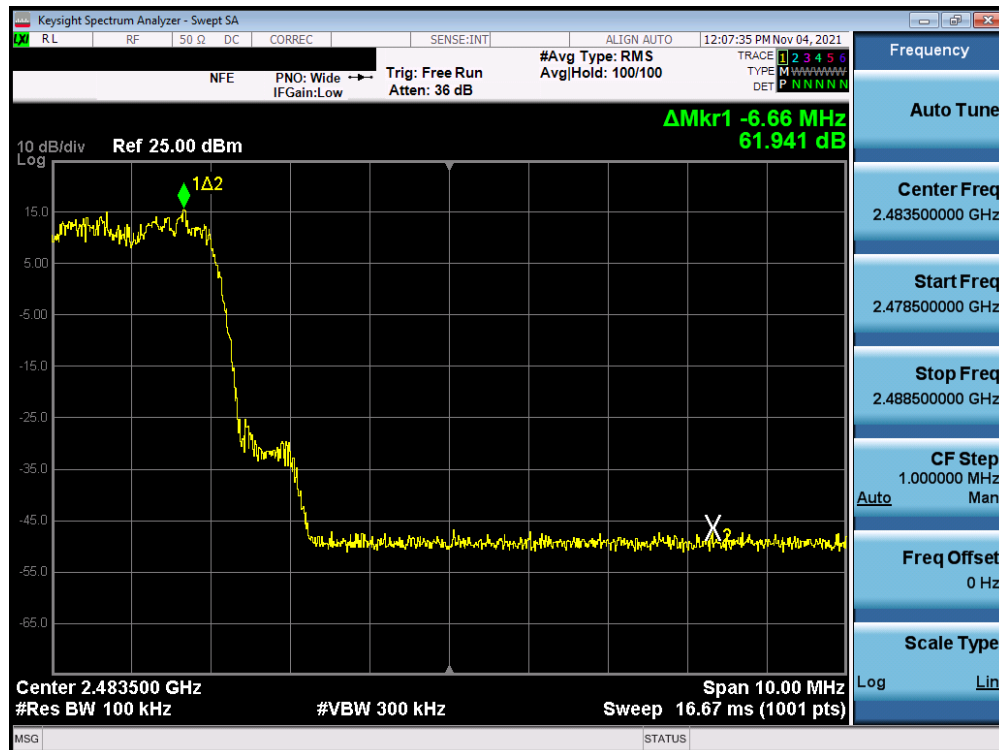

Plot 7-134. Band Edge Plot (Bluetooth with Hopping Enabled, 3Mbps- Ch. 78) Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 86 of 129

7.5 Carrier Frequency Separation

§15.247 (a.1); RSS-247 [5.1(2)]

Test Overview and Limit

Measurement is made with EUT operating in hopping mode. ***The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW $\geq$ RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


The EUT complies with the minimum channel separation requirement when it is operating in 1x/EDR mode using 79 channels and when operating in AFH mode using 20 channels.

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 87 of 129

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	ePA	0	0.638
2441	1.0	GFSK	ePA	39	0.626
2480	1.0	GFSK	ePA	78	0.638
2402	1.0	GFSK	iPA	0	0.627
2441	1.0	GFSK	iPA	39	0.640
2480	1.0	GFSK	iPA	78	0.673
2402	2.0	$\pi/4$ -DQPSK	ePA	0	0.885
2441	2.0	$\pi/4$ -DQPSK	ePA	39	0.890
2480	2.0	$\pi/4$ -DQPSK	ePA	78	0.874
2402	2.0	$\pi/4$ -DQPSK	iPA	0	0.881
2441	2.0	$\pi/4$ -DQPSK	iPA	39	0.880
2480	2.0	$\pi/4$ -DQPSK	iPA	78	0.903
2402	3.0	8DPSK	ePA	0	0.871
2441	3.0	8DPSK	ePA	39	0.869
2480	3.0	8DPSK	ePA	78	0.858
2402	3.0	8DPSK	iPA	0	0.867
2441	3.0	8DPSK	iPA	39	0.879
2480	3.0	8DPSK	iPA	78	0.877

Table 7-8. Minimum Channel Separation – Antenna 1

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 88 of 129

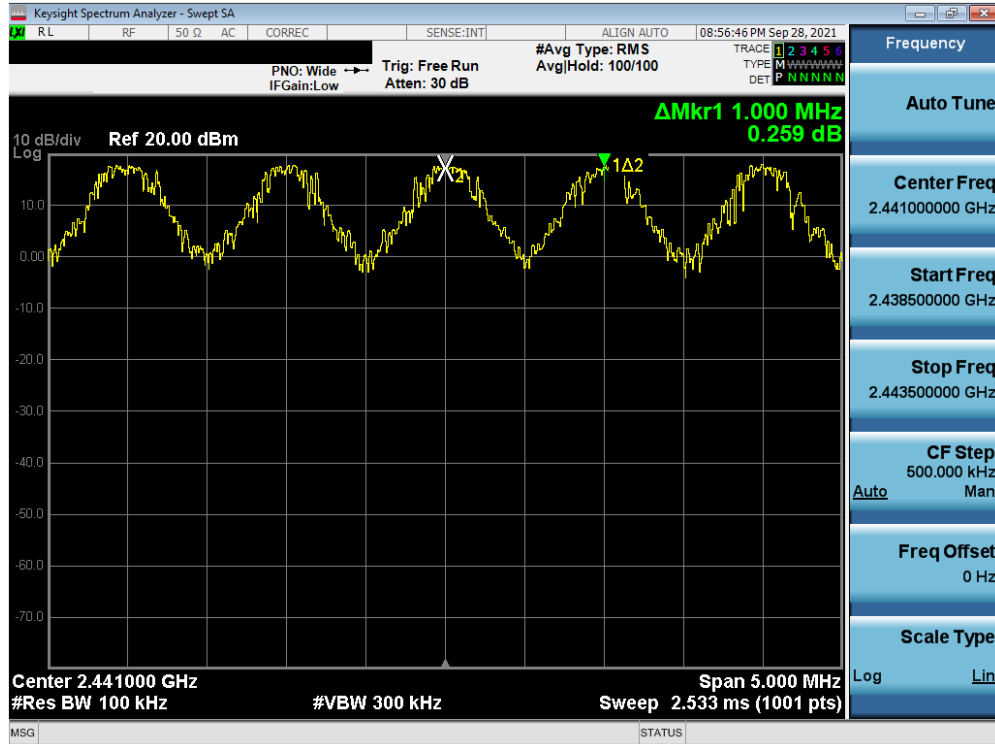


Plot 7-135. Channel Spacing Plot (Bluetooth)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 89 of 129

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	ePA	0	0.675
2441	1.0	GFSK	ePA	39	0.682
2480	1.0	GFSK	ePA	78	0.681
2402	1.0	GFSK	iPA	0	0.679
2441	1.0	GFSK	iPA	39	0.667
2480	1.0	GFSK	iPA	78	0.673
2402	2.0	$\pi/4$ -DQPSK	ePA	0	0.891
2441	2.0	$\pi/4$ -DQPSK	ePA	39	0.883
2480	2.0	$\pi/4$ -DQPSK	ePA	78	0.886
2402	2.0	$\pi/4$ -DQPSK	iPA	0	0.886
2441	2.0	$\pi/4$ -DQPSK	iPA	39	0.888
2480	2.0	$\pi/4$ -DQPSK	iPA	78	0.882
2402	3.0	8DPSK	ePA	0	0.863
2441	3.0	8DPSK	ePA	39	0.900
2480	3.0	8DPSK	ePA	78	0.864
2402	3.0	8DPSK	iPA	0	0.864
2441	3.0	8DPSK	iPA	39	0.864
2480	3.0	8DPSK	iPA	78	0.865

Table 7-9. Minimum Channel Separation – Antenna 2

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 90 of 129

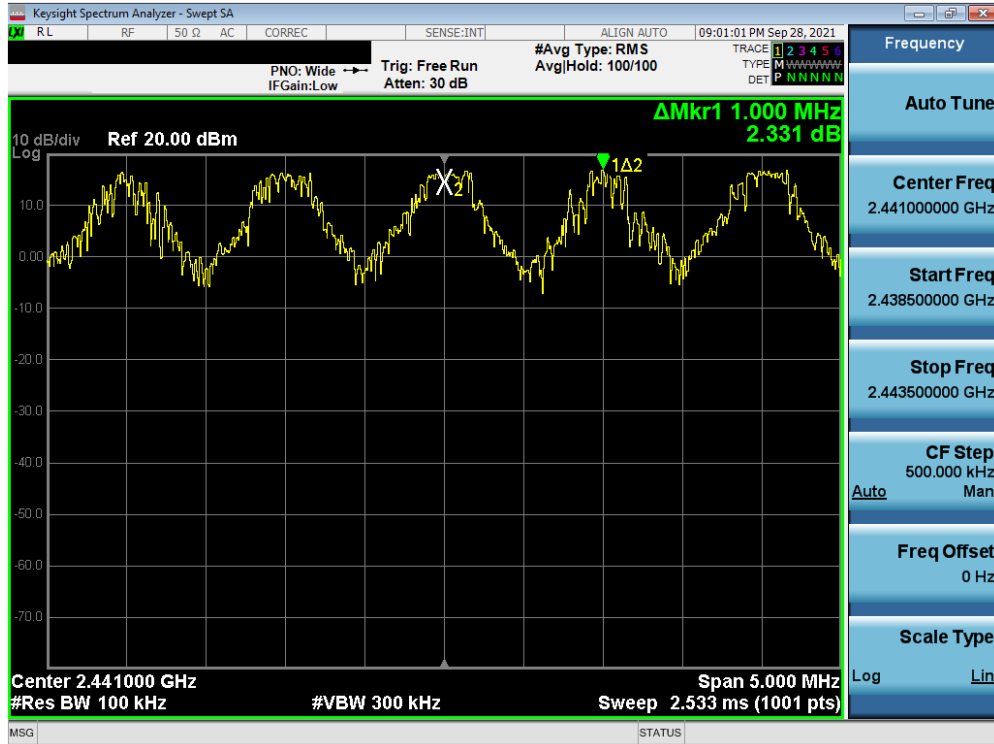

Plot 7-136. Channel Spacing Plot (Bluetooth) – Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 91 of 129

7.6 Time of Occupancy

§15.247 (a.1.iii); RSS-247 [5.1(4)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode with the spectrum analyzer set to zero span. **The maximum permissible time of occupancy is 400 ms within a period of 400ms multiplied by the number of hopping channels employed.**

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.4

Test Settings

1. Span = zero span, centered on a hopping channel
2. RBW $\leq$ channel spacing and $\gg 1/T$, where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

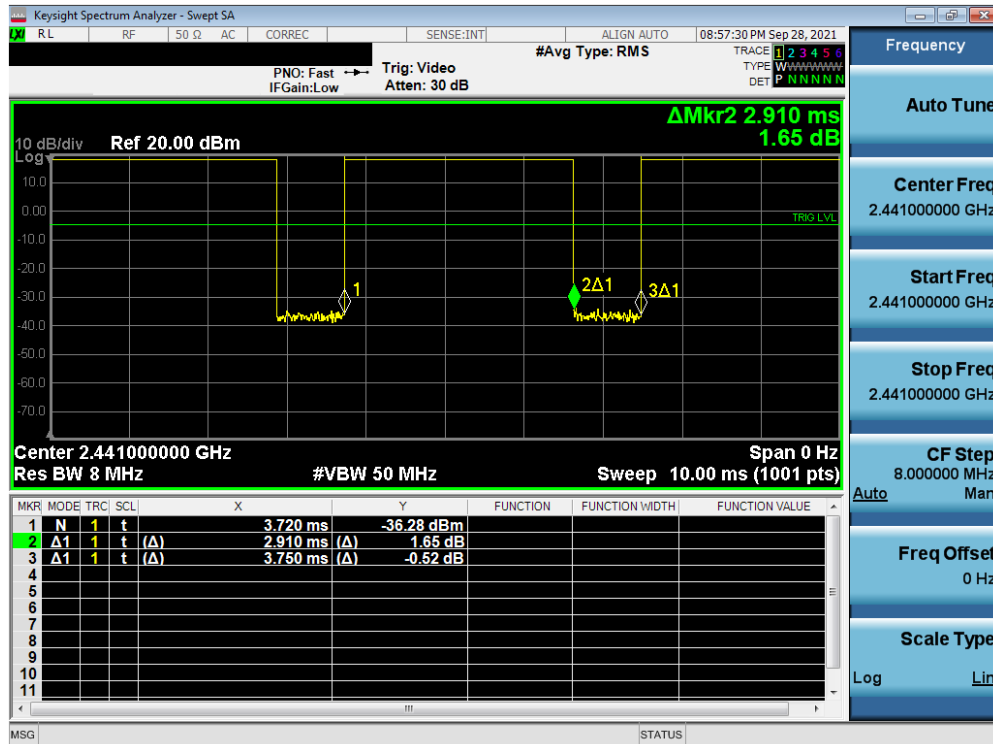


Figure 7-5. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 92 of 129



Plot 7-137. Time of Occupancy Plot (Bluetooth) -Antenna 1

Bluetooth time of Occupancy Calculation


Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/BDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of $1600 / 6 = 266.67$ hops/s/slot

- $400\text{ms} \times 79$ hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- $266.67 \text{ hops/second} / 79 \text{ channels} = 3.38 \text{ hops/second}$ (# of hops/second on one channel)
- $3.38 \text{ hops/second/channel} \times 31.6 \text{ seconds} = 106.67 \text{ hops}$ (# hops over a 31.6 second period)
- $106.67 \text{ hops} \times 2.910 \text{ ms/channel} = 310.41 \text{ ms}$ (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of $800 / 6 = 133.3$ hops/s/slot

- $400\text{ms} \times 20$ hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- $133.3 \text{ hops/s} / 20 \text{ channels} = 6.67 \text{ hops/second}$ (# of hops/second on one channel)
- $6.67 \text{ hops/s} / \text{channel} \times 8 \text{ seconds} = 53.34 \text{ hops}$ (# hops over a 8 second period)
- $53.34 \text{ hops} \times 2.910 \text{ ms/channel} = 155.22 \text{ ms}$ (worst case dwell time for one channel in AFH mode)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 93 of 129

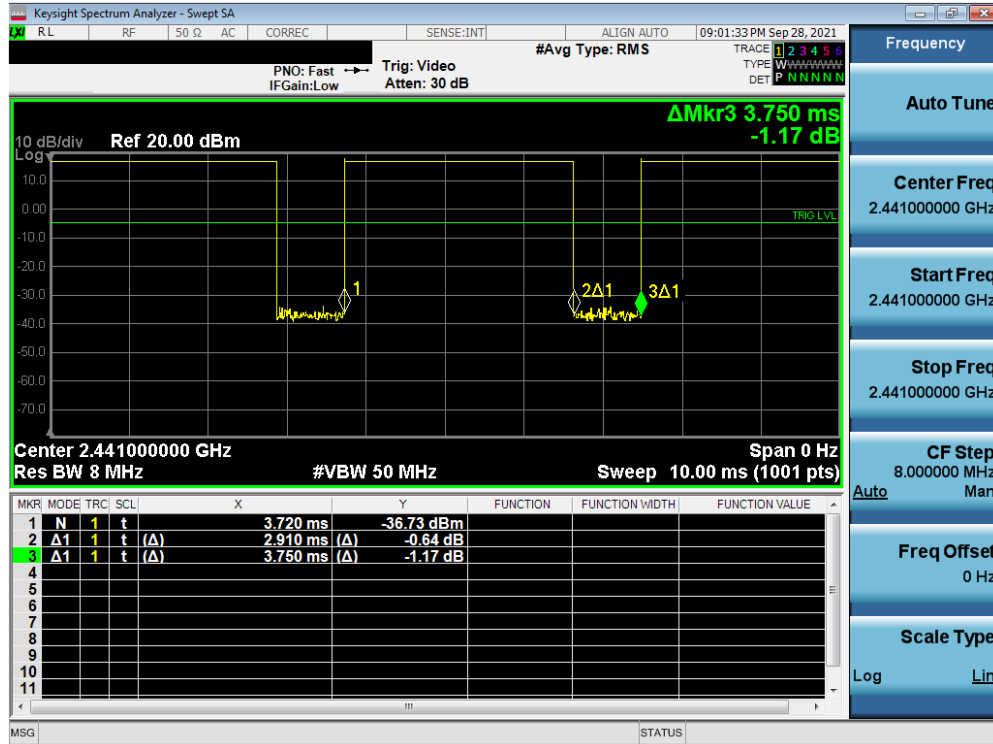

Plot 7-138. Time of Occupancy Plot (Bluetooth) -Antenna 2

Bluetooth time of Occupancy Calculation

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/BDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of $1600 / 6 = 266.67$ hops/s/slot

- $400\text{ms} \times 79$ hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- $266.67 \text{ hops/second} / 79 \text{ channels} = 3.38 \text{ hops/second}$ (# of hops/second on one channel)
- $3.38 \text{ hops/second/channel} \times 31.6 \text{ seconds} = 106.67 \text{ hops}$ (# hops over a 31.6 second period)
- $106.67 \text{ hops} \times 2.910 \text{ ms/channel} = 310.41 \text{ ms}$ (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of $800 / 6 = 133.3$ hops/s/slot

- $400\text{ms} \times 20$ hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- $133.3 \text{ hops/s} / 20 \text{ channels} = 6.67 \text{ hops/second}$ (# of hops/second on one channel)
- $6.67 \text{ hops/s} / \text{channel} \times 8 \text{ seconds} = 53.34 \text{ hops}$ (# hops over a 8 second period)
- $53.34 \text{ hops} \times 2.910 \text{ ms/channel} = 155.22 \text{ ms}$ (worst case dwell time for one channel in AFH mode)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 94 of 129

7.7 Number of Hopping Channels

§15.247 (a.1.iii); RSS-247 [5.1(4)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode. ***This frequency hopping system must employ a minimum of 15 hopping channels.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.3

Test Settings

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller.
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

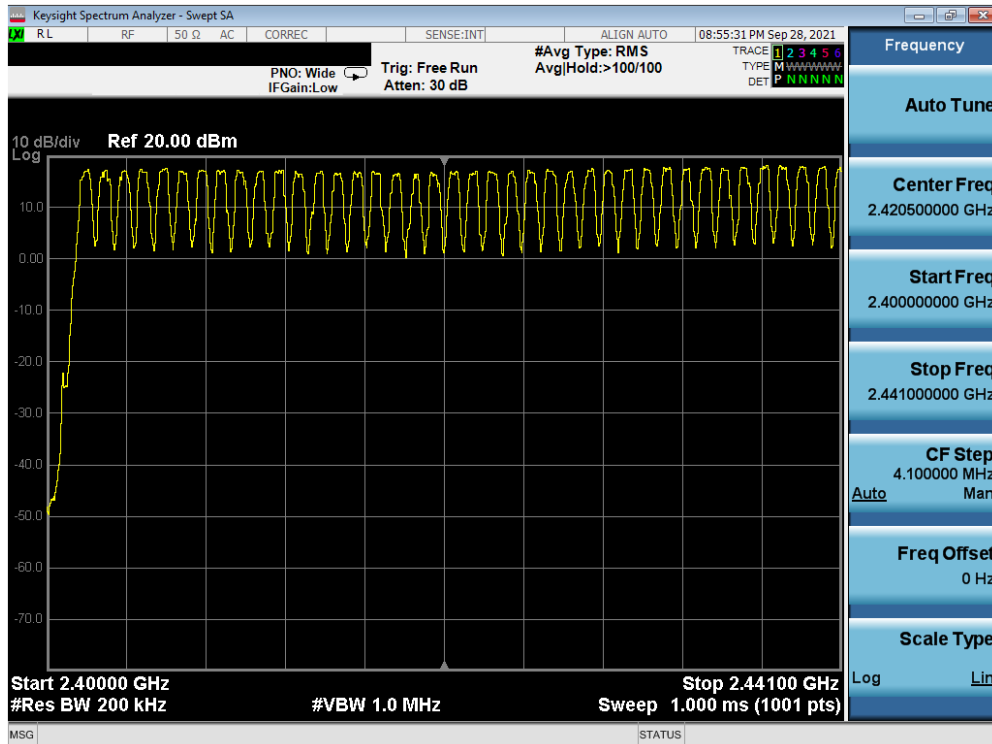


Figure 7-6. Test Instrument & Measurement Setup


Test Notes

The frequency spectrum was broken up into two sub-ranges to clearly show all of the hopping frequencies. In AFH mode, this device operates using 20 channels so the requirement for minimum number of hopping channels is satisfied.

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 95 of 129




Plot 7-139. Low End Spectrum Channel Hopping Plot (Bluetooth) Antenna 1

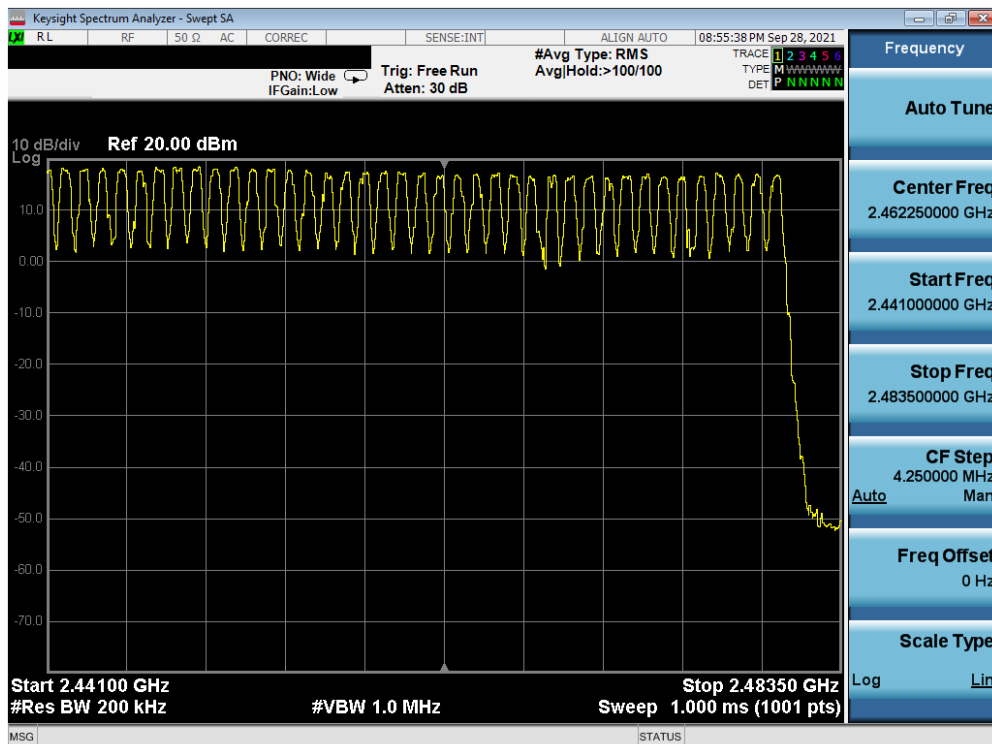


Plot 7-140. High End Spectrum Channel Hopping Plot (Bluetooth) Antenna 1

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 96 of 129

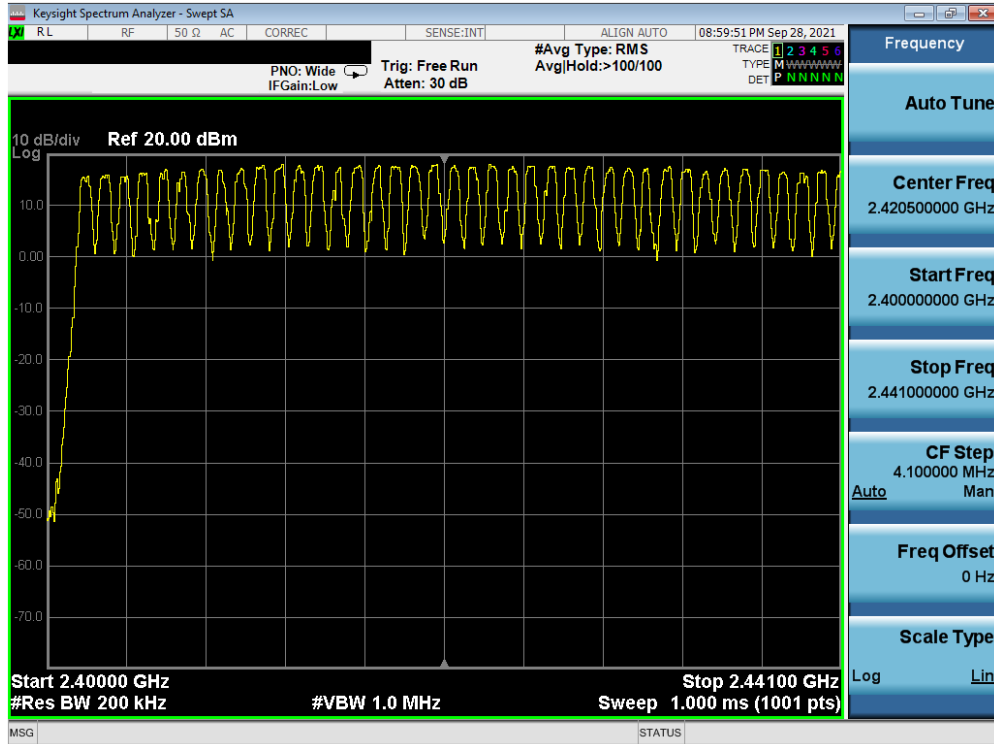

Plot 7-141. Low End Spectrum Channel Hopping Plot (Bluetooth) Antenna 2

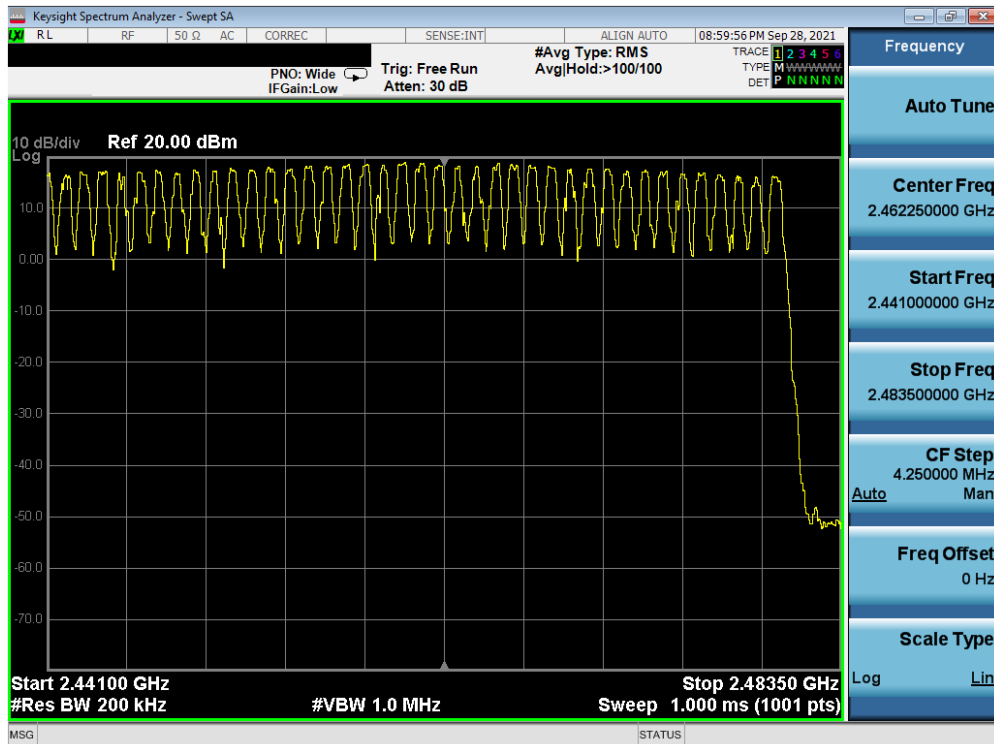

Plot 7-142. High End Spectrum Channel Hopping Plot (Bluetooth) Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 97 of 129

7.8 Conducted Spurious Emissions

§15.247 (d); RSS-247 [5.5]

Test Overview and Limit

Conducted out-of-band spurious emissions were investigated from 30MHz up to 25GHz to include the 10th harmonic of the fundamental transmit frequency. **The maximum permissible out-of-band emission level is 20 dBc.**

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

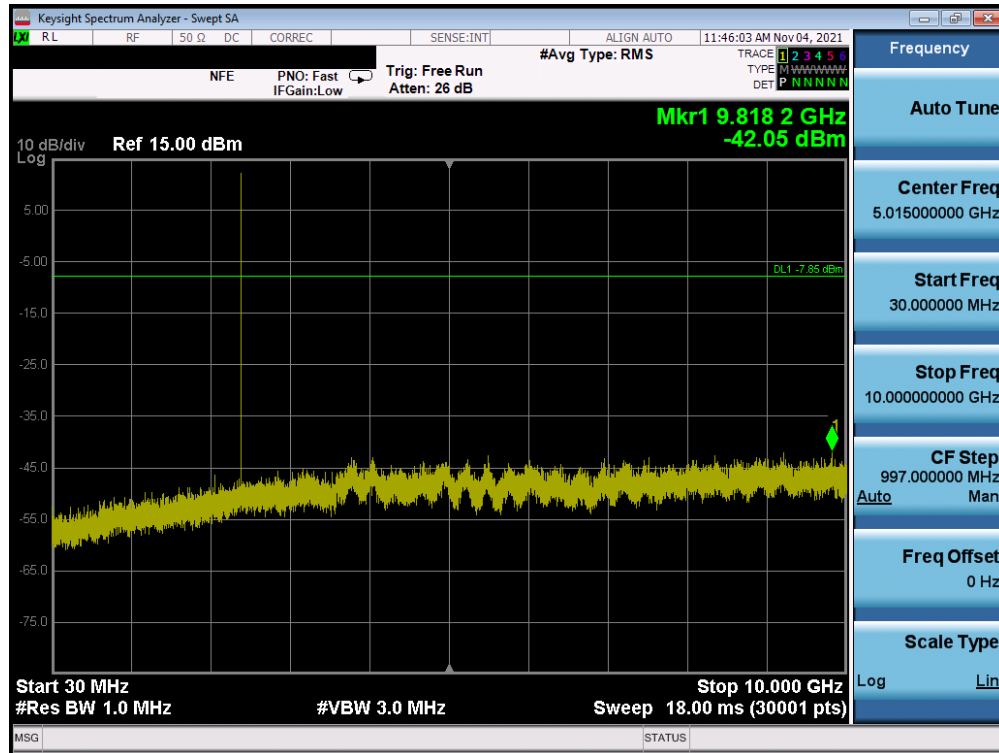


Figure 7-7. Test Instrument & Measurement Setup


Test Notes

Out-of-band conducted spurious emissions were investigated for all data rates and the worst case emissions were found with the EUT transmitting at N/AMbps. The display line shown in the following plots is the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, the traces in the following plots are measured with a 1MHz RBW to reduce test time, so the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 98 of 129




Plot 7-143. Conducted Spurious Plot (Bluetooth, 1Mbps– Ch. 0) Antenna 1

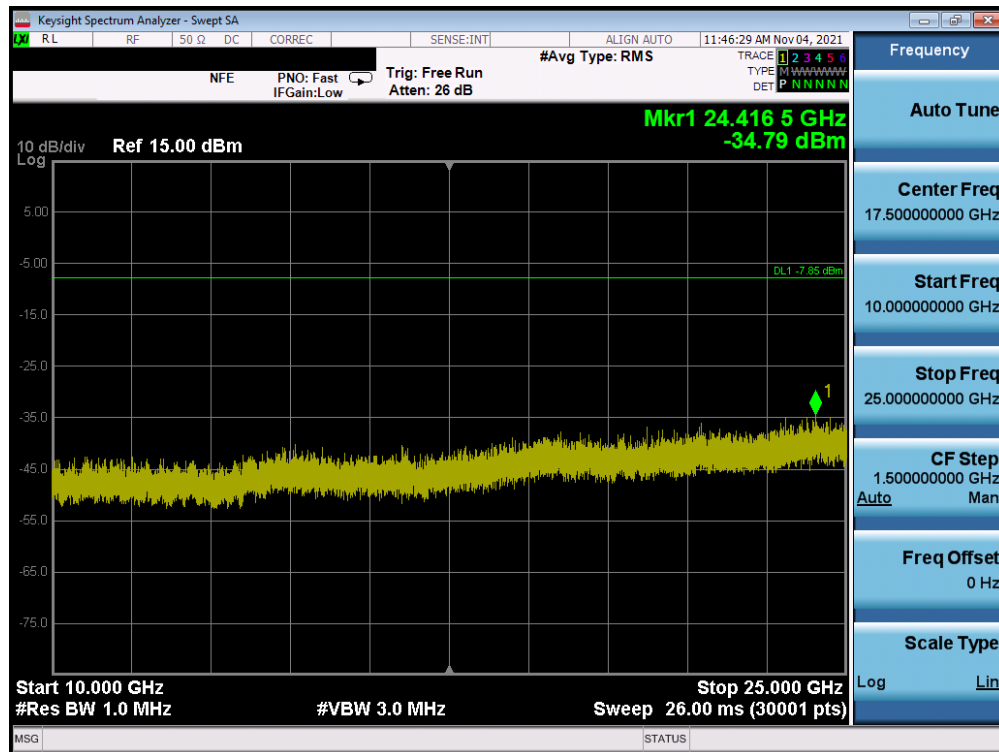


Plot 7-144. Conducted Spurious Plot (Bluetooth, 1Mbps– Ch. 0) Antenna 1

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 99 of 129

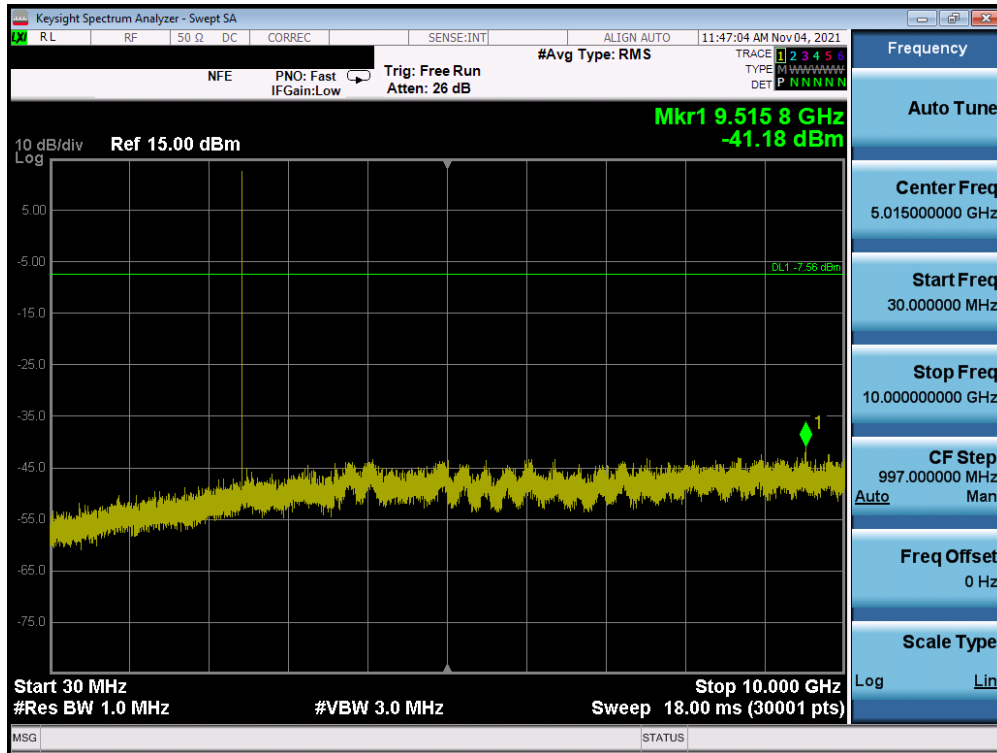


Plot 7-145. Conducted Spurious Plot (Bluetooth, 1Mbps- Ch. 39) Antenna 1

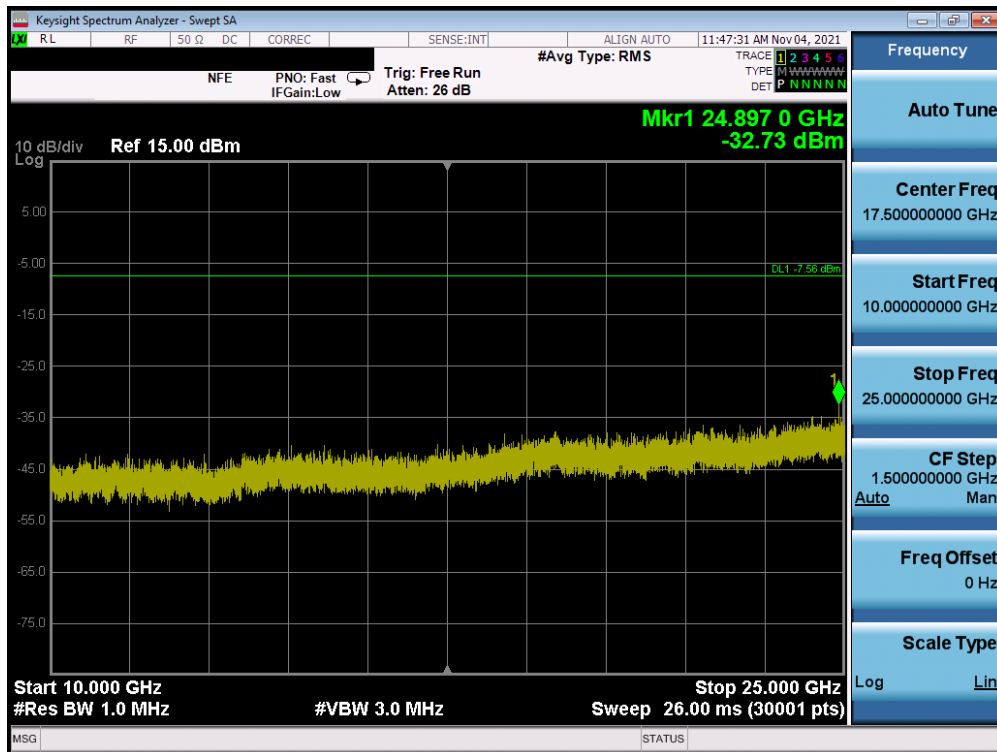


Plot 7-146. Conducted Spurious Plot (Bluetooth, 1MbpsCh. 39) Antenna 1

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 100 of 129

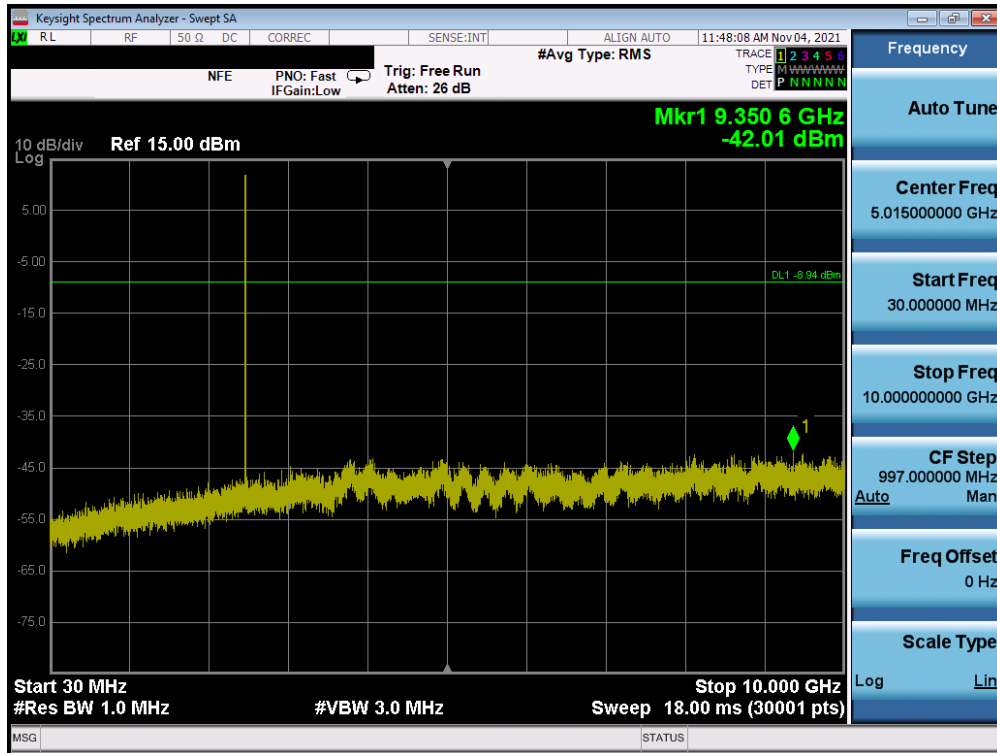


Plot 7-147. Conducted Spurious Plot (Bluetooth, 1Mbps- Ch. 78) Antenna 1

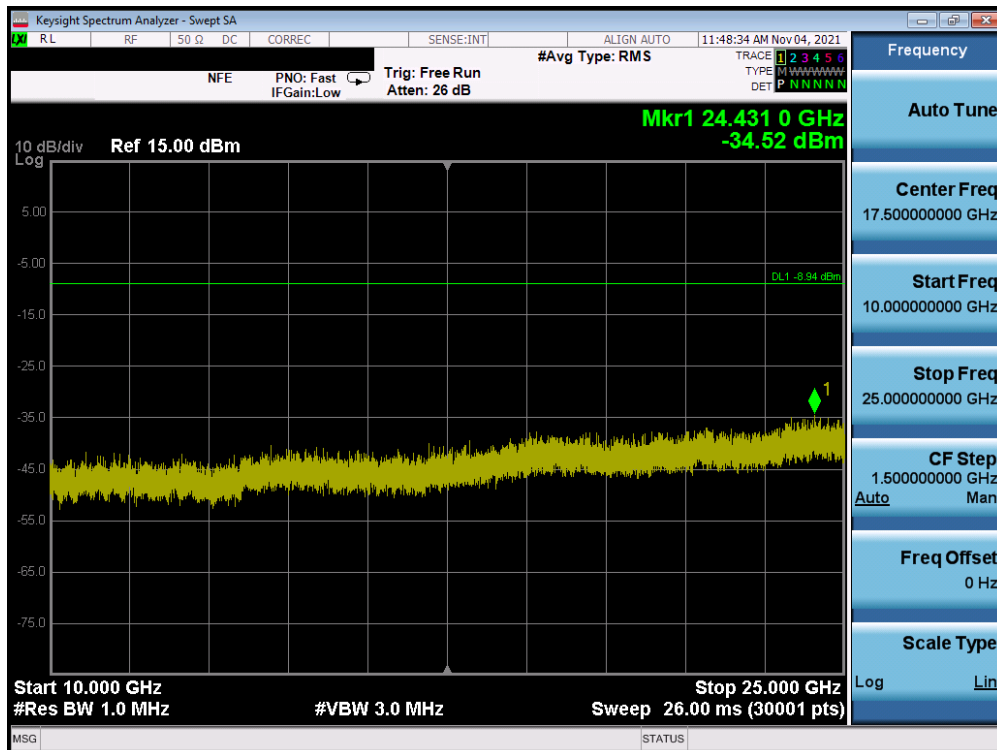


Plot 7-148. Conducted Spurious Plot (Bluetooth, 1Mbps- Ch. 78) Antenna 1

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 101 of 129

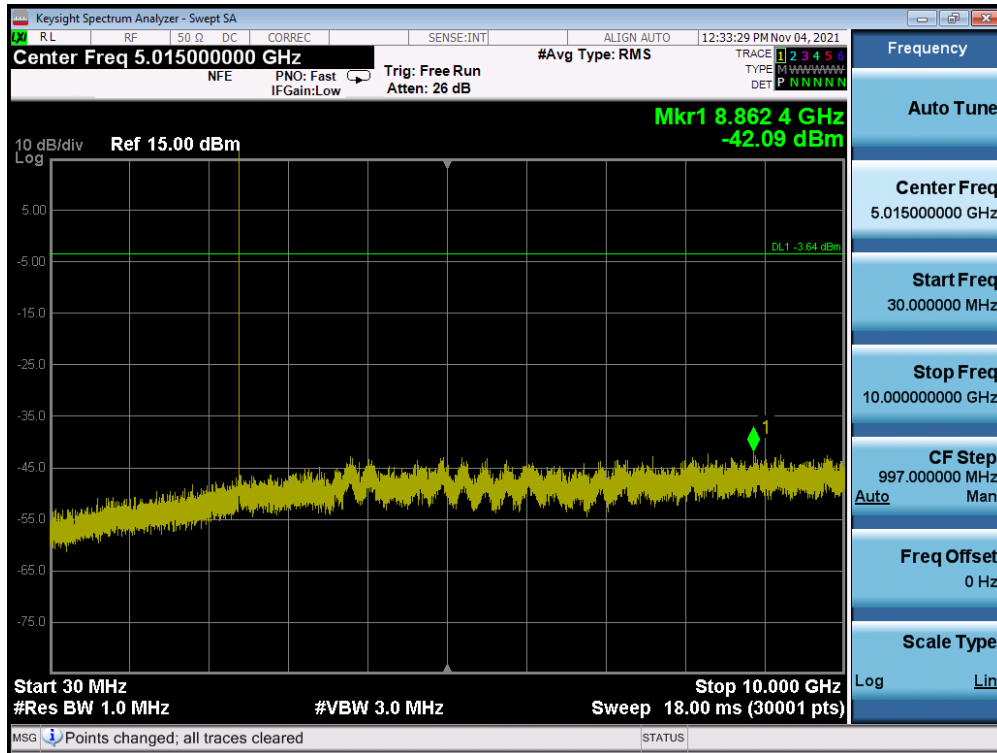


Plot 7-149. Conducted Spurious Plot (Bluetooth, 1Mbps– Ch. 0) Antenna 2

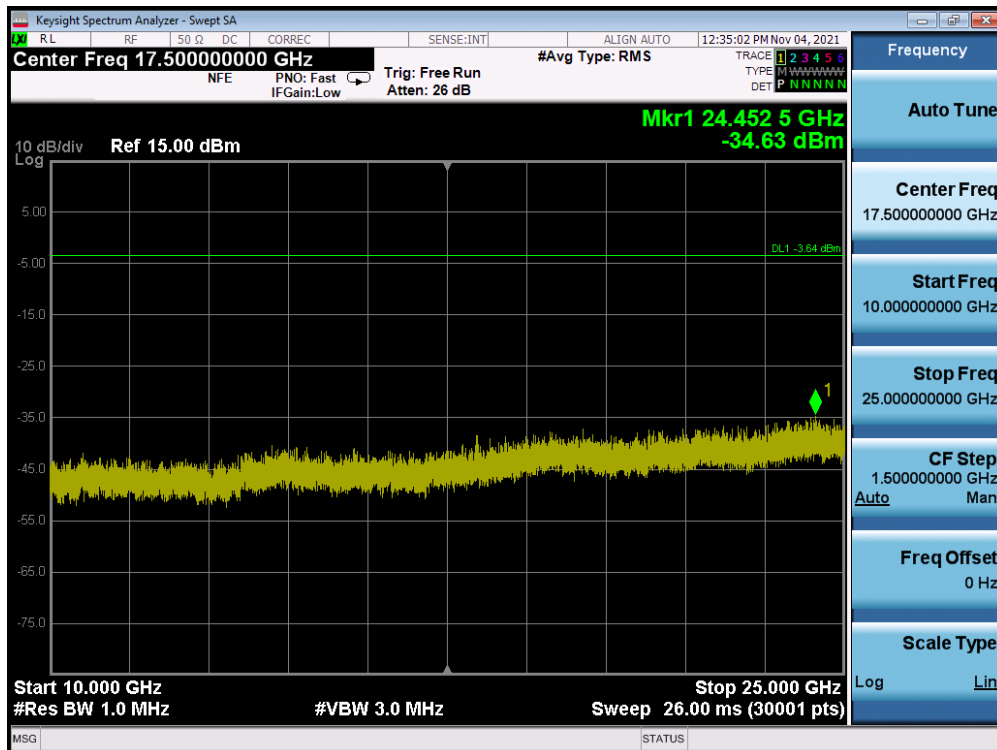


Plot 7-150. Conducted Spurious Plot (Bluetooth, 1Mbps– Ch. 0) Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 102 of 129

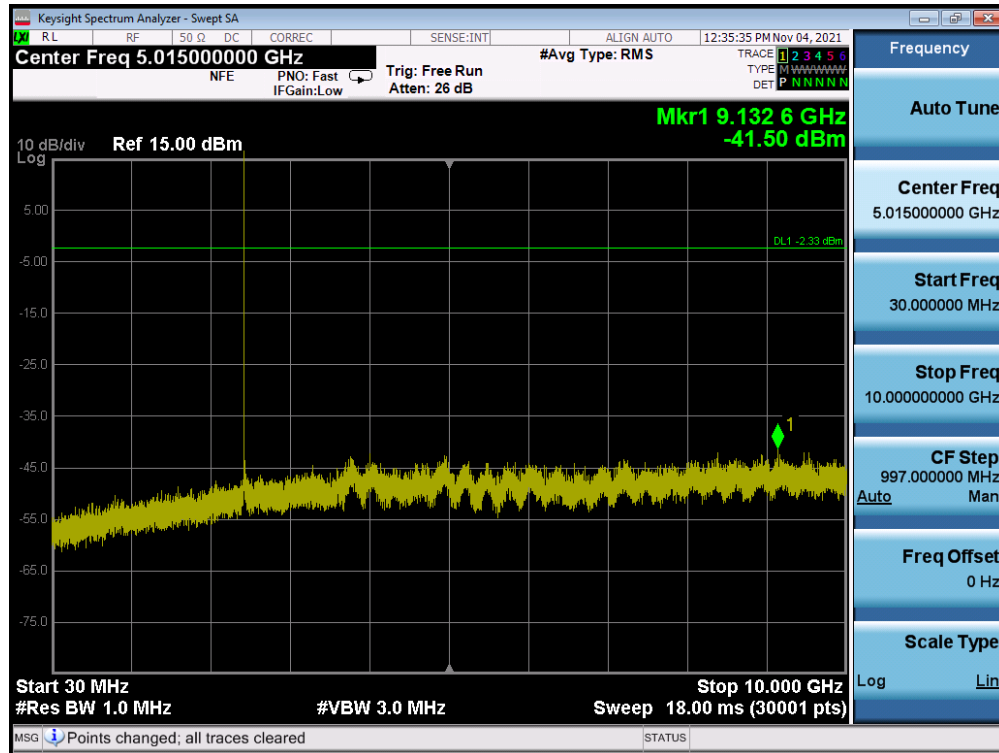


Plot 7-151. Conducted Spurious Plot (Bluetooth, 1Mbps– Ch. 39) Antenna 2

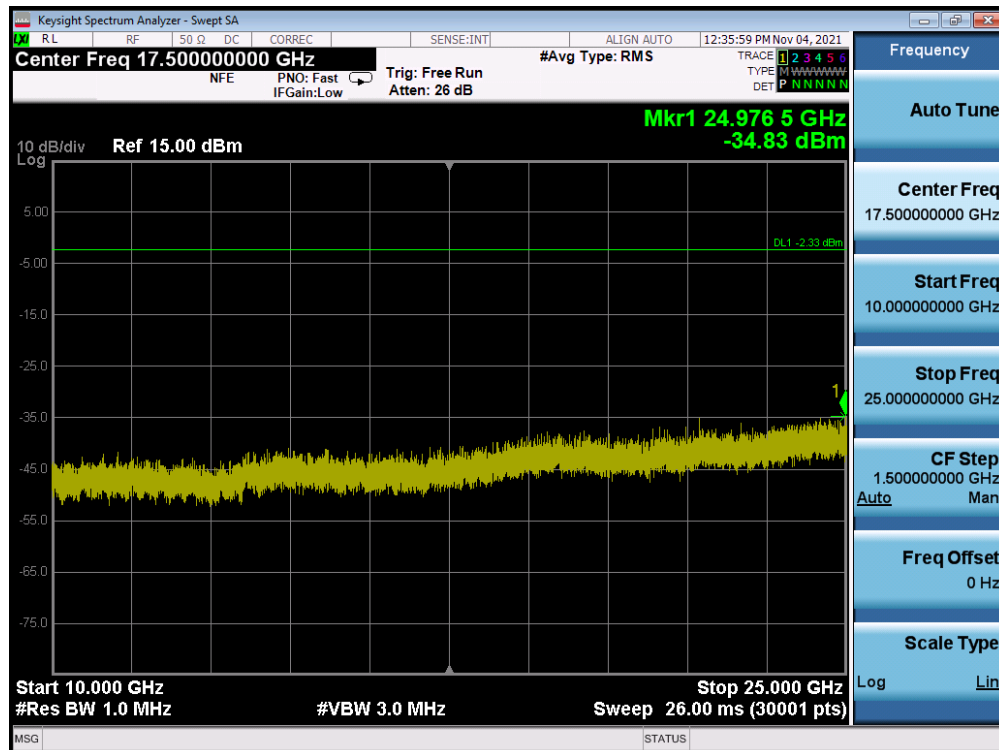


Plot 7-152. Conducted Spurious Plot (Bluetooth, 1MbpsCh. 39) Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 103 of 129

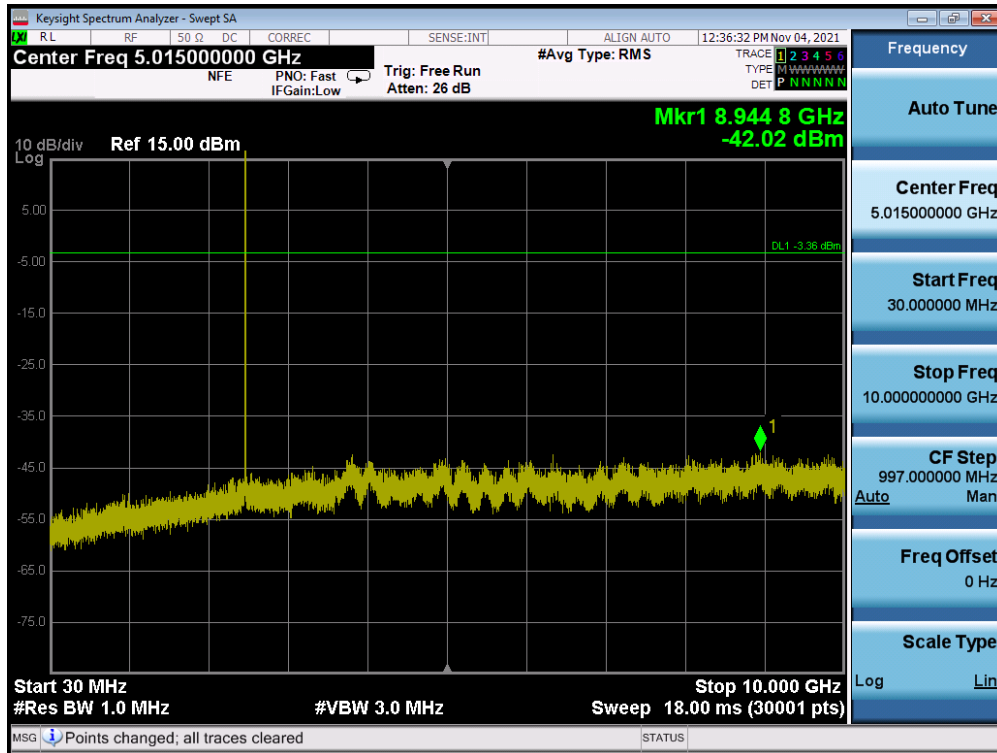

Plot 7-153. Conducted Spurious Plot (Bluetooth, 1Mbps– Ch. 78) Antenna 2

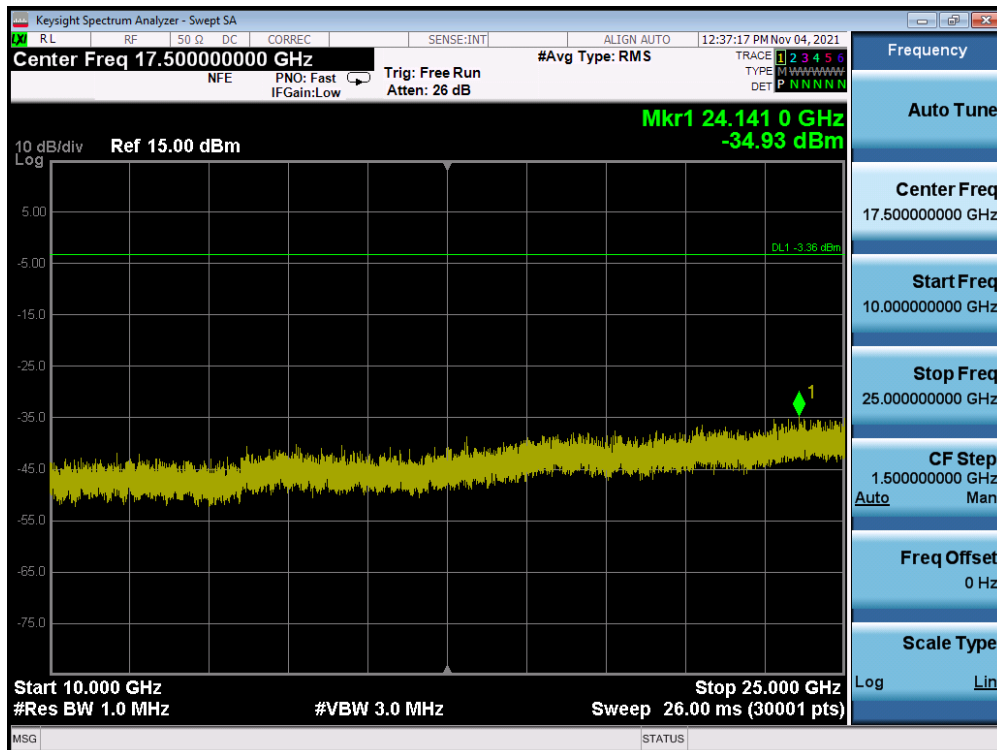

Plot 7-154. Conducted Spurious Plot (Bluetooth, 1Mbps– Ch. 78) Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 104 of 129

7.9 Radiated Spurious Emission Measurements – Above 1GHz

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-10 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-10. Radiated Limits

Test Procedure Used

ANSI C63.10-2013 – Section 6.6.4.3

Test Settings

Average Field Strength Measurements per Section 4.1.4.2.3 of ANSI C63.10-2013

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 1kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to stabilize

Peak Field Strength Measurements per Section 4.1.4.2.2 of ANSI C63.10-2013

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in Table 7-11 below
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 105 of 129

Frequency	RBW
9 – 150kHz	200 – 300Hz
0.15 – 30MHz	9 – 10kHz
30 – 1000MHz	100 – 120kHz
> 1000MHz	1MHz

Table 7-11. RBW as a Function of Frequency

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

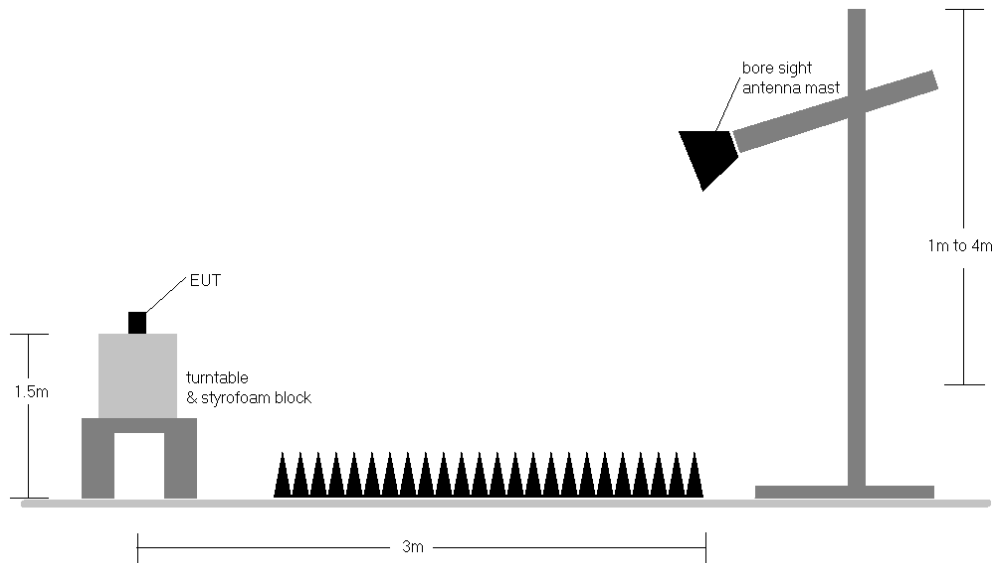


Figure 7-8. Radiated Test Setup >1GHz

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-10.
2. No significant radiated emissions were found in the 2310 - 2390MHz restricted band.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
6. The duty cycle correction factor was not applied to noise floor measurements.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 106 of 129

Sample Calculation

- Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}] + \text{Duty Cycle Correction} [\text{dB}]$
- $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}]$
- $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$


Duty Cycle Correction Factor Calculation

- Channel hop rate = 800 hops/second (AFH Mode)
- Adjusted channel hop rate for DH5 mode = 133.33 hops/second
- Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.50 \text{ ms}$
- Time to cycle through all channels = $7.50 \times 20 \text{ channels} = 150 \text{ ms}$
- Number of times transmitter hits on one channel = $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$
- Worst case dwell time = 7.5 ms
- Duty cycle correction factor = $20\log_{10}(7.5\text{ms}/100\text{ms}) = -22.5 \text{ dB}$


FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 107 of 129

Radiated Spurious Emission Measurements


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

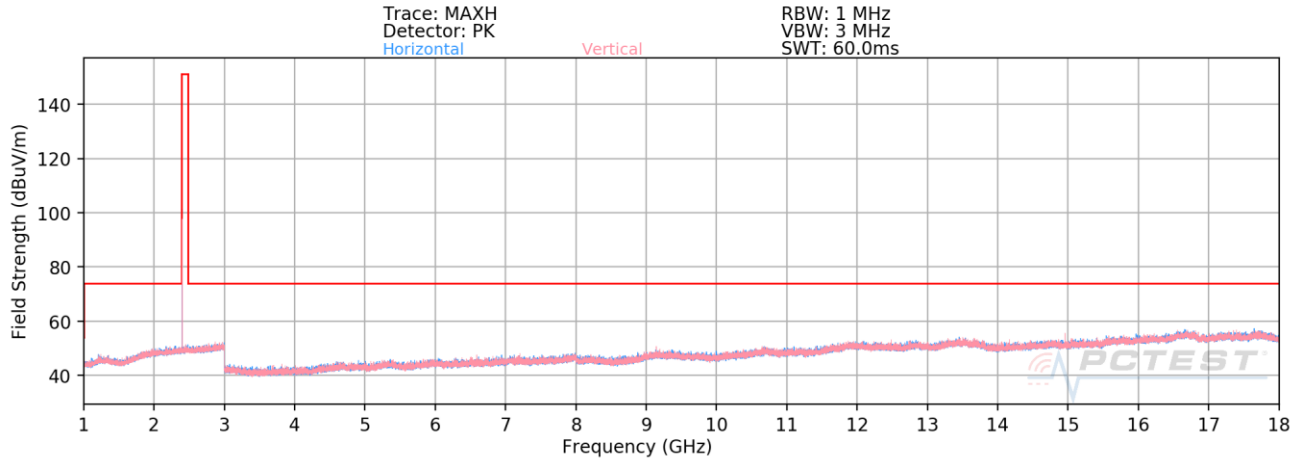

Plot 7-155. Radiated Spurious Plot above 1GHz (BT- Ch. 0) – Antenna 1

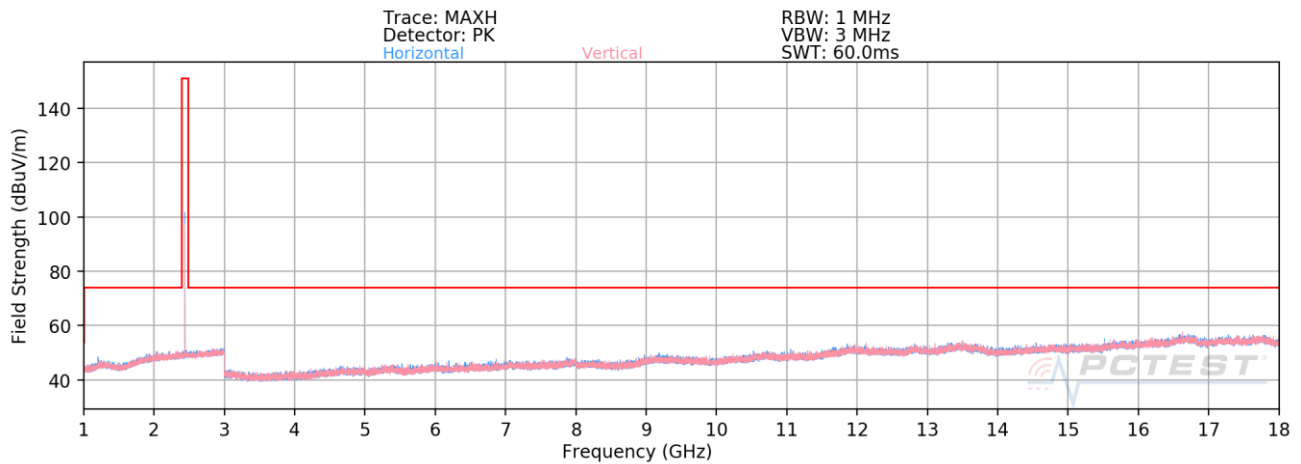

Plot 7-156. Radiated Spurious Plot above 1GHz (BT- Ch. 39) – Antenna 1

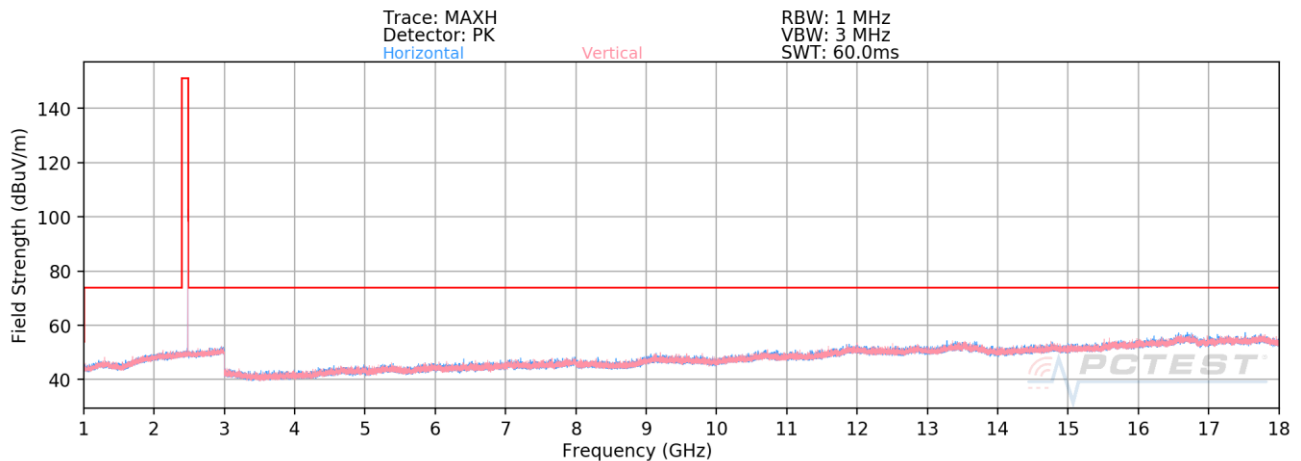


Plot 7-157. Radiated Spurious Plot above 1GHz (BT- Ch. 78) – Antenna 1

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 108 of 129

Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

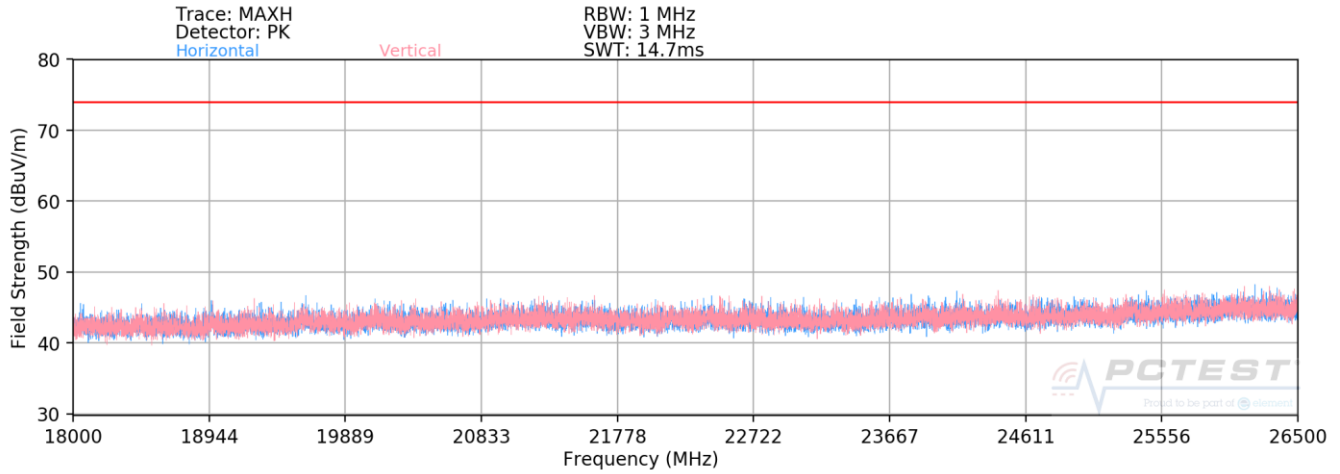

Plot 7-158. Radiated Spurious Plot above 18GHz Antenna 1

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 109 of 129

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth
Worst Case Data Rate: 1 Mbps
Measurement Distance: 3 Meters
Operating Frequency: 2402MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Avg	H	366	32	-80.14	9.82	-22.50	14.18	53.98	-39.80
4804.00	Peak	H	366	31	-69.45	9.82	0.00	47.37	73.98	-26.61
12010.00	Avg	H	-	-	-79.99	22.99	0.00	50.00	53.98	-3.98
12010.00	Peak	H	-	-	-69.36	22.99	0.00	60.63	73.98	-13.35

Table 7-12. Radiated Measurements – Antenna 1

Worst Case Mode: Bluetooth
Worst Case Data Rate: 1 Mbps
Measurement Distance: 3 Meters
Operating Frequency: 2441MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Avg	H	377	25	-77.58	9.18	-22.50	16.10	53.98	-37.88
4882.00	Peak	H	377	25	-66.54	9.18	0.00	49.64	73.98	-24.34
7323.00	Avg	H	-	-	-76.14	15.31	0.00	46.17	53.98	-7.81
7323.00	Peak	H	-	-	-67.80	15.31	0.00	54.51	73.98	-19.47
12205.00	Avg	H	-	-	-79.01	22.70	0.00	50.69	53.98	-3.29
12205.00	Peak	H	-	-	-72.16	22.70	0.00	57.54	73.98	-16.44

Table 7-13. Radiated Measurements – Antenna 1

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 110 of 129

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	376	180	-74.82	9.92	-22.50	19.60	53.98	-34.38
4960.00	Peak	H	376	180	-66.46	9.92	0.00	50.46	73.98	-23.52
7440.00	Avg	H	-	-	-77.01	15.55	0.00	45.54	53.98	-8.44
7440.00	Peak	H	-	-	-68.21	15.55	0.00	54.34	73.98	-19.64
12400.00	Avg	H	-	-	-79.90	23.00	0.00	50.10	53.98	-3.88
12400.00	Peak	H	-	-	-69.00	23.00	0.00	61.00	73.98	-12.98

Table 7-14. Radiated Measurements – Antenna 1


FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 111 of 129

Radiated Spurious Emission Measurements


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

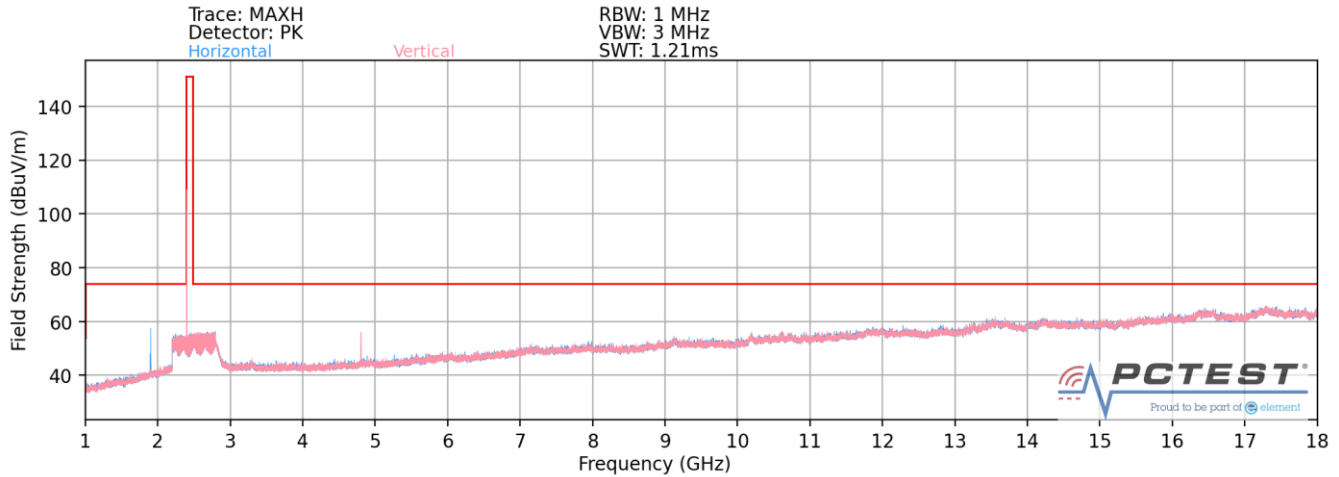

Plot 7-159. Radiated Spurious Plot above 1GHz (BT- Ch. 0) – Antenna 2

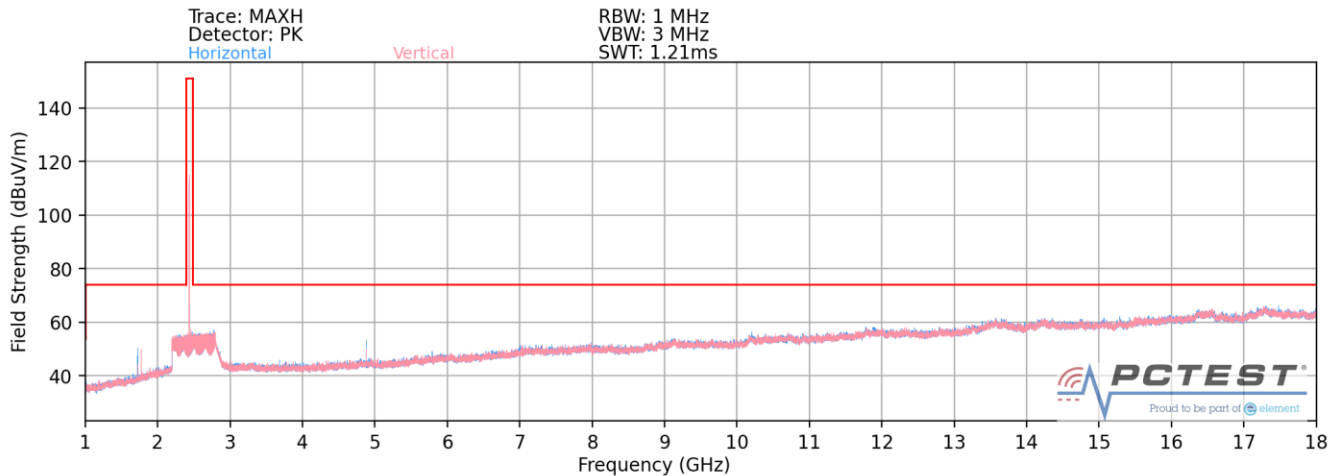

Plot 7-160. Radiated Spurious Plot above 1GHz (BT- Ch. 39) – Antenna 2

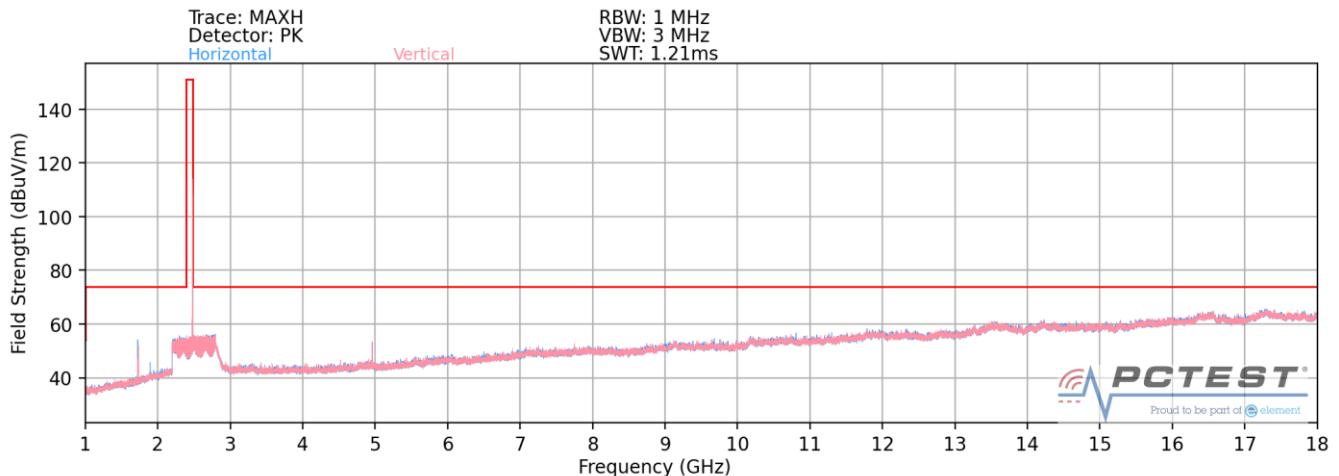


Plot 7-161. Radiated Spurious Plot above 1GHz (BT- Ch. 78) – Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 112 of 129

Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

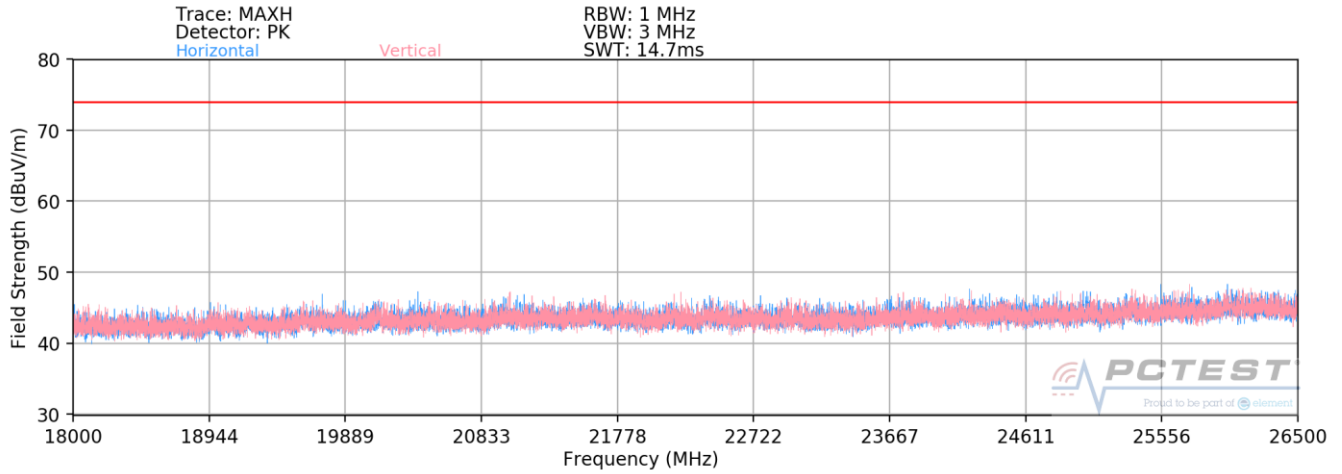

Plot 7-162. Radiated Spurious Plot above 18GHz Antenna 2

FCC ID: A3LSMS906E	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 113 of 129

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth
Worst Case Data Rate: 1 Mbps
Measurement Distance: 3 Meters
Operating Frequency: 2402MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Avg	H	162	71	-76.99	9.82	-22.50	17.33	53.98	-36.65
4804.00	Peak	H	162	71	-67.21	9.82	0.00	49.61	73.98	-24.37
12010.00	Avg	H	-	-	-79.21	22.99	0.00	50.78	53.98	-3.20
12010.00	Peak	H	-	-	-70.14	22.99	0.00	59.85	73.98	-14.13

Table 7-15. Radiated Measurements – Antenna 2

Worst Case Mode: Bluetooth
Worst Case Data Rate: 1 Mbps
Measurement Distance: 3 Meters
Operating Frequency: 2441MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Avg	H	154	72	-77.21	9.18	-22.50	16.47	53.98	-37.51
4882.00	Peak	H	154	72	-66.01	9.18	0.00	50.17	73.98	-23.81
7323.00	Avg	H	-	-	-78.92	15.31	0.00	43.39	53.98	-10.59
7323.00	Peak	H	-	-	-69.25	15.31	0.00	53.06	73.98	-20.92
12205.00	Avg	H	-	-	-82.01	22.70	0.00	47.69	53.98	-6.29
12205.00	Peak	H	-	-	-72.59	22.70	0.00	57.11	73.98	-16.87

Table 7-16. Radiated Measurements – Antenna 2

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 114 of 129

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	160	69	-76.88	9.92	-22.50	17.54	53.98	-36.44
4960.00	Peak	H	160	69	-65.30	9.92	0.00	51.62	73.98	-22.36
7440.00	Avg	H	-	-	-80.00	15.55	0.00	42.55	53.98	-11.43
7440.00	Peak	H	-	-	-71.42	15.55	0.00	51.13	73.98	-22.85
12400.00	Avg	H	-	-	-81.44	23.00	0.00	48.56	53.98	-5.42
12400.00	Peak	H	-	-	-73.53	23.00	0.00	56.47	73.98	-17.51

Table 7-17. Radiated Measurements – Antenna 2


FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 115 of 129

Radiated Spurious Emission Measurements


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

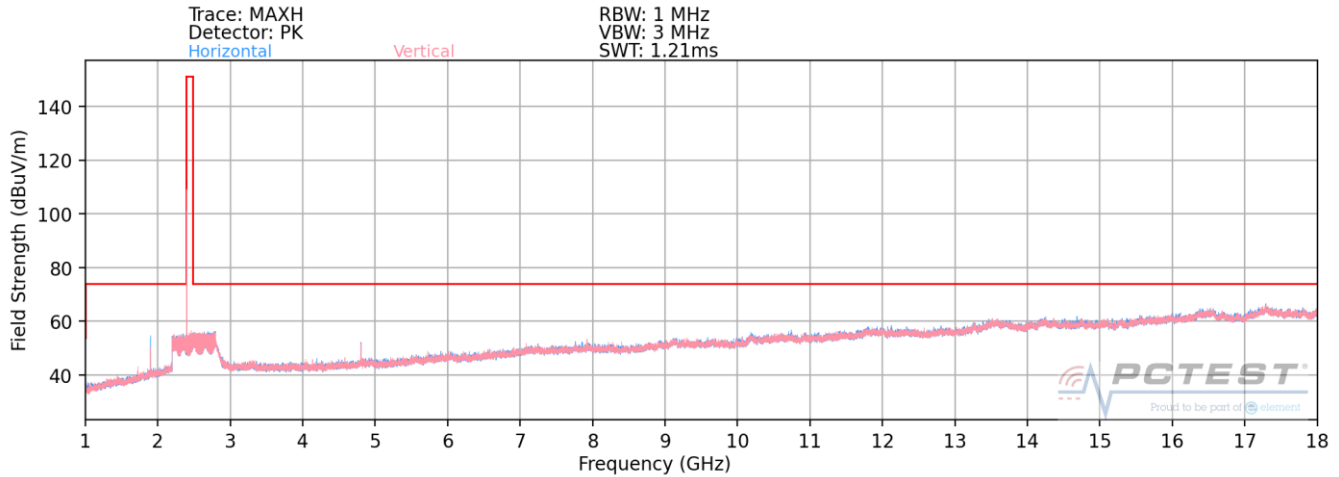

Plot 7-163. Radiated Spurious Plot above 1GHz (BT- Ch. 0) – Dual

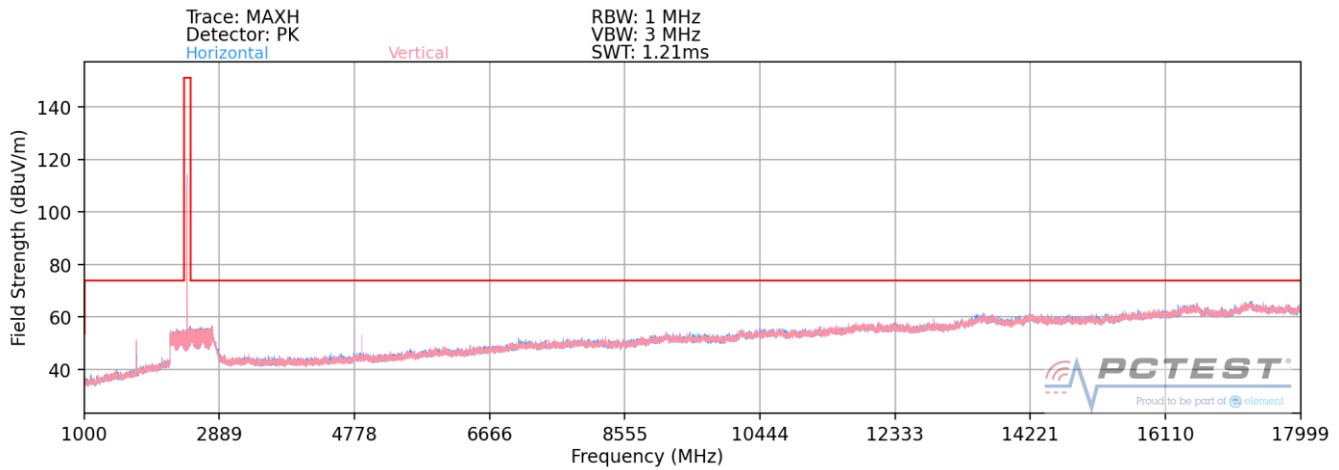

Plot 7-164. Radiated Spurious Plot above 1GHz (BT- Ch. 39) – Dual

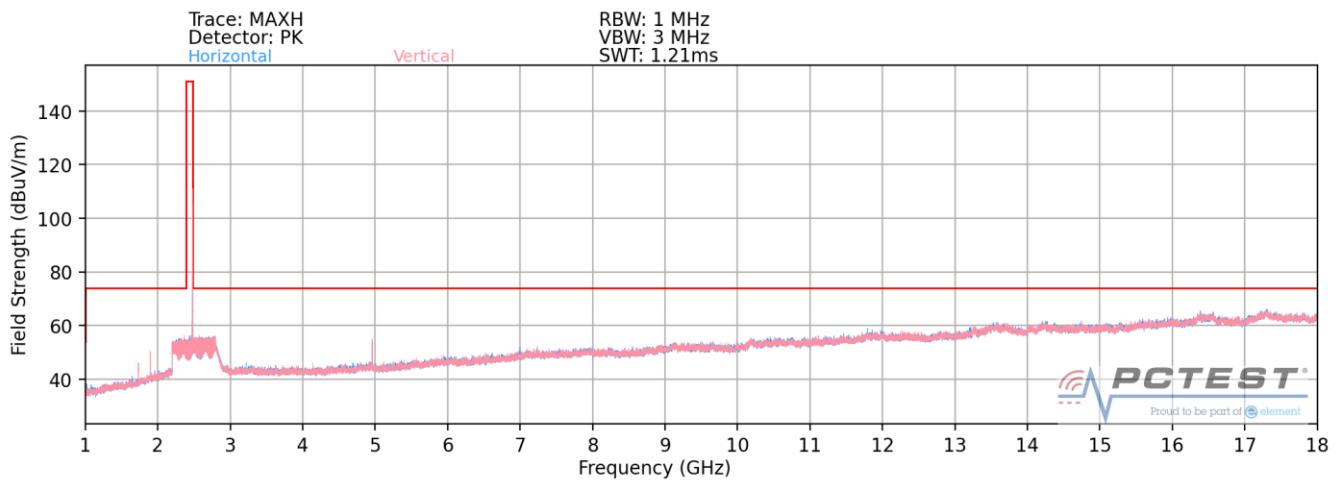


Plot 7-165. Radiated Spurious Plot above 1GHz (BT- Ch. 78) – Dual

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 116 of 129

Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

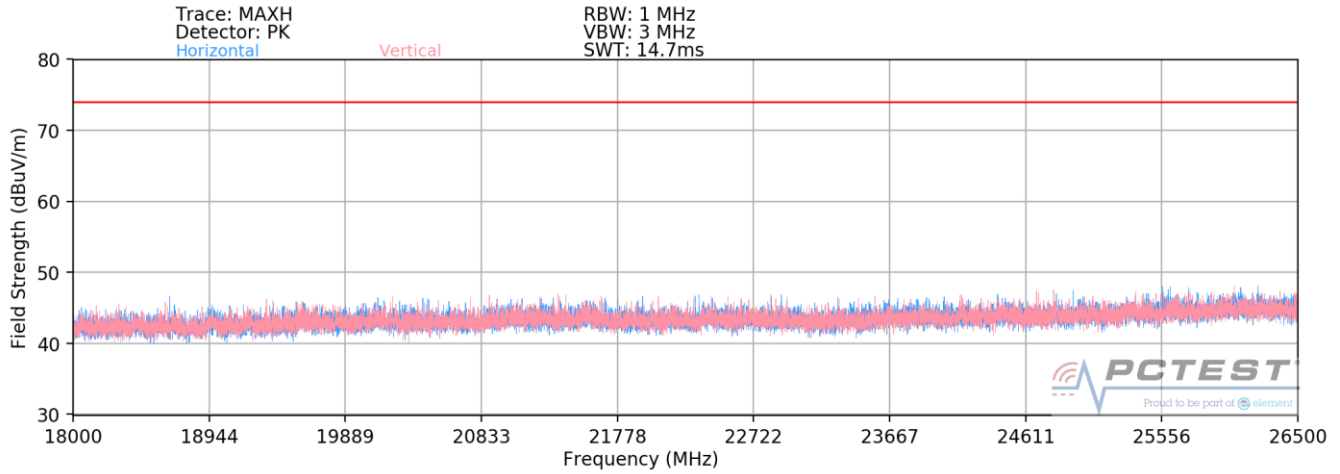

Plot 7-166. Radiated Spurious Plot above 18GHz Dual

FCC ID: A3LSMS906E	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 117 of 129

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth
Worst Case Data Rate: 1 Mbps
Measurement Distance: 3 Meters
Operating Frequency: 2402MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Avg	H	-	-	-79.52	9.82	37.30	53.98	-16.68
4804.00	Peak	H	-	-	-68.32	9.82	48.50	73.98	-25.48
12010.00	Avg	H	-	-	-81.11	22.99	48.88	53.98	-5.10
12010.00	Peak	H	-	-	-70.59	22.99	59.40	73.98	-14.58

Table 7-18. Radiated Measurements – Dual

Worst Case Mode: Bluetooth
Worst Case Data Rate: 1 Mbps
Measurement Distance: 3 Meters
Operating Frequency: 2441MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Avg	H	131	26	-78.44	9.18	-22.50	15.24	53.98	-38.74
4882.00	Peak	H	131	26	-67.34	9.18	0.00	48.84	73.98	-25.14
7323.00	Avg	H	-	-	-77.74	15.31	0.00	44.57	53.98	-9.41
7323.00	Peak	H	-	-	-68.64	15.31	0.00	53.67	73.98	-20.31
12205.00	Avg	H	-	-	-78.82	22.70	0.00	50.88	53.98	-3.10
12205.00	Peak	H	-	-	-71.04	22.70	0.00	58.66	73.98	-15.32

Table 7-19. Radiated Measurements – Dual

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 118 of 129

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Avg	H	112	9	-75.90	9.92	-22.50	18.52	53.98	-35.46
4960.00	Peak	H	112	9	-66.83	9.92	0.00	50.09	73.98	-23.89
7440.00	Avg	H	-	-	-76.80	15.55	0.00	45.75	53.98	-8.23
7440.00	Peak	H	-	-	-67.81	15.55	0.00	54.74	73.98	-19.24
12400.00	Avg	H	-	-	-79.24	23.00	0.00	50.76	53.98	-3.22
12400.00	Peak	H	-	-	-70.83	23.00	0.00	59.17	73.98	-14.81

Table 7-20. Radiated Measurements – Dual

Worst Case Mode:	Bluetooth
Worst Case Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Avg	H	-	-	-76.24	9.92	-22.50	18.18	53.98	-35.80
4960.00	Peak	H	-	-	-65.99	9.92	0.00	50.93	73.98	-23.05
7440.00	Avg	H	-	-	-77.01	15.55	0.00	45.54	53.98	-8.44
7440.00	Peak	H	-	-	-68.21	15.55	0.00	54.34	73.98	-19.64
12400.00	Avg	H	-	-	-80.04	23.00	0.00	49.96	53.98	-4.02
12400.00	Peak	H	-	-	-71.11	23.00	0.00	58.89	73.98	-15.09

Table 7-21. Radiated Measurements – Dual WCP

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 119 of 129

7.10 Radiated Restricted Band Edge Measurements


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting. Two different amplitude offsets were used depending on whether peak or average measurements were measured. The average measurements use a duty cycle correction factor (DCCF).


The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain} + \text{DCCF}$$

Worst Case Mode:	Bluetooth
Worst Case Data Rate:	3 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

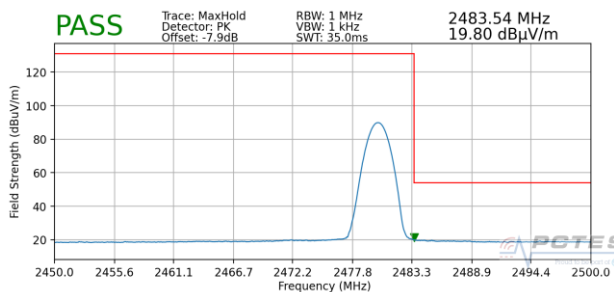


Plot 7-167. Radiated Restricted Upper Band Edge Measurement (Average) – Antenna 1

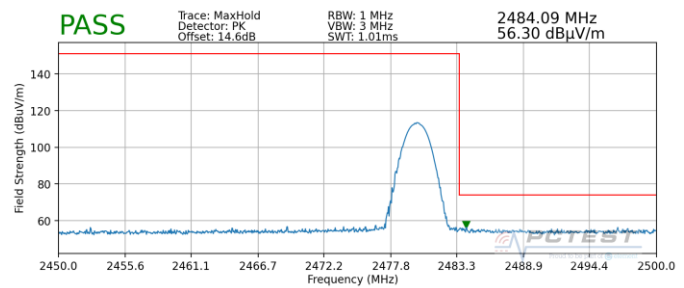


Plot 7-168. Radiated Restricted Upper Band Edge Measurement (Peak) – Antenna 1

Worst Case Mode:	Bluetooth
Worst Case Data Rate:	2 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

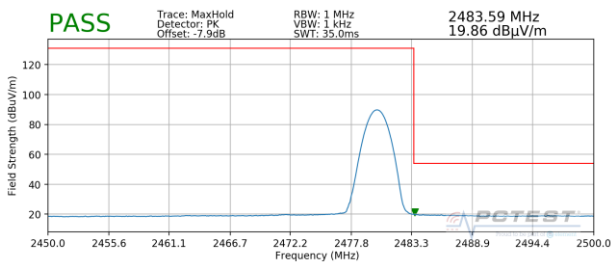


Plot 7-169. Radiated Restricted Upper Band Edge Measurement (Average) – Antenna 2

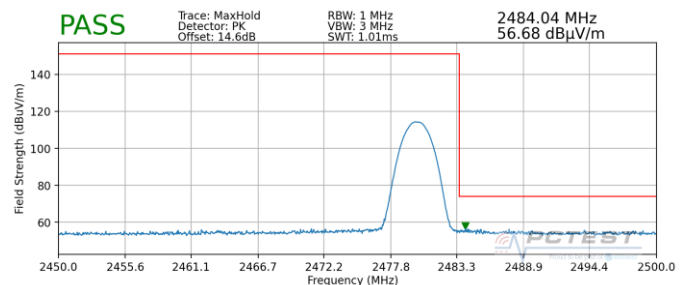


Plot 7-170. Radiated Restricted Upper Band Edge Measurement (Peak) – Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 120 of 129


Worst Case Mode:	Bluetooth
Worst Case Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

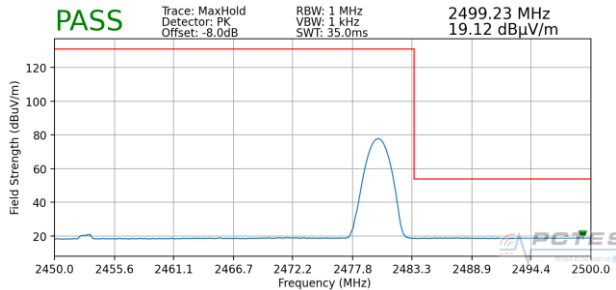


Plot 7-171. Radiated Restricted Upper Band Edge Measurement (Average) – Dual

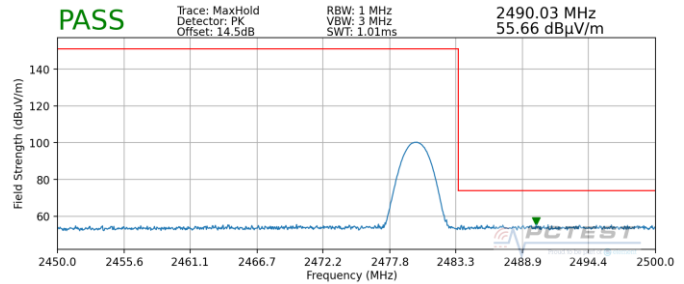

Plot 7-172. Radiated Restricted Upper Band Edge Measurement (Peak) – Dual

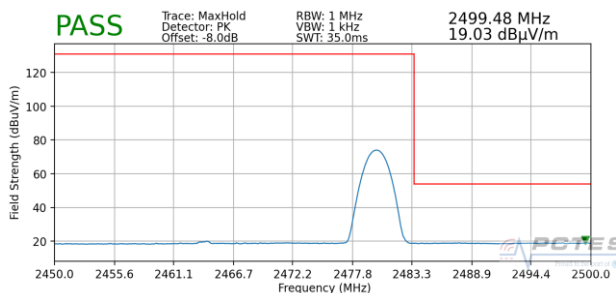

Plot 7-173. Radiated Restricted Upper Band Edge Measurement with WCP (Average) – Dual

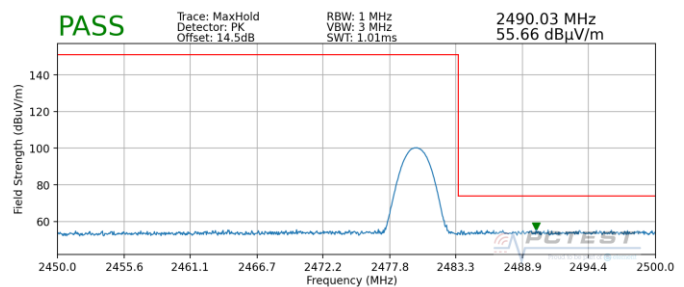

Plot 7-174. Radiated Restricted Upper Band Edge Measurement with WCP (Peak) – Dual

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 121 of 129

7.11 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-22 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-22. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 122 of 129

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

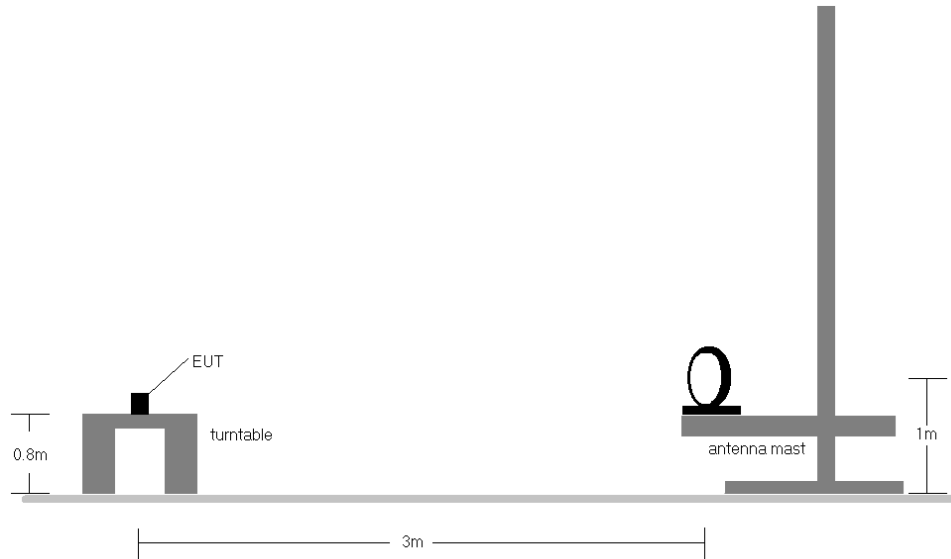


Figure 7-9. Radiated Test Setup < 30Mhz

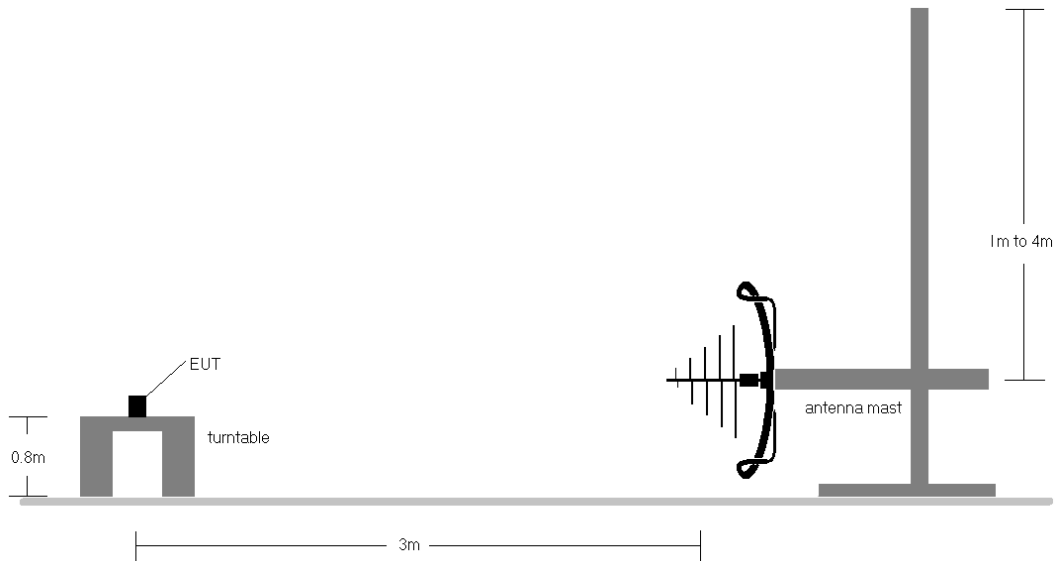


Figure 7-10. Radiated Test Setup < 1GHz

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 123 of 129


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-22.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 124 of 129

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

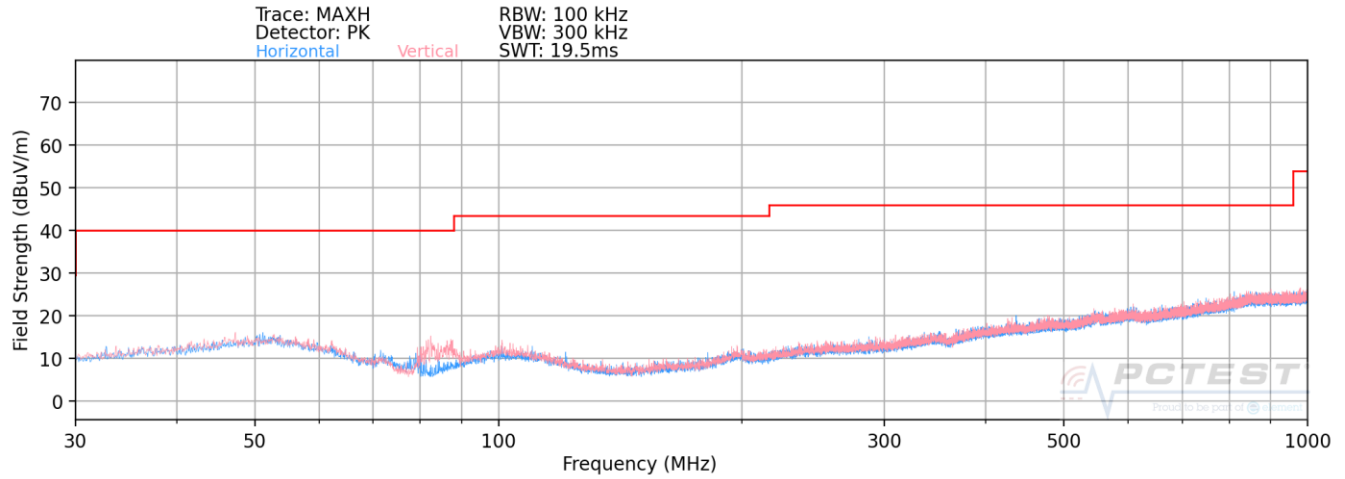

Plot 7-175. Radiated Spurious Plot below 1GHz

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 125 of 129

7.12 Line Conducted Measurement Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-23. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS906E	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 126 of 129

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


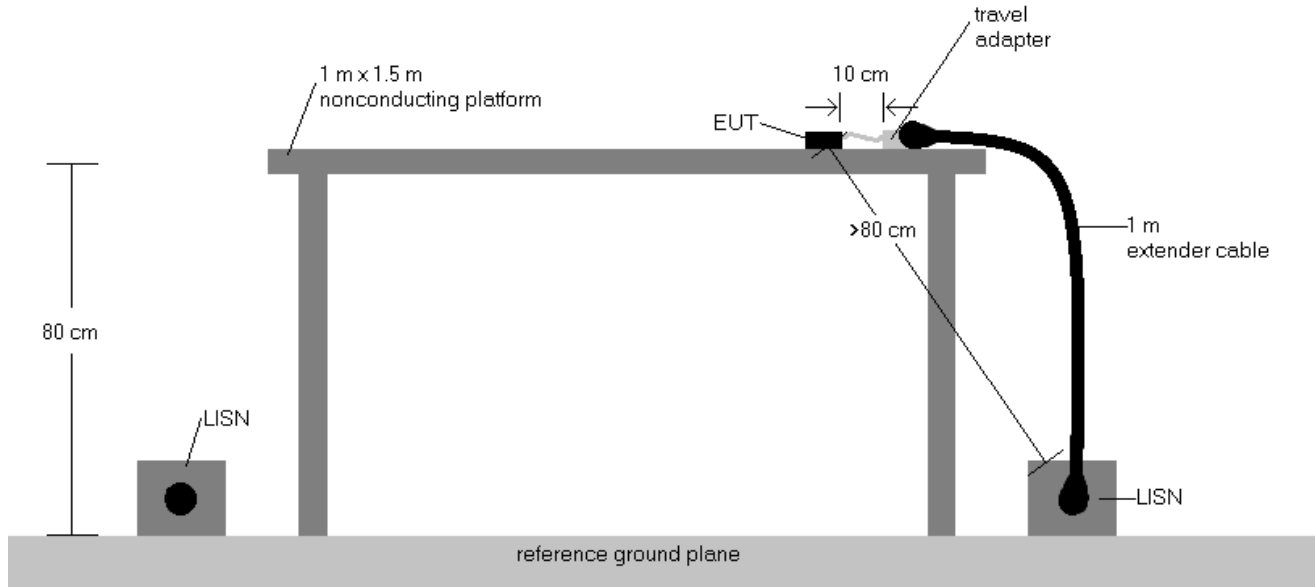


Figure 7-11. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 127 of 129

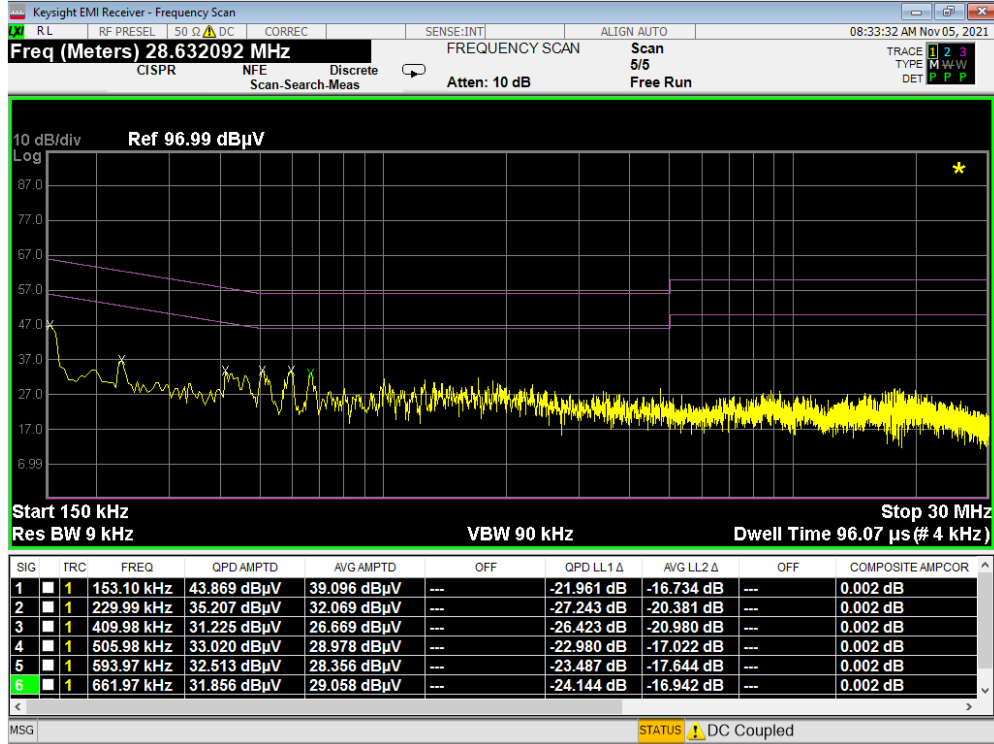

Plot 7-176. Line-Conducted Test Plot (L1)

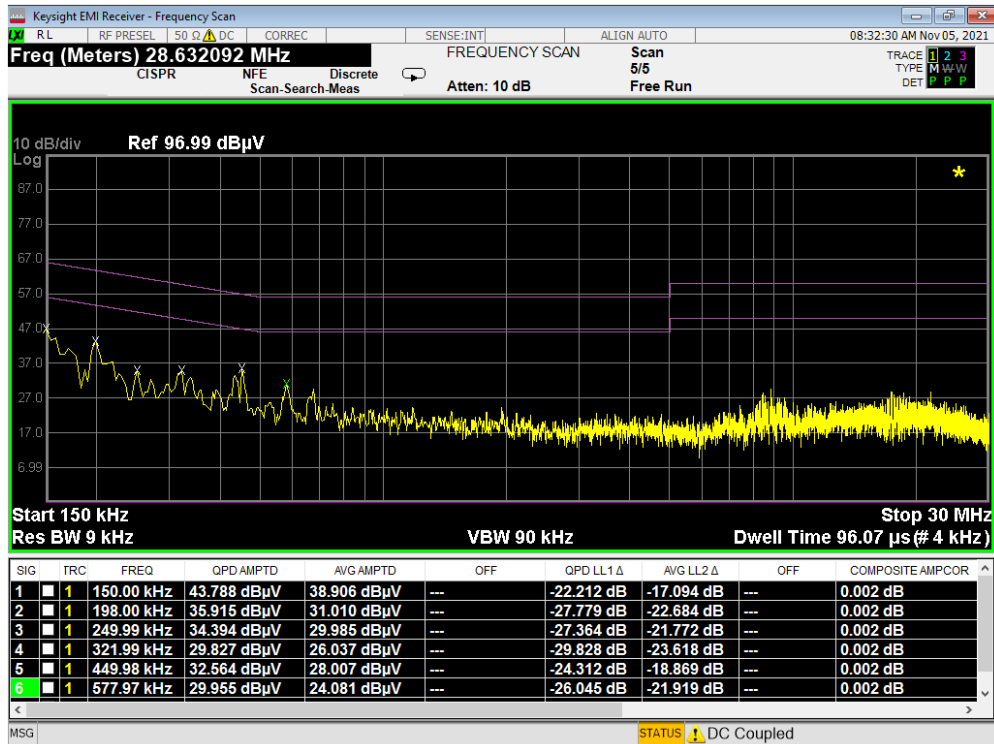

Plot 7-177. Line-Conducted Test Plot (N)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 128 of 129

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS906E** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

FCC ID: A3LSMS906E	 Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 129 of 129