


Antenna-2 Peak Power Spectral Density – 802.11a/n/ac

§15.407 (a)(1)(2),(5) / RSS-210 [A9.2]


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	0.054	4.0	-3.95
	5200	40	a	6	0.245	4.0	-3.76
	5240	48	a	6	0.702	4.0	-3.30
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	-0.542	4.0	-4.54
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	-0.308	4.0	-4.31
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	0.333	4.0	-3.67
	5190	38	n (40MHz)	13.5/15 (MCS0)	-3.474	4.0	-7.47
	5230	46	n (40MHz)	13.5/15 (MCS0)	-3.185	4.0	-7.19
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-7.453	4.0	-11.45
Band II	5260	52	a	6	0.265	11.0	-10.74
	5280	56	a	6	-0.025	11.0	-11.03
	5320	64	a	6	-0.276	11.0	-11.28
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	-1.066	11.0	-12.07
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	-1.407	11.0	-12.41
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	-1.733	11.0	-12.73
	5270	54	n (40MHz)	13.5/15 (MCS0)	-3.670	11.0	-14.67
	5310	62	n (40MHz)	13.5/15 (MCS0)	-4.401	11.0	-15.40
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-7.852	11.0	-18.85
Band III	5500	100	a	6	-0.157	11.0	-11.16
	5580	116	a	6	-0.874	11.0	-11.87
	5700	140	a	6	-0.366	11.0	-11.37
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	-1.755	11.0	-12.76
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	-2.553	11.0	-13.55
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	-1.920	11.0	-12.92
	5510	102	n (40MHz)	13.5/15 (MCS0)	-4.199	11.0	-15.20
	5550	110	n (40MHz)	13.5/15 (MCS0)	-4.296	11.0	-15.30
	5670	134	n (40MHz)	13.5/15 (MCS0)	-4.575	11.0	-15.58
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-8.277	11.0	-19.28

Table 6-22. Conducted Power Spectral Density Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 70 of 183

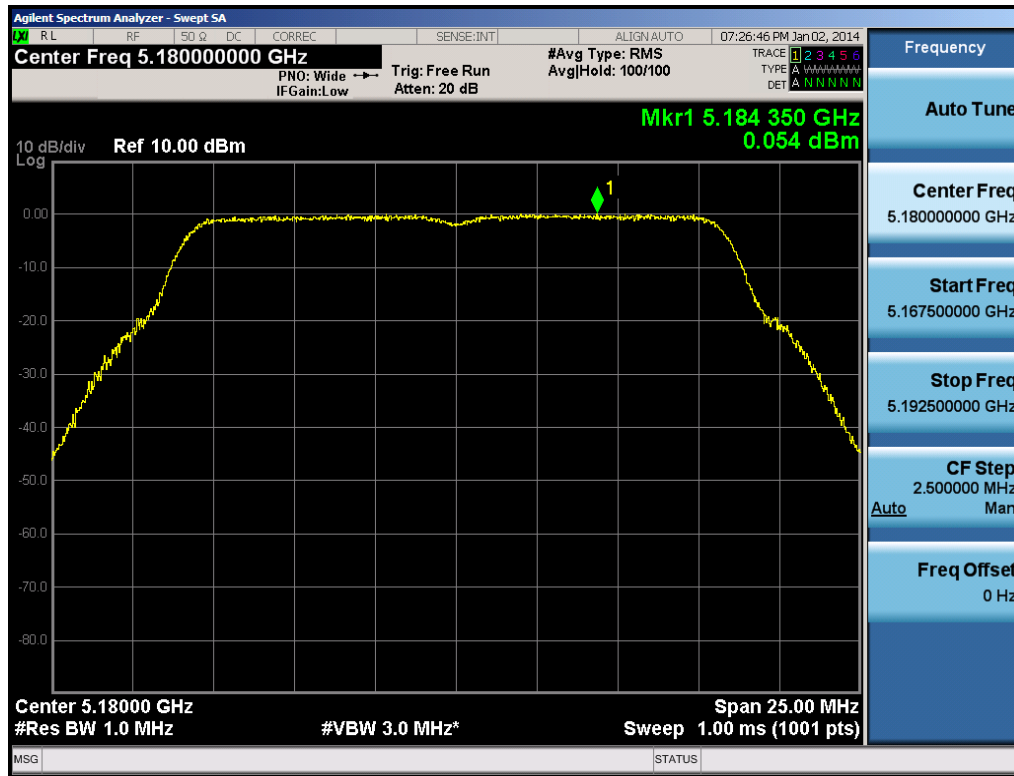


Plot 6-92. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

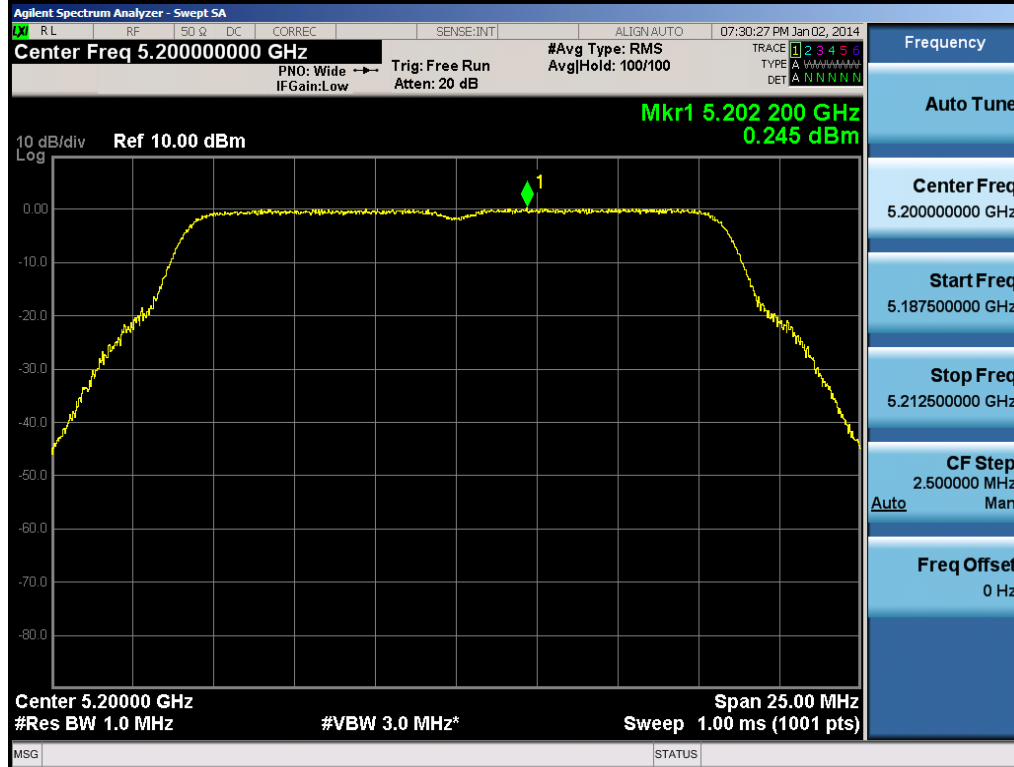


Plot 6-93. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 71 of 183

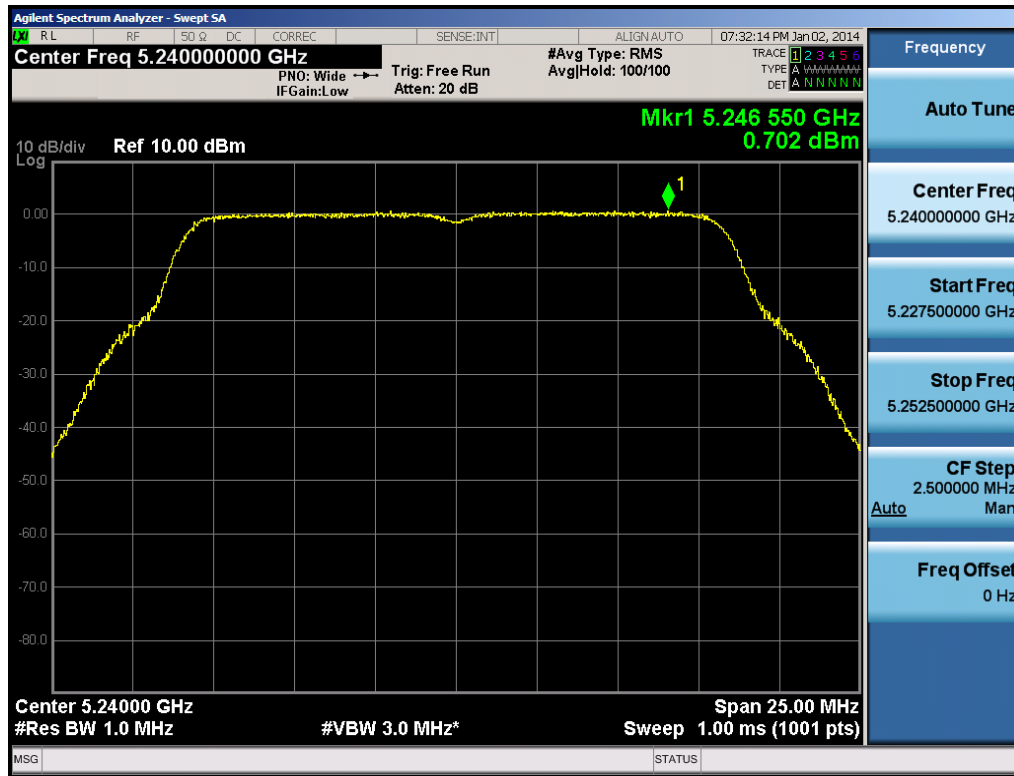


Plot 6-94. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

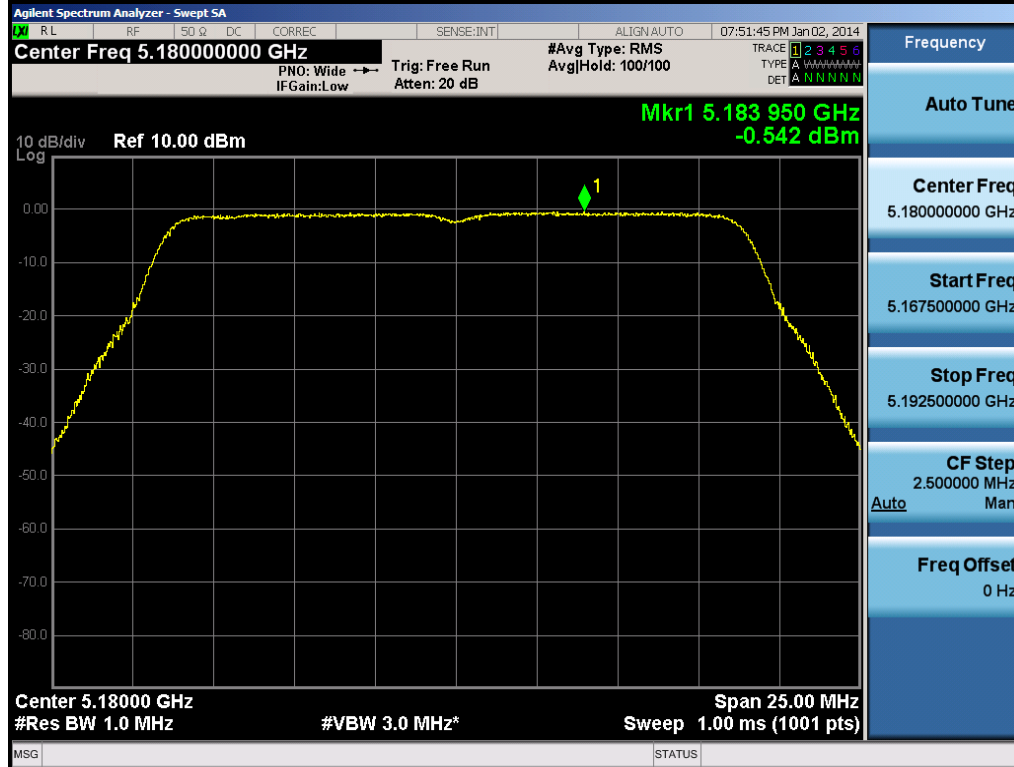


Plot 6-95. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 72 of 183

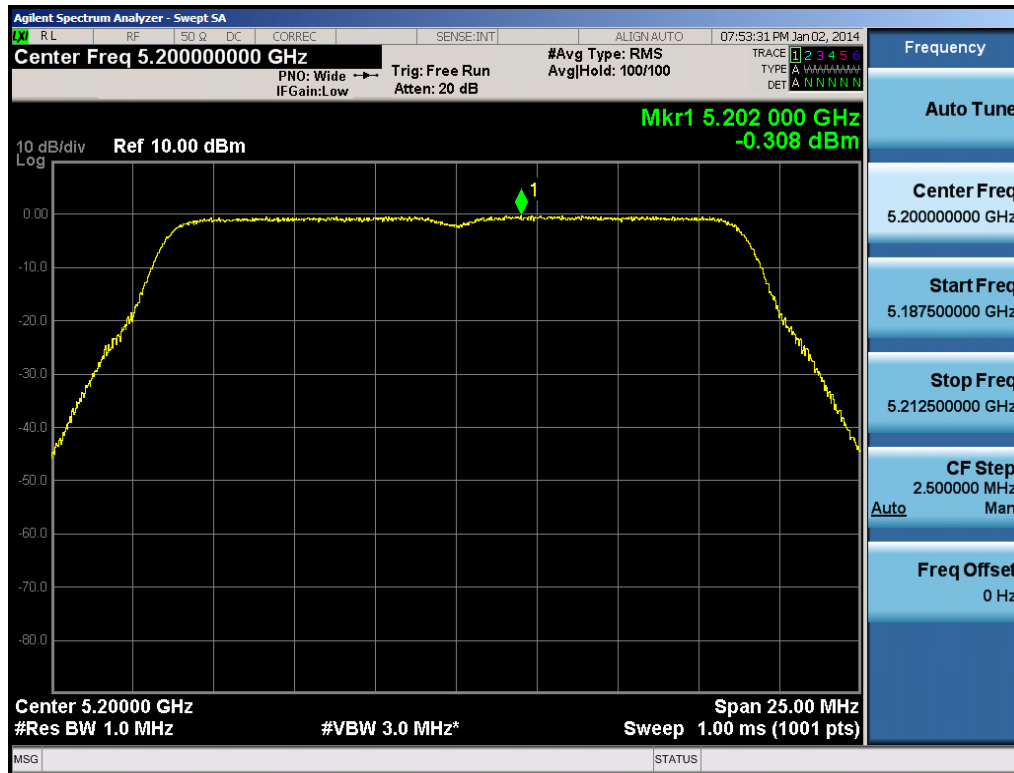


Plot 6-96. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

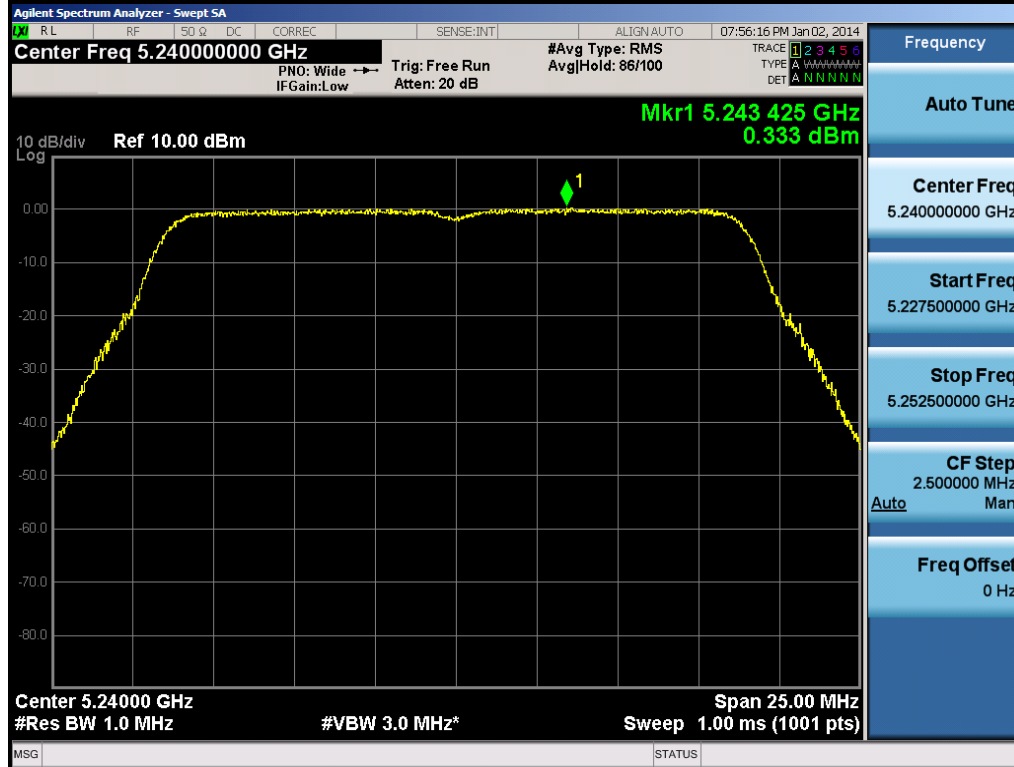


Plot 6-97. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 73 of 183

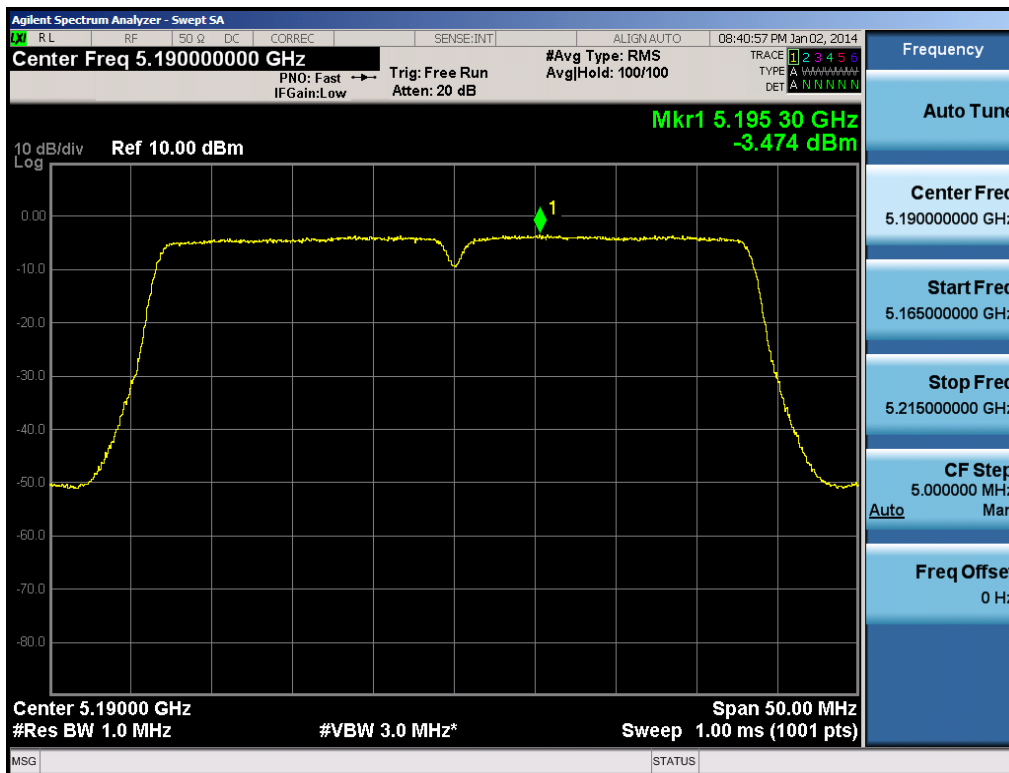


Plot 6-98. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

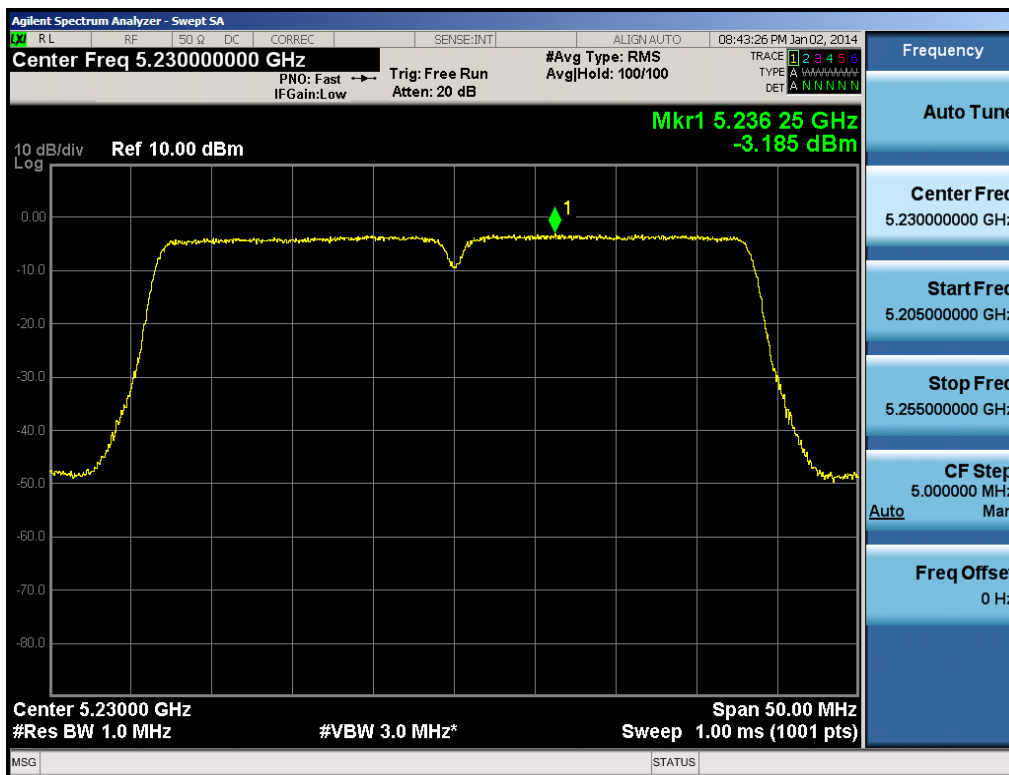


Plot 6-99. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 74 of 183

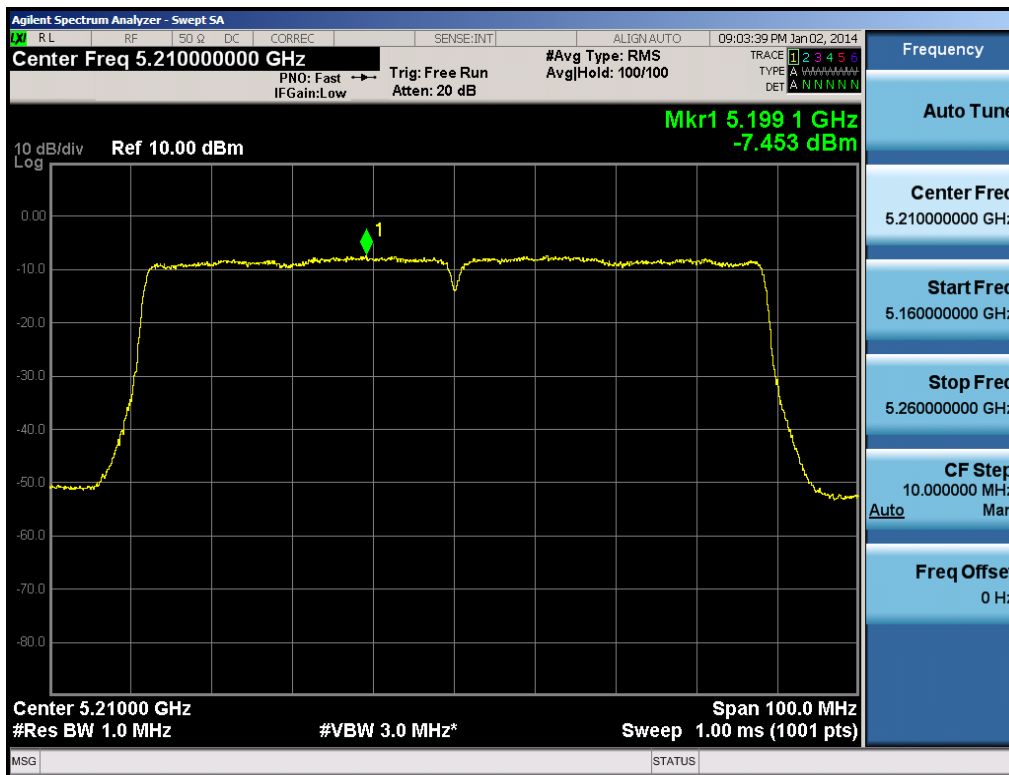


Plot 6-100. Peak Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

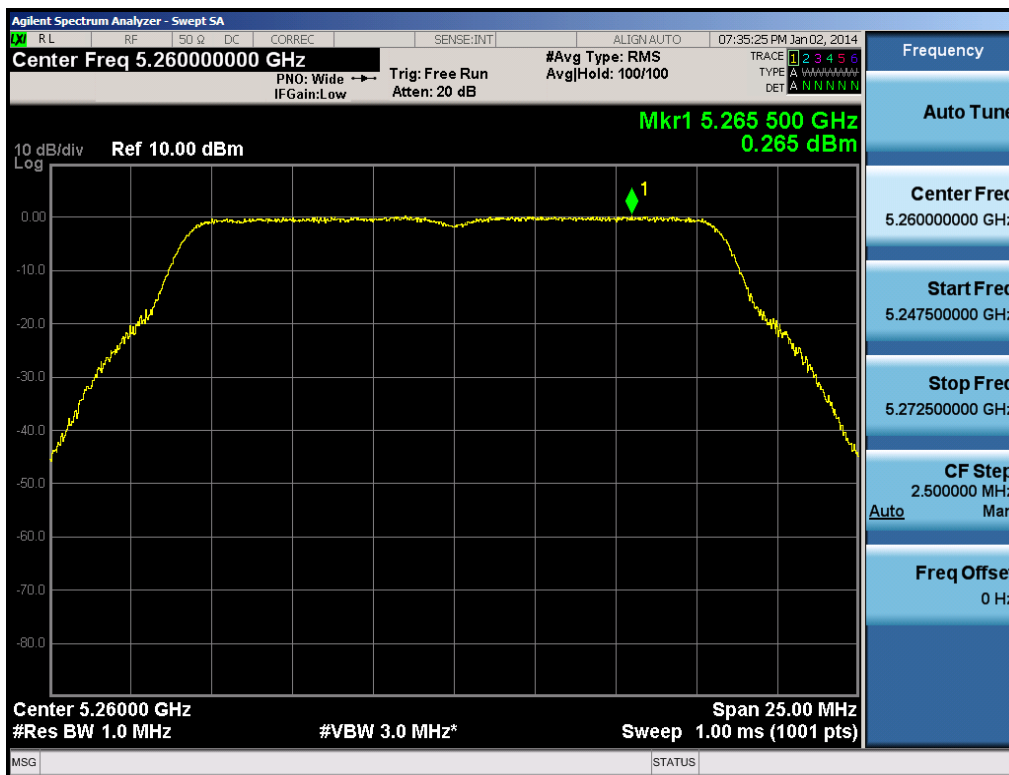


Plot 6-101. Peak Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 75 of 183

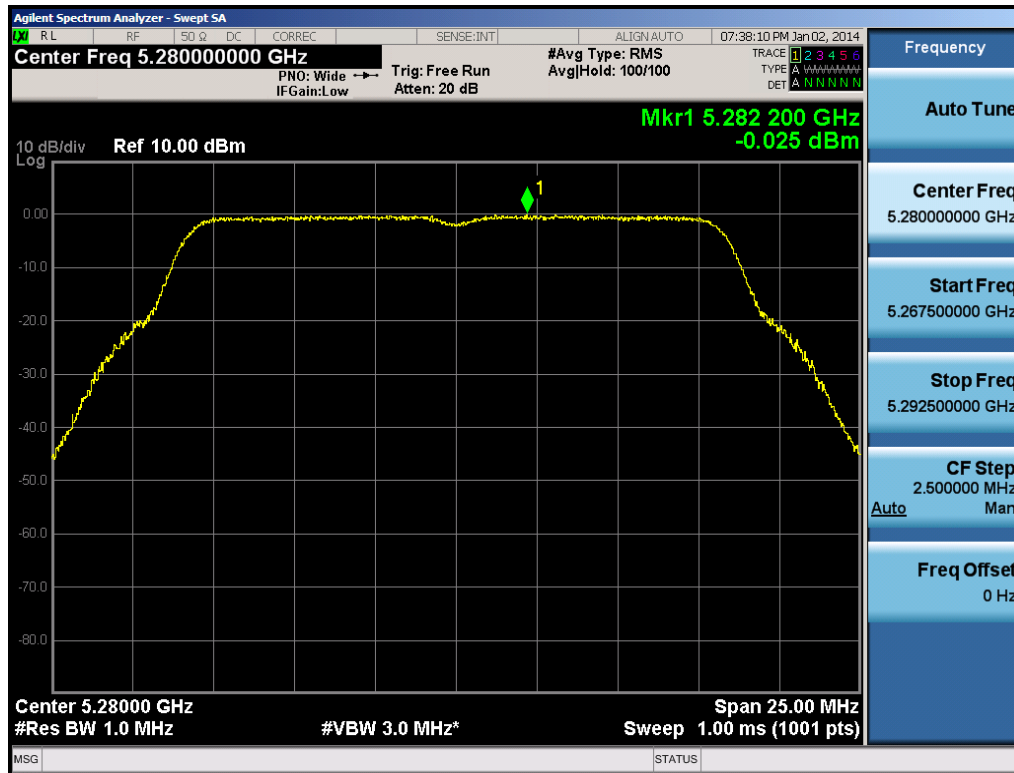


Plot 6-102. Peak Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

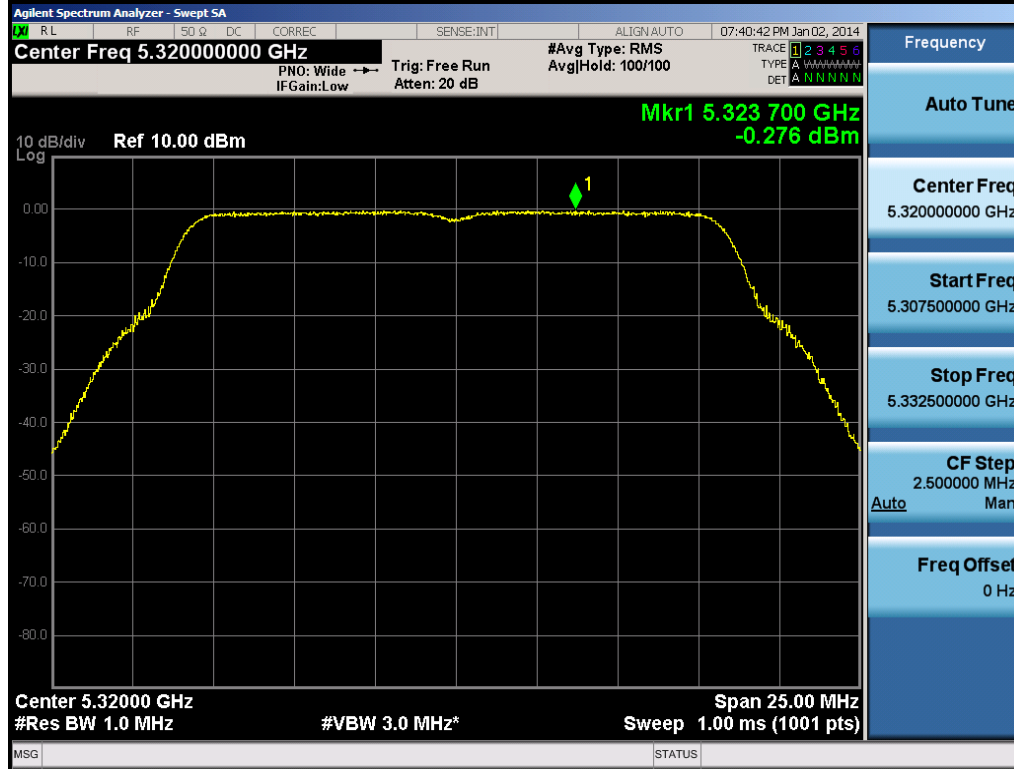


Plot 6-103. Peak Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 76 of 183

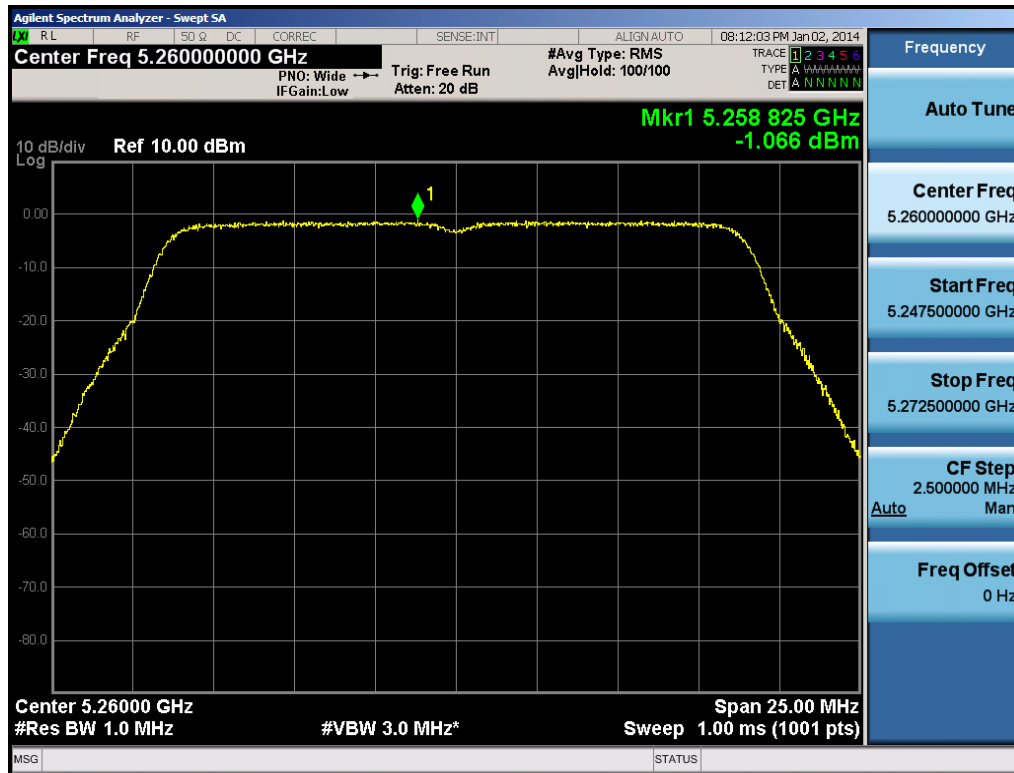


Plot 6-104. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

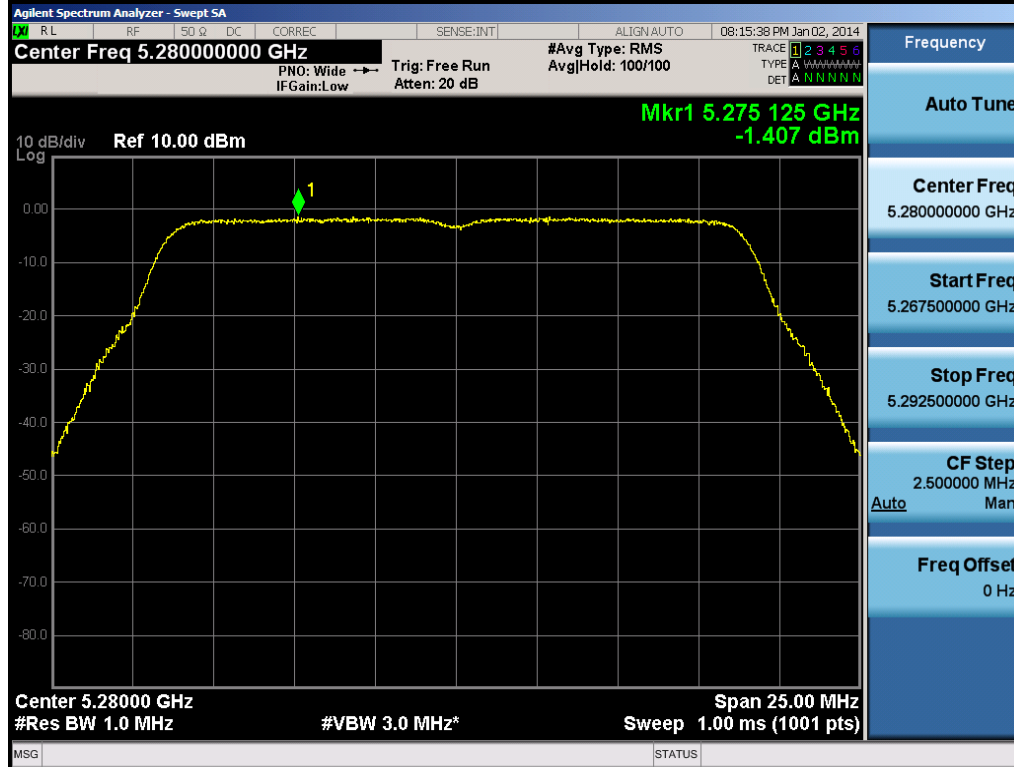


Plot 6-105. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 77 of 183

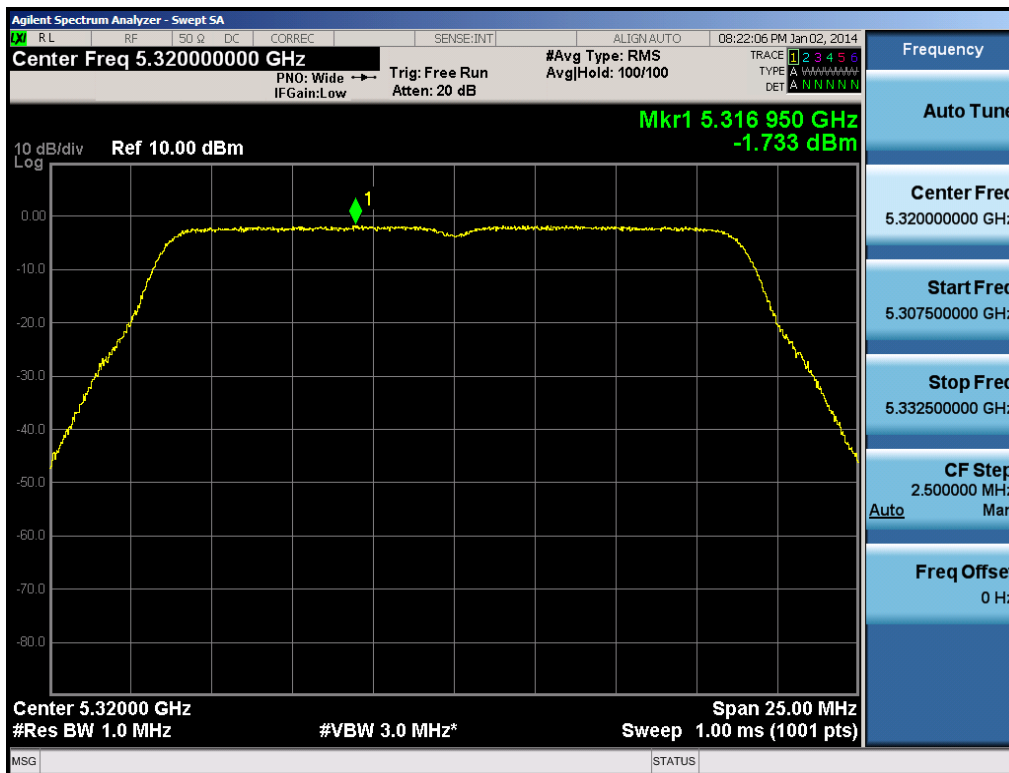


Plot 6-106. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

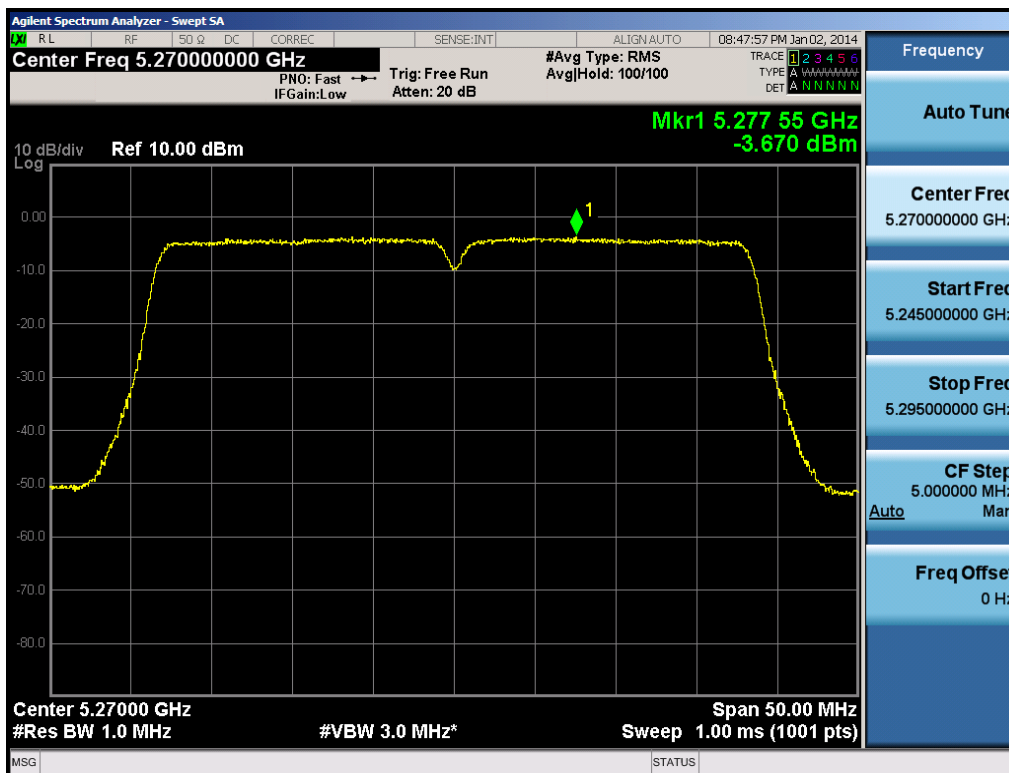


Plot 6-107. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 78 of 183

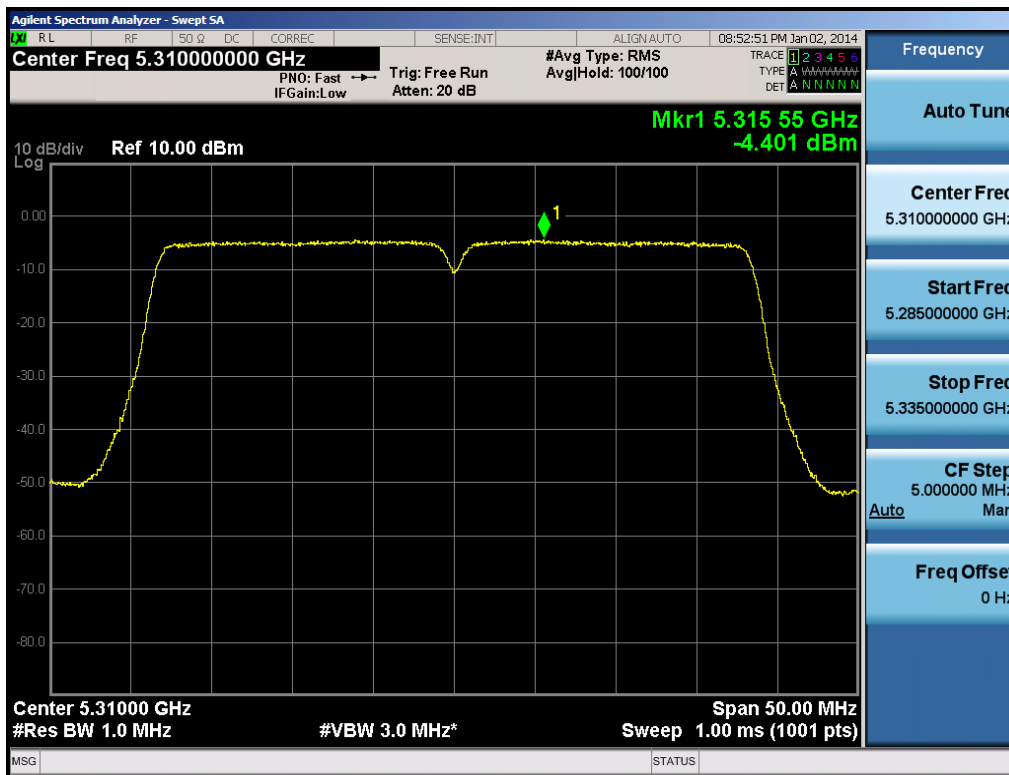


Plot 6-108. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

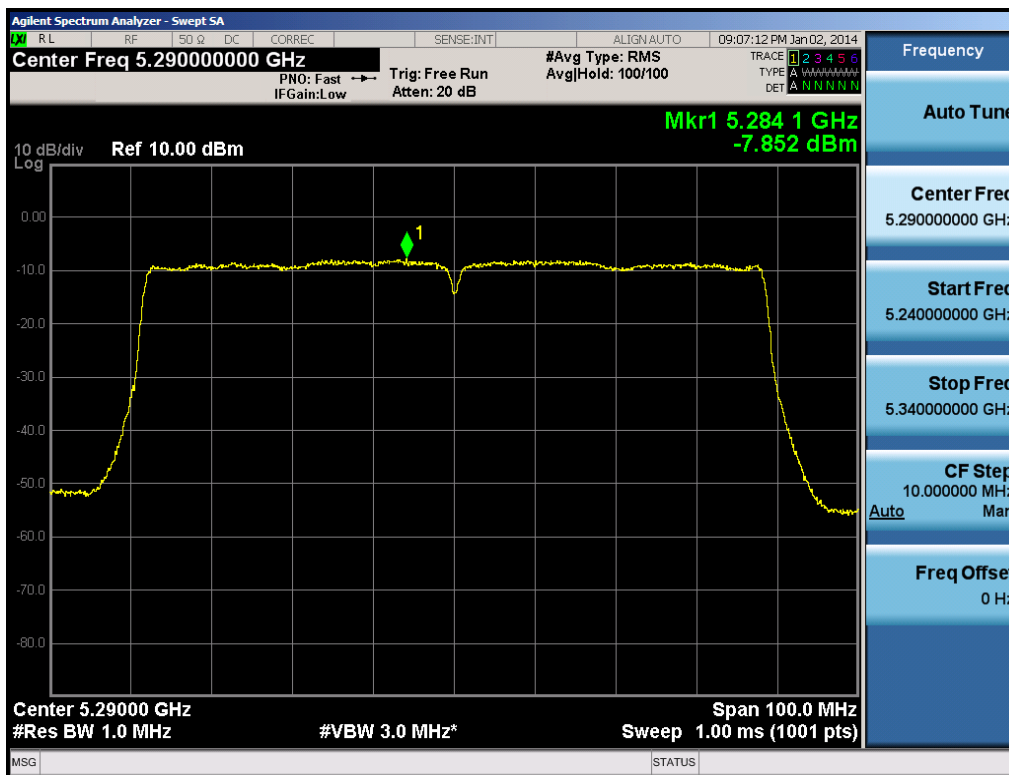


Plot 6-109. Peak Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 79 of 183

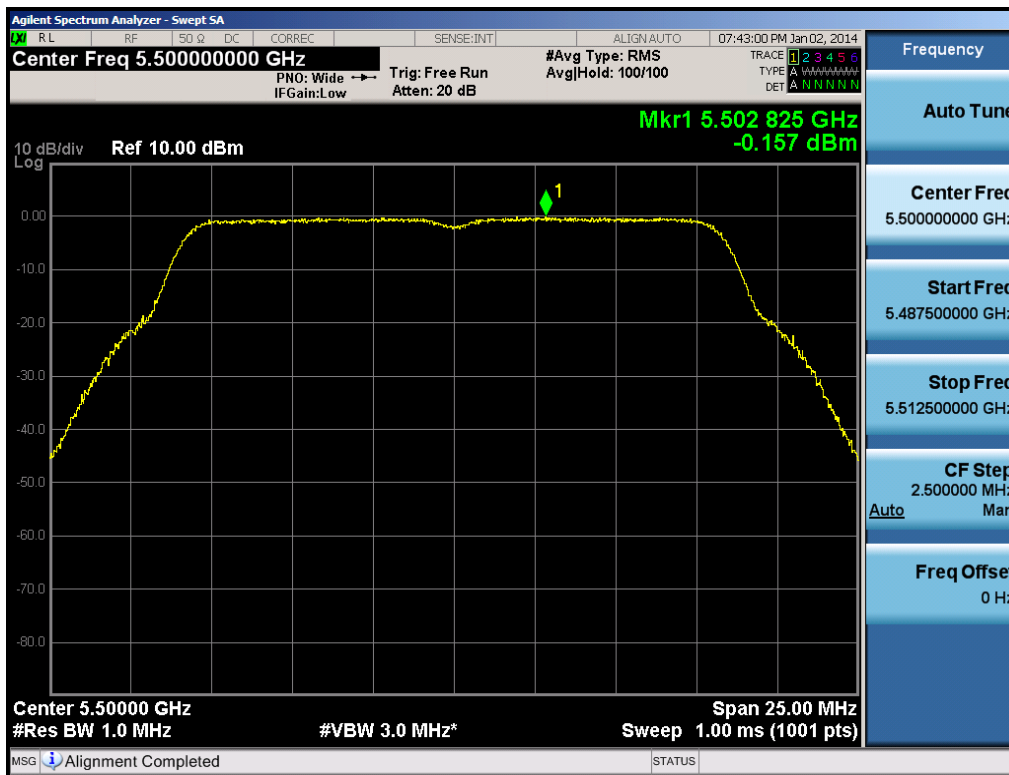


Plot 6-110. Peak Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)

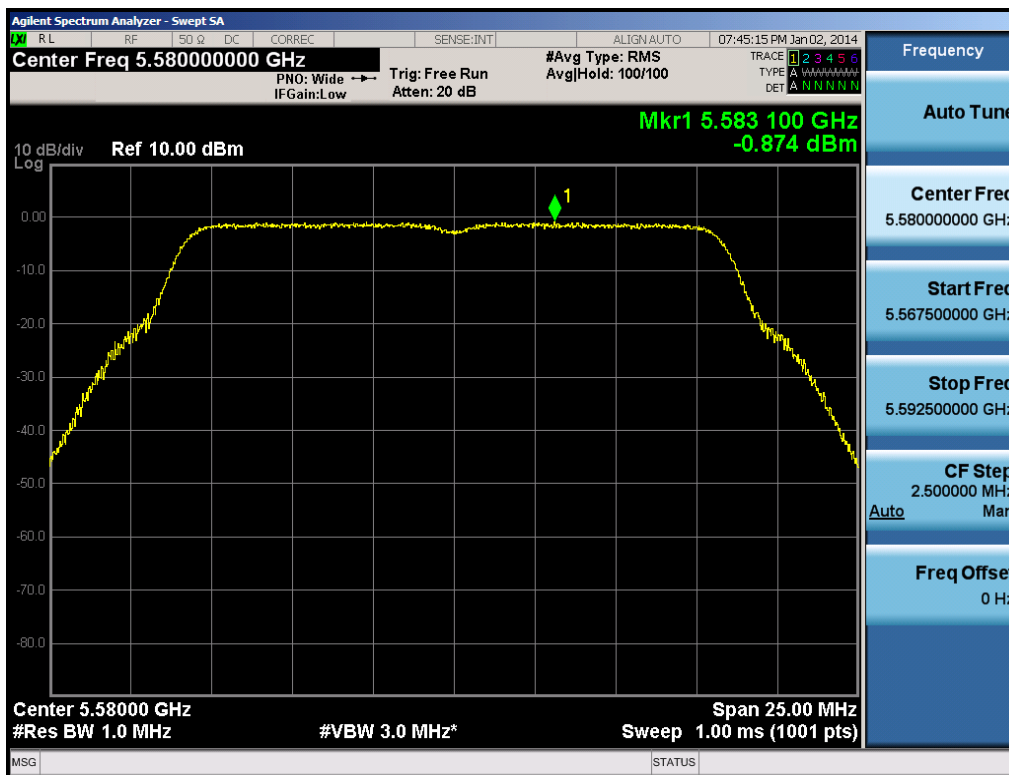


Plot 6-111. Peak Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 80 of 183

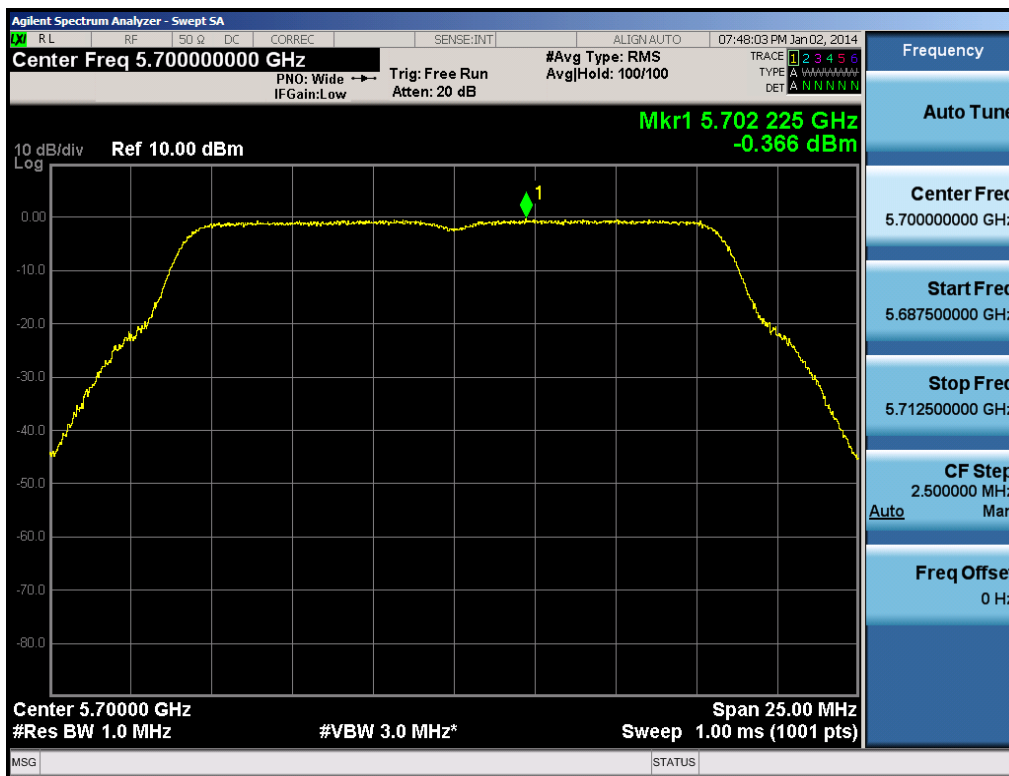


Plot 6-112. Peak Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 140)

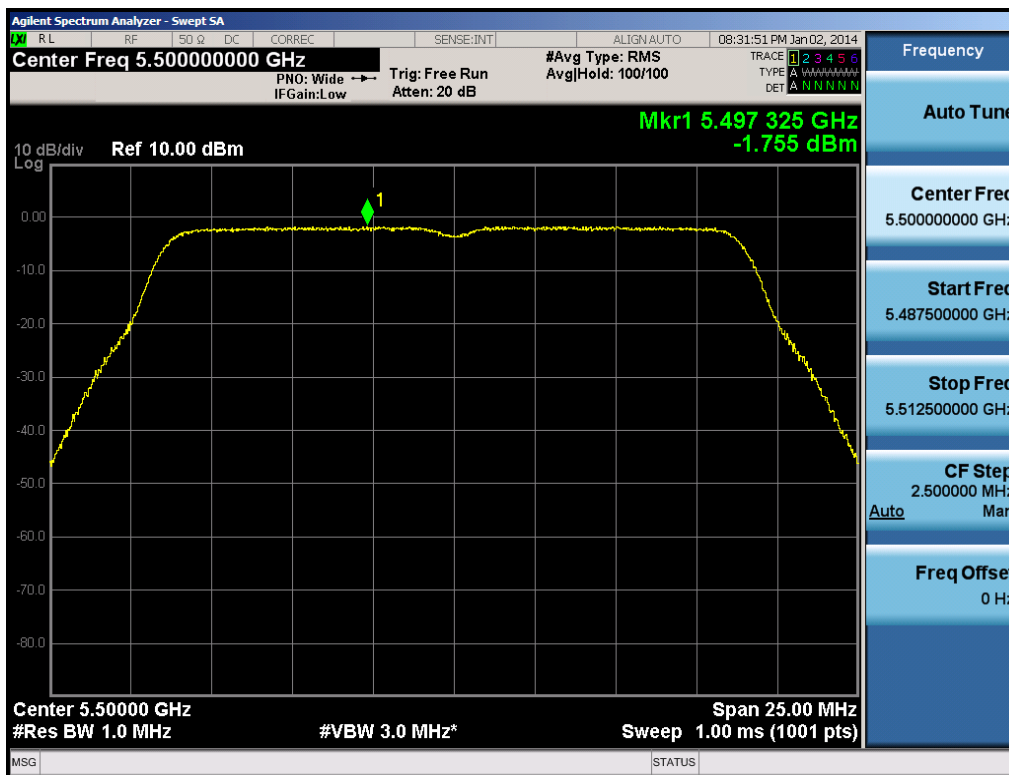


Plot 6-113. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 81 of 183

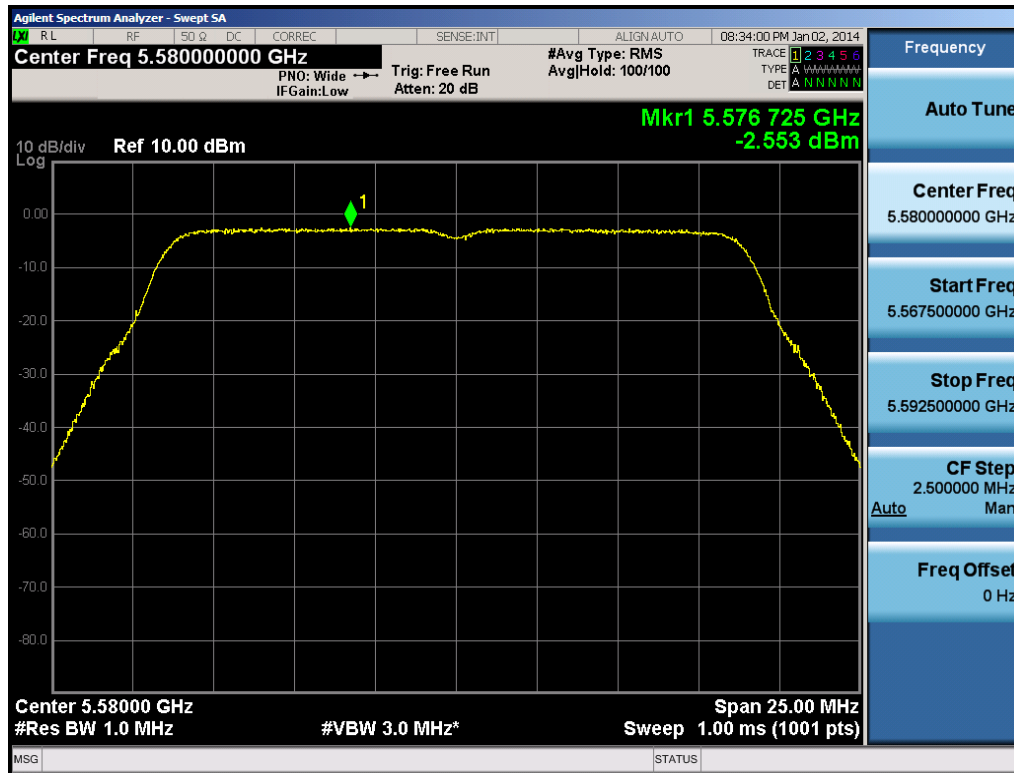


Plot 6-114. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

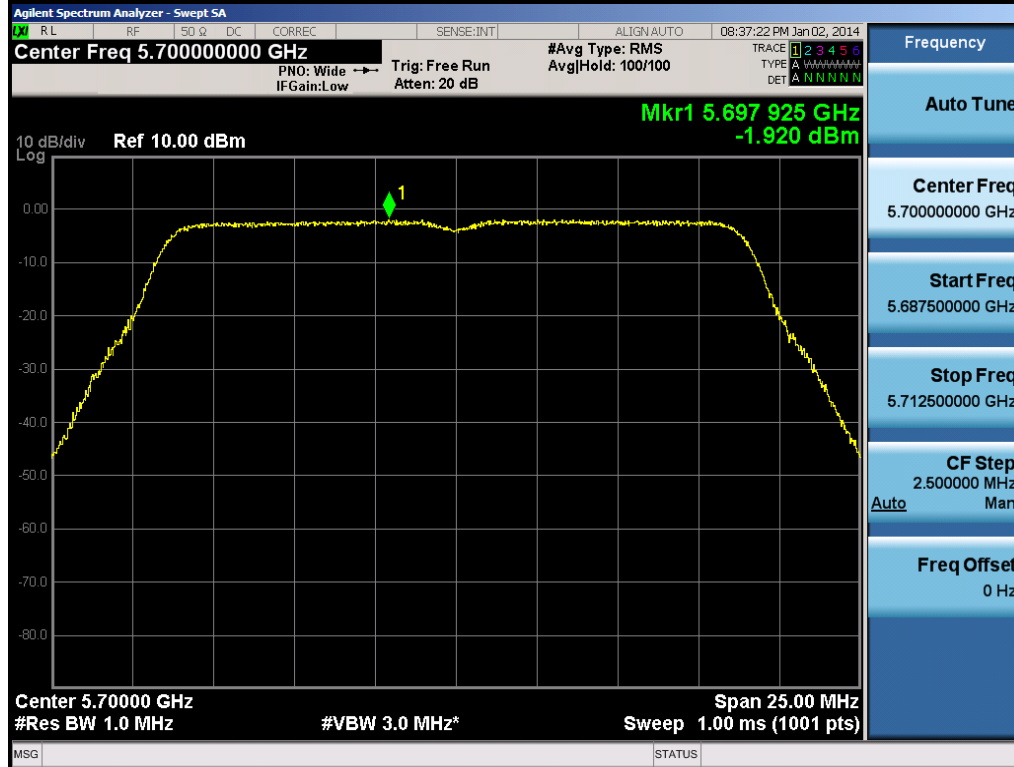


Plot 6-115. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 140)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 82 of 183

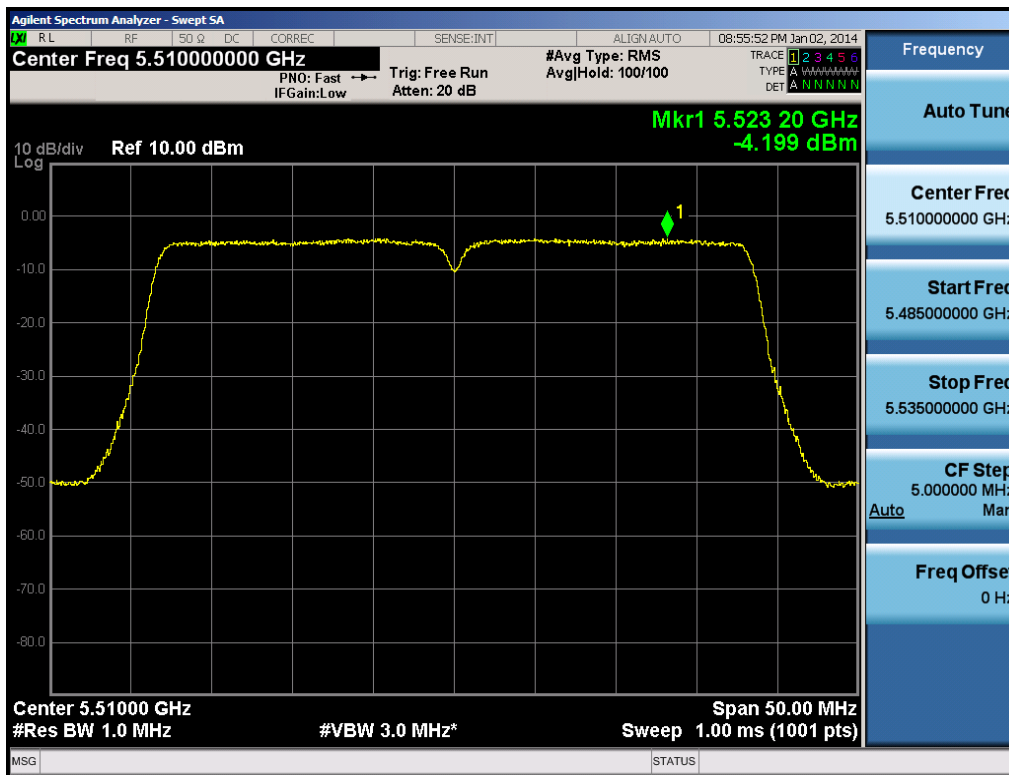


Plot 6-116. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

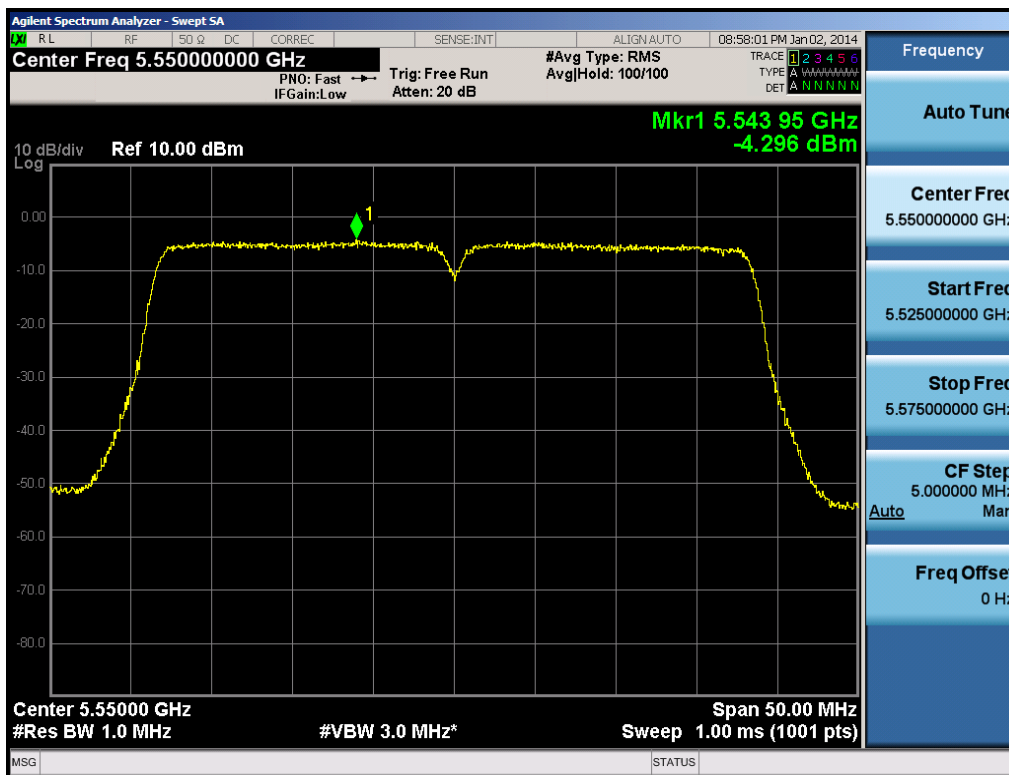


Plot 6-117. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 83 of 183

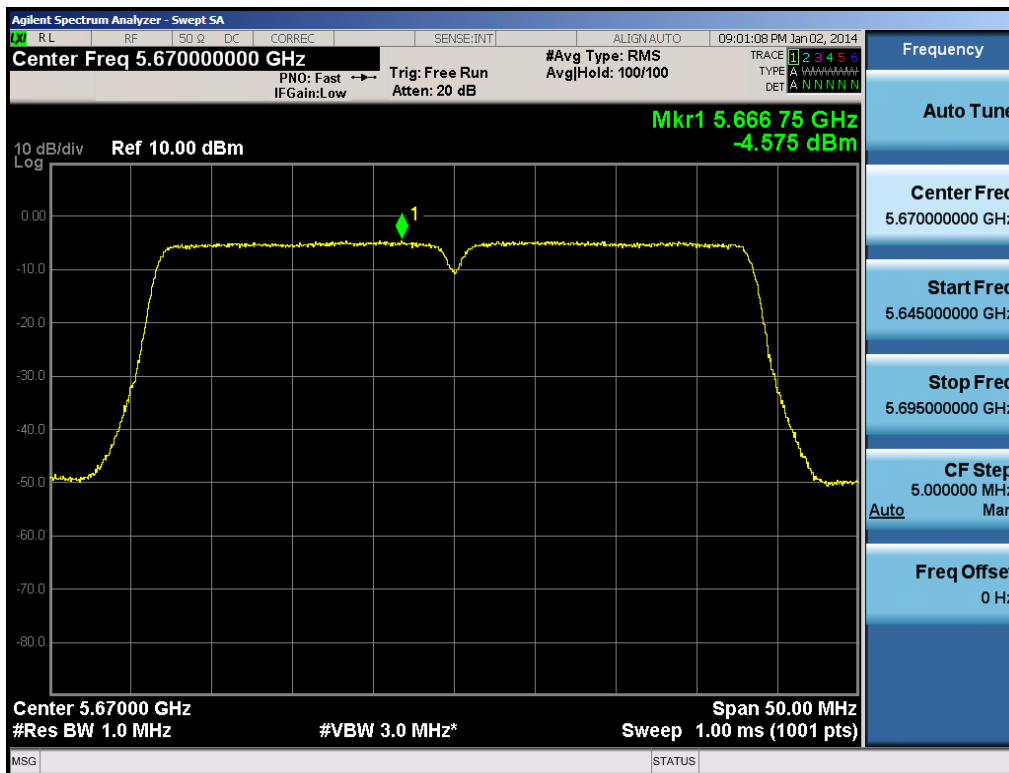

Plot 6-118. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 134)

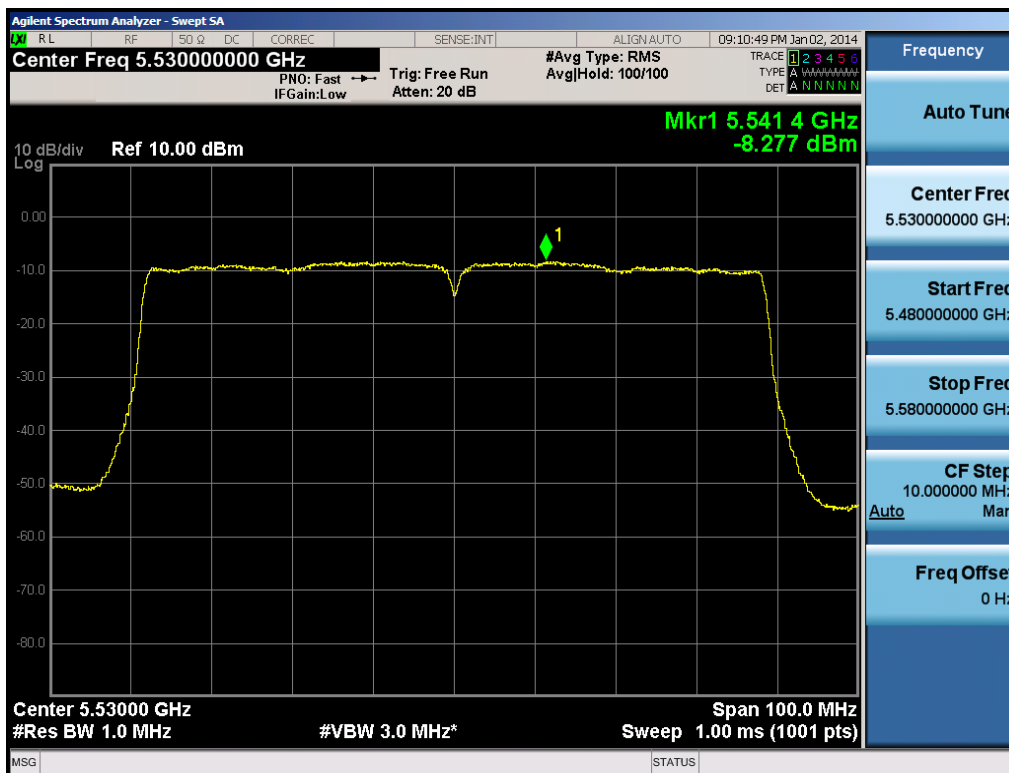

Plot 6-119. Peak Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 84 of 183

MIMO Peak Power Spectral Density – 802.11a/n/ac

§15.407 (a)(1)(2),(5) / RSS-210 [A9.2]

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density Antenna 2 [dBm]	Measured Power Density Antenna 1 [dBm]	Summed Power Density Antennas 1&2 [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	0.054	-0.552	2.772	4.0	-1.23
	5200	40	a	6	0.245	-0.046	3.112	4.0	-0.89
	5240	48	a	6	0.702	-0.222	3.275	4.0	-0.73
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	-0.542	-0.942	2.273	4.0	-1.73
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	-0.308	-0.335	2.689	4.0	-1.31
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	0.333	0.021	3.190	4.0	-0.81
	5190	38	n (40MHz)	13.5/15 (MCS0)	-3.474	-2.672	-0.044	4.0	-4.04
	5230	46	n (40MHz)	13.5/15 (MCS0)	-3.185	-2.328	0.275	4.0	-3.73
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-7.453	-6.806	-4.107	4.0	-8.11
Band II	5260	52	a	6	0.265	-0.359	2.974	11.0	-8.03
	5280	56	a	6	-0.025	-0.850	2.592	11.0	-8.41
	5320	64	a	6	-0.276	-1.351	2.230	11.0	-8.77
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	-1.066	-0.763	2.098	11.0	-8.90
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	-1.407	-0.834	1.899	11.0	-9.10
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	-1.733	-1.213	1.545	11.0	-9.45
	5270	54	n (40MHz)	13.5/15 (MCS0)	-3.670	-3.391	-0.518	11.0	-11.52
	5310	62	n (40MHz)	13.5/15 (MCS0)	-4.401	-3.481	-0.906	11.0	-11.91
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-7.852	-7.409	-4.615	11.0	-15.61
Band III	5500	100	a	6	-0.157	0.071	2.969	11.0	-8.03
	5580	116	a	6	-0.874	-0.871	2.138	11.0	-8.86
	5700	140	a	6	-0.366	-0.613	2.523	11.0	-8.48
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	-1.755	0.038	2.244	11.0	-8.76
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	-2.553	-0.606	1.539	11.0	-9.46
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	-1.920	-0.801	1.686	11.0	-9.31
	5510	102	n (40MHz)	13.5/15 (MCS0)	-4.199	-2.564	-0.295	11.0	-11.29
	5550	110	n (40MHz)	13.5/15 (MCS0)	-4.296	-2.773	-0.458	11.0	-11.46
	5670	134	n (40MHz)	13.5/15 (MCS0)	-4.575	-3.173	-0.807	11.0	-11.81
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-8.277	-6.660	-4.383	11.0	-15.38

Table 6-23. MIMO Conducted Power Density Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 85 of 183

6.5 Peak Excursion Ratio – 802.11a/n/ac §15.407(a)(6)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 v01r03, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033 v01r03, was used to capture the average trace used to make the peak excursion measurement.

The largest permissible difference between the modulation envelope (measured using a peak hold function) and the maximum power spectral density is 13 dBm/MHz.

Test Procedure Used

KDB 789033 v01r03 – Section G

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. The peak search function of the spectrum analyzer was used to find the peak of the spectrum. This level was compared to the peak power density level found from the previous section to determine the peak excursion.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 6-5. Test Instrument & Measurement Setup


Test Notes

The peak excursion was investigated for all signal types, modulation types, channel bandwidths, and variations in signal parameters and the worst case data is shown below. Only the worst case modulation mode on a single channel among all bands is reported since that is sufficient to demonstrate compliance to the peak excursion requirement per KDB 789033 v01r03.

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 86 of 183


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Peak Excursion Ratio [dBm]	Max Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]
5320	64	a	6	7.96	13.0	-5.04
5700	140	n (20MHz)	6.5/7.2 (MCS0)	8.70	13.0	-4.30
5550	110	n (40MHz)	13.5/15 (MCS0)	8.43	13.0	-4.57
5530	106	ac (80MHz)	29.3/32.5 (MCS0)	9.61	13.0	-3.39

Table 6-24. Antenna-1 Conducted Peak Excursion Ratio Measurements

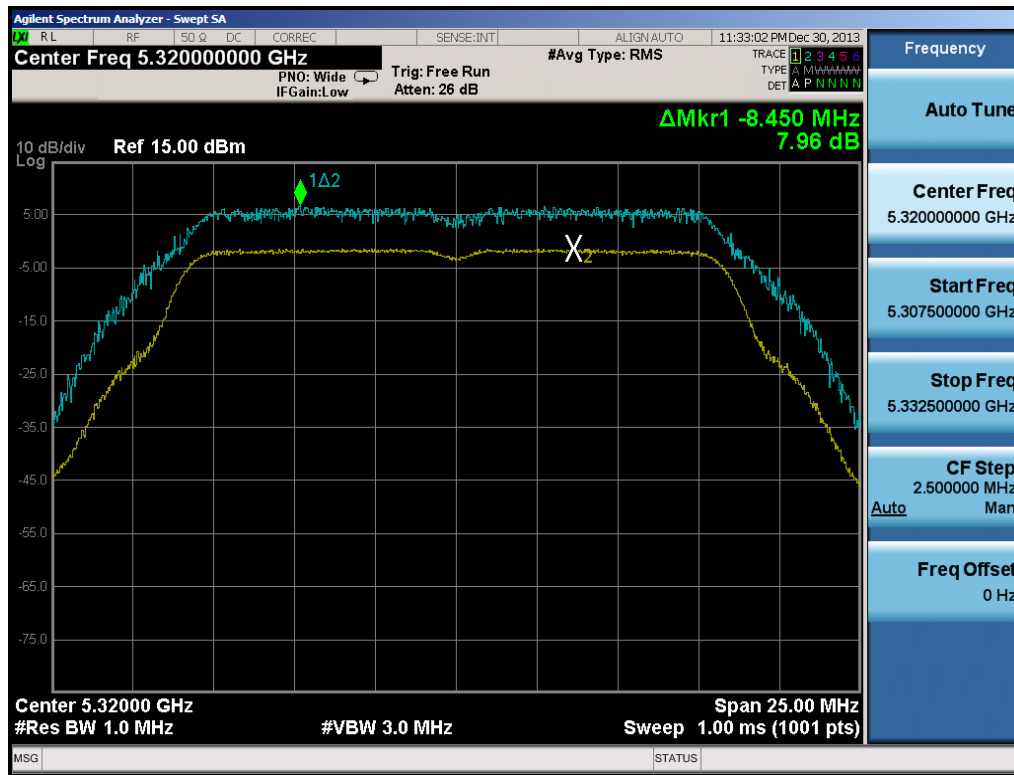


Plot 6-120. Peak Excursion Ratio Plot (802.11a)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 87 of 183

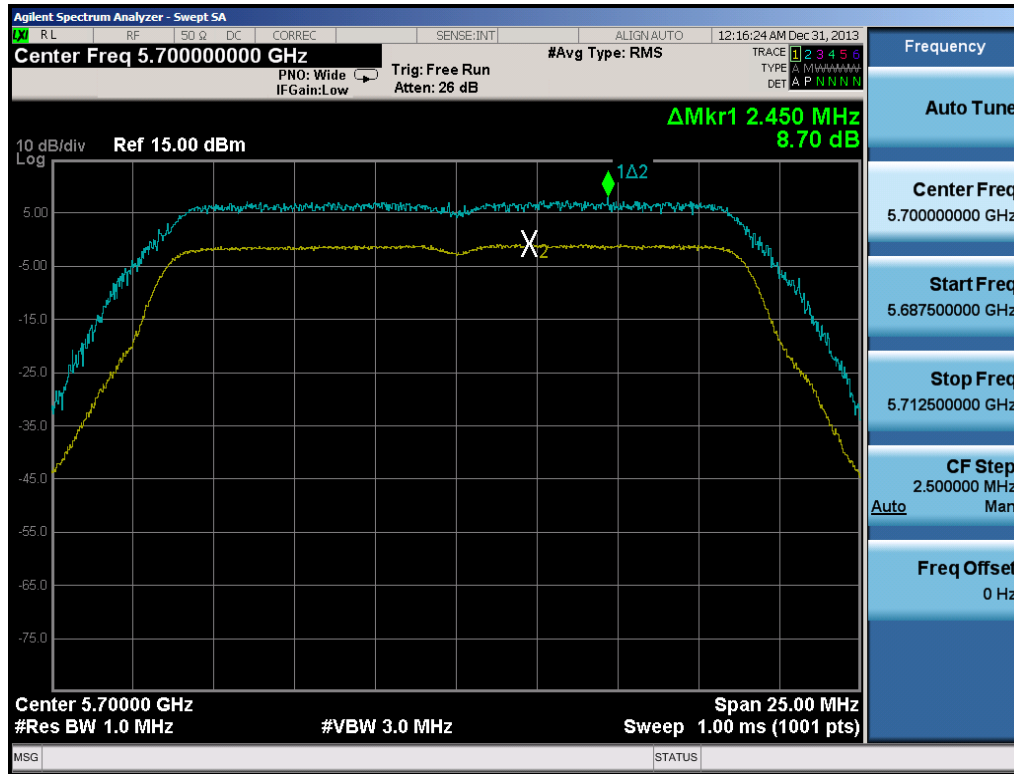


Plot 6-121. Peak Excursion Ratio Plot (20MHz BW 802.11n)

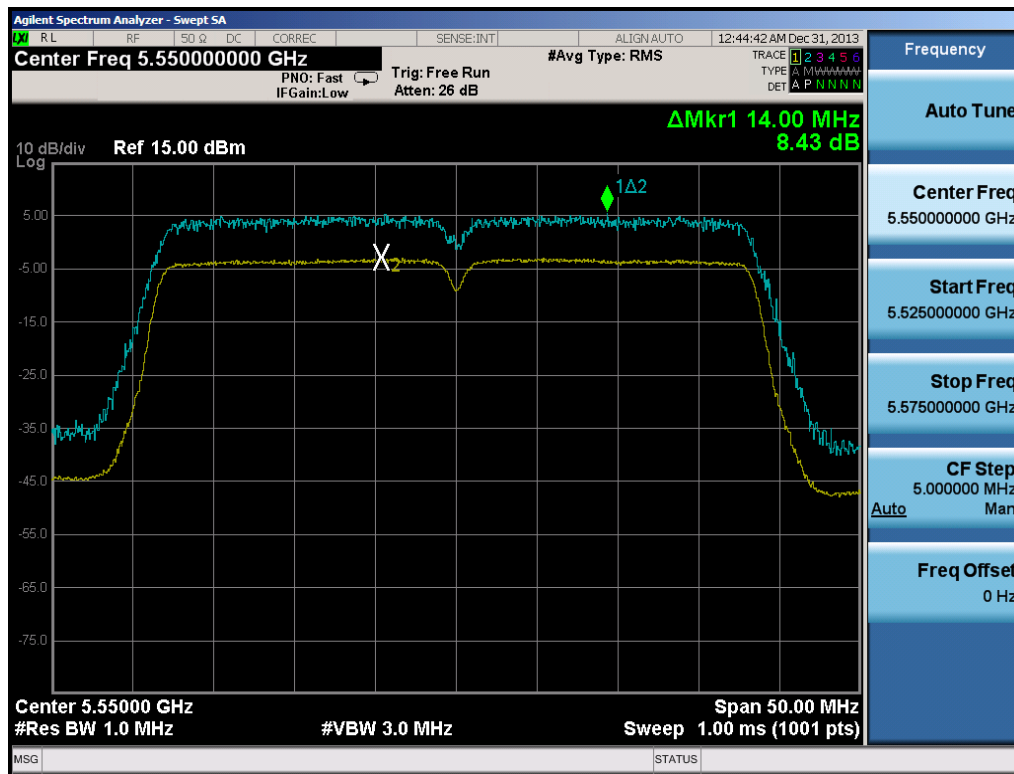

Plot 6-122. Peak Excursion Ratio Plot (40MHz BW 802.11n)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 88 of 183

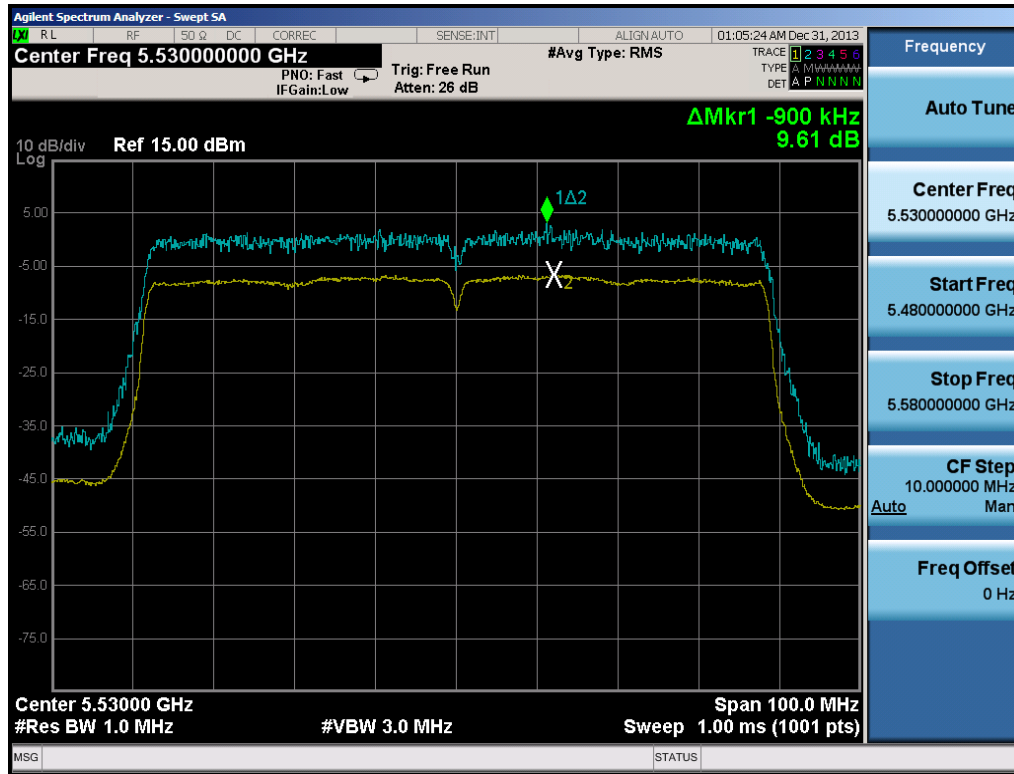


Plot 6-123. Peak Excursion Ratio Plot (80MHz BW 802.11ac)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 89 of 183


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Peak Excursion Ratio [dBm]	Max Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]
5700	140	a	6	7.85	13.0	-5.15
5580	116	n (20MHz)	6.5/7.2 (MCS0)	9.06	13.0	-3.95
5230	46	n (40MHz)	13.5/15 (MCS0)	8.77	13.0	-4.23
5290	58	ac (80MHz)	29.3/32.5 (MCS0)	9.29	13.0	-3.71

Table 6-25. Antenna-2 Conducted Peak Excursion Ratio Measurements

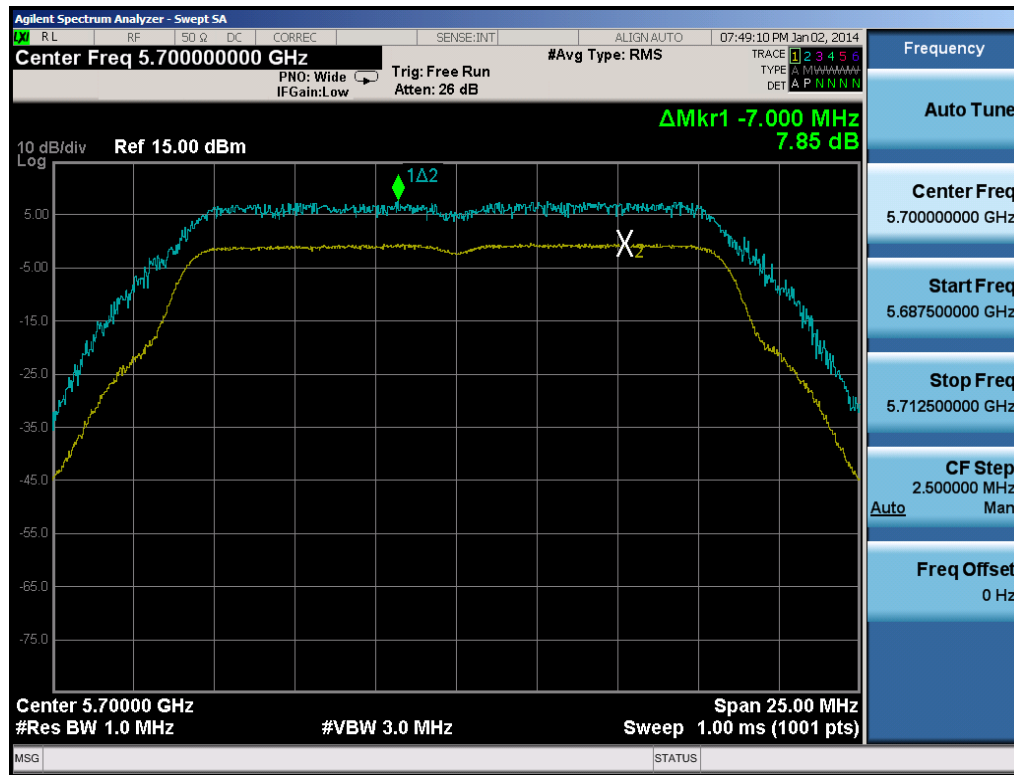


Plot 6-124. Peak Excursion Ratio Plot (802.11a)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 90 of 183

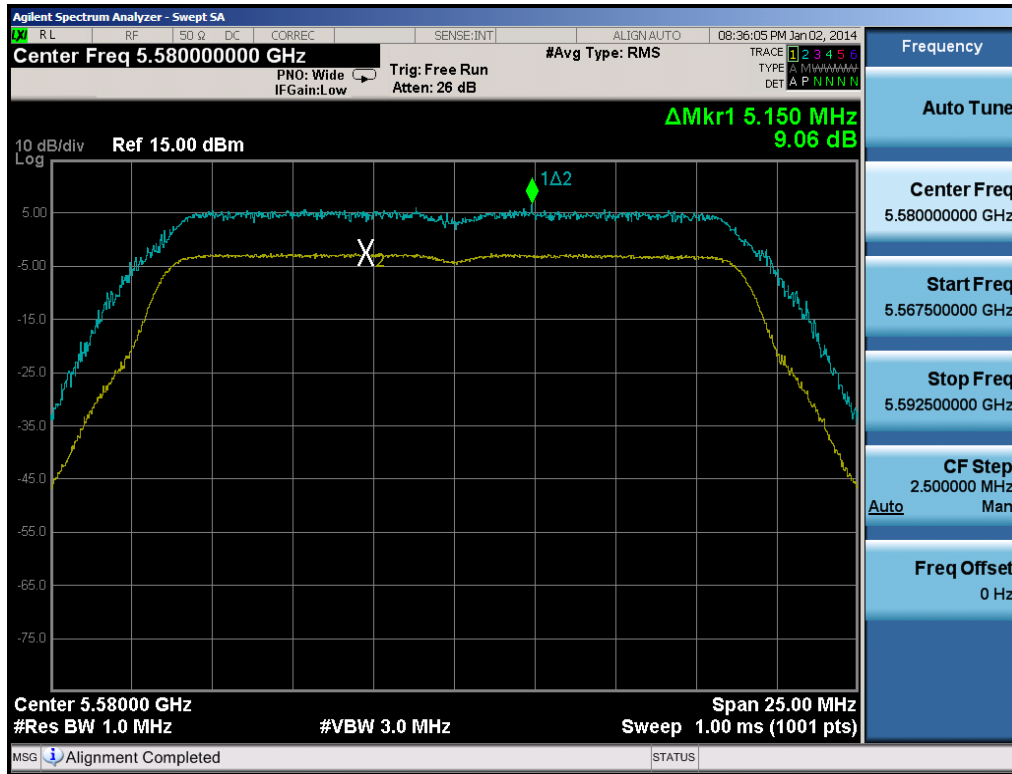


Plot 6-125. Peak Excursion Ratio Plot (20MHz BW 802.11n)

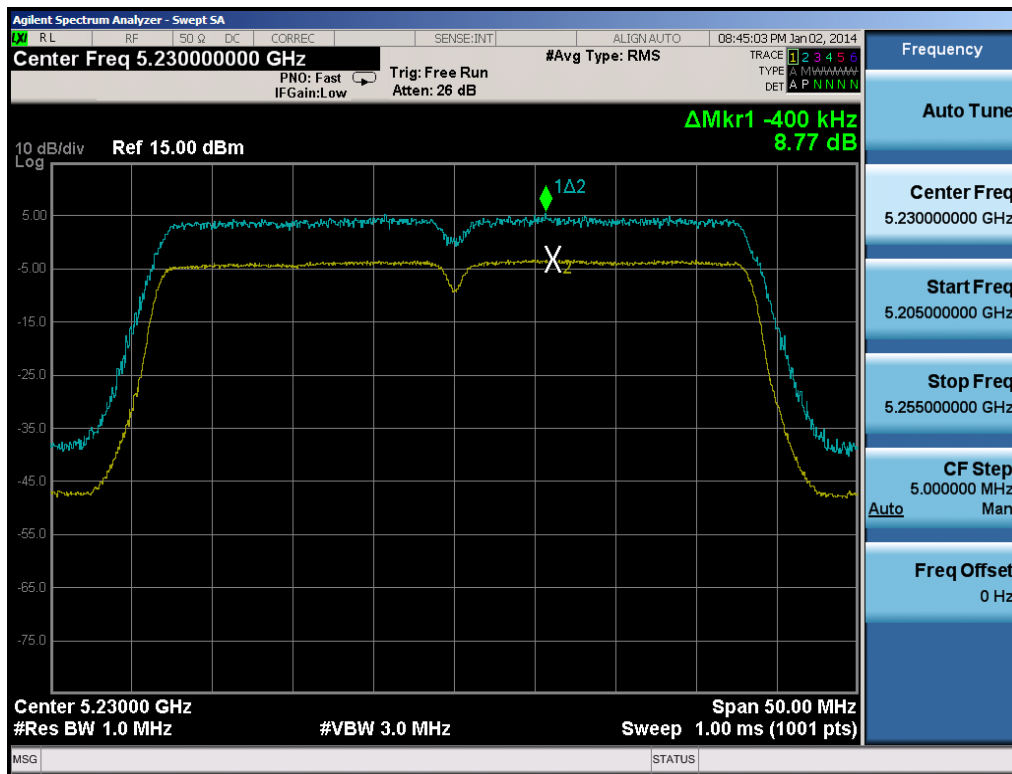

Plot 6-126. Peak Excursion Ratio Plot (40MHz BW 802.11n)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 91 of 183

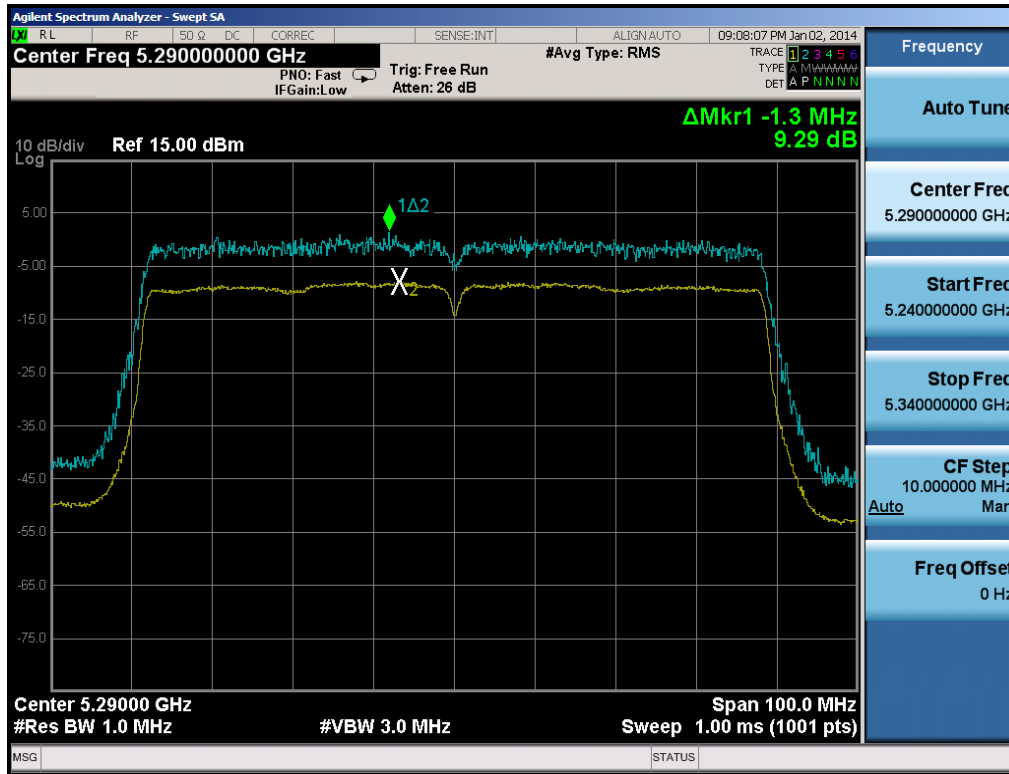

Plot 6-127. Peak Excursion Ratio Plot (80MHz BW 802.11ac)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 92 of 183

6.6 Frequency Stability: Antenna-1

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz

CHANNEL: 36

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,179,999,981	-19	-0.00000037
100 %		- 30	5,180,000,009	9	0.00000017
100 %		- 20	5,179,999,984	-16	-0.00000031
100 %		- 10	5,180,000,013	13	0.00000025
100 %		0	5,180,000,002	2	0.00000004
100 %		+ 10	5,180,000,011	11	0.00000021
100 %		+ 20	5,179,999,998	-2	-0.00000004
100 %		+ 30	5,179,999,993	-7	-0.00000014
100 %		+ 40	5,179,999,982	-18	-0.00000035
100 %		+ 50	5,180,000,008	8	0.00000015
115 %	4.37	+ 20	5,179,999,986	-14	-0.00000027
BATT. ENDPOINT	3.40	+ 20	5,179,999,998	-2	-0.00000004

Table 6-26. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet	Page 93 of 183	

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz

CHANNEL: 52

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,259,999,984	-16	-0.00000030
100 %		- 30	5,260,000,006	6	0.00000011
100 %		- 20	5,259,999,987	-13	-0.00000025
100 %		- 10	5,259,999,983	-17	-0.00000032
100 %		0	5,259,999,997	-3	-0.00000006
100 %		+ 10	5,259,999,991	-9	-0.00000017
100 %		+ 20	5,260,000,016	16	0.00000030
100 %		+ 30	5,260,000,004	4	0.00000008
100 %		+ 40	5,259,999,990	-10	-0.00000019
100 %		+ 50	5,260,000,007	7	0.00000013
115 %	4.37	+ 20	5,259,999,997	-3	-0.00000006
BATT. ENDPOINT	3.40	+ 20	5,259,999,996	-4	-0.00000008

Table 6-27. Frequency Stability Measurements for UNII Band 2A (Ch. 52)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet	Page 94 of 183	

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz

CHANNEL: 100

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,499,999,997	-3	-0.00000005
100 %		- 30	5,500,000,020	20	0.00000036
100 %		- 20	5,500,000,017	17	0.00000031
100 %		- 10	5,500,000,007	7	0.00000013
100 %		0	5,499,999,999	-1	-0.00000002
100 %		+ 10	5,499,999,982	-18	-0.00000033
100 %		+ 20	5,500,000,019	19	0.00000035
100 %		+ 30	5,500,000,004	4	0.00000007
100 %		+ 40	5,499,999,998	-2	-0.00000004
100 %		+ 50	5,500,000,007	7	0.00000013
115 %	4.37	+ 20	5,499,999,986	-14	-0.00000025
BATT. ENDPOINT	3.40	+ 20	5,499,999,988	-12	-0.00000022

Table 6-28. Frequency Stability Measurements for UNII Band 2C (Ch. 100)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet	Page 95 of 183	

Frequency Stability: Antenna-2

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz

CHANNEL: 36

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,179,999,994	-6	-0.00000012
100 %		- 30	5,180,000,010	10	0.00000019
100 %		- 20	5,180,000,002	2	0.00000004
100 %		- 10	5,180,000,019	19	0.00000037
100 %		0	5,179,999,996	-4	-0.00000008
100 %		+ 10	5,179,999,986	-14	-0.00000027
100 %		+ 20	5,180,000,017	17	0.00000033
100 %		+ 30	5,179,999,985	-15	-0.00000029
100 %		+ 40	5,179,999,998	-2	-0.00000004
100 %		+ 50	5,180,000,007	7	0.00000014
115 %	4.37	+ 20	5,179,999,997	-3	-0.00000006
BATT. ENDPOINT	3.40	+ 20	5,180,000,012	12	0.00000023

Table 6-29. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet	Page 96 of 183	

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz

CHANNEL: 52

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,259,999,989	-11	-0.00000021
100 %		- 30	5,260,000,006	6	0.00000011
100 %		- 20	5,260,000,008	8	0.00000015
100 %		- 10	5,260,000,008	8	0.00000015
100 %		0	5,259,999,982	-18	-0.00000034
100 %		+ 10	5,260,000,014	14	0.00000027
100 %		+ 20	5,259,999,990	-10	-0.00000019
100 %		+ 30	5,260,000,009	9	0.00000017
100 %		+ 40	5,260,000,004	4	0.00000008
100 %		+ 50	5,259,999,982	-18	-0.00000034
115 %	4.37	+ 20	5,260,000,005	5	0.00000010
BATT. ENDPOINT	3.40	+ 20	5,260,000,018	18	0.00000034

Table 6-30. Frequency Stability Measurements for UNII Band 2A (Ch. 52)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet	Page 97 of 183	

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz

CHANNEL: 100

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,499,999,989	-11	-0.00000020
100 %		- 30	5,499,999,981	-19	-0.00000035
100 %		- 20	5,499,999,989	-11	-0.00000020
100 %		- 10	5,500,000,000	0	0.00000000
100 %		0	5,500,000,000	0	0.00000000
100 %		+ 10	5,499,999,995	-5	-0.00000009
100 %		+ 20	5,500,000,002	2	0.00000004
100 %		+ 30	5,500,000,018	18	0.00000033
100 %		+ 40	5,500,000,008	8	0.00000015
100 %		+ 50	5,499,999,993	-7	-0.00000013
115 %	4.37	+ 20	5,499,999,999	-1	-0.00000002
BATT. ENDPOINT	3.40	+ 20	5,500,000,011	11	0.00000020

Table 6-31. Frequency Stability Measurements for UNII Band 2C (Ch. 100)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet	Page 98 of 183	

6.7 Radiated Spurious Emission Measurements

§15.407(b)(1), (6), §15.205, §15.209; RSS-210 [A9.2]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 v01r03, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW) and 802.11n (40MHz BW)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-32 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-32. Radiated Limits

Test Procedures Used

KDB 789033 v01r03 – Section H

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 99 of 183

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

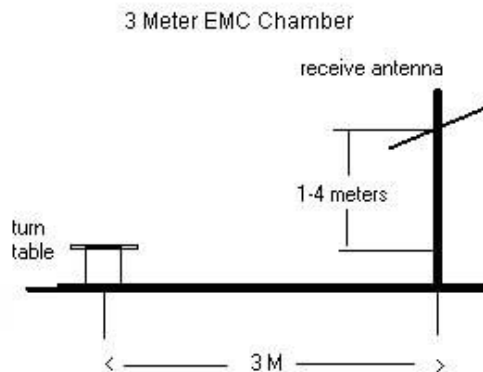


Figure 6-6. Test Instrument & Measurement Setup

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 100 of 183

Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 v01r03 Section H.
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-32.
3. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-11. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested with its standard battery.
6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{\text{[dB}\mu\text{V/m]}}$ = Analyzer Level $_{\text{[dBm]}}$ + 107 + AFCL $_{\text{[dB/m]}}$
- AFCL $_{\text{[dB/m]}}$ = Antenna Factor $_{\text{[dB/m]}}$ + Cable Loss $_{\text{[dB]}}$
- Margin $_{\text{[dB]}}$ = Field Strength Level $_{\text{[dB}\mu\text{V/m]}}$ – Limit $_{\text{[dB}\mu\text{V/m]}}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 101 of 183

Antenna-1 Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-92.31	Peak	H	47.06	61.75	68.20	-6.45
* 15540.00	-135.00	Average	H	42.86	14.86	53.98	-39.12
* 15540.00	-125.00	Peak	H	42.86	24.86	73.98	-49.12
* 20720.00	-135.00	Average	H	44.04	16.04	53.98	-37.94
* 20720.00	-125.00	Peak	H	44.04	26.04	73.98	-47.94
25900.00	-125.00	Peak	H	44.84	26.84	68.20	-41.36

Table 6-33. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	-96.18	Peak	H	47.23	58.05	68.20	-10.15
* 15600.00	-135.00	Average	H	42.66	14.66	53.98	-39.32
* 15600.00	-125.00	Peak	H	42.66	24.66	73.98	-49.32
* 20800.00	-135.00	Average	H	44.03	16.03	53.98	-37.95
* 20800.00	-125.00	Peak	H	44.03	26.03	73.98	-47.95
26000.00	-125.00	Peak	H	44.96	26.96	68.20	-41.24

Table 6-34. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 102 of 183

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	-96.12	Peak	H	47.26	58.14	68.20	-10.06
* 15720.00	-135.00	Average	H	42.68	14.68	53.98	-39.30
* 15720.00	-125.00	Peak	H	42.68	24.68	73.98	-49.30
* 20960.00	-135.00	Average	H	44.00	16.00	53.98	-37.98
* 20960.00	-125.00	Peak	H	44.00	26.00	73.98	-47.98
26200.00	-125.00	Peak	H	44.75	26.75	68.20	-41.45

Table 6-35. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-125.00	Peak	H	42.23	24.23	68.20	-43.97
* 15780.00	-135.00	Average	H	42.61	14.61	53.98	-39.37
* 15780.00	-125.00	Peak	H	42.61	24.61	73.98	-49.37
* 21040.00	-135.00	Average	H	43.95	15.95	53.98	-38.03
* 21040.00	-125.00	Peak	H	43.95	25.95	73.98	-48.03
26300.00	-125.00	Peak	H	44.78	26.78	68.20	-41.42

Table 6-36. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 103 of 183

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-125.00	Peak	H	42.28	24.28	68.20	-43.92
* 15840.00	-135.00	Average	H	42.53	14.53	53.98	-39.44
* 15840.00	-125.00	Peak	H	42.53	24.53	73.98	-49.44
* 21120.00	-135.00	Average	H	43.83	15.83	53.98	-38.15
* 21120.00	-125.00	Peak	H	43.83	25.83	73.98	-48.15
26400.00	-125.00	Peak	H	44.72	26.72	68.20	-41.48

Table 6-37. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-135.00	Average	H	42.31	14.31	53.98	-39.67
* 10640.00	-125.00	Peak	H	42.31	24.31	73.98	-49.67
* 15960.00	-135.00	Average	H	42.63	14.63	53.98	-39.35
* 15960.00	-125.00	Peak	H	42.63	24.63	73.98	-49.35
* 21280.00	-135.00	Average	H	43.71	15.71	53.98	-38.27
* 21280.00	-125.00	Peak	H	43.71	25.71	73.98	-48.27
26600.00	-125.00	Peak	H	47.29	29.29	68.20	-38.91

Table 6-38. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 104 of 183

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11000.00	-135.00	Average	H	42.28	14.28	53.98	-39.70
*	11000.00	-125.00	Peak	H	42.28	24.28	73.98	-49.70
	16500.00	-125.00	Peak	H	43.70	25.70	68.20	-42.50
	22000.00	-125.00	Peak	H	43.95	25.95	68.20	-42.25
	27500.00	-125.00	Peak	H	48.50	30.50	68.20	-37.70

Table 6-39. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5580MHz
Channel: 116

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11160.00	-106.21	Average	H	48.04	48.84	53.98	-5.14
*	11160.00	-94.57	Peak	H	48.04	60.48	73.98	-13.50
	16740.00	-125.00	Peak	H	44.90	26.90	68.20	-41.30
*	22320.00	-135.00	Average	H	44.47	16.47	53.98	-37.50
*	22320.00	-125.00	Peak	H	44.47	26.47	73.98	-47.50
	27900.00	-125.00	Peak	H	48.02	30.02	68.20	-38.18

Table 6-40. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 105 of 183

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5700MHz
Channel: 140

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11400.00	-105.10	Average	H	48.02	49.92	53.98	-4.06
*	11400.00	-92.95	Peak	H	48.02	62.07	73.98	-11.91
	17100.00	-125.00	Peak	H	46.95	28.95	68.20	-39.25
*	22800.00	-135.00	Average	H	44.47	16.47	53.98	-37.51
*	22800.00	-125.00	Peak	H	44.47	26.47	73.98	-47.51
	28500.00	-125.00	Peak	H	48.08	30.08	68.20	-38.12

Table 6-41. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 106 of 183

Antenna-2 Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-125.00	Peak	H	42.15	24.15	68.20	-44.05
* 15540.00	-135.00	Average	H	42.86	14.86	53.98	-39.12
* 15540.00	-125.00	Peak	H	42.86	24.86	73.98	-49.12
* 20720.00	-135.00	Average	H	44.04	16.04	53.98	-37.94
* 20720.00	-125.00	Peak	H	44.04	26.04	73.98	-47.94
25900.00	-125.00	Peak	H	44.84	26.84	68.20	-41.36

Table 6-42. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	-125.00	Peak	H	42.10	24.10	68.20	-44.10
* 15600.00	-135.00	Average	H	42.66	14.66	53.98	-39.32
* 15600.00	-125.00	Peak	H	42.66	24.66	73.98	-49.32
* 20800.00	-135.00	Average	H	44.03	16.03	53.98	-37.95
* 20800.00	-125.00	Peak	H	44.03	26.03	73.98	-47.95
26000.00	-125.00	Peak	H	44.96	26.96	68.20	-41.24

Table 6-43. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 107 of 183

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	-125.00	Peak	H	42.17	24.17	68.20	-44.03
* 15720.00	-135.00	Average	H	42.68	14.68	53.98	-39.30
* 15720.00	-125.00	Peak	H	42.68	24.68	73.98	-49.30
* 20960.00	-135.00	Average	H	44.00	16.00	53.98	-37.98
* 20960.00	-125.00	Peak	H	44.00	26.00	73.98	-47.98
26200.00	-125.00	Peak	H	44.75	26.75	68.20	-41.45

Table 6-44. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-125.00	Peak	H	42.23	24.23	68.20	-43.97
* 15780.00	-135.00	Average	H	42.61	14.61	53.98	-39.37
* 15780.00	-125.00	Peak	H	42.61	24.61	73.98	-49.37
* 21040.00	-135.00	Average	H	43.95	15.95	53.98	-38.03
* 21040.00	-125.00	Peak	H	43.95	25.95	73.98	-48.03
26300.00	-125.00	Peak	H	44.78	26.78	68.20	-41.42

Table 6-45. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 108 of 183

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-125.00	Peak	H	42.28	24.28	68.20	-43.92
* 15840.00	-135.00	Average	H	42.53	14.53	53.98	-39.44
* 15840.00	-125.00	Peak	H	42.53	24.53	73.98	-49.44
* 21120.00	-135.00	Average	H	43.83	15.83	53.98	-38.15
* 21120.00	-125.00	Peak	H	43.83	25.83	73.98	-48.15
26400.00	-125.00	Peak	H	44.72	26.72	68.20	-41.48

Table 6-46. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-135.00	Average	H	42.31	14.31	53.98	-39.67
* 10640.00	-125.00	Peak	H	42.31	24.31	73.98	-49.67
* 15960.00	-135.00	Average	H	42.63	14.63	53.98	-39.35
* 15960.00	-125.00	Peak	H	42.63	24.63	73.98	-49.35
* 21280.00	-135.00	Average	H	43.71	15.71	53.98	-38.27
* 21280.00	-125.00	Peak	H	43.71	25.71	73.98	-48.27
26600.00	-125.00	Peak	H	47.29	29.29	68.20	-38.91

Table 6-47. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 109 of 183

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11000.00	-135.00	Average	H	42.28	14.28	53.98	-39.70
*	11000.00	-125.00	Peak	H	42.28	24.28	73.98	-49.70
	16500.00	-125.00	Peak	H	43.70	25.70	68.20	-42.50
	22000.00	-125.00	Peak	H	43.95	25.95	68.20	-42.25
	27500.00	-125.00	Peak	H	48.50	30.50	68.20	-37.70

Table 6-48. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5580MHz
Channel: 116

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11160.00	-135.00	Average	H	42.52	14.52	53.98	-39.46
*	11160.00	-125.00	Peak	H	42.52	24.52	73.98	-49.46
	16740.00	-125.00	Peak	H	44.90	26.90	68.20	-41.30
*	22320.00	-135.00	Average	H	44.47	16.47	53.98	-37.50
*	22320.00	-125.00	Peak	H	44.47	26.47	73.98	-47.50
	27900.00	-125.00	Peak	H	48.02	30.02	68.20	-38.18

Table 6-49. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 110 of 183

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5700MHz
Channel: 140

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11400.00	-135.00	Average	H	42.75	14.75	53.98	-39.23
*	11400.00	-125.00	Peak	H	42.75	24.75	73.98	-49.23
	17100.00	-125.00	Peak	H	46.95	28.95	68.20	-39.25
*	22800.00	-135.00	Average	H	44.47	16.47	53.98	-37.51
*	22800.00	-125.00	Peak	H	44.47	26.47	73.98	-47.51
	28500.00	-125.00	Peak	H	48.08	30.08	68.20	-38.12

Table 6-50. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 111 of 183

MIMO Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-125.00	Peak	H	42.15	24.15	68.20	-44.05
* 15540.00	-135.00	Average	H	42.86	14.86	53.98	-39.12
* 15540.00	-125.00	Peak	H	42.86	24.86	73.98	-49.12
* 20720.00	-135.00	Average	H	44.04	16.04	53.98	-37.94
* 20720.00	-125.00	Peak	H	44.04	26.04	73.98	-47.94
25900.00	-125.00	Peak	H	44.84	26.84	68.20	-41.36

Table 6-51. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	-125.00	Peak	H	42.86	24.86	68.20	-43.34
* 15600.00	-135.00	Average	H	42.66	14.66	53.98	-39.32
* 15600.00	-125.00	Peak	H	42.66	24.66	73.98	-49.32
* 20800.00	-135.00	Average	H	44.03	16.03	53.98	-37.95
* 20800.00	-125.00	Peak	H	44.03	26.03	73.98	-47.95
26000.00	-125.00	Peak	H	44.96	26.96	68.20	-41.24

Table 6-52. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 112 of 183

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	-125.00	Peak	H	42.86	24.86	68.20	-43.34
* 15720.00	-135.00	Average	H	42.68	14.68	53.98	-39.30
* 15720.00	-125.00	Peak	H	42.68	24.68	73.98	-49.30
* 20960.00	-135.00	Average	H	44.00	16.00	53.98	-37.98
* 20960.00	-125.00	Peak	H	44.00	26.00	73.98	-47.98
26200.00	-125.00	Peak	H	44.75	26.75	68.20	-41.45

Table 6-53. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-125.00	Peak	H	42.23	24.23	68.20	-43.97
* 15780.00	-135.00	Average	H	42.61	14.61	53.98	-39.37
* 15780.00	-125.00	Peak	H	42.61	24.61	73.98	-49.37
* 21040.00	-135.00	Average	H	43.95	15.95	53.98	-38.03
* 21040.00	-125.00	Peak	H	43.95	25.95	73.98	-48.03
26300.00	-125.00	Peak	H	44.78	26.78	68.20	-41.42

Table 6-54. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 113 of 183

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-125.00	Peak	H	42.28	24.28	68.20	-43.92
* 15840.00	-135.00	Average	H	42.53	14.53	53.98	-39.44
* 15840.00	-125.00	Peak	H	42.53	24.53	73.98	-49.44
* 21120.00	-135.00	Average	H	43.83	15.83	53.98	-38.15
* 21120.00	-125.00	Peak	H	43.83	25.83	73.98	-48.15
26400.00	-125.00	Peak	H	44.72	26.72	68.20	-41.48

Table 6-55. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-135.00	Average	H	42.31	14.31	53.98	-39.67
* 10640.00	-125.00	Peak	H	42.31	24.31	73.98	-49.67
* 15960.00	-135.00	Average	H	42.63	14.63	53.98	-39.35
* 15960.00	-125.00	Peak	H	42.63	24.63	73.98	-49.35
* 21280.00	-135.00	Average	H	43.71	15.71	53.98	-38.27
* 21280.00	-125.00	Peak	H	43.71	25.71	73.98	-48.27
26600.00	-125.00	Peak	H	47.29	29.29	68.20	-38.91

Table 6-56. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 114 of 183

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11000.00	-135.00	Average	H	42.28	14.28	53.98	-39.70
*	11000.00	-125.00	Peak	H	42.28	24.28	73.98	-49.70
	16500.00	-125.00	Peak	H	43.70	25.70	68.20	-42.50
	22000.00	-125.00	Peak	H	43.95	25.95	68.20	-42.25
	27500.00	-125.00	Peak	H	48.50	30.50	68.20	-37.70

Table 6-57. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5580MHz
Channel: 116

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11160.00	-135.00	Average	H	42.52	14.52	53.98	-39.46
*	11160.00	-125.00	Peak	H	42.52	24.52	73.98	-49.46
	16740.00	-125.00	Peak	H	44.90	26.90	68.20	-41.30
*	22320.00	-135.00	Average	H	44.47	16.47	53.98	-37.50
*	22320.00	-125.00	Peak	H	44.47	26.47	73.98	-47.50
	27900.00	-125.00	Peak	H	48.02	30.02	68.20	-38.18

Table 6-58. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 115 of 183

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5700MHz
Channel: 140

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11400.00	-135.00	Average	H	42.75	14.75	53.98	-39.23
*	11400.00	-125.00	Peak	H	42.75	24.75	73.98	-49.23
	17100.00	-125.00	Peak	H	46.95	28.95	68.20	-39.25
*	22800.00	-135.00	Average	H	44.47	16.47	53.98	-37.51
*	22800.00	-125.00	Peak	H	44.47	26.47	73.98	-47.51
	28500.00	-125.00	Peak	H	48.08	30.08	68.20	-38.12

Table 6-59. Radiated Measurements

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 116 of 183

6.8 Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

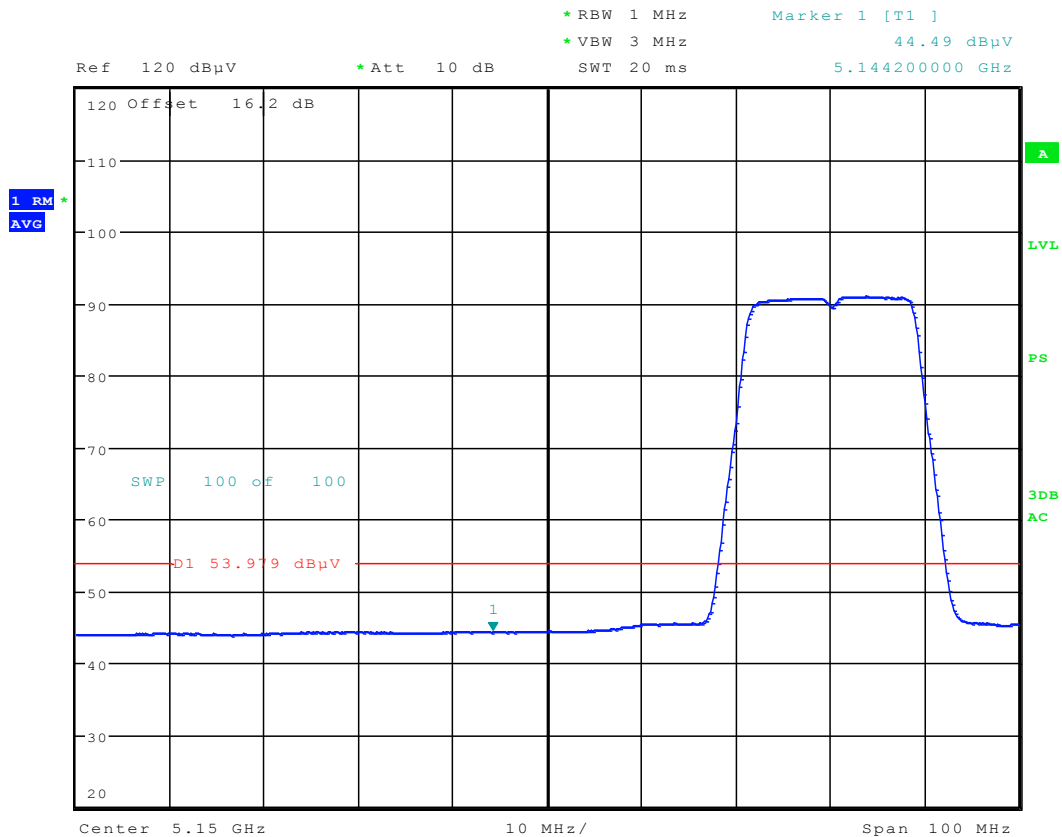


Plot 6-128. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 117 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

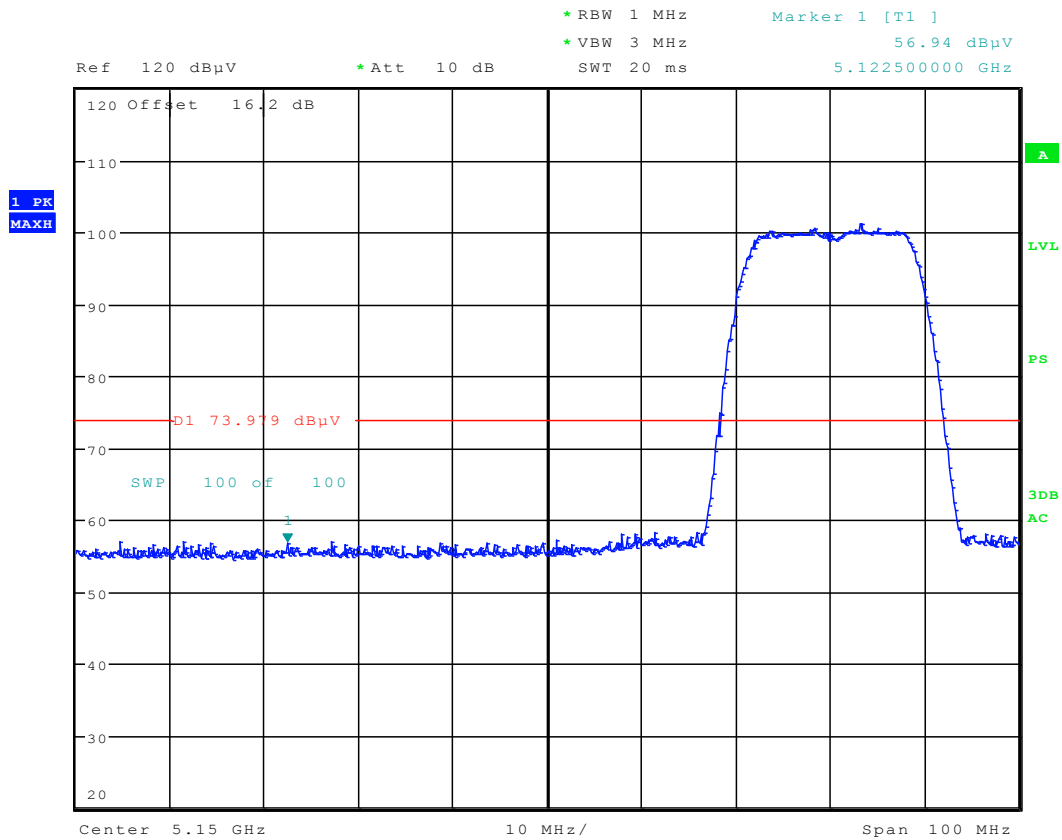

Plot 6-129. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 118 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

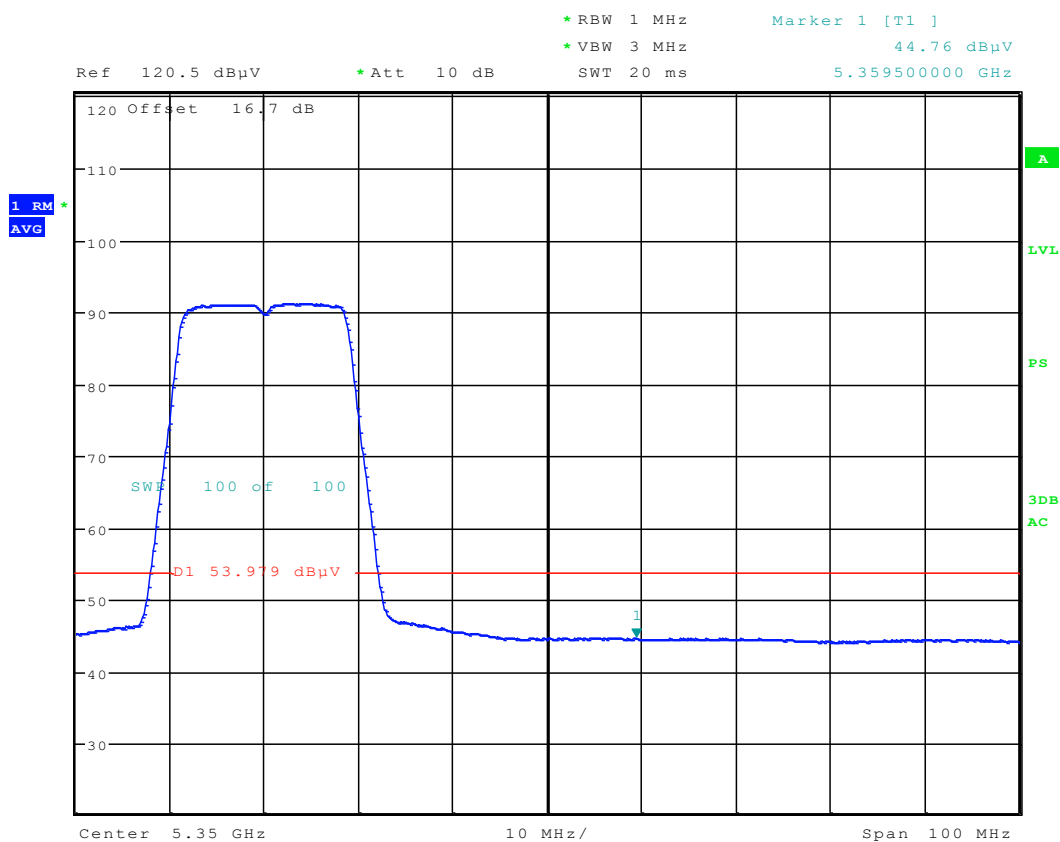


Plot 6-130. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 119 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

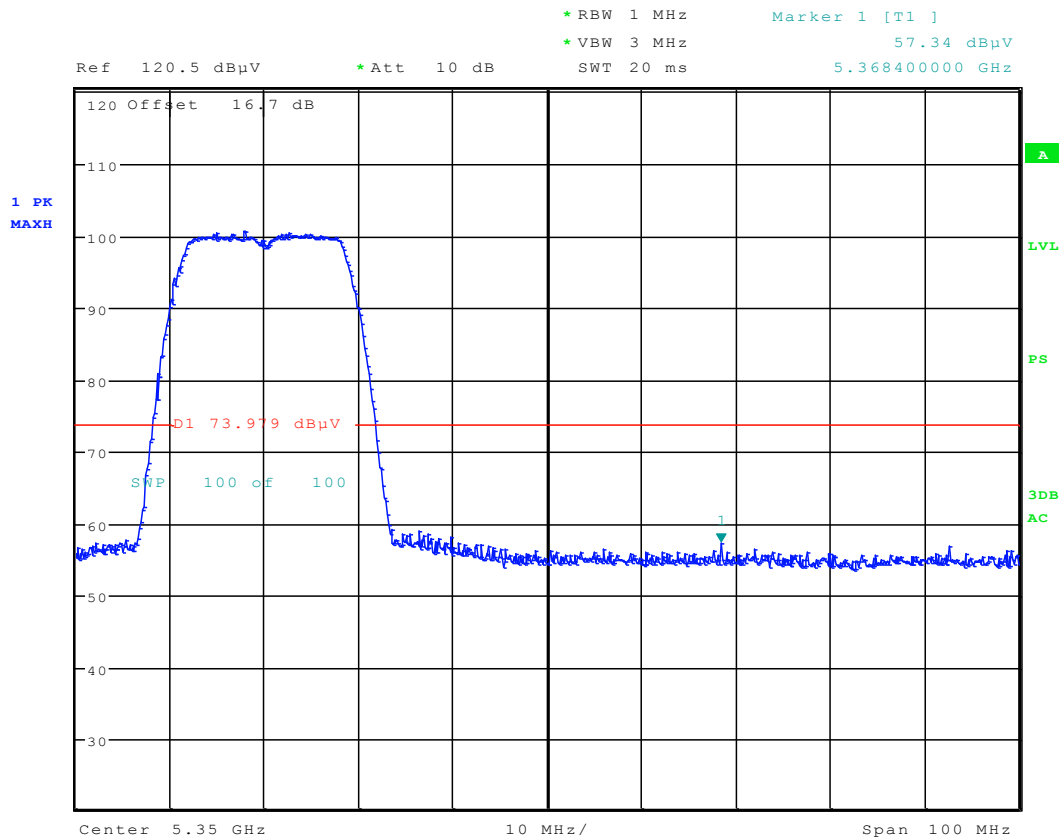

Plot 6-131. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 120 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

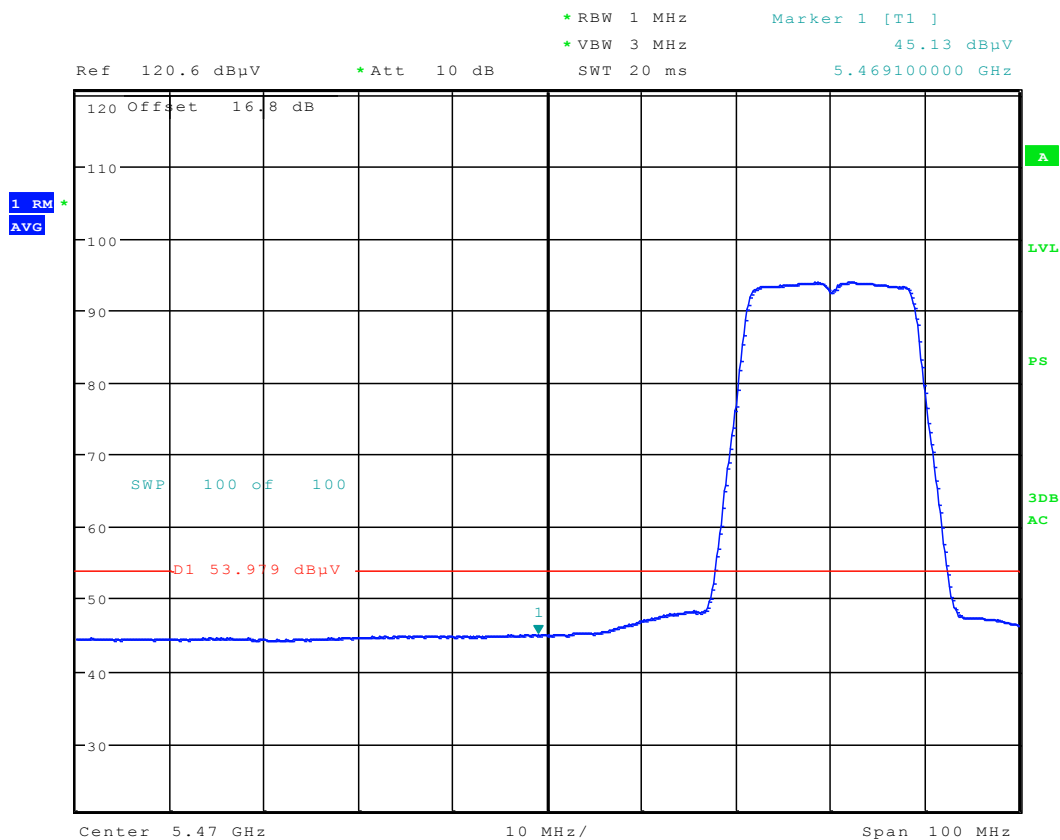


Plot 6-132. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 121 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

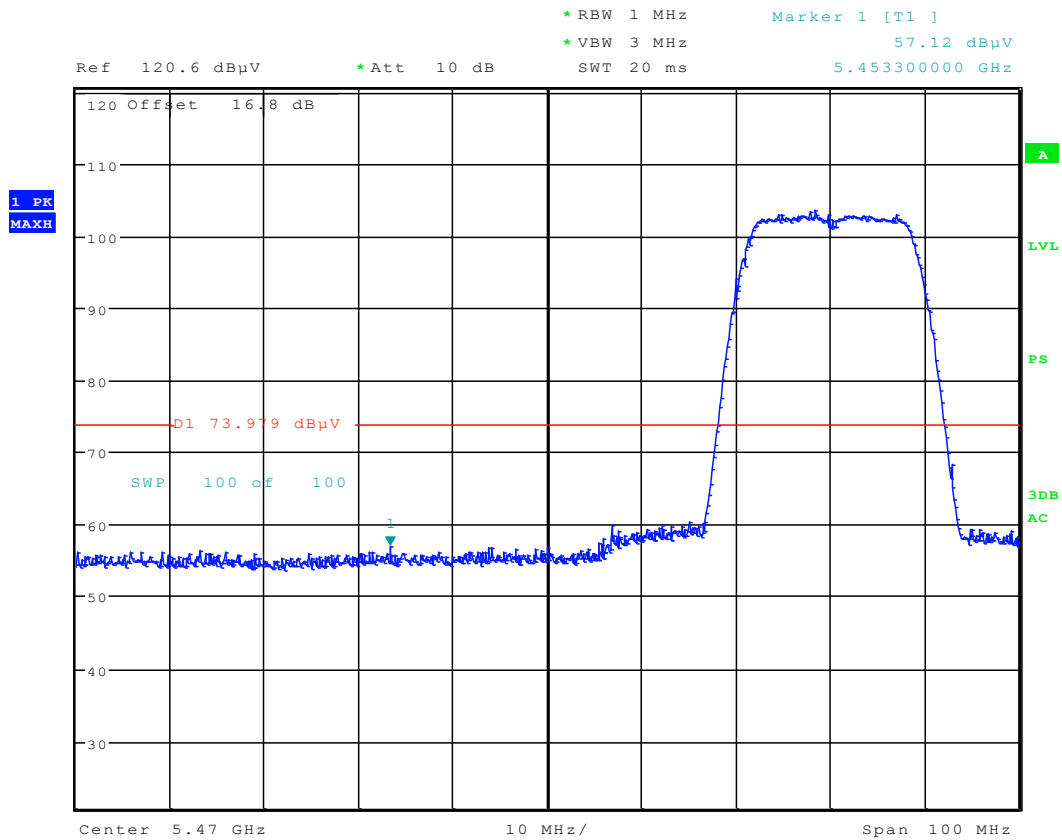

Plot 6-133. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 122 of 183

Radiated Band Edge Measurements (40MHz BW)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5190MHz

Channel: 38

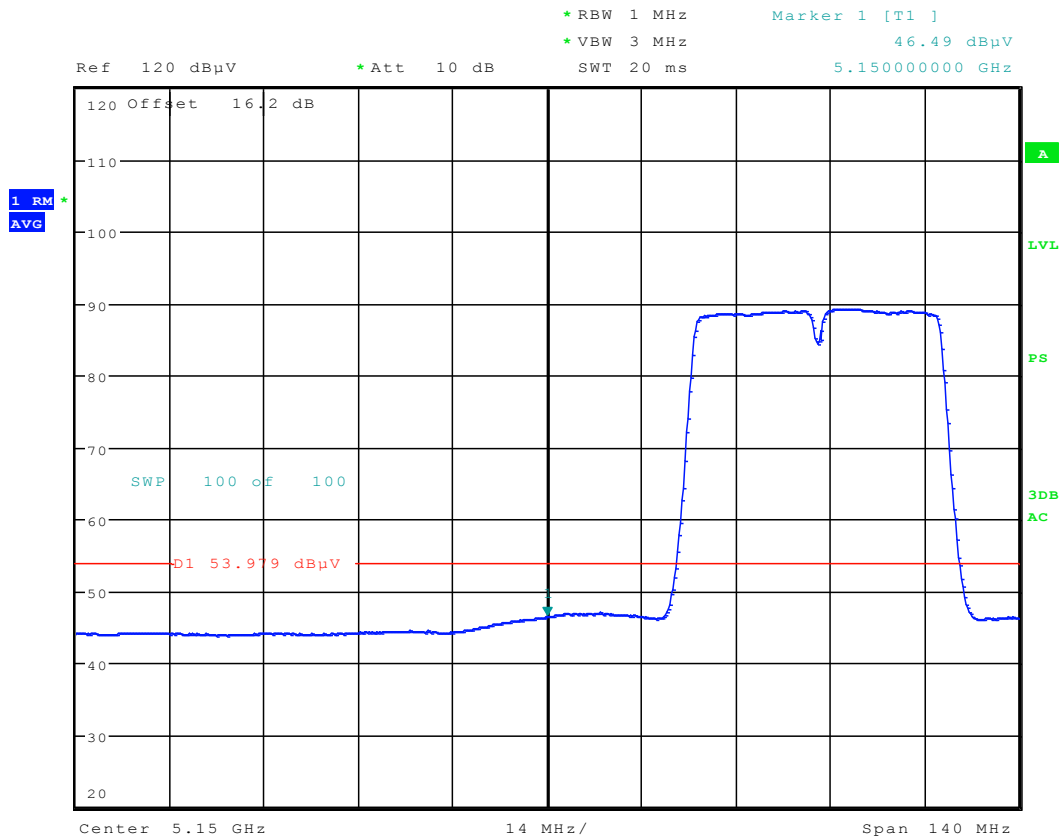


Plot 6-135. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 124 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

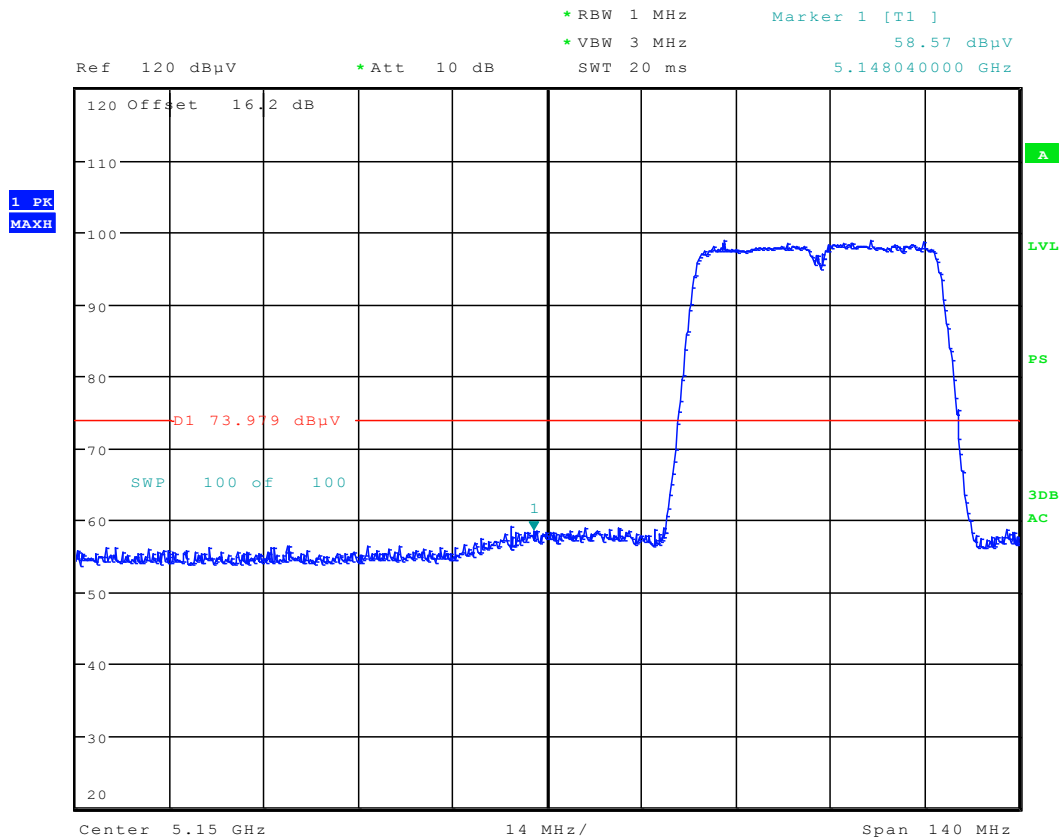

Plot 6-136. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 125 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62

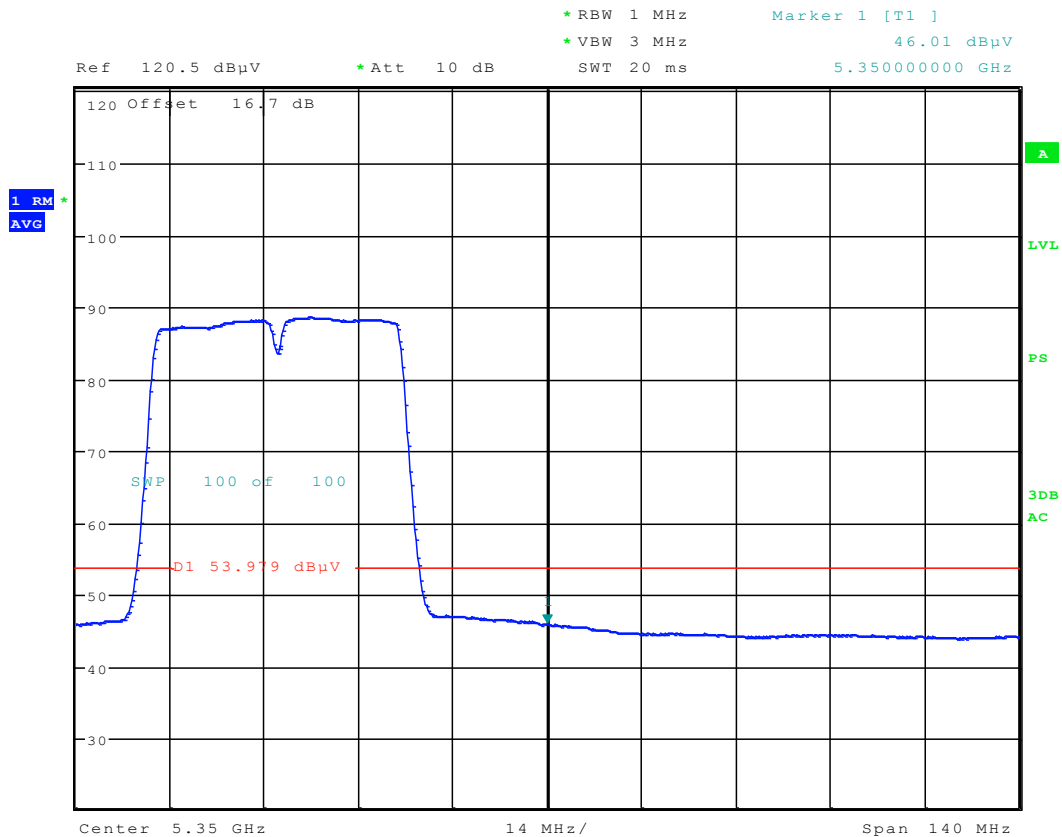


Plot 6-137. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 126 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

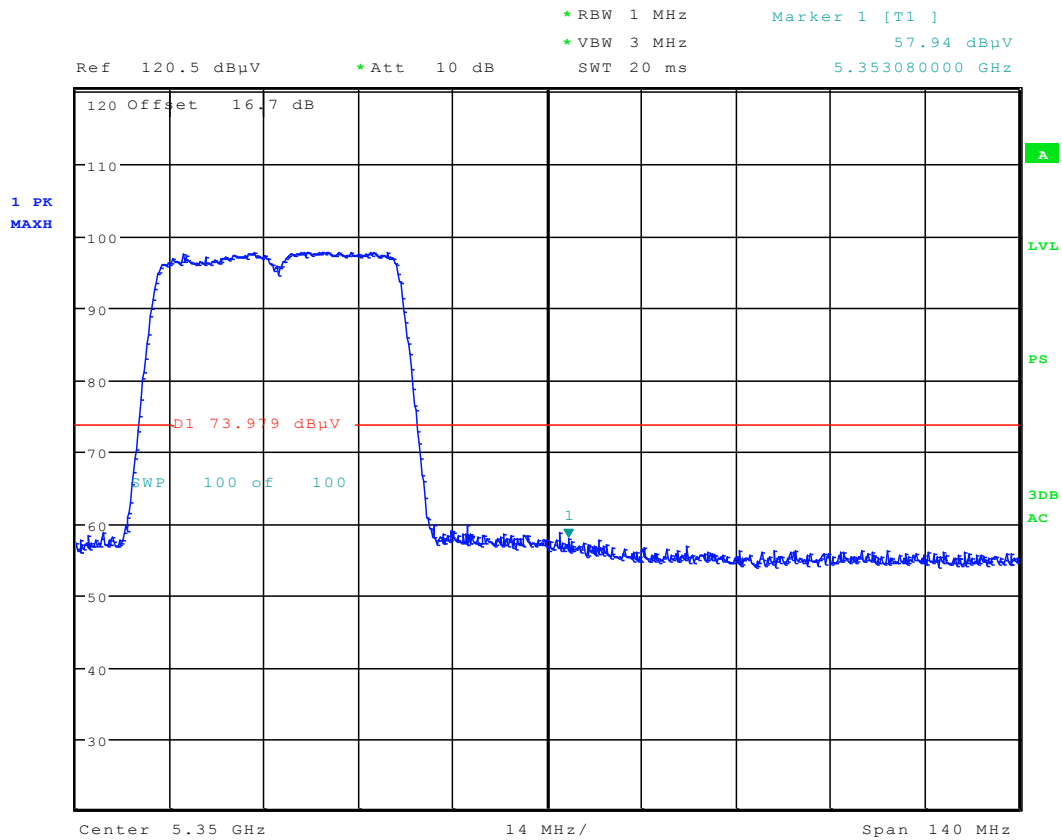

Plot 6-138. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 127 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5510MHz

Channel: 102

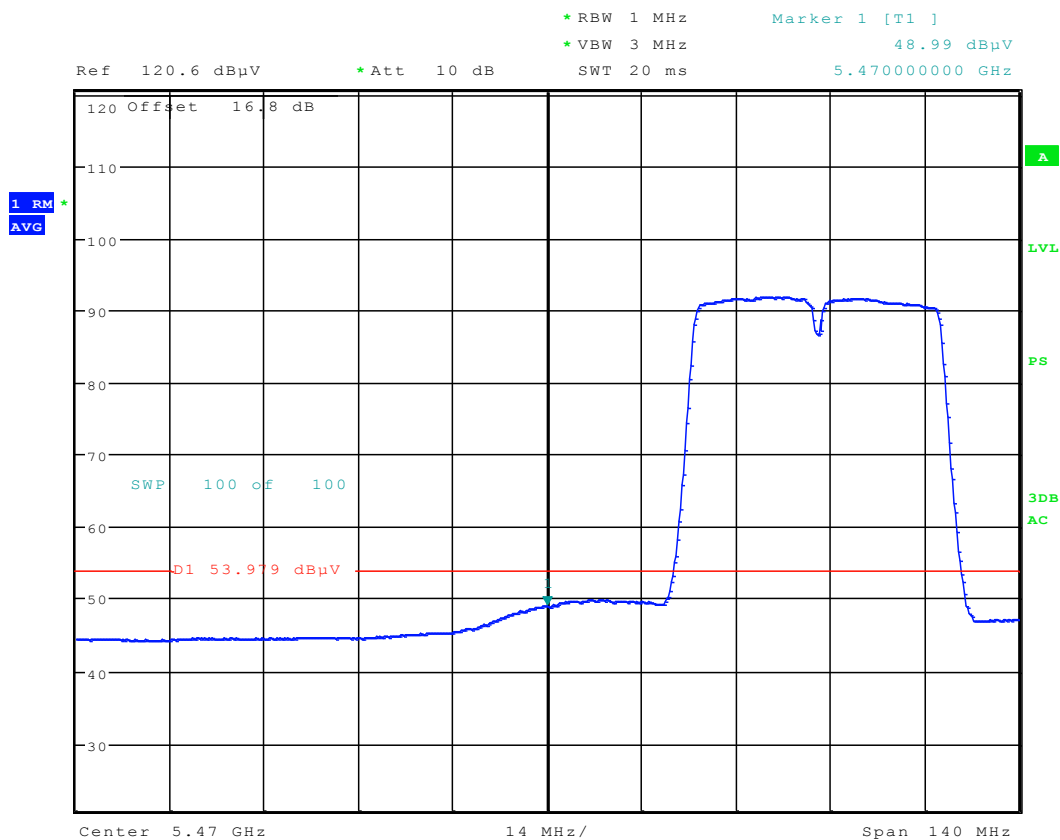


Plot 6-139. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 128 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

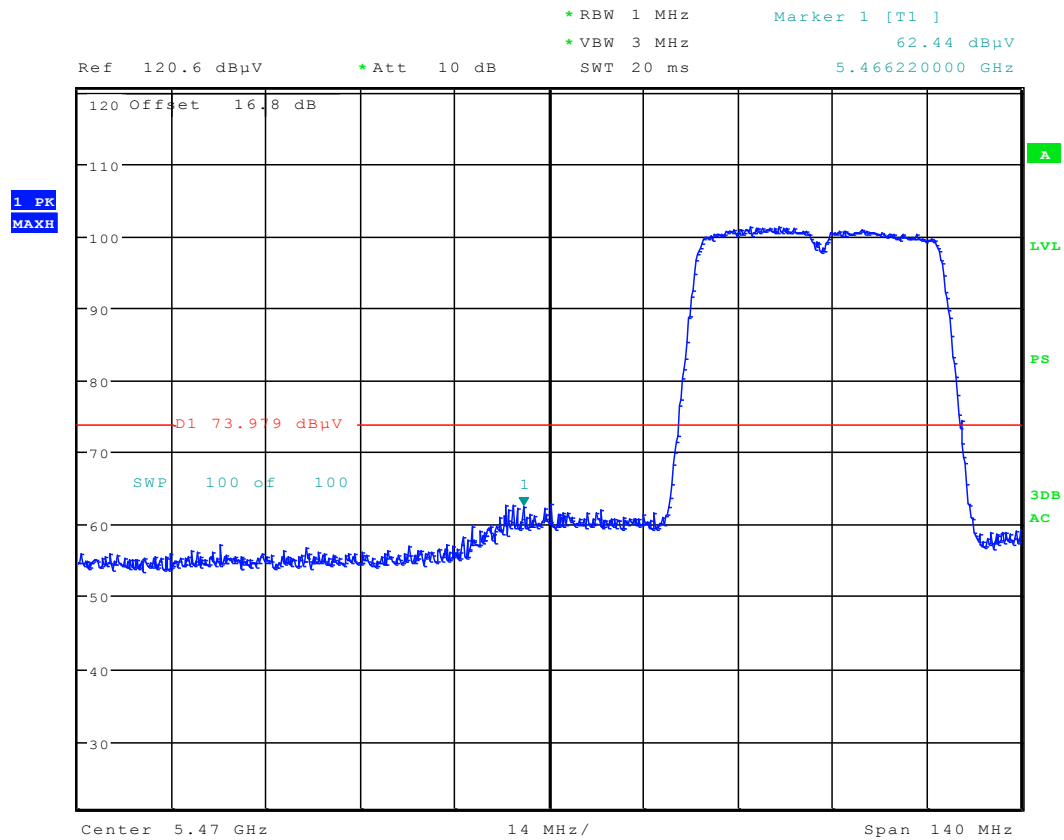

Plot 6-140. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 129 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5670MHz

Channel: 134

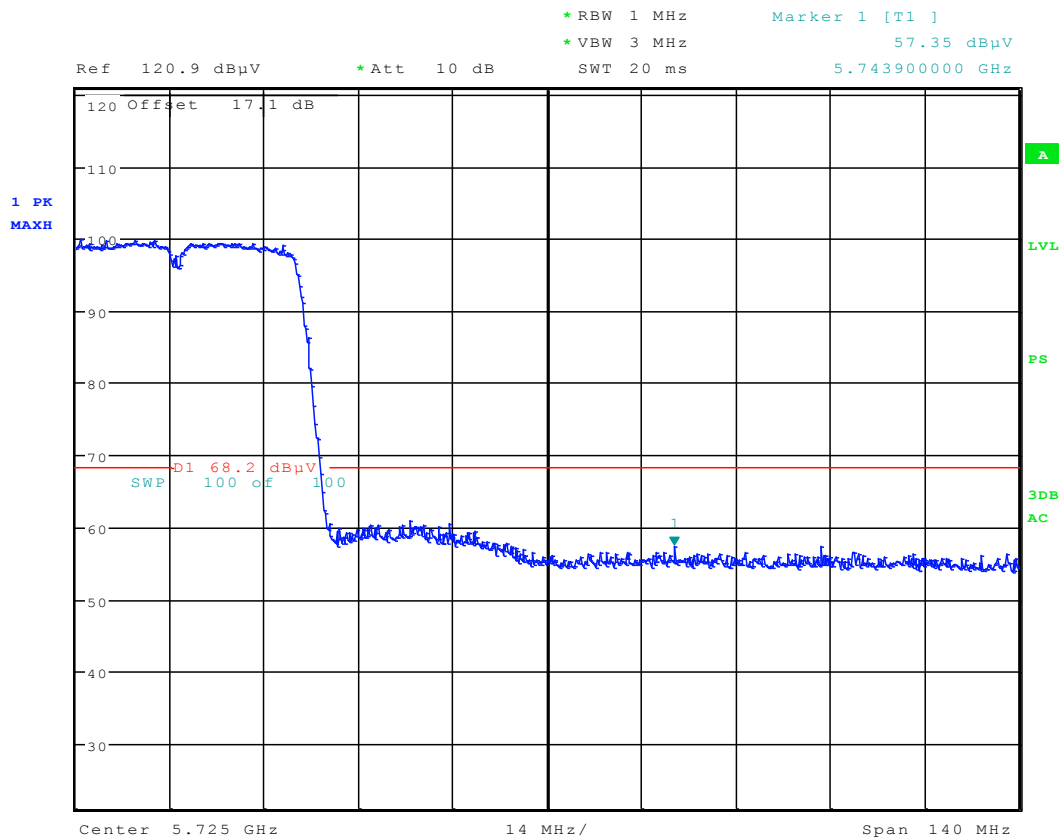

Plot 6-141. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 130 of 183

Radiated Band Edge Measurements (80MHz BW)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (80MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5210MHz

Channel: 42

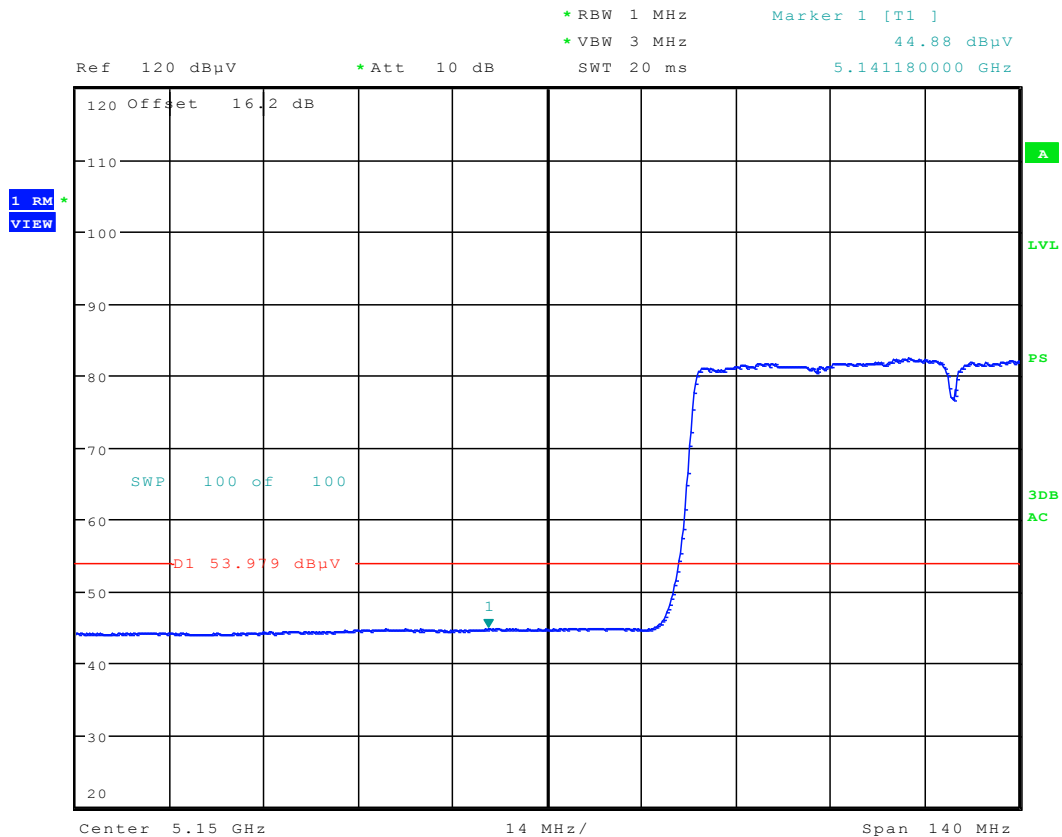


Plot 6-142. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 131 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

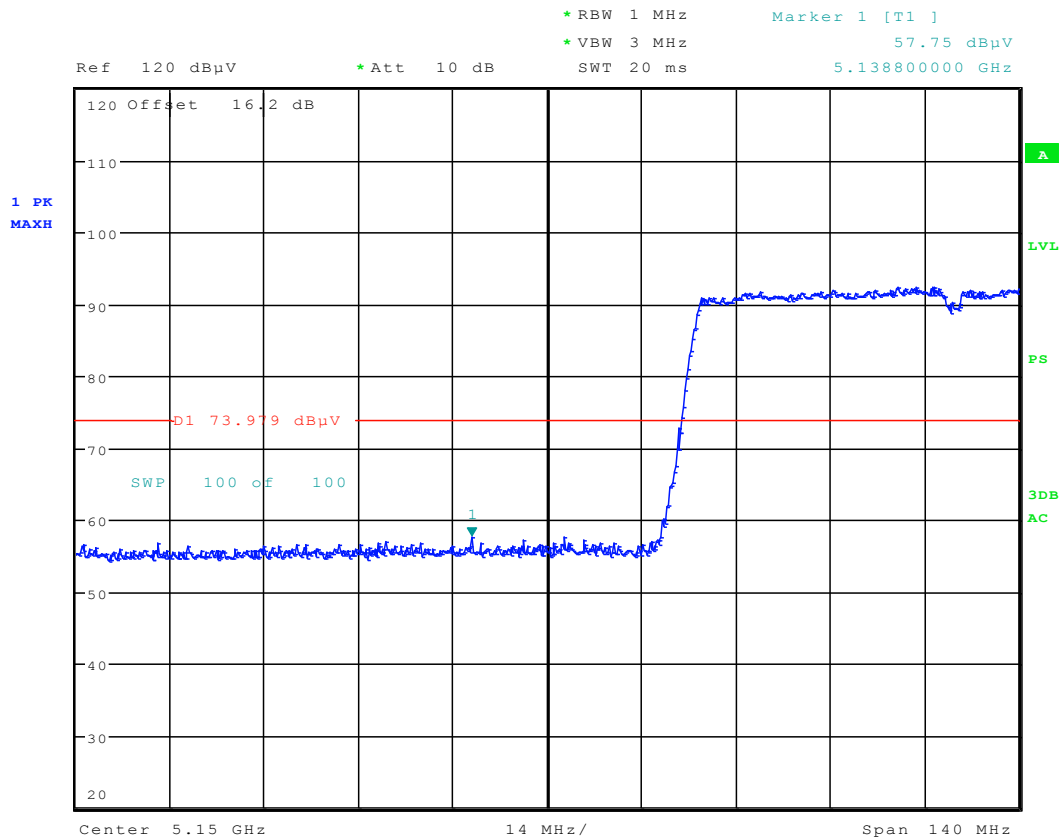

Plot 6-143. Radiated Restricted Lower Band Edge Plot (Peak - UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 132 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz

Channel: 58

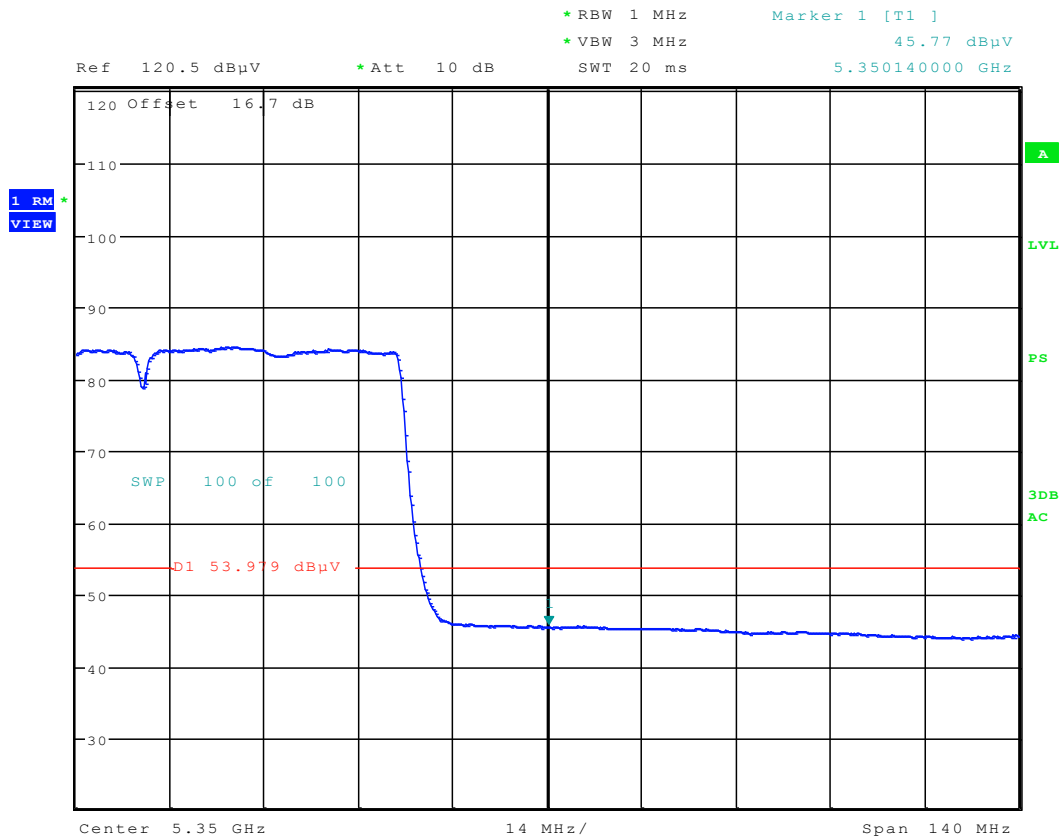


Plot 6-144. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 133 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

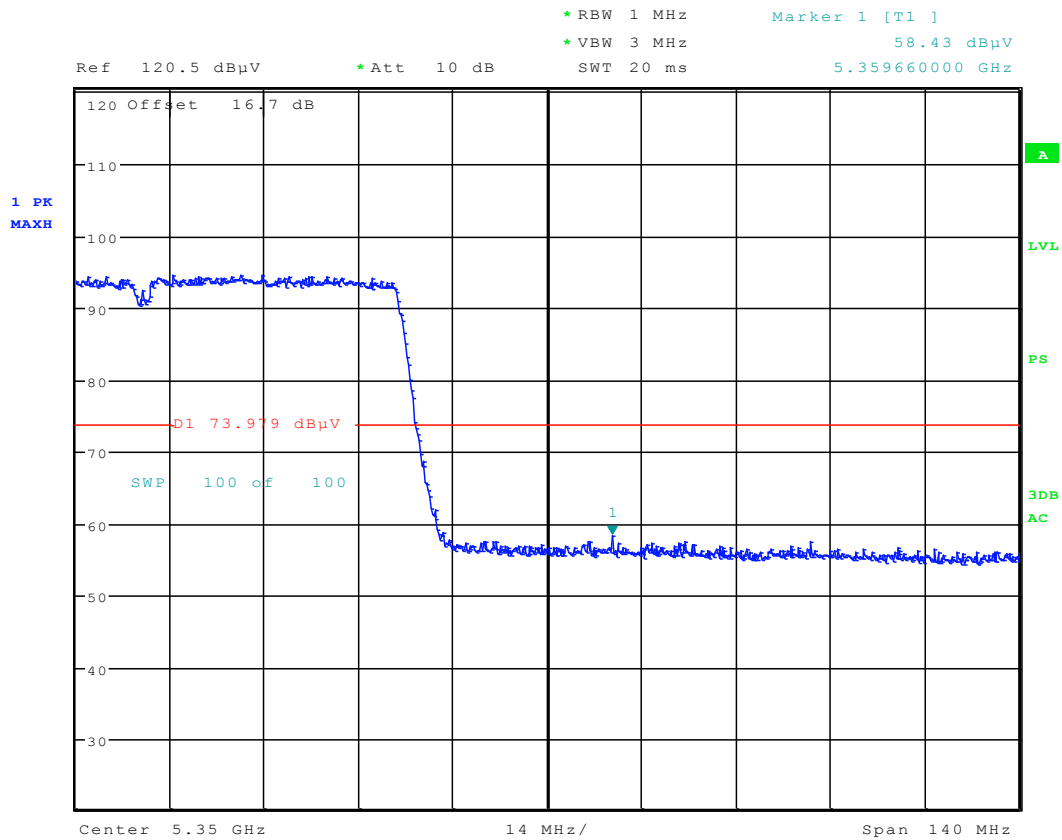

Plot 6-145. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 134 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5530MHz

Channel: 106

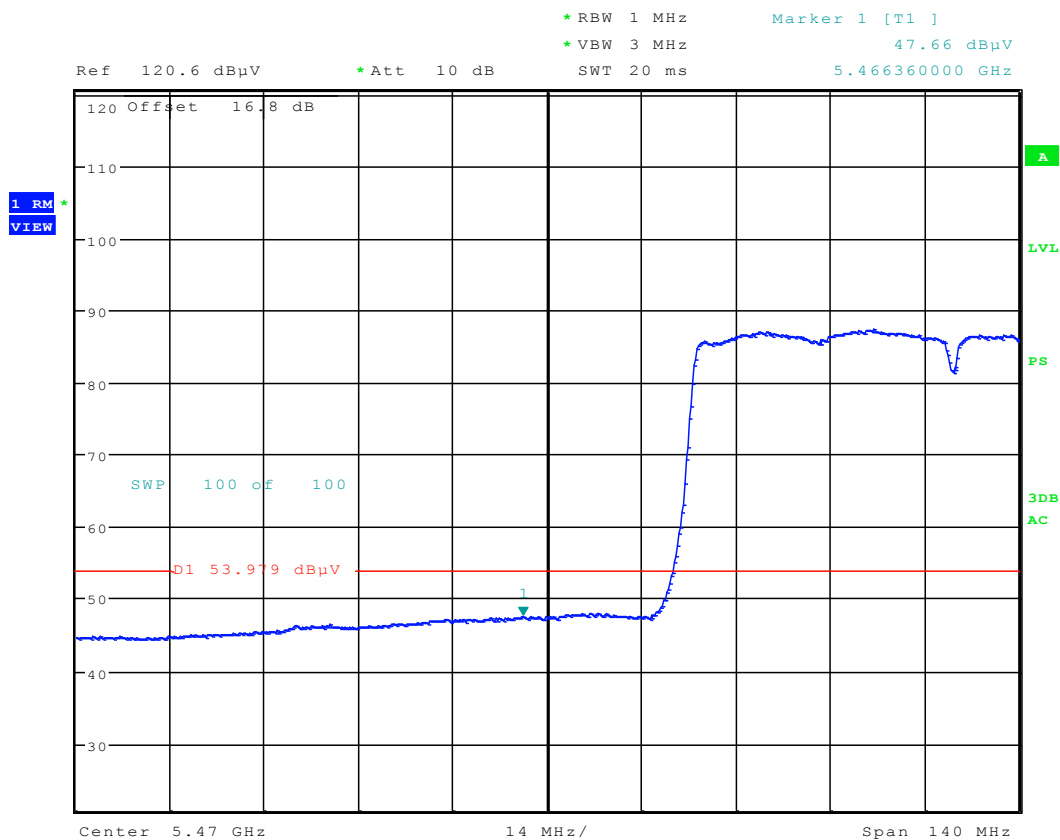


Plot 6-146. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 135 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

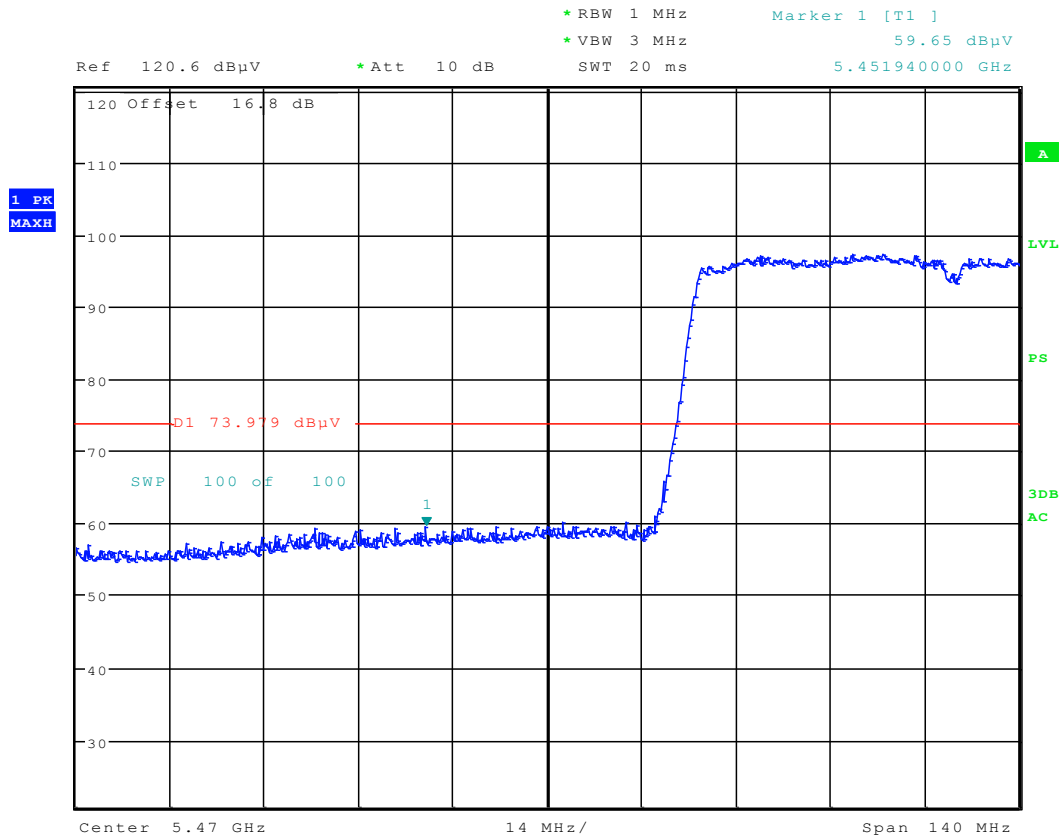

Plot 6-147. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 136 of 183

6.9 Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

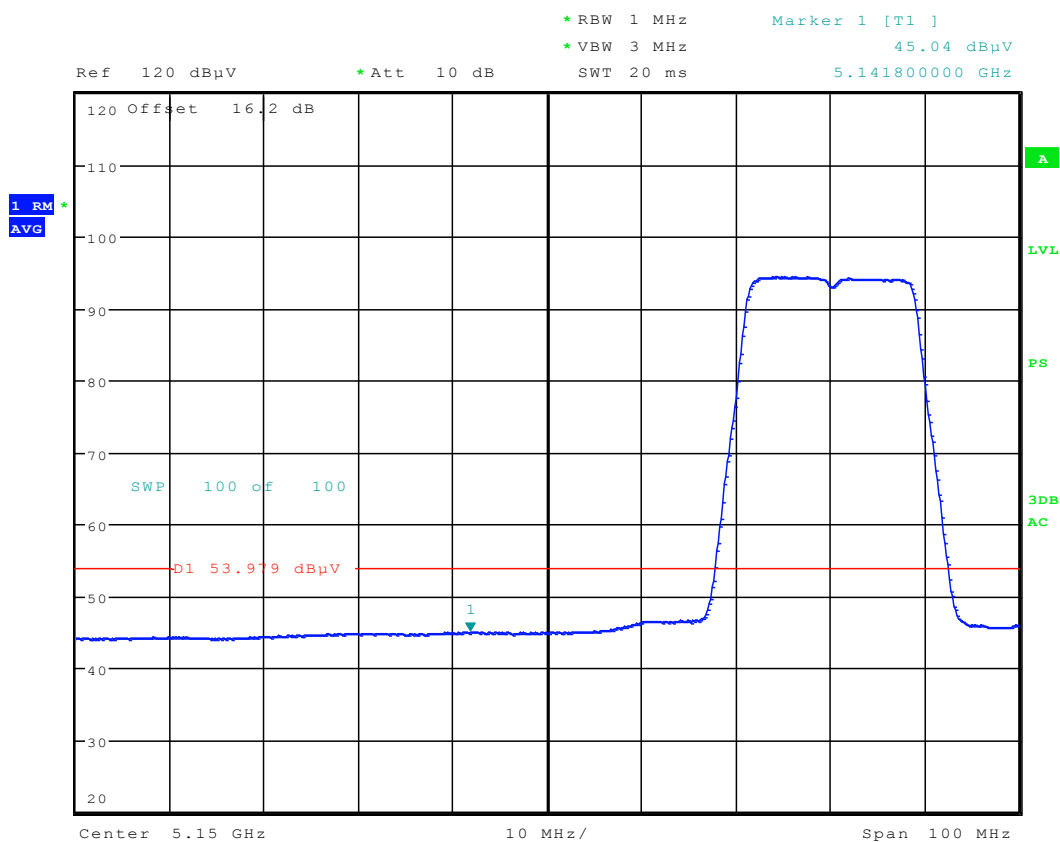


Plot 6-148. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 137 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

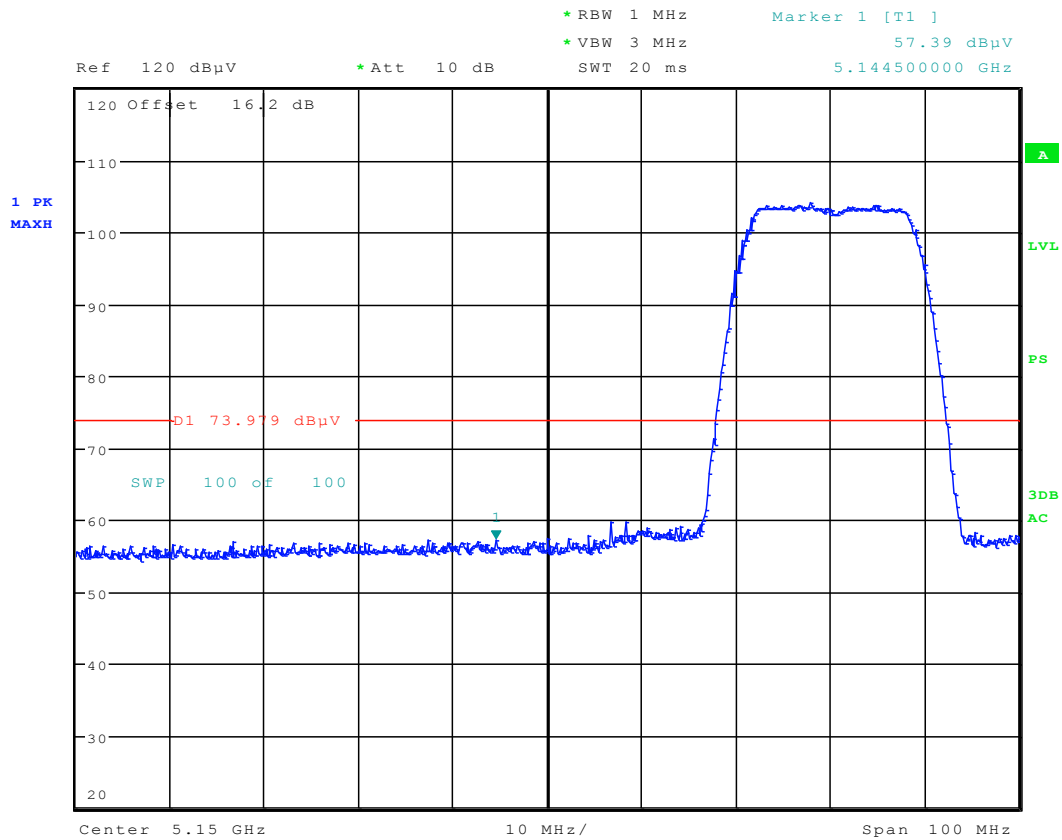


Plot 6-149. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 138 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

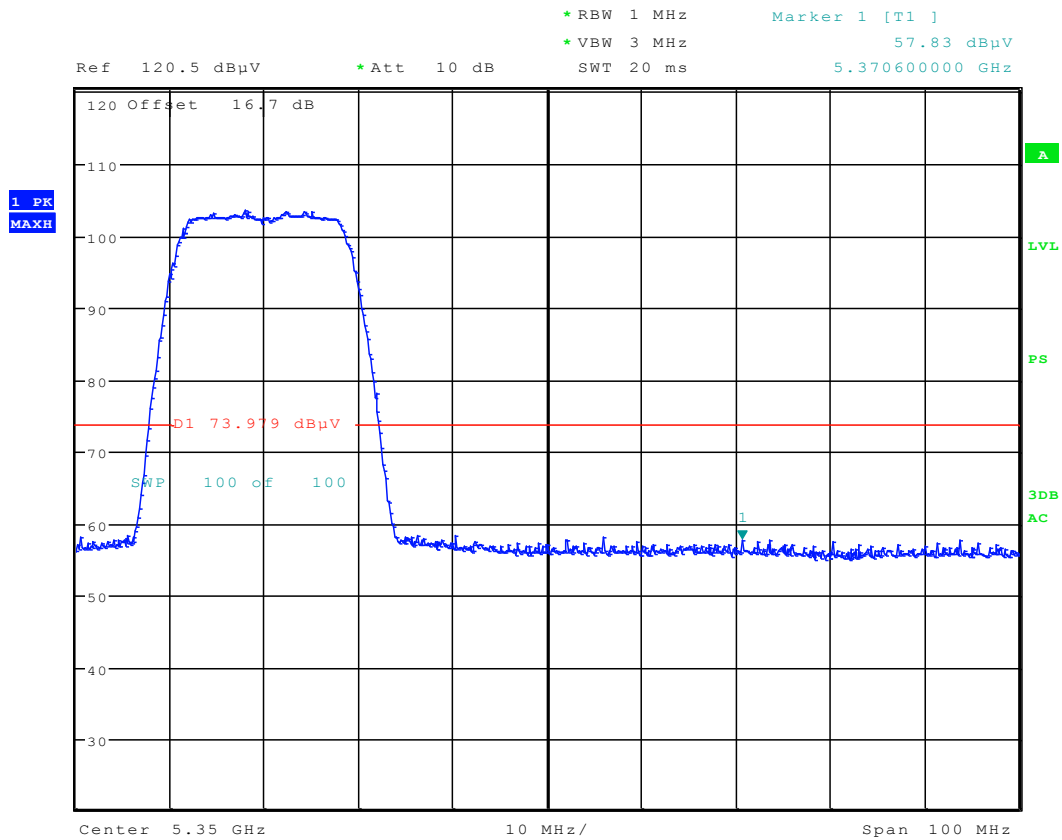

Plot 6-151. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 140 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

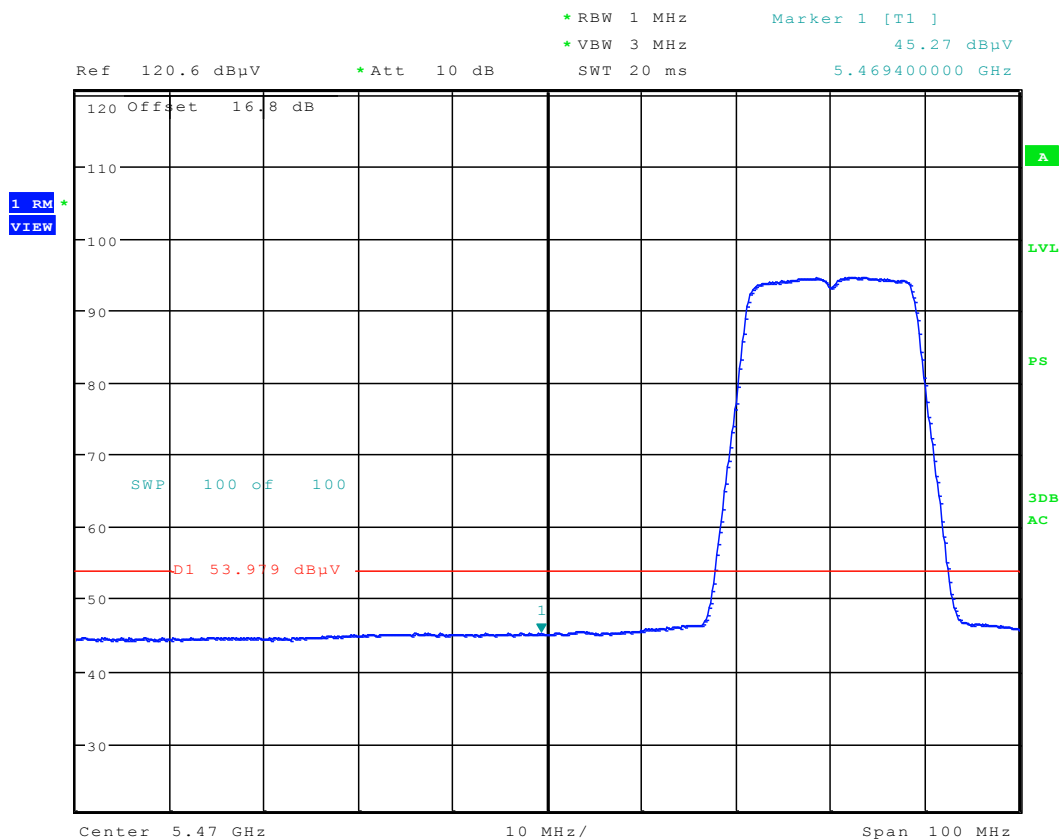


Plot 6-152. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 141 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

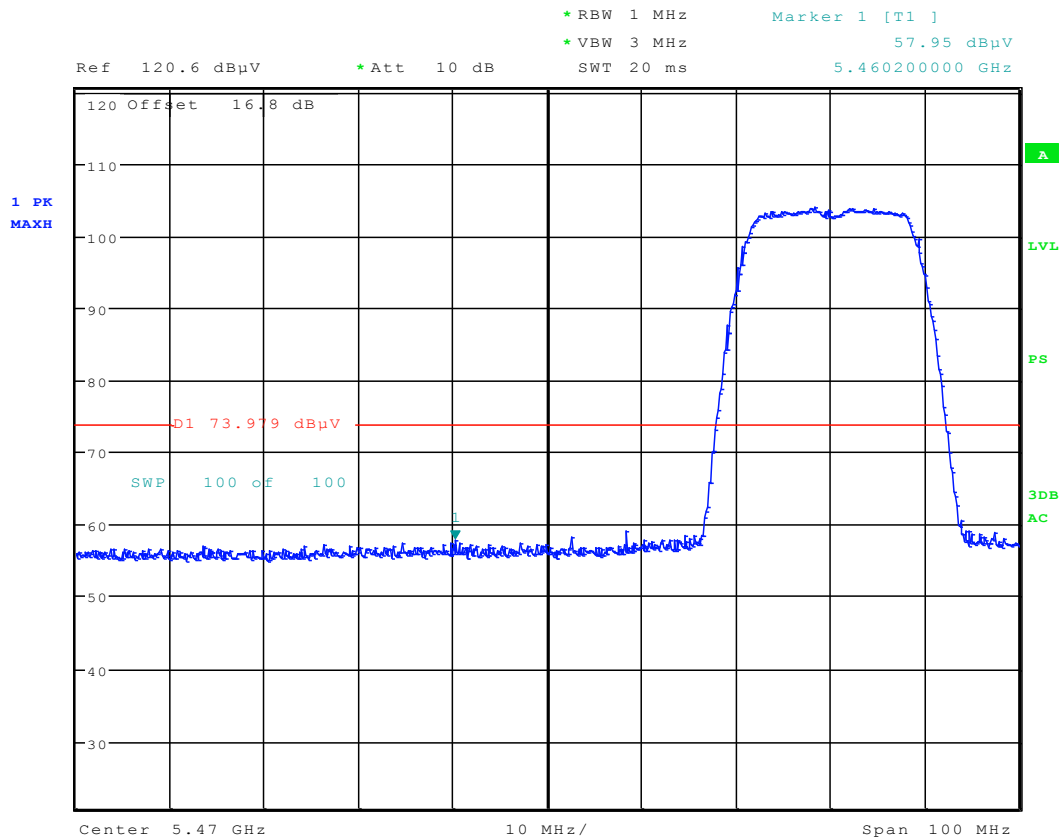

Plot 6-153. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 142 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5700MHz

Channel: 140

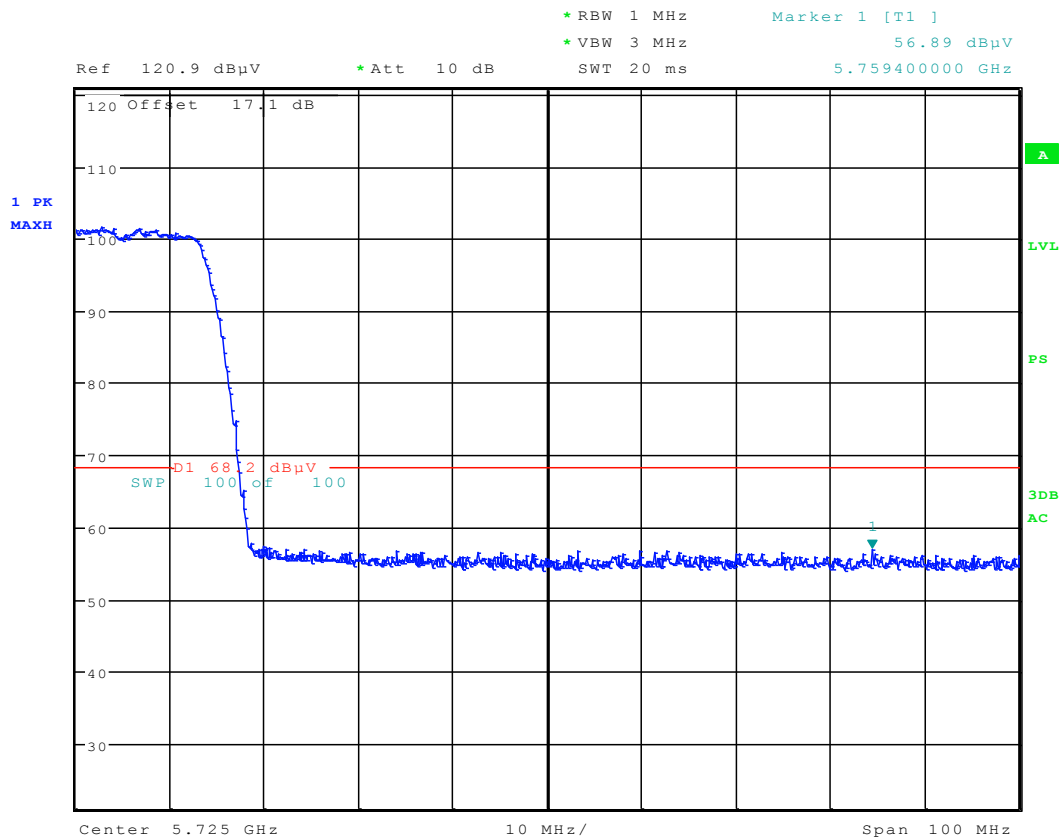

Plot 6-154. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 143 of 183

Radiated Band Edge Measurements (40MHz BW)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5190MHz

Channel: 38

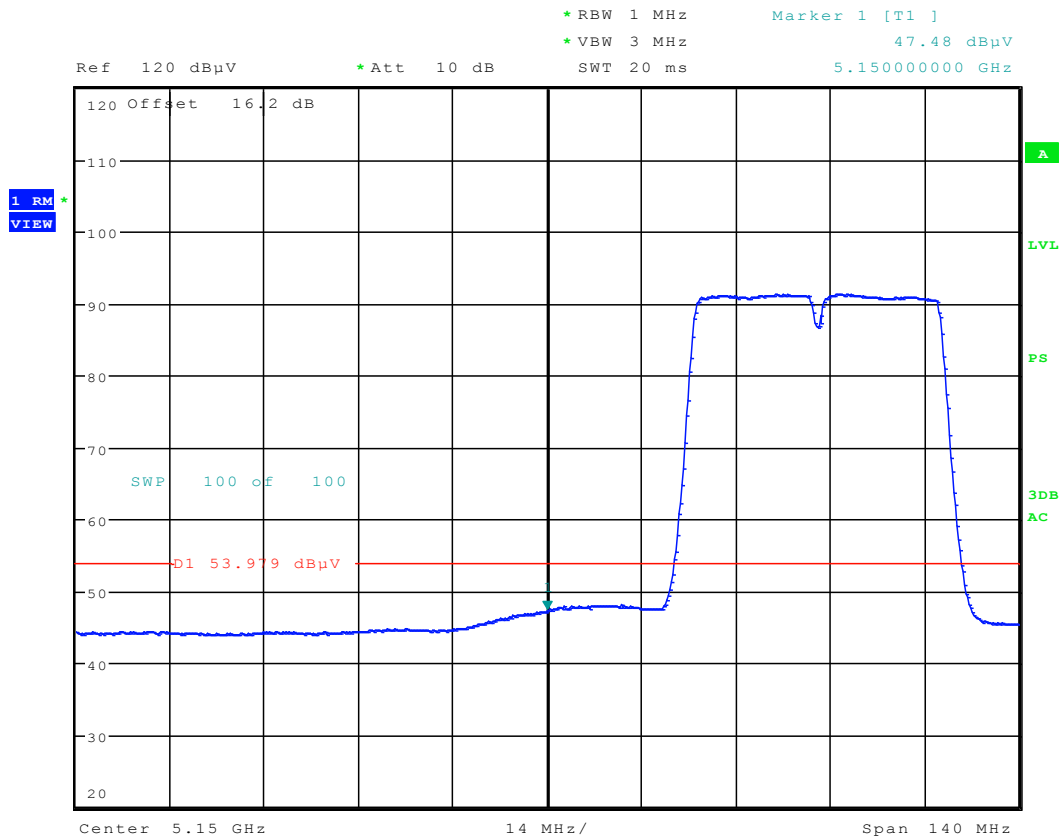


Plot 6-155. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 144 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

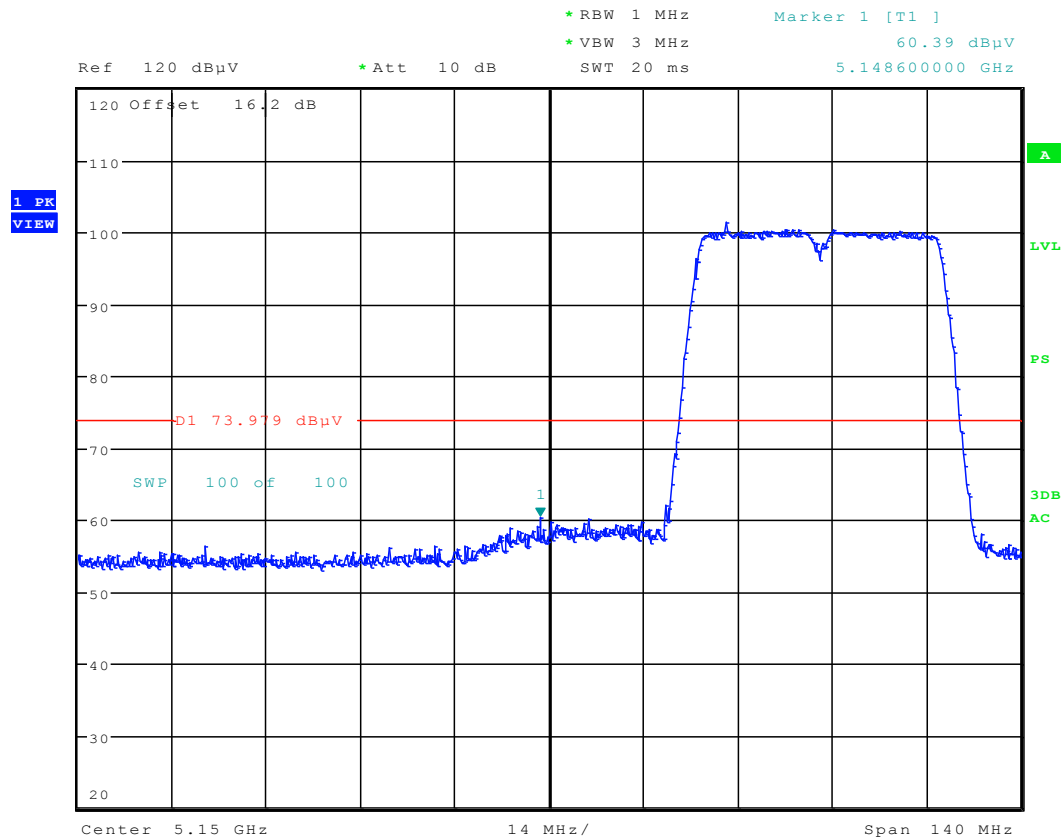

Plot 6-156. Radiated Restricted Lower Band Edge Plot (Peak - UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 145 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62

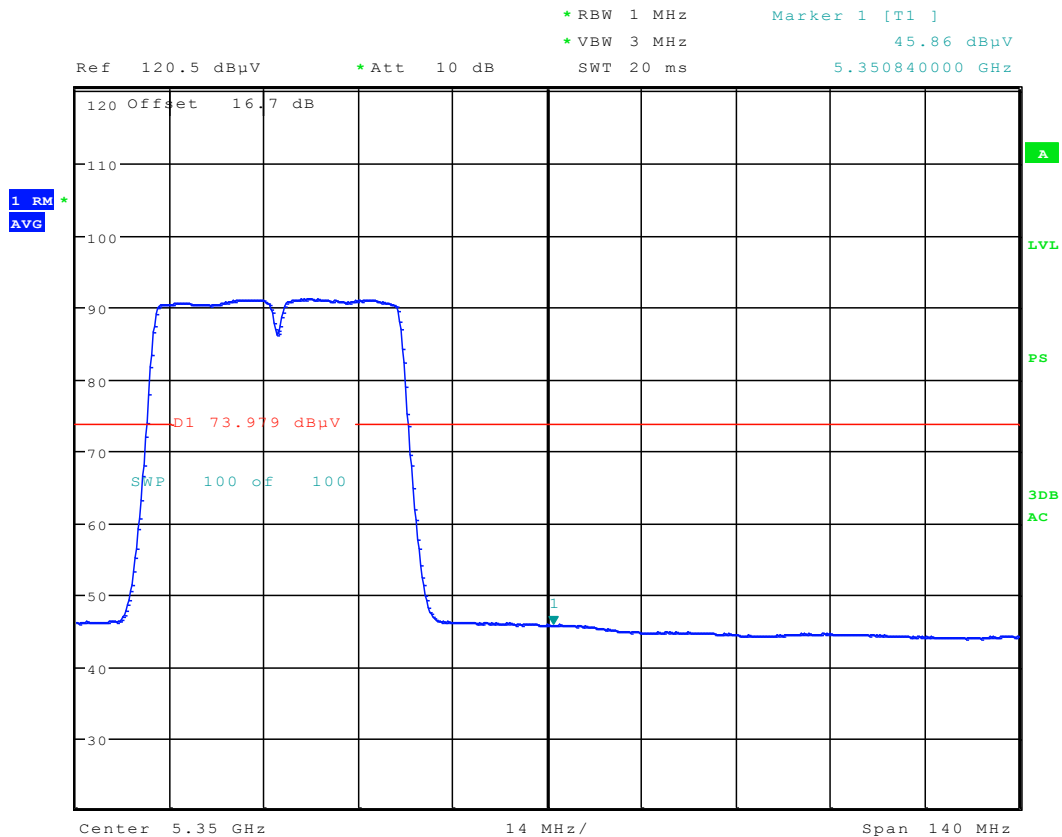


Plot 6-157. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 146 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

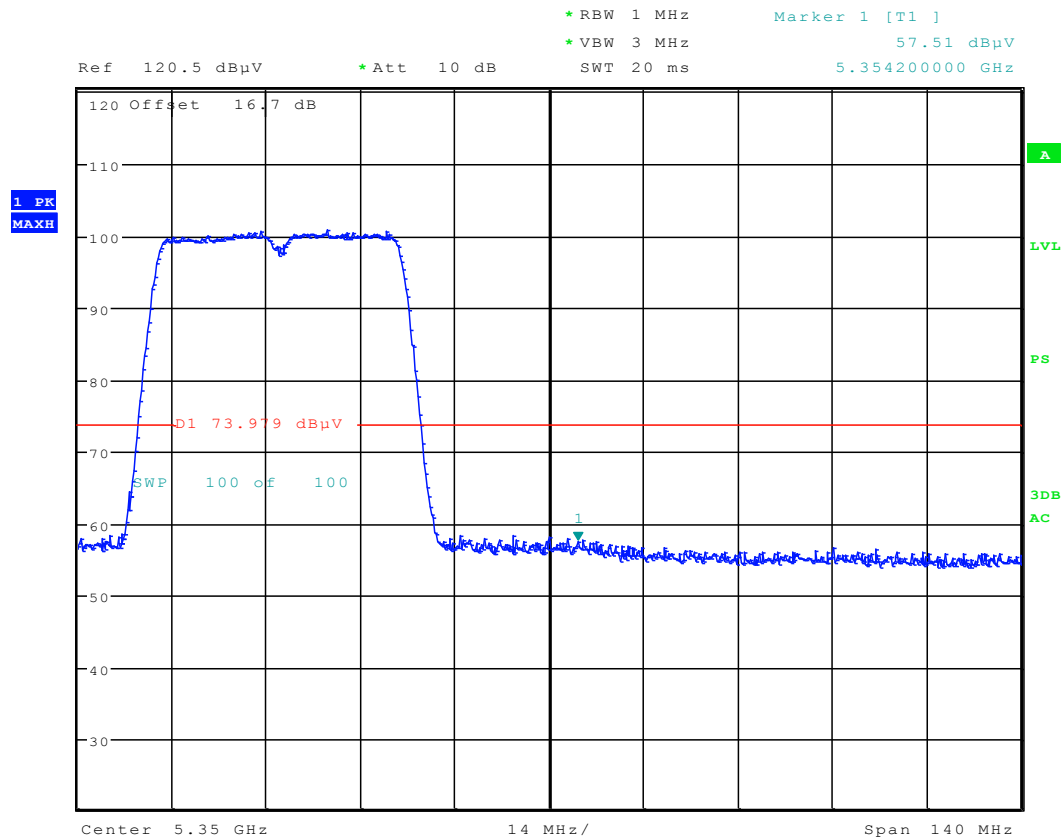


Plot 6-158. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 147 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

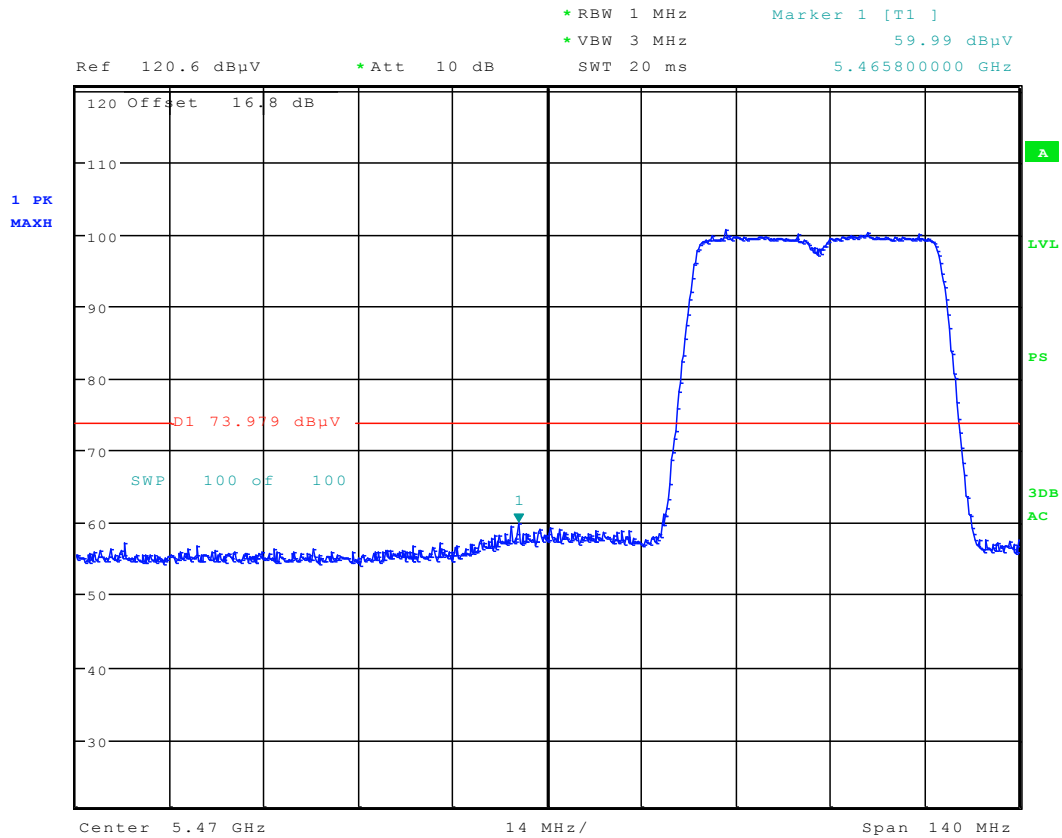

Plot 6-160. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 149 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5670MHz

Channel: 134

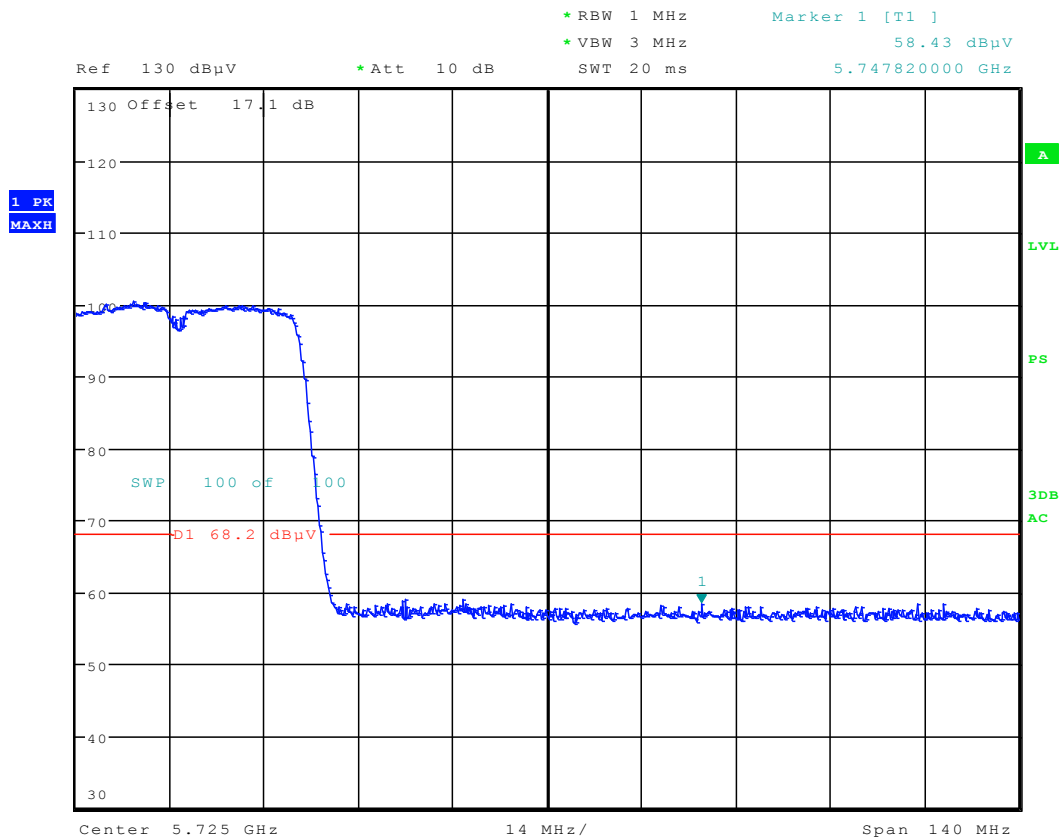

Plot 6-161. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 150 of 183

Radiated Band Edge Measurements (80MHz BW)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (80MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5210MHz

Channel: 42

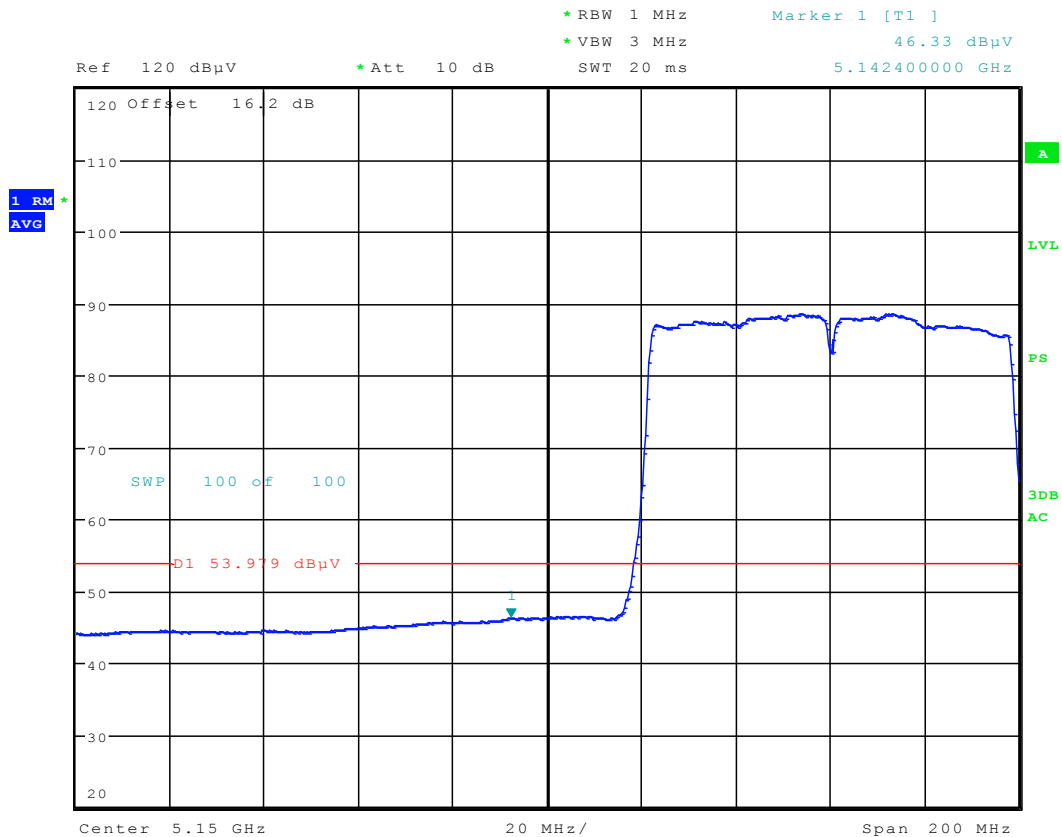


Plot 6-162. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 151 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

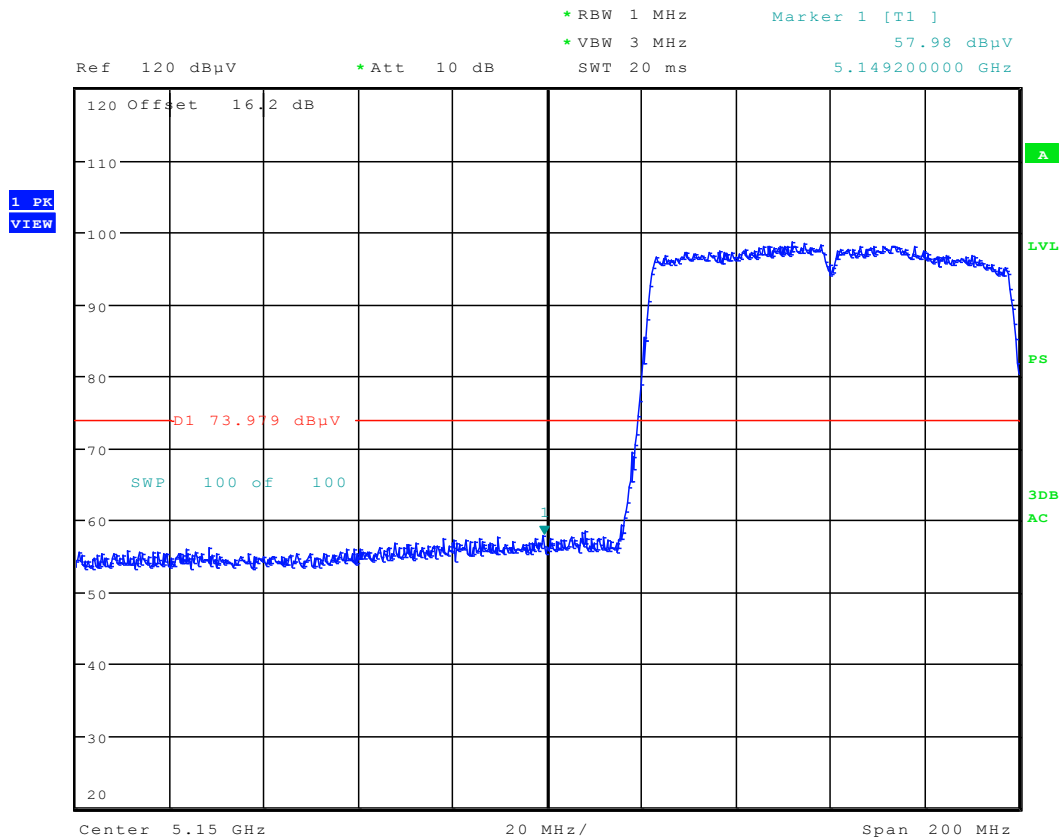

Plot 6-163. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 152 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz

Channel: 58

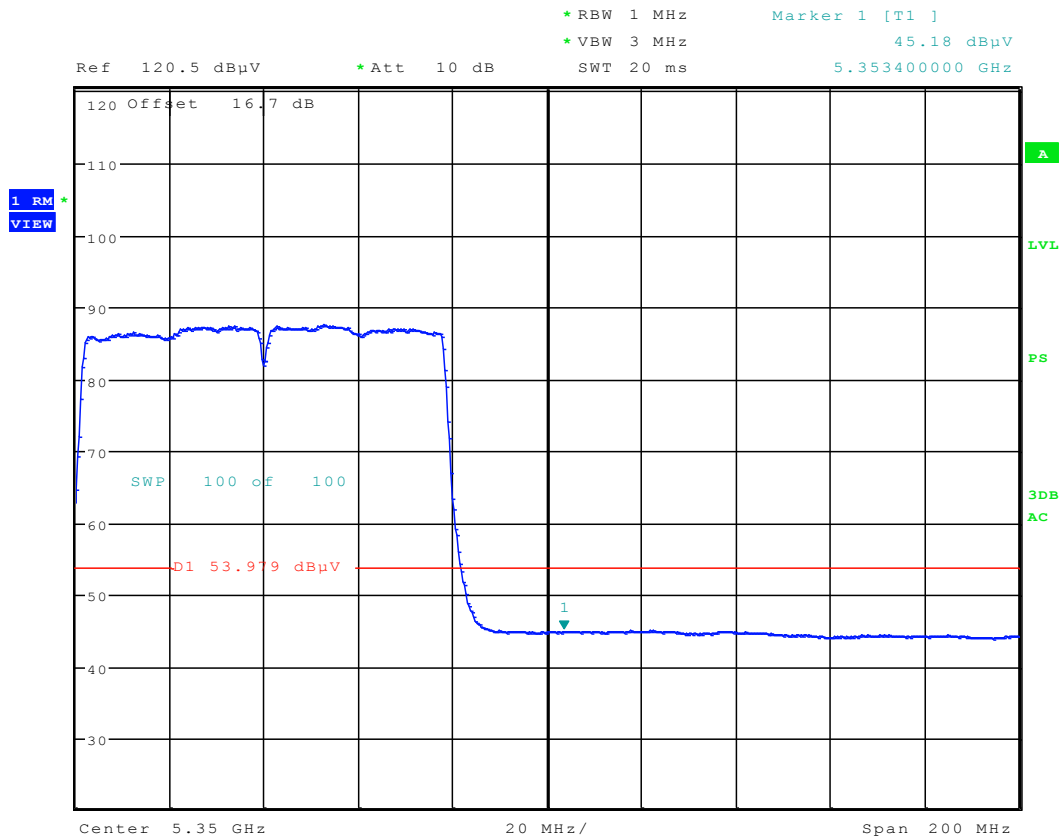


Plot 6-164. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 153 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

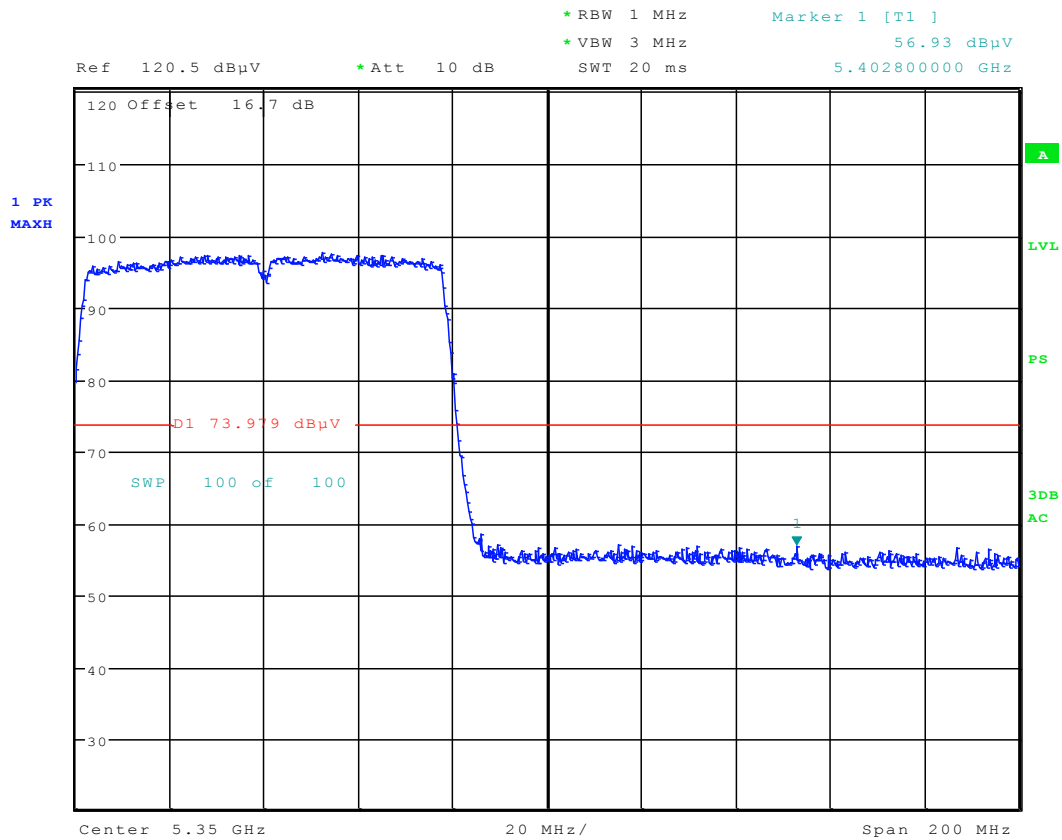


Plot 6-165. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 154 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

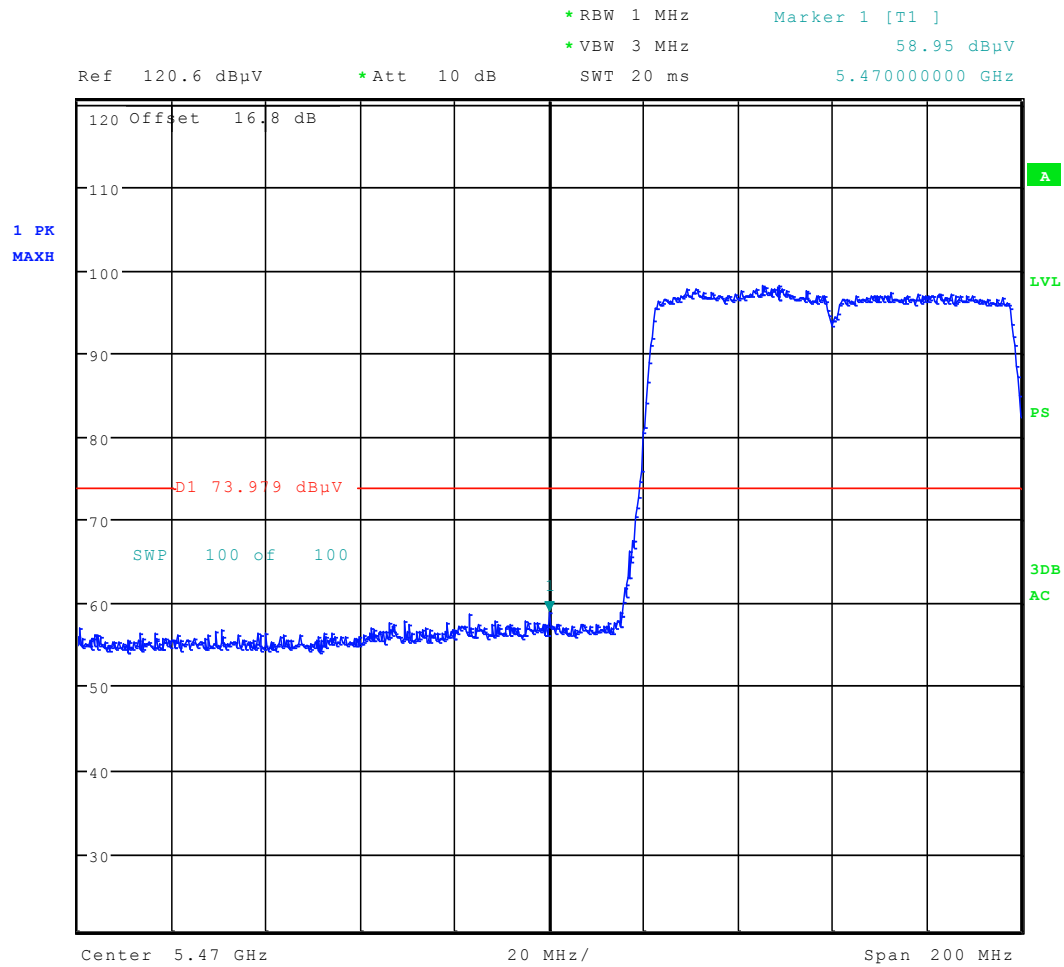

Plot 6-167. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 156 of 183

6.10 MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz


Channel: 36

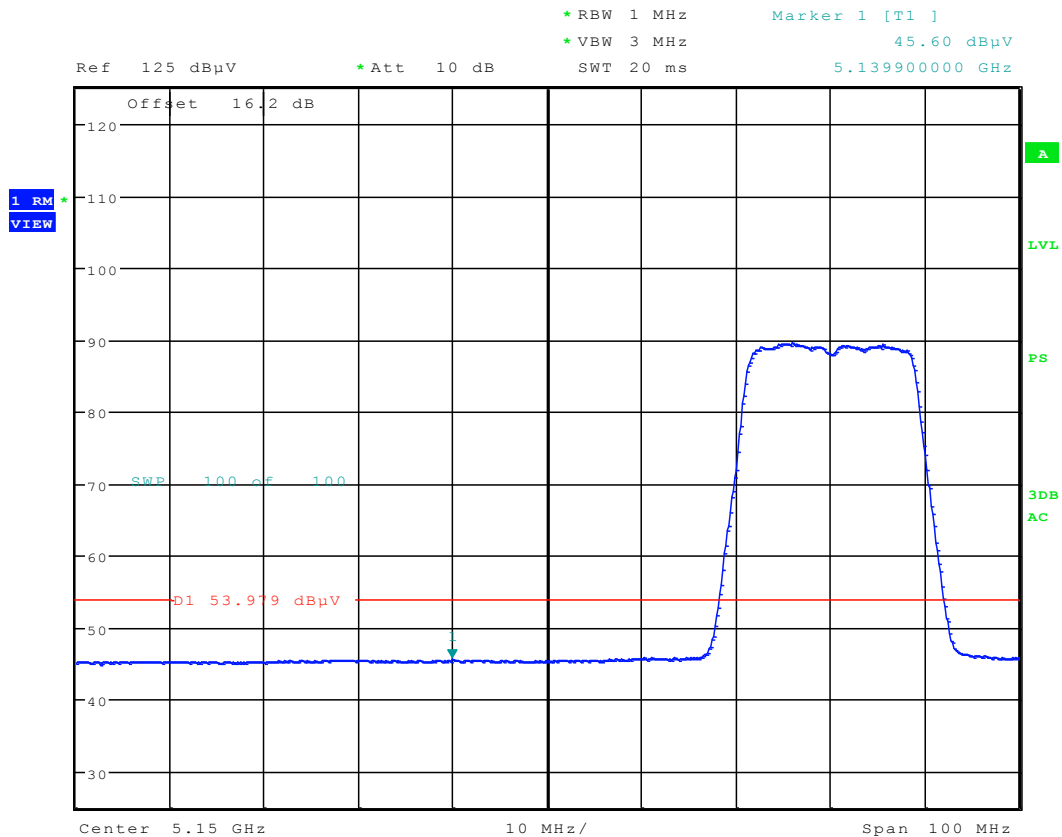

Plot 6-168. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 157 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

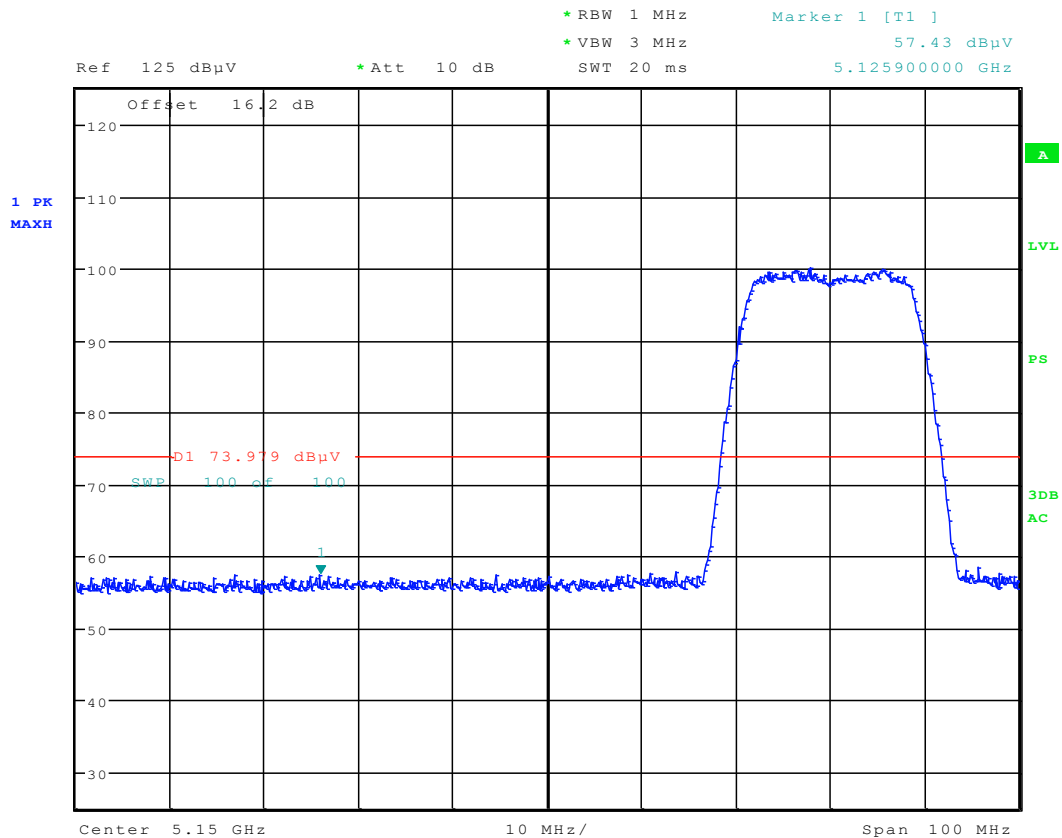


Plot 6-169. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 158 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

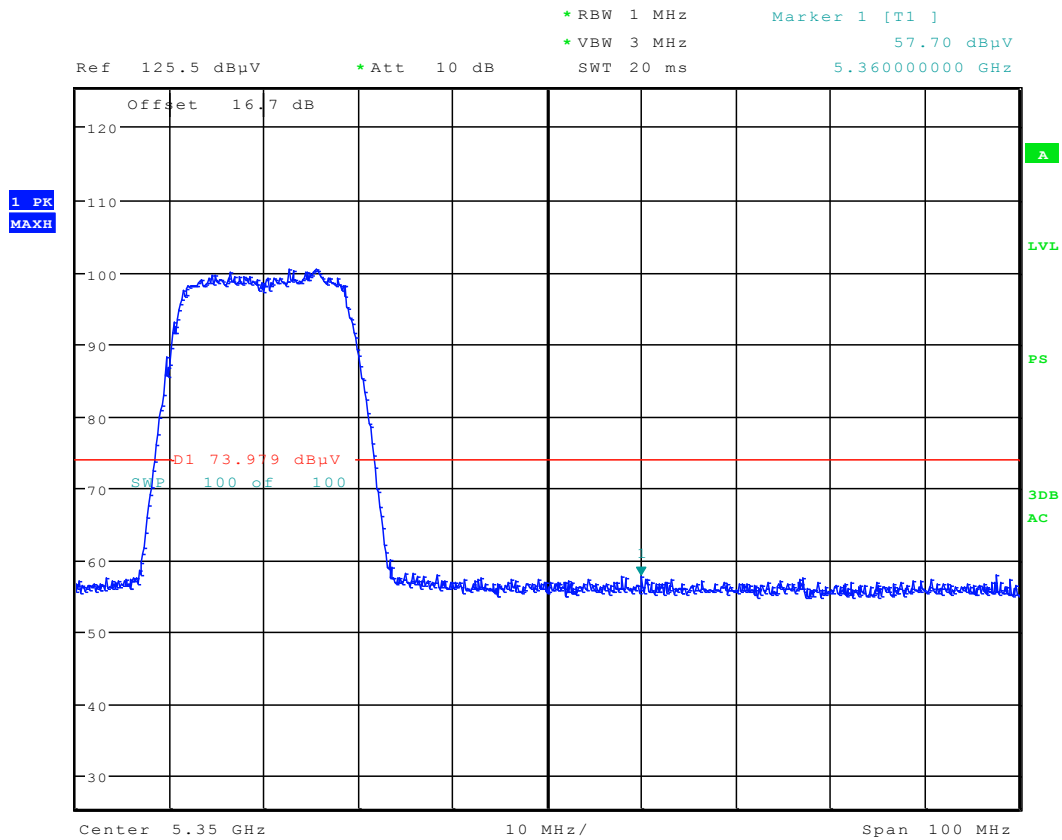

Plot 6-171. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 160 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

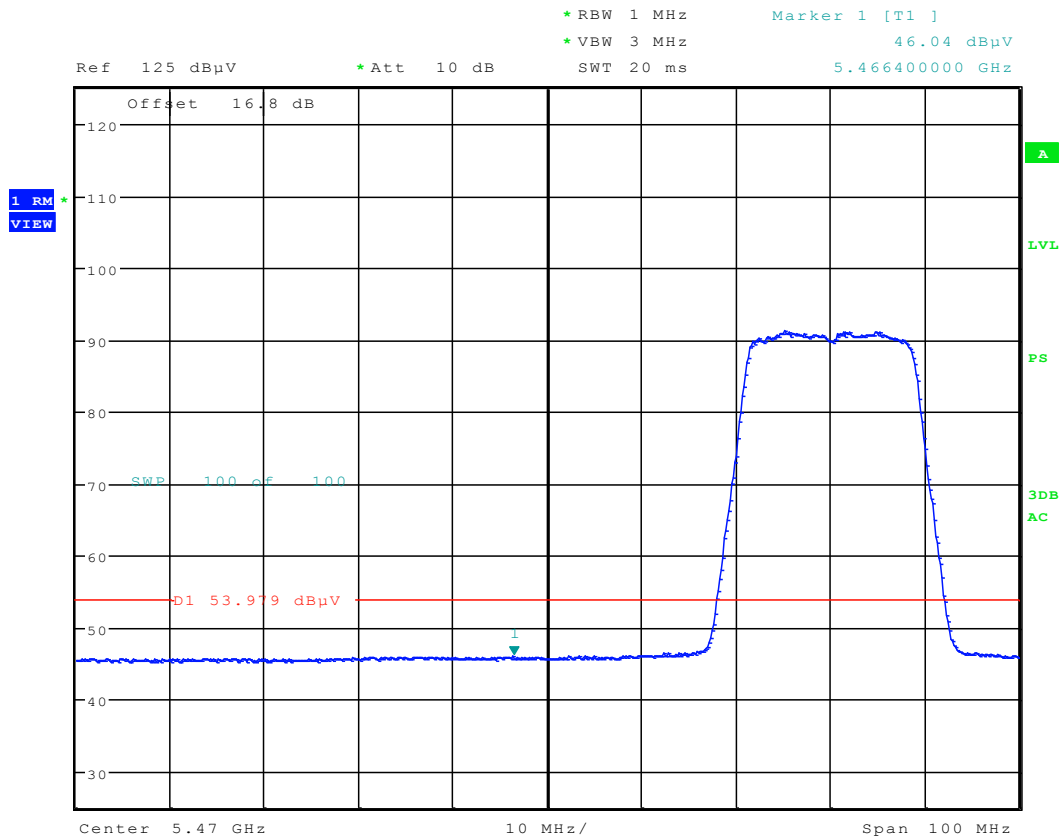


Plot 6-172. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 161 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

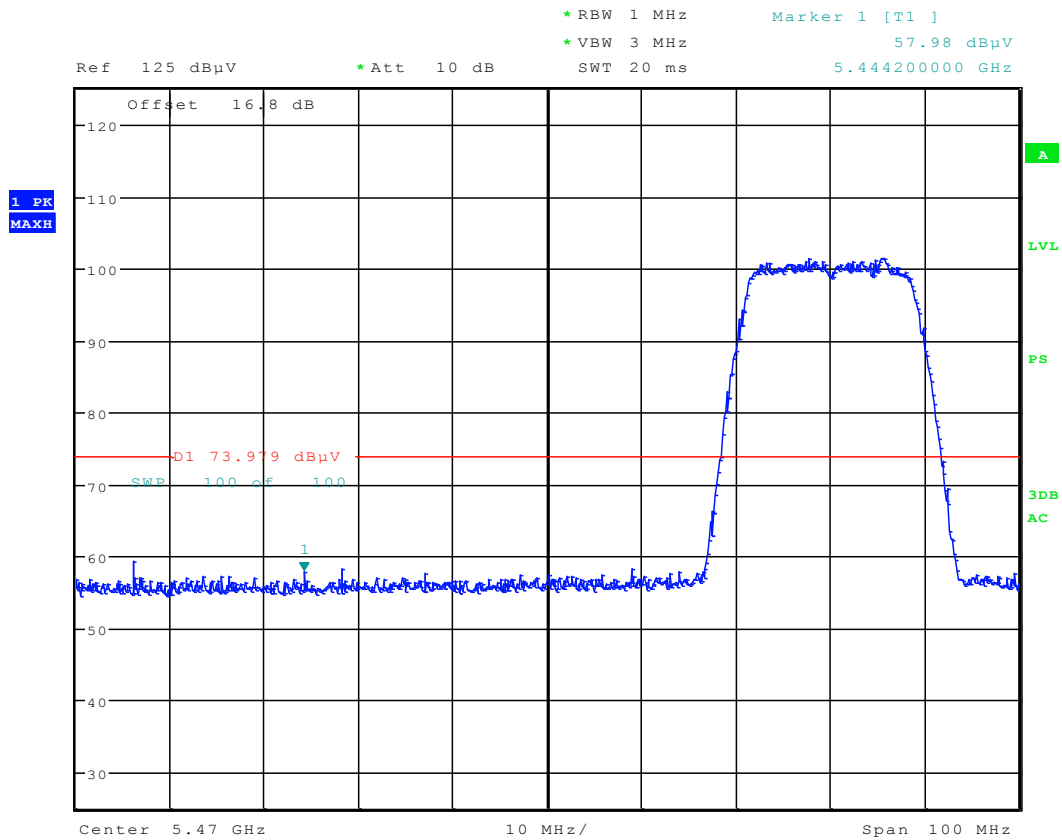

Plot 6-173. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 162 of 183

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5700MHz

Channel: 140

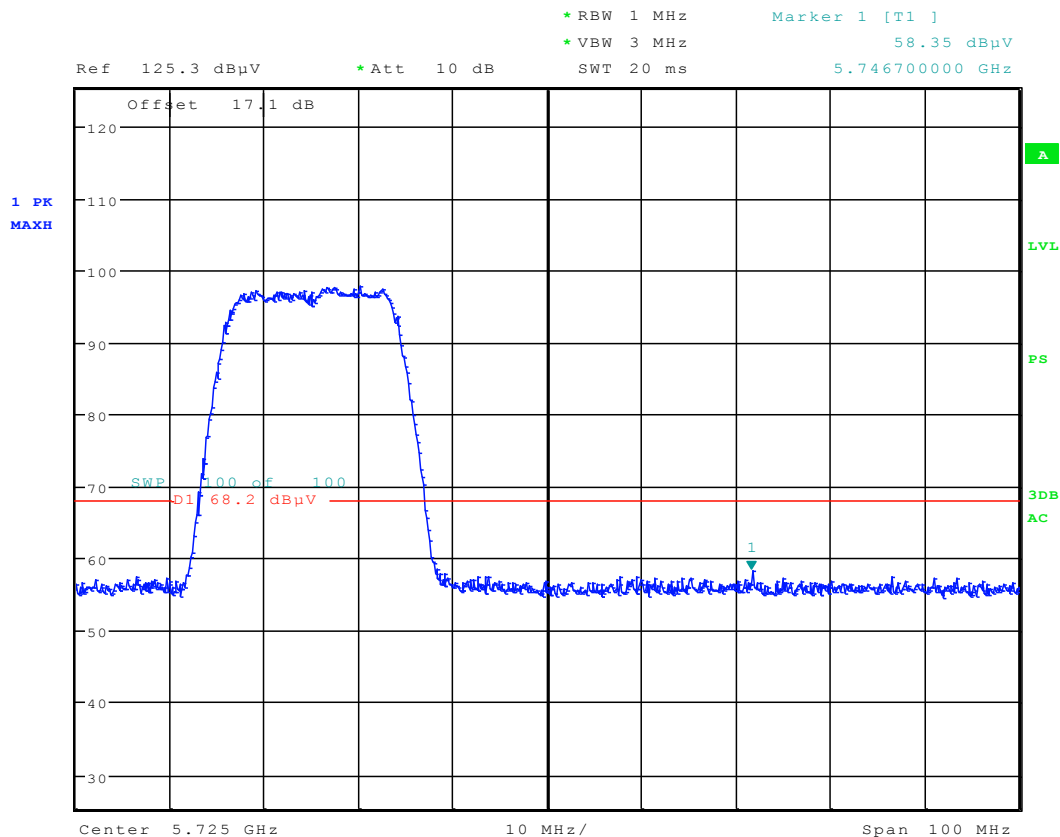

Plot 6-174. Radiated Upper Band Edge Plot (Peak - UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 163 of 183

Radiated Band Edge Measurements (40MHz BW)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5190MHz

Channel: 38

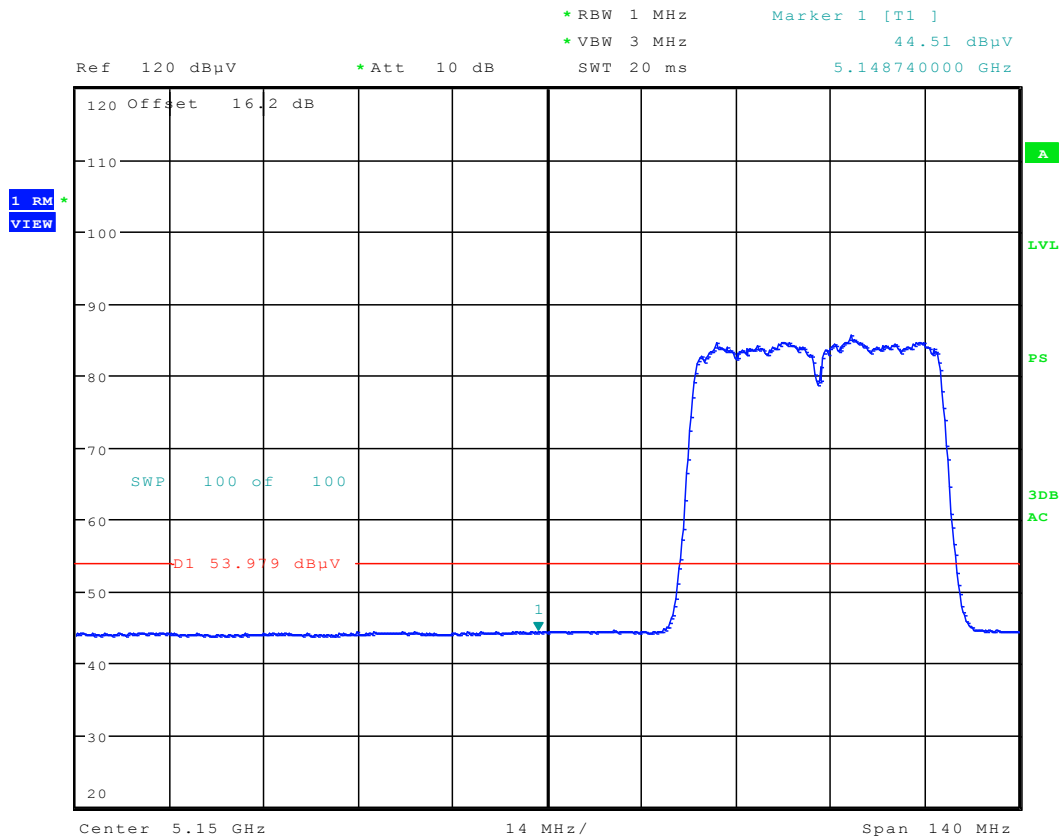


Plot 6-175. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 164 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

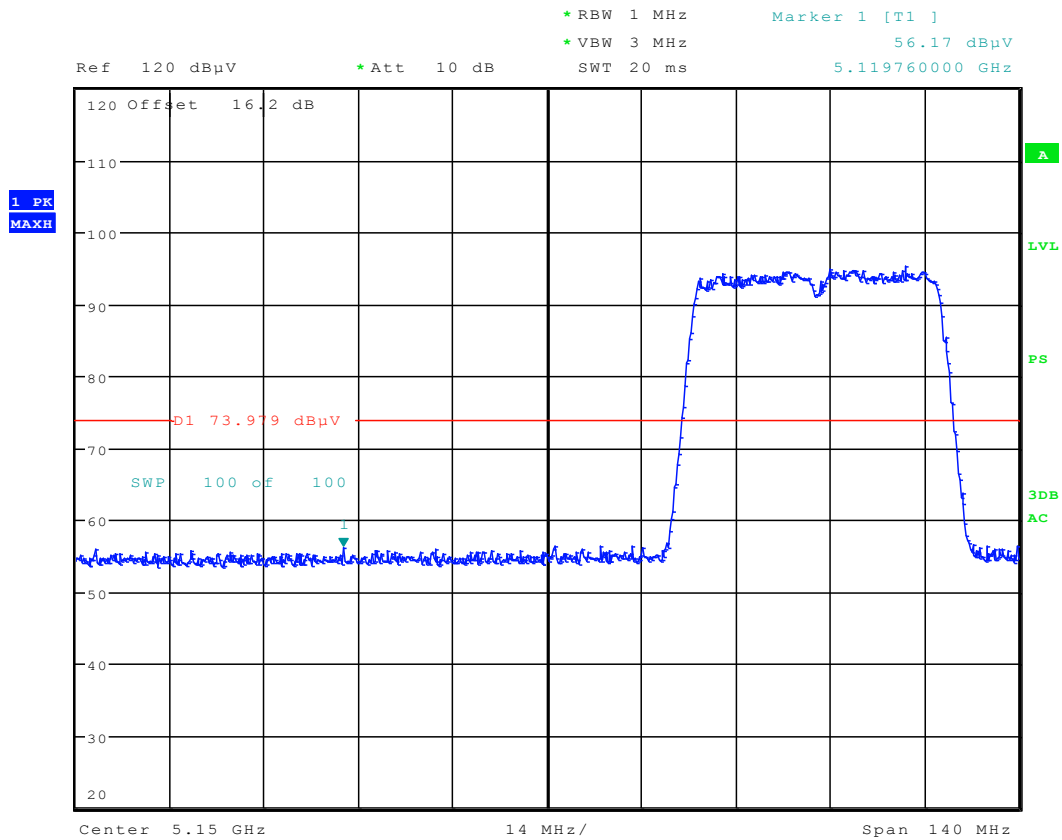

Plot 6-176. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 165 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62

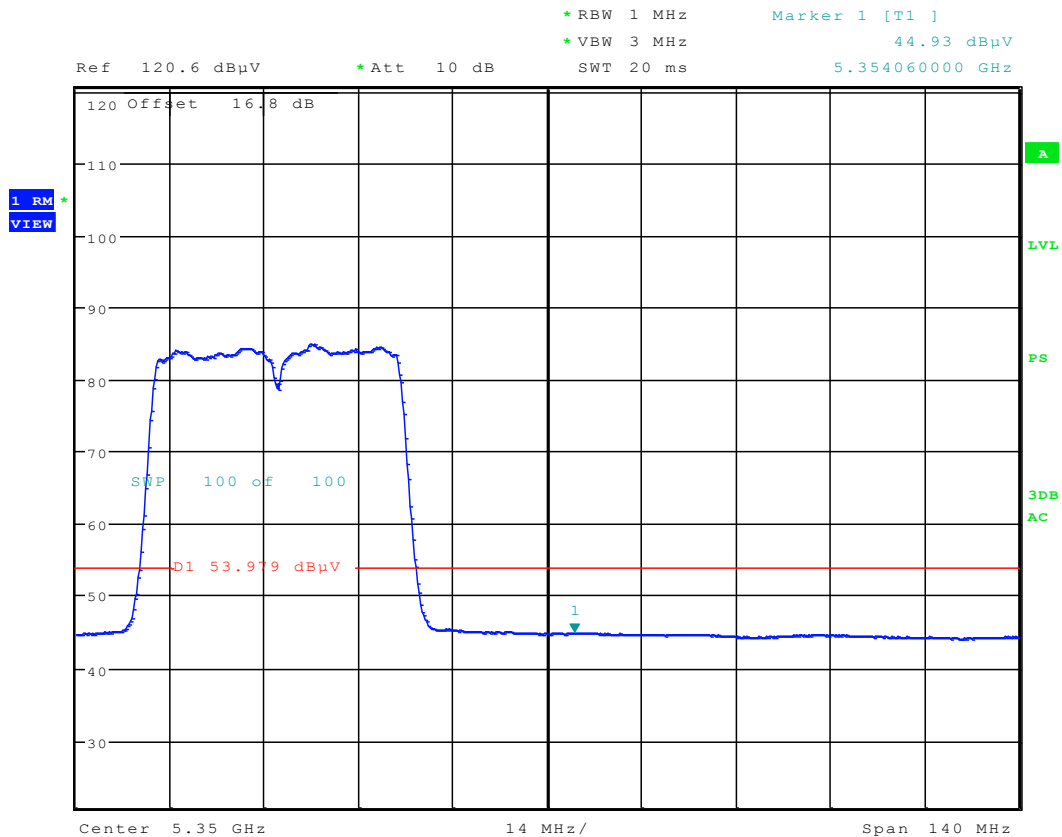


Plot 6-177. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 166 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

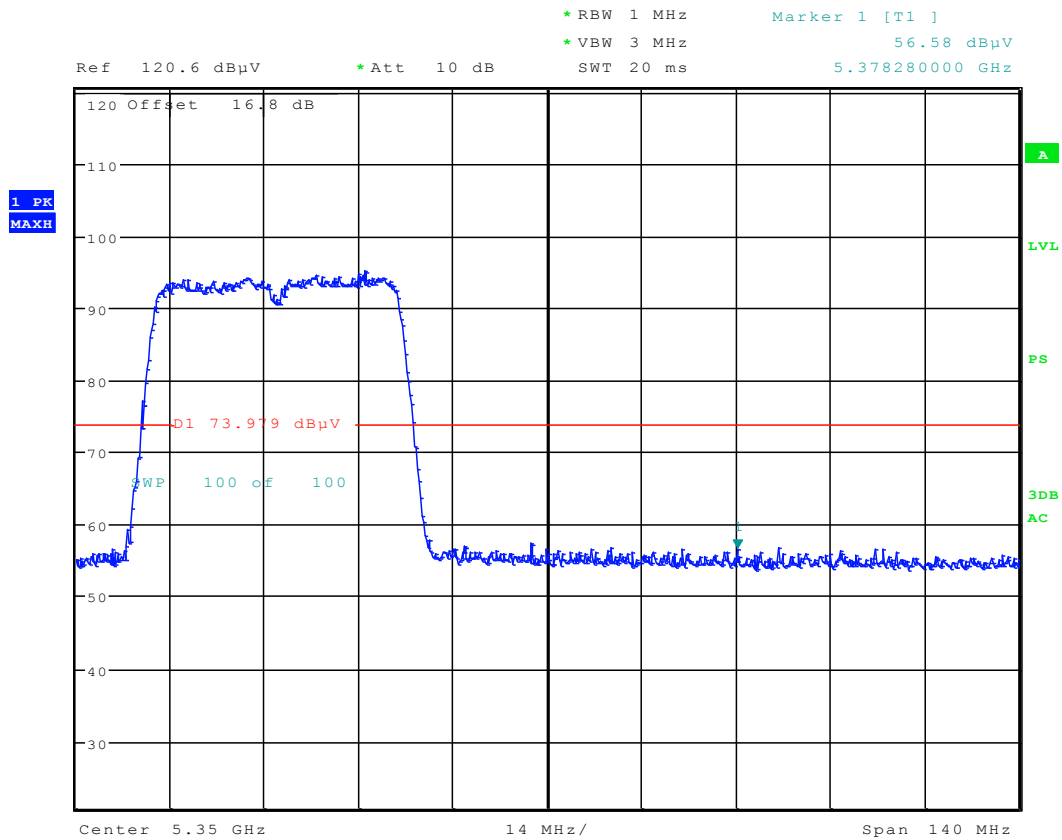

Plot 6-178. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 167 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5510MHz

Channel: 102

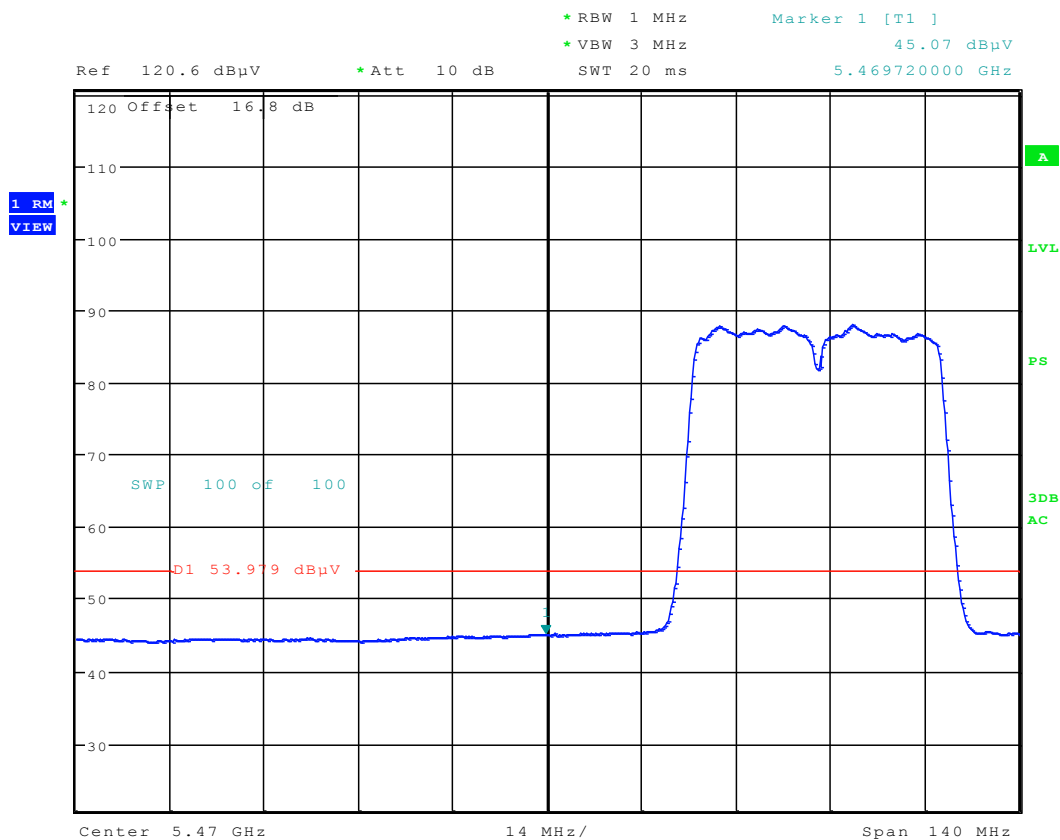


Plot 6-179. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 168 of 183

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

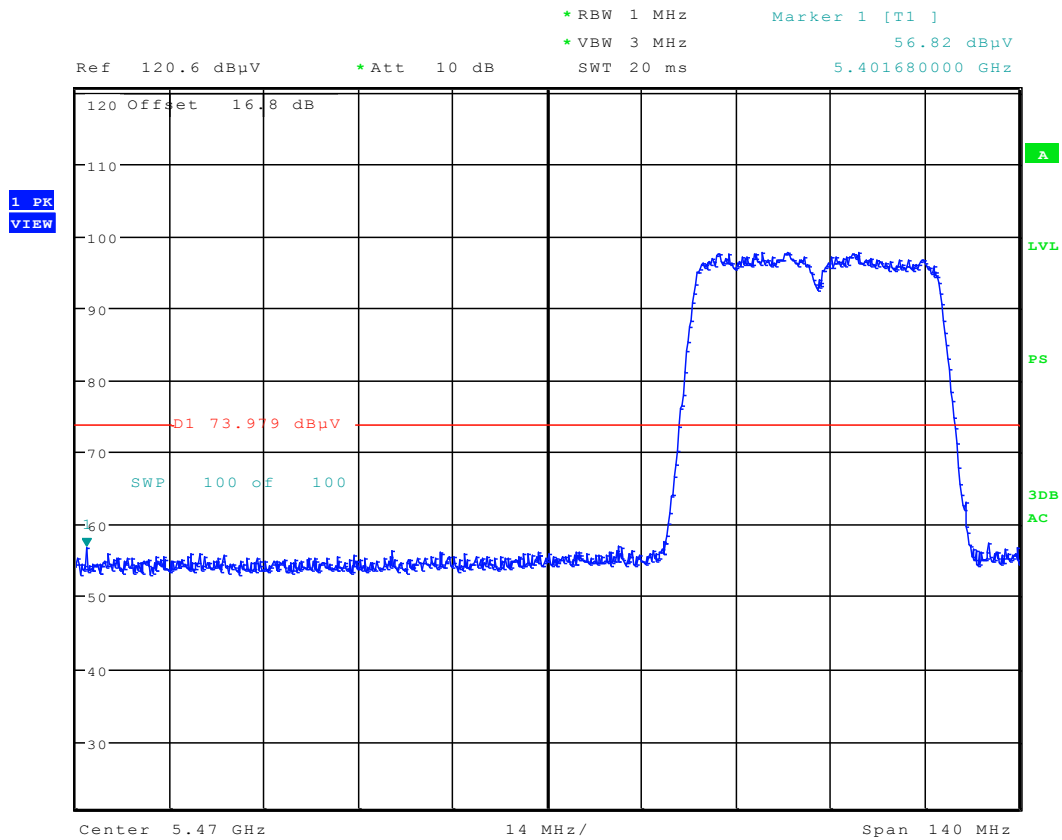

Plot 6-180. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 169 of 183

Radiated Band Edge Measurements (80MHz BW)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11n (80MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5210MHz

Channel: 42

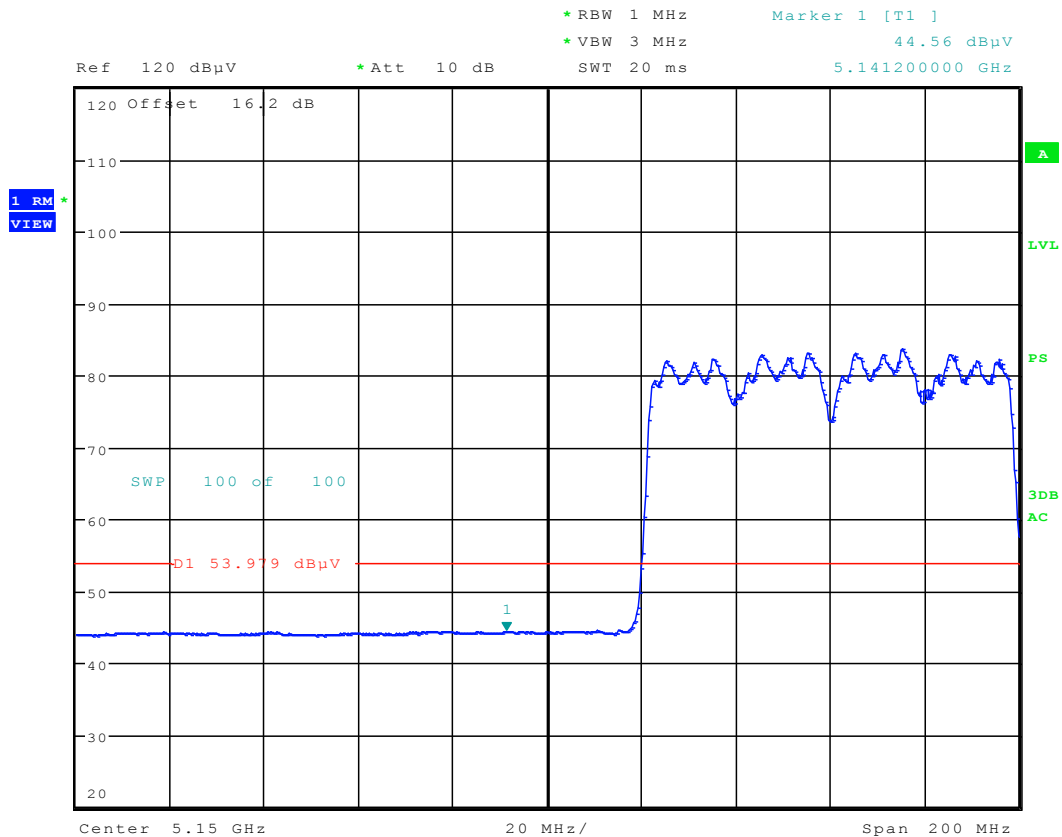


Plot 6-182. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 171 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

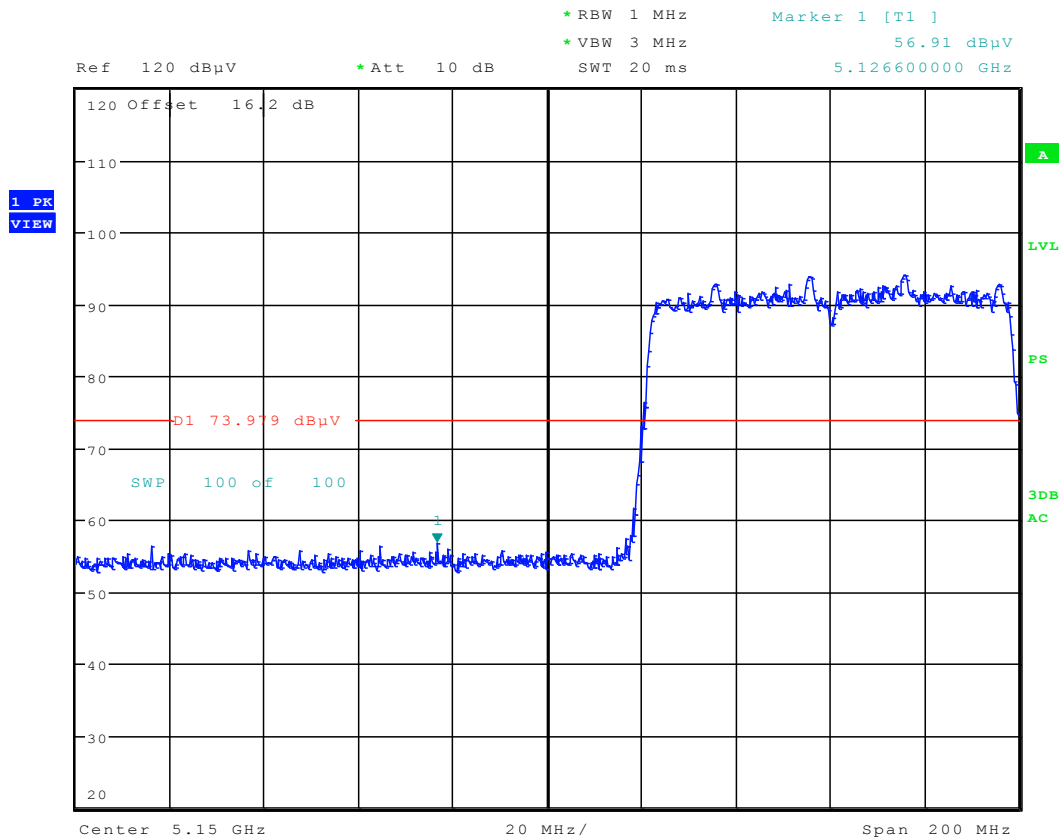

Plot 6-183. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 172 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz

Channel: 58

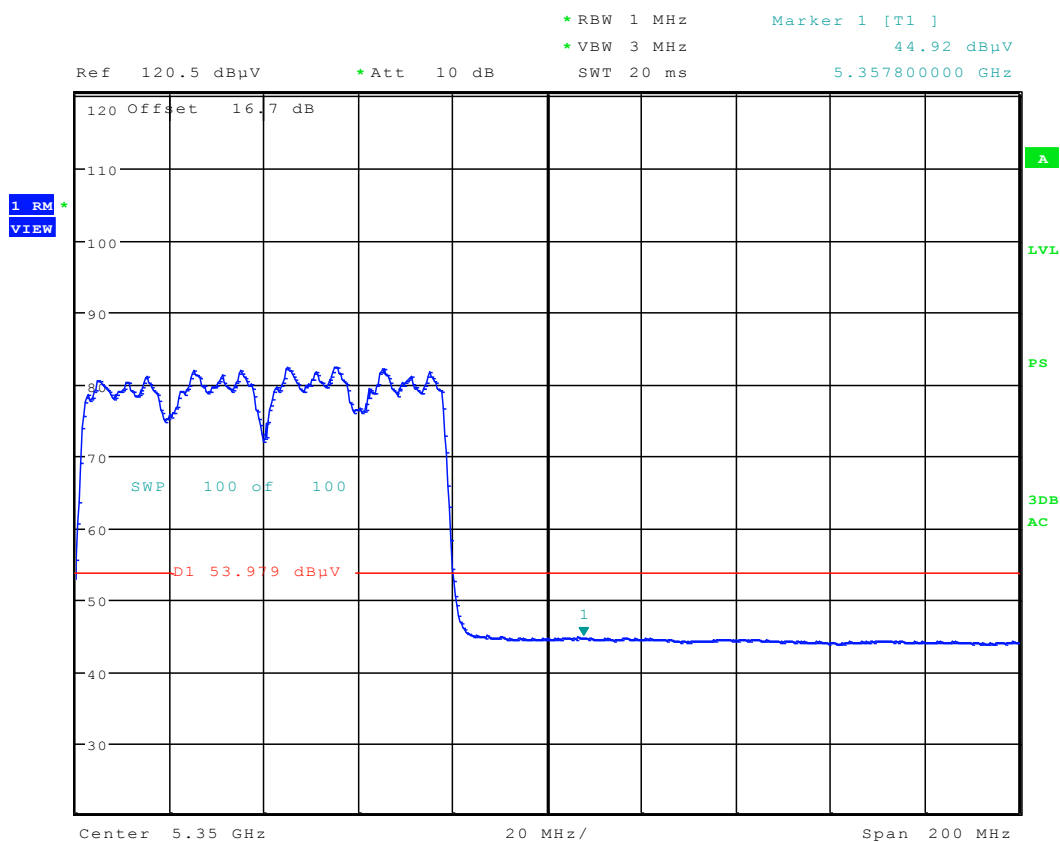


Plot 6-184. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 173 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

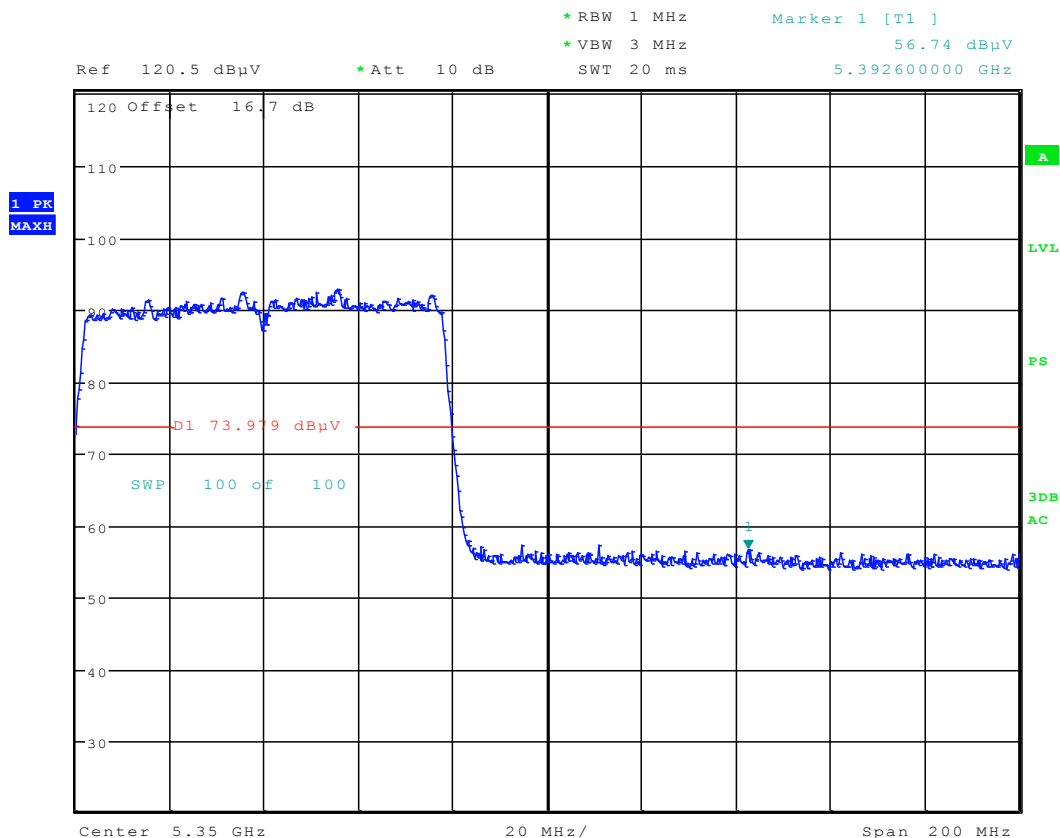

Plot 6-185. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 174 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5530MHz


Channel: 106

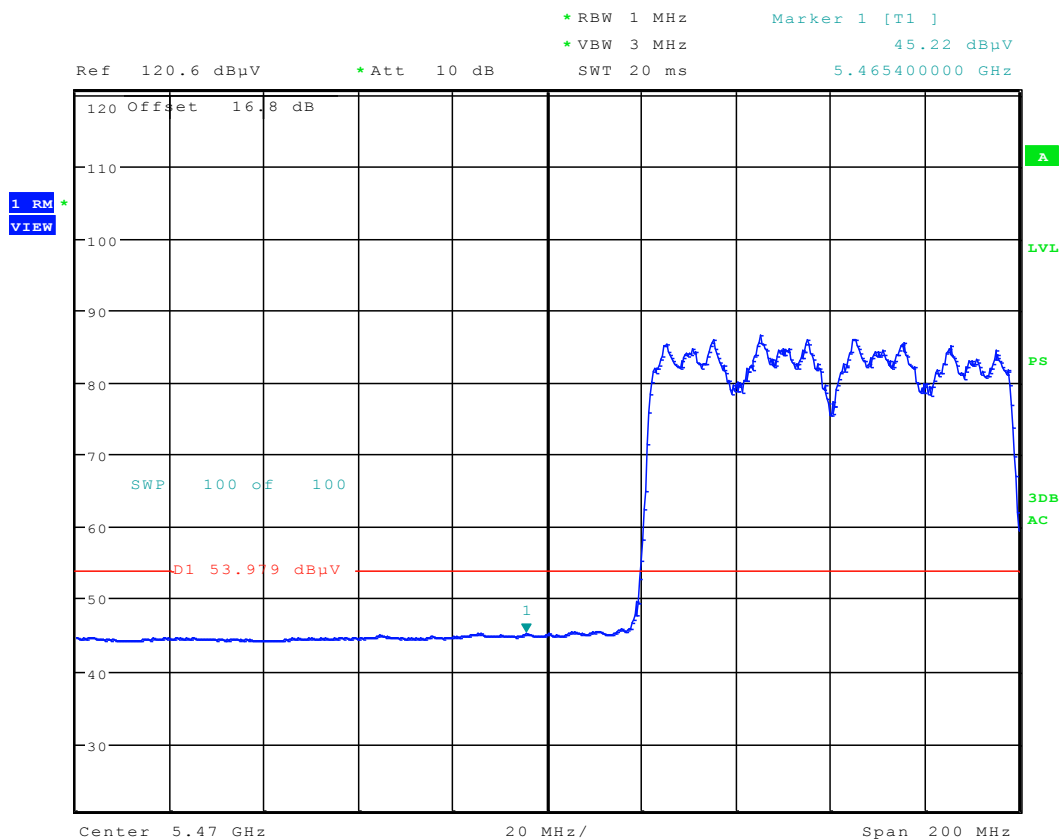

Plot 6-186. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 175 of 183

Radiated Band Edge Measurements (80MHz BW) (Cont'd) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

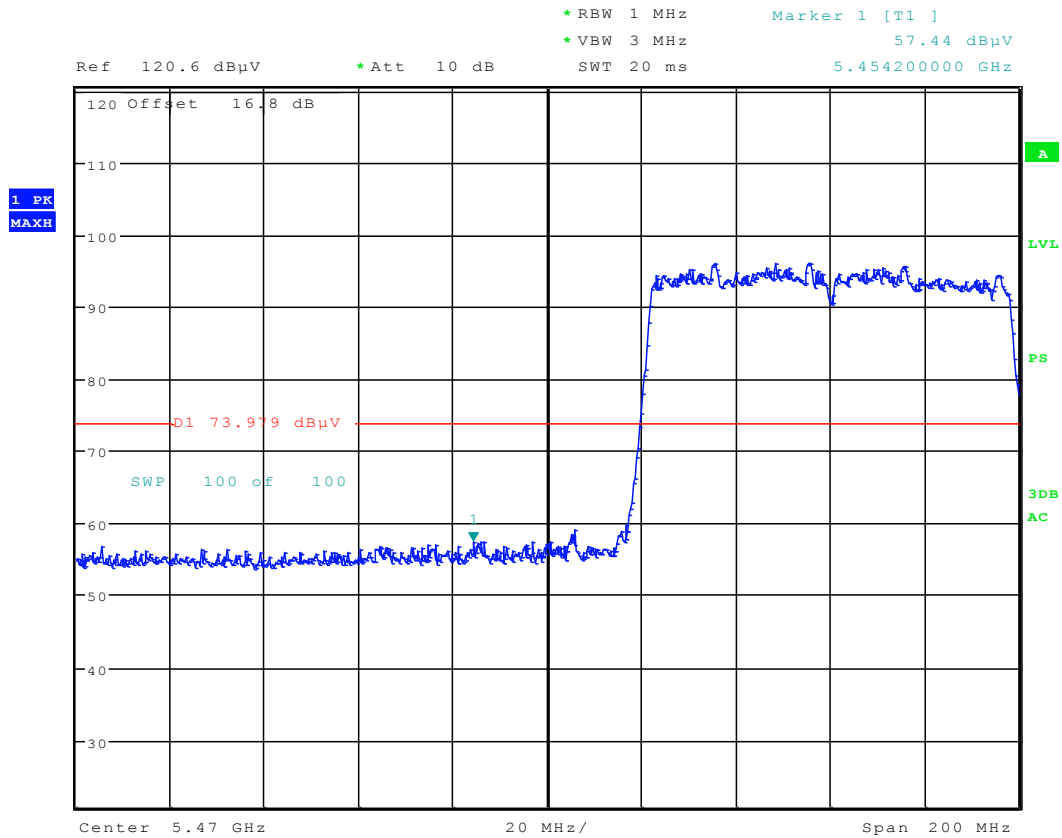


Plot 6-187. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 176 of 183

6.11 Line-Conducted Test Data

§15.207; RSS-Gen [7.2.2]

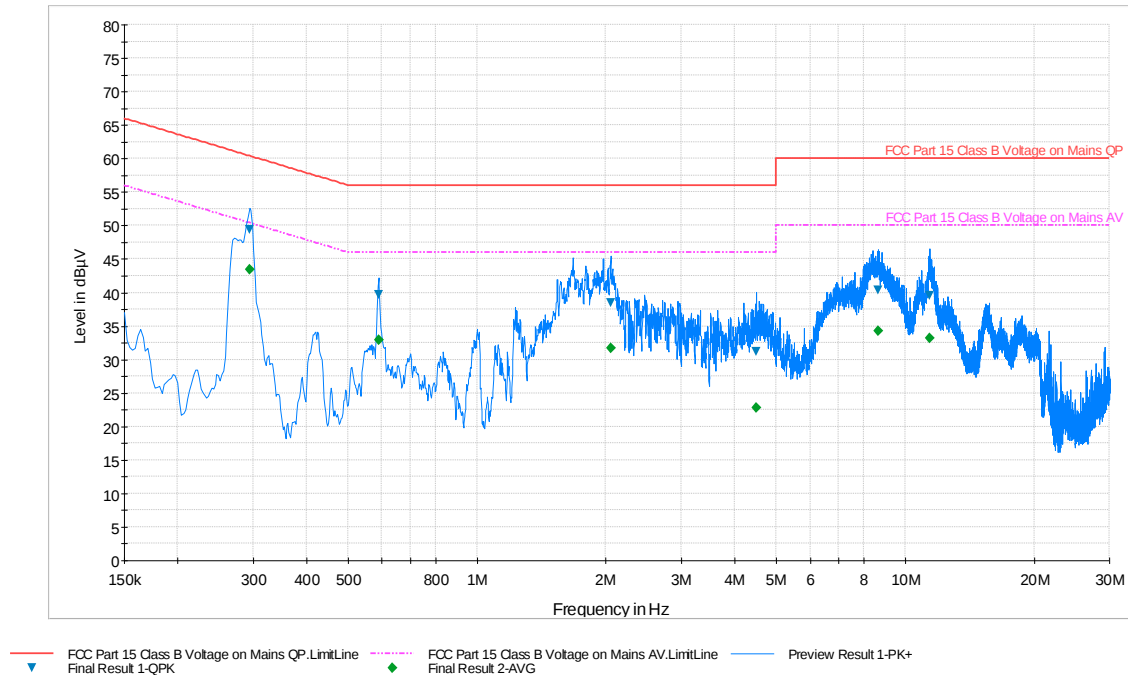

Plot 6-188. Line Conducted Plot with 802.11a UNII Band 1 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.294	L1	0.1	49.40	60.40	11.00	43.40	50.40	7.00
0.589	L1	0.0	39.70	56.00	16.30	32.90	46.00	13.10
2.054	L1	0.2	38.50	56.00	17.50	31.70	46.00	14.30
4.490	L1	0.3	31.20	56.00	24.80	22.70	46.00	23.30
8.655	L1	0.5	40.30	60.00	19.70	34.30	50.00	15.70
11.432	L1	0.6	39.60	60.00	20.40	33.10	50.00	16.90

Table 6-60. Line Conducted Data with 802.11a UNII Band 1 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 177 of 183

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

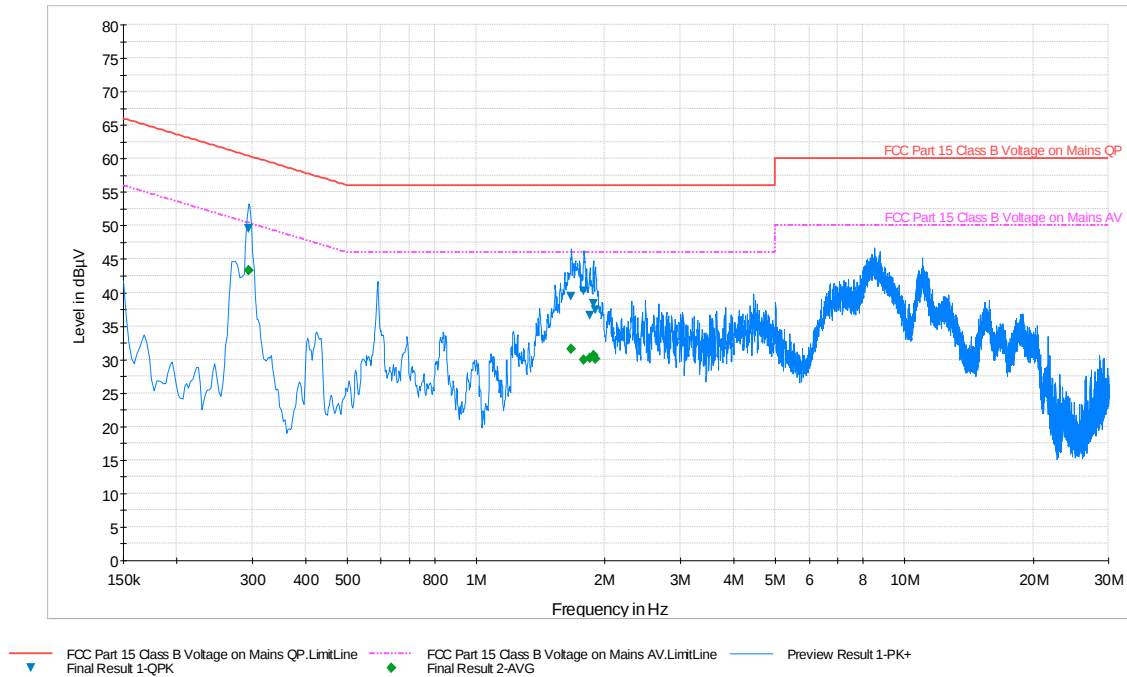

Plot 6-189. Line Conducted Plot with 802.11a UNII Band 1 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
0.294	N	0.1	49.50	60.40	10.90	43.30	50.40	7.10
1.669	N	0.2	39.50	56.00	16.50	31.60	46.00	14.40
1.784	N	0.2	40.20	56.00	15.80	29.90	46.00	16.10
1.847	N	0.2	36.60	56.00	19.40	30.20	46.00	15.80
1.880	N	0.2	38.30	56.00	17.70	30.70	46.00	15.30
1.901	N	0.2	37.40	56.00	18.60	30.10	46.00	15.90

Table 6-61. Line Conducted Data with 802.11a UNII Band 1 (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 178 of 183

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

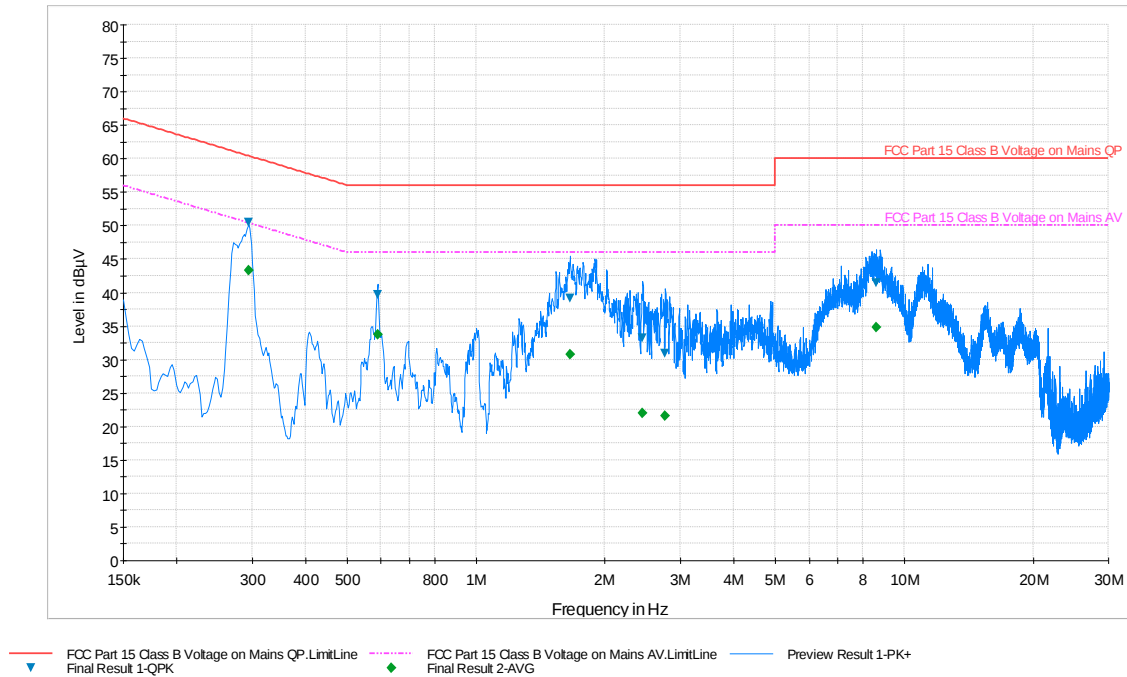

Plot 6-190. Line Conducted Plot with 802.11a UNII Band 2A (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
0.294	L1	0.1	50.50	60.40	9.90	43.30	50.40	7.10
0.589	L1	0.0	39.70	56.00	16.30	33.70	46.00	12.30
1.660	L1	0.2	39.10	56.00	16.90	30.70	46.00	15.30
2.454	L1	0.2	33.20	56.00	22.80	21.90	46.00	24.10
2.769	L1	0.2	30.90	56.00	25.10	21.60	46.00	24.40
8.594	L1	0.5	41.40	60.00	18.60	34.80	50.00	15.20

Table 6-62. Line Conducted Data with 802.11a UNII Band 2A (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 179 of 183

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

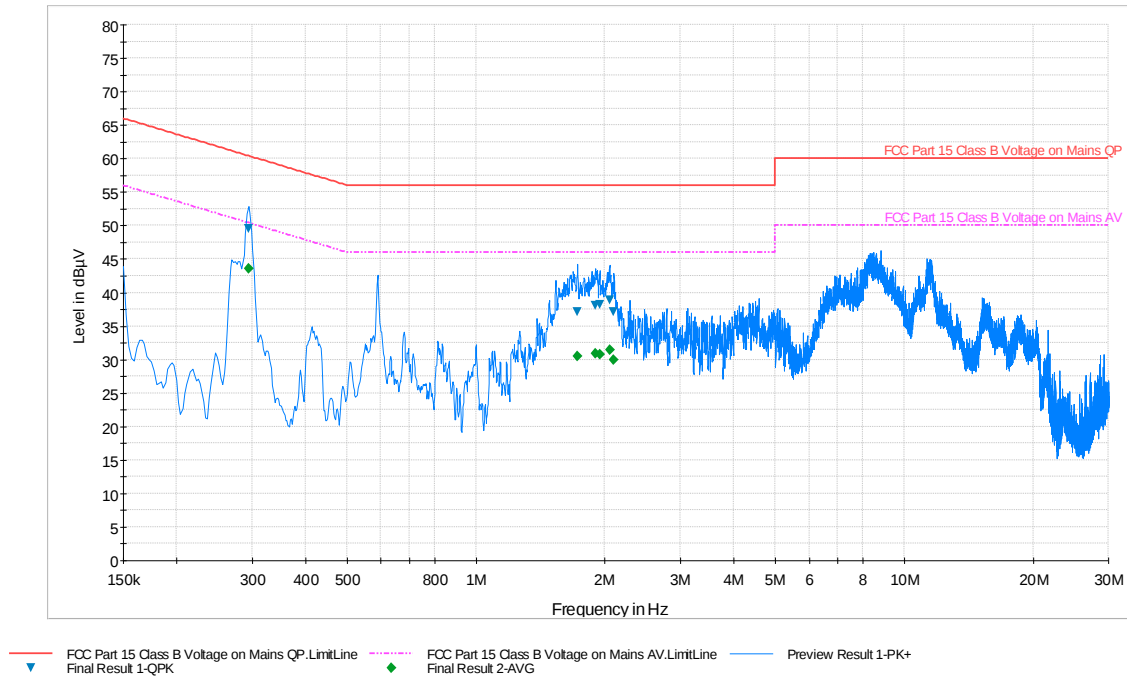

Plot 6-191. Line Conducted Plot with 802.11a UNII Band 2A (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
0.294	N	0.1	49.50	60.40	10.90	43.50	50.40	6.90
1.727	N	0.2	37.00	56.00	19.00	30.50	46.00	15.50
1.901	N	0.2	38.10	56.00	17.90	31.00	46.00	15.00
1.946	N	0.2	38.20	56.00	17.80	30.80	46.00	15.20
2.051	N	0.2	38.90	56.00	17.10	31.50	46.00	14.50
2.101	N	0.2	37.20	56.00	18.80	29.90	46.00	16.10

Table 6-63. Line Conducted Data with 802.11a UNII Band 2A (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 180 of 183

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

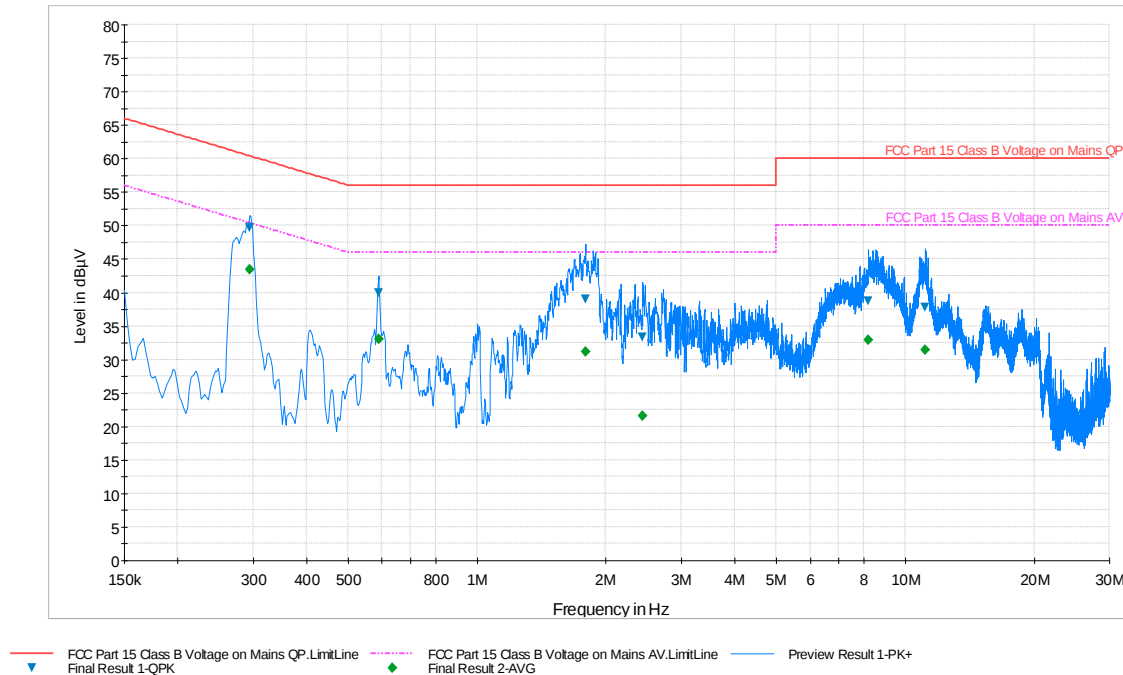

Plot 6-192. Line Conducted Plot with 802.11a UNII Band 2C (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
0.294	L1	0.1	49.60	60.40	10.80	43.40	50.40	7.00
0.589	L1	0.0	40.00	56.00	16.00	33.00	46.00	13.00
1.793	L1	0.2	39.00	56.00	17.00	31.10	46.00	14.90
2.434	L1	0.2	33.30	56.00	22.70	21.60	46.00	24.40
8.198	L1	0.5	38.80	60.00	21.20	32.90	50.00	17.10
11.148	L1	0.6	37.70	60.00	22.30	31.50	50.00	18.50

Table 6-64. Line Conducted Plot with 802.11a UNII Band 2C (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 181 of 183

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

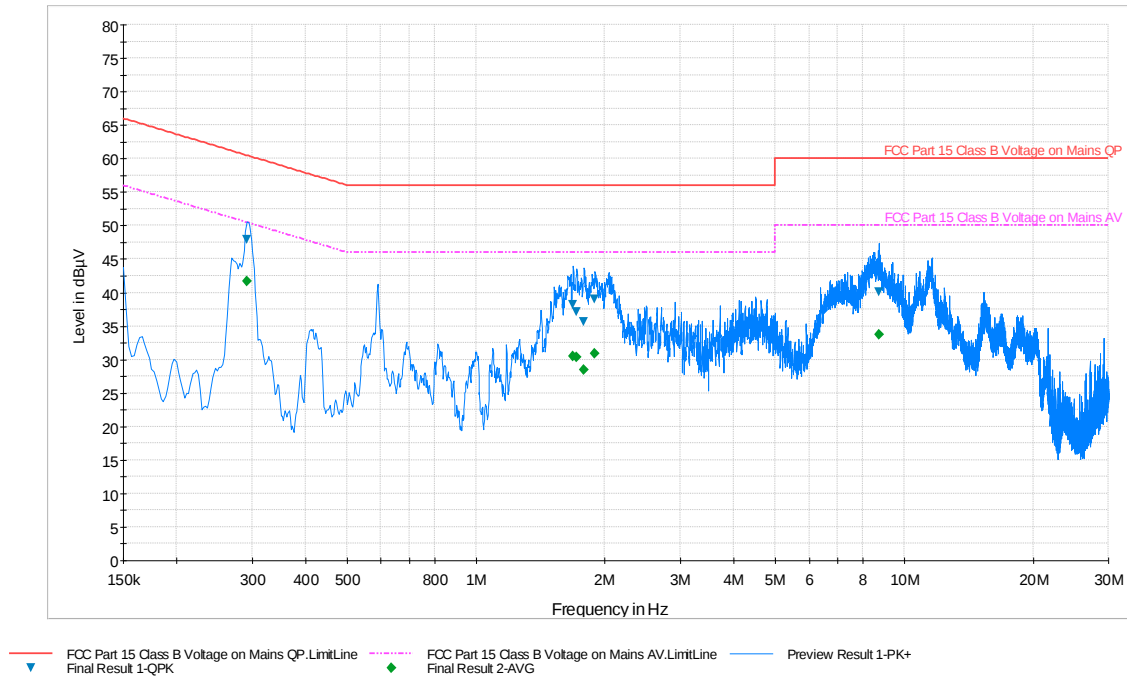

Plot 6-193. Line Conducted Plot with 802.11a UNII Band 2C (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
0.292	N	0.1	47.90	60.50	12.60	41.60	50.50	8.90
1.687	N	0.2	38.20	56.00	17.80	30.50	46.00	15.50
1.721	N	0.2	37.10	56.00	18.90	30.40	46.00	15.60
1.788	N	0.2	35.60	56.00	20.40	28.40	46.00	17.60
1.894	N	0.2	39.00	56.00	17.00	30.90	46.00	15.10
8.725	N	0.5	40.00	60.00	20.00	33.70	50.00	16.30

Table 6-65. Line Conducted Data with 802.11a UNII Band 2C (N)

Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMT900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 182 of 183

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Tablet FCC ID: A3LSMT900** is in compliance with Part 15E of the FCC Rules and RSS-210 of the Industry Canada Rules.

FCC ID: A3LSMT900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312172415.A3L	Test Dates: 12/24 - 1/6/2014	EUT Type: Portable Tablet		Page 183 of 183