

FCC BT REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 16677, Rep. of Korea

Date of Issue:
July 13, 2023

Test Site/Location:
74, Seoicheon-ro 578 beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2307-FC017

FCC ID: A3LSMX616B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model: SM-X616B

Additional Model: -

EUT Type: Tablet

Max. RF Output Power: 13.513 dBm (22.45 mW)

Frequency Range: 2402 MHz– 2480 MHz (Bluetooth)

Modulation type GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)

FCC Classification: FCC Part 15 Spread Spectrum Transmitter (DSS)

FCC Rule Part(s): Part 15 subpart C 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance

Report No.: HCT-RF-2307-FC017

REVIEWED BY



Report prepared by : Chang Hee Hwang
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2307-FC017	July 13, 2023	- First Approval Report

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. Requirements for Bluetooth transmitter(15.247)	7
3. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION.....	9
5. FACILITIES AND ACCREDITATIONS	9
FACILITIES	9
EQUIPMENT	9
6. ANTENNA REQUIREMENTS	9
7. MEASUREMENT UNCERTAINTY	10
8. DESCRIPTION OF TESTS.....	11
9. SUMMARY OF TEST RESULTS	28
10. TEST RESULT	29
10.1 PEAK POWER	29
10.2 BAND EDGES.....	32
10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW).....	35
10.4 NUMBER OF HOPPING FREQUENCY	40
10.5 TIME OF OCCUPANCY (DWELL TIME)	42
10.6 SPURIOUS EMISSIONS.....	46
10.6.1 CONDUCTED SPURIOUS EMISSIONS	46
10.6.2 RADIATED SPURIOUS EMISSIONS.....	49
10.6.3 RADIATED RESTRICTED BAND EDGES	60
10.7 POWERLINE CONDUCTED EMISSIONS	64
11. LIST OF TEST EQUIPMENT	65
12. ANNEX A_ TEST SETUP PHOTO.....	67

1. EUT DESCRIPTION

Model	SM-X616B
Additional Model	-
EUT Type	Tablet
Power Supply	DC 3.85 V
Frequency Range	2 402 MHz ~ 2 480 MHz
Max. RF Output Power(Peak)	13.513 dBm (22.45 mW)
BT Operating Mode	Normal, EDR, AFH
Modulation Type	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
Modulation Technique	FHSS
Number of Channels	79 Channels, Minimum 20 Channels(AFH)
Date(s) of Tests	May 24, 2023 ~ July 13, 2023
Serial number	Radiated: R32W500WXYD Conducted : R32W500WYVV

ANTENNA CONFIGURATIONS

1. The device employs MIMO technology. Below are the possible configurations

Configurations	SISO		Dual BT
	Ant1	Ant2	Ant1 & Ant2
Bluetooth	O	X	X

Note:

- 1) O = Support, X = Not Support
- 2) SISO = Single Input Single Output
- 3) Dual BT = Single Output 1& 2

2. This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the BT and 5 GHz bands simultaneously on each antenna.

DBS Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	Bluetooth Ant.1	Test Case
Bluetooth ANT.1 + 5 GHz WiFi ANT.2	-	-	-	on	on	Scenario1

2. Requirements for Bluetooth transmitter(15.247)

This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:

- 1) This system is hopping pseudo-randomly.
- 2) Each frequency is used equally on the average by each transmitter.
- 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
- 4) The receiver shifts frequencies in synchronization with the transmitted signals.
 - 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
 - 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device (ANSI C63.10-2013, KDB 558074) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector and add the D.C.C.F calculations.

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

8. DESCRIPTION OF TESTS


8.1. Conducted Maximum Peak Output Power

Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 W.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Test Configuration

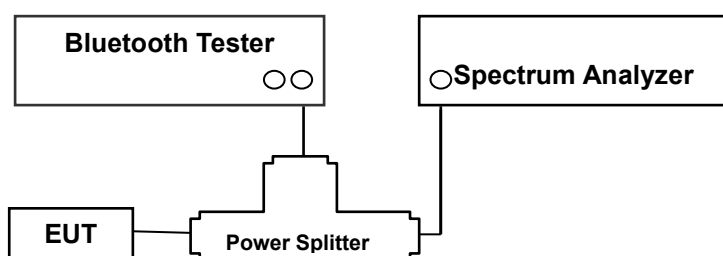

Test Procedure

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013& Procedure 10(b)(6)(i) in KDB 558074 v05r02)


- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW $\geq$ RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

8.2. Conducted Band Edge(Out of Band Emissions)

Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

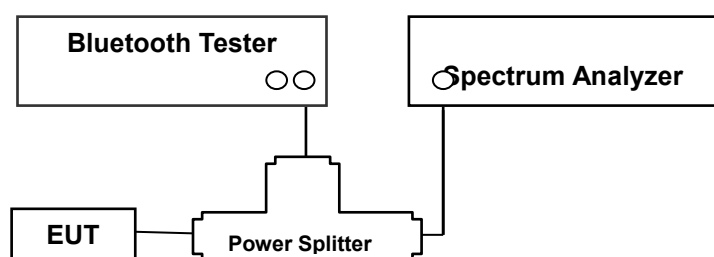

Test Procedure

This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013& Procedure 8.5 and 8.6 in KDB 558074 v05r02)


- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

8.3. Frequency Separation & 20 dB Bandwidth

Limit

According to §15.247(a)(1), Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Configuration

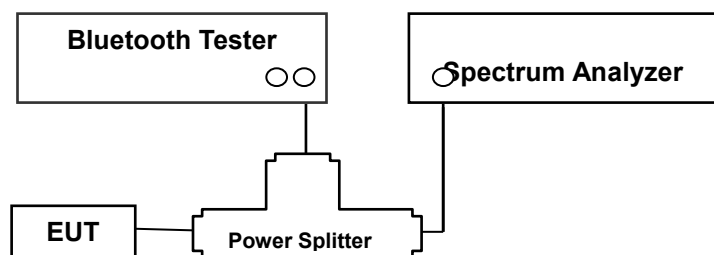

Test Procedure(Frequency Separation)

The Channel Separation test is performed with hopping on.

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013 & Procedure 10(b)(6)(iii) in KDB 558074 v05r02)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW $\geq$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.
- 8) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

Test Procedure (20 dB Bandwidth)

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (6.9.2 in ANSI 63.10-2013)


- 1) Span: Set between two times and five times the OBW
- 2) RBW: 1 % to 5 % of the OBW.
- 3) VBW $\geq 3 \times$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

8.4. Number of Hopping Frequencies

Limit

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration

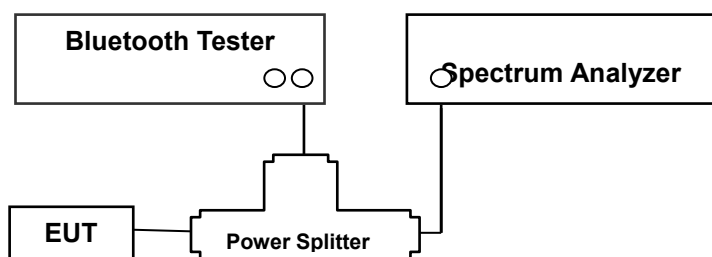

Test Procedure

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013 & Procedure 10(b)(4) in KDB 558074 v05r02)


- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW $\geq$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

8.5. Time of Occupancy

Limit

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration

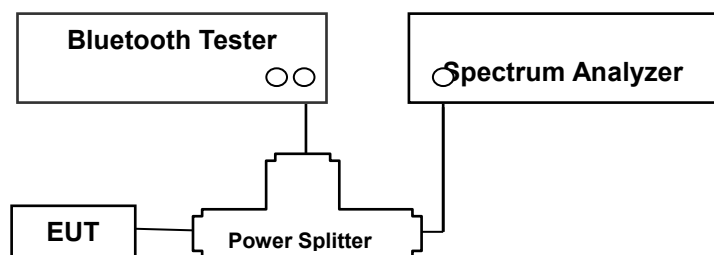

Test Procedure

This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013& Procedure 10(b)(6)(iv) in KDB 558074 v05r02)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

Sample Calculation

The following calculation process is not relevant to our measurement results. It is just an example.

(1) Non-AFH Mode

- DH 5 (GFSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27 \text{ (ms)}$
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27 \text{ (ms)}$
- 3-DH 5 (8DPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27 \text{ (ms)}$

(2) AFH Mode

- DH 5 (GFSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13 \text{ (ms)}$
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13 \text{ (ms)}$
- 3-DH 5 (8DPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13 \text{ (ms)}$

Note :

DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving.

Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.667 times of appearance.

Each tx-time per appearance of DH5 is 2.890 ms.


Dwell time = Tx-time x 106.667 = 308.27 (ms)

8.6. Conducted Spurious Emissions

Limit

Conducted > 20 dBc

Test Configuration

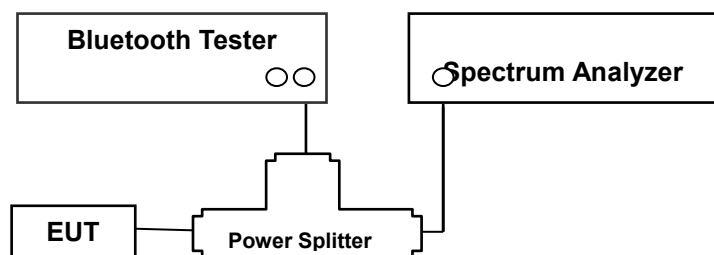

Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013& Procedure 8.5 and 8.6 in KDB 558074 v05r02)

- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

Factors for frequency

Freq(MHz)	Factor(dB)
30	6.14
100	6.22
200	6.30
300	6.40
400	6.46
500	6.49
600	6.49
700	6.53
800	6.55
900	6.59
1000	6.61
2000	6.88
2400	6.89
2500	6.90
3000	7.09
4000	7.25
5000	7.44
6000	7.51
7000	7.66
8000	7.78
9000	7.90
10000	8.04
11000	8.12
12000	8.28
13000	8.47
14000	8.41
15000	8.51
16000	8.56
17000	8.63
18000	8.75
19000	8.81
20000	8.89
21000	9.18
22000	9.24
23000	9.27
24000	9.35
25000	9.48
26000	9.58

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Cable loss(2 EA) + Splitter loss(6 dB)

3. EUT cable loss = 0.68 dB

4. Total Port offset = 7.58 dB


8.7. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

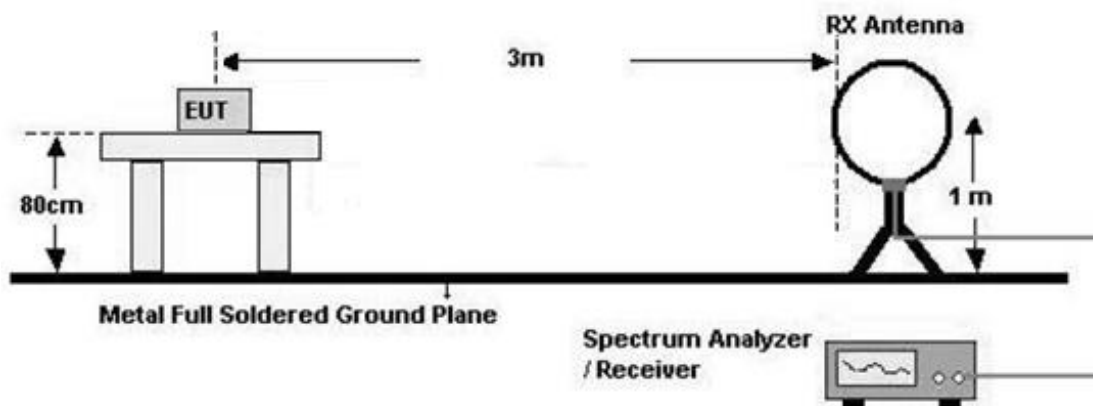

30 MHz - 1 GHz

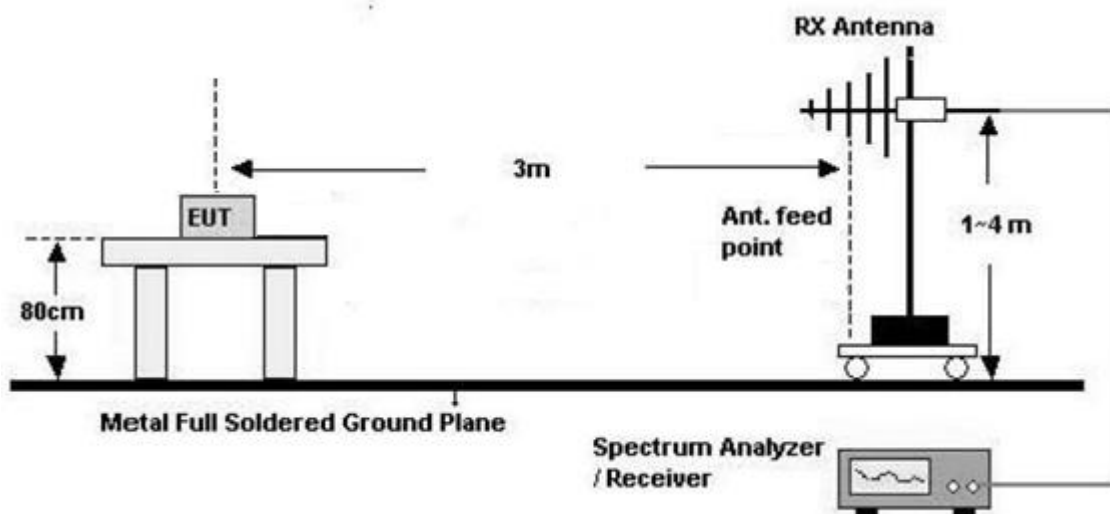

Above 1 GHz

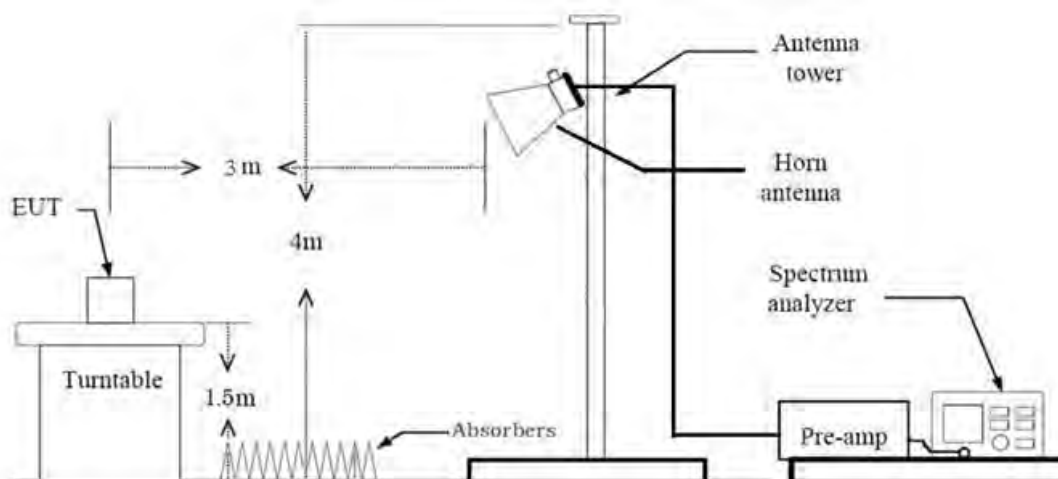

Test Procedure of Radiated spurious emissions(Below30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW $\geq 3 \times$ RBW

9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※ In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond

the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average):

- Average value of pulsed emissions
- Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determine from the peak field strength after correcting for the worst-case duty cycle as described in Number.14 (On Page. 23)

◆ Duty Cycle Correction(AFH) = $20\log(\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -24.7314 \text{ dB}$

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance}) \text{ (dB)}$

12. Total(Measurement Type : Peak)

= Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – Amp Gain(A.G)

Total(Measurement Type : Average)

= Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) - Amp Gain(A.G)
+ D.C.C.F(AFH)

Test Procedure of Radiated Restricted Band Edge

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - Average value of pulsed emissions
 - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determine from the peak field strength after correcting for the worst-case duty cycle as described in Number.14 (On Page. 23)
- ◆ Duty Cycle Correction(AFH) = $20\log (\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -24.7314 \text{ dB}$
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log (\text{test distance} / \text{specific distance}) \text{ (dB)}$
- 11.Total
 - (1)Measurement(Peak)
Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
 - (2)Measurement(Avg)
Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
+ D.C.C.F(AFH)

8.8. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

8.9. Worst case configuration and mode

Radiated test

- All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone etc)
 - Worstcase : Stand alone
- EUT Axis
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : X
- All data rate of operation were investigated and the test results are worst case in highest datarate of each mode.
 - GFSK : DH5
 - $\pi/4$ DQPSK : 2-DH5
 - 8DPSK : 3-DH5
- All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

Radiated test(DBS)

- All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, Keyboard, etc)
 - Worstcase : Stand alone
- EUT Axis - Radiated Spurious Emissions : Y
- All of DBS Scenario were investigated and the worst case configuration results are reported.

DBS Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	Bluetooth Ant.1	Test Case
Bluetooth ANT.1 + 5 GHz WiFi ANT.2		-	-	on	on	Scenario1

- The DBS mode test investigated both intermodulation and radiated spurious emissions.
And the worst results were reported.
 - Worst result: Radiated spurious emissions
 - Intermodulation: No signals are generated.
 - Radiated spurious emissions: cf. Section 10.8

- The following tables show the worst case configurations determined during testing.

(Worst case: The lowest margin condition the channels and modes were selected for test.)

DBS Scenario 1	Description	Bluetooth Emission	5 GHz Emission
Bluetooth ANT.1 + 5 GHz WiFi ANT.2	Antenna	ANT1	ANT2
	Channel	78	165
	Data Rate	1 Mbps	6 Mbps
	Mode	GFSK	802.11a

Note : UNII DBS data refer to [UNII] Test Report.

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone+ External accessories(Earphone,etc)+Travel Adapter

Stand alone + Travel Adapter

- Worstcase : Stand alone + Travel Adapter

Conducted test

1. The EUT was configured with data rate of highest power.

- GFSK : DH5

- $\pi/4$ DQPSK : 2-DH5

- 8DPSK : 3-DH5

2. AFH & Non-AFH were tested and the worst case results are reported.

(Worst case : Non-AFH)

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§15.247(a)(1)	N/A	Conducted	PASS
Occupied Bandwidth	N/A	N/A		N/A
Conducted Maximum Peak Output Power	§15.247(b)(1)	<0.125 W		PASS
Carrier Frequency Separation	§15.247(a)(1)	>25 kHz or >2/3 of the 20 dB BW		PASS
Number of Hopping Frequencies	§15.247(a)(1)(iii)	≥ 15		PASS
Time of Occupancy	§15.247(a)(1)(iii)	<400 ms		PASS
Conducted Spurious Emissions	§15.247(d)	> 20 dB for all out-of band emissions		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§15.207(a)	cf. Section 8.8		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 8.7	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.7		PASS

Note: Average Power data refer to SAR report

10. TEST RESULT

10.1 PEAK POWER

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	13.301	21.38	125
Mid	2441	13.513	22.45	
High	2480	13.444	22.10	

Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	11.867	15.37	125
Mid	2441	12.014	15.90	
High	2480	11.947	15.66	

Channel	Frequency (MHz)	Output Power ($\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	11.446	13.95	125
Mid	2441	11.550	14.29	
High	2480	11.637	14.58	

■ TEST PLOTS

GFSK : Peak Power (CH.0)



8DPSK : Peak Power (CH.0)



GFSK : Peak Power (CH.39)



8DPSK : Peak Power (CH.39)



GFSK : Peak Power (CH.78)



8DPSK : Peak Power (CH.78)



$\pi/4$ DQPSK : Peak Power (CH.0)



$\pi/4$ DQPSK : Peak Power (CH.39)



$\pi/4$ DQPSK : Peak Power (CH.78)



10.2 BAND EDGES

Without hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	58.320	49.537	53.164	20
Upper	61.438	60.799	62.730	

With hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	61.222	54.030	54.228	20
Upper	66.555	62.618	61.980	

Test Plots

**GFSK(without hopping)
Band Edge(CH.0)**



**GFSK(without hopping)
Band Edge(CH.78)**



**8DPSK(without hopping)
Band Edge(CH.0)**



**8DPSK(without hopping)
Band Edge(CH.78)**



**$\pi/4$ DQPSK(without hopping)
Band Edge(CH.0)**



**$\pi/4$ DQPSK (without hopping)
Band Edge(CH.78)**



**GFSK(with hopping)
Band Edge(CH.0)**

**GFSK(with hopping)
Band Edge(CH.78)**

**8DPSK(with hopping)
Band Edge(CH.0)**

**8DPSK(with hopping)
Band Edge(CH.78)**

 **$\pi/4$ DQPSK(with hopping)
Band Edge(CH.0)**

 **$\pi/4$ DQPSK (with hopping)
Band Edge(CH.78)**


10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW)

99 % BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	869.25	1202.6	1191.0
CH.39	865.89	1205.3	1191.4
CH.78	872.78	1204.2	1190.1

20 dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	959.8	1326	1339
CH.39	958.9	1326	1341
CH.78	959.4	1318	1334

Channel Separation(kHz)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	(kHz)
998	998	988	>25 kHz or >2/3 of the 20 dB BW

▣ TEST PLOTS


Test Plots (GFSK) Channel Separation



Test Plots (8DPSK) Channel Separation



Test Plots ($\pi/4$ DQPSK) Channel Separation

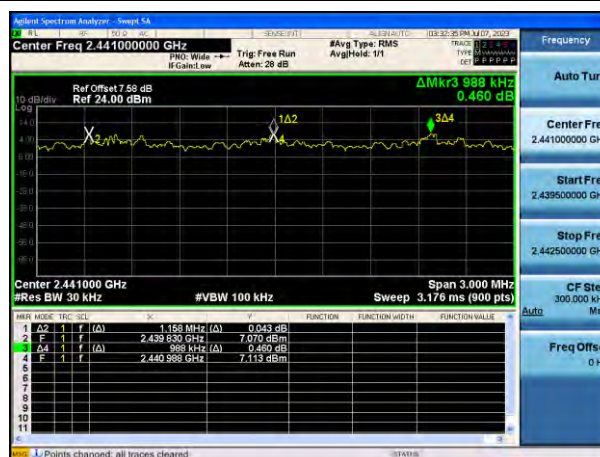

Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)



Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)



Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)



Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)



Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)



Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)



Test Plots ($\pi/4$ DQPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)



Test Plots ($\pi/4$ DQPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)



Test Plots (G $\pi/4$ DQPSK FSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)



10.4 NUMBER OF HOPPING FREQUENCY


Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

Note :


In case of AFH mode, minimum number of hopping channels is 20.

■ TEST PLOTS

GFSK Number of Channels (2.4 GHz - 2.441 GHz)

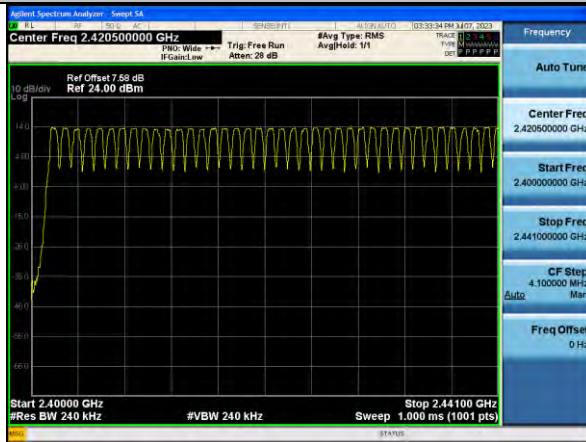

GFSK Number of Channels (2.441 GHz - 2.483.5 GHz)

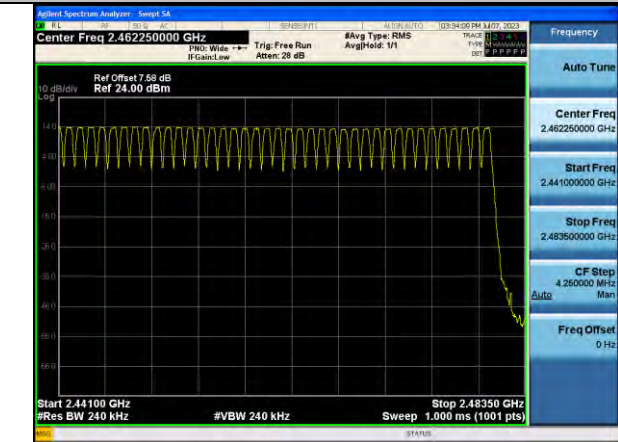

8DPSK Number of Channels (2.4 GHz - 2.441 GHz)



8DPSK Number of Channels (2.441 GHz - 2.483.5 GHz)



$\pi/4$ DQPSK Number of Channels (2.4 GHz - 2.441 GHz)



$\pi/4$ DQPSK Number of Channels (2.441 GHz - 2.483.5 GHz)



10.5 TIME OF OCCUPANCY (DWELL TIME)

Pulse Time (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
	Low	2.890	2.900	2.900
	Mid	2.890	2.895	2.900
	High	2.890	2.900	2.900

Non-AFH Mode


Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	308.27	309.33	309.33	31.6	400
	Mid	308.27	308.80	309.33	31.6	
	High	308.27	309.33	309.33	31.6	

AFH Mode


Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	154.13	154.67	154.67	8.0	400
	Mid	154.13	154.40	154.67	8.0	
	High	154.13	154.67	154.67	8.0	

■ TEST PLOTS


Test Plots (GFSK) Dwell Time (CH.0)

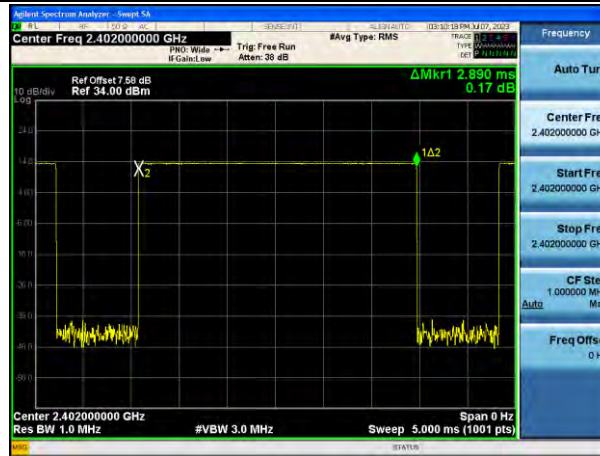


Test Plots (GFSK) Dwell Time (CH.39)

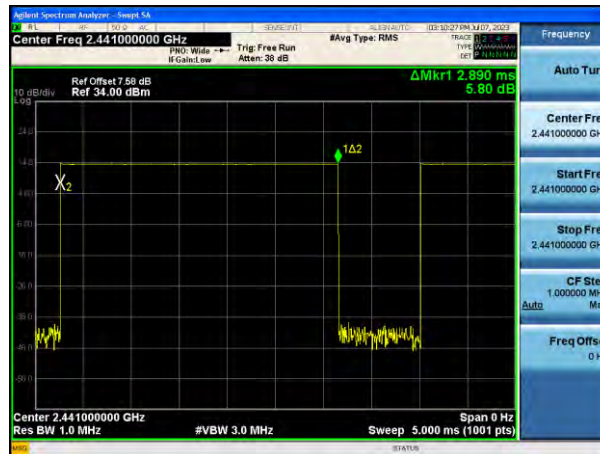


Test Plots (GFSK) Dwell Time (CH.78)

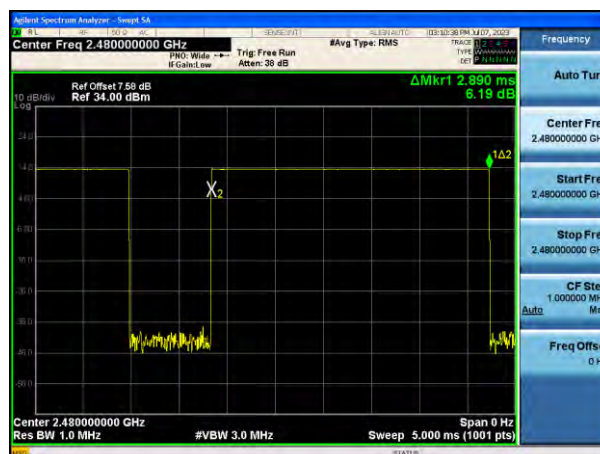


Test Plots (8DPSK) Dwell Time (CH.0)

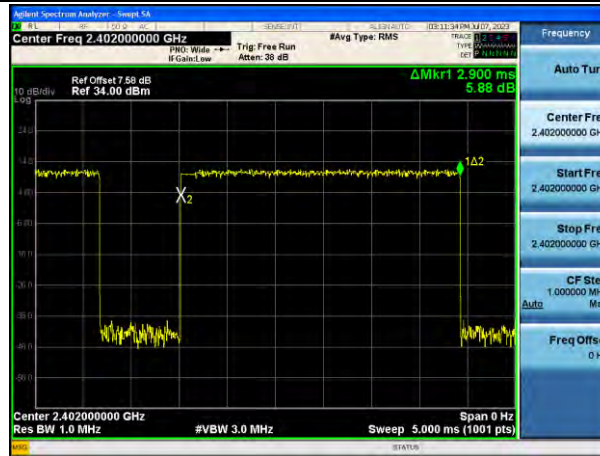

Test Plots (8DPSK) Dwell Time (CH.39)

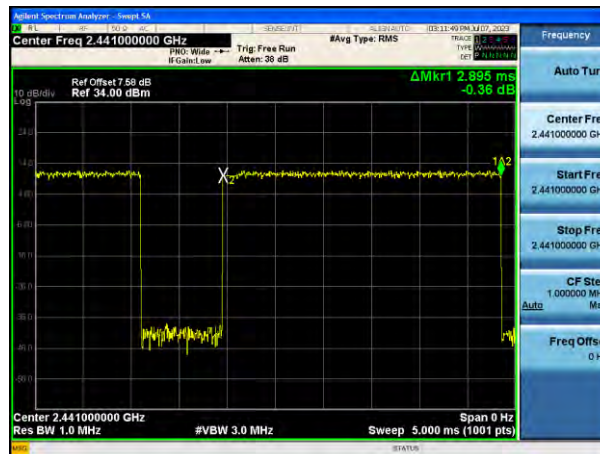


Test Plots (8DPSK) Dwell Time (CH.78)

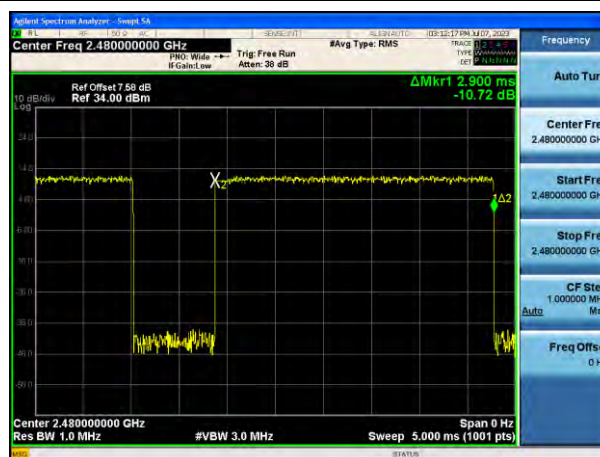


Test Plots ($\pi/4$ DQPSK) Dwell Time (CH.0)



Test Plots ($\pi/4$ DQPSK) Dwell Time (CH.39)

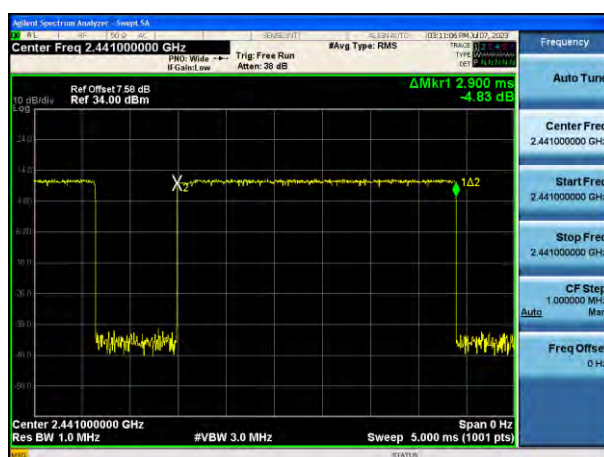

Test Plots (G $\pi/4$ DQPSK FSK) Dwell Time (CH.78)

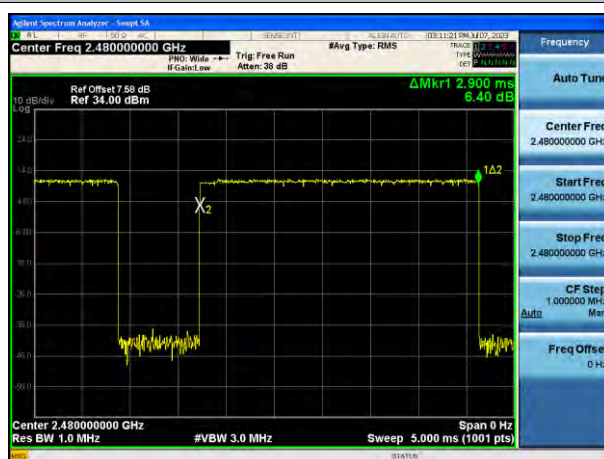

10.6 SPURIOUS EMISSIONS


10.6.1 CONDUCTED SPURIOUS EMISSIONS

In order to simplify the report, attached plots were only the worst case channel and data rate.


TEST PLOTS

(Worst case : GFSK_CH.39)

Spurious Emission (30 MHz – 1 GHz)

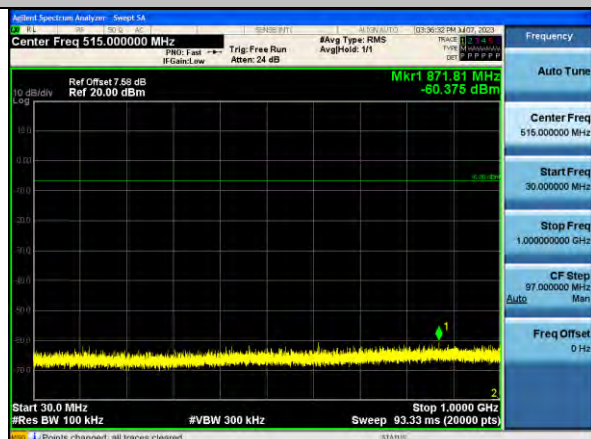


Spurious Emission (1 GHz – 3 GHz)

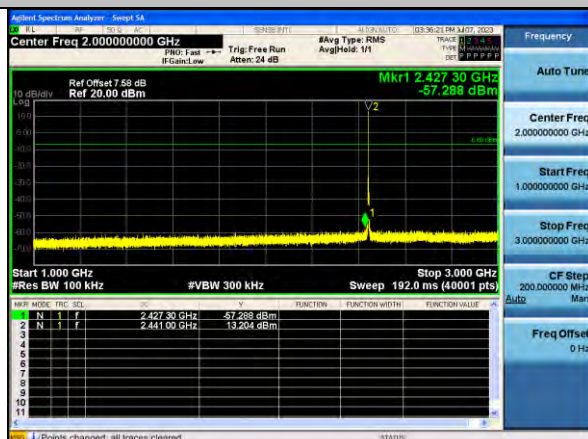


Spurious Emission (3 GHz – 5 GHz)




Spurious Emission (5 GHz – 7 GHz)

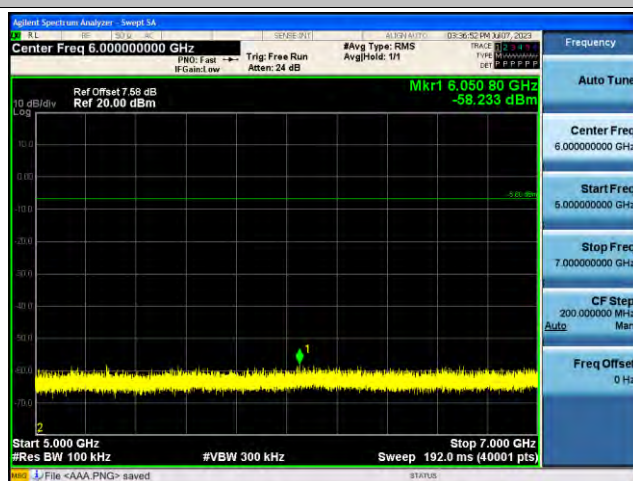


Spurious Emission (7 GHz – 9 GHz)

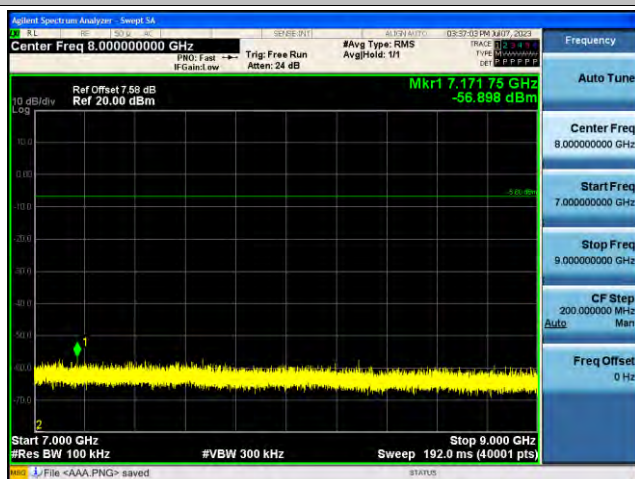


Spurious Emission (9 GHz – 11 GHz)

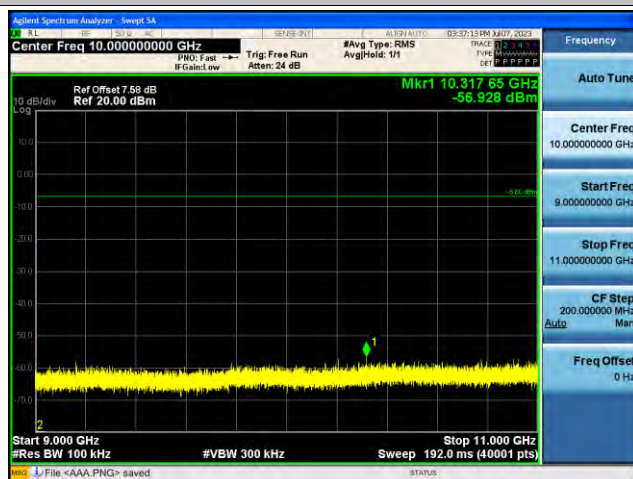


Spurious Emission (11 GHz – 13 GHz)

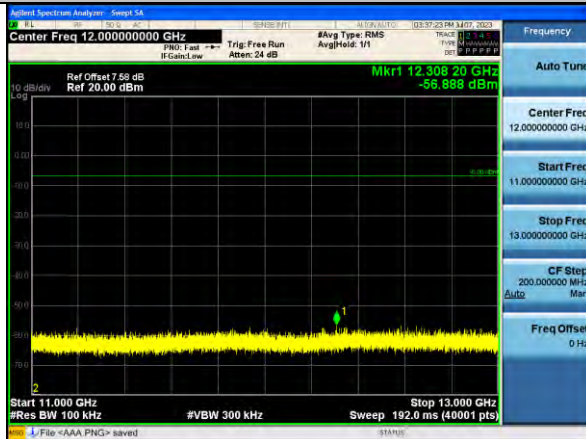


Spurious Emission (13 GHz – 15 GHz)

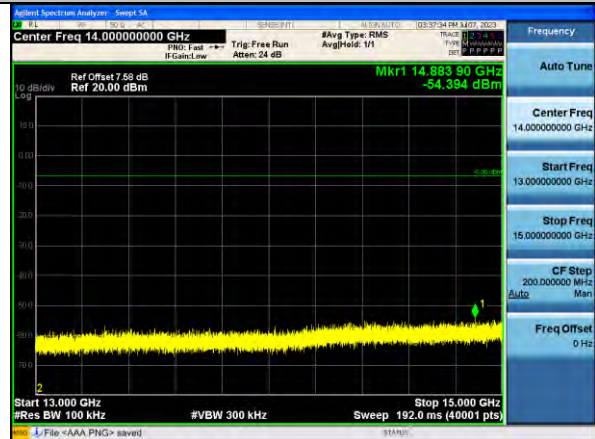


Spurious Emission (15 GHz – 17 GHz)

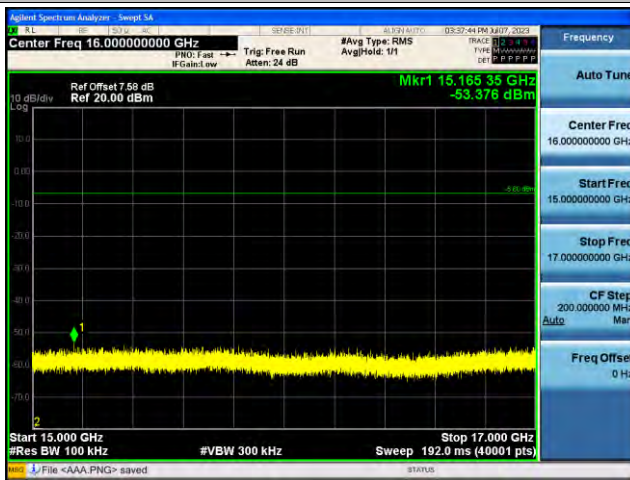


Spurious Emission (17 GHz – 19 GHz)

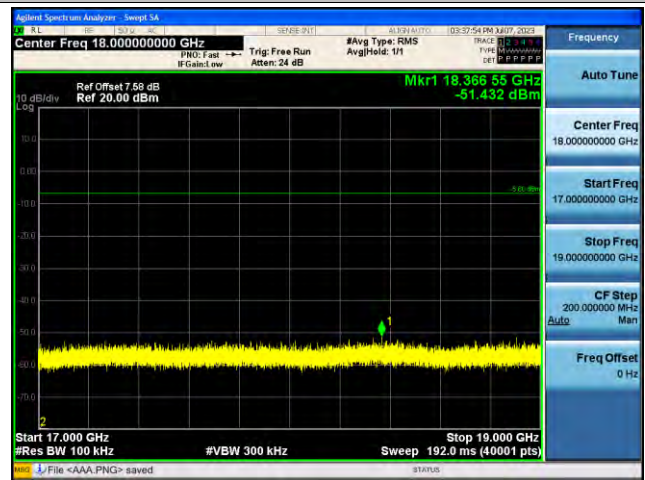


Spurious Emission (19 GHz – 21 GHz)

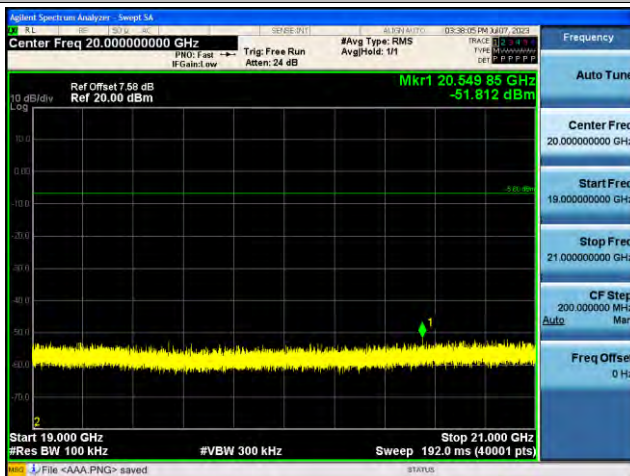

Spurious Emission (21 GHz – 23 GHz)

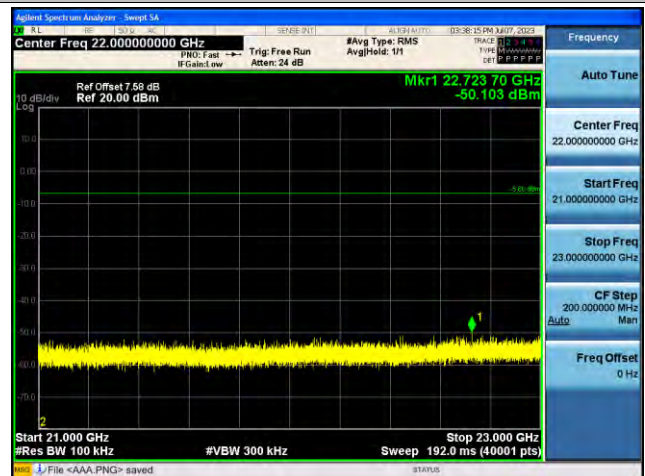

Spurious Emission (23 GHz – 25 GHz)

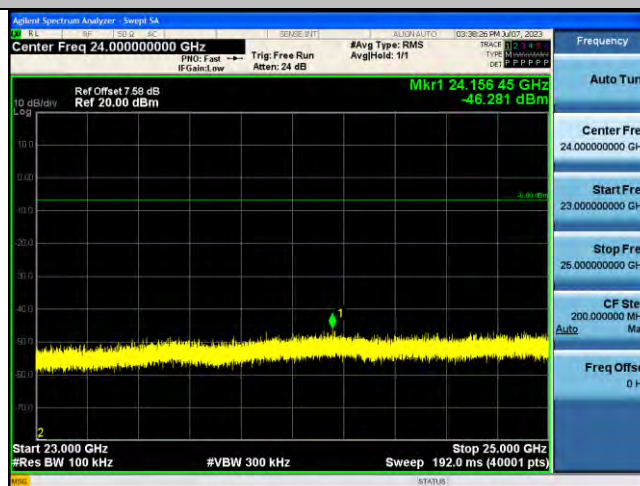

10.6.2 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Measured Value	A.F+C.L+D.F	POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBμV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.

Frequency Range : Above 1 GHz

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	41.77	3.94	V	0.00	45.71	73.98	28.27	PK
4804	41.77	3.94	V	-24.73	20.98	53.98	33.00	AV
7206	37.84	13.09	V	0.00	50.93	73.98	23.05	PK
7206	37.84	13.09	V	-24.73	26.20	53.98	27.78	AV
4804	44.04	4.08	H	0.00	48.12	73.98	25.86	PK
4804	44.04	4.08	H	-24.73	23.39	53.98	30.59	AV
7206	38.21	12.81	H	0.00	51.02	73.98	22.96	PK
7206	38.21	12.81	H	-24.73	26.29	53.98	27.69	AV

Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4882	45.66	3.98	V	0.00	49.64	73.98	24.34	PK
4882	45.66	3.98	V	-24.73	24.91	53.98	29.07	AV
7323	38.01	11.98	V	0.00	49.99	73.98	23.99	PK
7323	38.01	11.98	V	-24.73	25.26	53.98	28.72	AV
4882	46.15	3.98	H	0.00	50.13	73.98	23.85	PK
4882	46.15	3.98	H	-24.73	25.40	53.98	28.58	AV
7323	38.19	11.98	H	0.00	50.17	73.98	23.81	PK
7323	38.19	11.98	H	-24.73	25.44	53.98	28.54	AV

Operation Mode: CH High(GFSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	43.62	4.80	V	0.00	48.42	73.98	25.56	PK
4960	43.62	4.80	V	-24.73	23.69	53.98	30.29	AV
7440	37.92	12.33	V	0.00	50.25	73.98	23.73	PK
7440	37.92	12.33	V	-24.73	25.51	53.98	28.47	AV
4960	44.12	4.80	H	0.00	48.92	73.98	25.06	PK
4960	44.12	4.80	H	-24.73	24.19	53.98	29.79	AV
7440	38.75	12.33	H	0.00	51.08	73.98	22.90	PK
7440	38.75	12.33	H	-24.73	26.34	53.98	27.64	AV

Operation Mode: CH Low($\pi/4$ DQPSK)

Frequency [MHz]	Measured Value [dB μ V]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4804	42.26	3.94	V	0.00	46.20	73.98	27.78	PK
4804	42.26	3.94	V	-24.73	21.47	53.98	32.51	AV
7206	36.86	13.09	V	0.00	49.95	73.98	24.03	PK
7206	36.86	13.09	V	-24.73	25.22	53.98	28.76	AV
4804	42.78	4.08	H	0.00	46.86	73.98	27.12	PK
4804	42.78	4.08	H	-24.73	22.13	53.98	31.85	AV
7206	38.24	12.81	H	0.00	51.05	73.98	22.93	PK
7206	38.24	12.81	H	-24.73	26.32	53.98	27.66	AV

Operation Mode: CH Mid($\pi/4$ DQPSK)

Frequency [MHz]	Measured Value [dB μ V]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4882	42.78	3.98	V	0.00	46.76	73.98	27.22	PK
4882	42.78	3.98	V	-24.73	22.03	53.98	31.95	AV
7323	37.88	11.98	V	0.00	49.86	73.98	24.12	PK
7323	37.88	11.98	V	-24.73	25.13	53.98	28.85	AV
4882	43.62	3.98	H	0.00	47.60	73.98	26.38	PK
4882	43.62	3.98	H	-24.73	22.87	53.98	31.11	AV
7323	38.39	11.98	H	0.00	50.37	73.98	23.61	PK
7323	38.39	11.98	H	-24.73	25.64	53.98	28.34	AV

Operation Mode: CH High($\pi/4$ DQPSK)

Frequency [MHz]	Measured Value [dB μ V]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4960	41.66	4.80	V	0.00	46.46	73.98	27.52	PK
4960	41.66	4.80	V	-24.73	21.73	53.98	32.25	AV
7440	37.88	12.33	V	0.00	50.21	73.98	23.77	PK
7440	37.88	12.33	V	-24.73	25.47	53.98	28.51	AV
4960	42.95	4.80	H	0.00	47.75	73.98	26.23	PK
4960	42.95	4.80	H	-24.73	23.02	53.98	30.96	AV
7440	38.97	12.33	H	0.00	51.30	73.98	22.68	PK
7440	38.97	12.33	H	-24.73	26.56	53.98	27.42	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	42.28	4.08	V	0.00	46.36	73.98	27.62	PK
4804	42.28	4.08	V	-24.73	21.63	53.98	32.35	AV
7206	36.78	12.81	V	0.00	49.59	73.98	24.39	PK
7206	36.78	12.81	V	-24.73	24.86	53.98	29.12	AV
4804	43.34	4.08	H	0.00	47.42	73.98	26.56	PK
4804	43.34	4.08	H	-24.73	22.69	53.98	31.29	AV
7206	37.23	12.81	H	0.00	50.04	73.98	23.94	PK
7206	37.32	12.81	H	-24.73	25.40	53.98	28.58	AV

Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4882	43.38	3.98	V	0.00	47.36	73.98	26.62	PK
4882	43.38	3.98	V	-24.73	22.63	53.98	31.35	AV
7323	37.80	11.98	V	0.00	49.78	73.98	24.20	PK
7323	37.80	11.98	V	-24.73	25.05	53.98	28.93	AV
4882	44.17	3.98	H	0.00	48.15	73.98	25.83	PK
4882	44.17	3.98	H	-24.73	23.42	53.98	30.56	AV
7323	38.72	11.98	H	0.00	50.70	73.98	23.28	PK
7323	38.72	11.98	H	-24.73	25.97	53.98	28.01	AV

Operation Mode: CH High(8DPSK)

Frequency	Measured Value	A.F+C.L-A.G+D.F	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4960	41.87	4.80	V	0.00	46.67	73.98	27.31	PK
4960	41.87	4.80	V	-24.73	21.94	53.98	32.04	AV
7440	37.42	12.33	V	0.00	49.75	73.98	24.23	PK
7440	37.42	12.33	V	-24.73	25.01	53.98	28.97	AV
4960	43.39	4.80	H	0.00	48.19	73.98	25.79	PK
4960	43.39	4.80	H	-24.73	23.46	53.98	30.52	AV
7440	38.83	12.33	H	0.00	51.16	73.98	22.82	PK
7440	38.83	12.33	H	-24.73	26.42	53.98	27.56	AV

[DBS]

Scenario 1

WLAN 5 GHz SISO ANT2 (802.11a 6Mbps Ch.165) + BT (GFSK DH5 Ch.78)


Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	55.38	4.80	V	0.00	60.18	73.98	13.80	PK
4960	55.38	4.80	V	-24.73	35.45	53.98	18.53	AV
7440	38.37	12.33	V	0.00	50.70	73.98	23.28	PK
7440	38.37	12.33	V	-24.73	25.96	53.98	28.02	AV
4960	56.40	4.80	H	0.00	61.20	73.98	12.78	PK
4960	56.40	4.80	H	-24.73	36.47	53.98	17.51	AV
7440	38.95	12.33	H	0.00	51.28	73.98	22.70	PK
7440	38.95	12.33	H	-24.73	26.54	53.98	27.44	AV

Note :


WLAN 5 GHz DBS Data refer to [UNII] Test Report.

Test Plots


Radiated Spurious Emissions plot – Average & Peak Result (GFSK, Ch.78 3rd Harmonic, Y-H)

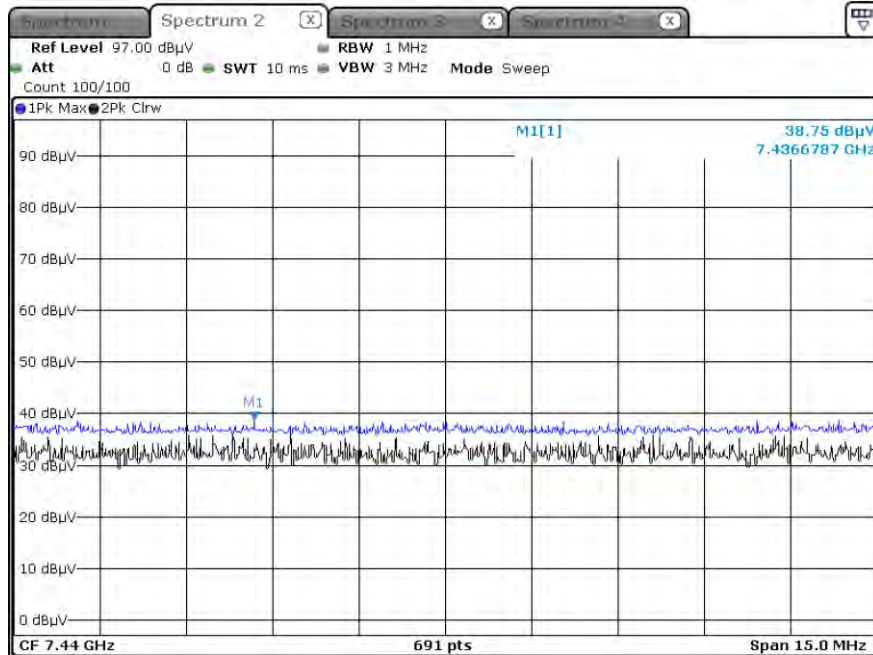

Radiated Spurious Emissions plot – Average & Peak Result (π /4DQPSK, Ch.78 3rd Harmonic, Y-H)

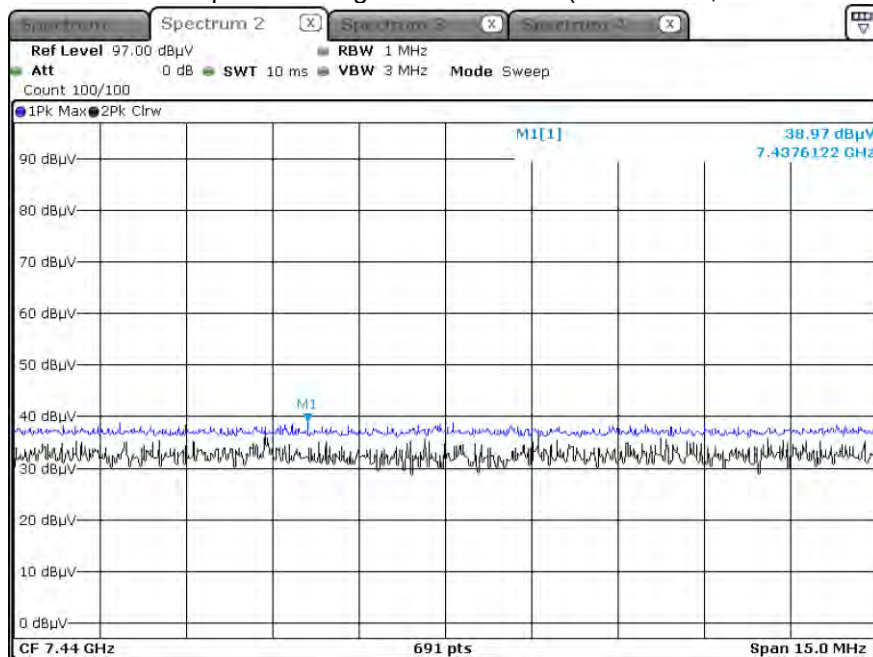

Radiated Spurious Emissions plot – Average & Peak Result (8DPSK, Ch.78 3rd Harmonic, Y-H)

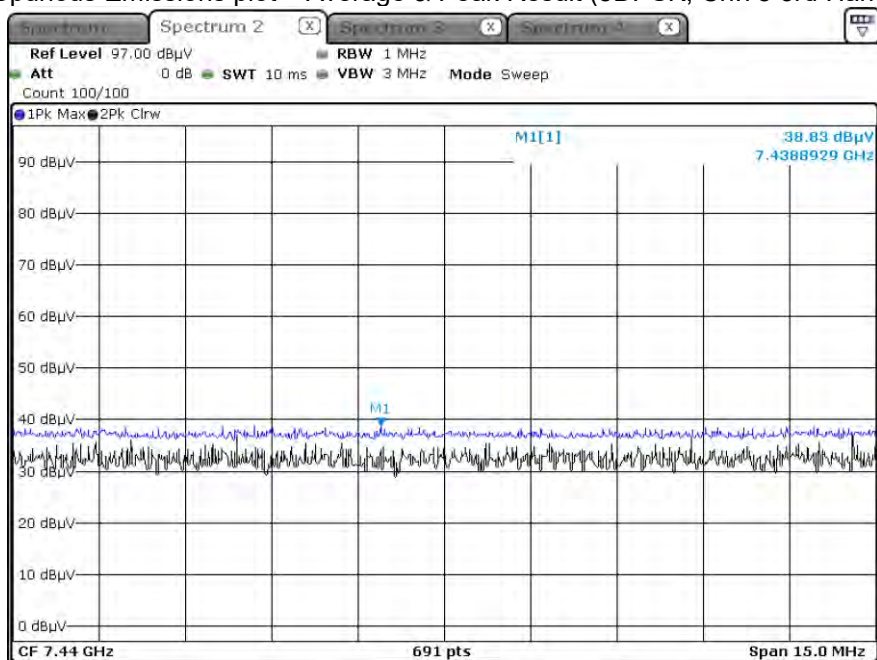


Note:

Plot of worst case are only reported.

[DBS Mode]

WLAN 5 GHz SISO ANT2 (802.11a 6Mbps Ch.165) + BT ANT1 (GFSK DH5 Ch.78)

Radiated Spurious Emissions plot – Average& Peak Result (Restricted Harmonic, 2nd, Z-H)

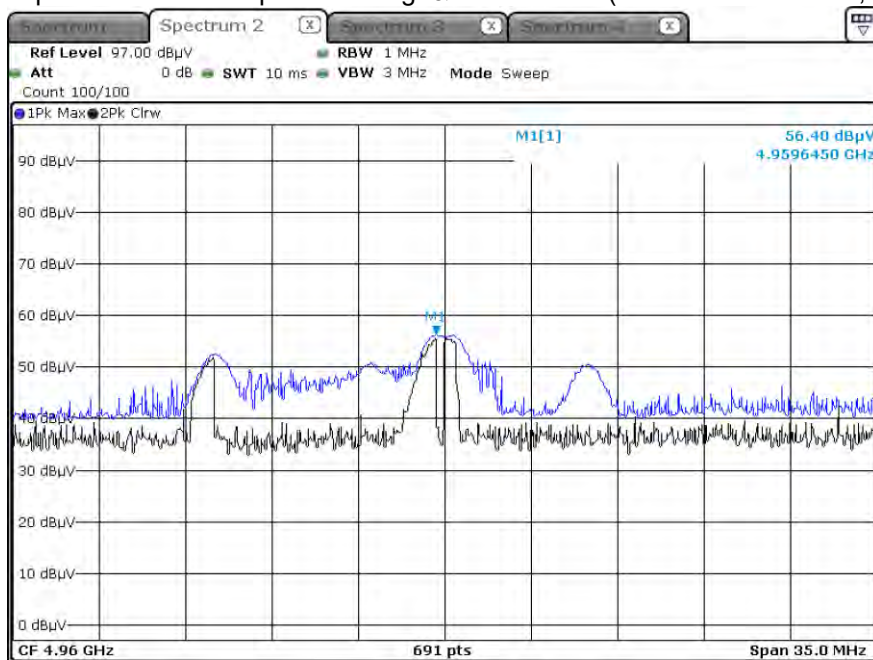

Note:

Plot of worst case are only reported.

10.6.3 RADIATED RESTRICTED BAND EDGES

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G +ATT+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	54.68	2.15	H	0	56.83	73.98	17.15	PK
2390.0	54.68	2.15	H	-24.73	32.10	53.98	21.88	AV
2390.0	53.32	2.15	V	0	55.47	73.98	18.51	PK
2390.0	53.32	2.15	V	-24.73	30.74	53.98	23.24	AV
2483.5	65.43	2.47	H	0	67.90	73.98	6.08	PK
2483.5	65.43	2.47	H	-24.73	43.16	53.98	10.82	AV
2483.5	61.87	2.47	V	0	64.34	73.98	9.65	PK
2483.5	61.87	2.47	V	-24.73	39.60	53.98	14.38	AV

Operation Mode	EDR($\pi/4$ DQPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G +ATT+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	53.98	2.15	H	0	56.13	73.98	17.85	PK
2390.0	53.98	2.15	H	-24.73	31.40	53.98	22.58	AV
2390.0	53.29	2.15	V	0	55.44	73.98	18.54	PK
2390.0	53.29	2.15	V	-24.73	30.71	53.98	23.27	AV
2483.5	65.45	2.47	H	0	67.92	73.98	6.07	PK
2483.5	65.45	2.47	H	-24.73	43.18	53.98	10.80	AV
2483.5	61.26	2.47	V	0	63.73	73.98	10.26	PK
2483.5	61.26	2.47	V	-24.73	38.99	53.98	14.99	AV

Operation Mode EDR(8DPSK)


Operating Frequency 2402 MHz, 2480 MHz

Channel No CH 0, CH 78


Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G +ATT+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	54.02	2.15	H	0	56.17	73.98	17.81	PK
2390.0	54.02	2.15	H	-24.73	31.44	53.98	22.54	AV
2390.0	53.56	2.15	V	0	55.71	73.98	18.27	PK
2390.0	53.56	2.15	V	-24.73	30.98	53.98	23.00	AV
2483.5	65.97	2.47	H	0	68.44	73.98	5.55	PK
2483.5	65.97	2.47	H	-24.73	43.70	53.98	10.28	AV
2483.5	61.19	2.47	V	0	63.66	73.98	10.33	PK
2483.5	61.19	2.47	V	-24.73	38.92	53.98	15.06	AV

RESULT PLOTS


Radiated Restricted Band Edges plot – Average & Peak Result (GFSK, Ch.78, X-H)

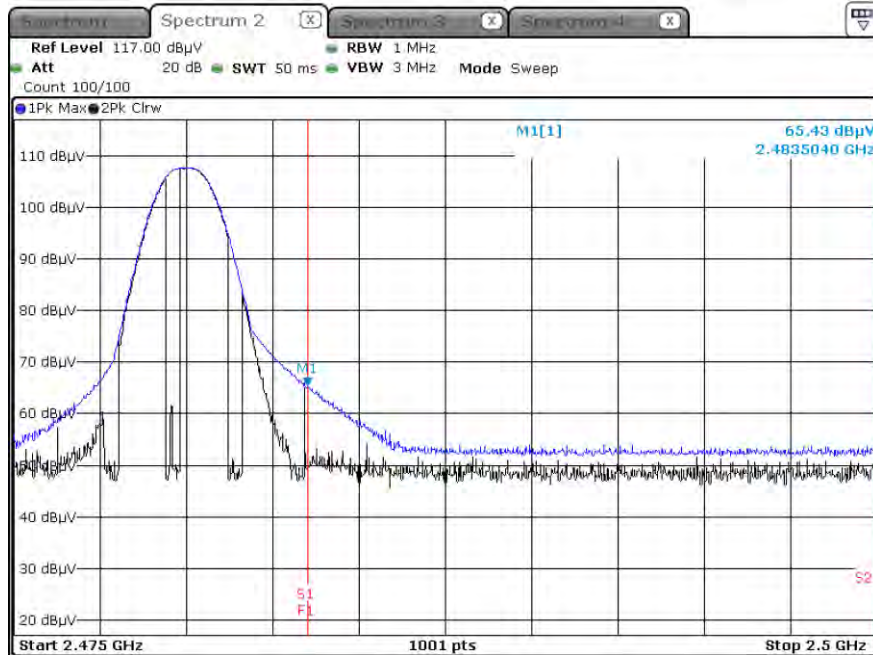

Radiated Restricted Band Edges plot – Average & Peak Result ($\pi/4$ DQPSK, Ch.78, X-H)

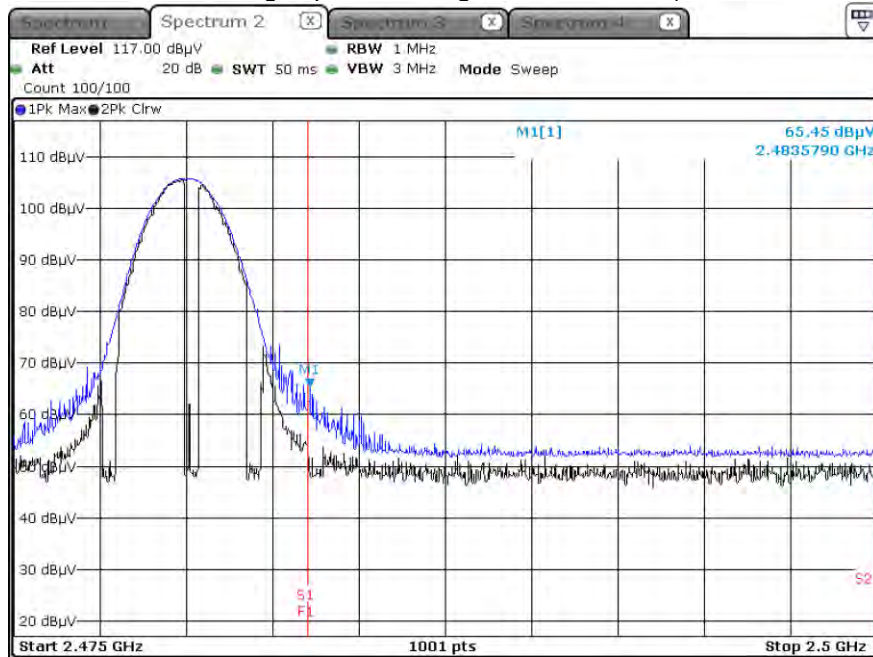

Radiated Restricted Band Edges plot – Average & Peak Result (8DPSK, Ch.78, X-H)

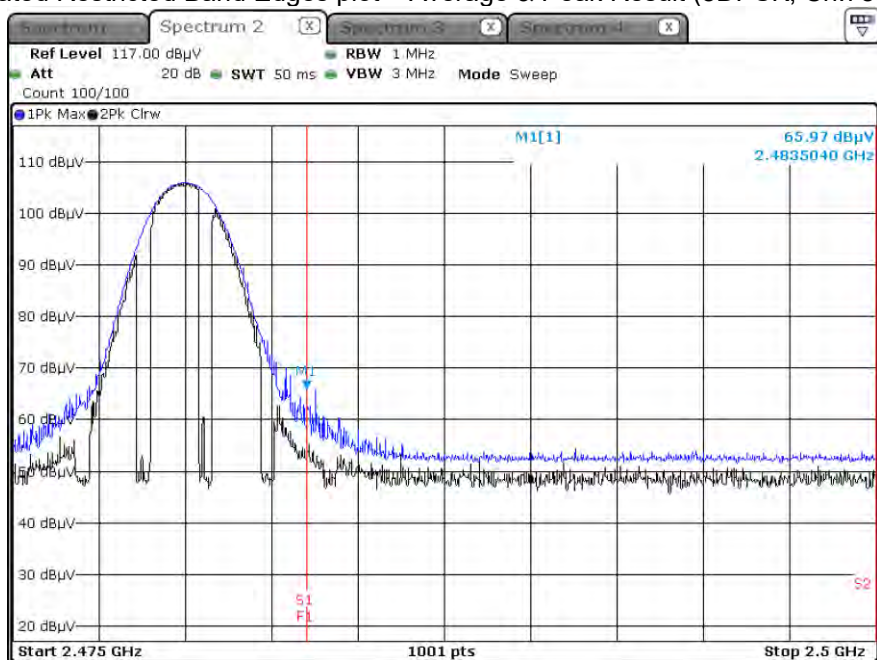

Note:

Plot of worst case are only reported.

10.7 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions

Test


1 / 1

Test Report

Common Information

EUT : SM-X616B
Operating Conditions : BT
Comment :

Full Spectrum

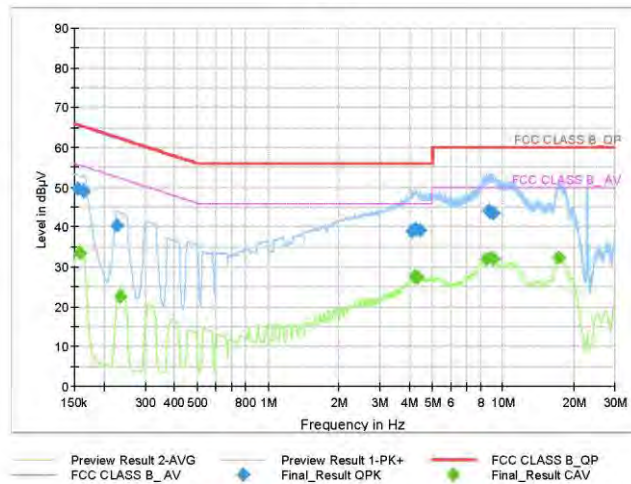

Final Result QPK

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	49.70	65.75	16.05	1000.0	9.000	N	OFF	9.6
0.1635	48.92	65.28	16.36	1000.0	9.000	N	OFF	9.6
0.2265	40.52	62.58	22.06	1000.0	9.000	L1	OFF	9.7
4.0910	38.92	56.00	17.08	1000.0	9.000	L1	OFF	9.8
4.2575	39.64	56.00	16.36	1000.0	9.000	L1	OFF	9.8
4.4240	39.14	56.00	16.86	1000.0	9.000	L1	OFF	9.8
8.6810	44.09	60.00	15.91	1000.0	9.000	L1	OFF	10.0
8.8498	43.78	60.00	16.22	1000.0	9.000	L1	OFF	10.0
9.0995	43.65	60.00	16.35	1000.0	9.000	L1	OFF	10.0

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1590	33.34	55.52	22.18	1000.0	9.000	N	OFF	9.6
0.2355	22.54	52.25	29.72	1000.0	9.000	N	OFF	9.6
4.2418	27.72	46.00	18.28	1000.0	9.000	L1	OFF	9.8
4.2508	27.31	46.00	18.69	1000.0	9.000	L1	OFF	9.8
4.3340	27.32	46.00	18.68	1000.0	9.000	L1	OFF	9.8
8.5123	31.96	50.00	18.04	1000.0	9.000	L1	OFF	10.0
9.0185	32.40	50.00	17.60	1000.0	9.000	L1	OFF	10.0
9.0973	32.11	50.00	17.89	1000.0	9.000	L1	OFF	10.0
17.3255	32.40	50.00	17.60	1000.0	9.000	L1	OFF	10.3

2023-07-11

오후 1:45:31

11. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/22/2023	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	05/26/2024	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	02/22/2024	Annual
Signal Analyzer	N9030A	Keysight	MY49431210	12/29/2023	Annual
Power Meter	N1911A	Agilent	MY45100523	03/06/2024	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/06/2024	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2023	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2024	Annual
DC Power Supply	E3632A	Agilent	KR75305528	01/03/2024	Annual
Attenuator(10 dB)	8493C	Hewlett Packard	07560	06/12/2024	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/16/2024	Annual

Note:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	760	02/24/2025	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	02299	03/24/2024	Biennial
Horn Antenna (15GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Spectrum Analyzer	FSV40	Rohde & Schwarz	100901	03/27/2024	Annual
Signal Analyzer	N9030A	Agilent	MY52350879	01/02/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/12/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/12/2024	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/05/2024	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	02/09/2024	Annual
RF Switching System	FMSR-04B (3G HPF+LNA)	T&M SYSTEM	S2L1	16/01/2024	Annual
RF Switching System	FMSR-04B (10dB ATT+LNA)	T&M SYSTEM	S2L2	16/01/2024	Annual
RF Switching System	FMSR-04B (3dB ATT+LNA)	T&M SYSTEM	S2L3	16/01/2024	Annual
RF Switching System	FMSR-04B (LNA)	T&M SYSTEM	S2L4	16/01/2024	Annual
RF Switching System	FMSR-04B (7G HPF+LNA)	T&M SYSTEM	S2L5	16/01/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/02/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2307-FC017-P