




7.6.3 MIMO Radiated Spurious Emission Measurements (242 Tones)

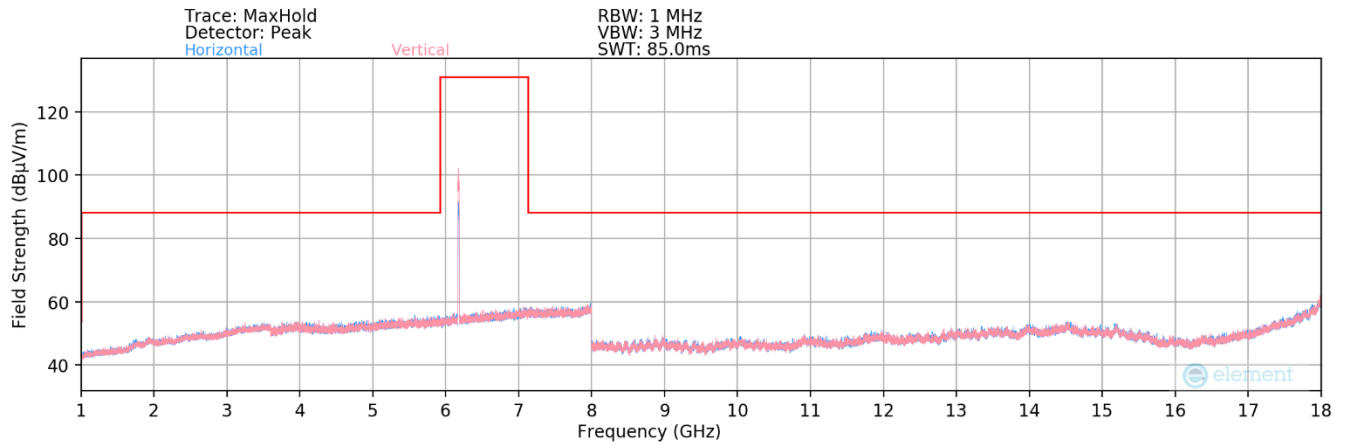

Plot 7-93. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 5 Ch. 45)

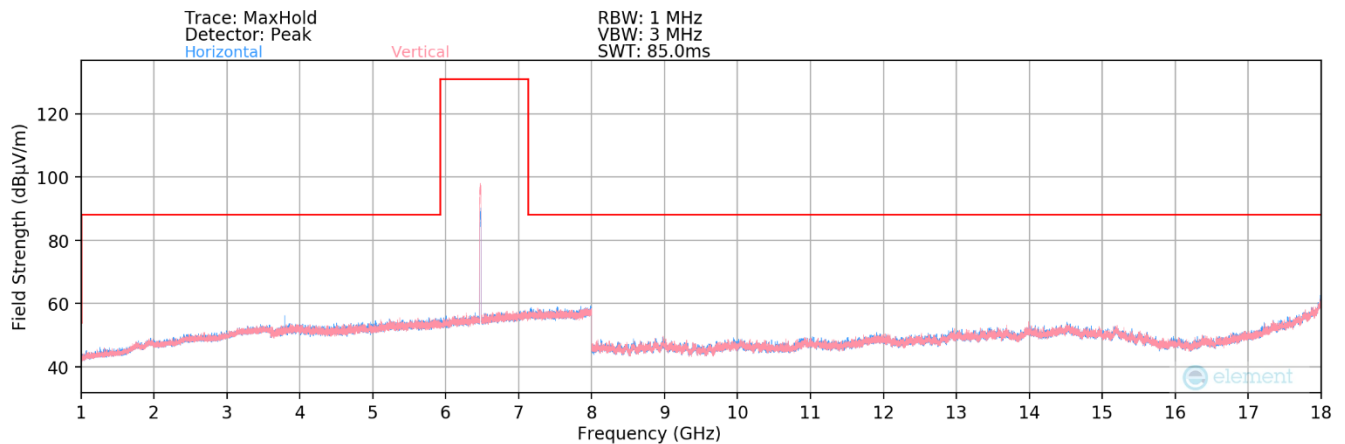


Plot 7-94. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 6 Ch. 105)

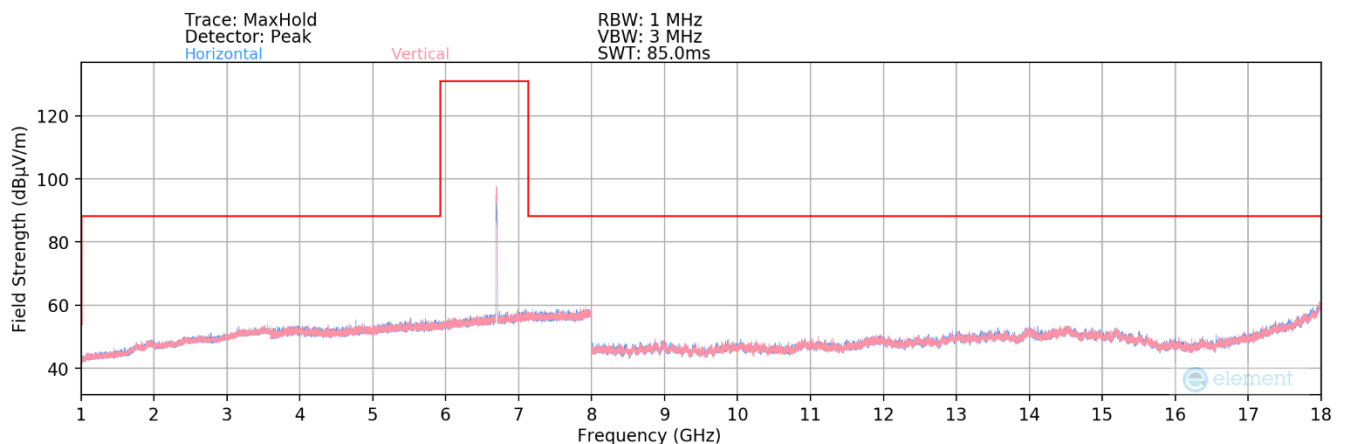


Plot 7-95. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 7 Ch. 149)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 93 of 109

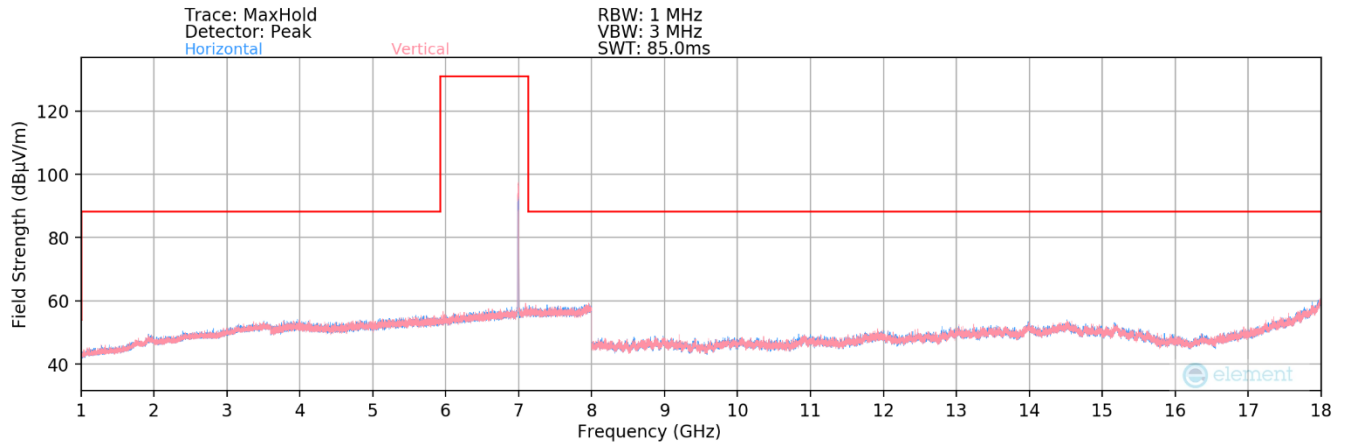

Plot 7-96. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – U Band 8 Ch. 209)

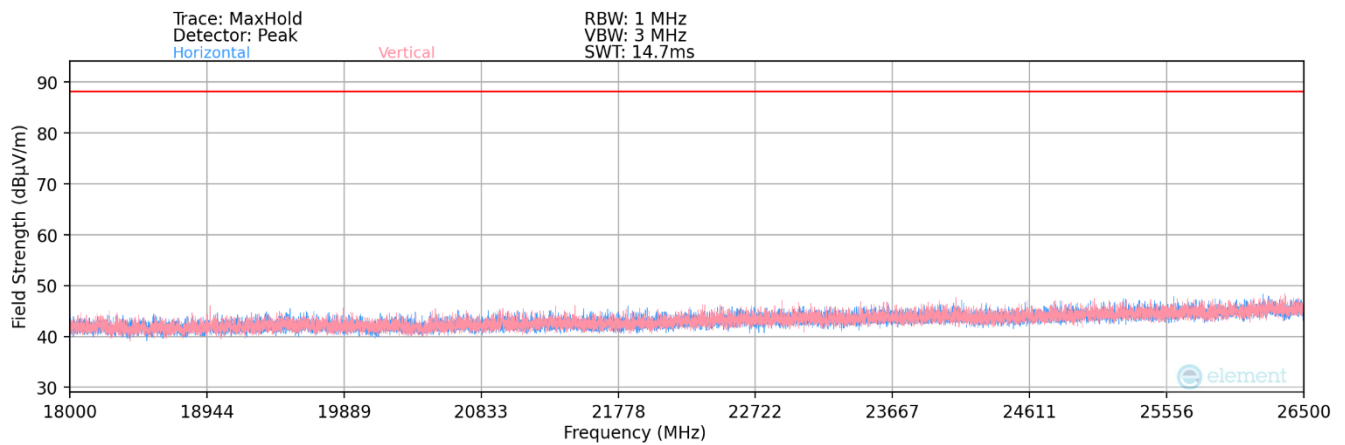

Plot 7-97. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax) – Ch. 149

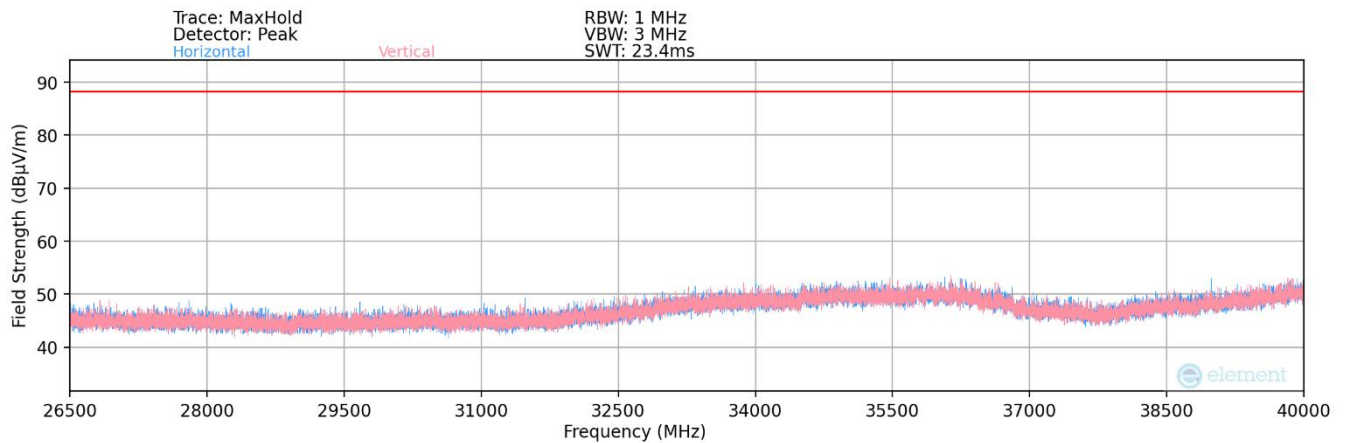

Plot 7-98. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax) – Ch. 149

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 94 of 109

7.6.3.1 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 5

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11be RU 242T	MIMO	5	2	5935	61	*	11870.00	Average	H	-	-		9.86	0.00	38.51	53.98	-15.47
						*	11870.00	Peak	H	-	-		9.86	0.00	50.79	73.98	-23.19
						*	17805.00	Average	H	-	-		17.15	0.00	46.01	53.98	-7.97
						*	17805.00	Peak	H	-	-		17.15	0.00	58.91	73.98	-15.07
						*	23740.00	Average	H	-	-		4.02	-9.54	36.31	53.98	-17.67
						*	23740.00	Peak	H	-	-		4.02	-9.54	47.17	73.98	-26.81
			45	6175	61		29675.00	Peak	H	-	-		5.01	-9.54	47.45	68.20	-20.75
						*	12350.00	Average	H	-	-		9.79	0.00	37.97	53.98	-16.01
						*	12350.00	Peak	H	-	-		9.79	0.00	49.85	73.98	-24.13
						*	18525.00	Average	H	-	-		1.00	-9.54	32.14	53.98	-21.84
						*	18525.00	Peak	H	-	-		1.00	-9.54	45.34	73.98	-28.64
							24700.00	Peak	H	-	-		4.23	-9.54	47.47	68.20	-20.73
			93	6415	61		30875.00	Peak	H	-	-		5.66	-9.54	48.14	68.20	-20.06
							12830.00	Peak	H	169	163		10.56	0.00	50.93	68.20	-17.27
						*	19245.00	Average	H	-	-		1.74	-9.54	33.56	53.98	-20.42
						*	19245.00	Peak	H	-	-		1.74	-9.54	44.94	73.98	-29.04
							25660.00	Peak	H	-	-		4.69	-9.54	46.96	68.20	-21.24
							32075.00	Peak	H	-	-		6.47	-9.54	48.95	68.20	-19.25

Table 7-31. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 95 of 109

7.6.3.2 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 6

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11be RU 242T	MIMO	6	97	6435	61		12870.00	Peak	H	-	-		10.44	0.00	50.07	68.20	-18.13
						*	19305.00	Average	H	-	-		1.65	-9.54	32.59	53.98	-21.39
						*	19305.00	Peak	H	-	-		1.65	-9.54	43.85	73.98	-30.13
							25740.00	Peak	H	-	-		4.71	-9.54	47.04	68.20	-21.16
							32175.00	Peak	H	-	-		6.76	-9.54	47.21	68.20	-20.99
			105	6475	61		12950.00	Peak	H	-	-		10.78	0.00	51.64	68.20	-16.56
						*	19425.00	Average	H	-	-		1.76	-9.54	33.94	53.98	-20.04
						*	19425.00	Peak	H	-	-		1.76	-9.54	44.94	73.98	-29.04
							25900.00	Peak	H	-	-		4.78	-9.54	47.13	68.20	-21.07
							32375.00	Peak	H	-	-		6.56	-9.54	48.71	68.20	-19.49
			113	6515	61		13030.00	Peak	H	-	-		10.87	0.00	52.52	68.20	-15.68
						*	19545.00	Average	H	-	-		1.89	-9.54	32.77	53.98	-21.21
						*	19545.00	Peak	H	-	-		1.89	-9.54	45.67	73.98	-28.31
							26060.00	Peak	H	-	-		4.92	-9.54	47.27	68.20	-20.93
							32575.00	Peak	H	-	-		6.76	-9.54	49.15	68.20	-19.05

Table 7-32. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 96 of 109

7.6.3.3 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 7

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11be RU 242T	MIMO	7	117	6535	61		13070.00	Peak	H	180	200	-65.16	10.96	0.00	52.80	68.20	-15.40
						*	19605.00	Average	H	-	-	-60.77	2.20	-9.54	38.89	53.98	-15.09
						*	19605.00	Peak	H	-	-	-53.58	2.20	-9.54	46.08	73.98	-27.90
							26140.00	Peak	H	-	-	-54.96	4.98	-9.54	47.48	68.20	-20.72
			149	6695	61		32675.00	Peak	H	-	-	-54.62	7.14	-9.54	49.98	68.20	-18.22
						*	13390.00	Average	H	164	179	-76.23	11.06	0.00	41.83	53.98	-12.15
						*	13390.00	Peak	H	164	179	-65.34	11.06	0.00	52.72	73.98	-21.26
						*	20085.00	Average	H	-	-	-61.78	2.07	-9.54	37.75	53.98	-16.23
						*	20085.00	Peak	H	-	-	-54.46	2.07	-9.54	45.07	73.98	-28.91
							26780.00	Peak	H	-	-	-54.69	5.18	-9.54	47.95	68.20	-20.25
							33475.00	Peak	H	-	-	-54.96	8.48	-9.54	50.98	68.20	-17.22
			185	6875	61		13750.00	Peak	H	144	197	-64.96	11.75	0.00	53.79	68.20	-14.41
						*	20625.00	Average	H	-	-	-61.51	2.36	-9.54	38.30	53.98	-15.68
						*	20625.00	Peak	H	-	-	-54.47	2.36	-9.54	45.35	73.98	-28.63
							27500.00	Peak	H	-	-	-54.99	5.00	-9.54	47.47	68.20	-20.73
							34375.00	Peak	H	-	-	-55.03	9.46	-9.54	51.89	68.20	-16.31

Table 7-33. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 97 of 109

7.6.3.4 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 8


Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11be RU 242T	MIMO	8	189	6895	61		13790.00	Peak	H	140	160	-64.89	11.61	0.00	53.72	68.20	-14.48
						*	20685.00	Average	H	-	-	-61.64	2.33	-9.54	38.16	53.98	-15.82
						*	20685.00	Peak	H	-	-	-55.09	2.33	-9.54	44.71	73.98	-29.27
							27580.00	Peak	H	-	-	-54.43	5.33	-9.54	48.37	68.20	-19.83
							34475.00	Peak	H	-	-	-55.24	9.33	-9.54	51.55	68.20	-16.65
			209	6995	61		13990.00	Peak	H	255	101	-58.28	11.81	0.00	60.53	68.20	-7.67
						*	20985.00	Average	H	-	-	-61.95	2.83	-9.54	38.34	53.98	-15.64
						*	20985.00	Peak	H	-	-	-55.11	2.83	-9.54	45.18	73.98	-28.80
							27980.00	Peak	H	-	-	-54.08	5.30	-9.54	48.67	68.20	-19.53
							34975.00	Peak	H	-	-	-53.58	9.79	-9.54	53.67	68.20	-14.53
			233	7115	61		14230.00	Peak	H	220	104	-58.73	12.55	0.00	60.82	68.20	-7.38
						*	21345.00	Average	H	-	-	-61.93	2.85	-9.54	38.38	53.98	-15.60
						*	21345.00	Peak	H	-	-	-54.37	2.85	-9.54	45.93	73.98	-28.05
							28460.00	Peak	H	-	-	-54.82	5.34	-9.54	47.98	68.20	-20.22
							35575.00	Peak	H	-	-	-55.18	9.53	-9.54	51.81	68.20	-16.39

Table 7-34. Radiated Measurements MIMO (242 Tones)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 98 of 109

7.6.4 MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	53
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

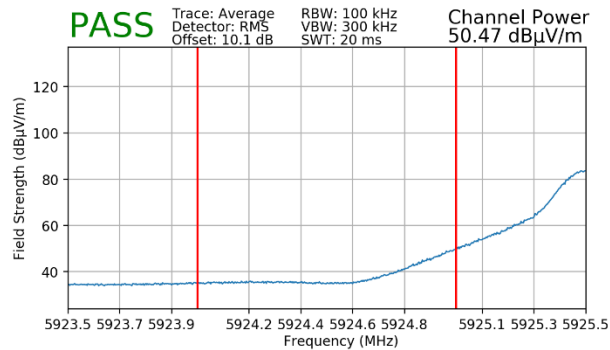


Plot 7-99. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 106T)

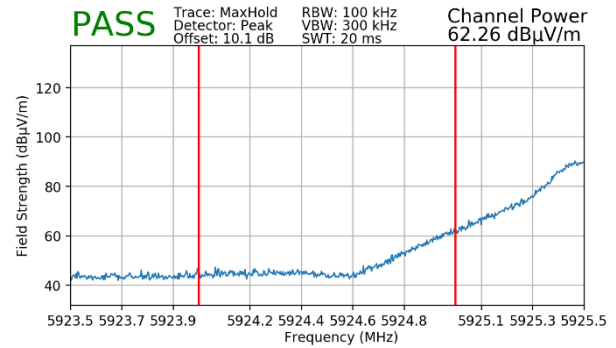


Plot 7-100. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 106T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

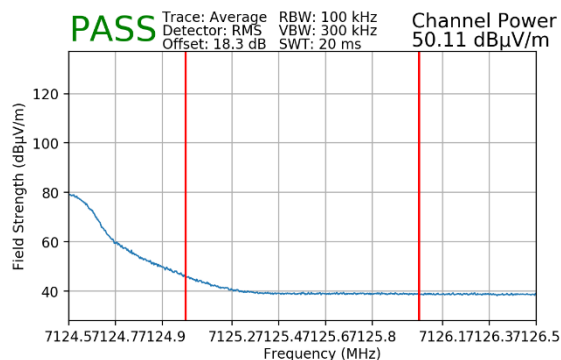

Plot 7-101. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 106T)

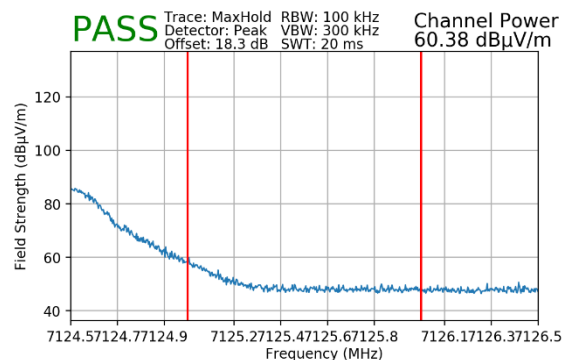


Plot 7-102. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 106T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 99 of 109

7.6.5 MIMO Radiated Band Edge Measurements (20MHz BW – MRU – 106+26T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	82
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

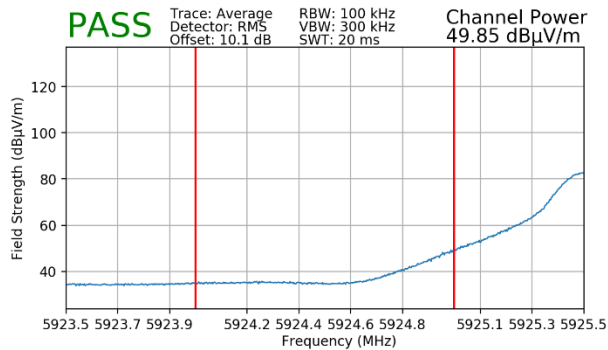


Plot 7-103. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 106+26T)

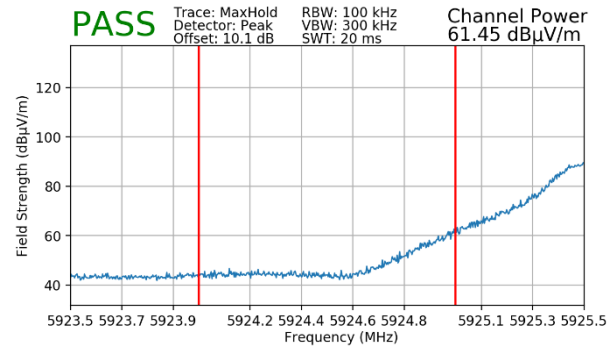


Plot 7-104. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 106+26T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	83
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

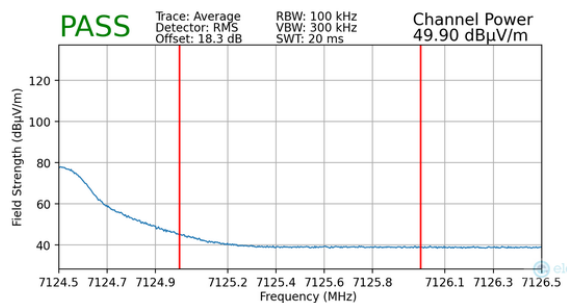

Plot 7-105. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 106T+26T)

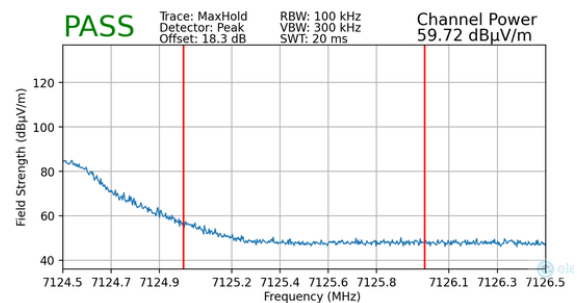


Plot 7-106. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 106T+26T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 100 of 109

7.6.6 MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

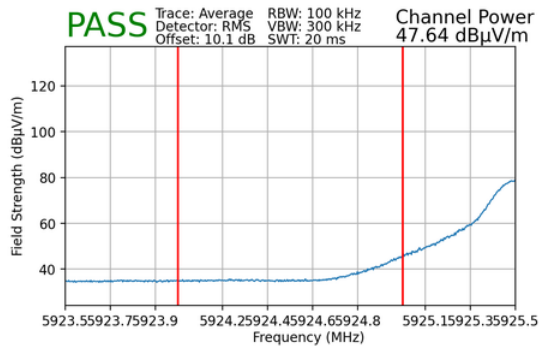


Plot 7-107. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 242T)

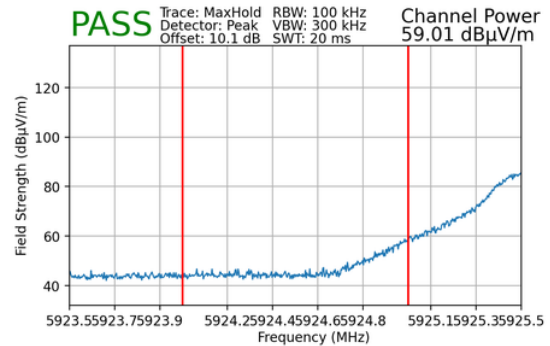


Plot 7-108. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

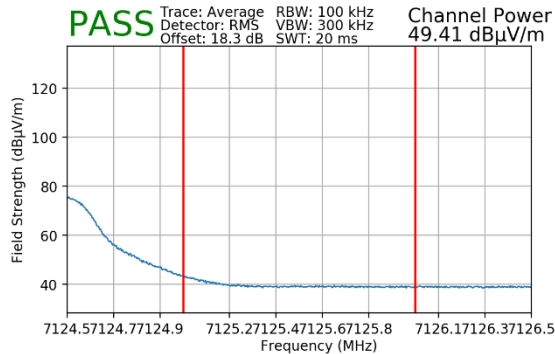

Plot 7-109. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 242T)

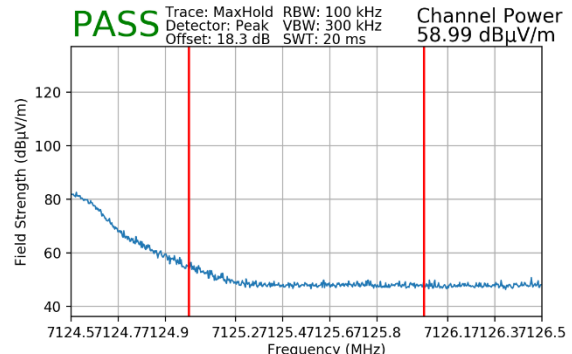


Plot 7-110. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 242T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 101 of 109

7.6.7 MIMO Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

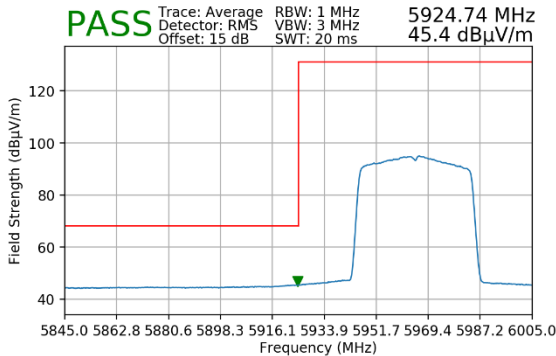


Plot 7-111. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 484T)

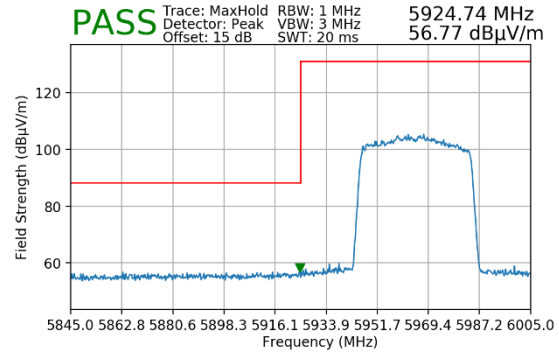


Plot 7-112. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	7085MHz
Channel:	227

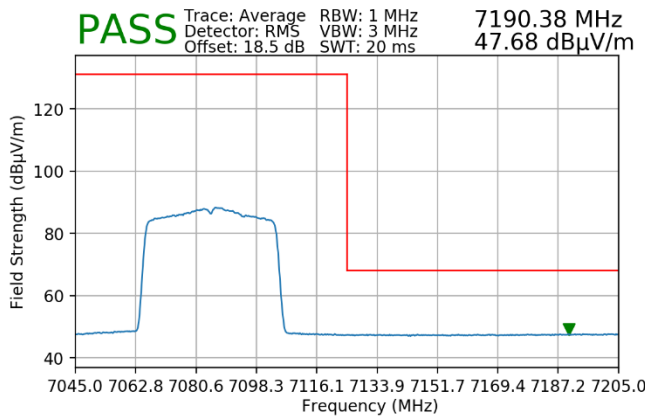

Plot 7-113. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 484T)

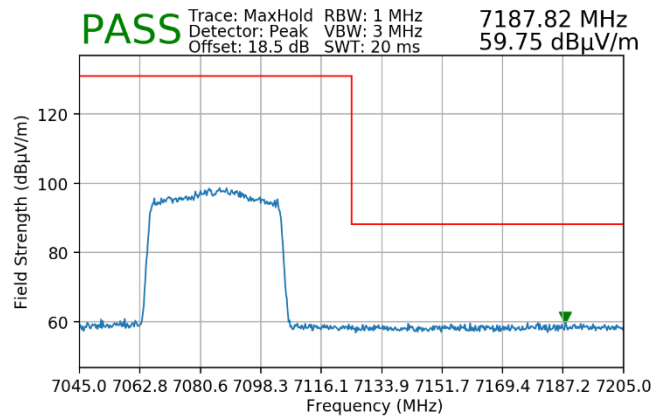


Plot 7-114. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 484T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 102 of 109

7.6.8 MIMO Radiated Band Edge Measurements (80MHz BW – Full Tone – 996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	67
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

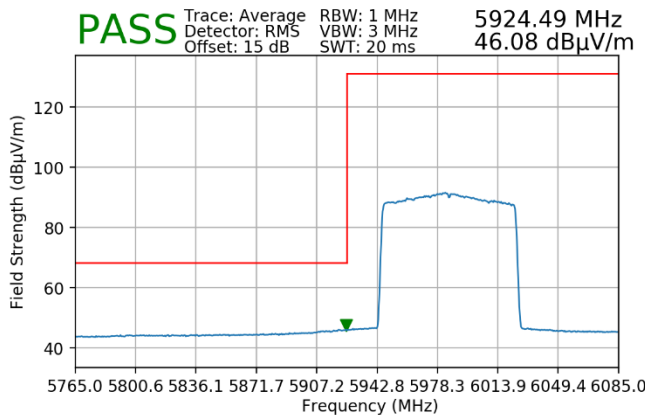


Plot 7-115. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 996T)

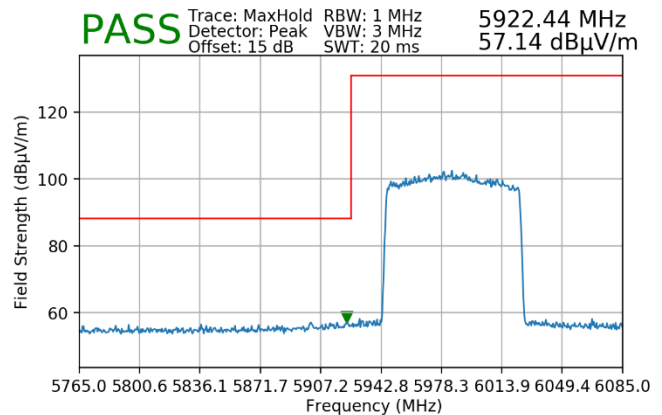


Plot 7-116. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	67
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	215

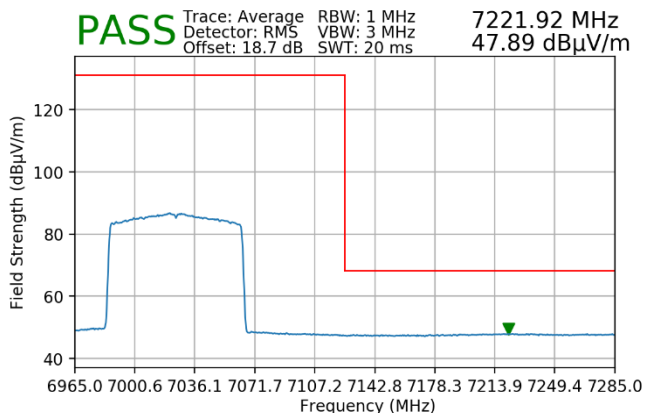

Plot 7-117. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 996T)

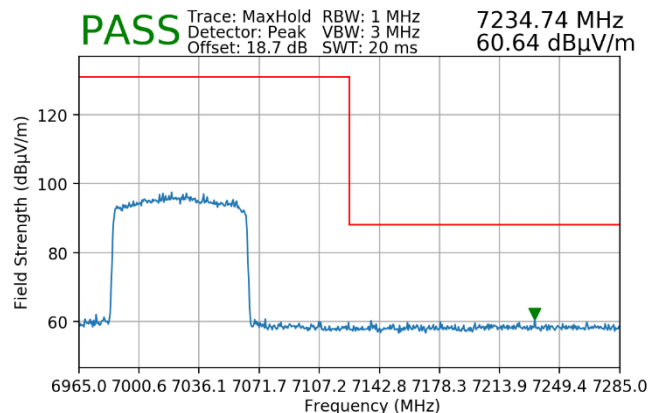


Plot 7-118. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 996T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 103 of 109

7.6.9 MIMO Radiated Band Edge Measurements (80MHz BW – MRU – 484+242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	90
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

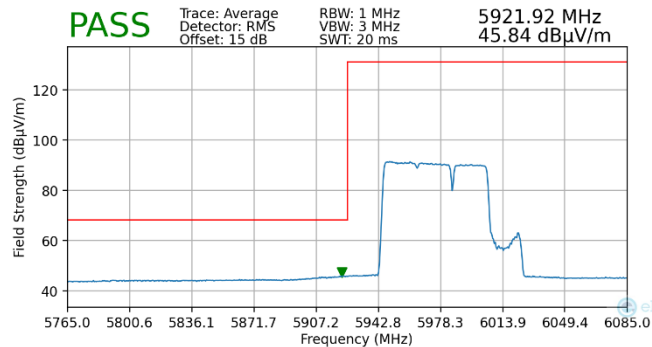


Plot 7-119. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 484+242T)

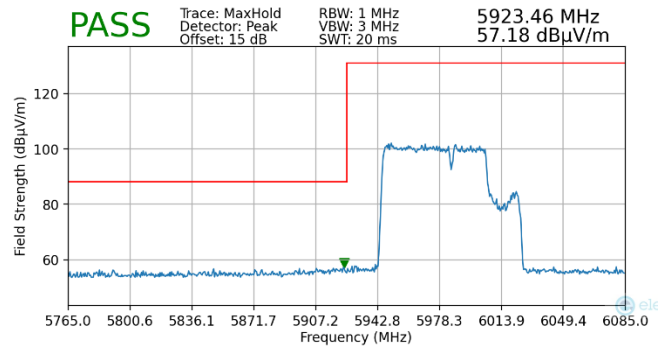


Plot 7-120. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 484+242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	93
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	215

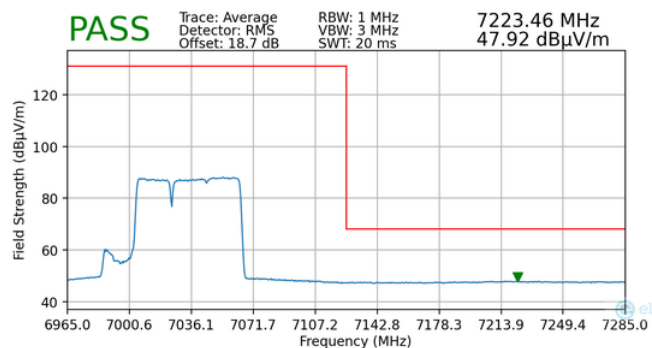

Plot 7-121. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 484+242T)

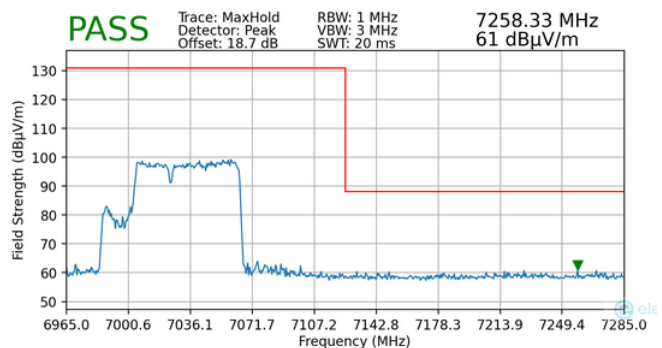


Plot 7-122. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 484+242T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 104 of 109

7.6.10 MIMO Radiated Band Edge Measurements (160MHz BW – Full Tone – 2x996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	68
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

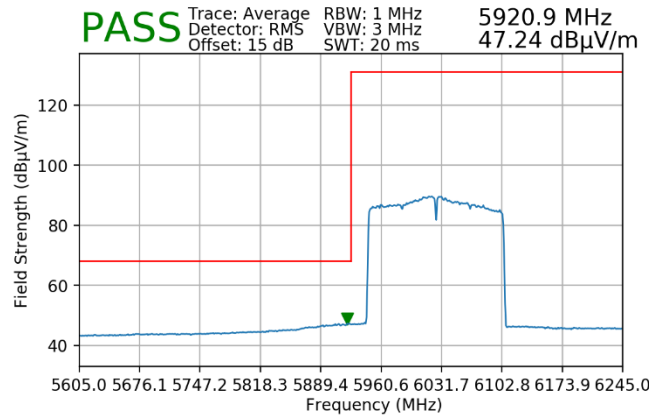


Plot 7-123. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 2x996T)

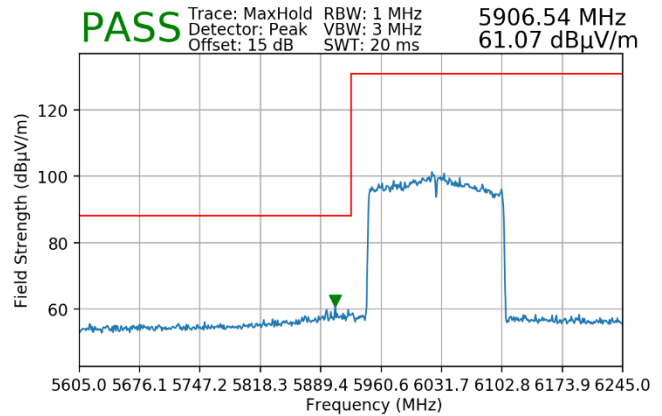


Plot 7-124. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 2x996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	68
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

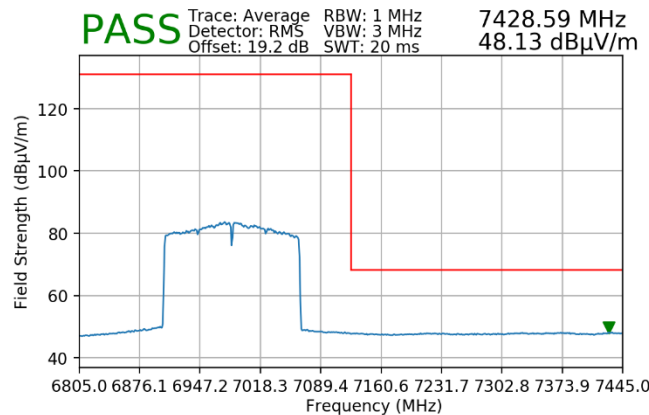

Plot 7-125. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 2x996T)

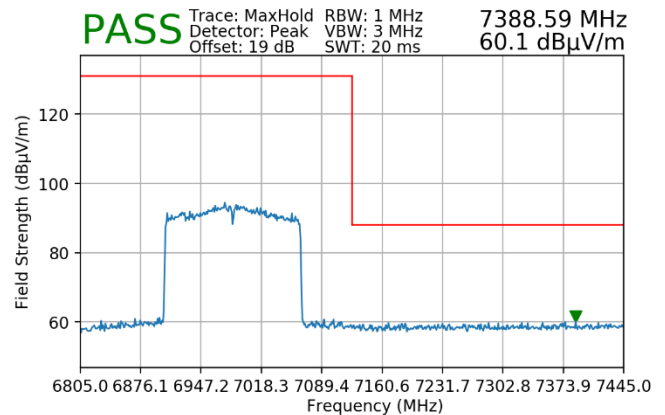


Plot 7-126. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 2x996T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 105 of 109

7.6.11 MIMO Radiated Band Edge Measurements (160MHz BW – MRU – 996+484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	1094
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

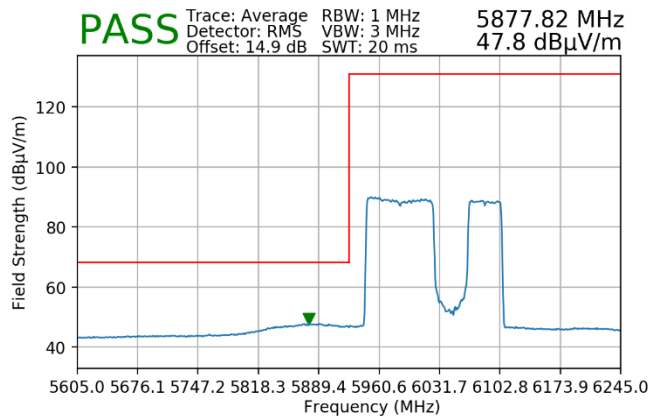


Plot 7-127. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 996+484T)

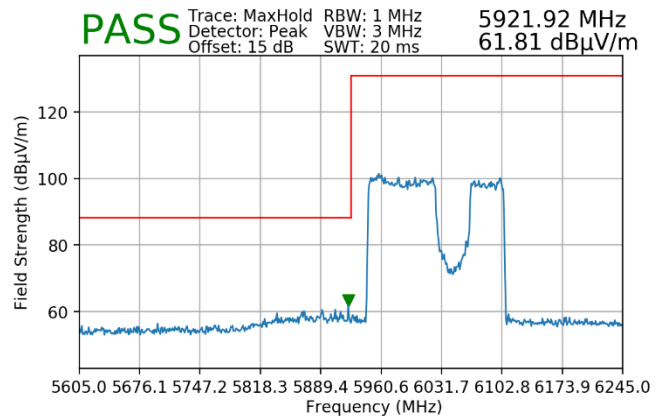


Plot 7-128. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 996+484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	95
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

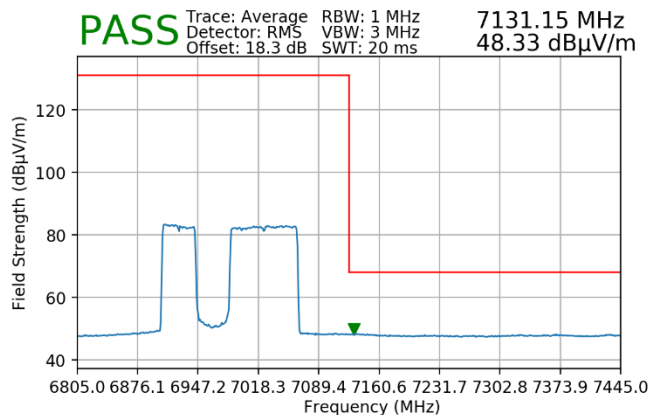

Plot 7-129. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 996+484T)

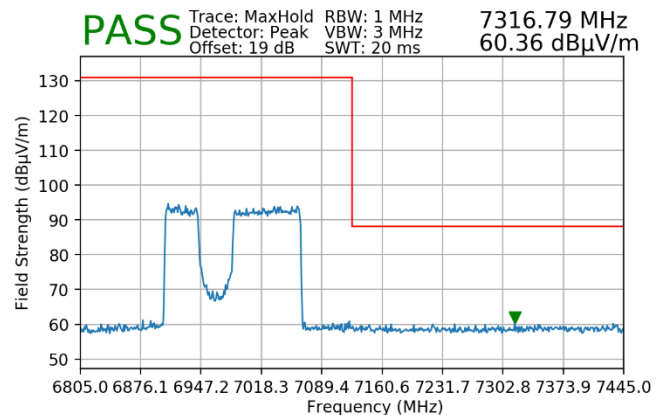


Plot 7-130. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 996+484T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 106 of 109

7.6.12 MIMO Radiated Band Edge Measurements (320MHz BW – Full Tone – 4*996T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	69
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

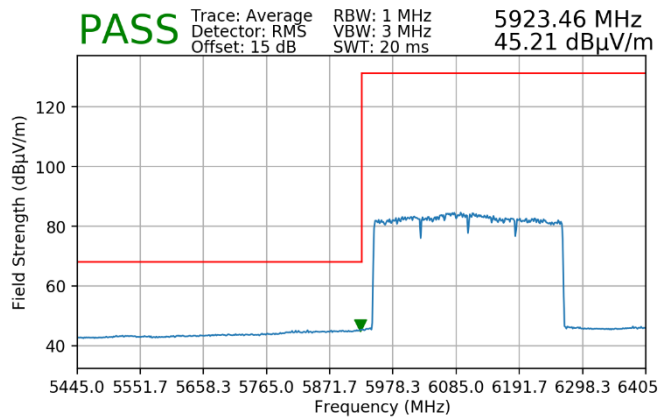


Plot 7-131. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 4*996T)

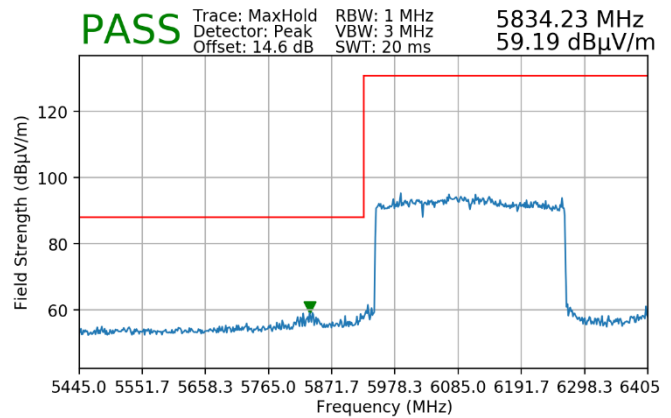


Plot 7-132. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 4*996T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	69
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

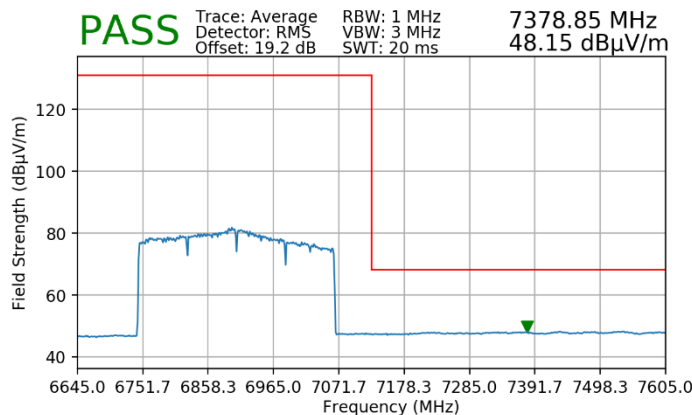

Plot 7-133. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 4*996T)

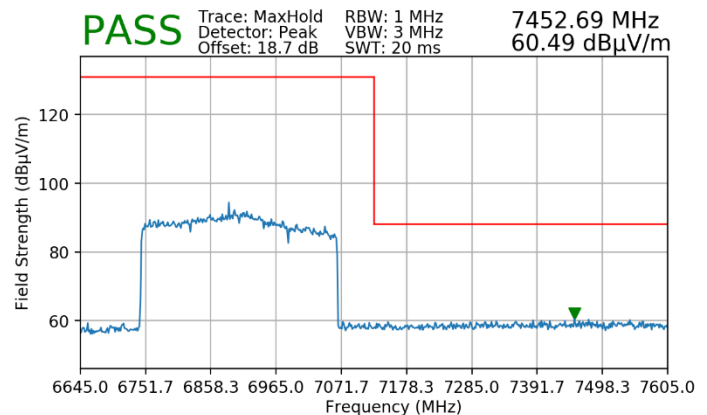


Plot 7-134. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 4*996T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 107 of 109

7.6.13 MIMO Radiated Band Edge Measurements (320MHz BW – MRU – 3*996+484T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	10105
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

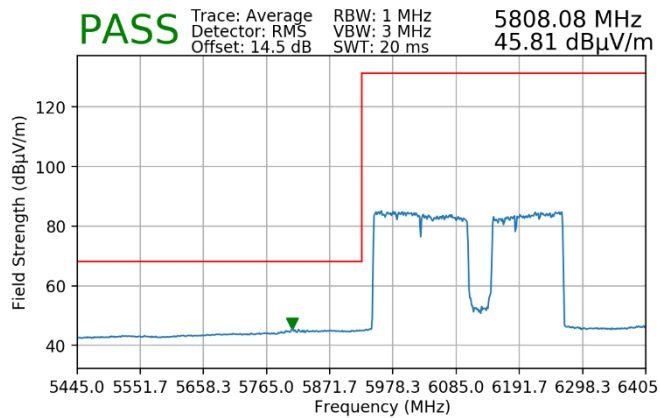


Plot 7-135. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 3*996+484T)

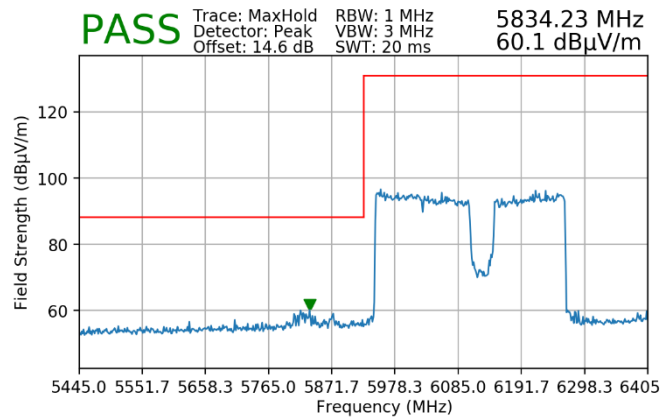


Plot 7-136. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 3*996+484T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	01104
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

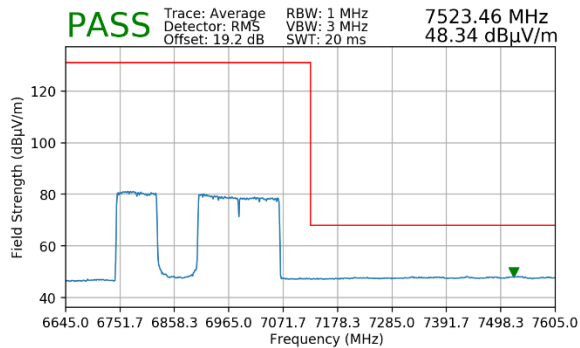

Plot 7-137. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 3*996+484T)

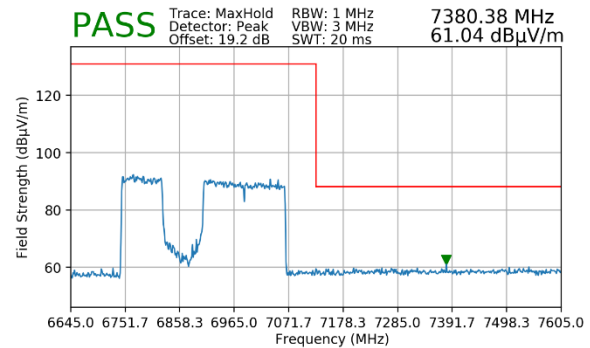

Plot 7-138. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 3*996+484T)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 108 of 109

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Tablet FCC ID: A3LSMX930, IC: 649E-SMX930** is in compliance with FCC Part Subpart E (15.407) of the FCC rules and RSS-248 of the ISED Canada Rules for operation as a Very Low Power Device.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-16.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 109 of 109