Mode	104	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	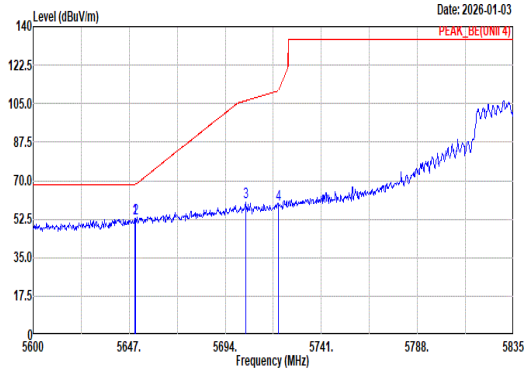 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.59 52.79 68.20 -15.41 42.24 33.00 10.34 32.79 0.00 230 67 Peak 2 5650.06 53.01 68.24 -15.23 42.47 33.00 10.33 32.79 0.00 230 67 Peak 3 5703.87 60.00 106.29 -46.29 49.15 33.42 10.24 32.81 0.00 230 67 Peak 4 5720.09 59.06 110.99 -51.93 48.17 33.48 10.22 32.81 0.00 230 67 Peak	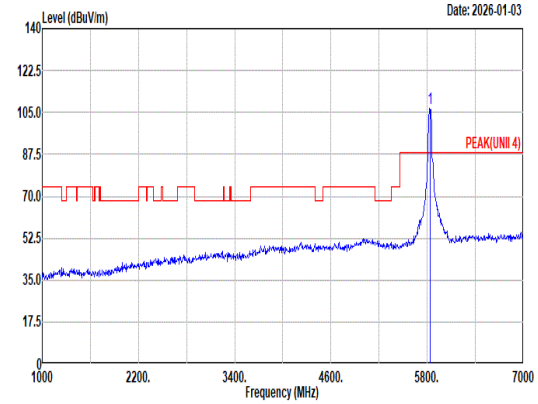 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 106.87 ------ ------ 95.65 33.90 10.18 32.86 0.00 230 67 Peak
Avg	Blank	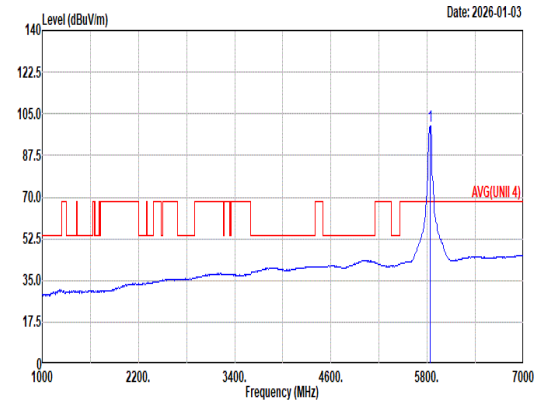 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 99.62 ------ ------ 88.37 33.90 10.21 32.86 0.00 230 67 Average

Mode	104	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	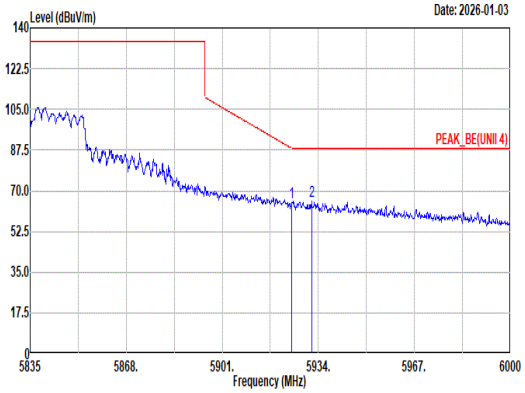 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.93 64.79 88.25 -23.46 53.05 34.15 10.48 32.89 0.00 230 67 Peak 2 5931.69 65.53 88.20 -22.67 53.76 34.16 10.50 32.89 0.00 230 67 Peak	Blank
Avg	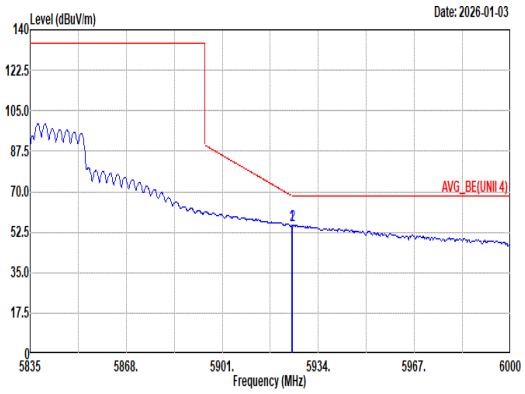 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.93 55.46 68.25 -12.79 43.72 34.15 10.48 32.89 0.00 230 67 Average 2 5925.09 55.53 68.20 -12.67 43.79 34.15 10.48 32.89 0.00 230 67 Average	Blank

Mode	104	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	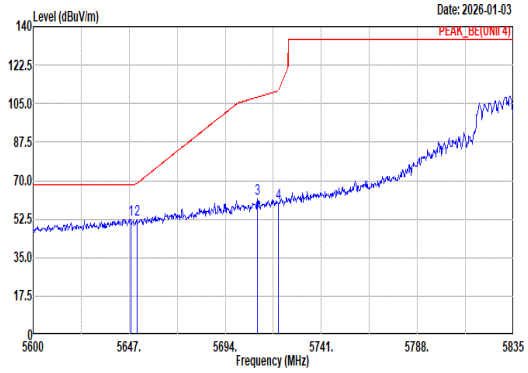 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5647.71 52.50 68.20 -15.70 41.96 32.99 10.34 32.79 0.00 106 343 Peak 2 5650.76 52.56 68.76 -16.20 42.01 33.01 10.33 32.79 0.00 106 343 Peak 3 5709.75 61.72 107.93 -46.21 50.86 33.44 10.23 32.81 0.00 106 343 Peak 4 5720.09 59.89 110.99 -51.10 49.00 33.48 10.22 32.81 0.00 106 343 Peak	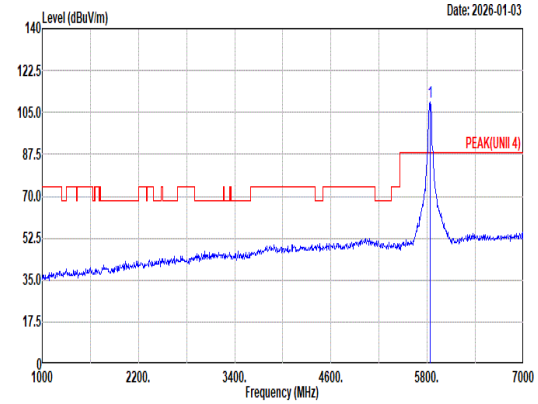 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5835.00 109.11 ------ ------ 97.87 33.90 10.20 32.86 0.00 106 343 Peak
Avg	Blank	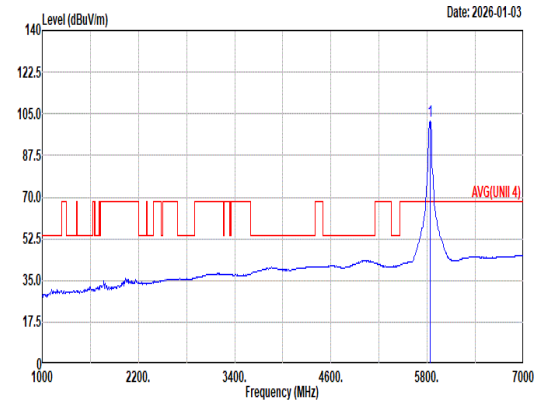 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5835.00 101.98 ------ ------ 90.74 33.90 10.20 32.86 0.00 106 343 Average

Mode	104	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	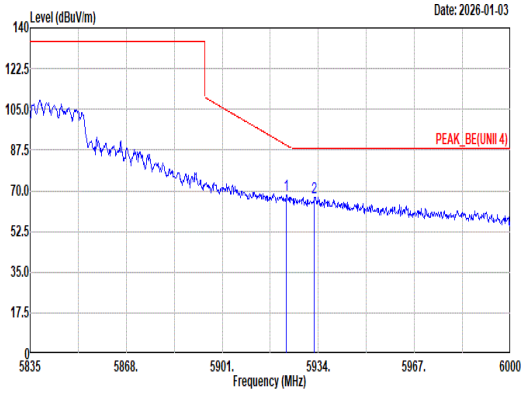 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5922.95 68.32 89.70 -21.38 56.59 34.15 10.47 32.89 0.00 106 343 Peak 2 5932.68 67.33 88.20 -20.87 55.55 34.17 10.50 32.89 0.00 106 343 Peak	Blank
Avg	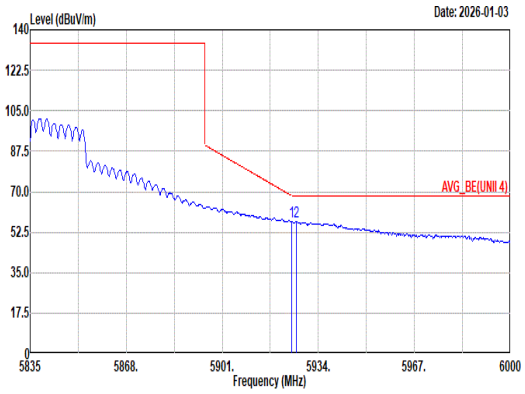 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.93 57.07 68.25 -11.18 45.33 34.15 10.48 32.89 0.00 106 343 Average 2 5926.41 57.18 68.20 -11.02 45.44 34.15 10.48 32.89 0.00 106 343 Average	Blank

Mode	104	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	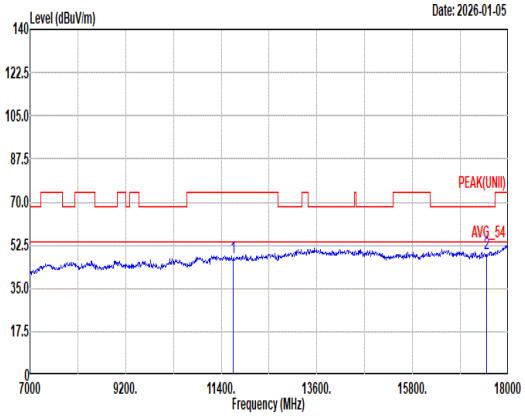 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11670.00 47.64 74.00 -26.36 57.04 38.54 17.64 66.03 0.45 -- -- Peak 2 17505.00 49.10 68.20 -19.10 54.45 38.63 21.75 66.22 0.49 -- -- Peak	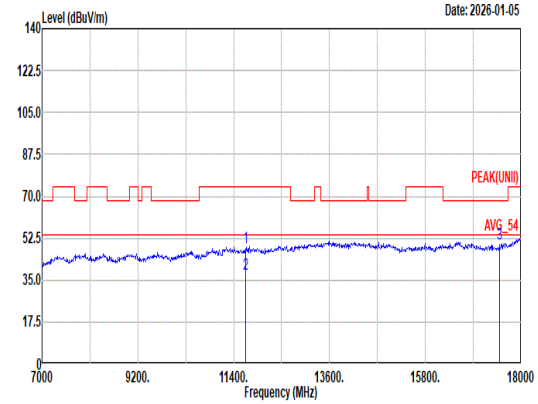 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11670.00 48.37 74.00 -25.63 57.77 38.54 17.64 66.03 0.45 -- -- Peak 2 11670.00 37.45 54.00 -16.55 46.85 38.54 17.64 66.03 0.45 -- -- Average 3 17505.00 49.94 68.20 -18.26 55.29 38.63 21.75 66.22 0.49 -- -- Peak

Mode	104	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	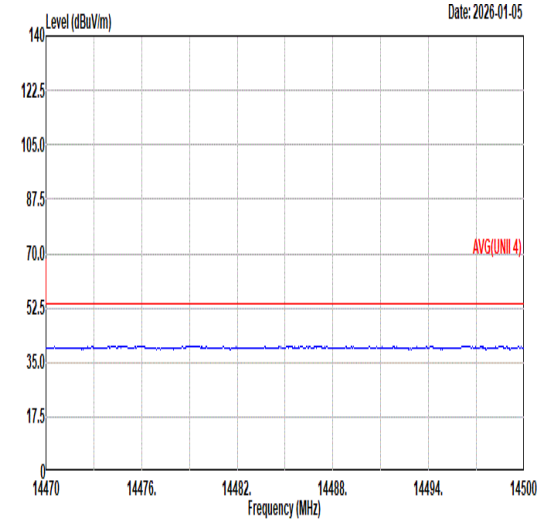 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	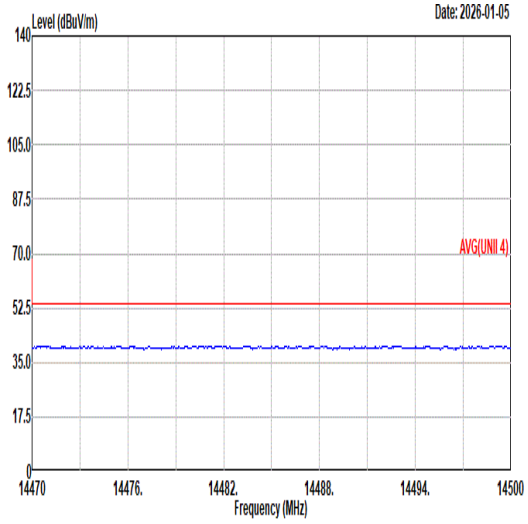 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL
17.7G ~18G Avg	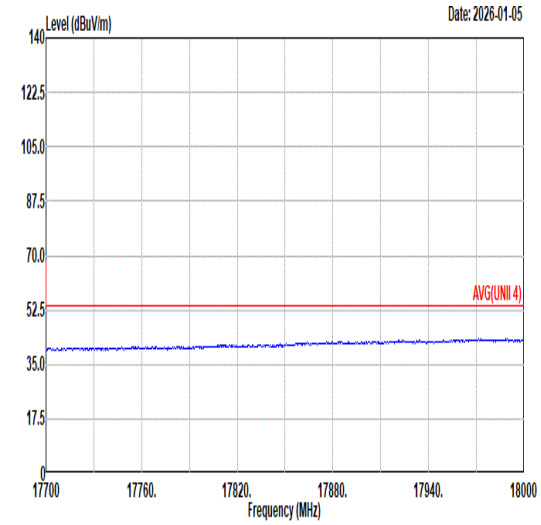 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	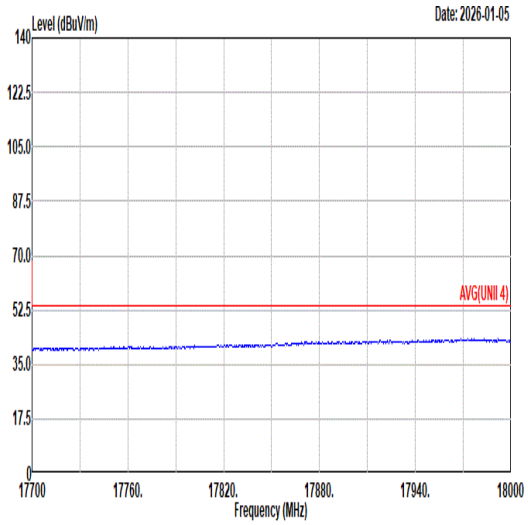 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL

Mode	105	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	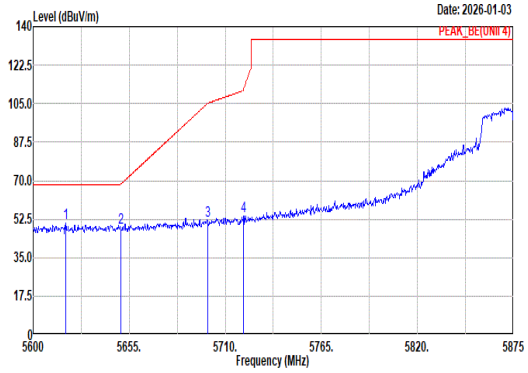 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5618.70 50.51 68.20 -17.69 40.09 32.81 10.39 32.78 0.00 100 298 Peak 2 5650.05 48.82 68.24 -19.42 38.28 33.00 10.33 32.79 0.00 100 298 Peak 3 5700.10 51.74 105.23 -53.49 40.90 33.40 10.25 32.81 0.00 100 298 Peak 4 5720.45 53.65 111.83 -58.18 42.76 33.48 10.22 32.81 0.00 100 298 Peak	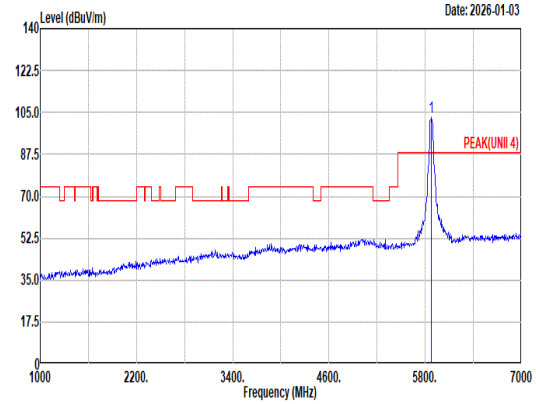 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 103.04 ------ ------ 91.57 34.01 10.33 32.87 0.00 100 298 Peak
Avg	Blank	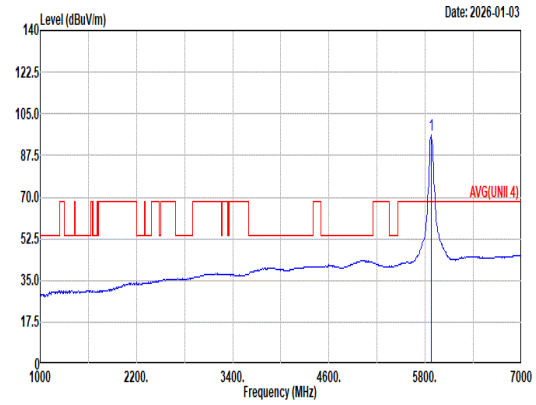 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 96.02 ------ ------ 84.59 33.99 10.31 32.87 0.00 100 298 Average

Mode	105	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	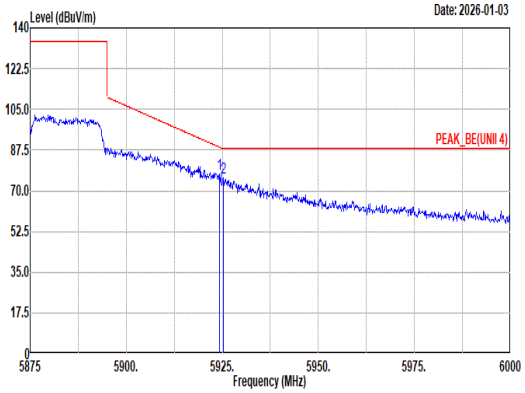 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.25 77.30 88.75 -11.45 65.56 34.15 10.48 32.89 0.00 100 298 Peak 2 5925.38 75.42 88.20 -12.78 63.68 34.15 10.48 32.89 0.00 100 298 Peak	Blank
Avg	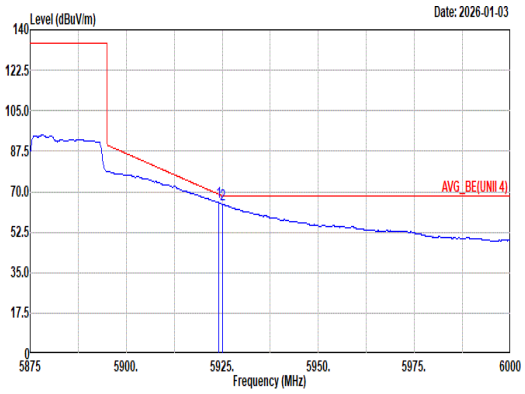 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.00 65.34 68.93 -3.59 53.60 34.15 10.48 32.89 0.00 100 298 Average 2 5925.00 64.58 68.20 -3.62 52.84 34.15 10.48 32.89 0.00 100 298 Average	Blank

Mode	105	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	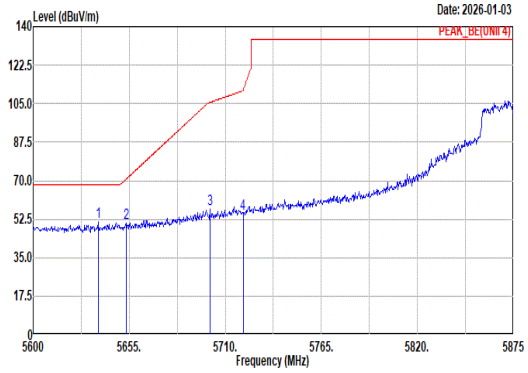 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5637.13 51.36 68.20 -16.84 40.86 32.92 10.36 32.78 0.00 124 318 Peak 2 5653.35 50.87 70.69 -19.82 40.30 33.03 10.33 32.79 0.00 124 318 Peak 3 5701.20 56.80 105.54 -48.74 45.96 33.40 10.25 32.81 0.00 124 318 Peak 4 5720.18 54.92 111.20 -56.28 44.03 33.48 10.22 32.81 0.00 124 318 Peak	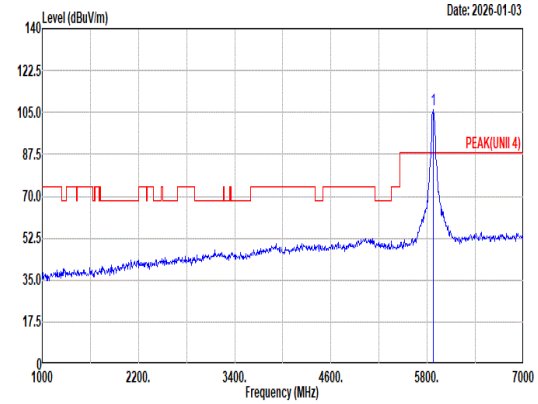 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 106.09 ------ ------ 94.66 33.99 10.31 32.87 0.00 124 318 Peak
Avg	Blank	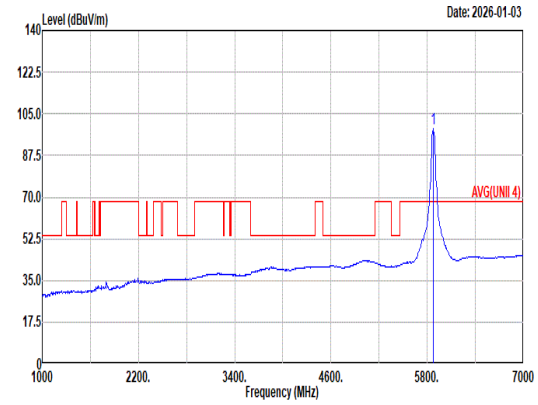 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 98.66 ------ ------ 87.23 33.99 10.31 32.87 0.00 124 318 Average

Mode	105	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	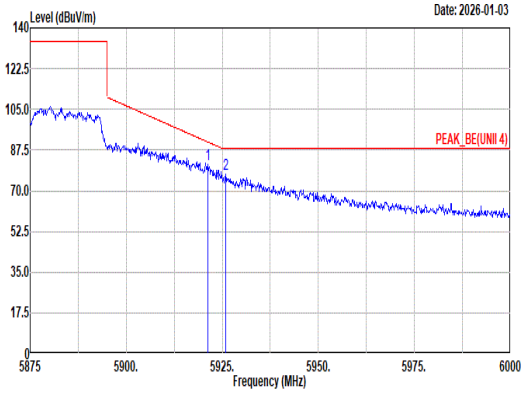 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5921.25 81.37 90.94 -9.57 69.65 34.14 10.47 32.89 0.00 124 318 Peak 2 5925.88 77.03 88.20 -11.17 65.29 34.15 10.48 32.89 0.00 124 318 Peak	Blank
Avg	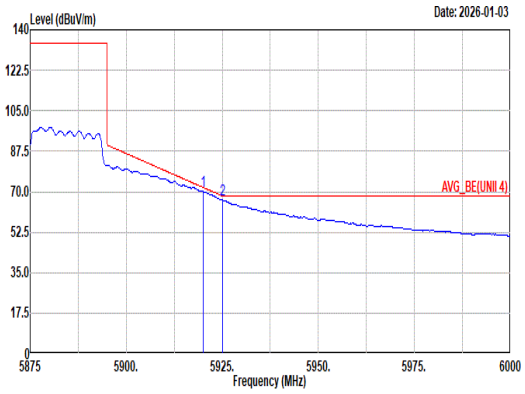 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5920.13 70.12 71.77 -1.65 58.41 34.14 10.46 32.89 0.00 124 318 Average 2 5925.00 66.31 68.20 -1.89 54.57 34.15 10.48 32.89 0.00 124 318 Average	Blank

Mode	105	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	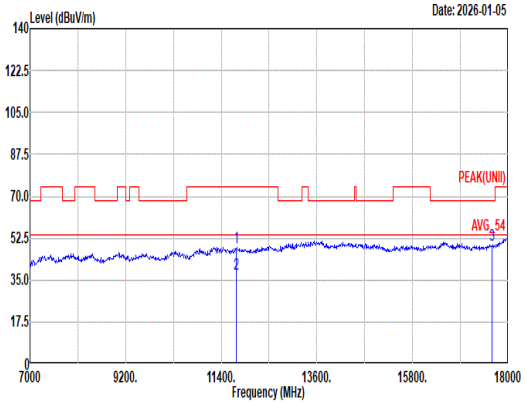 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11750.00 48.49 74.00 -25.51 57.92 38.40 17.71 66.00 0.46 -- -- Peak 2 11750.00 37.30 54.00 -16.70 46.73 38.40 17.71 66.00 0.46 -- -- Average 3 17625.00 49.65 68.20 -18.55 55.00 39.15 21.82 66.82 0.50 -- -- Peak	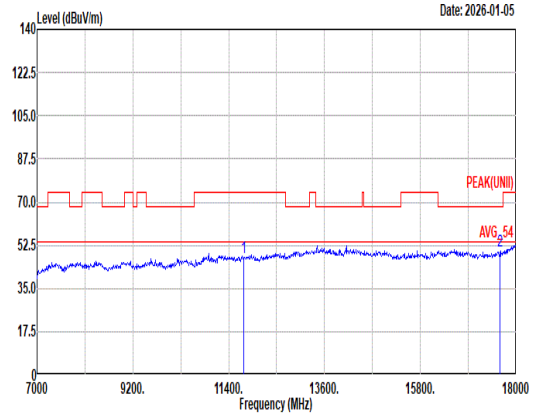 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11750.00 47.68 74.00 -26.32 57.11 38.40 17.71 66.00 0.46 -- -- Peak 2 17625.00 50.03 68.20 -18.17 55.38 39.15 21.82 66.82 0.50 -- -- Peak

Mode	105	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	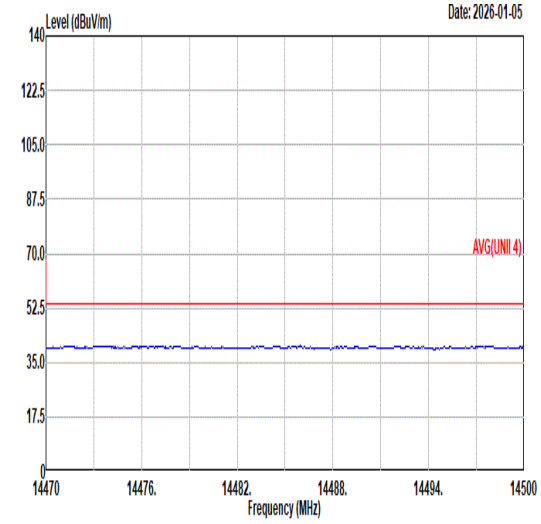 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	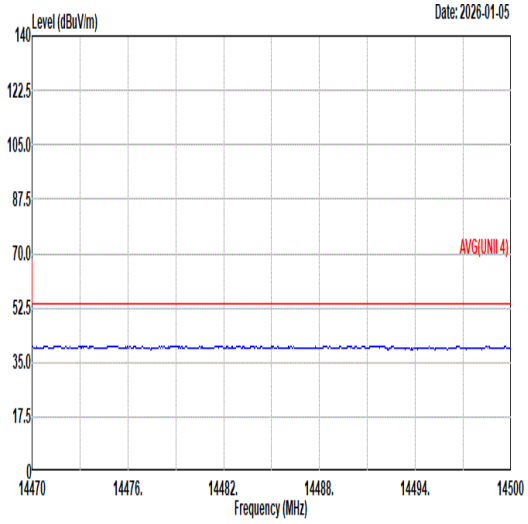 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL
17.7G ~18G Avg	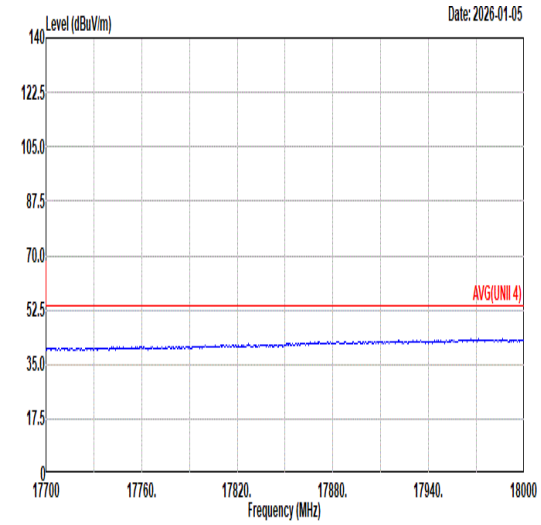 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	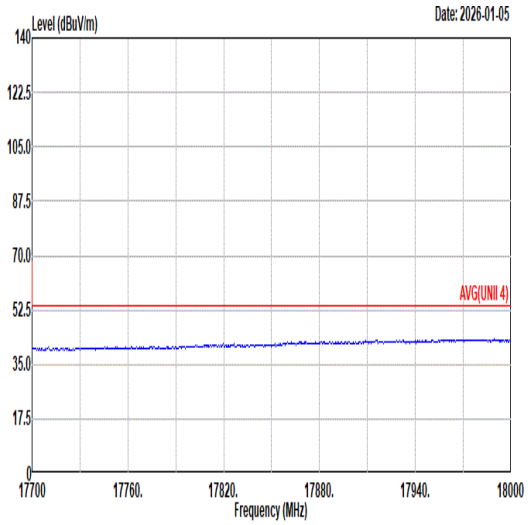 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL

Mode	106	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	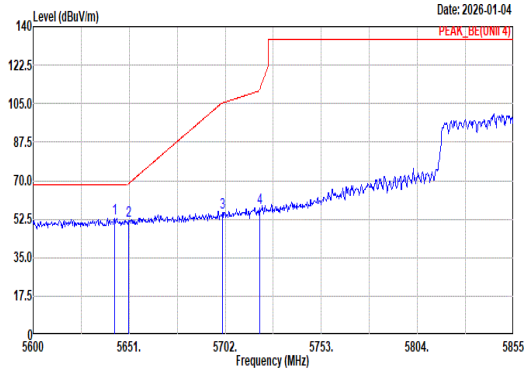 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5643.10 53.05 68.20 -15.15 42.52 32.96 10.35 32.78 0.00 100 11 Peak 2 5650.49 51.68 68.56 -16.88 41.14 33.00 10.33 32.79 0.00 100 11 Peak 3 5700.47 55.67 105.33 -49.66 44.83 33.40 10.25 32.81 0.00 100 11 Peak 4 5720.11 57.39 111.04 -53.65 46.50 33.48 10.22 32.81 0.00 100 11 Peak	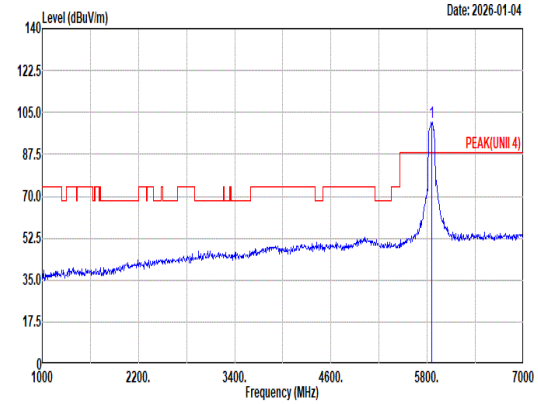 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 100.80 ------ ------ 89.42 33.96 10.29 32.87 0.00 100 11 Peak
Avg	Blank	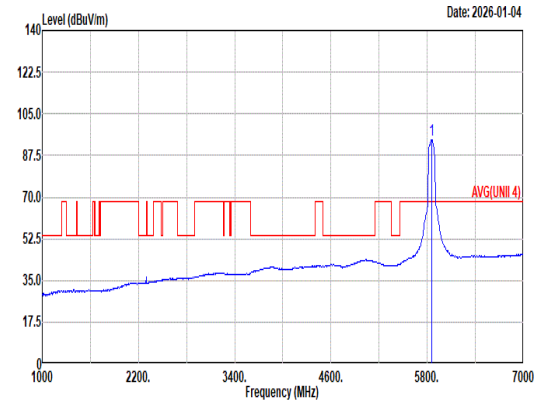 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 94.19 ------ ------ 82.81 33.96 10.29 32.87 0.00 100 11 Average

Mode	106	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	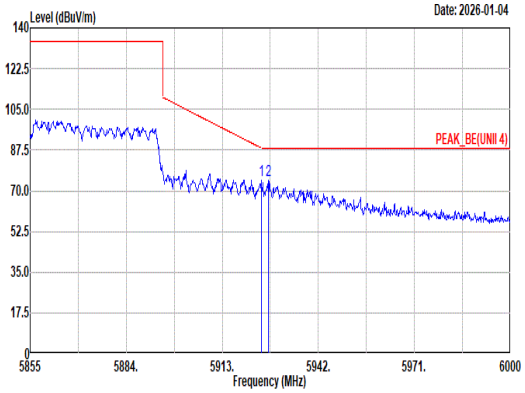 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.75 74.36 88.39 -14.03 62.62 34.15 10.48 32.89 0.00 100 11 Peak 2 5926.92 74.74 88.20 -13.46 62.99 34.15 10.49 32.89 0.00 100 11 Peak	Blank
Avg	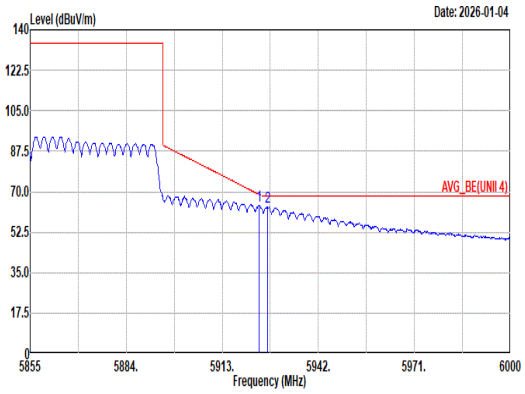 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.02 63.93 68.92 -4.99 52.19 34.15 10.48 32.89 0.00 100 11 Average 2 5926.63 63.57 68.20 -4.63 51.82 34.15 10.49 32.89 0.00 100 11 Average	Blank

Mode	106	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	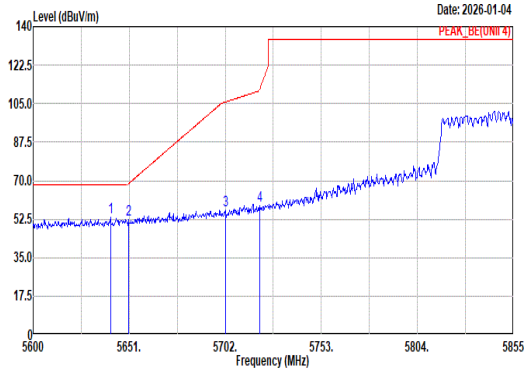 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5641.06 53.25 68.20 -14.95 42.73 32.95 10.35 32.78 0.00 100 358 Peak 2 5650.49 52.18 68.56 -16.38 41.64 33.00 10.33 32.79 0.00 100 358 Peak 3 5702.26 56.66 105.83 -49.17 45.81 33.41 10.25 32.81 0.00 100 358 Peak 4 5720.11 58.67 111.04 -52.37 47.78 33.48 10.22 32.81 0.00 100 358 Peak	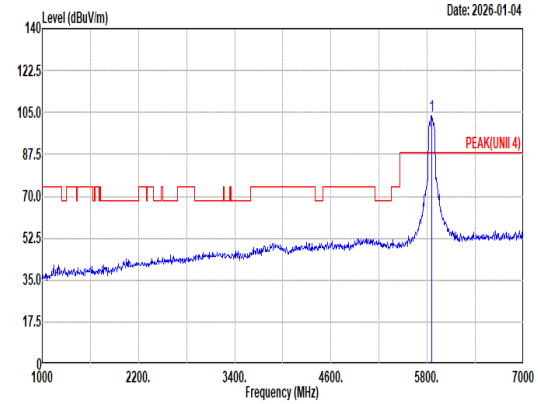 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 103.57 ------ ------ 92.32 33.90 10.21 32.86 0.00 100 358 Peak
Avg	Blank	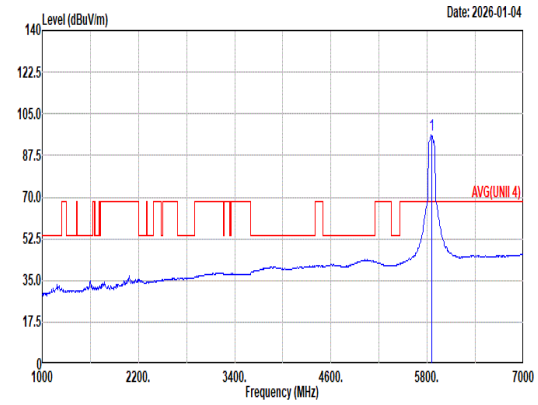 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 96.14 ------ ------ 84.89 33.90 10.21 32.86 0.00 100 358 Average

Mode	106	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	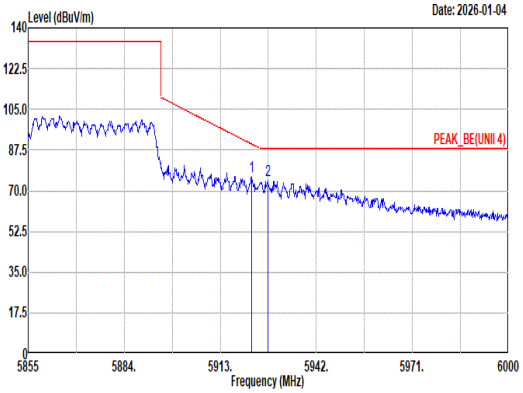 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5922.43 76.18 90.08 -13.90 64.46 34.14 10.47 32.89 0.00 100 358 Peak 2 5927.36 74.65 88.20 -13.55 62.90 34.15 10.49 32.89 0.00 100 358 Peak	Blank
Avg	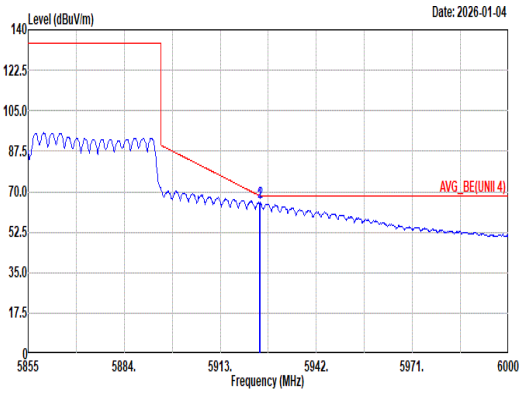 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.89 65.13 68.28 -3.15 53.39 34.15 10.48 32.89 0.00 100 358 Average 2 5925.04 65.30 68.20 -2.90 53.56 34.15 10.48 32.89 0.00 100 358 Average	Blank

Mode	106	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	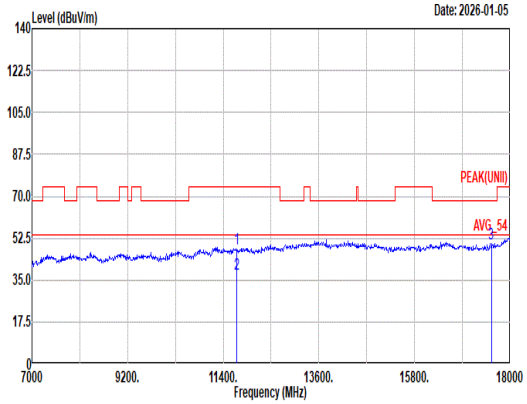 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11710.00 48.06 74.00 -25.94 57.40 38.56 17.67 66.02 0.45 -- -- Peak 2 11710.00 37.25 54.00 -16.75 46.59 38.56 17.67 66.02 0.45 -- -- Average 3 17565.00 50.41 68.20 -17.79 55.68 38.96 21.79 66.52 0.50 -- -- Peak	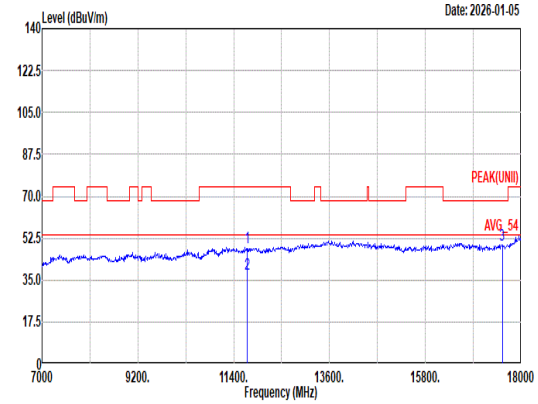 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11710.00 48.54 74.00 -25.46 57.88 38.56 17.67 66.02 0.45 -- -- Peak 2 11710.00 37.47 54.00 -16.53 46.81 38.56 17.67 66.02 0.45 -- -- Average 3 17565.00 49.63 68.20 -18.57 54.90 38.96 21.79 66.52 0.50 -- -- Peak

Mode	106	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	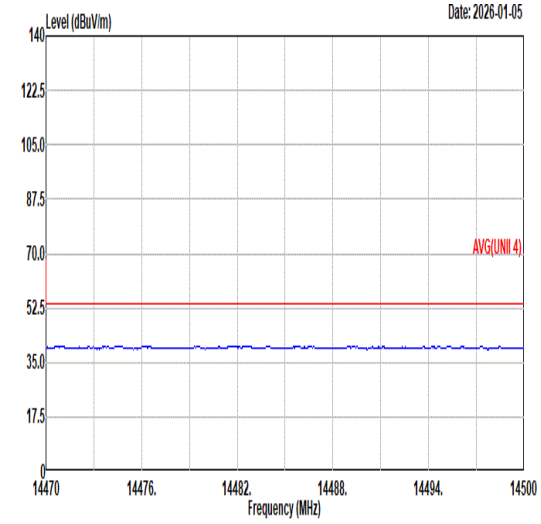 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	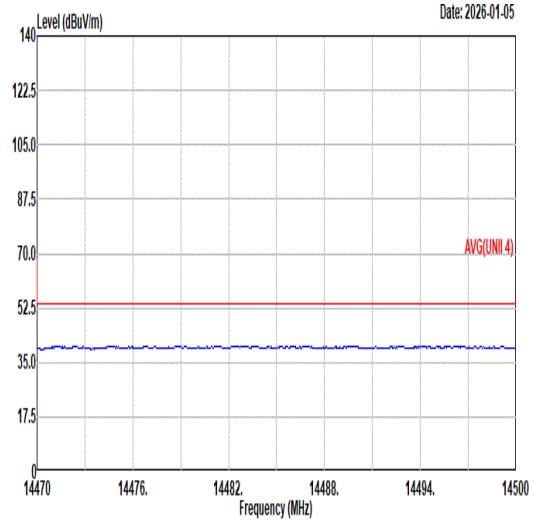 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL
17.7G ~18G Avg	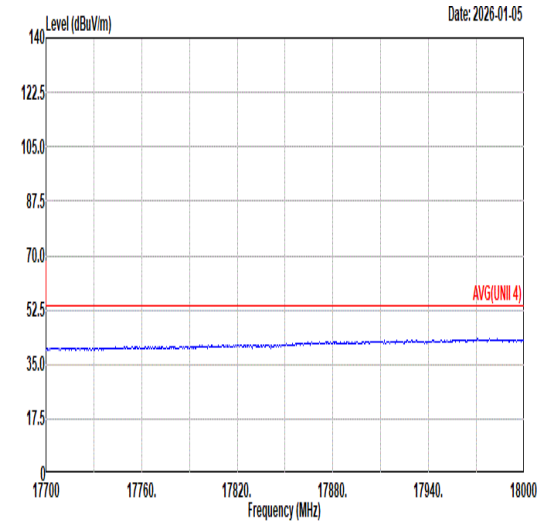 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	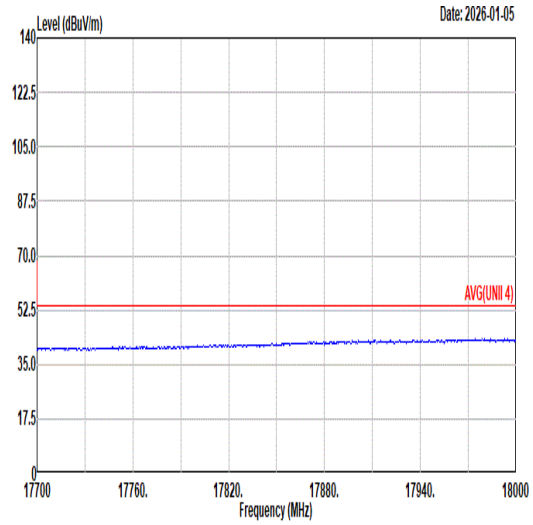 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL

Mode	107
	Band Edge - L
	U-NII-4_5.85-5.895_802.11ac VHT160_CH163_5815MHz
ANT	3+4

Pol.	Horizontal	Fundamental
Peak	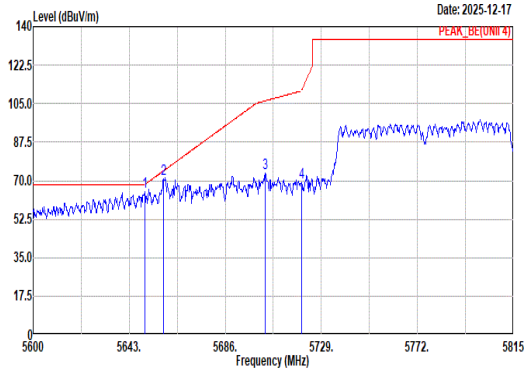 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.88 64.84 68.20 -3.36 54.29 33.00 10.34 32.79 0.00 238 71 Peak 2 5658.48 70.95 74.50 -3.55 60.35 33.07 10.32 32.79 0.00 238 71 Peak 3 5703.85 73.24 106.28 -33.04 62.39 33.42 10.24 32.81 0.00 238 71 Peak 4 5720.19 68.95 111.22 -42.27 58.06 33.48 10.22 32.81 0.00 238 71 Peak	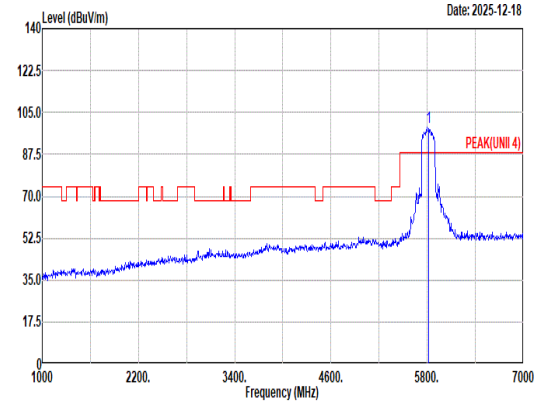 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5815.00 98.67 ------ ------ 87.56 33.86 10.09 32.84 0.00 238 71 Peak
Avg	Blank	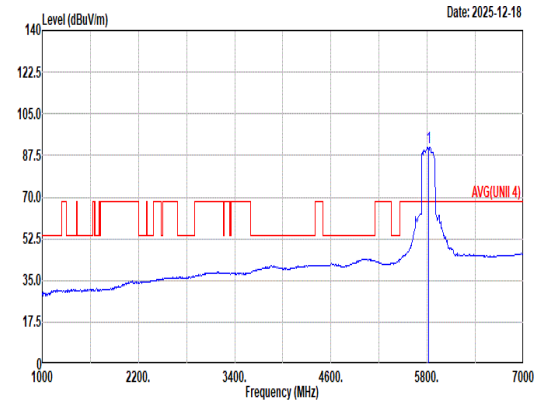 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5815.00 90.99 ------ ------ 79.75 33.90 10.20 32.86 0.00 238 71 Average

Mode	107	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ac VHT160_CH163_5815MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	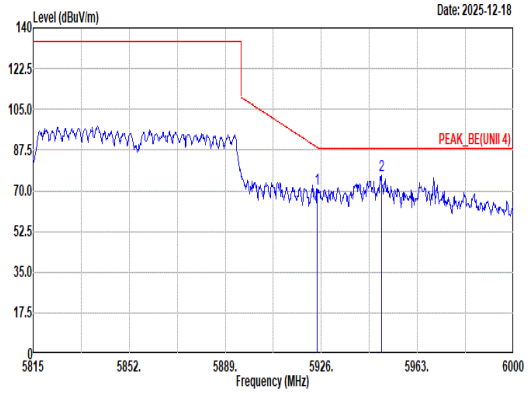 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.34 70.88 88.69 -17.81 59.14 34.15 10.48 32.89 0.00 238 71 Peak 2 5949.13 76.44 88.20 -11.76 64.58 34.20 10.56 32.90 0.00 238 71 Peak	Blank
Avg	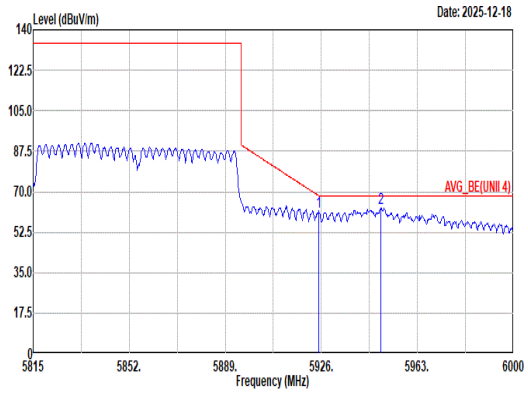 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.89 61.09 68.28 -7.19 49.35 34.15 10.48 32.89 0.00 238 71 Average 2 5948.94 63.01 68.20 -5.19 51.15 34.20 10.56 32.90 0.00 238 71 Average	Blank

Mode	107	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ac VHT160_CH163_5815MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	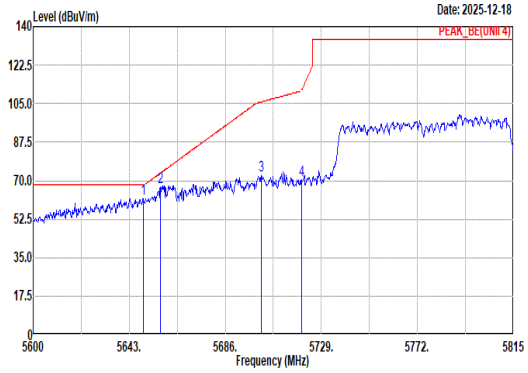 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.24 61.96 68.20 -6.24 51.41 33.00 10.34 32.79 0.00 100 342 Peak 2 5656.98 66.93 73.38 -6.45 56.34 33.06 10.32 32.79 0.00 100 342 Peak 3 5702.13 72.23 105.80 -33.57 61.38 33.41 10.25 32.81 0.00 100 342 Peak 4 5720.19 70.18 111.22 -41.04 59.29 33.48 10.22 32.81 0.00 100 342 Peak	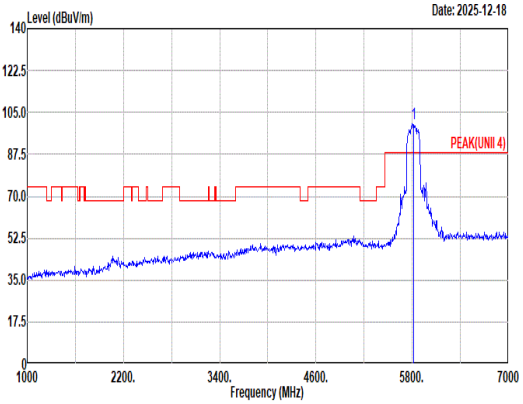 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5815.00 100.43 ------ ------ 89.32 33.86 10.09 32.84 0.00 100 342 Peak
Avg	Blank	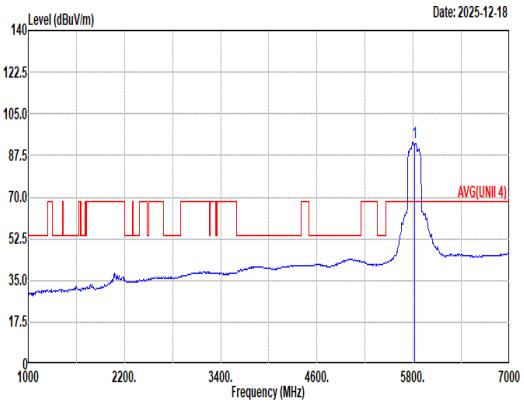 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5815.00 93.00 ------ ------ 81.91 33.83 10.10 32.84 0.00 100 342 Average

Mode	107	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ac VHT160_CH163_5815MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	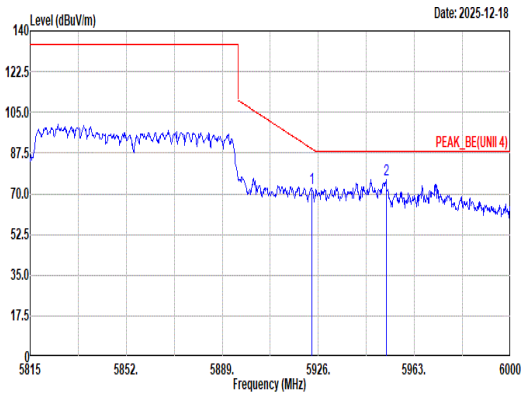 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.41 72.55 89.36 -16.81 60.82 34.15 10.47 32.89 0.00 100 342 Peak 2 5952.09 75.95 88.20 -12.25 64.08 34.20 10.57 32.90 0.00 100 342 Peak	Blank
Avg	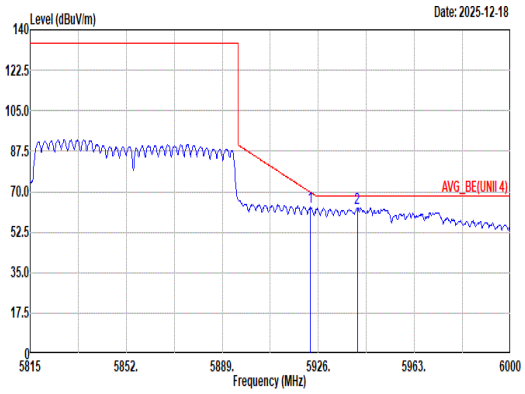 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5922.86 63.55 69.77 -6.22 51.82 34.15 10.47 32.89 0.00 100 342 Average 2 5940.99 63.07 68.20 -5.13 51.26 34.18 10.53 32.90 0.00 100 342 Average	Blank

Mode	107	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ac VHT160_CH163_5815MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	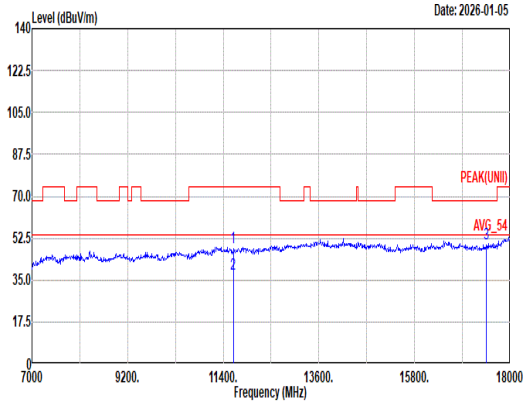 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11630.00 48.66 74.00 -25.34 58.13 38.54 17.60 66.05 0.44 -- -- Peak 2 11630.00 37.45 54.00 -16.55 46.92 38.54 17.60 66.05 0.44 -- -- Average 3 17445.00 49.94 68.20 -18.26 55.40 38.51 21.71 66.16 0.48 -- -- Peak	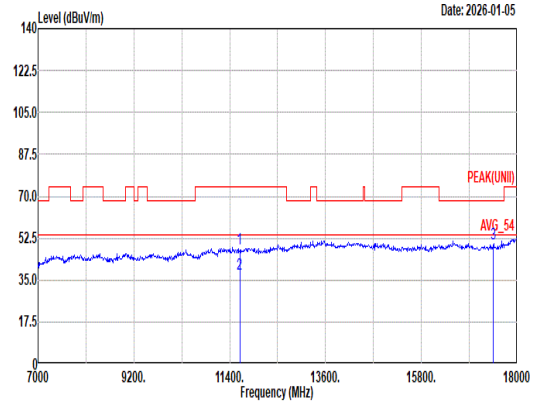 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11630.00 48.18 74.00 -25.82 57.65 38.54 17.60 66.05 0.44 -- -- Peak 2 11630.00 37.27 54.00 -16.73 46.74 38.54 17.60 66.05 0.44 -- -- Average 3 17445.00 49.94 68.20 -18.26 55.40 38.51 21.71 66.16 0.48 -- -- Peak

Mode	107	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ac VHT160_CH163_5815MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	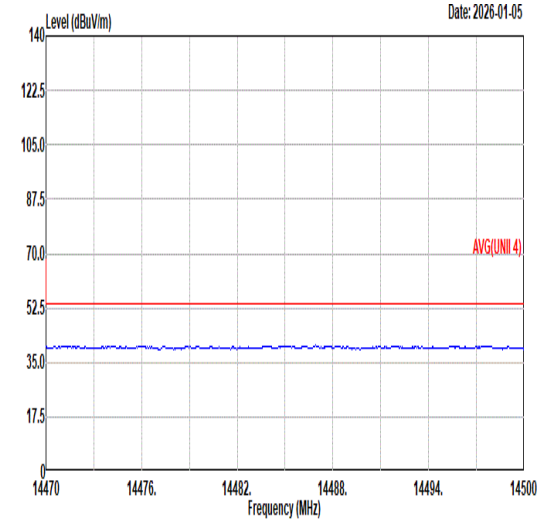 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	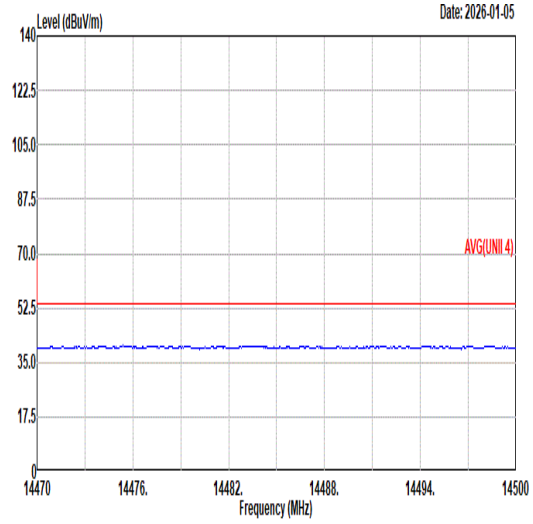 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL
17.7G ~18G Avg	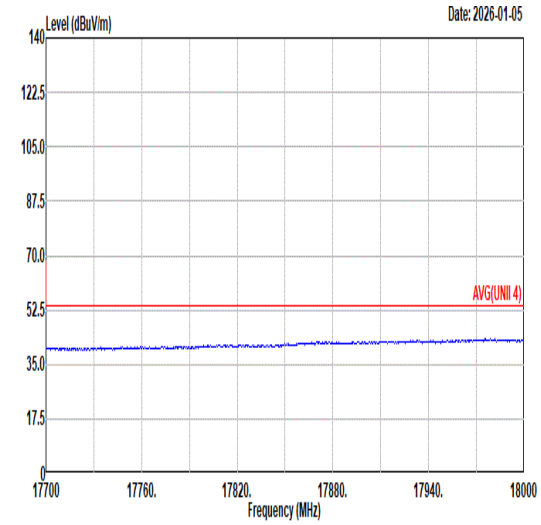 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	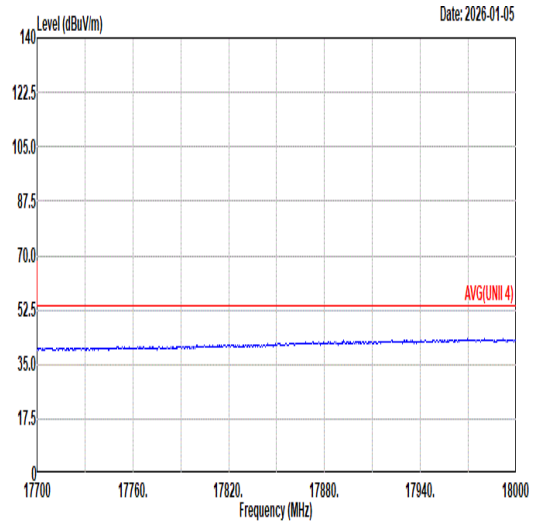 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL

Mode	108
	Band Edge - L
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Full RU_5845MHz
ANT	3+4

Pol.	Horizontal	Fundamental
Peak	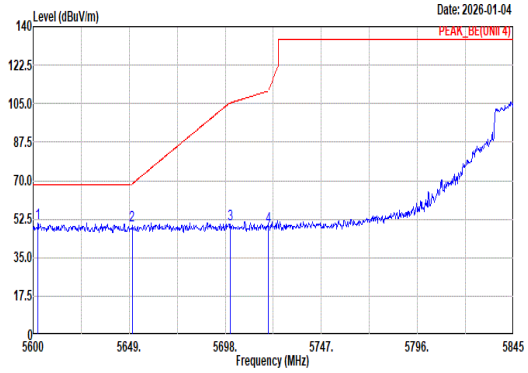 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5602.45 50.65 68.20 -17.55 40.29 32.71 10.42 32.77 0.00 100 306 Peak 2 5650.47 49.79 68.55 -18.76 39.25 33.00 10.33 32.79 0.00 100 306 Peak 3 5700.45 50.24 105.33 -55.09 39.40 33.40 10.25 32.81 0.00 100 306 Peak 4 5720.05 49.05 110.91 -61.86 38.16 33.48 10.22 32.81 0.00 100 306 Peak	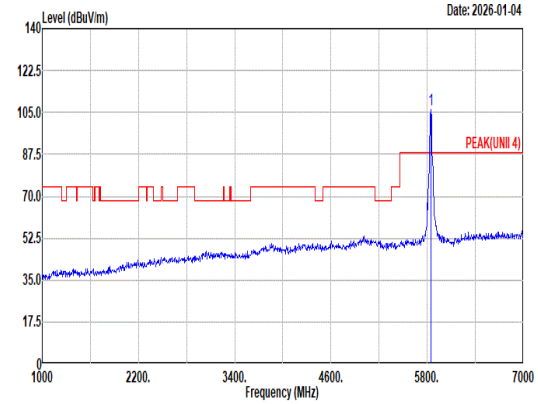 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 105.94 ------ ------ 94.69 33.90 10.21 32.86 0.00 100 306 Peak
Avg	Blank	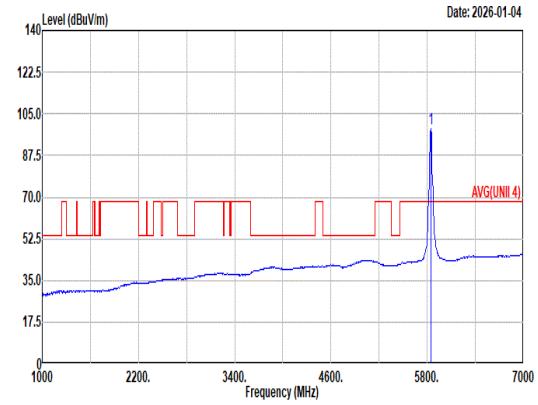 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 98.87 ------ ------ 87.62 33.90 10.21 32.86 0.00 100 306 Average

Mode	108	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Full RU_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	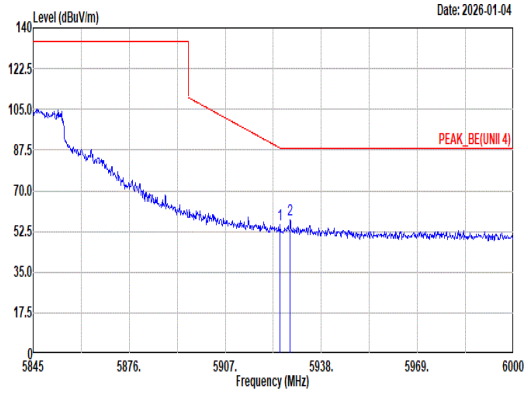 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.67 55.67 88.44 -32.77 43.93 34.15 10.48 32.89 0.00 100 306 Peak 2 5927.93 57.38 88.20 -30.82 45.62 34.16 10.49 32.89 0.00 100 306 Peak	Blank
Avg	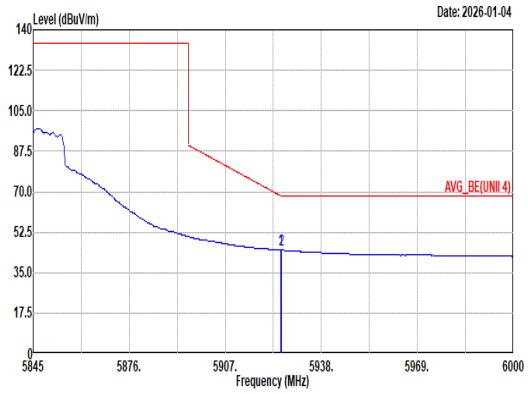 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.98 44.82 68.21 -23.39 33.08 34.15 10.48 32.89 0.00 100 306 Average 2 5925.14 44.76 68.20 -23.44 33.02 34.15 10.48 32.89 0.00 100 306 Average	Blank

Mode	108
	Band Edge - L
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Full RU_5845MHz
ANT	3+4

Pol.	Vertical	Fundamental
Peak	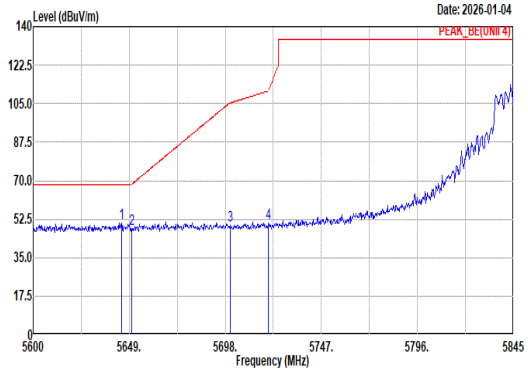 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5645.08 50.89 68.20 -17.31 40.37 32.97 10.34 32.79 0.00 106 4 Peak 2 5650.23 48.13 68.37 -20.24 37.59 33.00 10.33 32.79 0.00 106 4 Peak 3 5700.45 49.45 105.33 -55.88 38.61 33.40 10.25 32.81 0.00 106 4 Peak 4 5720.05 50.50 110.91 -60.41 39.61 33.48 10.22 32.81 0.00 106 4 Peak	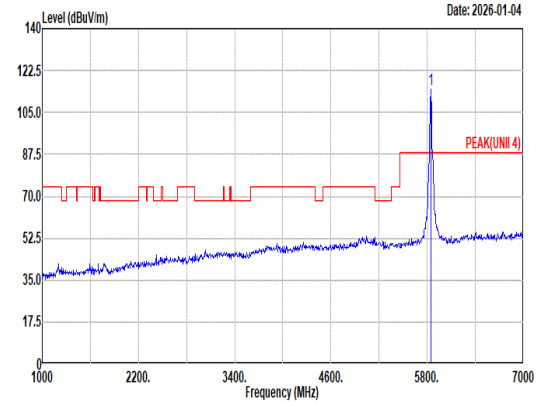 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 114.38 ------ ------ 103.13 33.90 10.21 32.86 0.00 106 4 Peak
Avg	Blank	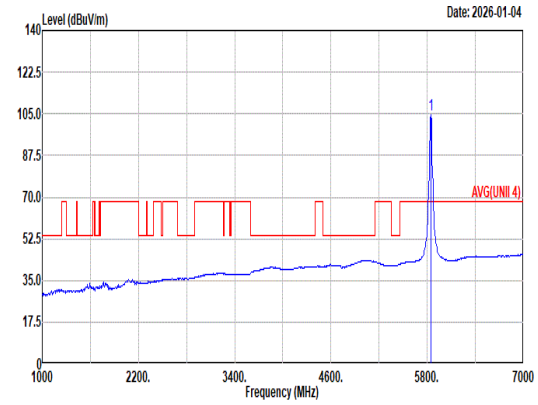 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 104.81 ------ ------ 93.56 33.90 10.21 32.86 0.00 106 4 Average

Mode	108	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Full RU_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	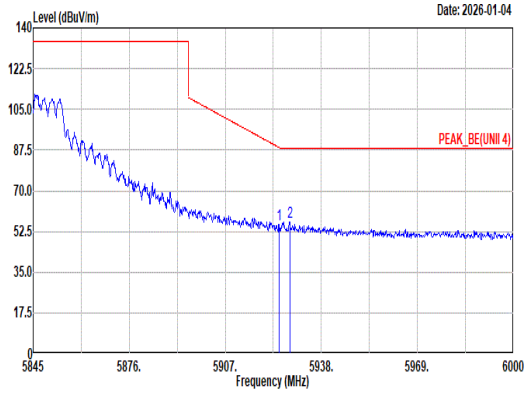 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.36 55.67 88.67 -33.00 43.93 34.15 10.48 32.89 0.00 106 4 Peak 2 5927.77 56.64 88.20 -31.56 44.88 34.16 10.49 32.89 0.00 106 4 Peak	Blank
Avg	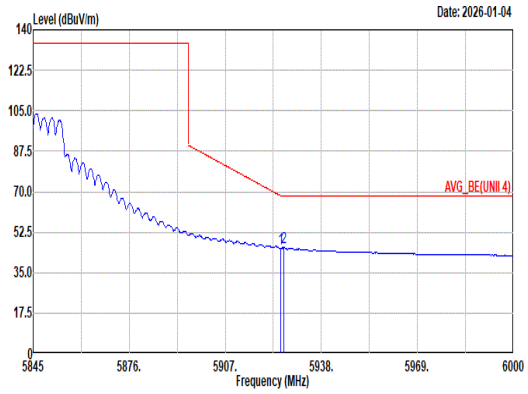 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.98 45.44 68.21 -22.77 33.70 34.15 10.48 32.89 0.00 106 4 Average 2 5925.91 45.84 68.20 -22.36 34.10 34.15 10.48 32.89 0.00 106 4 Average	Blank

Mode	108	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Full RU_5845MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	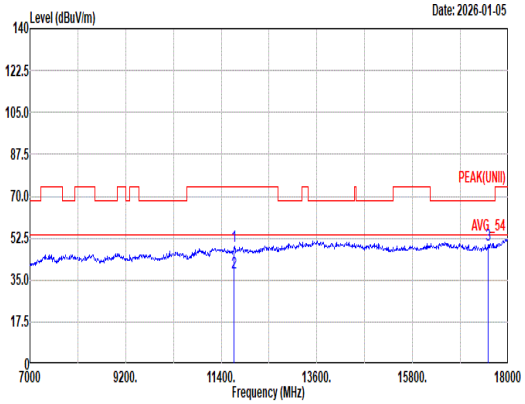 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11690.00 49.28 74.00 -24.72 58.62 38.58 17.65 66.02 0.45 -- -- Peak 2 11690.00 37.86 54.00 -16.14 47.20 38.58 17.65 66.02 0.45 -- -- Average 3 17535.00 49.61 68.20 -18.59 54.92 38.81 21.77 66.38 0.49 -- -- Peak	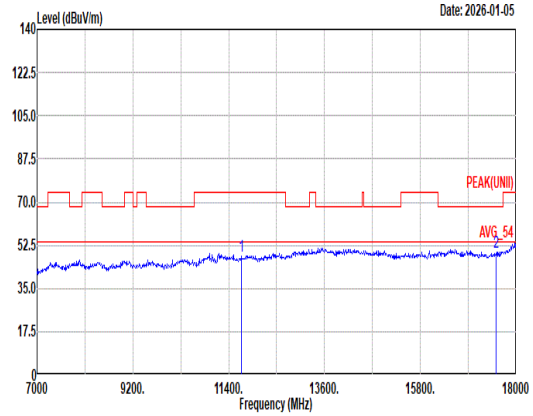 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11690.00 47.82 74.00 -26.18 57.16 38.58 17.65 66.02 0.45 -- -- Peak 2 17535.00 49.44 68.20 -18.76 54.75 38.81 21.77 66.38 0.49 -- -- Peak

Mode	108	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Full RU_5845MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	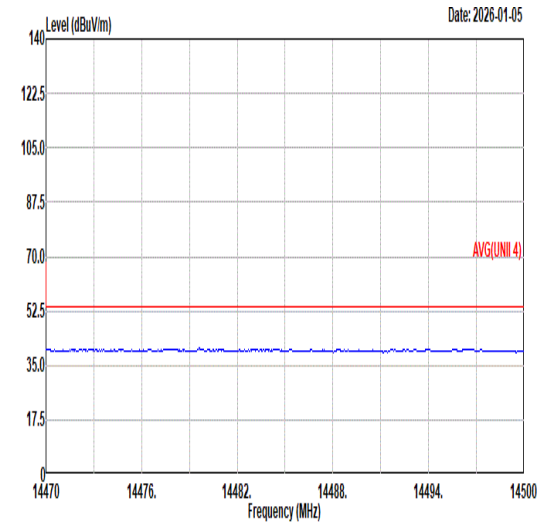 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	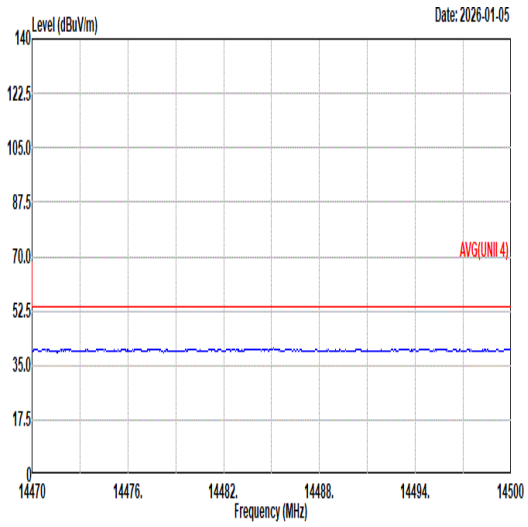 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL
17.7G ~18G Avg	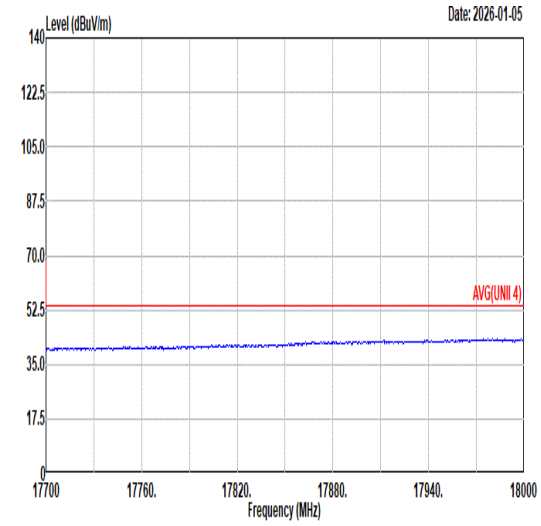 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	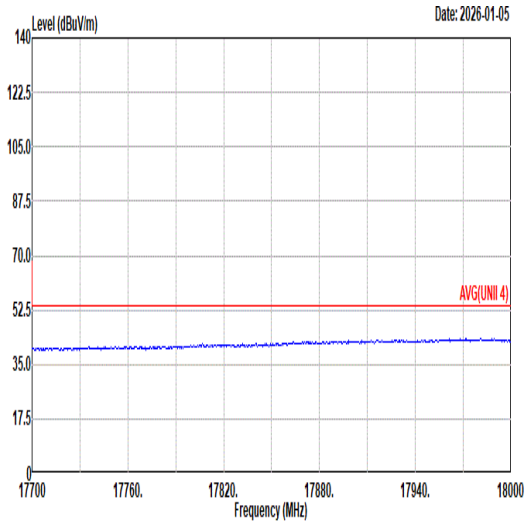 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL

Mode	109	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 26/0_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	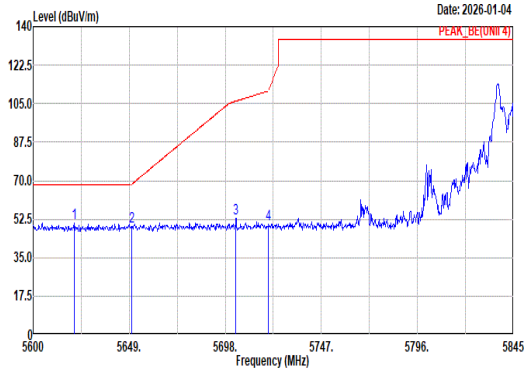 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5620.83 50.62 68.20 -17.58 40.20 32.82 10.38 32.78 0.00 200 360 Peak 2 5650.23 48.90 68.37 -19.47 38.36 33.00 10.33 32.79 0.00 200 360 Peak 3 5703.39 53.05 106.15 -53.10 42.21 33.41 10.24 32.81 0.00 200 360 Peak 4 5720.05 50.31 110.91 -60.60 39.42 33.48 10.22 32.81 0.00 200 360 Peak	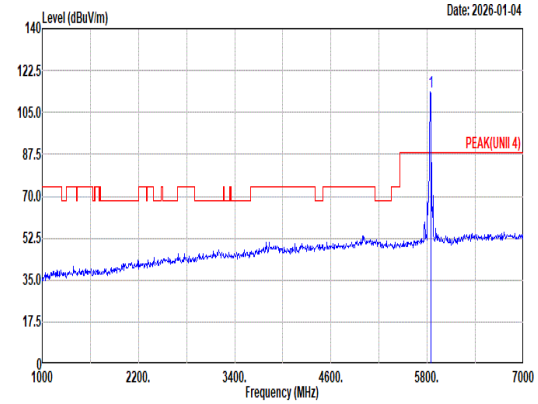 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5845.00 113.74 ------ ------ 102.50 33.90 10.20 32.86 0.00 200 360 Peak
Avg	Blank	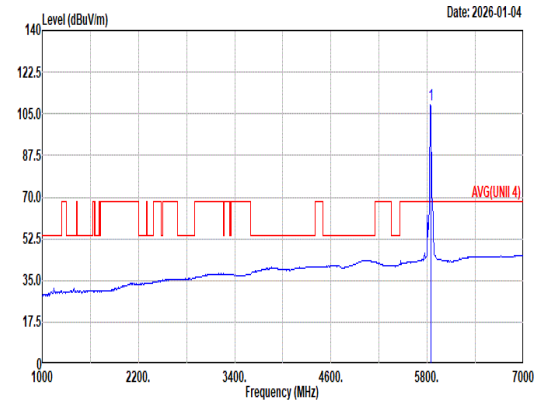 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto 1 5845.00 108.82 ------ ------ 97.58 33.90 10.20 32.86 0.00 200 360 Average

Mode	109	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 26/0_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	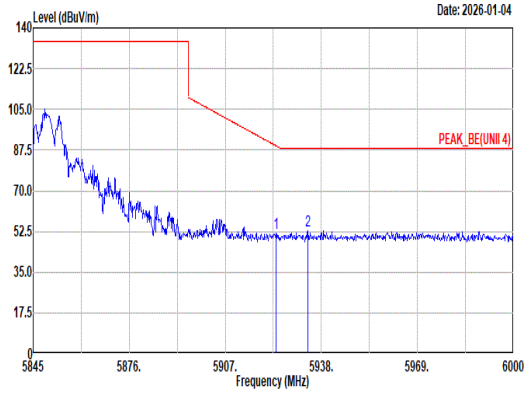 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.43 51.80 89.35 -37.55 40.07 34.15 10.47 32.89 0.00 200 360 Peak 2 5933.66 52.90 88.20 -35.30 41.11 34.17 10.51 32.89 0.00 200 360 Peak	Blank
Avg	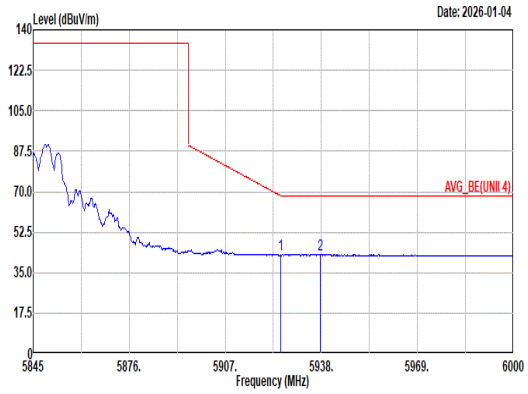 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.98 42.66 68.21 -25.55 30.92 34.15 10.48 32.89 0.00 200 360 Average 2 5937.69 42.83 68.20 -25.37 31.03 34.18 10.52 32.90 0.00 200 360 Average	Blank

Mode	109	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 26/0_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	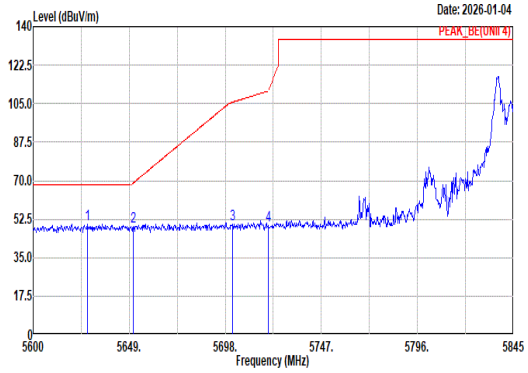 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5627.69 50.45 68.20 -17.75 39.99 32.87 10.37 32.78 0.00 123 341 Peak 2 5651.21 49.16 69.10 -19.94 38.61 33.01 10.33 32.79 0.00 123 341 Peak 3 5701.68 50.41 105.67 -55.26 39.56 33.41 10.25 32.81 0.00 123 341 Peak 4 5720.05 49.49 110.91 -61.42 38.60 33.48 10.22 32.81 0.00 123 341 Peak	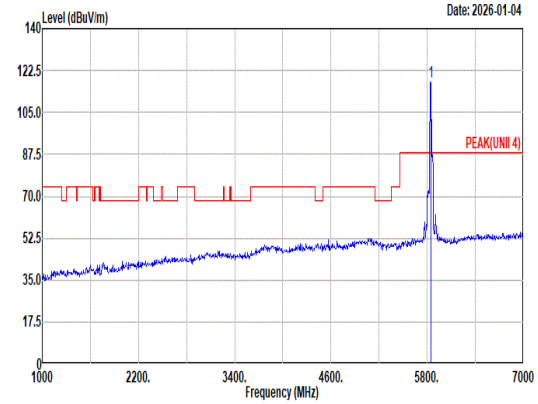 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 117.62 ------ ------ 106.38 33.90 10.20 32.86 0.00 123 341 Peak
Avg	Blank	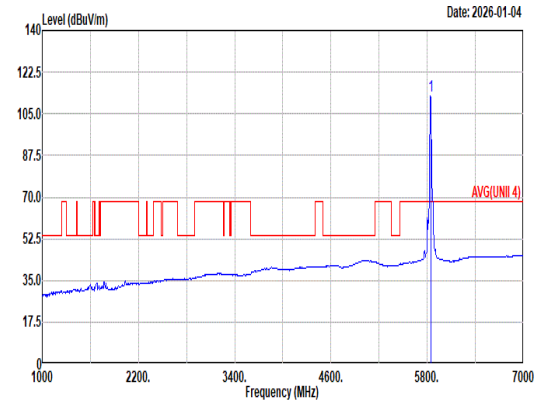 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 112.31 ------ ------ 101.07 33.90 10.20 32.86 0.00 123 341 Average

Mode	109	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 26/0_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	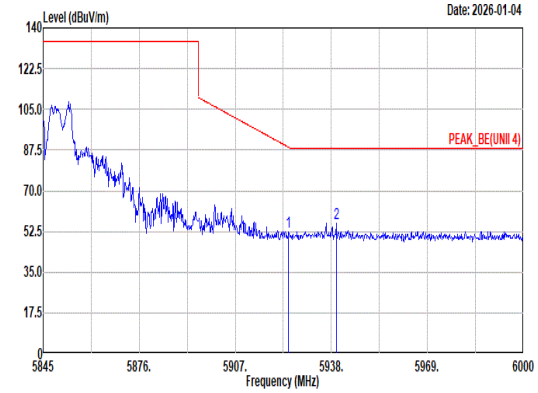 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.21 52.10 88.78 -36.68 40.36 34.15 10.48 32.89 0.00 123 341 Peak 2 5939.55 56.19 88.20 -32.01 44.38 34.18 10.53 32.90 0.00 123 341 Peak	Blank
Avg	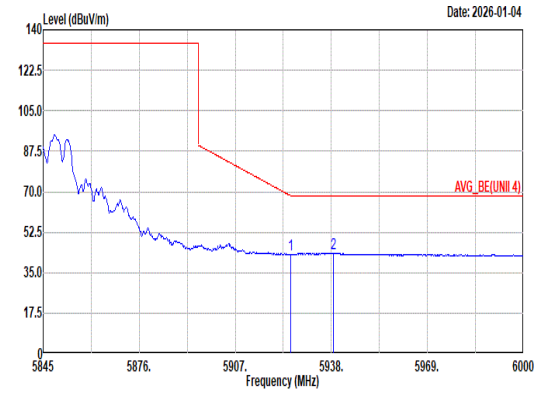 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.98 42.97 68.21 -25.24 31.23 34.15 10.48 32.89 0.00 123 341 Average 2 5938.62 43.56 68.20 -24.64 31.76 34.18 10.52 32.90 0.00 123 341 Average	Blank

Mode	110	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 52/37_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	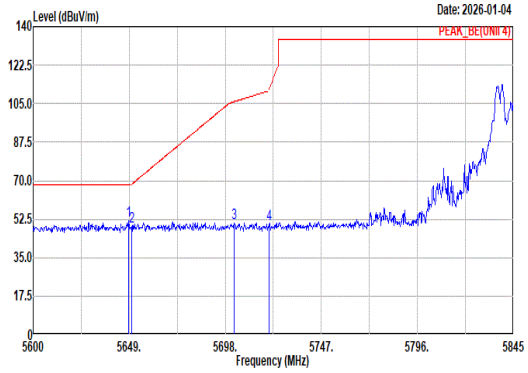 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5648.76 51.63 68.20 -16.57 41.09 32.99 10.34 32.79 0.00 104 8 Peak 2 5650.23 49.37 68.37 -19.00 38.83 33.00 10.33 32.79 0.00 104 8 Peak 3 5702.41 50.93 105.88 -54.95 40.08 33.41 10.25 32.81 0.00 104 8 Peak 4 5720.30 50.13 111.47 -61.34 39.24 33.48 10.22 32.81 0.00 104 8 Peak	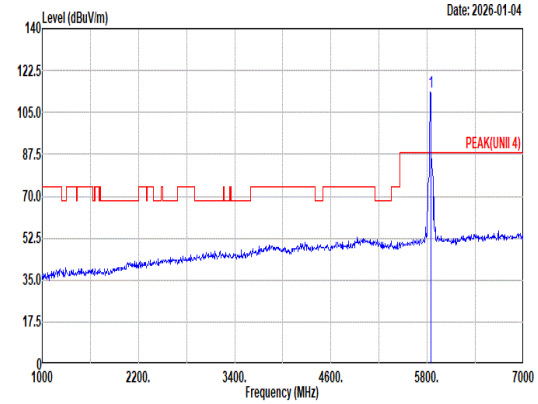 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5845.00 113.42 ------ ------ 102.18 33.90 10.20 32.86 0.00 104 8 Peak
Avg	Blank	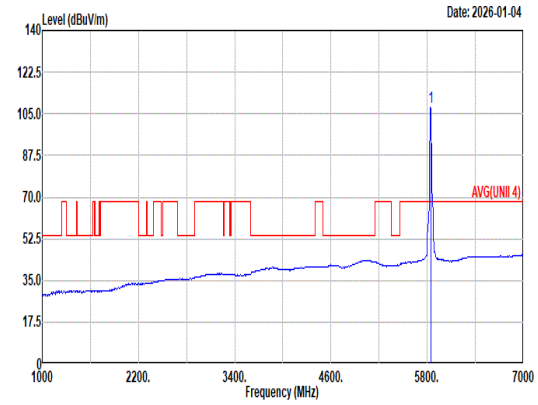 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.720kHz SWT:Auto 1 5845.00 107.63 ------ ------ 96.39 33.90 10.20 32.86 0.00 104 8 Average

Mode	110	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 52/37_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	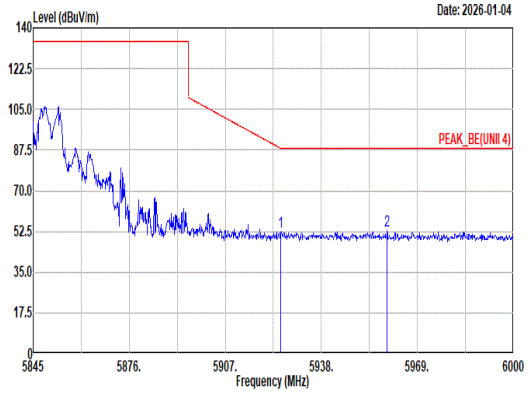 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.98 52.35 88.21 -35.86 40.61 34.15 10.48 32.89 0.00 104 8 Peak 2 5959.24 53.07 88.20 -35.13 41.20 34.18 10.59 32.90 0.00 104 8 Peak	Blank
Avg	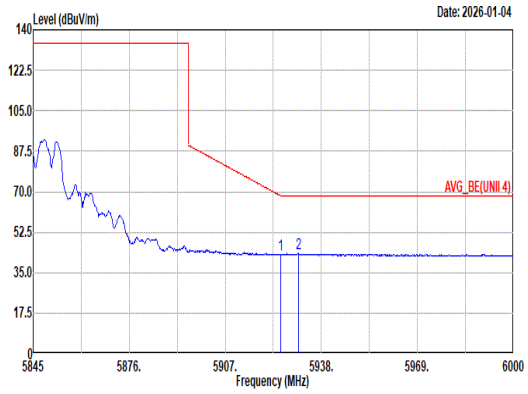 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.720kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.98 42.85 68.21 -25.36 31.11 34.15 10.48 32.89 0.00 104 8 Average 2 5930.56 43.12 68.20 -25.08 31.35 34.16 10.50 32.89 0.00 104 8 Average	Blank

Mode	110	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 52/37_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	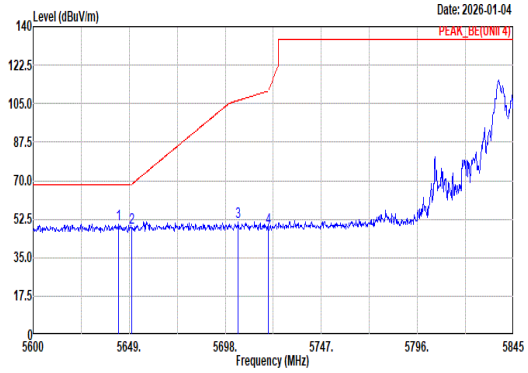 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5643.61 50.20 68.20 -18.00 39.67 32.96 10.35 32.78 0.00 100 6 Peak 2 5650.23 48.49 68.37 -19.88 37.95 33.00 10.33 32.79 0.00 100 6 Peak 3 5704.62 51.18 106.49 -55.31 40.33 33.42 10.24 32.81 0.00 100 6 Peak 4 5720.05 48.48 110.91 -62.43 37.59 33.48 10.22 32.81 0.00 100 6 Peak	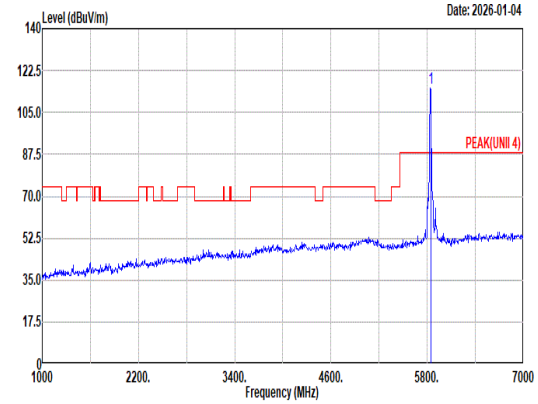 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 115.04 ------ ------ 103.80 33.90 10.20 32.86 0.00 100 6 Peak
Avg	Blank	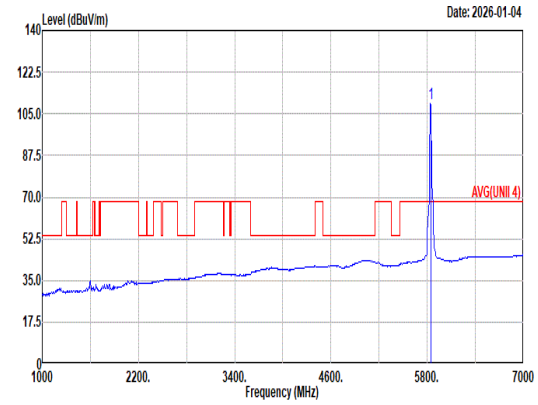 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.720kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 109.58 ------ ------ 98.34 33.90 10.20 32.86 0.00 100 6 Average

Mode	110	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 52/37_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	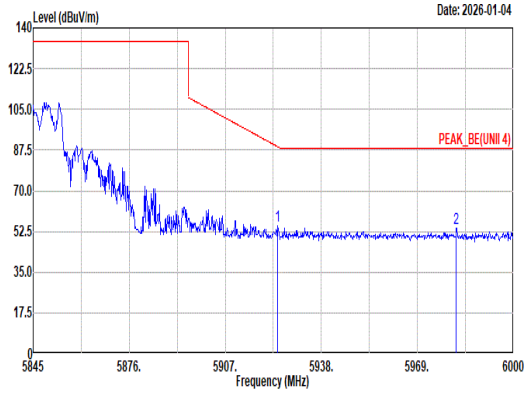 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.90 54.76 89.01 -34.25 43.02 34.15 10.48 32.89 0.00 100 6 Peak 2 5981.56 53.80 88.20 -34.40 41.91 34.14 10.66 32.91 0.00 100 6 Peak	Blank
Avg	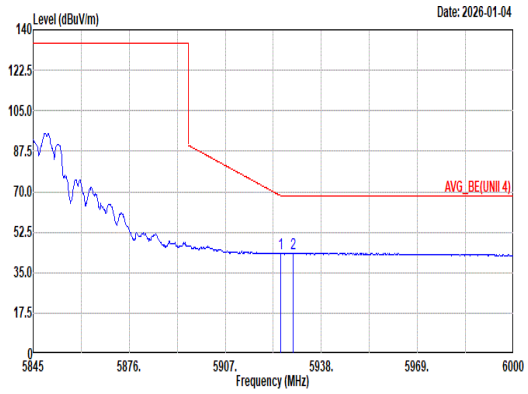 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.720kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.98 43.48 68.21 -24.73 31.74 34.15 10.48 32.89 0.00 100 6 Average 2 5929.01 43.51 68.20 -24.69 31.75 34.16 10.49 32.89 0.00 100 6 Average	Blank

Mode	111	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 106/53_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	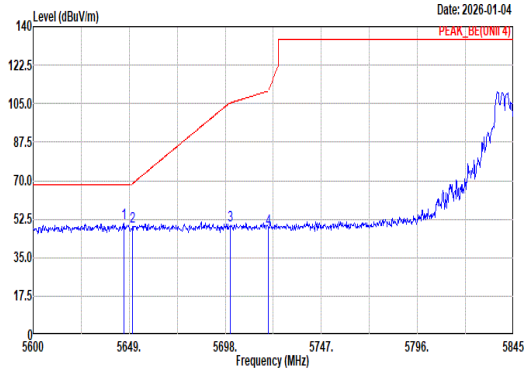 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5646.31 50.46 68.20 -17.74 39.93 32.98 10.34 32.79 0.00 100 11 Peak 2 5650.72 49.16 68.73 -19.57 38.61 33.01 10.33 32.79 0.00 100 11 Peak 3 5700.45 49.82 105.33 -55.51 38.98 33.40 10.25 32.81 0.00 100 11 Peak 4 5720.05 48.34 110.91 -62.57 37.45 33.48 10.22 32.81 0.00 100 11 Peak	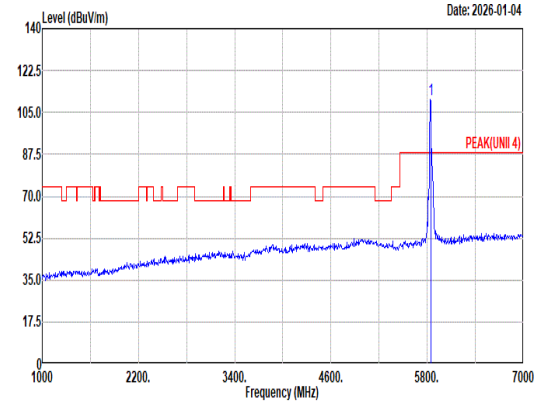 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 110.48 ------ ------ 99.24 33.90 10.20 32.86 0.00 100 11 Peak
Avg	Blank	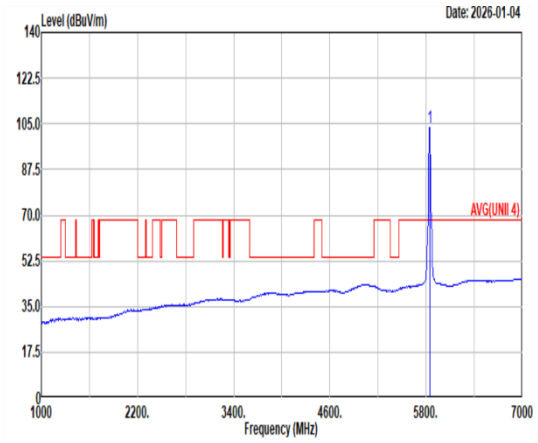 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 103.78 ------ ------ 92.54 33.90 10.20 32.86 0.00 100 11 Average

Mode	111	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 106/53_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	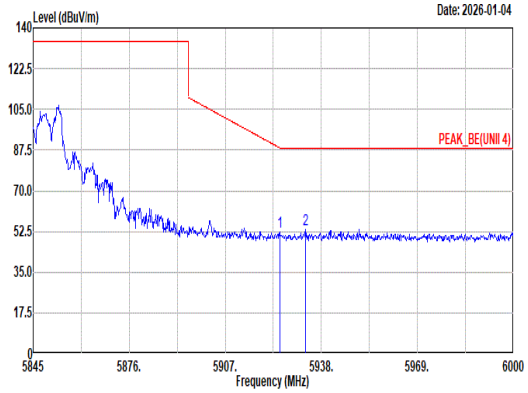 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.52 52.26 88.55 -36.29 40.52 34.15 10.48 32.89 0.00 100 11 Peak 2 5932.89 53.48 88.20 -34.72 41.69 34.17 10.51 32.89 0.00 100 11 Peak	Blank
Avg	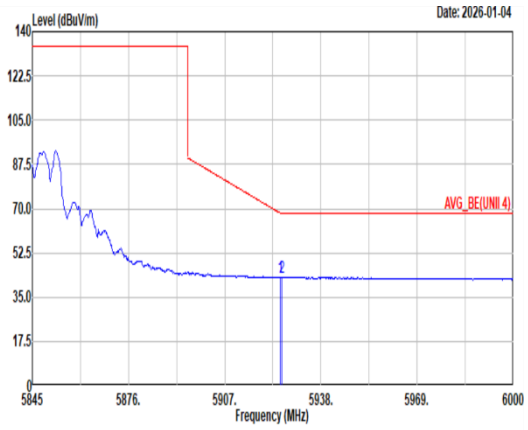 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.98 42.83 68.21 -25.38 31.09 34.15 10.48 32.89 0.00 100 11 Average 2 5925.29 42.90 68.20 -25.30 31.16 34.15 10.48 32.89 0.00 100 11 Average	Blank

Mode	111	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 106/53_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	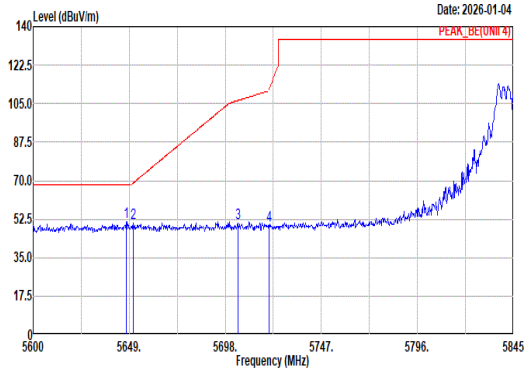 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5647.53 51.46 68.20 -16.74 40.92 32.99 10.34 32.79 0.00 105 6 Peak 2 5651.21 50.88 69.10 -18.22 40.33 33.01 10.33 32.79 0.00 105 6 Peak 3 5704.37 50.55 106.43 -55.88 39.70 33.42 10.24 32.81 0.00 105 6 Peak 4 5720.30 49.65 111.47 -61.82 38.76 33.48 10.22 32.81 0.00 105 6 Peak	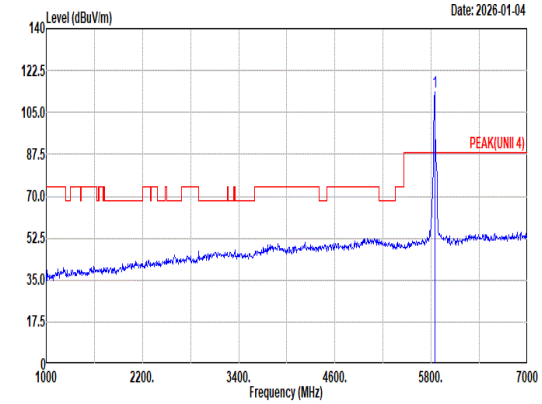 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5845.00 113.83 ------ ------ 102.58 33.90 10.21 32.86 0.00 105 6 Peak
Avg	Blank	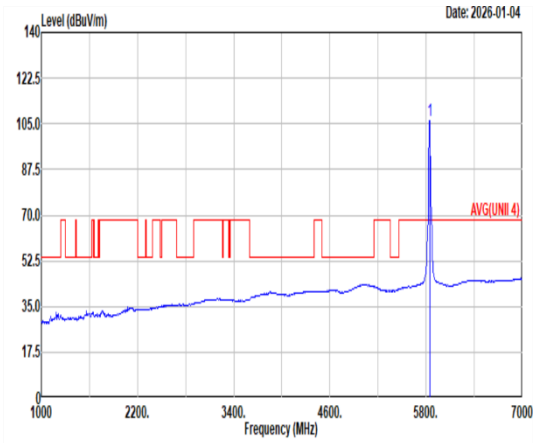 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5845.00 106.17 ------ ------ 94.92 33.90 10.21 32.86 0.00 105 6 Average

Mode	111	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 106/53_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	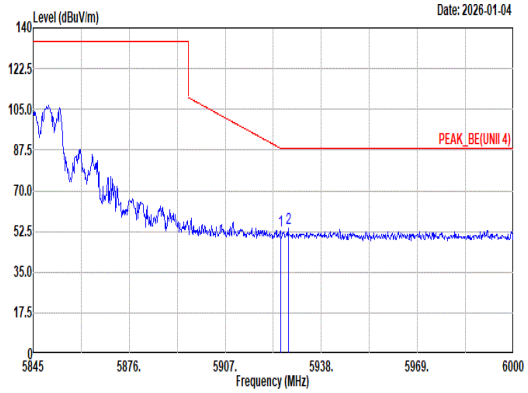 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.83 52.77 88.33 -35.56 41.03 34.15 10.48 32.89 0.00 105 6 Peak 2 5927.31 54.09 88.20 -34.11 42.34 34.15 10.49 32.89 0.00 105 6 Peak	Blank
Avg	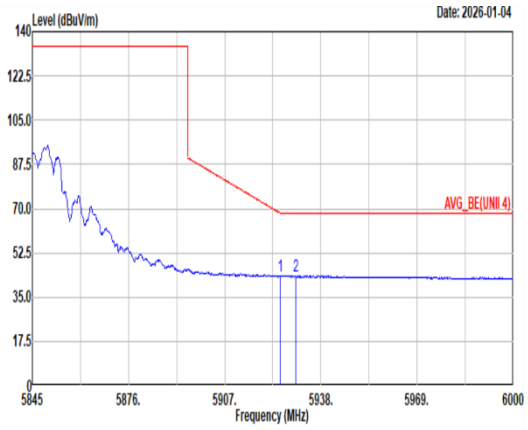 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.98 43.22 68.21 -24.99 31.48 34.15 10.48 32.89 0.00 105 6 Average 2 5929.94 43.39 68.20 -24.81 31.62 34.16 10.50 32.89 0.00 105 6 Average	Blank

Mode	112
	Band Edge - L
	U-NII-4_5.85-5.895_802.11be EHT20_CH173_Full RU_5865MHz
ANT	3+4

Pol.	Horizontal	Fundamental
Peak	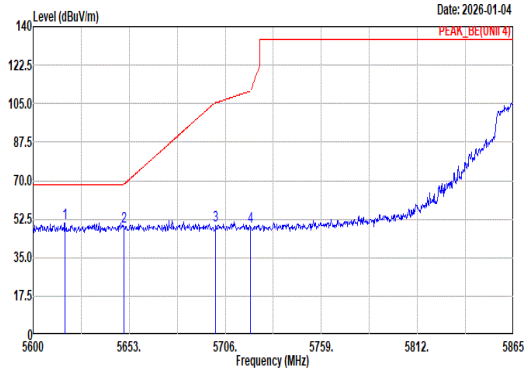 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5617.49 50.78 68.20 -17.42 40.36 32.80 10.39 32.77 0.00 100 307 Peak 2 5650.09 49.37 68.26 -18.89 38.83 33.00 10.33 32.79 0.00 100 307 Peak 3 5700.70 49.81 105.40 -55.59 38.97 33.40 10.25 32.81 0.00 100 307 Peak 4 5720.05 48.91 110.90 -61.99 38.02 33.48 10.22 32.81 0.00 100 307 Peak	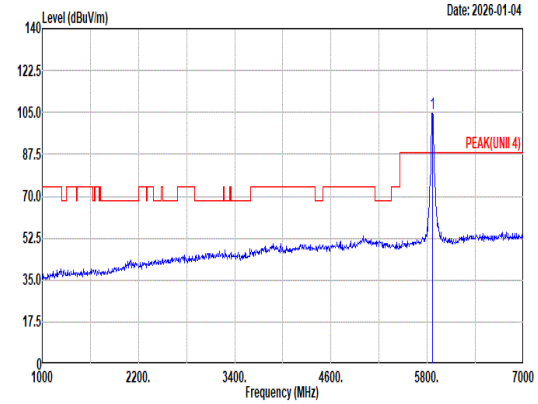 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5865.00 104.41 ------ ------ 93.03 33.96 10.29 32.87 0.00 100 307 Peak
Avg	Blank	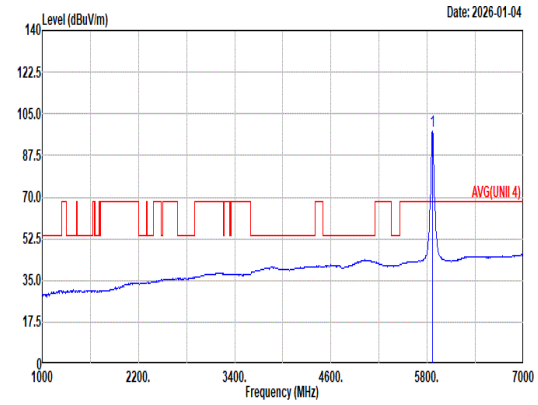 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5865.00 97.50 ------ ------ 86.12 33.96 10.29 32.87 0.00 100 307 Average

Mode	112	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH173_Full RU_5865MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	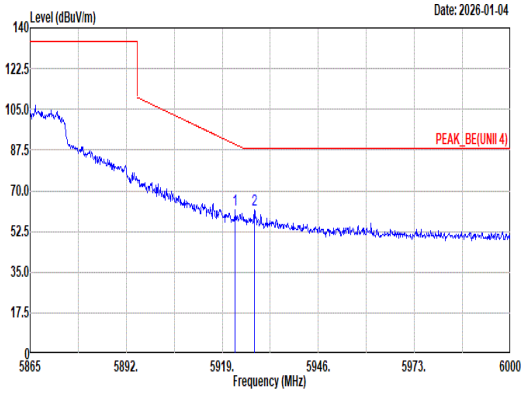 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5922.65 61.80 89.92 -28.12 50.07 34.15 10.47 32.89 0.00 100 307 Peak 2 5928.05 61.60 88.20 -26.60 49.84 34.16 10.49 32.89 0.00 100 307 Peak	Blank
Avg	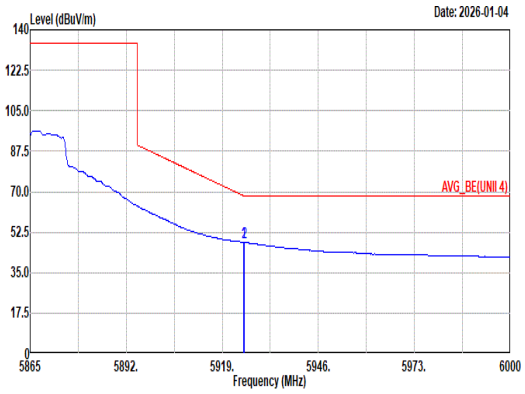 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.94 48.09 68.24 -20.15 36.35 34.15 10.48 32.89 0.00 100 307 Average 2 5925.21 48.12 68.20 -20.08 36.38 34.15 10.48 32.89 0.00 100 307 Average	Blank

Mode	112	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH173_Full RU_5865MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	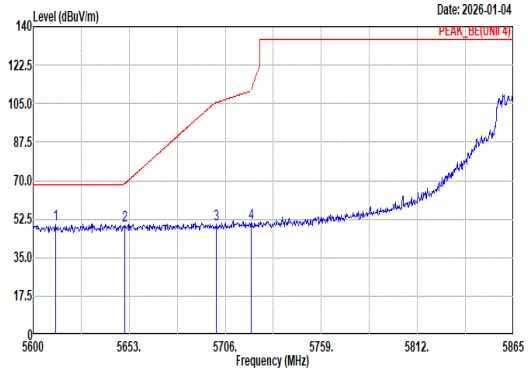 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5612.46 50.31 68.20 -17.89 39.91 32.77 10.40 32.77 0.00 100 300 Peak 2 5650.35 49.46 68.46 -19.00 38.92 33.00 10.33 32.79 0.00 100 300 Peak 3 5700.97 50.15 105.47 -55.32 39.31 33.40 10.25 32.81 0.00 100 300 Peak 4 5720.31 50.57 111.51 -60.94 39.68 33.48 10.22 32.81 0.00 100 300 Peak	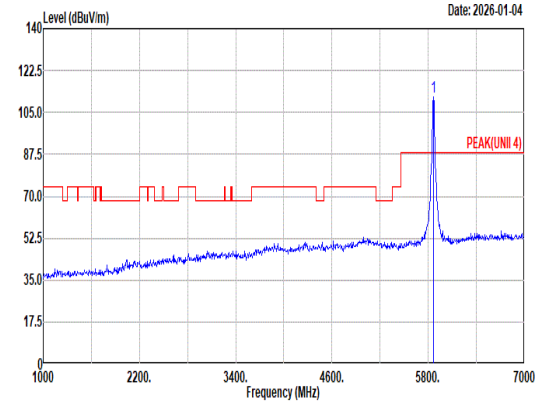 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5865.00 111.29 ------ ------ 99.91 33.96 10.29 32.87 0.00 100 300 Peak
Avg	Blank	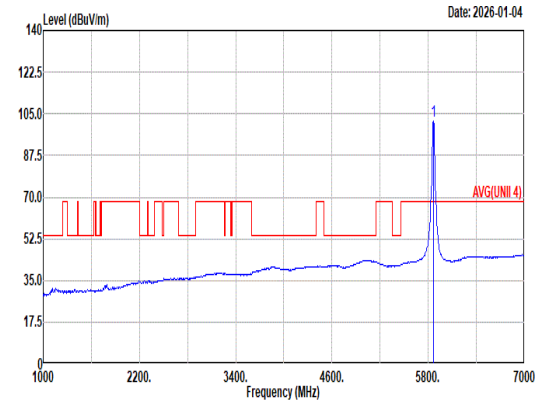 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5865.00 102.19 ------ ------ 90.81 33.96 10.29 32.87 0.00 100 300 Average

Mode	112	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH173_Full RU_5865MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	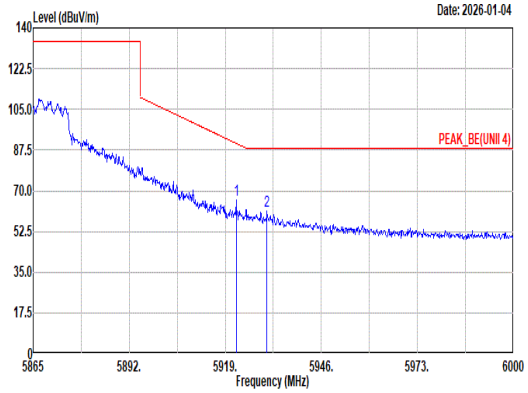 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5922.11 65.81 90.32 -24.51 54.09 34.14 10.47 32.89 0.00 100 300 Peak 2 5930.75 61.25 88.20 -26.95 49.48 34.16 10.50 32.89 0.00 100 300 Peak	Blank
Avg	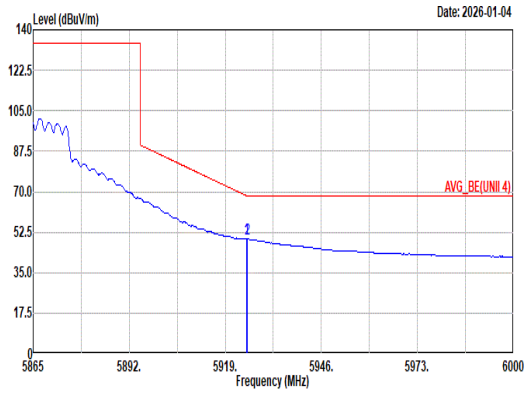 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.94 49.55 68.24 -18.69 37.81 34.15 10.48 32.89 0.00 100 300 Average 2 5925.21 49.54 68.20 -18.66 37.80 34.15 10.48 32.89 0.00 100 300 Average	Blank

Mode	112	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT20_CH173_Full RU_5865MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	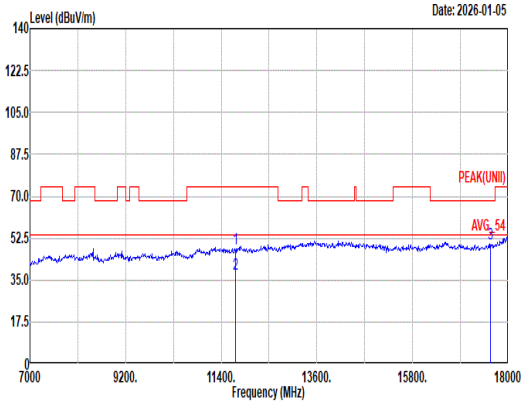 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11730.00 48.29 74.00 -25.71 57.67 38.48 17.69 66.01 0.46 -- -- Peak 2 11730.00 37.45 54.00 -16.55 46.83 38.48 17.69 66.01 0.46 -- -- Average 3 17595.00 50.37 68.20 -17.83 55.66 39.08 21.80 66.67 0.50 -- -- Peak	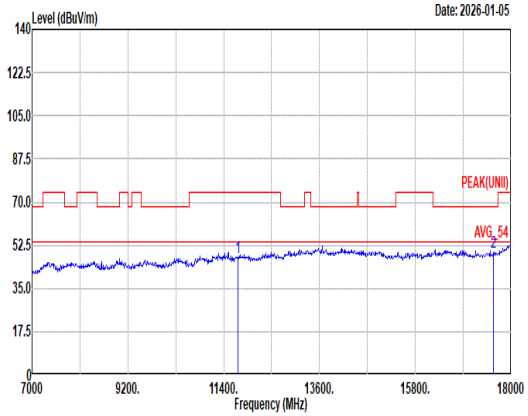 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11730.00 47.63 74.00 -26.37 57.01 38.48 17.69 66.01 0.46 -- -- Peak 2 17595.00 49.63 68.20 -18.57 54.92 39.08 21.80 66.67 0.50 -- -- Peak

Mode	112	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT20_CH173_Full RU_5865MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	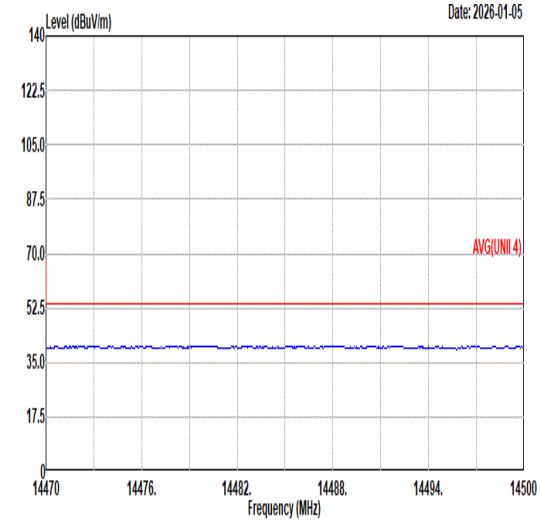 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	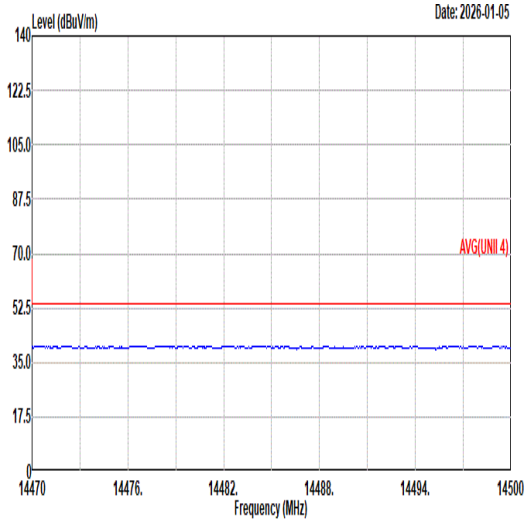 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL
17.7G ~18G Avg	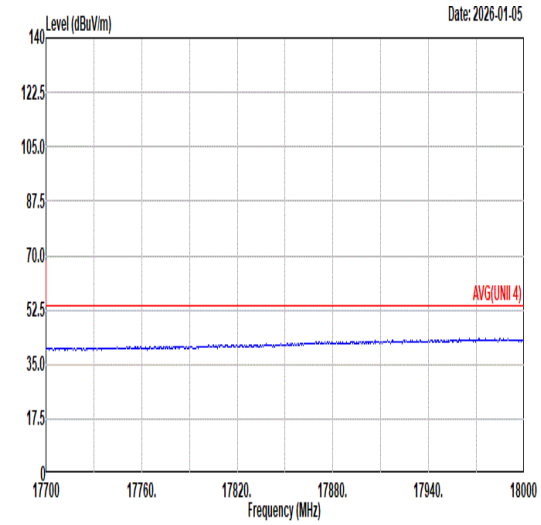 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	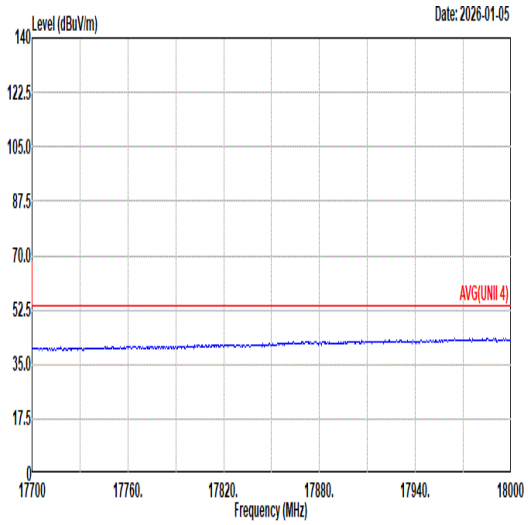 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL

Mode	113	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Full RU_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	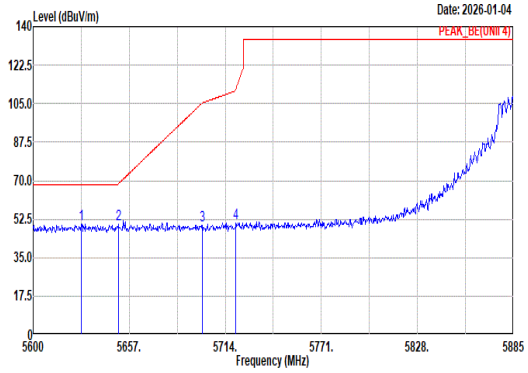 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5628.50 50.19 68.20 -18.01 39.73 32.87 10.37 32.78 0.00 116 9 Peak 2 5650.45 50.22 68.53 -18.31 39.68 33.00 10.33 32.79 0.00 116 9 Peak 3 5700.32 49.77 105.29 -55.52 38.93 33.40 10.25 32.81 0.00 116 9 Peak 4 5720.27 50.49 111.42 -60.93 39.60 33.48 10.22 32.81 0.00 116 9 Peak	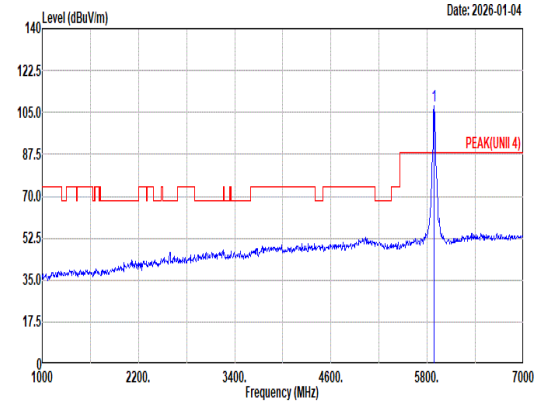 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 107.78 ------ ------ 96.27 34.04 10.35 32.88 0.00 116 9 Peak
Avg	Blank	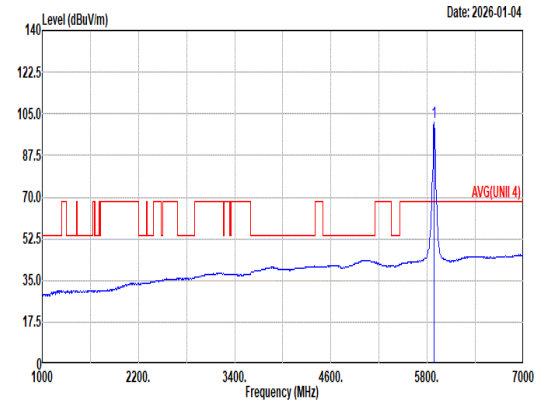 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 101.22 ------ ------ 89.67 34.06 10.37 32.88 0.00 116 9 Average

Mode	113	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Full RU_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	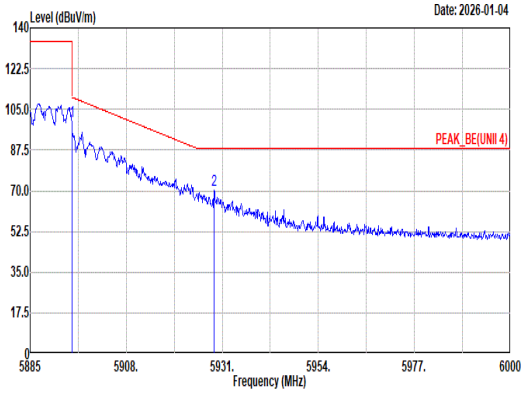 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.01 99.77 110.20 -10.43 88.19 34.08 10.38 32.88 0.00 116 9 Peak 2 5929.05 70.04 88.20 -18.16 58.28 34.16 10.49 32.89 0.00 116 9 Peak	Blank
Avg	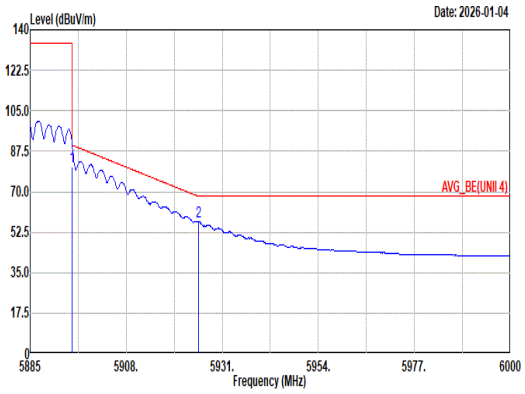 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.01 81.06 90.20 -9.14 69.48 34.08 10.38 32.88 0.00 116 9 Average 2 5925.25 57.25 68.20 -10.95 45.51 34.15 10.48 32.89 0.00 116 9 Average	Blank

Mode	113	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Full RU_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	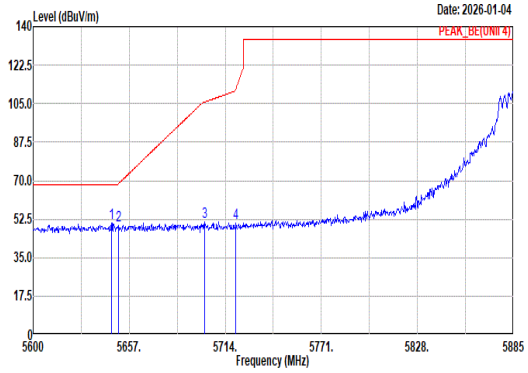 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5646.46 50.88 68.20 -17.32 40.35 32.98 10.34 32.79 0.00 100 344 Peak 2 5650.73 49.62 68.74 -19.12 39.07 33.01 10.33 32.79 0.00 100 344 Peak 3 5701.75 51.46 105.69 -54.23 40.61 33.41 10.25 32.81 0.00 100 344 Peak 4 5720.27 50.91 111.42 -60.51 40.02 33.48 10.22 32.81 0.00 100 344 Peak	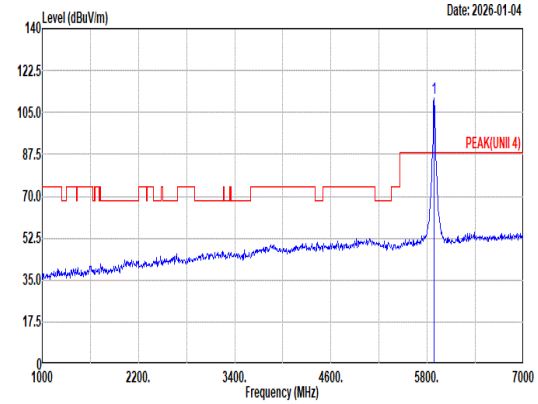 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 111.10 ------ ------ 99.55 34.06 10.37 32.88 0.00 100 344 Peak
Avg	Blank	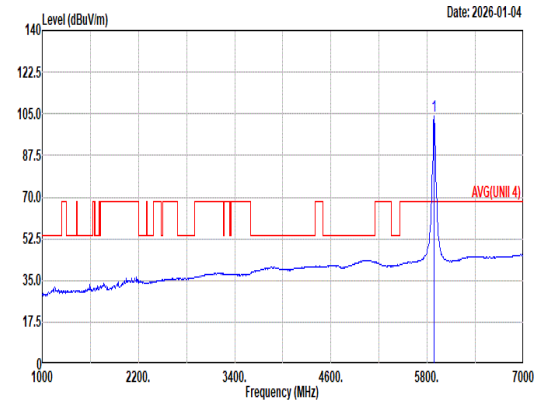 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 103.83 ------ ------ 92.28 34.06 10.37 32.88 0.00 100 344 Average

Mode	113	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Full RU_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	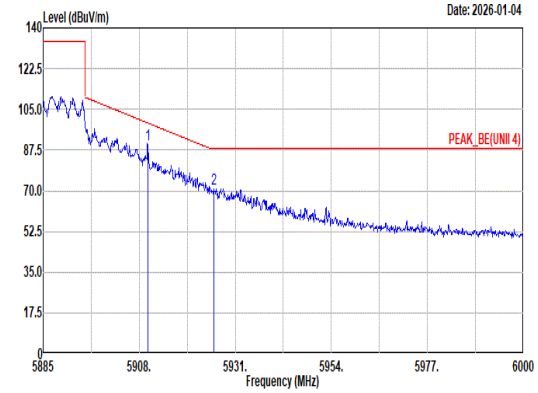 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5910.07 90.03 99.13 -9.10 78.37 34.12 10.43 32.89 0.00 100 344 Peak 2 5925.94 71.06 88.20 -17.14 59.32 34.15 10.48 32.89 0.00 100 344 Peak	Blank
Avg	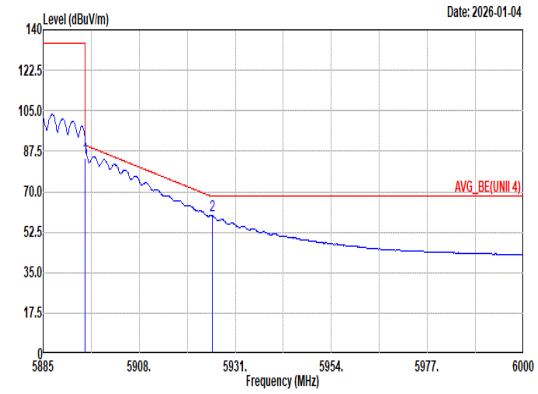 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.01 84.59 90.20 -5.61 73.01 34.08 10.38 32.88 0.00 100 344 Average 2 5925.48 59.76 68.20 -8.44 48.02 34.15 10.48 32.89 0.00 100 344 Average	Blank

Mode	113	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Full RU_5885MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	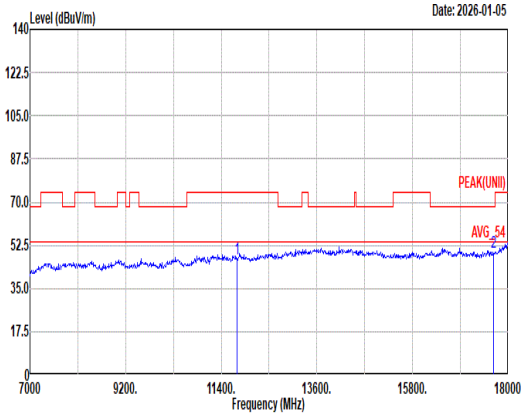 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 HORIZONTAL 1 11770.00 47.23 74.00 -26.77 56.63 38.40 17.73 65.99 0.46 -- -- Peak 2 17655.00 49.56 68.20 -18.64 54.93 39.25 21.84 66.97 0.51 -- -- Peak	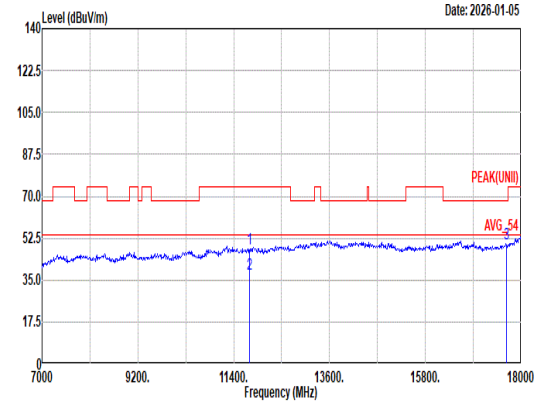 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 VERTICAL 1 11770.00 48.14 74.00 -25.86 57.54 38.40 17.73 65.99 0.46 -- -- Peak 2 11770.00 37.39 54.00 -16.61 46.79 38.40 17.73 65.99 0.46 -- -- Average 3 17655.00 49.99 68.20 -18.21 55.36 39.25 21.84 66.97 0.51 -- -- Peak

Mode	113	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Full RU_5885MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	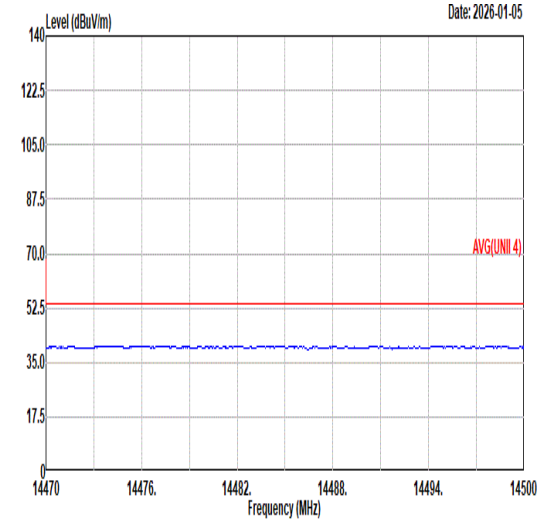 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	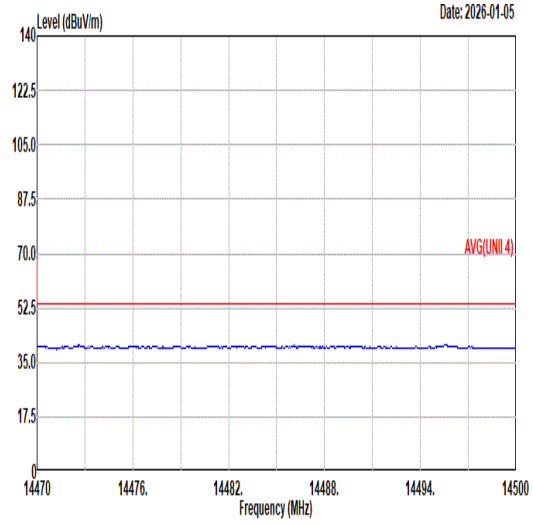 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL
17.7G ~18G Avg	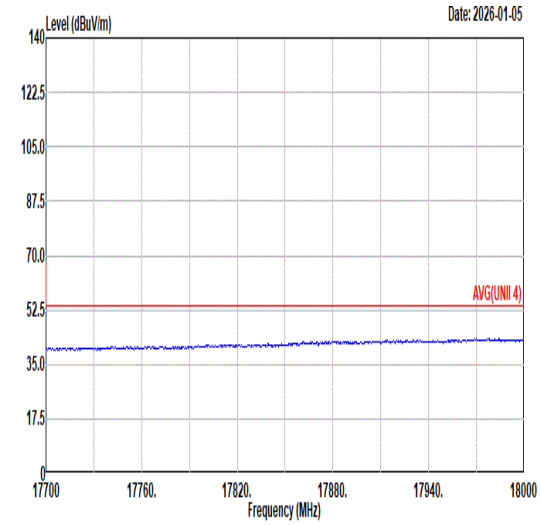 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	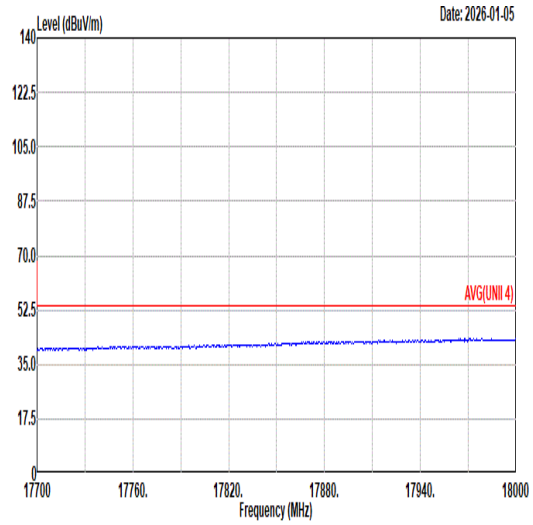 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL

Mode	114	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 26/8_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	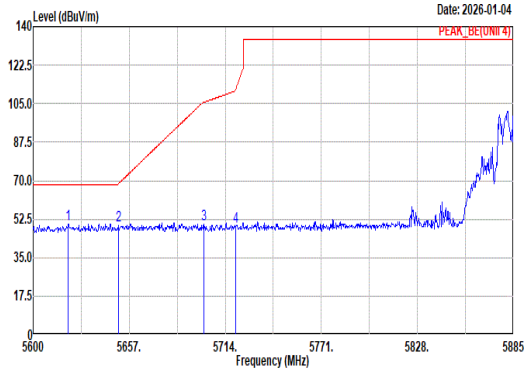 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5620.81 50.40 68.20 -17.80 39.98 32.82 10.38 32.78 0.00 300 69 Peak 2 5650.73 49.42 68.74 -19.32 38.87 33.01 10.33 32.79 0.00 300 69 Peak 3 5701.18 50.28 105.53 -55.25 39.44 33.40 10.25 32.81 0.00 300 69 Peak 4 5720.27 49.30 111.42 -62.12 38.41 33.48 10.22 32.81 0.00 300 69 Peak	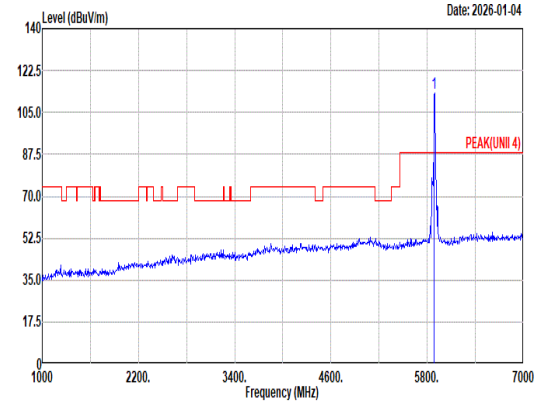 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 113.24 ------ ------ 101.65 34.08 10.39 32.88 0.00 300 69 Peak
Avg	Blank	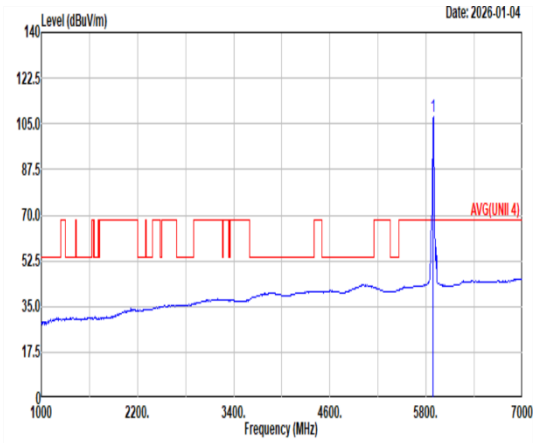 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 107.70 ------ ------ 96.11 34.08 10.39 32.88 0.00 300 69 Average

Mode	114	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 26/8_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	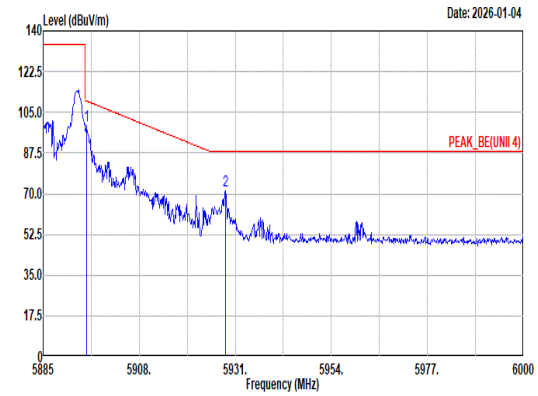 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.35 99.48 109.94 -10.46 87.89 34.08 10.39 32.88 0.00 300 69 Peak 2 5928.59 71.28 88.20 -16.92 59.52 34.16 10.49 32.89 0.00 300 69 Peak	Blank
Avg	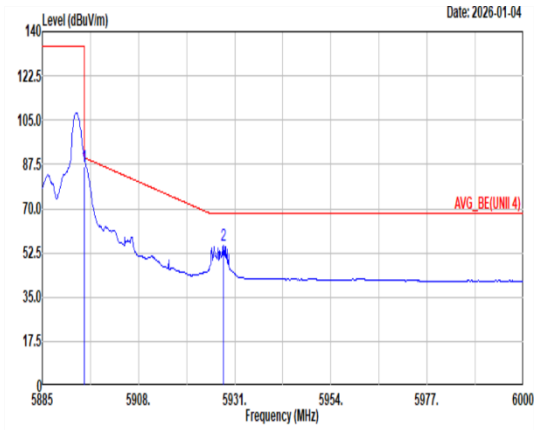 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.01 86.83 90.20 -3.37 75.25 34.08 10.38 32.88 0.00 300 69 Average 2 5928.36 55.25 68.20 -12.95 43.49 34.16 10.49 32.89 0.00 300 69 Average	Blank

Mode	114	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 26/8_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	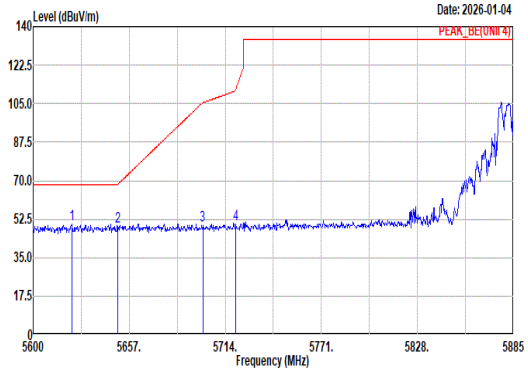 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5623.09 50.42 68.20 -17.78 39.98 32.84 10.38 32.78 0.00 100 354 Peak 2 5650.16 49.10 68.32 -19.22 38.56 33.00 10.33 32.79 0.00 100 354 Peak 3 5700.61 49.92 105.37 -55.45 39.08 33.40 10.25 32.81 0.00 100 354 Peak 4 5720.27 50.11 111.42 -61.31 39.22 33.48 10.22 32.81 0.00 100 354 Peak	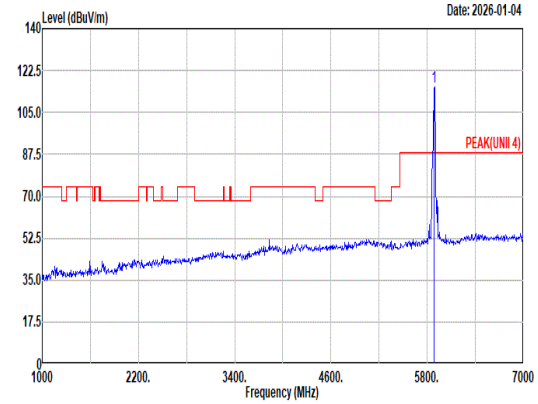 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 115.63 ------ ------ 104.04 34.08 10.39 32.88 0.00 100 354 Peak
Avg	Blank	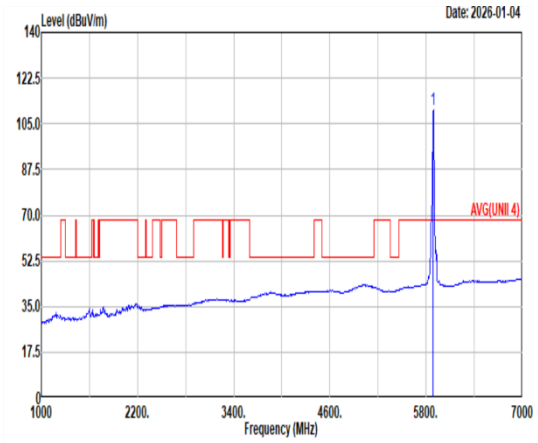 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 110.55 ------ ------ 98.96 34.08 10.39 32.88 0.00 100 354 Average

Mode	114	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 26/8_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	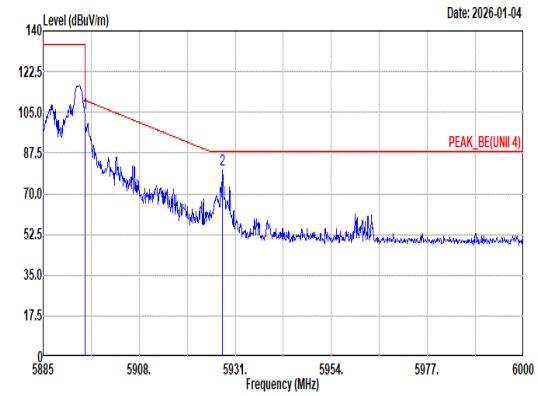 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.01 104.58 110.20 -5.62 93.00 34.08 10.38 32.88 0.00 100 354 Peak 2 5927.90 80.10 88.20 -8.10 68.34 34.16 10.49 32.89 0.00 100 354 Peak	Blank
Avg	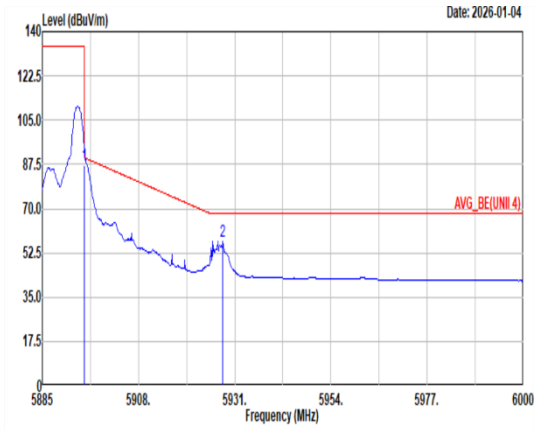 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.01 87.27 90.20 -2.93 75.69 34.08 10.38 32.88 0.00 100 354 Average 2 5928.13 57.16 68.20 -11.04 45.40 34.16 10.49 32.89 0.00 100 354 Average	Blank

Mode	115	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 52/40_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	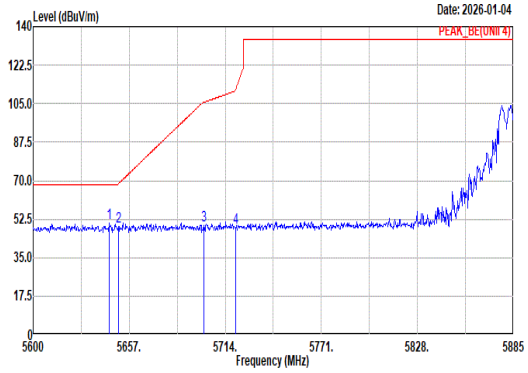 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5645.03 50.47 68.20 -17.73 39.95 32.97 10.34 32.79 0.00 245 63 Peak 2 5650.45 49.35 68.53 -19.18 38.81 33.00 10.33 32.79 0.00 245 63 Peak 3 5701.46 49.92 105.61 -55.69 39.07 33.41 10.25 32.81 0.00 245 63 Peak 4 5720.27 48.72 111.42 -62.70 37.83 33.48 10.22 32.81 0.00 245 63 Peak	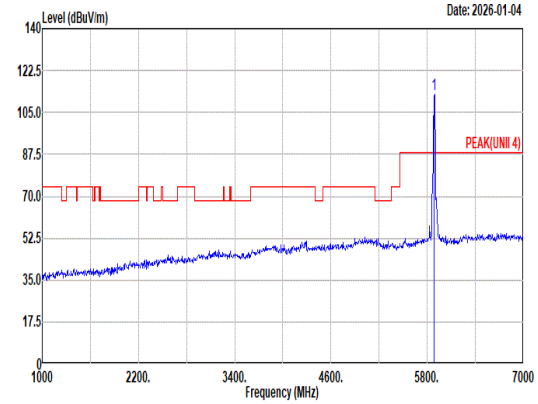 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5885.00 112.65 ------ ------ 101.06 34.08 10.39 32.88 0.00 245 63 Peak
Avg	Blank	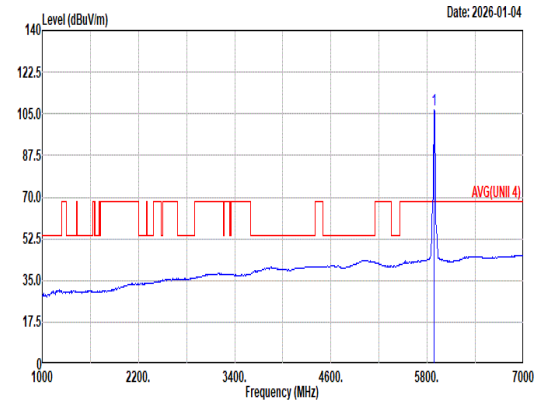 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.720kHz SWT:Auto 1 5885.00 106.46 ------ ------ 94.91 34.06 10.37 32.88 0.00 245 63 Average

Mode	115	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 52/40_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	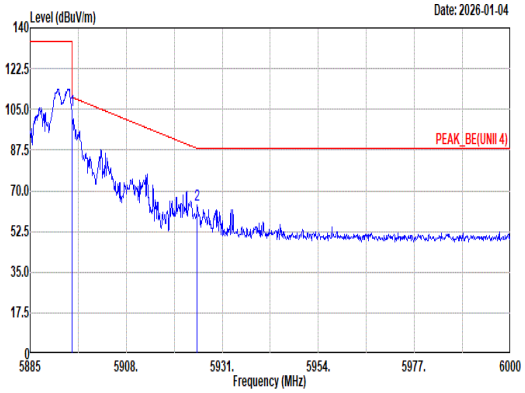 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.01 104.57 110.20 -5.63 92.99 34.08 10.38 32.88 0.00 245 63 Peak 2 5925.02 63.85 88.20 -24.35 52.11 34.15 10.48 32.89 0.00 245 63 Peak	Blank
Avg	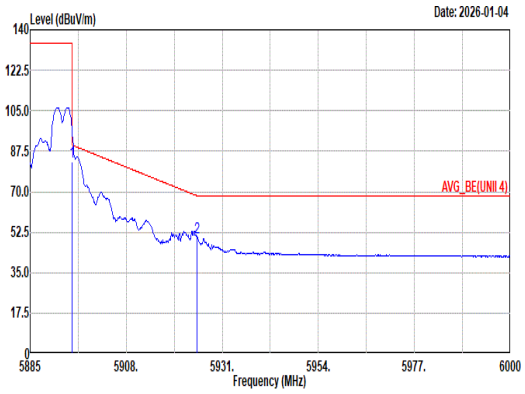 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.720kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.01 82.82 90.20 -7.38 71.24 34.08 10.38 32.88 0.00 245 63 Average 2 5925.02 50.45 68.20 -17.75 38.71 34.15 10.48 32.89 0.00 245 63 Average	Blank

Mode	115	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 52/40_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	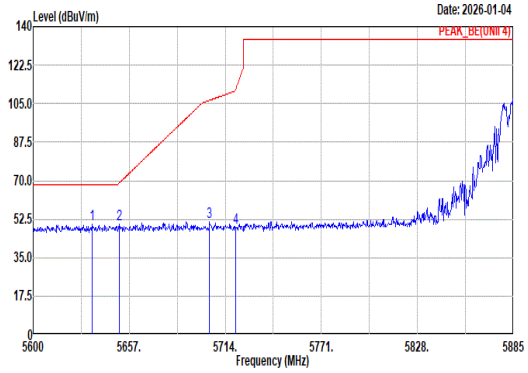 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5635.06 50.09 68.20 -18.11 39.60 32.91 10.36 32.78 0.00 100 353 Peak 2 5651.30 50.08 69.17 -19.09 39.53 33.01 10.33 32.79 0.00 100 353 Peak 3 5704.60 51.04 106.49 -55.45 40.19 33.42 10.24 32.81 0.00 100 353 Peak 4 5720.27 48.63 111.42 -62.79 37.74 33.48 10.22 32.81 0.00 100 353 Peak	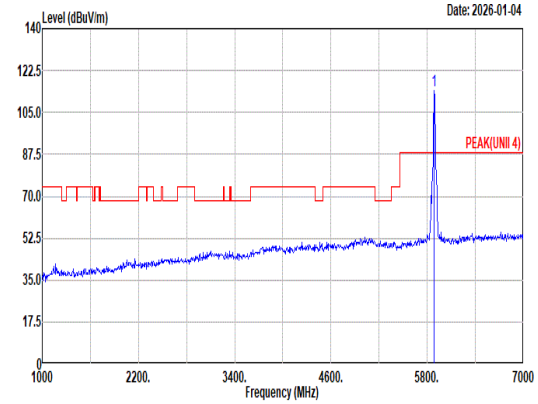 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 114.10 ------ ------ 102.55 34.06 10.37 32.88 0.00 100 353 Peak
Avg	Blank	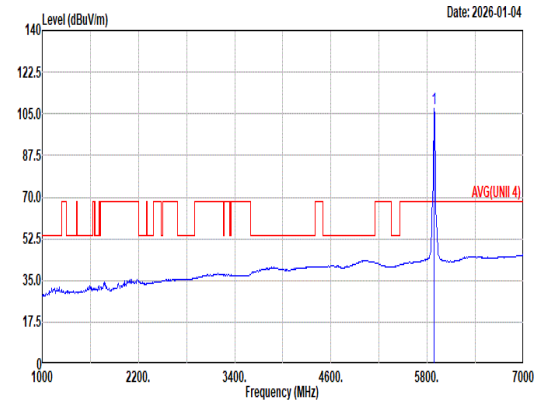 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.720kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 107.41 ------ ------ 95.86 34.06 10.37 32.88 0.00 100 353 Average

Mode	115	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 52/40_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	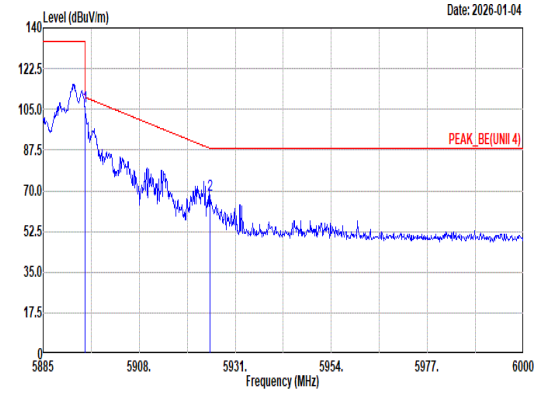 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.01 106.12 110.20 -4.08 94.54 34.08 10.38 32.88 0.00 100 353 Peak 2 5925.02 68.23 88.20 -19.97 56.49 34.15 10.48 32.89 0.00 100 353 Peak	Blank
Avg	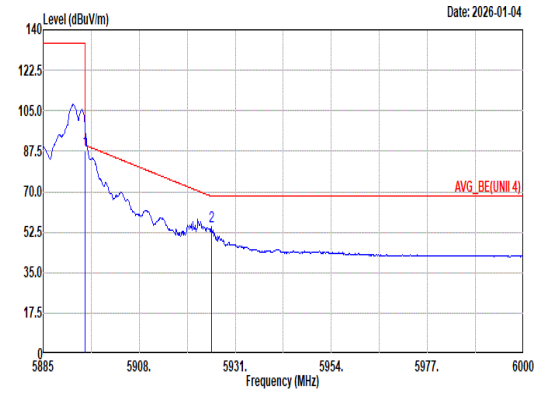 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.720kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.01 87.50 90.20 -2.70 75.92 34.08 10.38 32.88 0.00 100 353 Average 2 5925.25 54.69 68.20 -13.51 42.95 34.15 10.48 32.89 0.00 100 353 Average	Blank

Mode	116	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 106/54_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	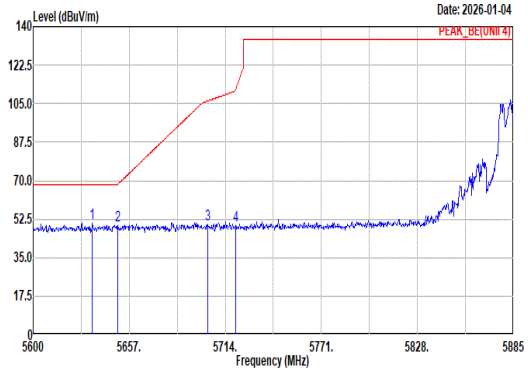 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5635.06 50.55 68.20 -17.65 40.06 32.91 10.36 32.78 0.00 241 67 Peak 2 5650.16 49.70 68.32 -18.62 39.16 33.00 10.33 32.79 0.00 241 67 Peak 3 5703.46 50.12 106.17 -56.05 39.28 33.41 10.24 32.81 0.00 241 67 Peak 4 5720.27 49.76 111.42 -61.66 38.87 33.48 10.22 32.81 0.00 241 67 Peak	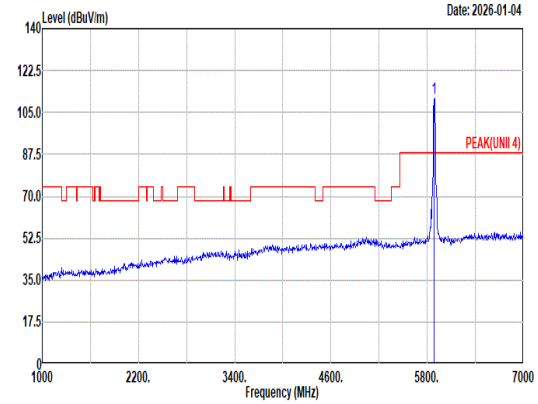 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5885.00 110.91 ------ ------ 99.32 34.08 10.39 32.88 0.00 241 67 Peak
Avg	Blank	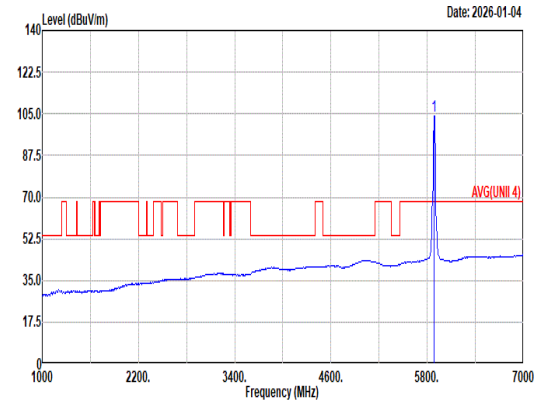 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto 1 5885.00 104.10 ------ ------ 92.55 34.06 10.37 32.88 0.00 241 67 Average

Mode	116	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 106/54_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	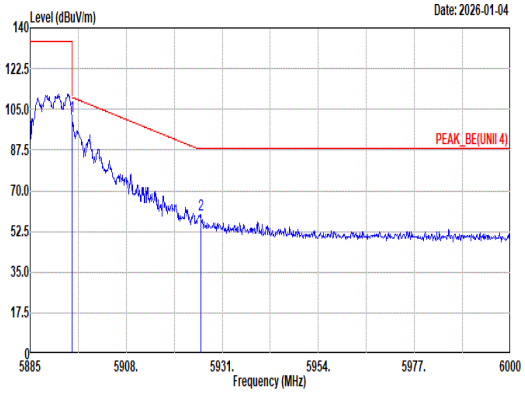 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.12 101.86 110.11 -8.25 90.28 34.08 10.38 32.88 0.00 241 67 Peak 2 5925.83 59.66 88.20 -28.54 47.92 34.15 10.48 32.89 0.00 241 67 Peak	Blank
Avg	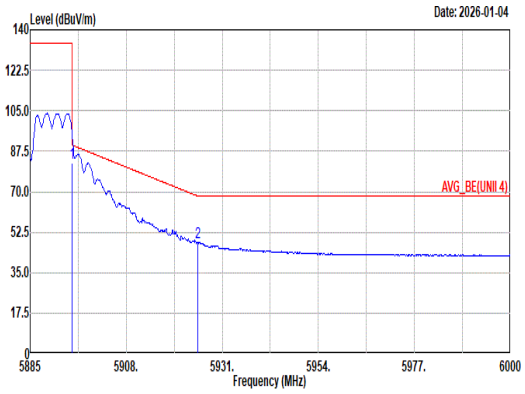 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.01 82.33 90.20 -7.87 70.75 34.08 10.38 32.88 0.00 241 67 Average 2 5925.14 48.23 68.20 -19.97 36.49 34.15 10.48 32.89 0.00 241 67 Average	Blank

Mode	116	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 106/54_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	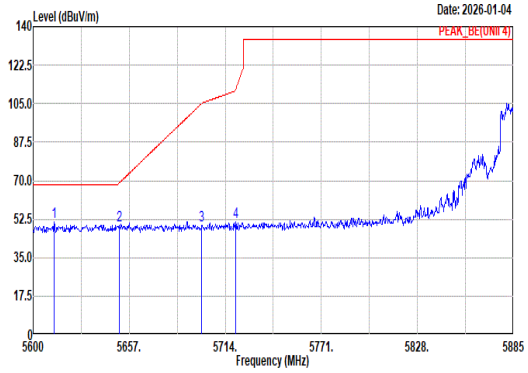 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5612.26 51.23 68.20 -16.97 40.83 32.77 10.40 32.77 0.00 100 304 Peak 2 5651.02 49.91 68.95 -19.04 39.36 33.01 10.33 32.79 0.00 100 304 Peak 3 5700.04 49.78 105.21 -55.43 38.94 33.40 10.25 32.81 0.00 100 304 Peak 4 5720.27 51.00 111.42 -60.42 40.11 33.48 10.22 32.81 0.00 100 304 Peak	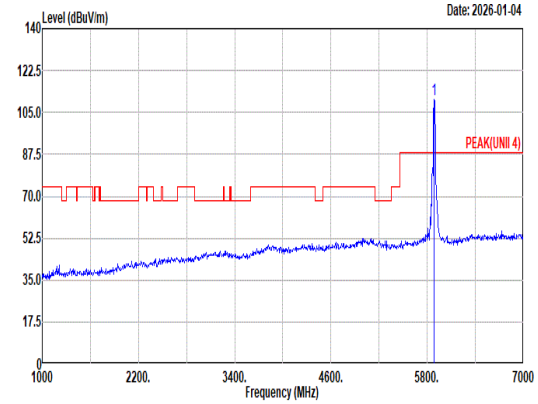 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 110.42 ------ ------ 98.87 34.06 10.37 32.88 0.00 100 304 Peak
Avg	Blank	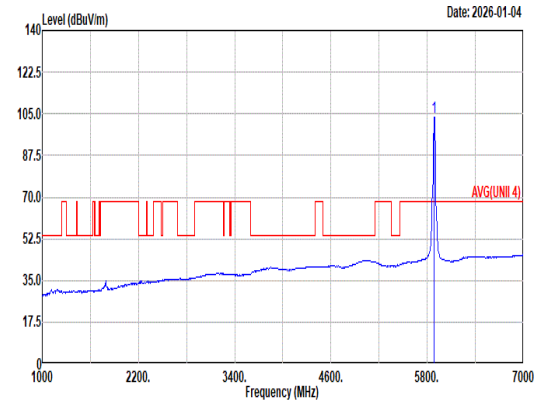 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 103.81 ------ ------ 92.26 34.06 10.37 32.88 0.00 100 304 Average

Mode	116	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 106/54_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	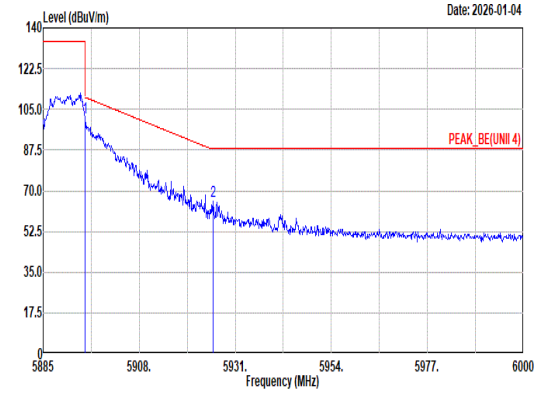 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.12 101.25 110.11 -8.86 89.67 34.08 10.38 32.88 0.00 100 304 Peak 2 5925.71 65.77 88.20 -22.43 54.03 34.15 10.48 32.89 0.00 100 304 Peak	Blank
Avg	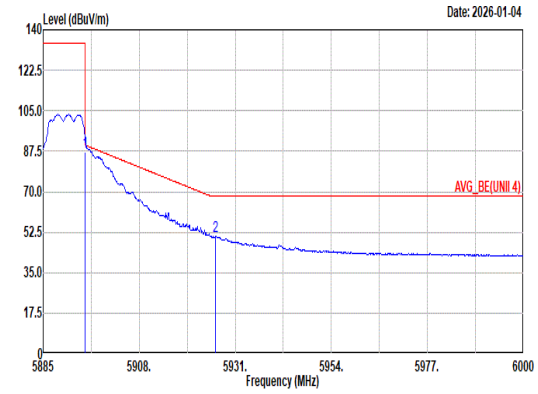 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.01 87.39 90.20 -2.81 75.81 34.08 10.38 32.88 0.00 100 304 Average 2 5926.29 50.92 68.20 -17.28 39.18 34.15 10.48 32.89 0.00 100 304 Average	Blank

Mode	117	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_Full RU_5835MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	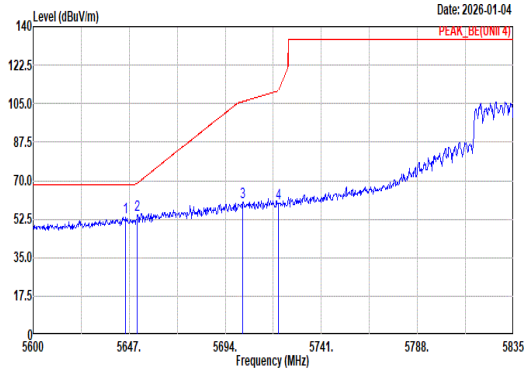 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5645.36 53.55 68.20 -14.65 43.03 32.97 10.34 32.79 0.00 215 67 Peak 2 5651.00 54.44 68.94 -14.50 43.89 33.01 10.33 32.79 0.00 215 67 Peak 3 5702.46 60.41 105.89 -45.48 49.56 33.41 10.25 32.81 0.00 215 67 Peak 4 5720.09 59.87 110.99 -51.12 48.98 33.48 10.22 32.81 0.00 215 67 Peak	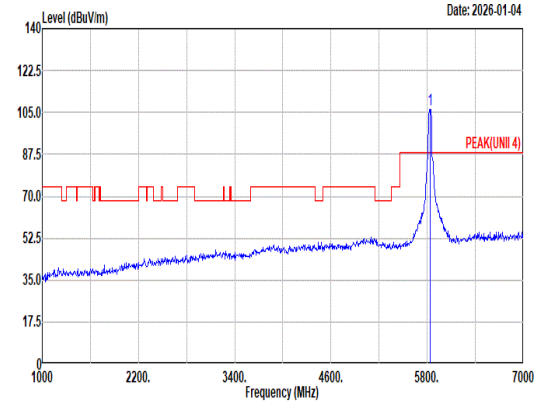 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 106.11 ------ ------ 94.90 33.90 10.16 32.85 0.00 215 67 Peak
Avg	Blank	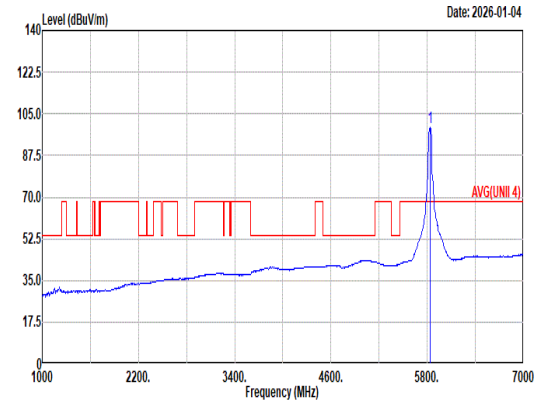 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 99.16 ------ ------ 87.92 33.90 10.20 32.86 0.00 215 67 Average

Mode	117	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_Full RU_5835MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	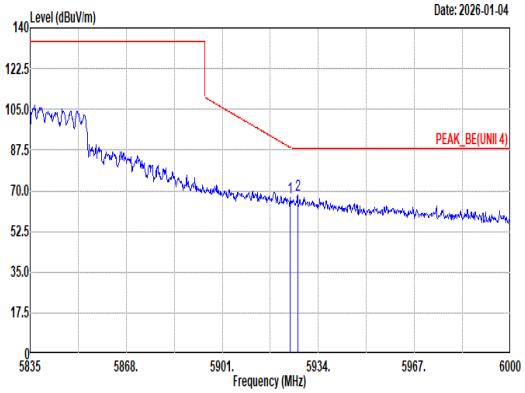 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.43 67.22 88.62 -21.40 55.48 34.15 10.48 32.89 0.00 215 67 Peak 2 5926.91 68.03 88.20 -20.17 56.28 34.15 10.49 32.89 0.00 215 67 Peak	Blank
Avg	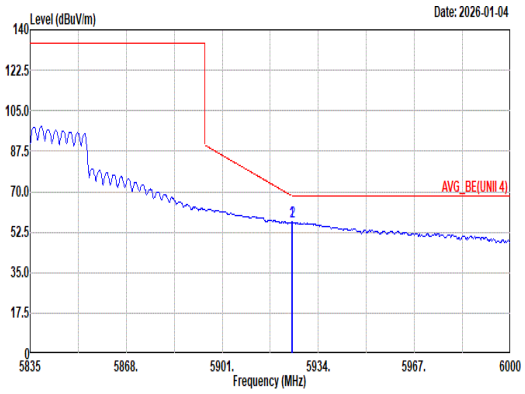 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.93 56.82 68.25 -11.43 45.08 34.15 10.48 32.89 0.00 215 67 Average 2 5925.09 56.84 68.20 -11.36 45.10 34.15 10.48 32.89 0.00 215 67 Average	Blank

Mode	117	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_Full RU_5835MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	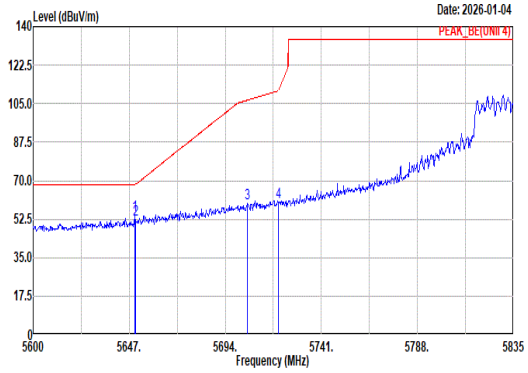 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.59 54.60 68.20 -13.60 44.05 33.00 10.34 32.79 0.00 100 6 Peak 2 5650.06 52.09 68.24 -16.15 41.55 33.00 10.33 32.79 0.00 100 6 Peak 3 5704.81 59.82 106.55 -46.73 48.97 33.42 10.24 32.81 0.00 100 6 Peak 4 5720.09 60.05 110.99 -50.94 49.16 33.48 10.22 32.81 0.00 100 6 Peak	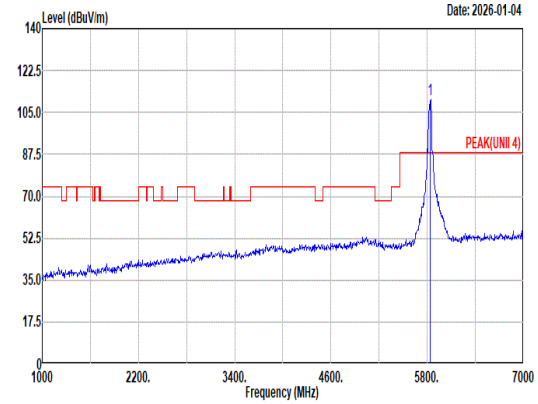 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 110.62 ------ ------ 99.37 33.90 10.21 32.86 0.00 100 6 Peak
Avg	Blank	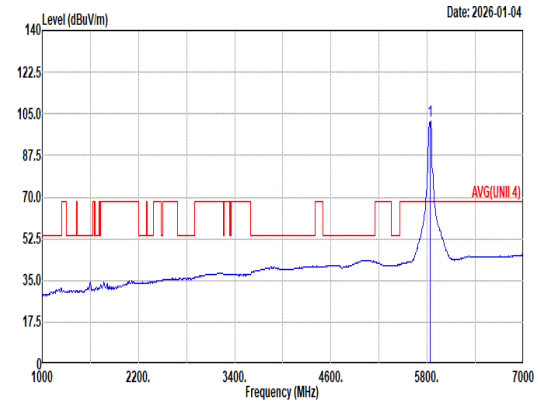 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 101.81 ------ ------ 90.56 33.90 10.21 32.86 0.00 100 6 Average

Mode	117	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_Full RU_5835MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	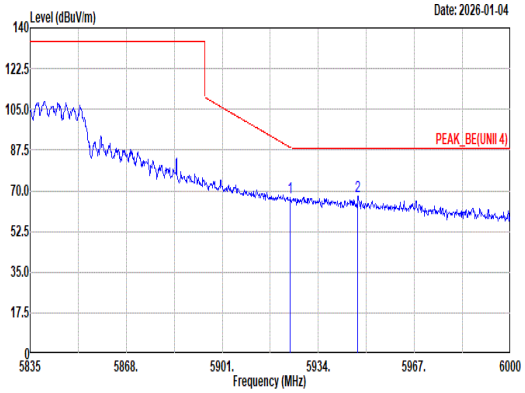 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.43 66.90 88.62 -21.72 55.16 34.15 10.48 32.89 0.00 100 6 Peak 2 5947.53 67.55 88.20 -20.65 55.70 34.20 10.55 32.90 0.00 100 6 Peak	Blank
Avg	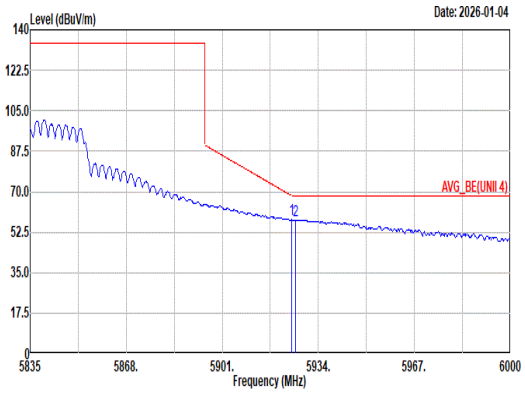 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.93 57.99 68.25 -10.26 46.25 34.15 10.48 32.89 0.00 100 6 Average 2 5926.08 57.78 68.20 -10.42 46.04 34.15 10.48 32.89 0.00 100 6 Average	Blank

Mode	117	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_Full RU_5835MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	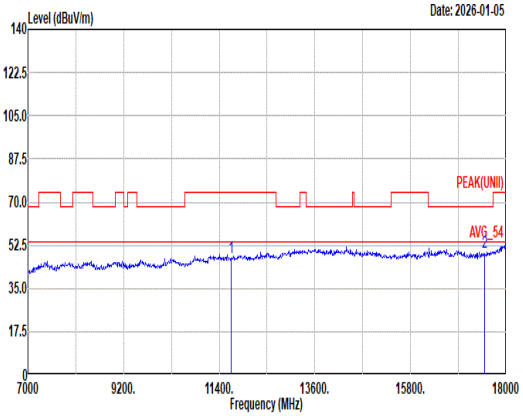 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11670.00 47.79 74.00 -26.21 57.19 38.54 17.64 66.03 0.45 -- -- Peak 2 17505.00 49.47 68.20 -18.73 54.82 38.63 21.75 66.22 0.49 -- -- Peak	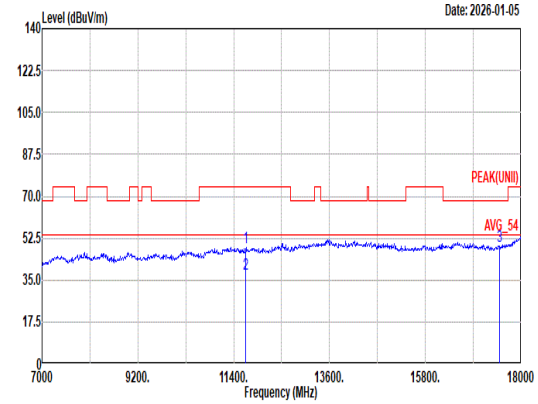 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11670.00 48.54 74.00 -25.46 57.94 38.54 17.64 66.03 0.45 -- -- Peak 2 11670.00 37.35 54.00 -16.65 46.75 38.54 17.64 66.03 0.45 -- -- Average 3 17505.00 49.26 68.20 -18.94 54.61 38.63 21.75 66.22 0.49 -- -- Peak

Mode	117	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_Full RU_5835MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	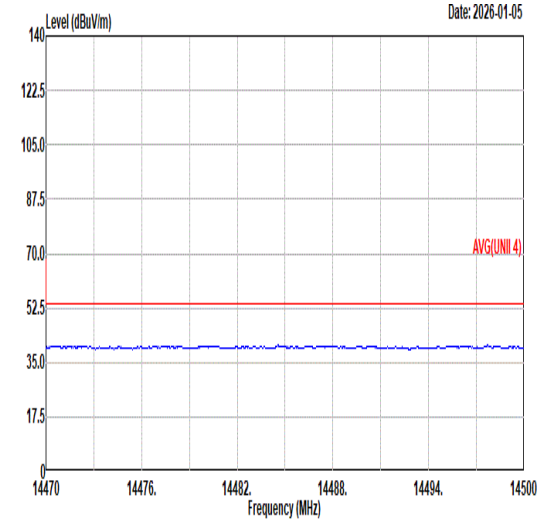 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	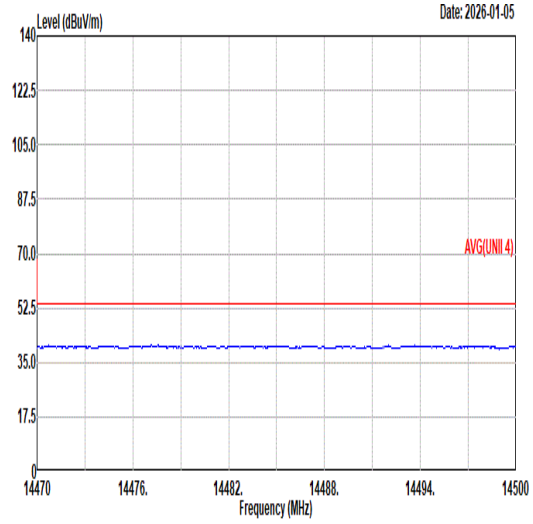 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL
17.7G ~18G Avg	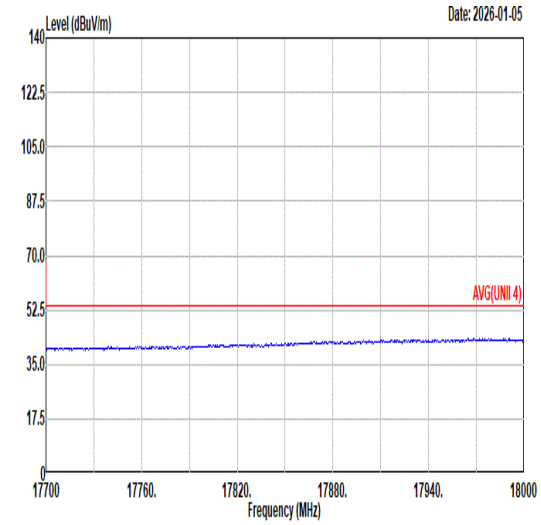 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	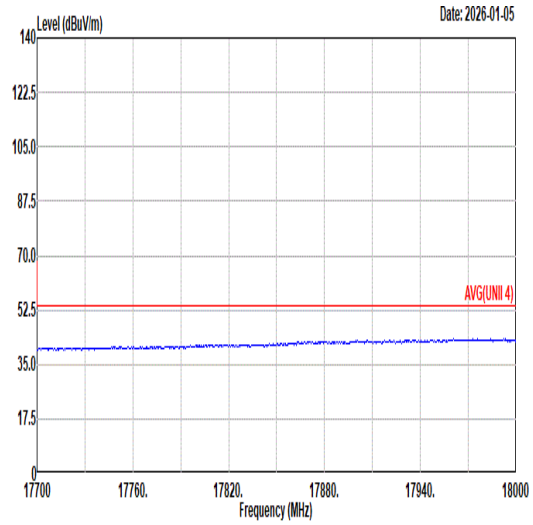 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL

Mode	118	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_Full RU_5875MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	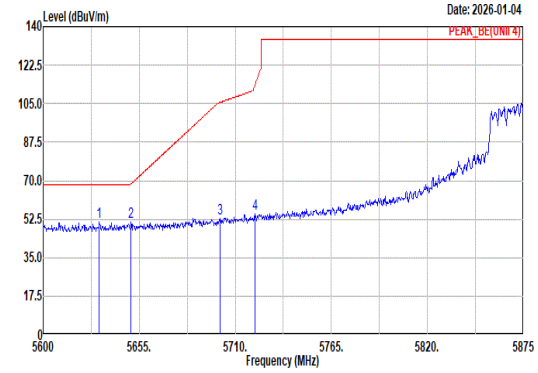 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5632.18 51.00 68.20 -17.20 40.52 32.89 10.37 32.78 0.00 200 69 Peak 2 5650.33 51.28 68.44 -17.16 40.74 33.00 10.33 32.79 0.00 200 69 Peak 3 5701.48 52.60 105.61 -53.01 41.75 33.41 10.25 32.81 0.00 200 69 Peak 4 5721.28 55.10 113.71 -58.61 44.21 33.49 10.21 32.81 0.00 200 69 Peak	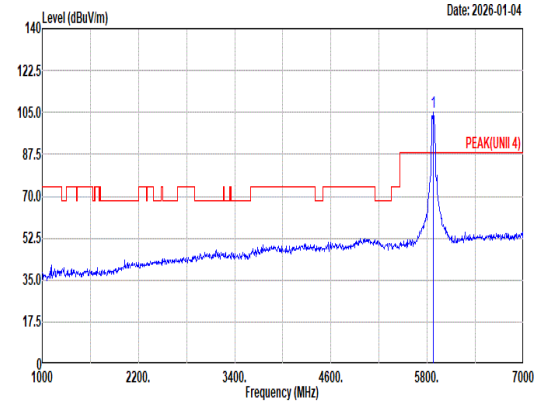 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 105.37 ------ ------ 93.90 34.01 10.33 32.87 0.00 200 69 Peak
Avg	Blank	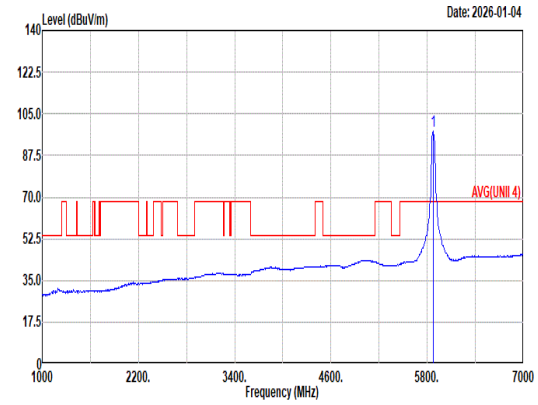 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 97.79 ------ ------ 86.36 33.99 10.31 32.87 0.00 200 69 Average

Mode	118	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_Full RU_5875MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	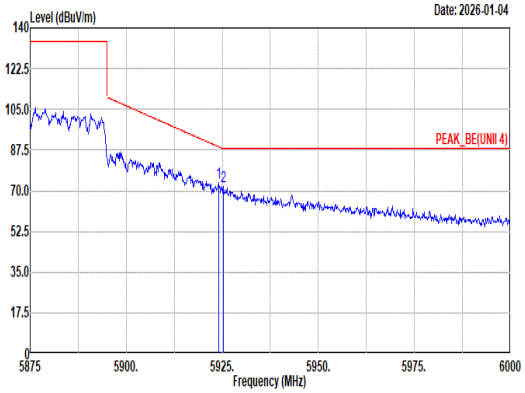 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.00 73.38 88.93 -15.55 61.64 34.15 10.48 32.89 0.00 200 69 Peak 2 5925.25 71.91 88.20 -16.29 60.17 34.15 10.48 32.89 0.00 200 69 Peak	Blank
Avg	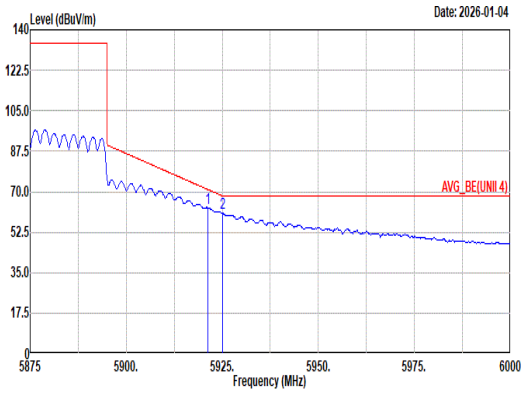 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5921.25 63.02 70.94 -7.92 51.30 34.14 10.47 32.89 0.00 200 69 Average 2 5925.00 60.73 68.20 -7.47 48.99 34.15 10.48 32.89 0.00 200 69 Average	Blank

Mode	118	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_Full RU_5875MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	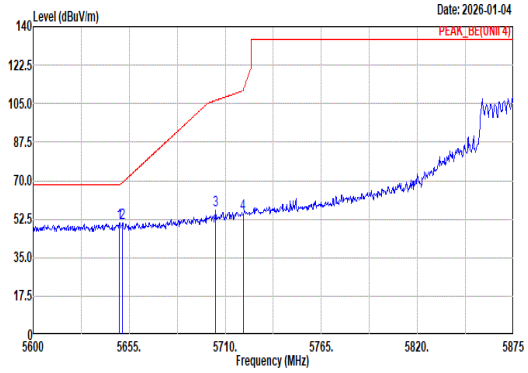 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.50 50.79 68.20 -17.41 40.24 33.00 10.34 32.79 0.00 104 341 Peak 2 5651.15 50.65 69.05 -18.40 40.10 33.01 10.33 32.79 0.00 104 341 Peak 3 5704.50 56.62 106.46 -49.84 45.77 33.42 10.24 32.81 0.00 104 341 Peak 4 5720.18 55.13 111.20 -56.07 44.24 33.48 10.22 32.81 0.00 104 341 Peak	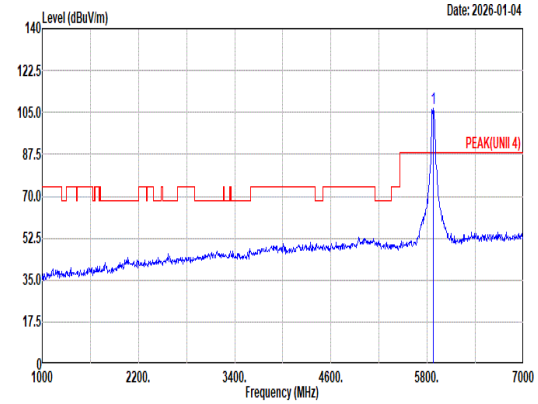 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 106.76 ------ ------ 95.33 33.99 10.31 32.87 0.00 104 341 Peak
Avg	Blank	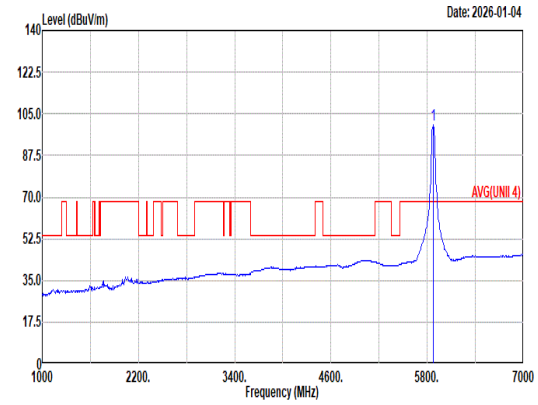 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 100.58 ------ ------ 89.11 34.01 10.33 32.87 0.00 104 341 Average

Mode	118	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_Full RU_5875MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	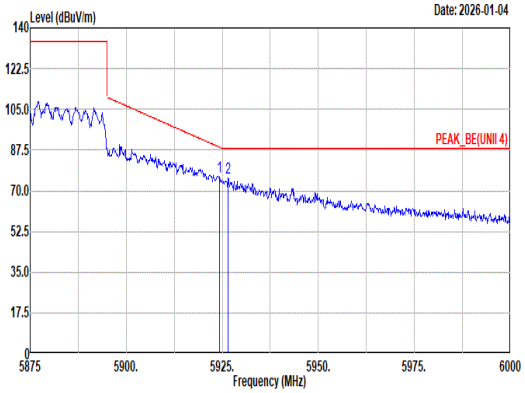 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.25 75.84 88.75 -12.91 64.10 34.15 10.48 32.89 0.00 104 341 Peak 2 5926.50 75.67 88.20 -12.53 63.93 34.15 10.48 32.89 0.00 104 341 Peak	Blank
Avg	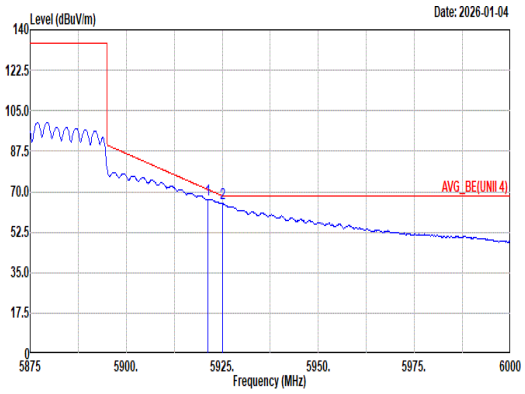 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5921.25 66.79 70.94 -4.15 55.07 34.14 10.47 32.89 0.00 104 341 Average 2 5925.00 64.92 68.20 -3.28 53.18 34.15 10.48 32.89 0.00 104 341 Average	Blank

Mode	118	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_Full RU_5875MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	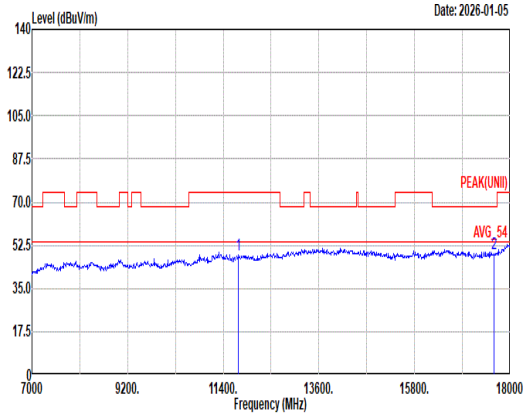 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11750.00 48.47 74.00 -25.53 57.90 38.40 17.71 66.00 0.46 -- -- Peak 2 17625.00 49.11 68.20 -19.09 54.46 39.15 21.82 66.82 0.50 -- -- Peak	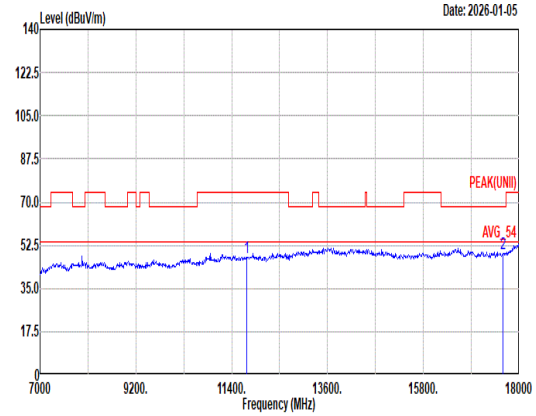 Site : 03CH11-HY Condition: PEAK(UNII) 3m 9120D_01620_250915 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11750.00 47.80 74.00 -26.20 57.23 38.40 17.71 66.00 0.46 -- -- Peak 2 17625.00 49.36 68.20 -18.84 54.71 39.15 21.82 66.82 0.50 -- -- Peak

Mode	118	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_Full RU_5875MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	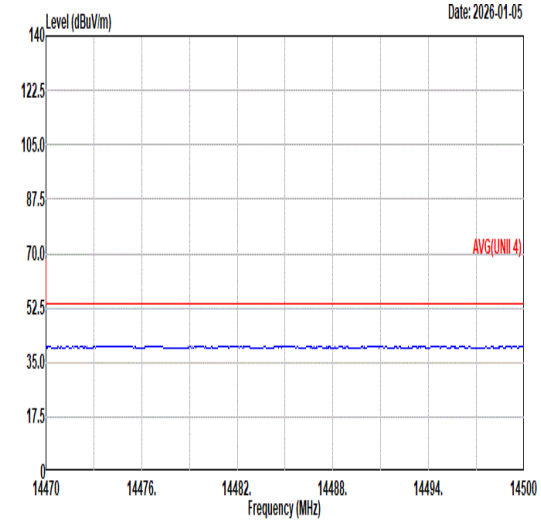 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	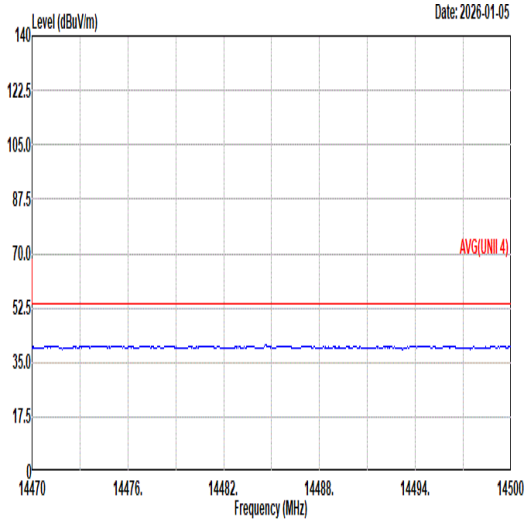 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL
17.7G ~18G Avg	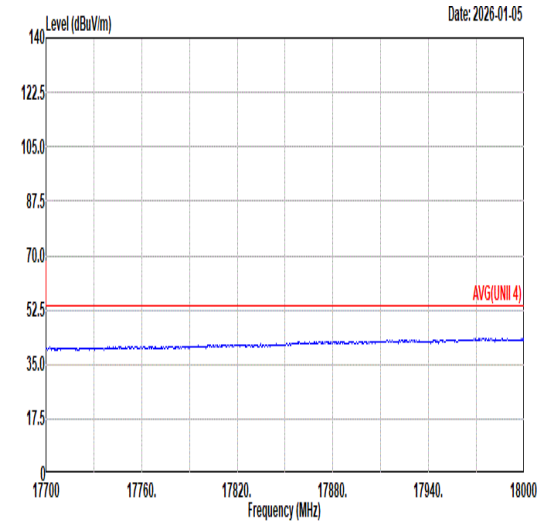 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL	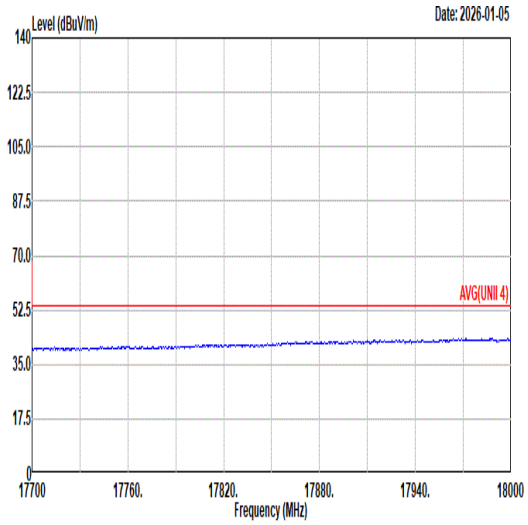 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL

Mode	119	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_Full RU_5855MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	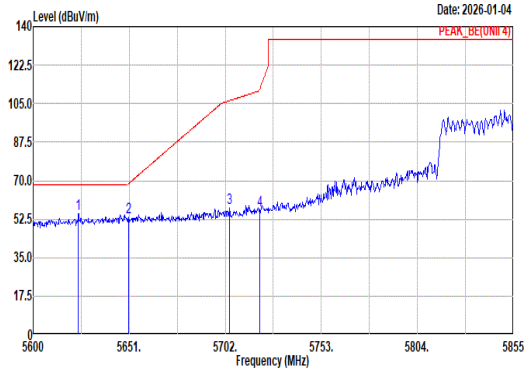 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5623.97 55.06 68.20 -13.14 44.62 32.84 10.38 32.78 0.00 300 74 Peak 2 5650.49 53.39 68.56 -15.17 42.85 33.00 10.33 32.79 0.00 300 74 Peak 3 5704.30 57.71 106.40 -48.69 46.86 33.42 10.24 32.81 0.00 300 74 Peak 4 5720.11 56.53 111.04 -54.51 45.64 33.48 10.22 32.81 0.00 300 74 Peak	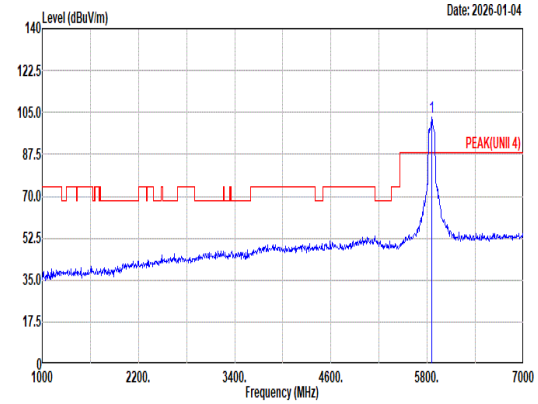 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 102.97 ------ ------ 91.63 33.94 10.27 32.87 0.00 300 74 Peak
Avg	Blank	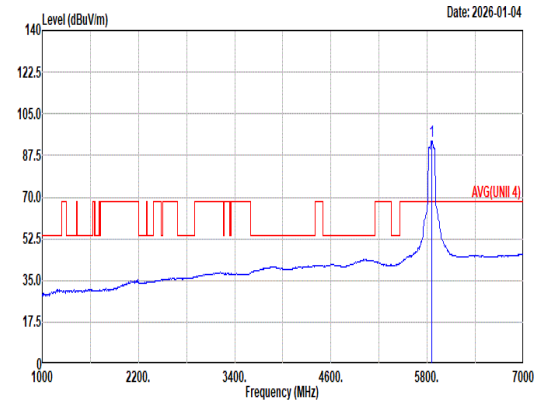 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 93.54 ------ ------ 82.20 33.94 10.27 32.87 0.00 300 74 Average

Mode	119	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_Full RU_5855MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	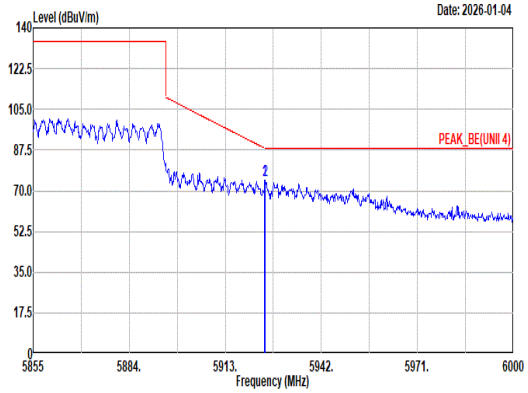 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.89 74.43 88.28 -13.85 62.69 34.15 10.48 32.89 0.00 300 74 Peak 2 5925.04 74.47 88.20 -13.73 62.73 34.15 10.48 32.89 0.00 300 74 Peak	Blank
Avg	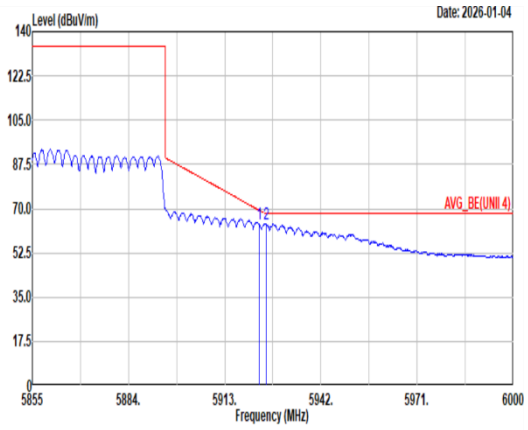 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.44 63.80 69.34 -5.54 52.06 34.15 10.48 32.89 0.00 300 74 Average 2 5925.47 63.94 68.20 -4.26 52.20 34.15 10.48 32.89 0.00 300 74 Average	Blank

Mode	119	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_Full RU_5855MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	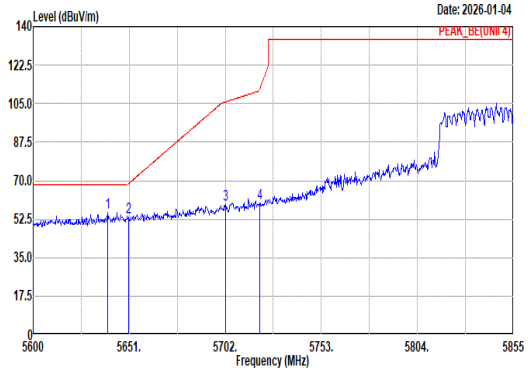 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5639.53 55.48 68.20 -12.72 44.97 32.94 10.35 32.78 0.00 106 342 Peak 2 5650.49 53.28 68.56 -15.28 42.74 33.00 10.33 32.79 0.00 106 342 Peak 3 5702.00 59.20 105.76 -46.56 48.35 33.41 10.25 32.81 0.00 106 342 Peak 4 5720.11 59.66 111.04 -51.38 48.77 33.48 10.22 32.81 0.00 106 342 Peak	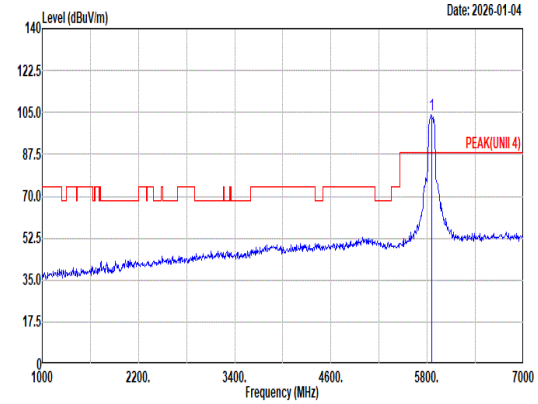 Site : 03CH11-HY Condition: PEAK(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 104.23 ------ ------ 92.96 33.90 10.23 32.86 0.00 106 342 Peak
Avg	Blank	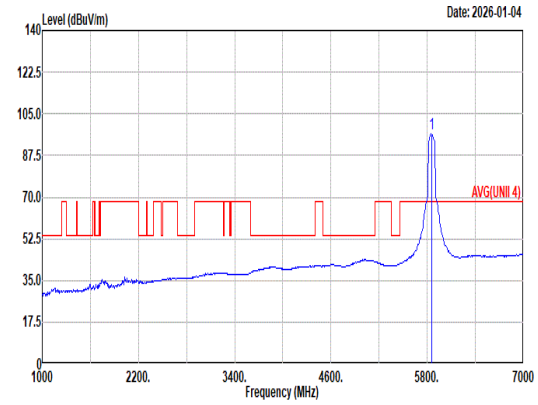 Site : 03CH11-HY Condition: AVG(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 96.82 ------ ------ 85.55 33.90 10.23 32.86 0.00 106 342 Average

Mode	119	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_Full RU_5855MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	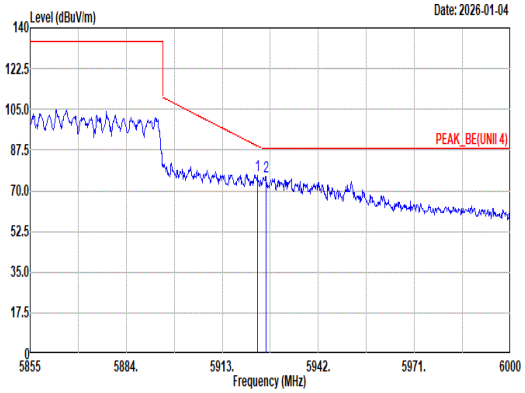 Site : 03CH11-HY Condition: PEAK_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.59 76.34 89.24 -12.90 64.60 34.15 10.48 32.89 0.00 106 342 Peak 2 5926.20 76.30 88.20 -11.90 64.56 34.15 10.48 32.89 0.00 106 342 Peak	Blank
Avg	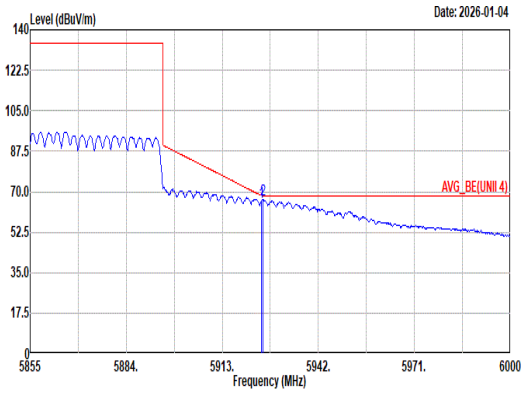 Site : 03CH11-HY Condition: AVG_BE(UNII 4) 3m 9120D_01620_250915 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.89 65.76 68.28 -2.52 54.02 34.15 10.48 32.89 0.00 106 342 Average 2 5925.18 66.41 68.20 -1.79 54.67 34.15 10.48 32.89 0.00 106 342 Average	Blank