



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
<http://www.pctestlab.com>



MEASUREMENT REPORT FCC PART 15.247 / IC RSS-210 WLAN 802.11b/g/n

Applicant Name:
Panasonic Corporation of North America
One Panasonic Way, 4B-8
Secaucus, NJ 07094
United States

Date of Testing:
August 13, 2010
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0Y1007231224.ACJ

FCC ID: ACJ9TGCF-19F

APPLICANT: Panasonic Corporation of North America

Application Type: Certification
Model(s): CF-19mk4
EUT Type: Toughbook Model: CF-19mk4
Max. RF Output Power: 196.3 mW (22.93 dBm) Peak Conducted (802.11b)
490.9 mW (26.91 dBm) Peak Conducted (802.11g)
528.4 mW (27.23 dBm) Peak Aggregate Conducted (20MHz 802.11n)
339.6 mW (25.31 dBm) Peak Aggregate Conducted (40MHz 802.11n)
Frequency Range: 2412 - 2462 MHz (DSSS/OFDM)
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15.247
Test Device Serial No.: N/A

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2003. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Listed output power is conducted.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

Randy Ortenez
President




FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 1 of 73

TABLE OF CONTENTS


FCC PART 15.247 MEASUREMENT REPORT	3
1.0 INTRODUCTION.....	4
1.1 SCOPE.....	4
1.2 PCTEST TEST LOCATION.....	4
2.0 PRODUCT INFORMATION	5
2.1 EQUIPMENT DESCRIPTION.....	5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....	5
2.3 LABELING REQUIREMENTS.....	5
3.0 DESCRIPTION OF TEST	6
3.1 EVALUATION PROCEDURE.....	6
3.2 CONDUCTED EMISSIONS.....	6
3.3 RADIATED EMISSIONS	7
4.0 ANTENNA REQUIREMENTS	8
5.0 TEST EQUIPMENT CALIBRATION DATA.....	9
6.0 TEST RESULTS	10
6.1 SUMMARY	10
6.2 6DB BANDWIDTH MEASUREMENT – 802.11B/G/N	11
6.3 OUTPUT POWER MEASUREMENT – 802.11B/G	17
6.4 OUTPUT POWER MEASUREMENT – 802.11N (20MHZ).....	21
6.5 OUTPUT POWER MEASUREMENT – 802.11N (40MHZ).....	24
6.6 POWER SPECTRAL DENSITY (802.11B/G/N)	27
6.7 OUT OF BAND EMISSIONS AT THE BAND EDGE	34
6.8 OUT OF BAND EMISSIONS.....	50
6.9 RADIATED SPURIOUS EMISSION MEASUREMENTS.....	57
6.10 RADIATED RESTRICTED BAND EDGE MEASUREMENTS	61
6.11 LINE-CONDUCTED TEST DATA.....	67
CONCLUSION	73

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 2 of 73



MEASUREMENT REPORT

FCC Part 15.247



§ 2.1033 General Information

APPLICANT: Panasonic Corporation of North America

APPLICANT ADDRESS: One Panasonic Way, 4B-8
Secaucus, NJ 07094

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA

FCC RULE PART(S): Part 15.247

MODEL NAME: CF-19mk4

FCC ID: ACJ9TGCF-19F

Test Device Serial No.: N/A ☐ Production ☒ Pre-Production ☐ Engineering



FCC CLASSIFICATION: Digital Transmission System (DTS)

DATE(S) OF TEST: August 13, 2010

TEST REPORT S/N: 0Y1007231224.ACJ

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 3 of 73

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006.

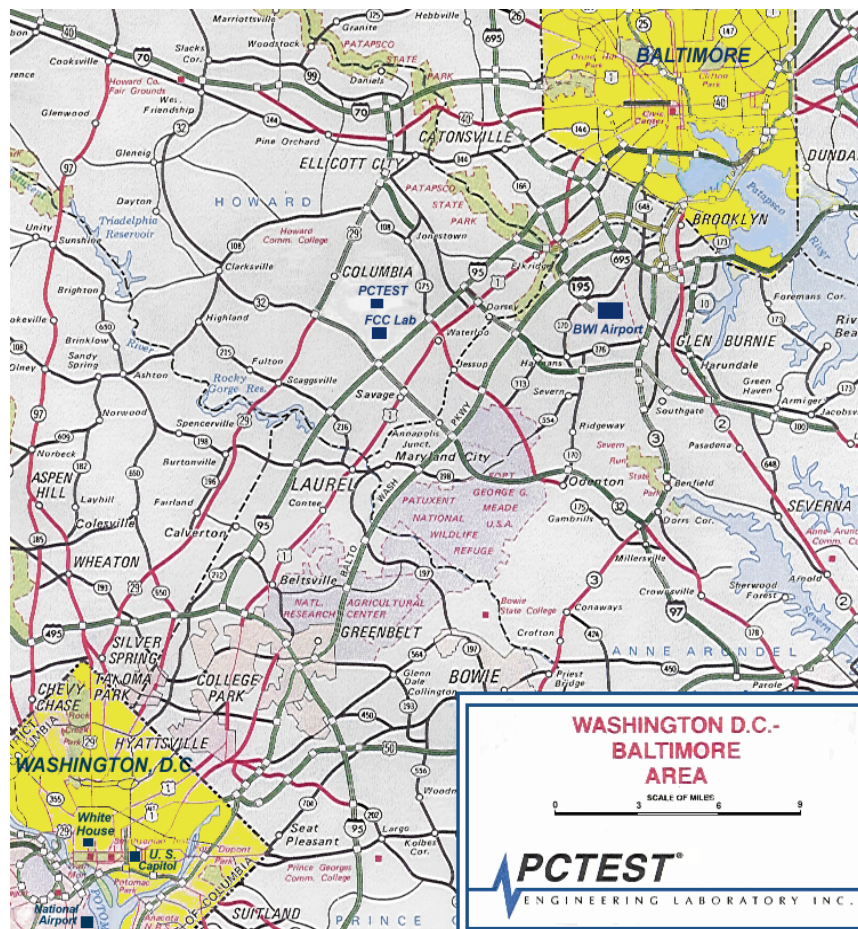


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 4 of 73

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Panasonic Toughbook Model: CF-19mk4 FCC ID: ACJ9TGCF-19F**. The EUT consisted of the following component(s):

Manufacturer / Model	FCC ID	Description
Panasonic / Model: CF-19mk4	ACJ9TGCF-19F	Toughbook Model: CF-19mk4
Alps / Model: UGNZA	N/A	Bluetooth Module
Qualcomm / Model: Gobi2000	N7NGOBI2	WWAN Module
Azurewave Technologies / Model: N5HZC0000054	N/A	802.11b/g/n Wireless LAN Module

Table 2-1. EUT Equipment Description

2.2 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.3 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 5 of 73

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC procedure dated March 23, 2005 entitled "Measurements of Digital Transmission Systems Operating Under Section 15.247" were used in the measurement of **Panasonic Toughbook Model: CF-19mk4 FCC ID: ACJ9TGCF-19F**.

Deviation from measurement procedure.....None

3.2 Conducted Emissions




Figure 3-1. Shielded Enclosure Line-Conducted Test Facility




Figure 3-2. Line Conducted Emission Test Set-Up




Figure 3-3. Wooden Table & Bonded LISNs




Figure 3-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see Figure 3-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (see Figure 3-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator.

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 6 of 73

3.3 Radiated Emissions




Figure 3-5. 3-Meter Test Site




Figure 3-6. Dimensions of Outdoor Test Site

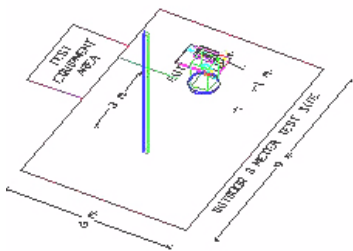


Figure 3-7. Turntable and System Setup

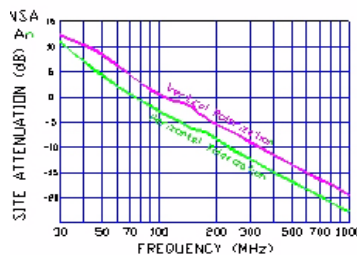


Figure 3-8. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using RobertsTM Dipole antennas or horn antennas (see Figure 3-5). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3-6). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 100kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. Above 1GHz the detector function was set to average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3-7). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3-8.

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 7 of 73

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Toughbook Model: CF-19mk4 are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Panasonic Toughbook Model: CF-19mk4 FCC ID: ACJ9TGCF-19F** unit complies with the requirement of §15.203.

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	a 2412	7	a/n 2442
2	a 2417	8	a/n 2447
3	a/n 2422	9	a/n 2452
4	a/n 2427	10	a 2457
5	a/n 2432	11	a 2462
6	a/n 2437		

Table 4-1. Frequency Channel Operations

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 8 of 73

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	No.165	(30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166	(1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167	(100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Agilent	11713A	Attenuation/Switch Driver	12/2/2009	Annual	12/2/2010	3439A02645
Agilent	8447D	Broadband Amplifier	3/18/2010	Annual	3/18/2011	1937A03348
Agilent	8447D	Broadband Amplifier	3/18/2010	Annual	3/18/2011	2443A01900
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	12/2/2009	Annual	12/2/2010	3008A00985
Agilent	85650A	Quasi-Peak Adapter	12/2/2009	Annual	12/2/2010	3303A01872
Agilent	85650A	Quasi-Peak Adapter	3/30/2010	Annual	3/30/2011	2043A00301
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	3/30/2010	Annual	3/30/2011	2618A02866
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	3/30/2010	Annual	3/30/2011	2542A11898
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	12/2/2009	Annual	12/2/2010	3638A08713
Agilent	E4407B	ESA Spectrum Analyzer	3/30/2010	Annual	3/30/2011	US39210313
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	10/1/2009	Annual	10/1/2010	US42510244
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/30/2010	Annual	3/30/2011	MY45470194
Agilent	N9020A	MXA Signal Analyzer	10/22/2009	Annual	10/22/2010	US46470561
Anritsu	ML2495A	Power Meter	10/12/2009	Annual	10/12/2010	941001
Emco	3115	Horn Antenna (1-18GHz)	10/14/2009	Biennial	10/14/2011	9704-5182
Emco	3115	Horn Antenna (1-18GHz)	4/8/2010	Biennial	4/8/2012	9205-3874
Emco	3116	Horn Antenna (18 - 40GHz)	9/9/2008	Triennial	9/9/2011	9203-2178
Emco	3816/2	LISN	9/8/2008	Biennial	9/8/2010	9707-1077
Emco	3816/2	LISN	9/8/2008	Biennial	9/8/2010	9707-1079
Gigatronics	80701A	(0.05-18GHz) Power Sensor	9/9/2009	Annual	9/9/2010	1833460
Gigatronics	8651A	Universal Power Meter	9/9/2009	Annual	9/9/2010	8650319
MiniCircuits	VHF-3100+	High Pass Filter	N/A		N/A	30721
Rohde & Schwarz	FSQ 26	Spectrum Analyzer	9/19/2009	Annual	9/19/2010	200452
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	5/14/2009	Biennial	5/14/2011	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/17/2009	Biennial	7/17/2011	A051107

Table 5-1. Annual Test Equipment Calibration Schedule

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 9 of 73

6.0 TEST RESULTS

6.1 Summary

Company Name: Panasonic Corporation of North America

FCC ID: ACJ9TGCF-19F

FCC Classification: Digital Transmission System (DTS)

Data Rate(s) Tested: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)
6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)
6.5/13.5Mbps, 13/27Mbps, 19.5/40.5Mbps, 26/54Mbps, 39/81Mbps,
52/108Mbps, 58.5/121.5Mbps, 65/135Mbps (n)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
15.247(a)(2)	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 6.2
15.247(b)(3)	Transmitter Output Power	< 1 Watt		PASS	Sections 6.3, 6.4, 6.5
15.247(e)	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 6.6
15.247(d)	Band Edge / Out-of-Band Emissions	Conducted < 20dBc		PASS	Sections 6.7, 6.8
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	RADIATED	PASS	Sections 6.9, 6.10
15.207	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 6.11

Table 6-1. Summary of Test Results

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4	Page 10 of 73	

6.2 6dB Bandwidth Measurement – 802.11b/g/n

§15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies. **The minimum permissible 6dB bandwidth is 500 kHz.**

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2412	1	b	1	12.610	0.500	Pass
2437	6	b	1	12.090	0.500	Pass
2462	11	b	1	12.130	0.500	Pass
2412	1	g	6	16.500	0.500	Pass
2437	6	g	6	16.460	0.500	Pass
2462	11	g	6	16.460	0.500	Pass
2412	1	n	6.5 (MCS0)	17.700	0.500	Pass
2437	6	n	6.5 (MCS0)	17.660	0.500	Pass
2462	11	n	6.5 (MCS0)	17.660	0.500	Pass
2422	3	n	13.5 (MCS0)	36.400	0.500	Pass
2437	6	n	13.5 (MCS0)	26.270	0.500	Pass
2452	9	n	13.5 (MCS0)	36.470	0.500	Pass

Table 6-2. Conducted Bandwidth Measurements – Main Antenna

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 11 of 73

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2412	1	b	1	12.530	0.500	Pass
2437	6	b	1	12.810	0.500	Pass
2462	11	b	1	12.170	0.500	Pass
2412	1	g	6	16.500	0.500	Pass
2437	6	g	6	16.460	0.500	Pass
2462	11	g	6	16.540	0.500	Pass
2412	1	n	6.5 (MCS0)	17.660	0.500	Pass
2437	6	n	6.5 (MCS0)	17.700	0.500	Pass
2462	11	n	6.5 (MCS0)	17.700	0.500	Pass
2422	3	n	13.5 (MCS0)	36.400	0.500	Pass
2437	6	n	13.5 (MCS0)	36.470	0.500	Pass
2452	9	n	13.5 (MCS0)	36.470	0.500	Pass

Table 6-3. Conducted Bandwidth Measurements – Aux Antenna






Figure 6-1. Test Instrument & Measurement Setup

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 12 of 73

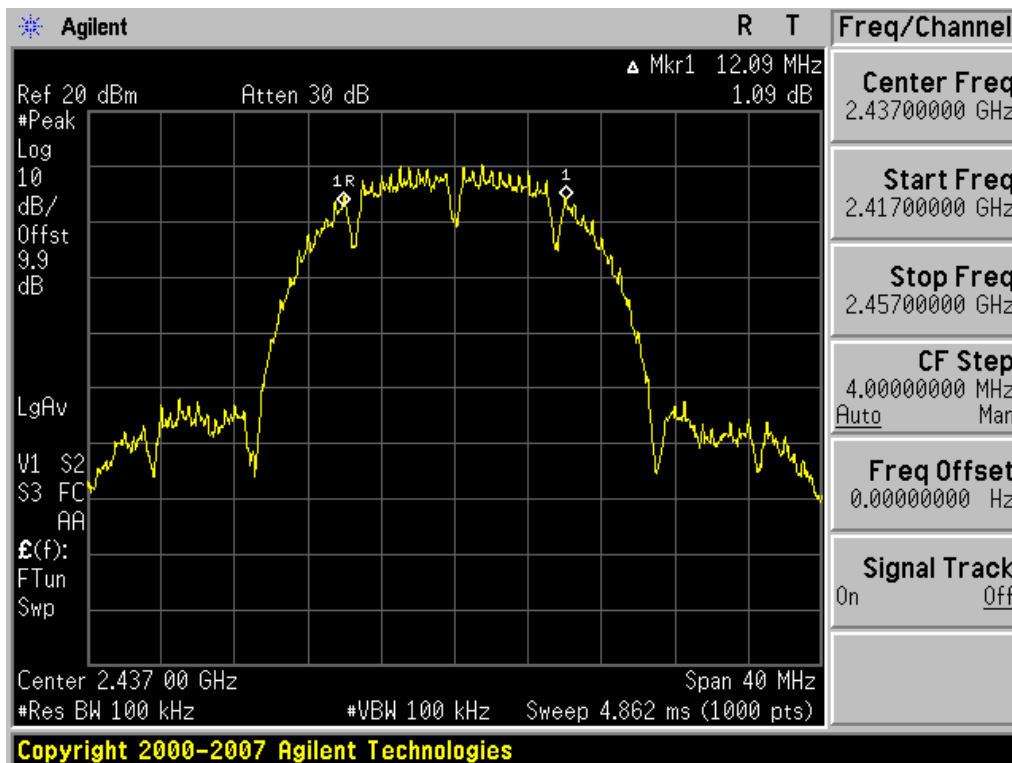


Plot 6-1. 6dB Bandwidth Plot (802.11b – Ch. 6) – Main Antenna

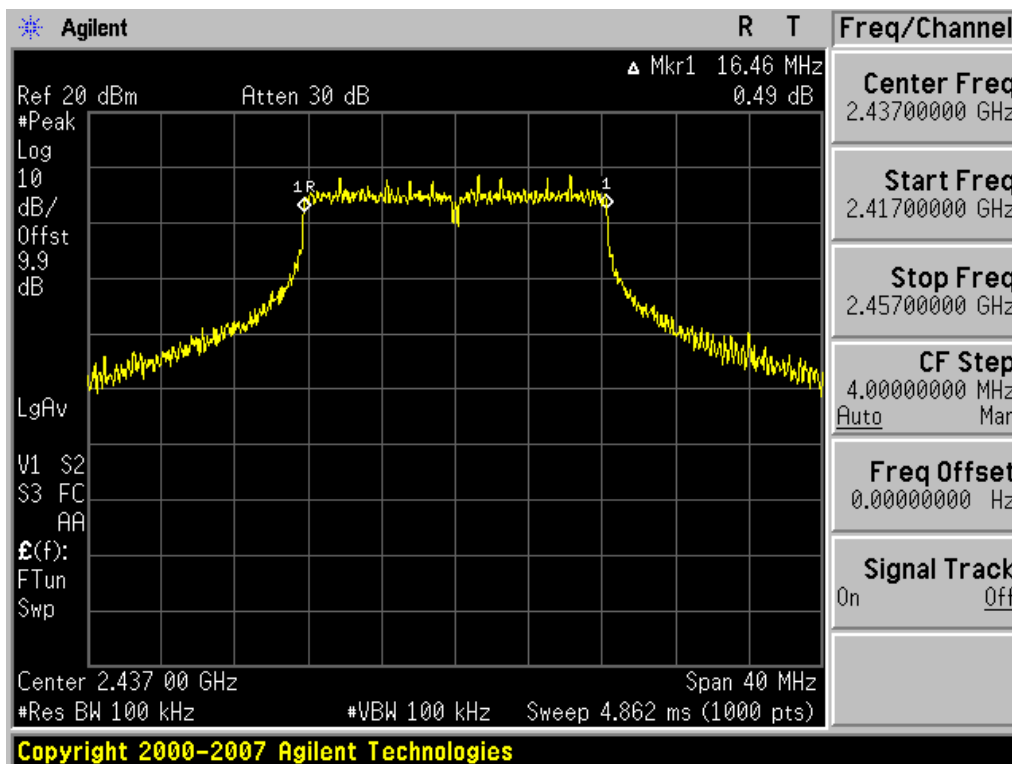


Plot 6-2. 6dB Bandwidth Plot (802.11g – Ch. 6) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 13 of 73

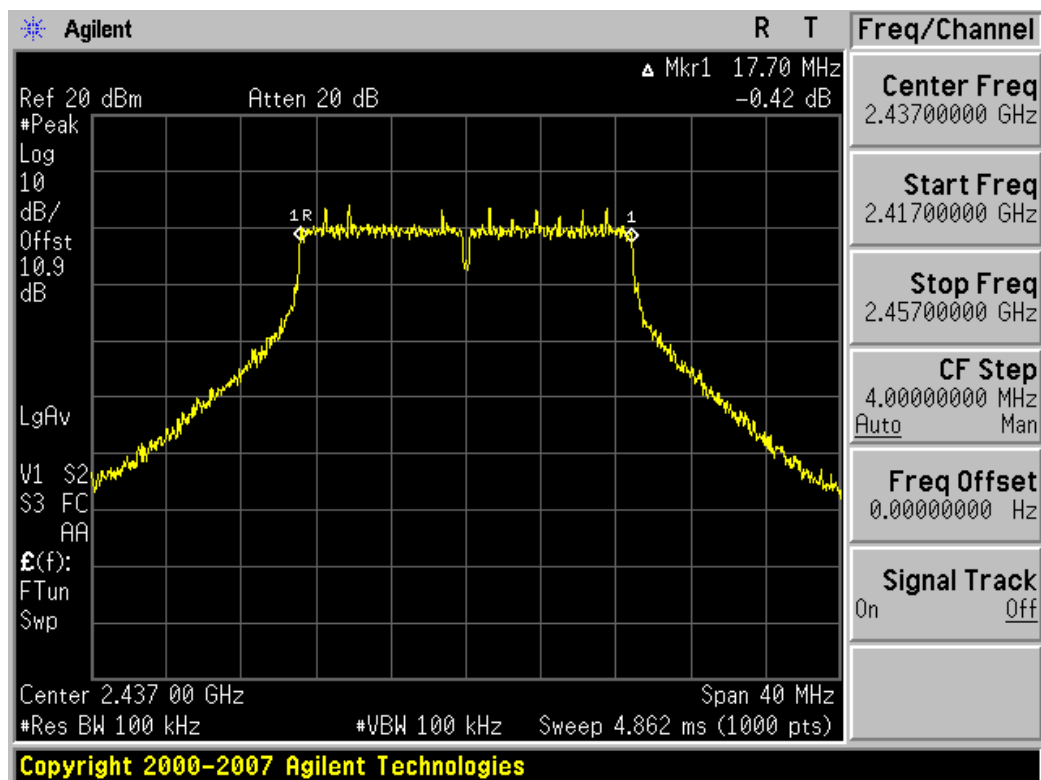


Plot 6-3. 6dB Bandwidth Plot (802.11n (20MHz) – Ch. 6) – Main Antenna

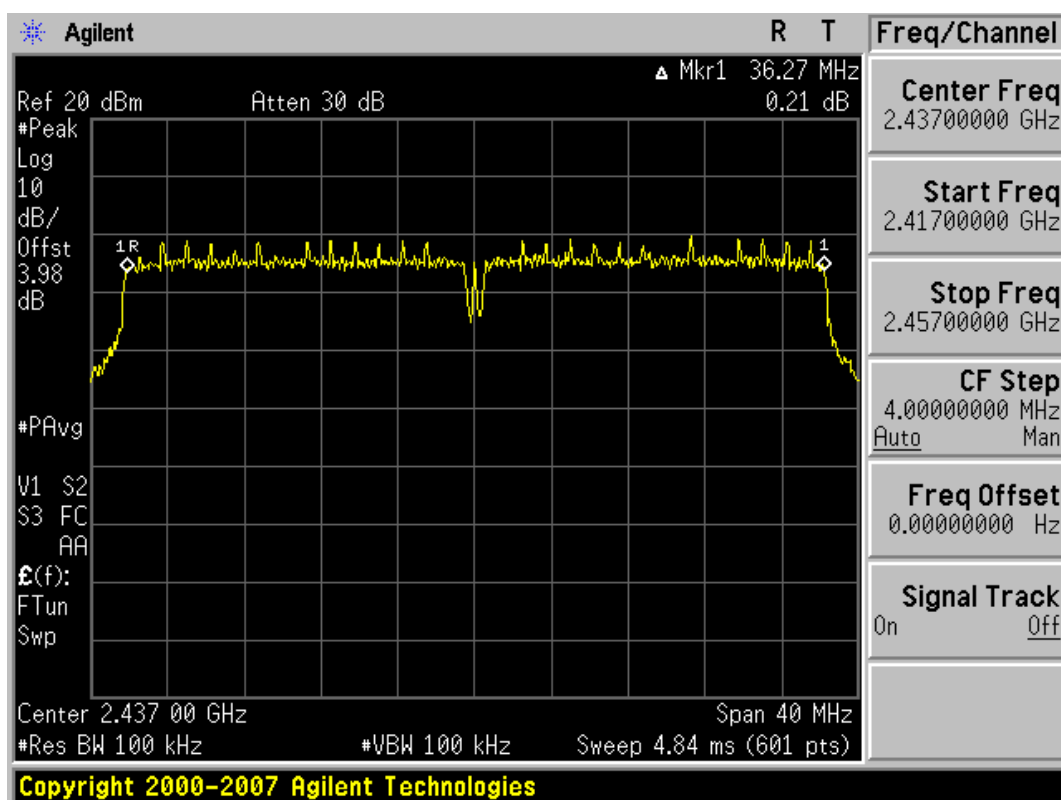


Plot 6-4. 6dB Bandwidth Plot (802.11n (40MHz) – Ch. 6) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 14 of 73

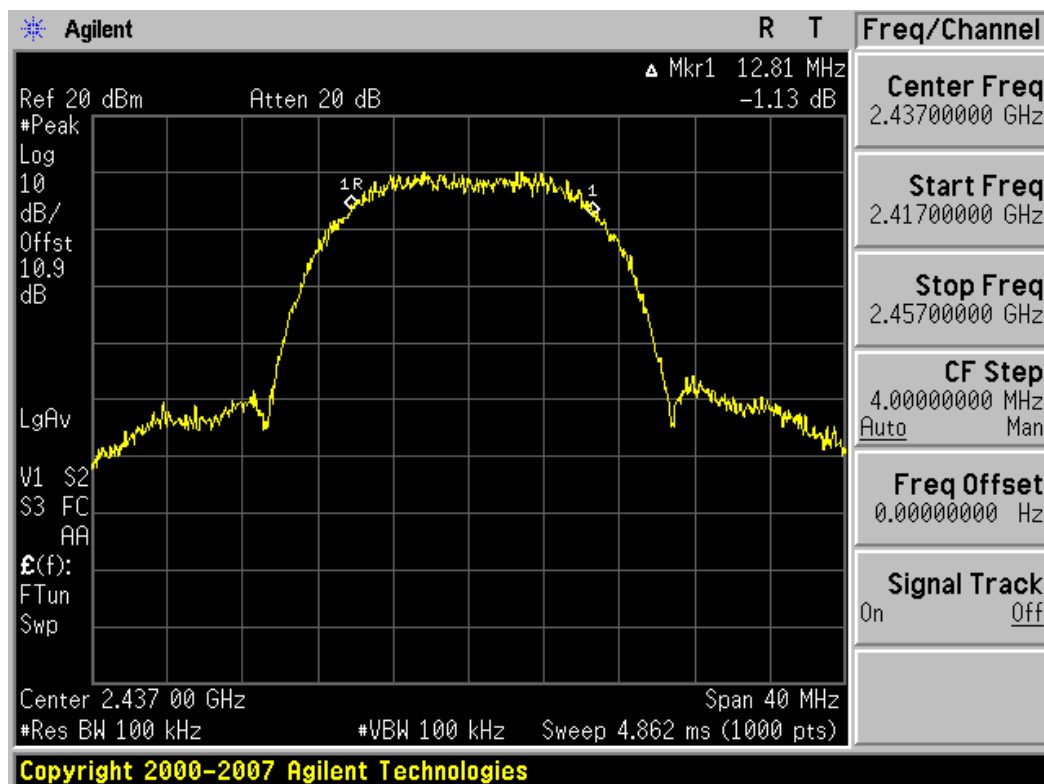


Plot 6-5. 6dB Bandwidth Plot (802.11b – Ch. 6) – Aux Antenna

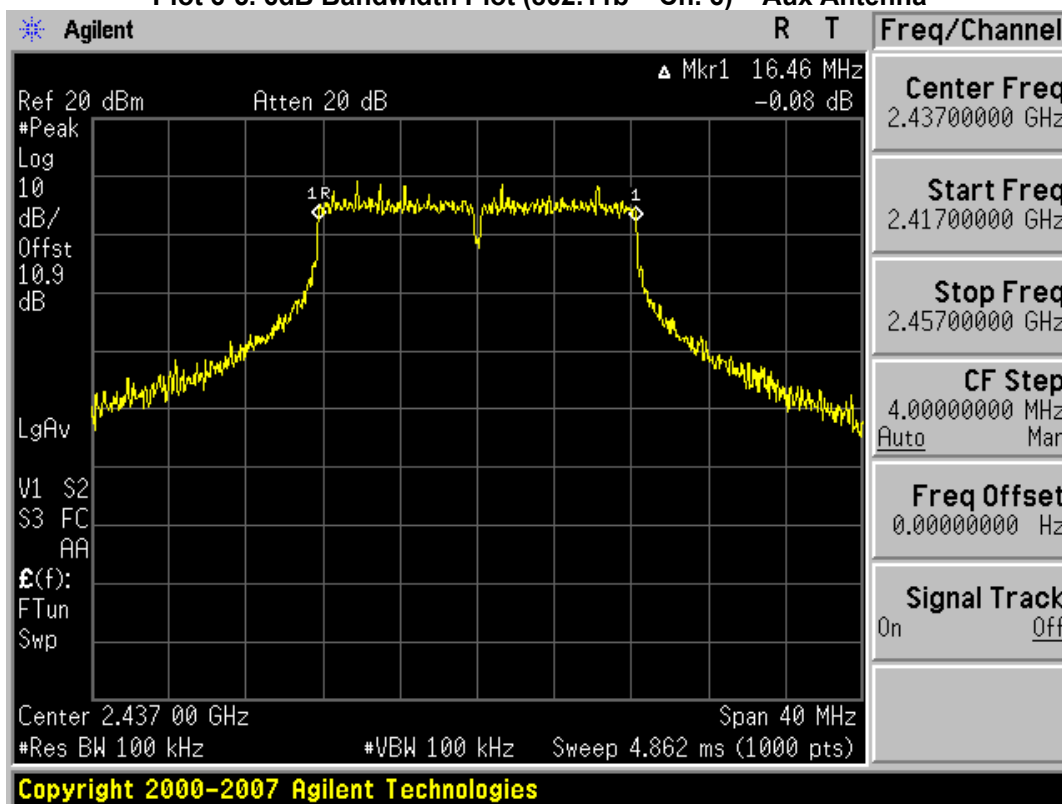


Plot 6-6. 6dB Bandwidth Plot (802.11g – Ch. 6) – Aux Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 15 of 73

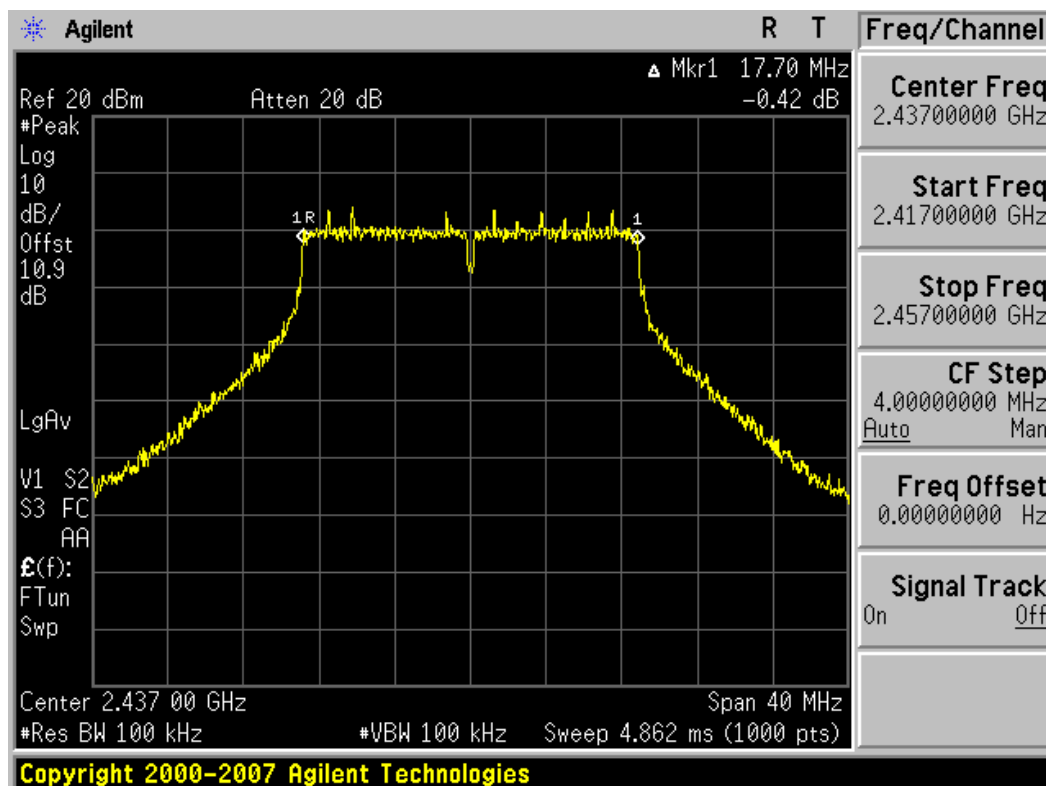

Plot 6-7. 6dB Bandwidth Plot (802.11n (20MHz) - Ch. 6) - Aux Antenna

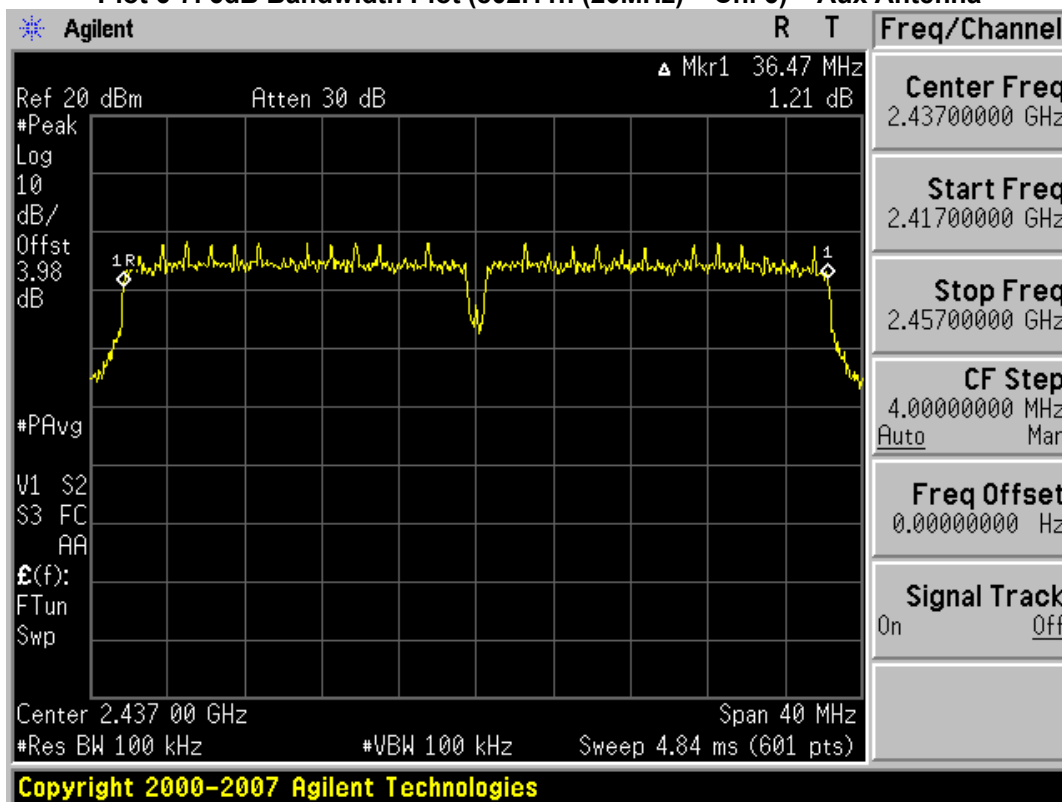

Plot 6-8. 6dB Bandwidth Plot (802.11n (40MHz) - Ch. 6) - Aux Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 16 of 73

6.3 Output Power Measurement – 802.11b/g

§15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is 1 Watt.**

Main Antenna

Freq [MHz]	Chan	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2412	1	1	15.95	18.49
		2	15.99	18.67
		5.5	16.02	18.48
		11	16.05	18.66
2437	6	1	19.87	22.31
		2	19.85	22.56
		5.5	19.80	22.35
		11	19.82	22.59
2462	11	1	16.43	19.01
		2	16.59	19.25
		5.5	16.63	19.03
		11	16.66	19.32

Table 6-4. 802.11b Conducted Output Power Measurements




Figure 6-2. Test Instrument & Measurement Setup

Freq [MHz]	Chan	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2412	1	6	12.97	22.38
		9	12.75	22.35
		12	12.74	22.21
		18	12.81	21.08
		24	12.86	21.15
		36	12.90	21.31
		48	12.81	21.32
		54	12.60	21.25
2437	6	6	20.04	26.00
		9	20.04	26.11
		12	19.99	26.09
		18	20.01	26.15
		24	20.00	26.11
		36	18.90	25.81
		48	18.09	25.28
		54	14.69	23.12
2462	11	6	14.14	23.01
		9	13.92	22.89
		12	13.88	22.76
		18	14.09	23.01
		24	13.82	22.89
		36	13.91	22.30
		48	14.00	22.42
		54	13.90	22.35

Table 6-5. 802.11g Conducted Output Power Measurements

Main Antenna –channels adjacent to lowest and highest channels..

Freq [MHz]	Chan	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2417	2	1	18.43	21.11
		2	18.45	20.97
		5.5	18.39	20.91
		11	18.40	20.83
2457	10	1	18.65	21.30
		2	18.63	21.43
		5.5	18.72	21.30
		11	18.71	21.46

Table 6-6. 802.11b Conducted Output Power Measurements




Figure 6-3. Test Instrument & Measurement Setup

Freq [MHz]	Chan	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2417	2	6	15.70	23.93
		9	15.62	23.86
		12	15.73	23.91
		18	15.81	23.93
		24	15.75	23.75
		36	15.77	23.85
		48	15.80	23.93
		54	14.34	22.93
2457	10	6	16.15	24.08
		9	16.18	24.23
		12	16.14	24.12
		18	16.16	24.20
		24	16.20	24.21
		36	16.05	24.15
		48	16.06	24.21
		54	14.88	23.35

Table 6-7. 802.11g Conducted Output Power Measurements

Aux Antenna

Freq [MHz]	Chan	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2412	1	1	15.82	18.17
		2	15.94	18.61
		5.5	16.11	18.94
		11	16.08	19.02
2437	6	1	19.81	22.93
		2	19.77	22.70
		5.5	19.73	22.24
		11	19.65	21.77
2462	11	1	16.46	18.66
		2	16.50	19.05
		5.5	16.51	19.52
		11	16.43	19.54

Table 6-8. 802.11b Conducted Output Power Measurements




Figure 6-4. Test Instrument & Measurement Setup

Freq [MHz]	Chan	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2412	1	6	12.67	21.34
		9	12.77	21.44
		12	12.74	21.23
		18	12.68	21.45
		24	12.75	21.28
		36	12.81	21.36
		48	12.32	21.15
		54	12.22	21.39
2437	6	6	19.80	26.80
		9	19.58	26.85
		12	19.73	26.73
		18	19.79	26.81
		24	19.70	26.91
		36	18.78	26.35
		48	17.29	25.70
		54	13.10	22.08
2462	11	6	13.09	21.58
		9	13.07	21.57
		12	13.07	21.63
		18	13.11	21.54
		24	13.14	21.72
		36	13.05	21.76
		48	12.61	21.76
		54	12.63	21.74

Table 6-9. 802.11g Conducted Output Power Measurements

Aux Antenna – channels adjacent to lowest and highest channels..

Freq [MHz]	Chan	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2417	2	1	18.33	20.81
		2	18.35	20.98
		5.5	18.30	21.14
		11	18.31	21.28
2457	10	1	18.16	20.55
		2	18.22	20.93
		5.5	18.39	21.38
		11	18.37	21.50

Table 6-10. 802.11b Conducted Output Power Measurements




Figure 6-5. Test Instrument & Measurement Setup

Freq [MHz]	Chan	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2417	2	6	14.95	23.51
		9	14.90	23.42
		12	14.94	23.41
		18	14.96	25.54
		24	15.00	23.36
		36	15.00	23.52
		48	14.46	23.34
		54	13.24	22.31
2457	10	6	15.41	23.92
		9	15.44	24.01
		12	15.47	23.90
		18	15.47	24.00
		24	15.49	24.02
		36	15.42	24.10
		48	14.97	24.07
		54	13.81	22.78

Table 6-11. 802.11g Conducted Output Power Measurements

6.4 Output Power Measurement – 802.11n (20MHz)

§15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. ***The maximum permissible conducted output power is 1 Watt.***

Main Antenna

Freq [MHz]	Chan	MCS Index	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2412	1	0	6.5	8.32	16.40
		1	13	8.14	16.33
		2	19.5	8.08	16.32
		3	26	7.99	16.29
		4	39	8.02	16.63
		5	52	7.91	16.43
		6	58.5	7.81	16.45
		7	65	7.57	16.31
2437	6	0	6.5	16.06	23.98
		1	13	13.61	21.90
		2	19.5	13.63	21.85
		3	26	13.68	22.05
		4	39	13.82	22.17
		5	52	13.82	22.02
		6	58.5	13.65	22.11
		7	65	13.53	22.16
2462	11	0	6.5	9.44	17.48
		1	13	9.43	17.41
		2	19.5	9.32	17.63
		3	26	9.26	17.70
		4	39	9.35	17.70
		5	52	9.28	17.88
		6	58.5	9.09	17.82
		7	65	8.84	17.76

Table 6-12. 802.11n (20MHz Bandwidth) Conducted Output Power Measurements

Aux Antenna

Freq [MHz]	Chan	MCS Index	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2412	1	0	6.5	7.02	15.60
		1	13	7.93	15.71
		2	19.5	8.12	15.70
		3	26	8.03	15.77
		4	39	8.05	15.76
		5	52	8.00	15.78
		6	58.5	8.05	15.94
		7	65	7.74	15.78
2437	6	0	6.5	15.46	23.35
		1	13	13.25	21.12
		2	19.5	13.22	20.97
		3	26	13.23	21.11
		4	39	13.24	21.24
		5	52	13.21	21.40
		6	58.5	13.29	21.11
		7	65	12.94	21.22
2462	11	0	6.5	9.97	18.75
		1	13	9.96	18.73
		2	19.5	9.93	18.83
		3	26	9.71	18.76
		4	39	9.85	18.82
		5	52	9.80	19.08
		6	58.5	9.62	18.95
		7	65	9.35	19.11

Table 6-13. 802.11n (20MHz Bandwidth) Conducted Output Power Measurements

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 21 of 73

Main Antenna – channels adjacent to lowest and highest channels

Freq [MHz]	Chan	MCS Index	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2417	2	0	6.5	11.89	20.21
		1	13	11.95	20.17
		2	19.5	11.81	20.28
		3	26	11.70	20.26
		4	39	11.82	20.33
		5	52	11.76	20.36
		6	58.5	11.34	20.28
		7	65	11.83	20.27
2457	10	0	6.5	12.71	21.00
		1	13	12.68	21.02
		2	19.5	12.70	20.90
		3	26	12.63	21.02
		4	39	12.67	21.00
		5	52	12.70	21.06
		6	58.5	12.63	21.26
		7	65	12.24	21.20

Table 6-14. 802.11n (20MHz Bandwidth) Conducted Output Power Measurements

Aux Antenna– channels adjacent to lowest and highest channels

Freq [MHz]	Chan	MCS Index	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2417	2	0	6.5	12.19	20.04
		1	13	12.18	20.01
		2	19.5	12.20	20.09
		3	26	12.13	20.09
		4	39	12.19	20.04
		5	52	12.24	20.22
		6	58.5	12.18	20.14
		7	65	11.89	20.21
2457	10	0	6.5	12.63	21.30
		1	13	12.59	21.33
		2	19.5	12.50	21.31
		3	26	12.39	21.52
		4	39	12.42	21.54
		5	52	12.24	21.47
		6	58.5	12.19	21.46
		7	65	12.01	21.66

Table 6-15. 802.11n (20MHz Bandwidth) Conducted Output Power Measurements

Aggregate (Main + Aux) Antenna – 802.11n (20MHz Bandwidth)

Freq [MHz]	Chan	MCS Index	Data Rate [Mbps]	Main Average Power [dBm]	Main Peak Power [dBm]	Aux Average Power [dBm]	Aux Peak Power [dBm]	20MHz BW Average Aggregate Power [dBm]	20MHz BW Peak Aggregate Power [dBm]
2412	1	0	6.5	8.62	16.92	7.50	16.06	11.11	19.52
		1	13	8.49	16.93	7.46	15.97	11.02	19.49
		2	19.5	8.51	16.94	7.40	15.89	11.00	19.46
		3	26	8.55	17.02	7.50	16.05	11.07	19.57
		4	39	8.62	17.11	7.60	16.04	11.15	19.62
		5	52	8.31	17.04	7.08	16.04	10.75	19.58
		6	58.5	8.41	17.10	7.15	16.14	10.84	19.66
		7	65	7.86	16.87	7.02	16.14	10.47	19.53
2437	6	0	6.5	16.21	24.52	15.24	23.90	18.76	27.23
		1	13	14.08	22.57	12.93	21.46	16.55	25.06
		2	19.5	13.90	22.45	12.89	21.33	16.43	24.94
		3	26	13.95	22.48	12.96	21.57	16.49	25.06
		4	39	13.91	22.72	13.03	21.63	16.50	25.22
		5	52	13.46	22.48	12.56	21.53	16.04	25.04
		6	58.5	13.42	22.60	12.61	21.56	16.04	25.12
		7	65	13.23	22.53	12.37	21.54	15.83	25.07
2462	11	0	6.5	9.86	18.23	9.62	18.12	12.75	21.19
		1	13	9.92	18.19	9.72	18.22	12.83	21.22
		2	19.5	9.80	18.17	9.66	18.01	12.74	21.10
		3	26	9.87	18.23	9.72	18.31	12.81	21.28
		4	39	9.83	18.21	9.81	18.50	12.83	21.37
		5	52	9.26	18.08	9.35	18.39	12.32	21.25
		6	58.5	9.29	18.16	9.33	18.28	12.32	21.23
		7	65	9.27	18.36	9.24	18.44	12.27	21.41

Table 6-16. 802.11n (20MHz Bandwidth) Aggregate Conducted Output Power Measurements

6.5 Output Power Measurement – 802.11n (40MHz)

§15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is 1 Watt.**

Main Antenna

Freq [MHz]	Chan	MCS Index	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2422	3	0	13.5	7.94	16.26
		1	27	8.01	16.47
		2	40.5	7.90	16.41
		3	54	7.57	16.56
		4	81	6.81	16.85
		5	108	5.92	17.14
		6	121.5	5.50	16.88
		7	135	5.15	16.70
2437	6	0	13.5	14.59	23.03
		1	27	14.56	22.99
		2	40.5	14.54	23.05
		3	54	14.13	23.22
		4	81	13.16	23.33
		5	108	12.48	23.55
		6	121.5	12.05	23.69
		7	135	11.80	23.44
2452	9	0	13.5	8.45	16.90
		1	27	8.60	16.93
		2	40.5	8.37	16.77
		3	54	8.30	17.43
		4	81	7.33	17.34
		5	108	6.45	17.65
		6	121.5	6.11	17.62
		7	135	5.80	17.42

Table 6-17. 802.11n (40MHz) Conducted Output Power Measurements

Aux Antenna

Freq [MHz]	Chan	MCS Index	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2422	3	0	13.5	7.26	15.01
		1	27	7.16	14.90
		2	40.5	7.19	14.86
		3	54	7.12	15.05
		4	81	6.05	15.09
		5	108	5.39	17.04
		6	121.5	5.05	16.82
		7	135	4.49	16.48
2437	6	0	13.5	13.32	21.19
		1	27	11.89	19.89
		2	40.5	11.90	19.72
		3	54	11.92	19.87
		4	81	10.67	19.79
		5	108	9.47	20.02
		6	121.5	9.25	19.86
		7	135	9.21	19.94
2452	9	0	13.5	7.39	15.44
		1	27	7.36	15.37
		2	40.5	7.24	15.18
		3	54	7.24	15.15
		4	81	7.37	15.26
		5	108	7.38	15.45
		6	121.5	7.36	15.32
		7	135	7.21	15.32

Table 6-18. 802.11n (40MHz) Conducted Output Power Measurements

Main Antenna– channels adjacent to lowest and highest channels

Freq [MHz]	Chan	MCS Index	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2427	4	0	13.5	11.23	19.67
		1	27	11.01	19.35
		2	40.5	11.02	19.52
		3	54	10.43	19.68
		4	81	10.05	20.15
		5	108	9.11	20.36
		6	121.5	8.78	20.21
		7	135	8.32	20.05
2447	8	0	13.5	11.65	19.89
		1	27	11.62	19.89
		2	40.5	11.60	20.03
		3	54	11.31	20.22
		4	81	10.33	20.29
		5	108	9.43	20.61
		6	121.5	8.87	20.56
		7	135	8.67	20.33

Table 6-19. 802.11n (40MHz) Conducted Output Power Measurements

Aux Antenna– channels adjacent to lowest and highest channels

Freq [MHz]	Chan	MCS Index	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2427	4	0	13.5	10.78	19.50
		1	27	10.63	19.67
		2	40.5	10.70	19.74
		3	54	10.55	10.51
		4	81	9.53	20.23
		5	108	8.78	20.59
		6	121.5	8.60	20.39
		7	135	8.13	19.92
2447	8	0	13.5	11.36	20.07
		1	27	11.12	20.24
		2	40.5	11.20	20.32
		3	54	10.97	20.35
		4	81	10.15	20.44
		5	108	9.23	20.94
		6	121.5	8.87	20.78
		7	135	8.64	20.43

Table 6-20. 802.11n (40MHz) Conducted Output Power Measurements

Aggregate (Main + Aux) Antenna –802.11n (40MHz Bandwidth)

Freq [MHz]	Chan	MCS Index	Data Rate [Mbps]	Main Average Power [dBm]	Main Peak Power [dBm]	Aux Average Power [dBm]	Aux Peak Power [dBm]	20MHz BW Average Aggregate Power [dBm]	20MHz BW Peak Aggregate Power [dBm]
2422	3	0	13.5	7.42	15.81	6.57	14.74	10.03	18.32
		1	27	7.36	15.82	6.66	14.78	10.03	18.34
		2	40.5	7.39	15.65	6.83	14.88	10.13	18.29
		3	54	6.87	15.82	6.70	15.44	9.80	18.64
		4	81	5.96	15.97	5.91	15.66	8.95	18.83
		5	108	5.02	16.16	4.98	16.00	8.01	19.09
		6	121.5	4.65	16.04	4.61	15.81	7.64	18.94
		7	135	4.33	15.77	4.01	15.56	7.18	18.68
2437	6	0	13.5	14.46	22.89	13.13	21.62	16.86	25.31
		1	27	12.29	20.64	11.94	20.46	15.13	23.56
		2	40.5	11.97	20.95	11.80	20.12	14.90	23.57
		3	54	11.37	20.55	11.31	20.41	14.35	23.49
		4	81	10.64	20.77	10.72	20.72	13.69	23.76
		5	108	9.69	21.03	9.56	20.94	12.64	24.00
		6	121.5	9.27	20.82	9.49	20.64	12.39	23.74
		7	135	8.79	20.59	8.93	20.78	11.87	23.70
2452	9	0	13.5	8.33	16.66	8.13	16.45	11.24	19.57
		1	27	8.21	16.49	8.31	16.72	11.27	19.62
		2	40.5	8.04	16.47	8.34	16.73	11.20	19.61
		3	54	7.85	16.64	8.02	16.92	10.95	19.79
		4	81	6.89	16.77	7.29	17.16	10.10	19.98
		5	108	6.06	17.00	6.44	17.55	9.26	20.29
		6	121.5	5.67	17.01	5.97	17.43	8.83	20.24
		7	135	5.41	16.78	5.73	17.57	8.58	20.20

Table 6-21. 802.11n (40MHz Bandwidth) Aggregate Conducted Output Power Measurements

6.6 Power Spectral Density (802.11b/g/n)

§15.247(e)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible power spectral density is 8 dBm in any 3 kHz band.**

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]
2412	1	b	1	-6.810	8.0	-14.81
2437	6	b	1	-4.550	8.0	-12.55
2462	11	b	1	-8.160	8.0	-16.16
2412	1	g	6	-13.000	8.0	-21.00
2437	6	g	6	-4.950	8.0	-12.95
2462	11	g	6	-11.620	8.0	-19.62
2412	1	n	6.5 (MCS0)	-17.610	8.0	-25.61
2437	6	n	6.5 (MCS0)	-9.700	8.0	-17.70
2462	11	n	6.5 (MCS0)	-16.480	8.0	-24.48
2422	3	n	13.5 (MCS0)	-23.130	8.0	-31.13
2437	6	n	13.5 (MCS0)	-14.980	8.0	-22.98
2452	9	n	13.5 (MCS0)	-21.300	8.0	-29.30

Table 6-22. Conducted Power Density Measurements – Main Antenna

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 27 of 73

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]
2412	1	b	1	-8.430	8.0	-16.43
2437	6	b	1	-3.290	8.0	-11.29
2462	11	b	1	-8.400	8.0	-16.40
2412	1	g	6	-11.890	8.0	-19.89
2437	6	g	6	-5.490	8.0	-13.49
2462	11	g	6	-13.520	8.0	-21.52
2412	1	n	6.5 (MCS0)	-18.020	8.0	-26.02
2437	6	n	6.5 (MCS0)	-10.690	8.0	-18.69
2462	11	n	6.5 (MCS0)	-15.450	8.0	-23.45
2422	3	n	13.5 (MCS0)	-21.630	8.0	-29.63
2437	6	n	13.5 (MCS0)	-15.840	8.0	-23.84
2452	9	n	13.5 (MCS0)	-20.930	8.0	-28.93

Table 6-23. Conducted Power Density Measurements – Aux Antenna




Figure 6-6. Test Instrument & Measurement Setup

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density Main Ant [dBm]	Measured Power Density Aux Ant [dBm]	Aggregate PSD Chains Main + Aux [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]
2412	1	b	1	-6.81	-8.43	-4.53	8.0	-12.5
2437	6	b	1	-4.55	-3.29	-0.86	8.0	-8.9
2462	11	b	1	-8.16	-8.4	-5.27	8.0	-13.3
2412	1	g	6	-13	-11.89	-9.40	8.0	-17.4
2437	6	g	6	-4.95	-5.49	-2.20	8.0	-10.2
2462	11	g	6	-11.62	-13.52	-9.46	8.0	-17.5
2412	1	n	6.5 (MCS0)	-17.61	-18.02	-14.80	8.0	-22.8
2437	6	n	6.5 (MCS0)	-9.7	-10.69	-7.16	8.0	-15.2
2462	11	n	6.5 (MCS0)	-16.48	-15.45	-12.92	8.0	-20.9
2422	3	n	13.5 (MCS0)	-23.13	-21.63	-19.31	8.0	-27.3
2437	6	n	13.5 (MCS0)	-14.98	-15.84	-12.38	8.0	-20.4
2452	9	n	13.5 (MCS0)	-21.3	-20.93	-18.10	8.0	-26.1

Table 6-24. Conducted Power Spectral Density Measurements – Main + Aux Antenna





Figure 6-7. Test Instrument & Measurement Setup


Notes:

- The aggregate power spectral density shown above in Table 6-24 is the summation of the power spectral density's measured in single chain transmission mode, as shown in Table 6-22 and Table 6-23.
- The plots below show only the power spectral density measured on Main and Aux Antenna on the channel that results in the highest aggregate power spectral density reported in Table 6-24 for each mode.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 29 of 73

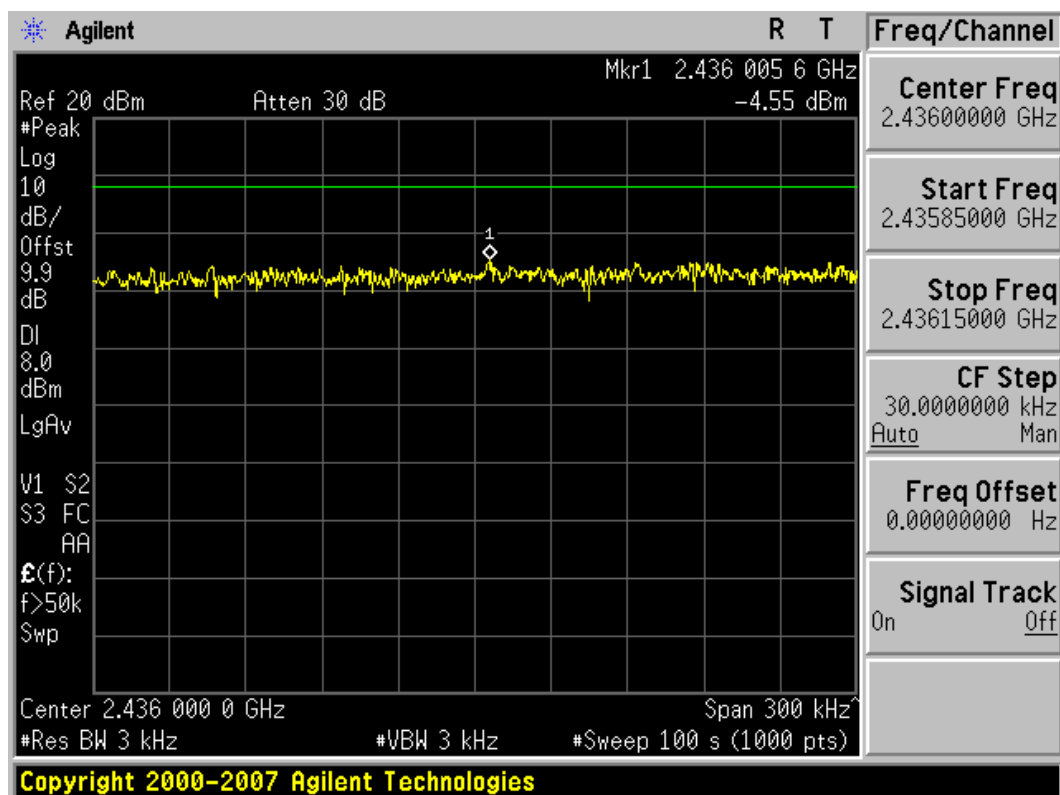


Plot 6-9. Power Spectral Density Plot (802.11b – Ch. 6) – Main Antenna

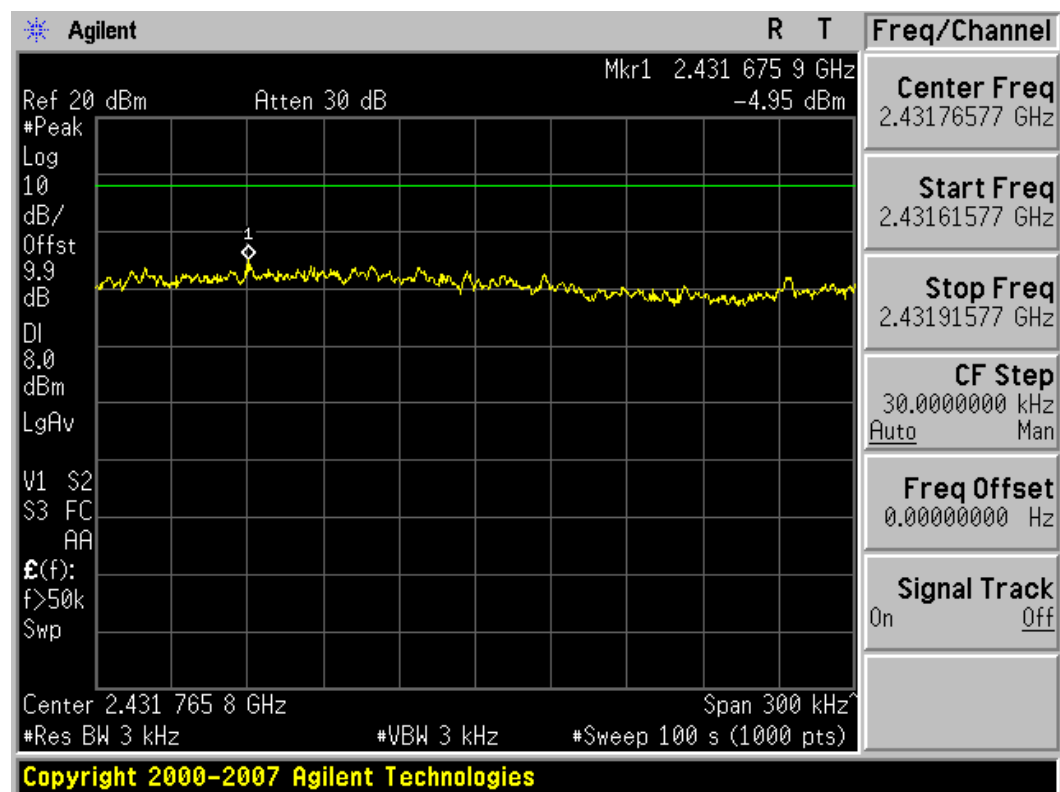


Plot 6-10. Power Spectral Density Plot (802.11g – Ch. 6) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 30 of 73

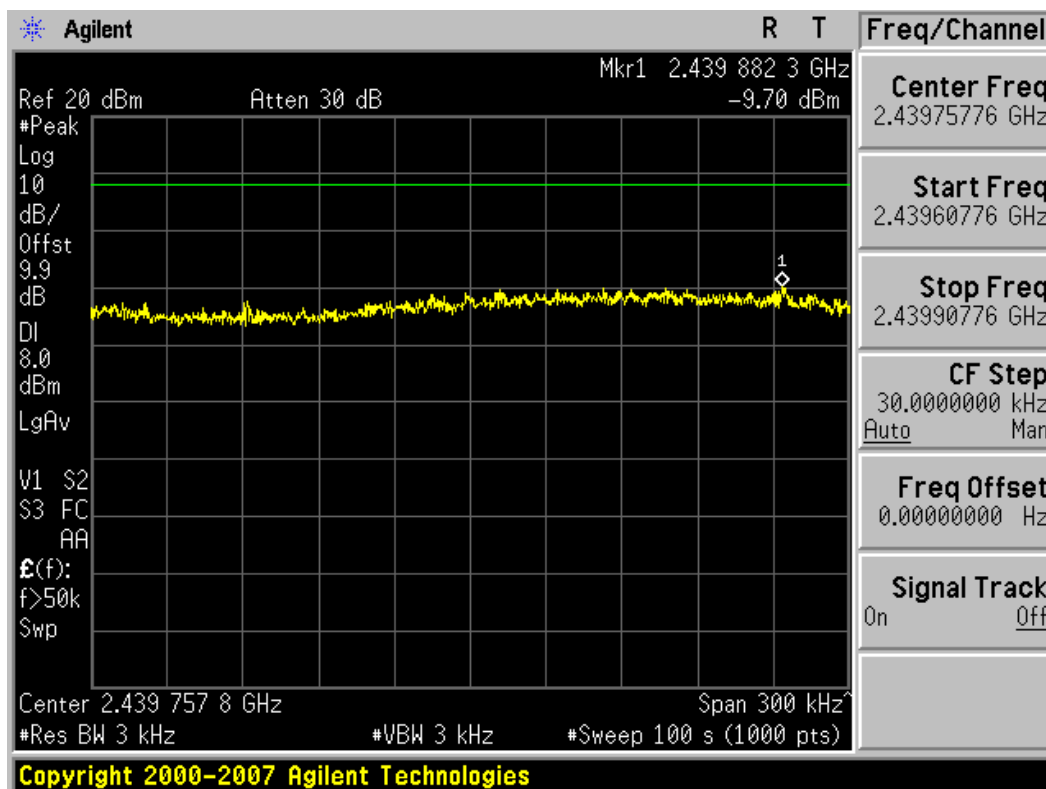


Plot 6-11. Power Spectral Density Plot (802.11n (20MHz) – Ch. 6) – Main Antenna

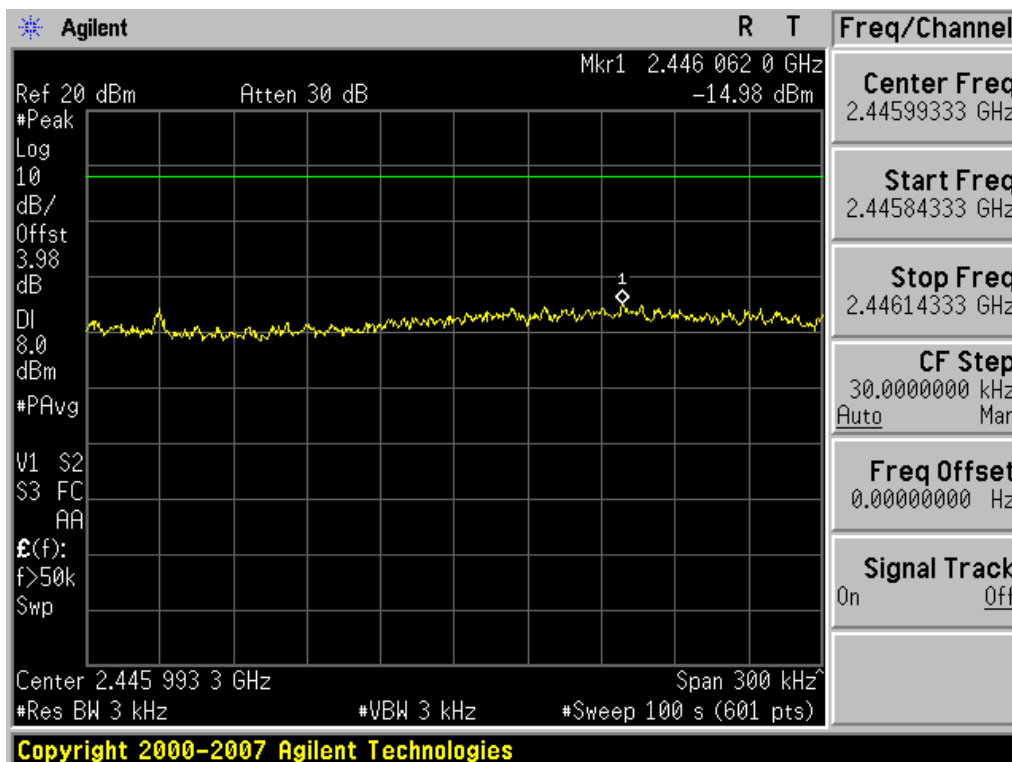


Plot 6-12. Power Spectral Density Plot (802.11n (40MHz) – Ch. 6) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 31 of 73

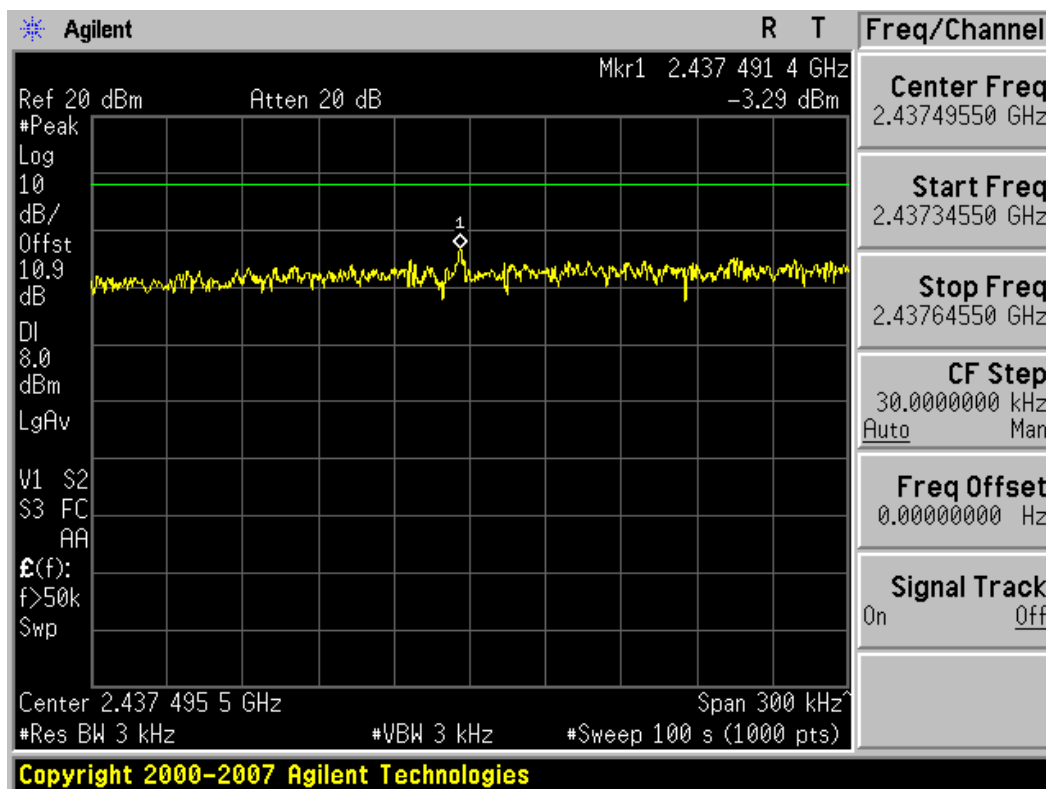


Plot 6-13. Power Spectral Density Plot (802.11b – Ch. 6) – Aux Antenna

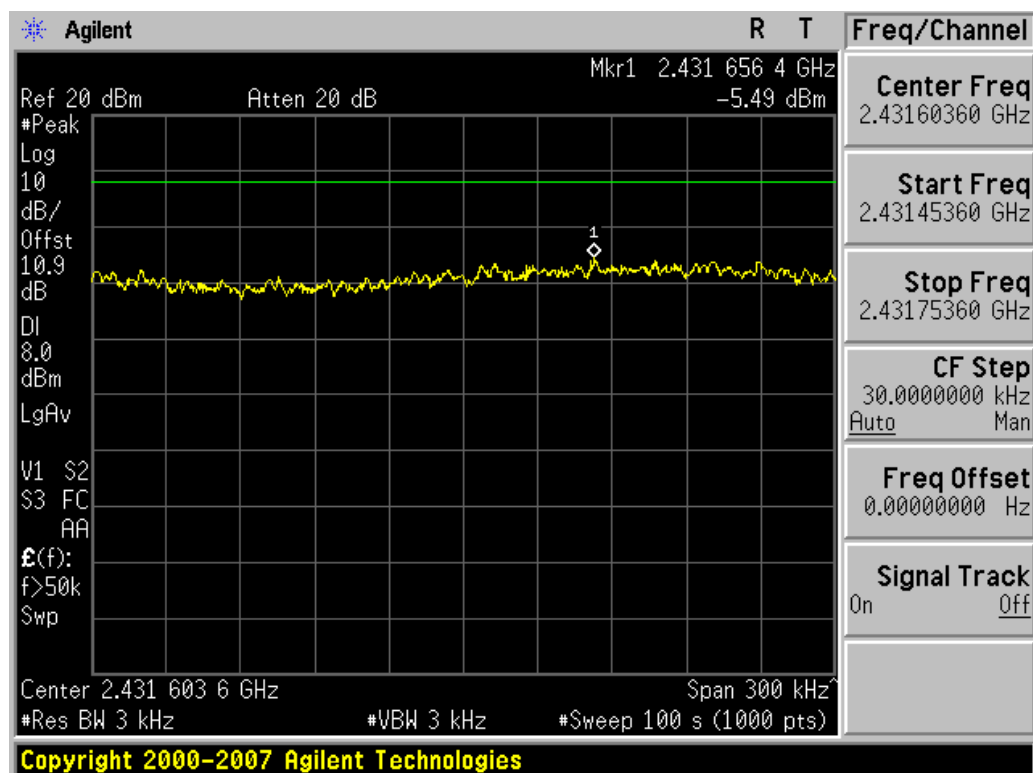


Plot 6-14. Power Spectral Density Plot (802.11g – Ch. 6) – Aux Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 32 of 73

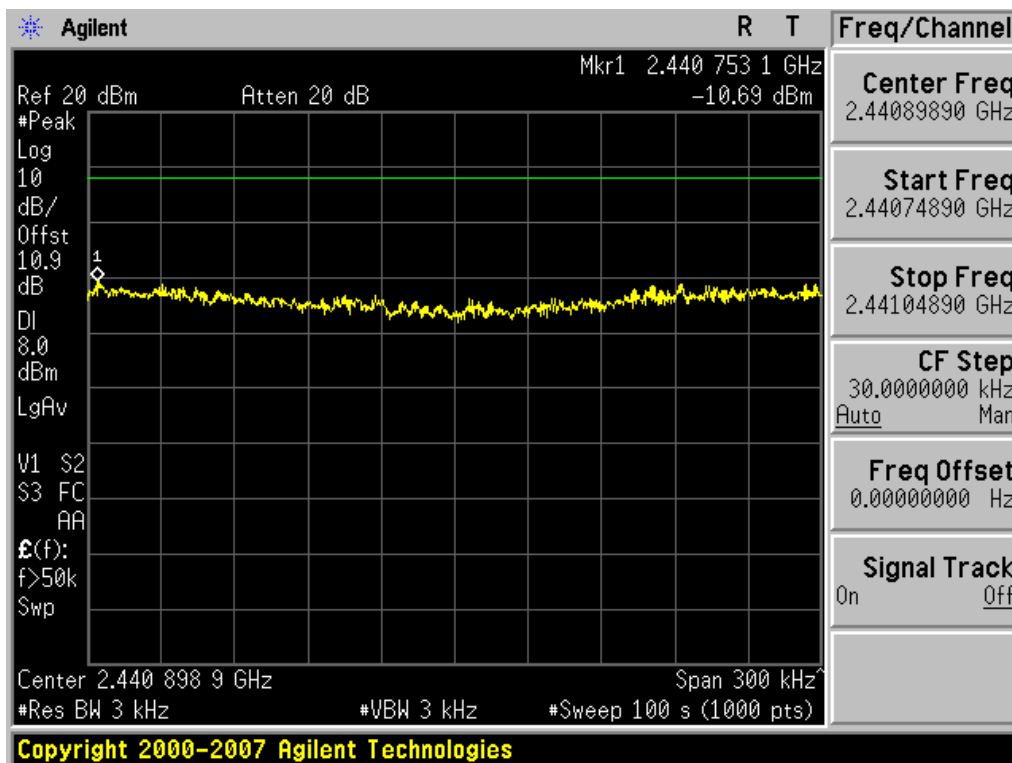

Plot 6-15. Power Spectral Density Plot (802.11n (20MHz) – Ch. 6) – Aux Antenna

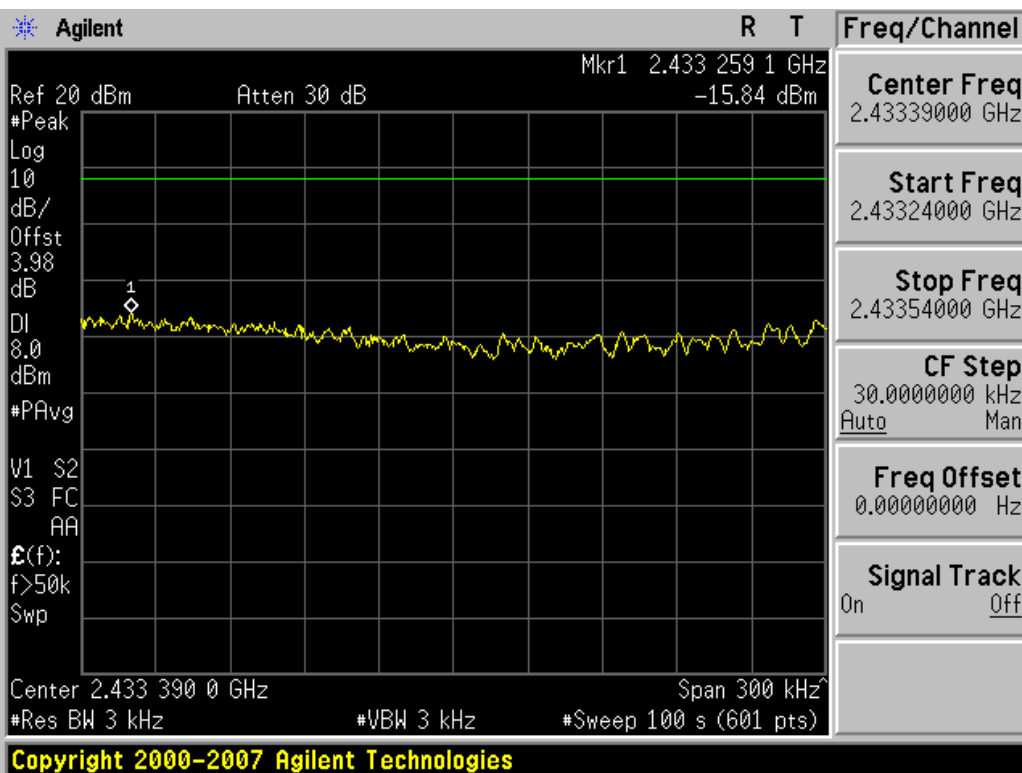


Plot 6-16. Power Spectral Density Plot (802.11n (40MHz) – Ch. 6) – Aux Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 33 of 73

6.7 Out of Band Emissions at the Band Edge


§15.247(d)

Note: For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6Mbps for “g” mode, and 6.5/13.5 Mbps for “n” mode. Band edge compliance was also checked for inner channels as the power is increased.

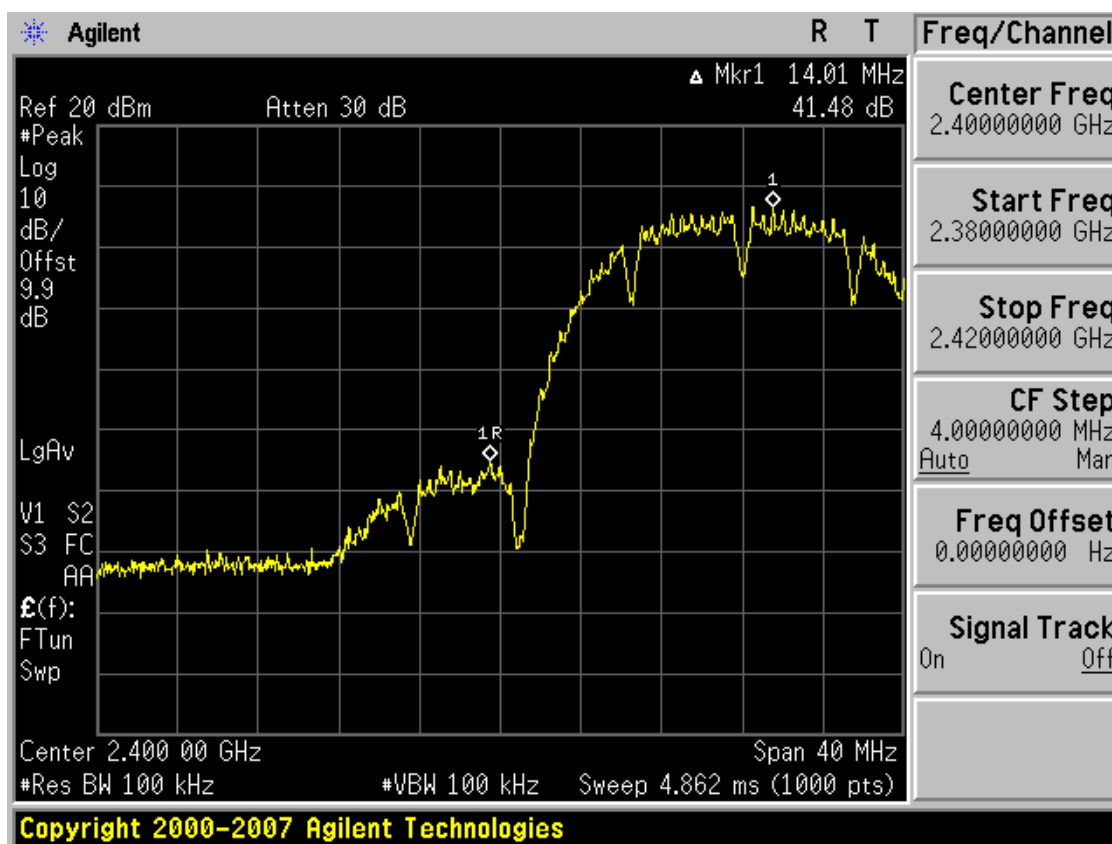


Plot 6-17. Band Edge Plot (802.11b – Ch. 1) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 34 of 73

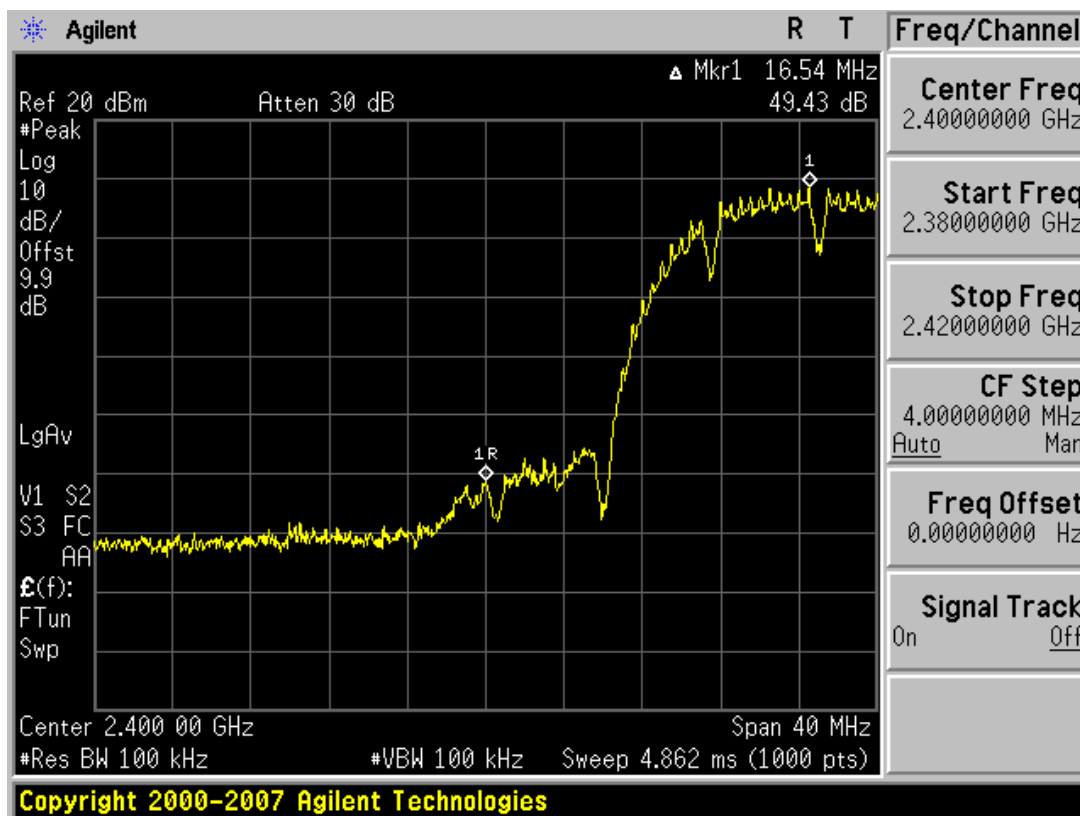


Plot 6-18. Band Edge Plot (802.11b – Ch. 2) – Main Antenna

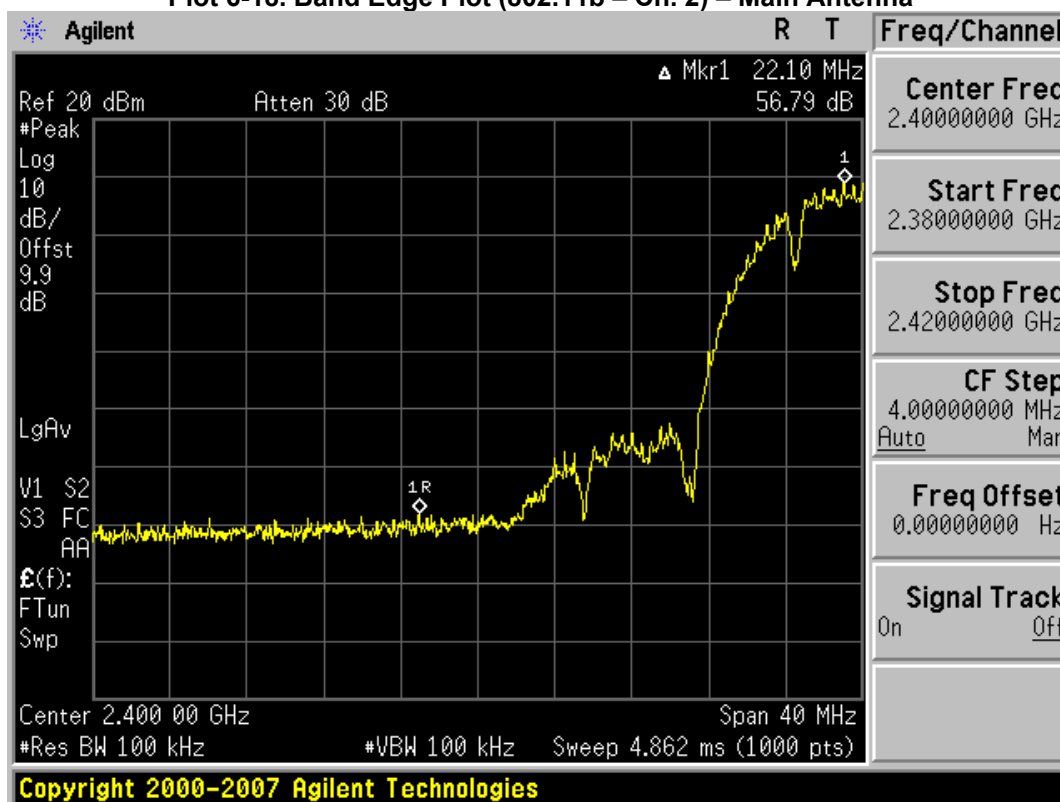


Plot 6-19. Band Edge Plot (802.11b – Ch. 3) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 35 of 73

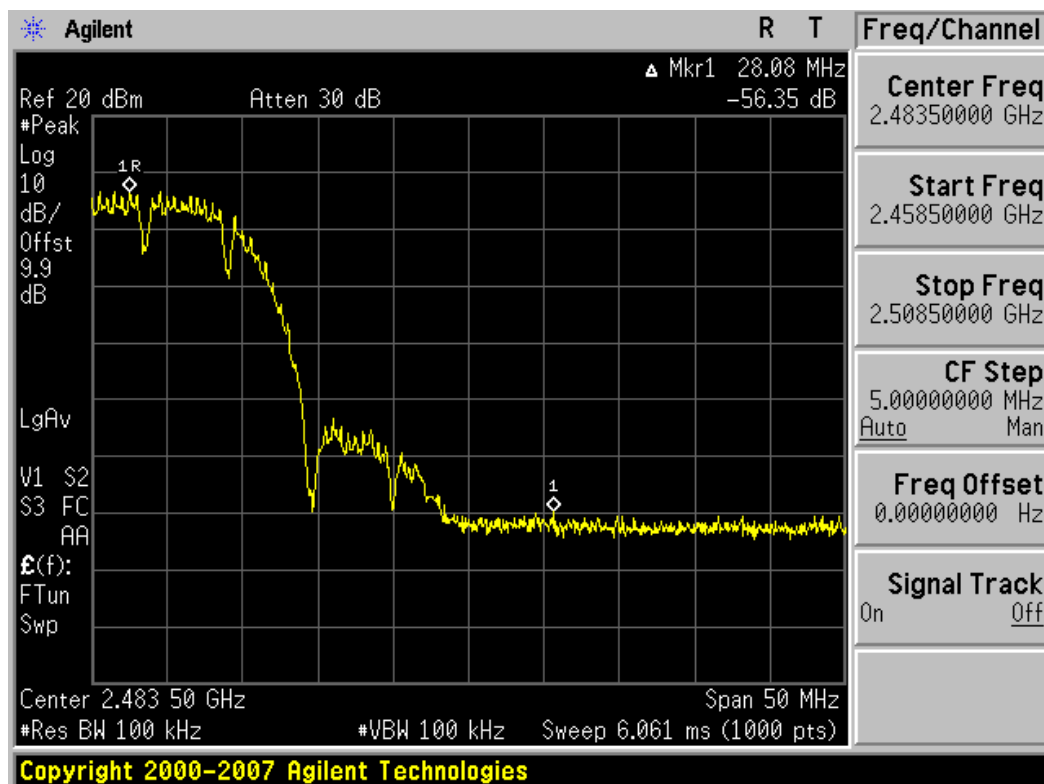


Plot 6-20. Band Edge Plot (802.11b - Ch. 11) - Main Antenna

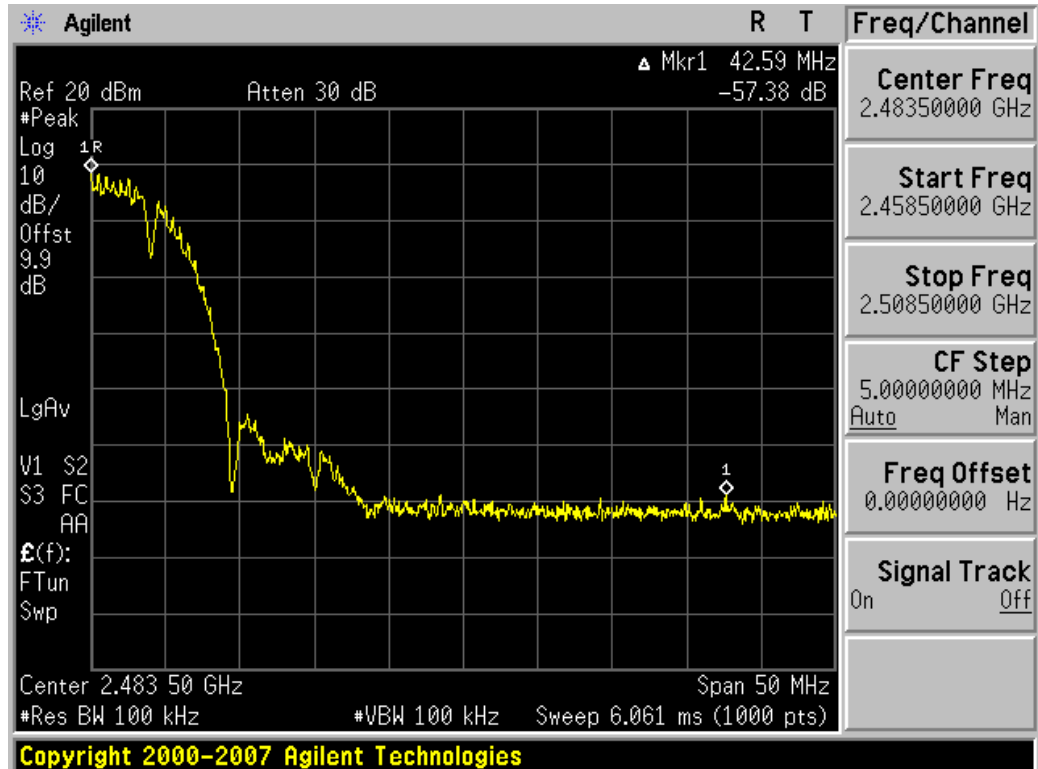


Plot 6-21. Band Edge Plot (802.11b - Ch. 10) - Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 36 of 73

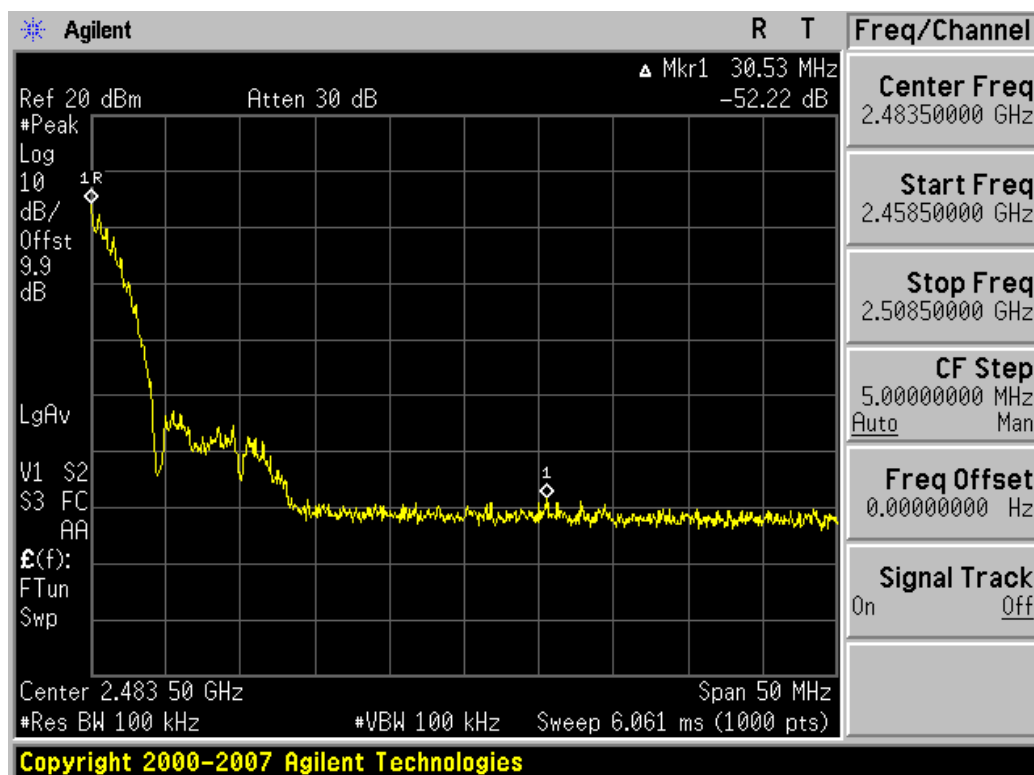


Plot 6-22. Band Edge Plot (802.11b - Ch. 9) - Main Antenna

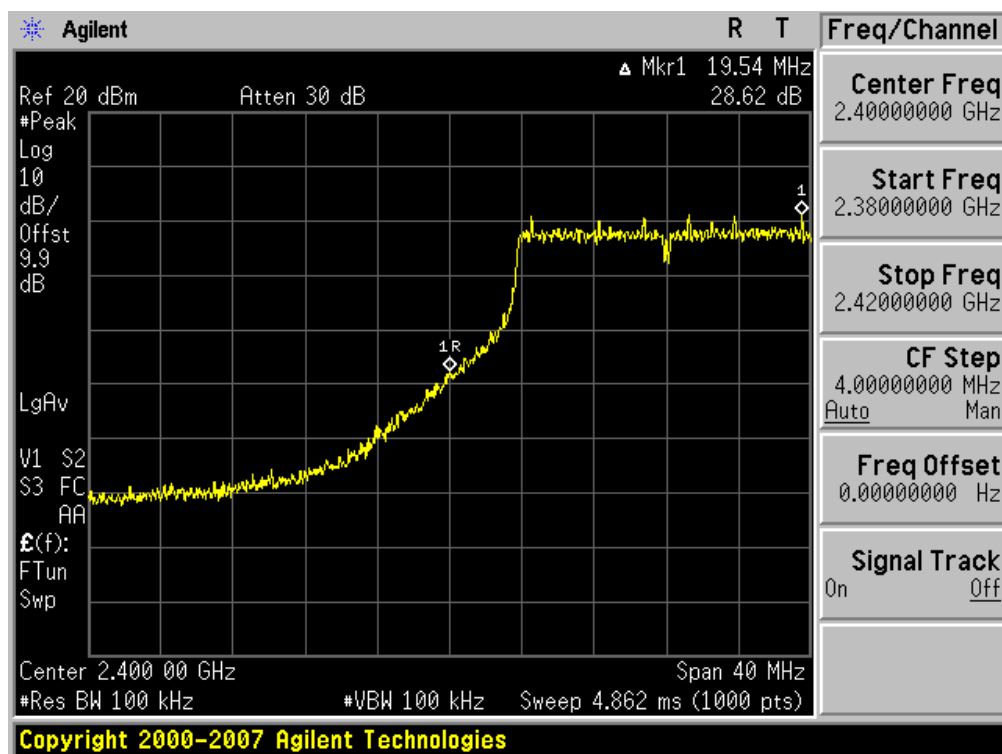


Plot 6-23. Band Edge Plot (802.11g - Ch. 1) - Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 37 of 73

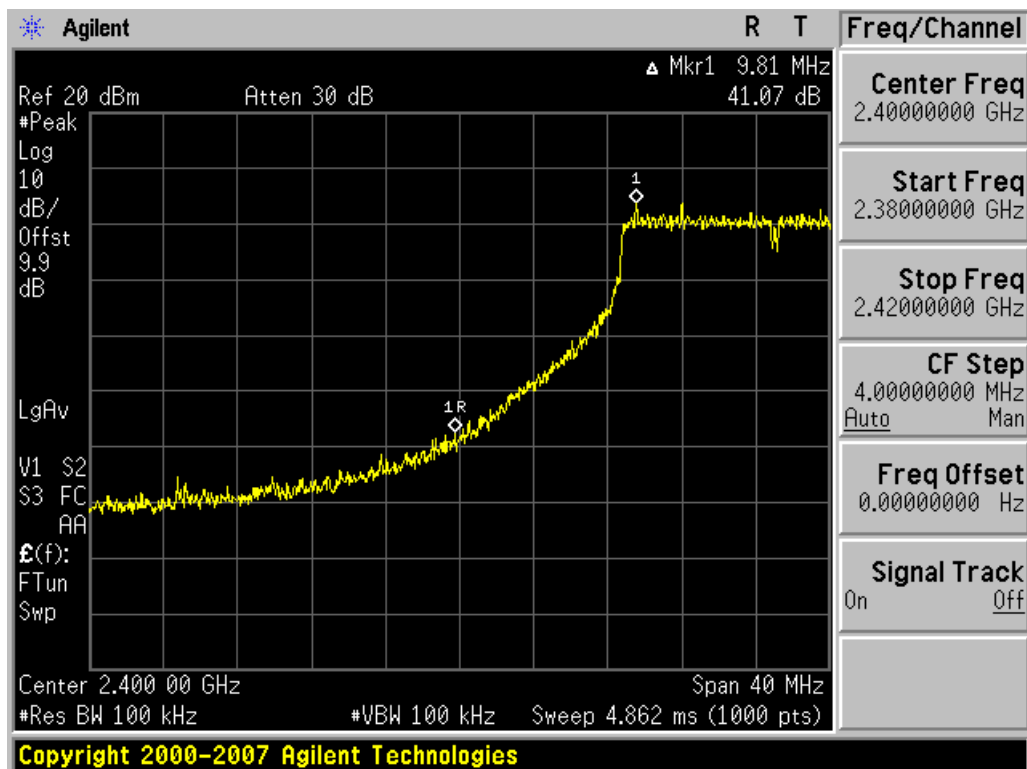


Plot 6-24. Band Edge Plot (802.11g- Ch. 2) – Main Antenna

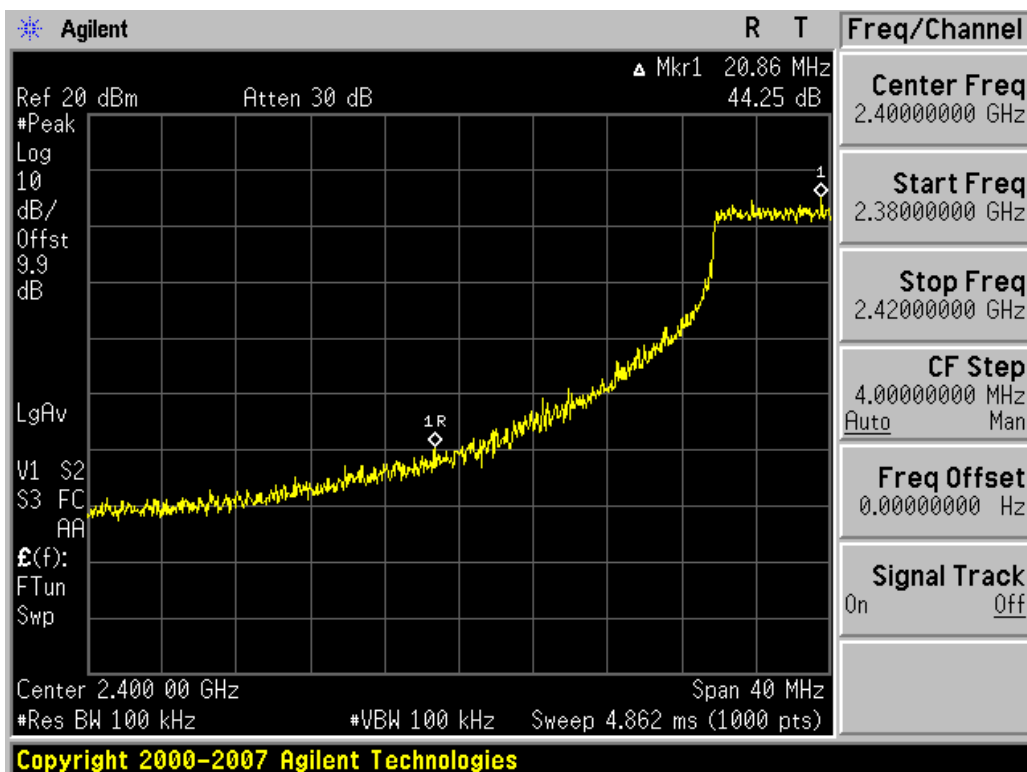


Plot 6-25. Band Edge Plot (802.11g- Ch. 3) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 38 of 73

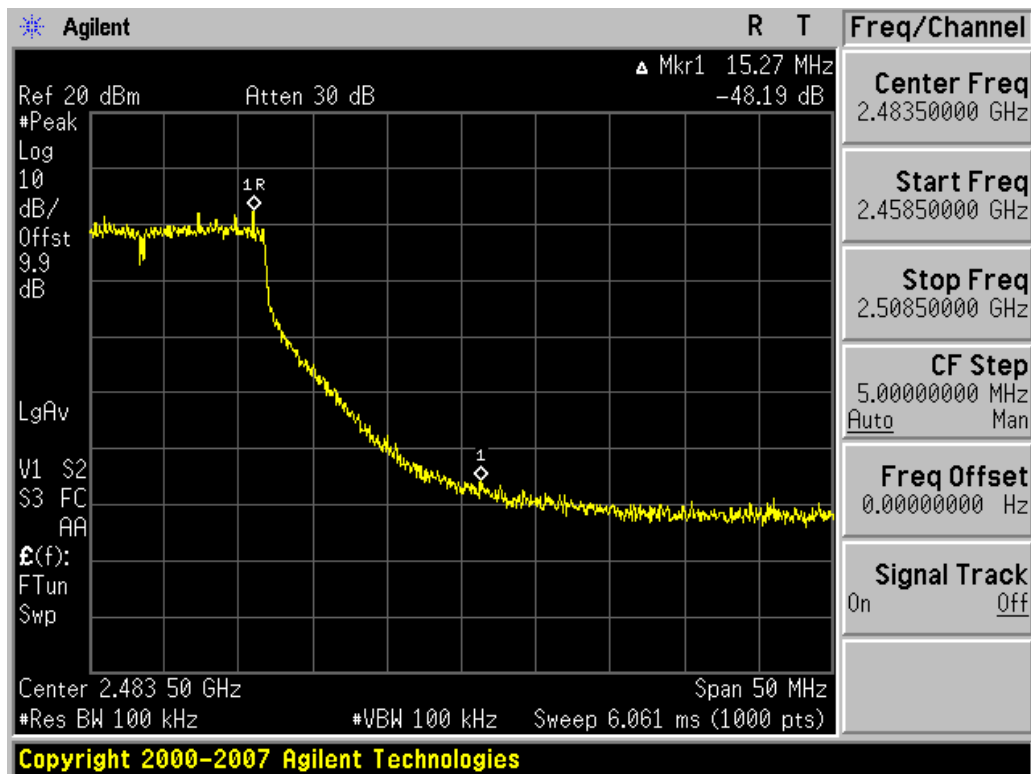


Plot 6-26. Band Edge Plot (802.11g – Ch. 11) – Main Antenna

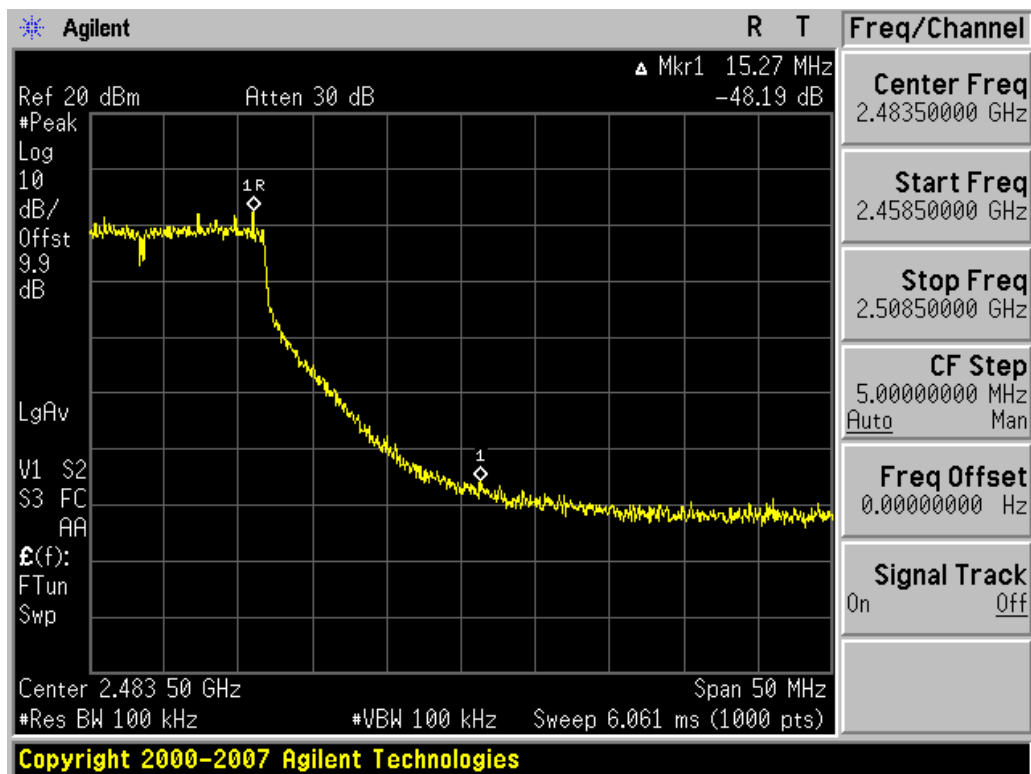


Plot 6-27. Band Edge Plot (802.11g – Ch. 10) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 39 of 73

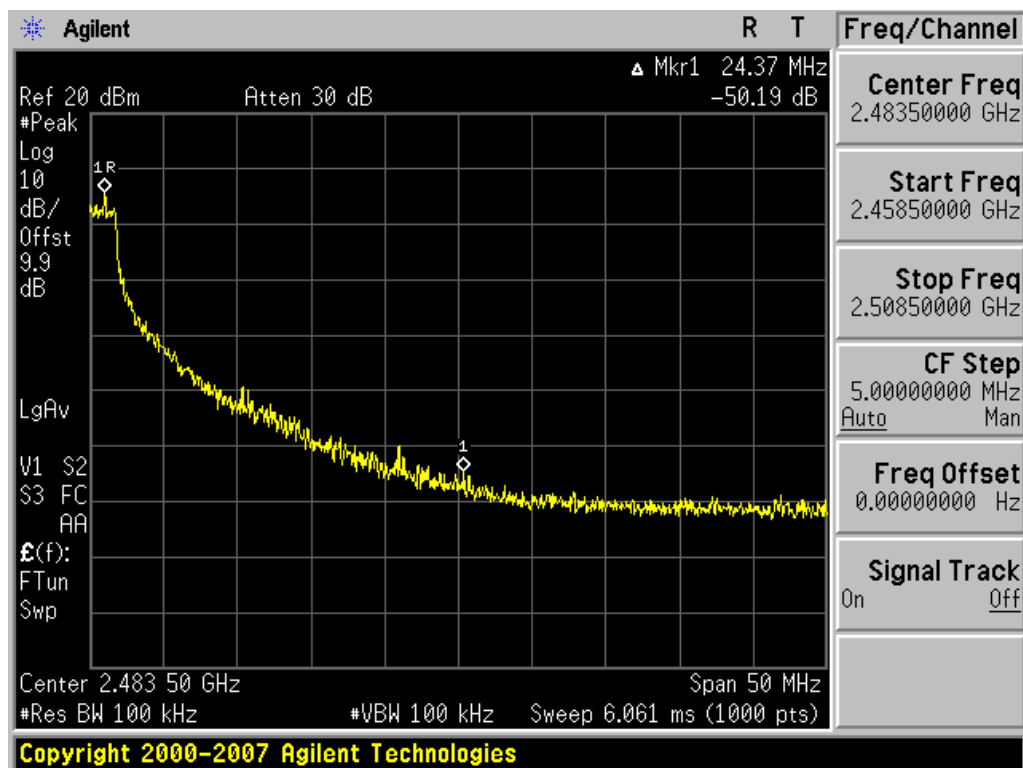


Plot 6-28. Band Edge Plot (802.11g – Ch. 9) – Main Antenna

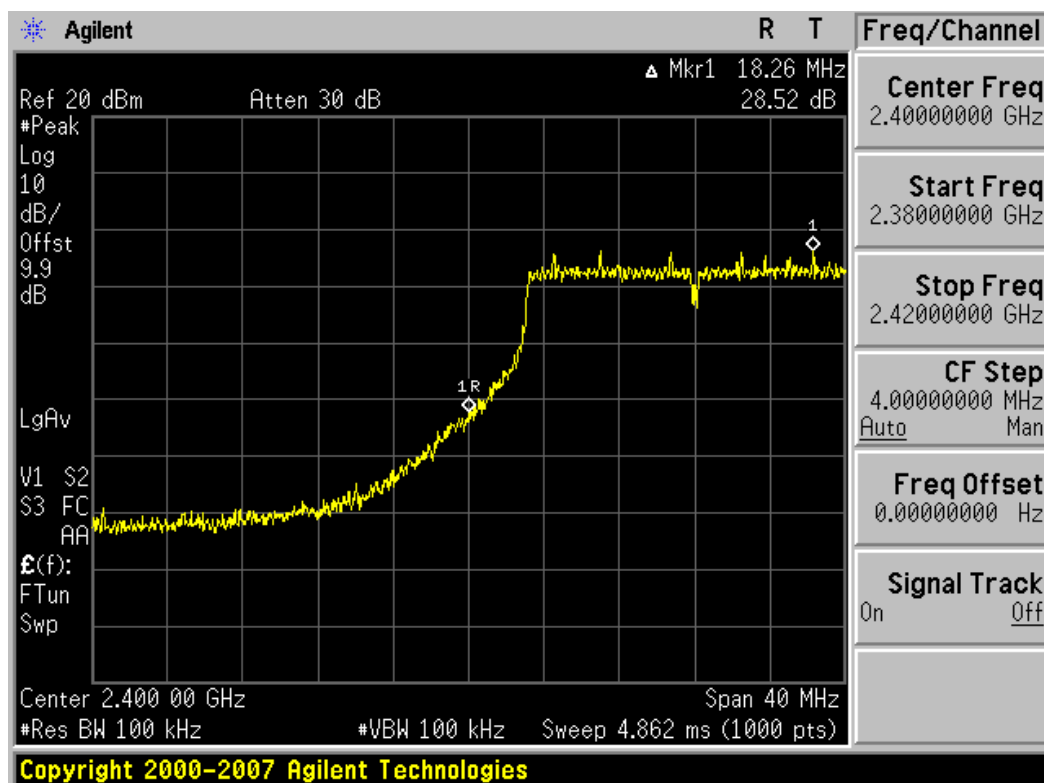


Plot 6-29. Band Edge Plot (802.11n (20MHz) – Ch. 1) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 40 of 73

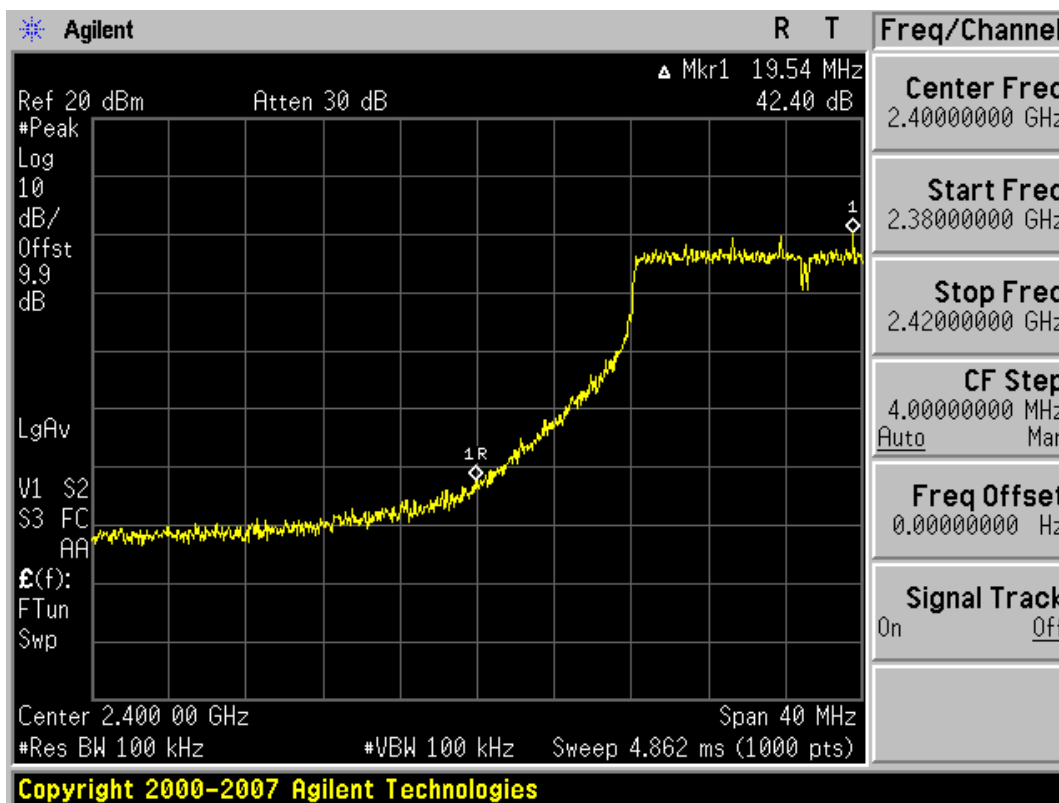


Plot 6-30. Band Edge Plot (802.11n (20MHz) – Ch. 2) – Main Antenna

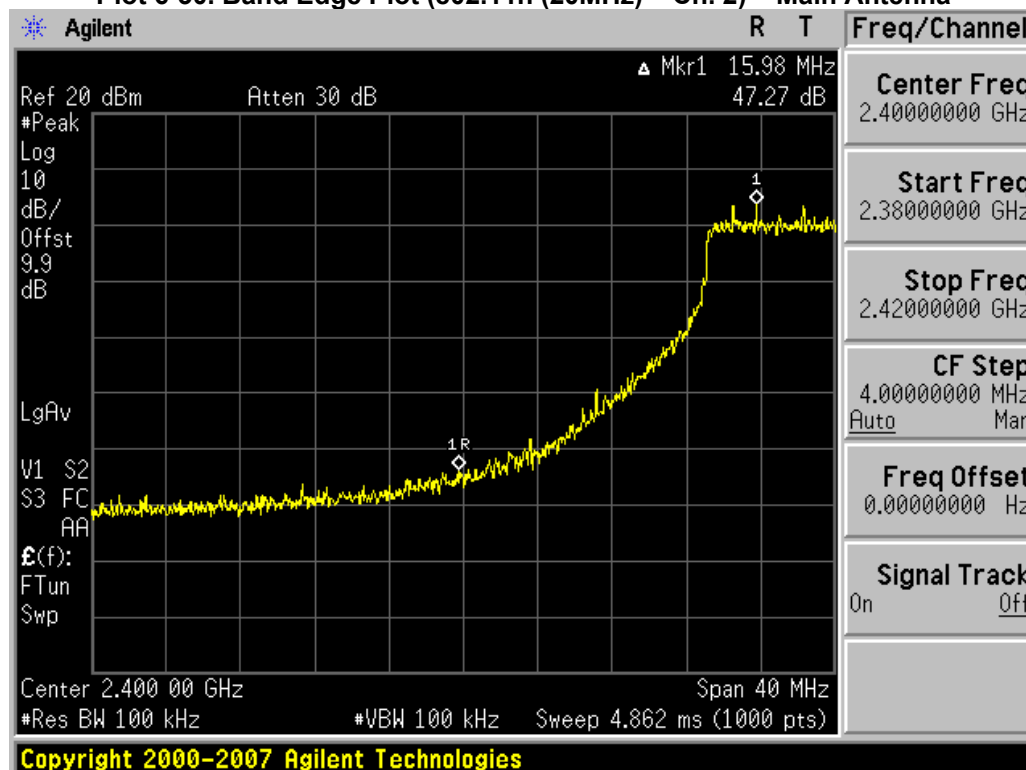


Plot 6-31. Band Edge Plot (802.11n (20MHz) – Ch. 3) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 41 of 73

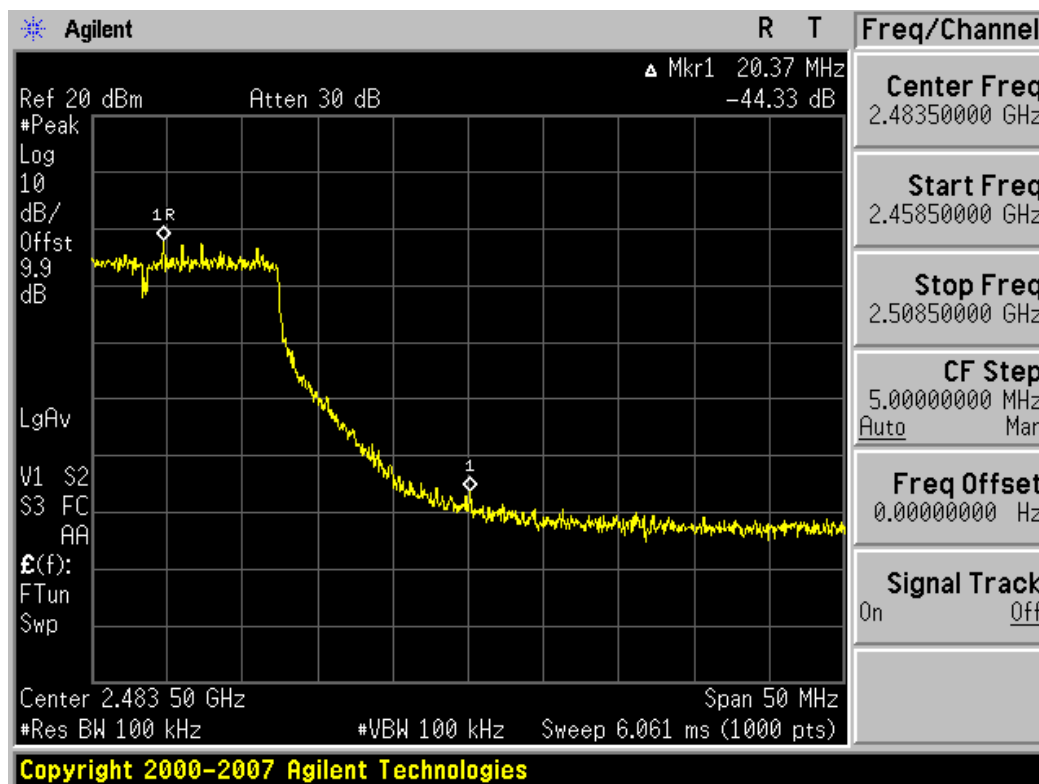


Plot 6-32. Band Edge Plot (802.11n (20MHz) – Ch. 11) – Main Antenna

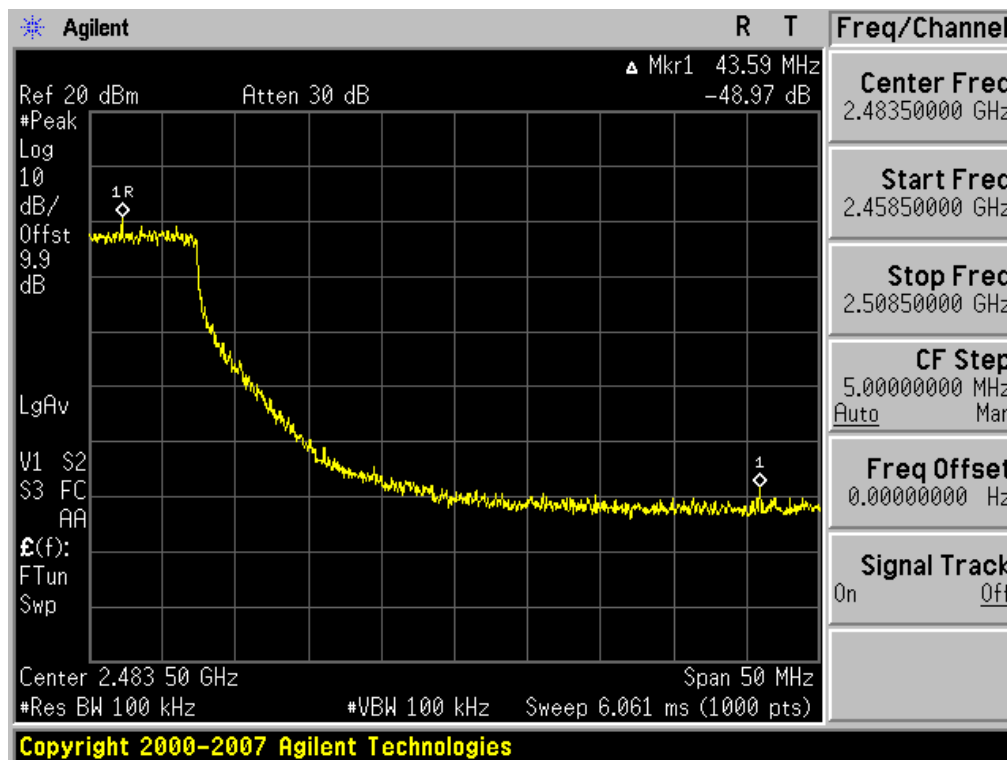


Plot 6-33. Band Edge Plot (802.11n (20MHz) – Ch. 10) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 42 of 73

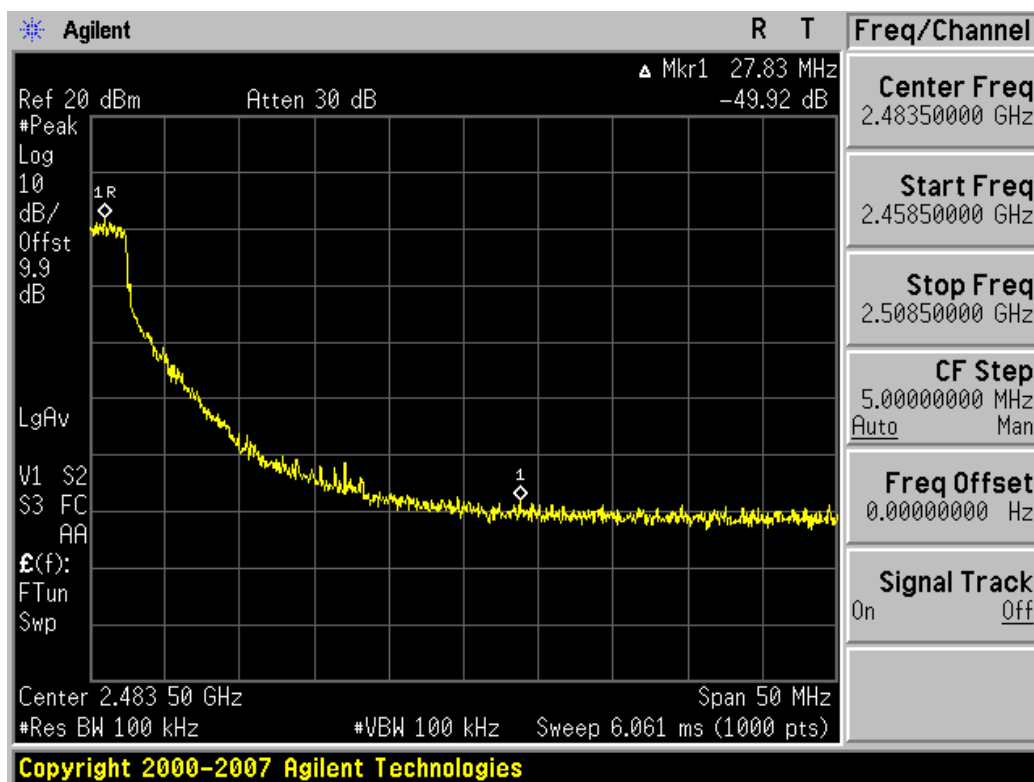


Plot 6-34. Band Edge Plot (802.11n (20MHz) – Ch. 9) – Main Antenna

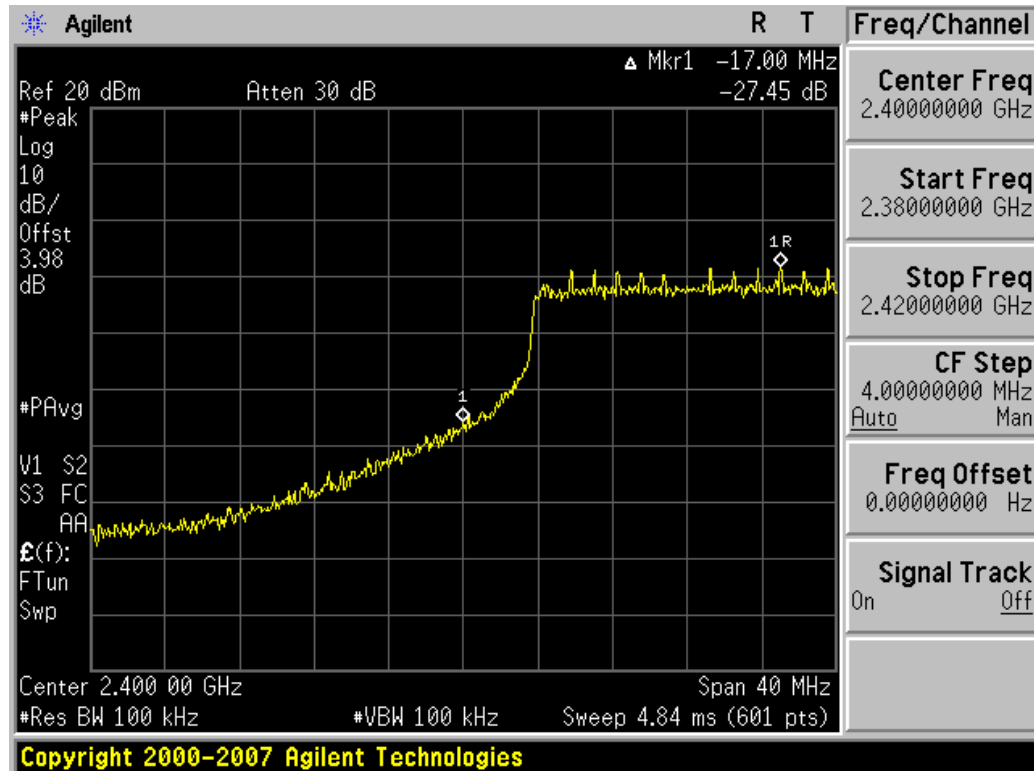


Plot 6-35. Band Edge Plot (802.11n (40MHz) – Ch. 3) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 43 of 73

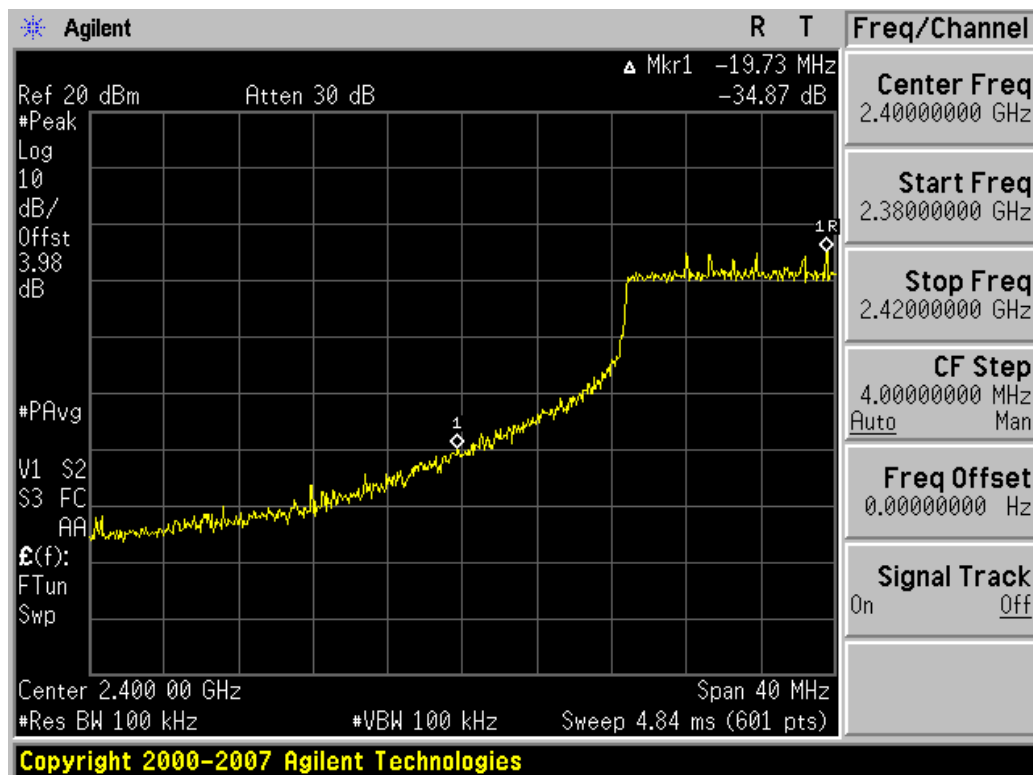


Plot 6-36. Band Edge Plot (802.11n (40MHz) – Ch. 4) – Main Antenna

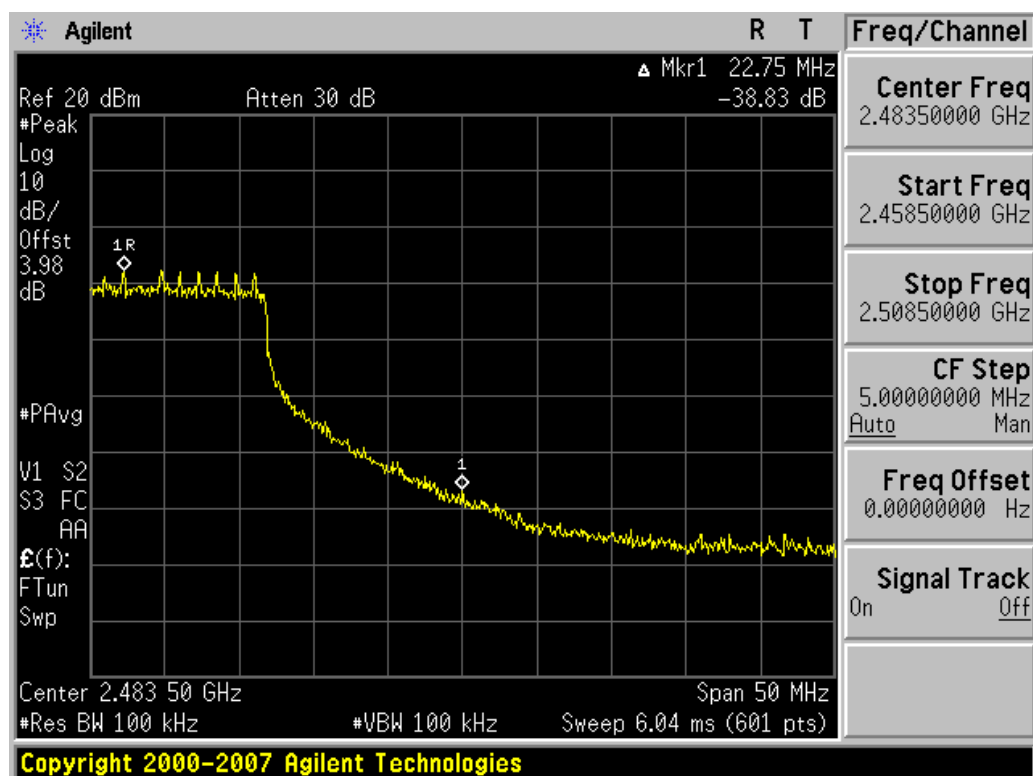


Plot 6-37. Band Edge Plot (802.11n (40MHz) – Ch. 9) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 44 of 73

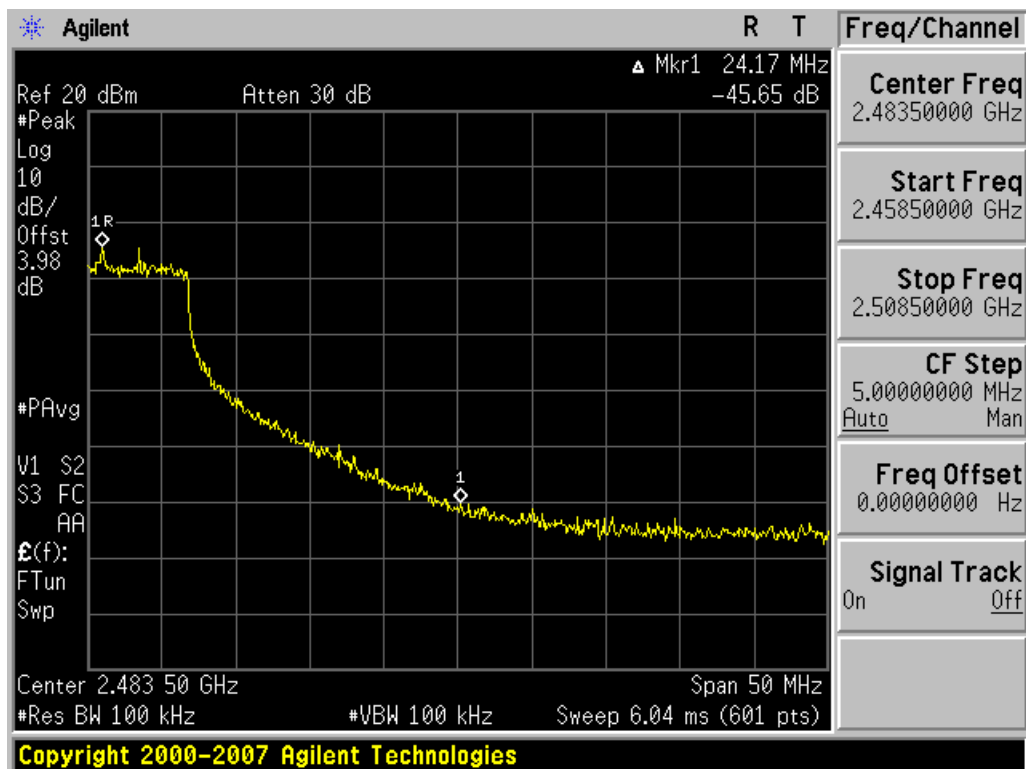


Plot 6-38. Band Edge Plot (802.11n (40MHz) – Ch. 8) – Main Antenna

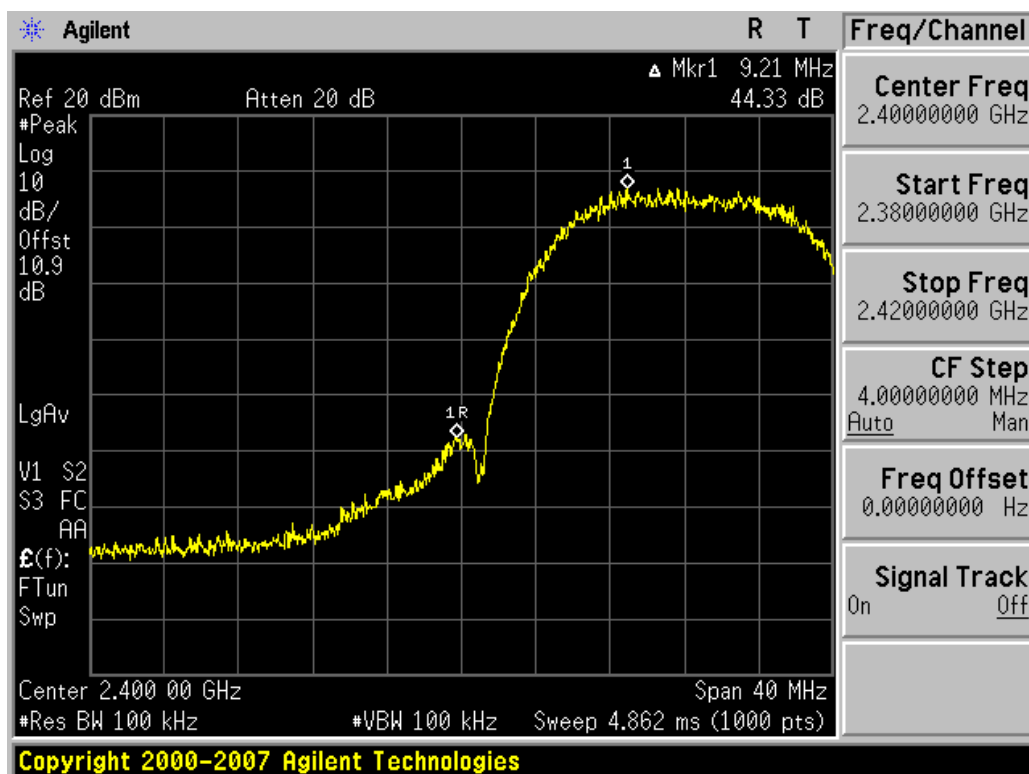


Plot 6-39. Band Edge Plot (802.11b – Ch. 1) – Aux Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 45 of 73

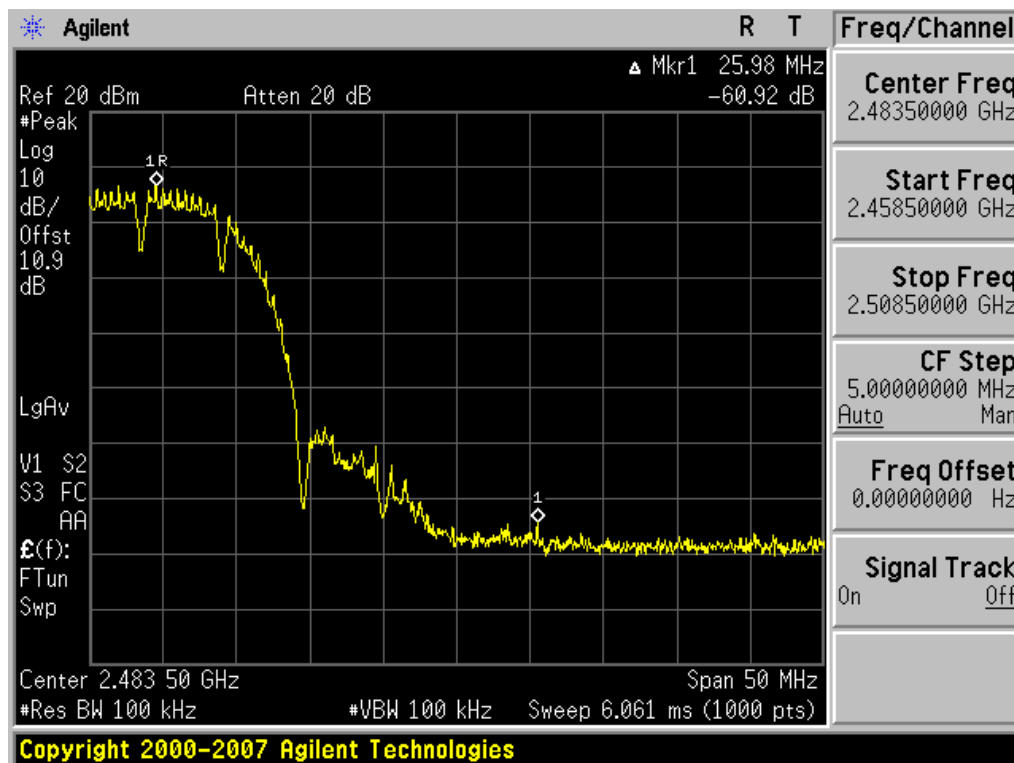


Plot 6-40. Band Edge Plot (802.11b – Ch. 11) – Aux Antenna

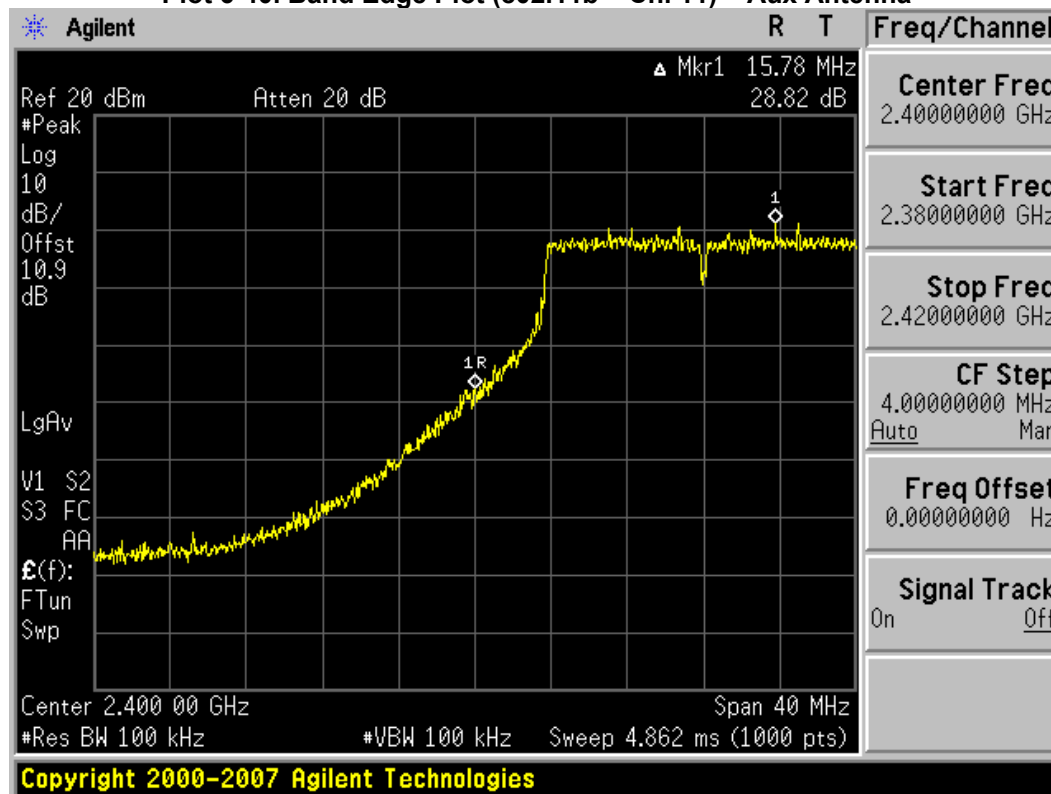


Plot 6-41. Band Edge Plot (802.11g– Ch. 1) – Aux Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 46 of 73

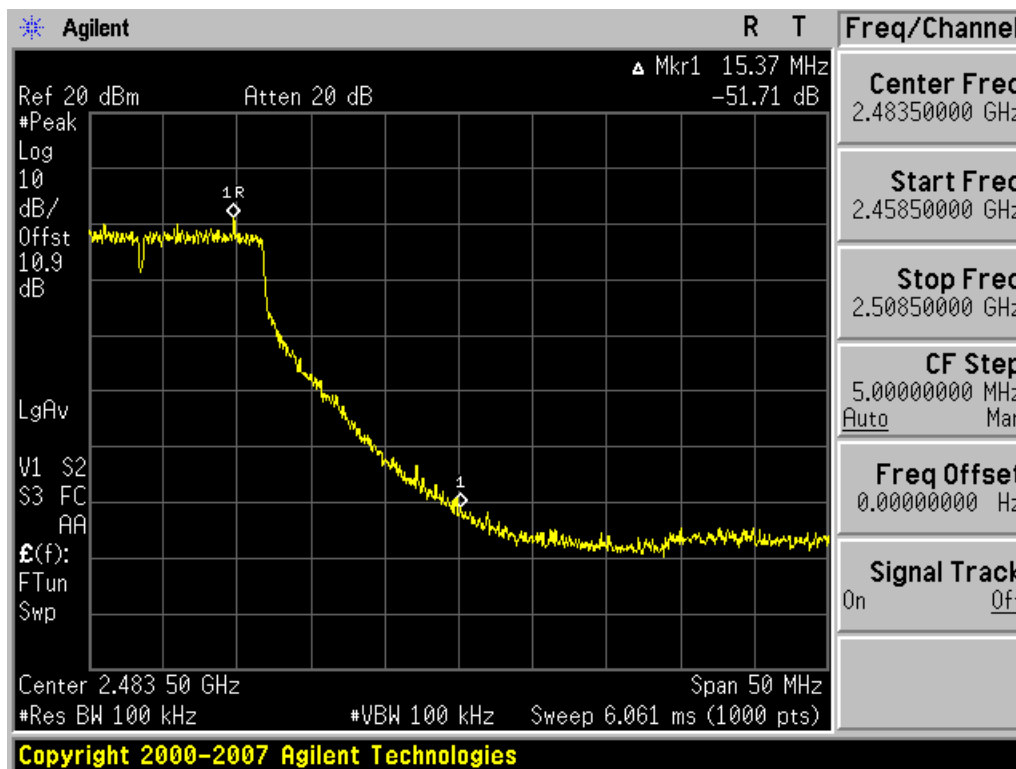


Plot 6-42. Band Edge Plot (802.11g – Ch. 11) – Aux Antenna

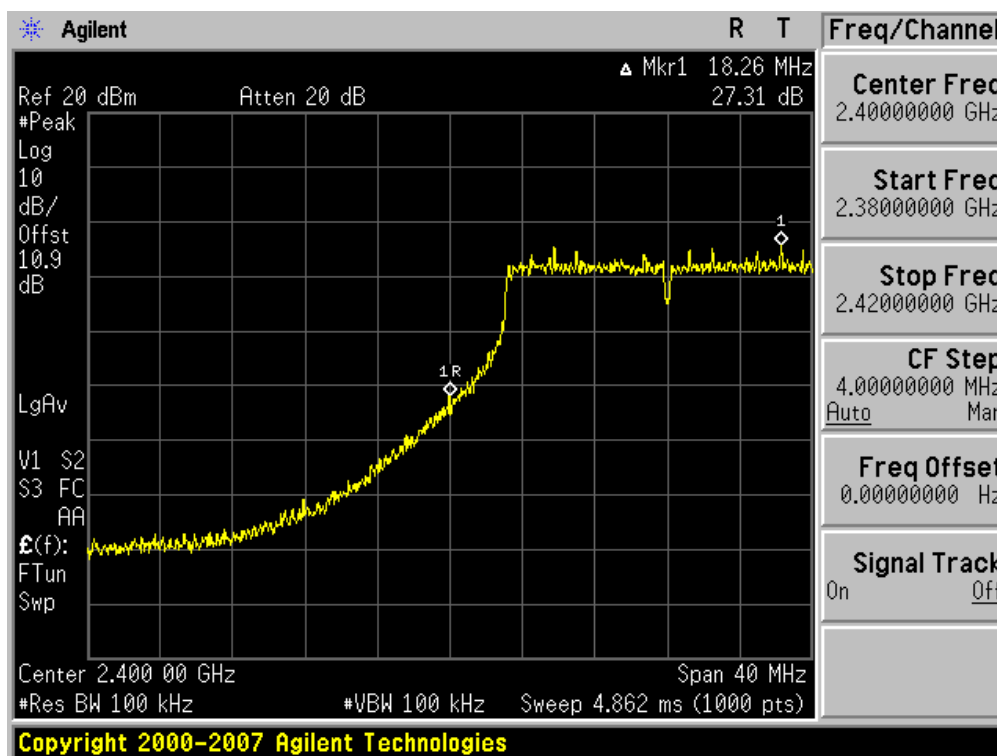


Plot 6-43. Band Edge Plot (802.11n (20MHz) – Ch. 1) – Aux Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 47 of 73

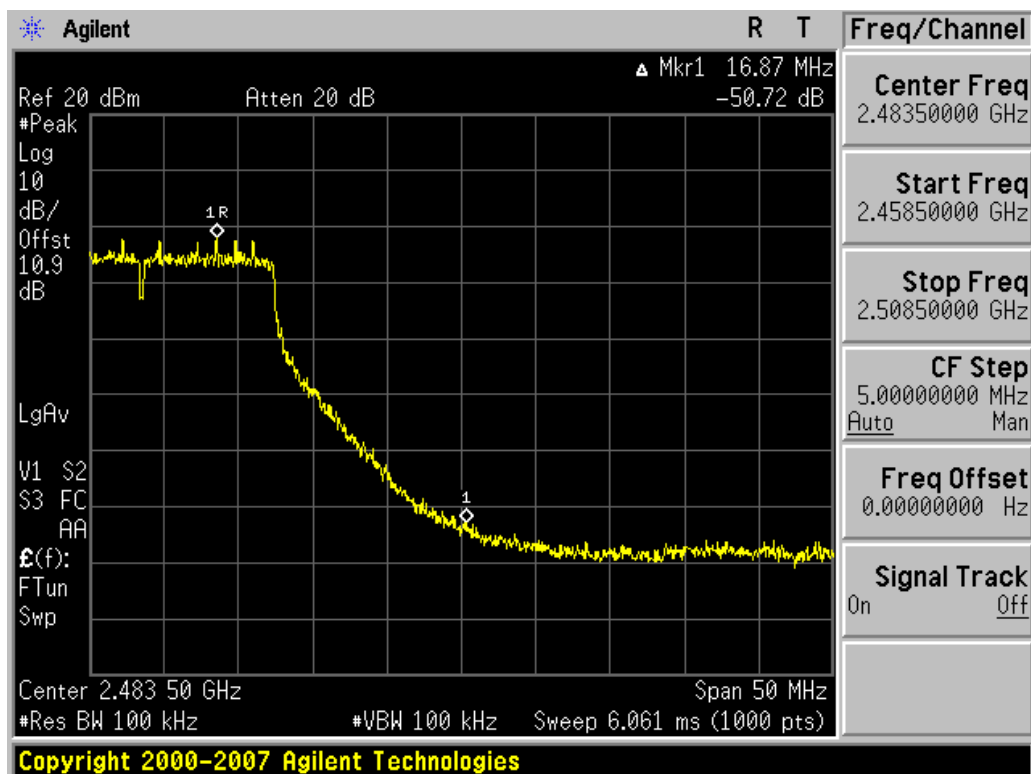


Plot 6-44. Band Edge Plot (802.11n (20MHz) – Ch. 11) – Aux Antenna

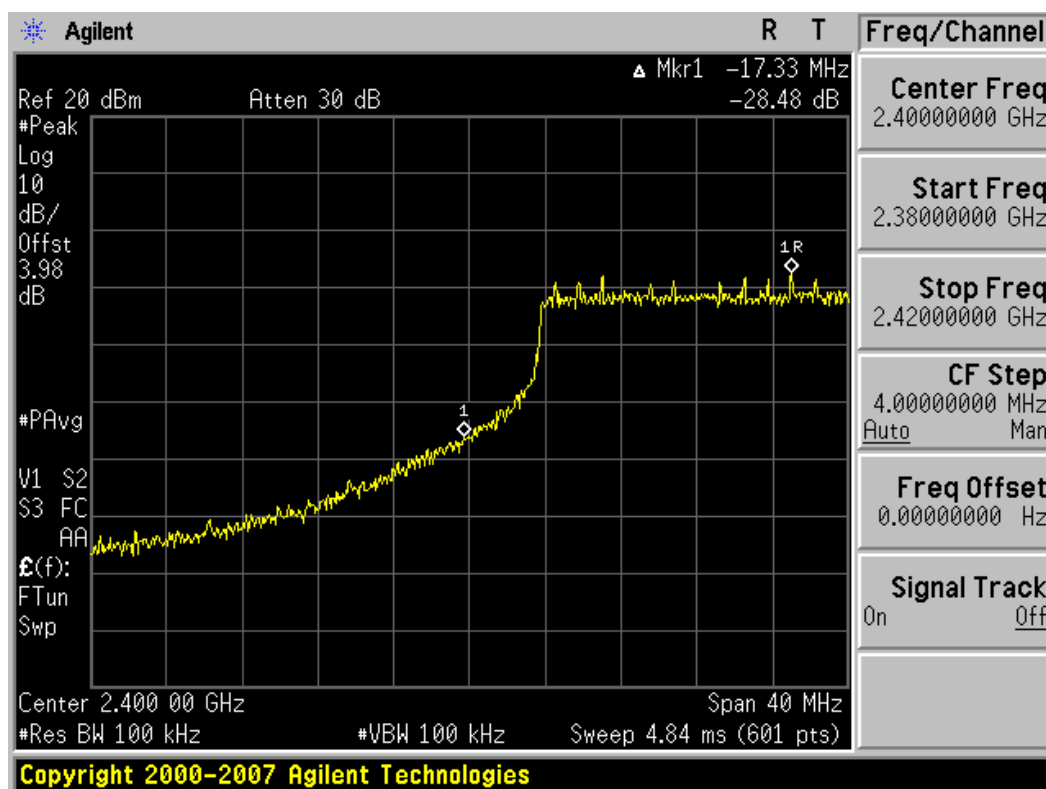

Plot 6-45. Band Edge Plot (802.11n (40MHz) – Ch. 3) – Aux Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 48 of 73

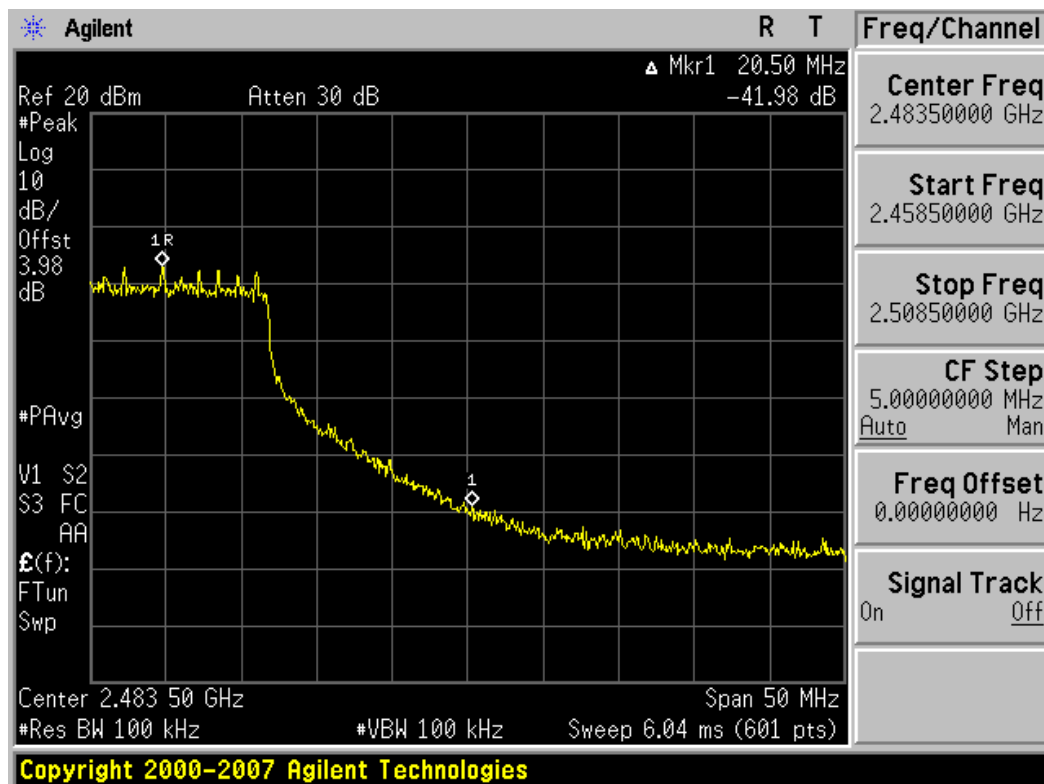


Plot 6-46. Band Edge Plot (802.11n (40MHz) – Ch. 9) – Aux Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 49 of 73

6.8 Out of Band Emissions


§15.247(d)

For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, and “n” modes. The worst case spurious emissions were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below.

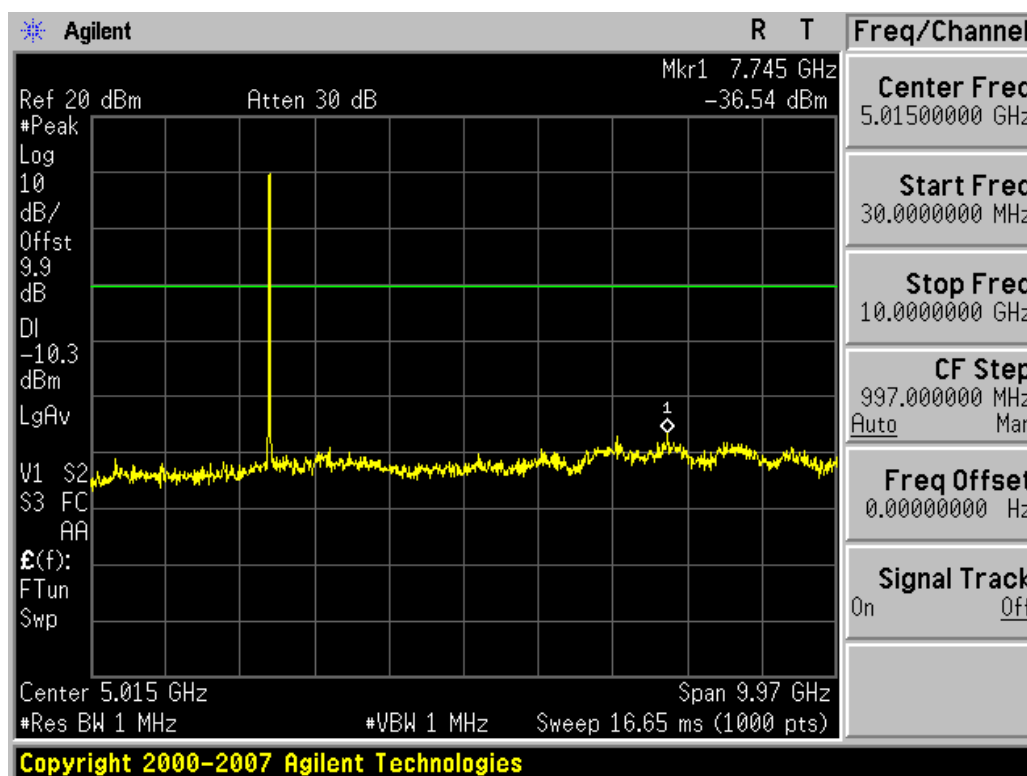


Plot 6-47. Conducted Spurious Plot (802.11b – Ch. 1) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 50 of 73

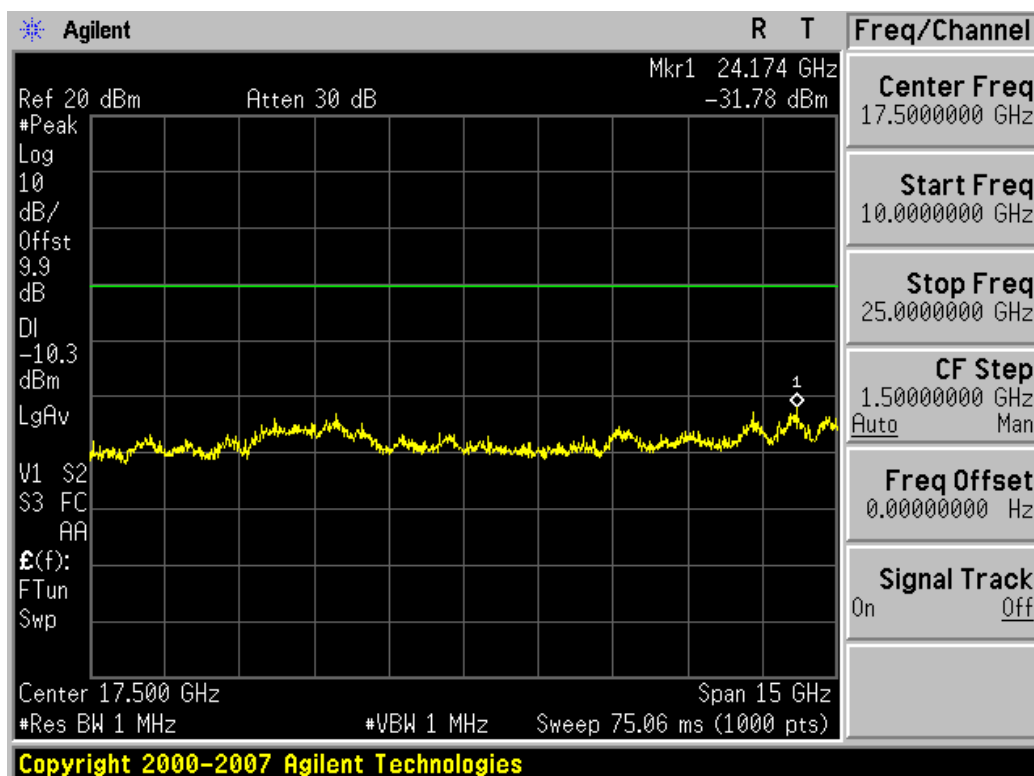


Plot 6-48. Conducted Spurious Plot (802.11b – Ch. 1) – Main Antenna

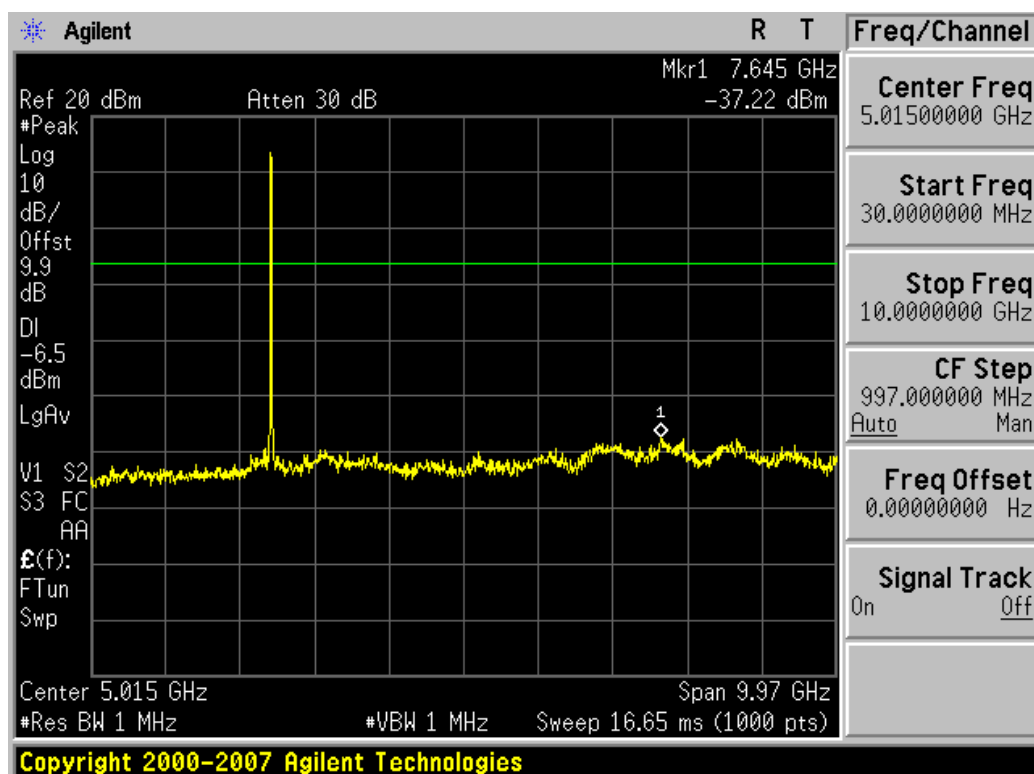


Plot 6-49. Conducted Spurious Plot (802.11b – Ch. 6) – Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 51 of 73

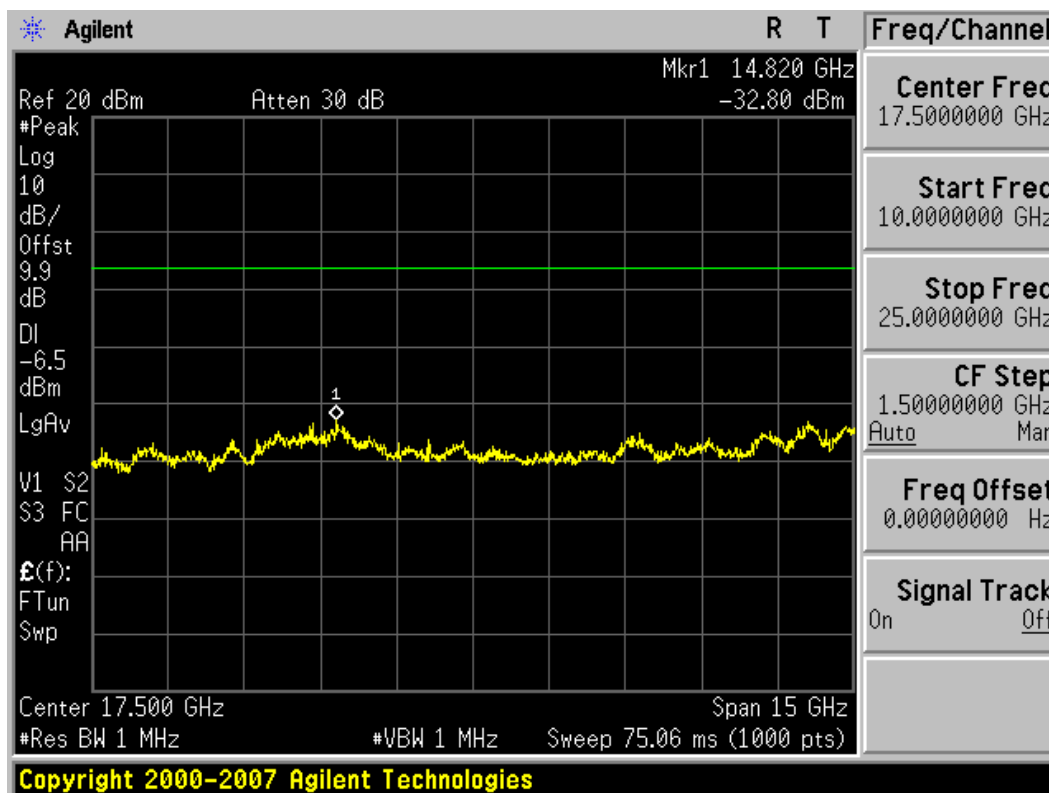


Plot 6-50. Conducted Spurious Plot (802.11b - Ch. 6) - Main Antenna

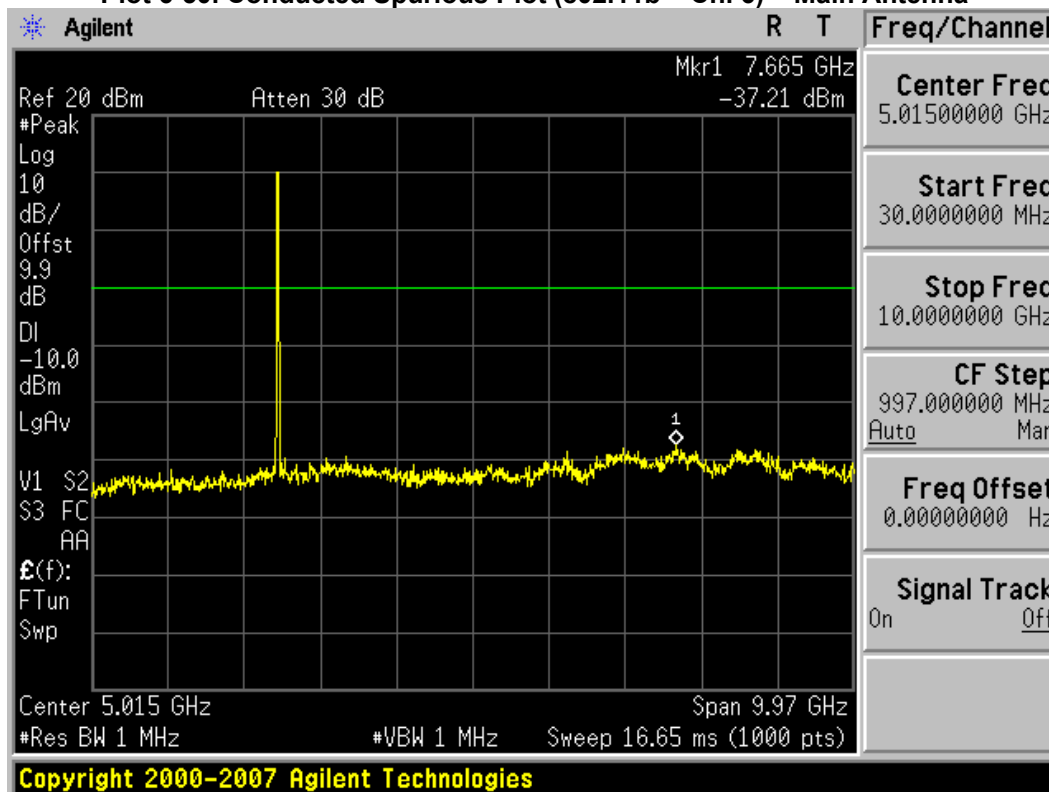


Plot 6-51. Conducted Spurious Plot (802.11b - Ch. 11) - Main Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 52 of 73

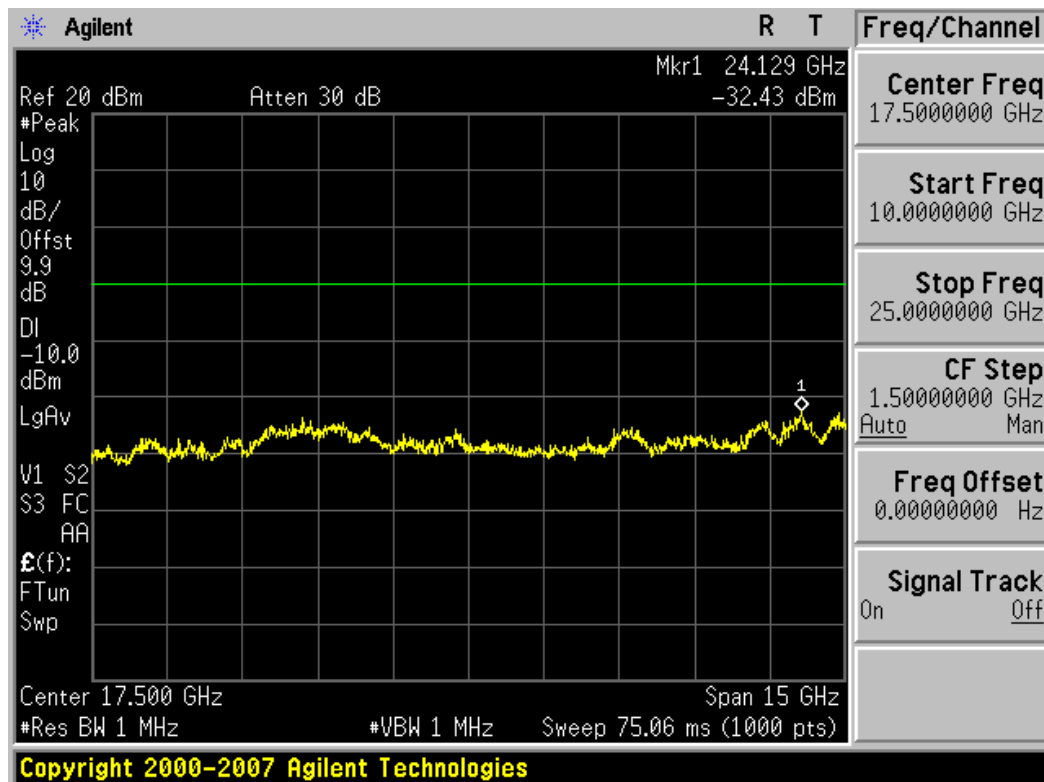


Plot 6-52. Conducted Spurious Plot (802.11b – Ch. 11) – Main Antenna

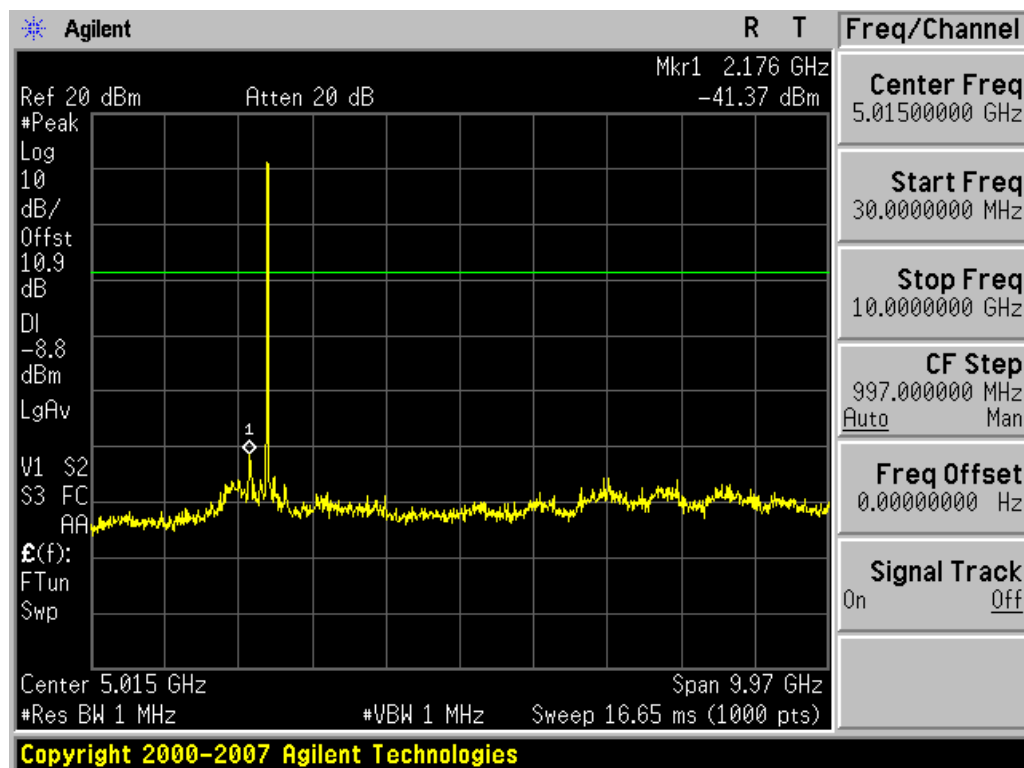


Plot 6-53. Conducted Spurious Plot (802.11b – Ch. 1) – Aux Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 53 of 73

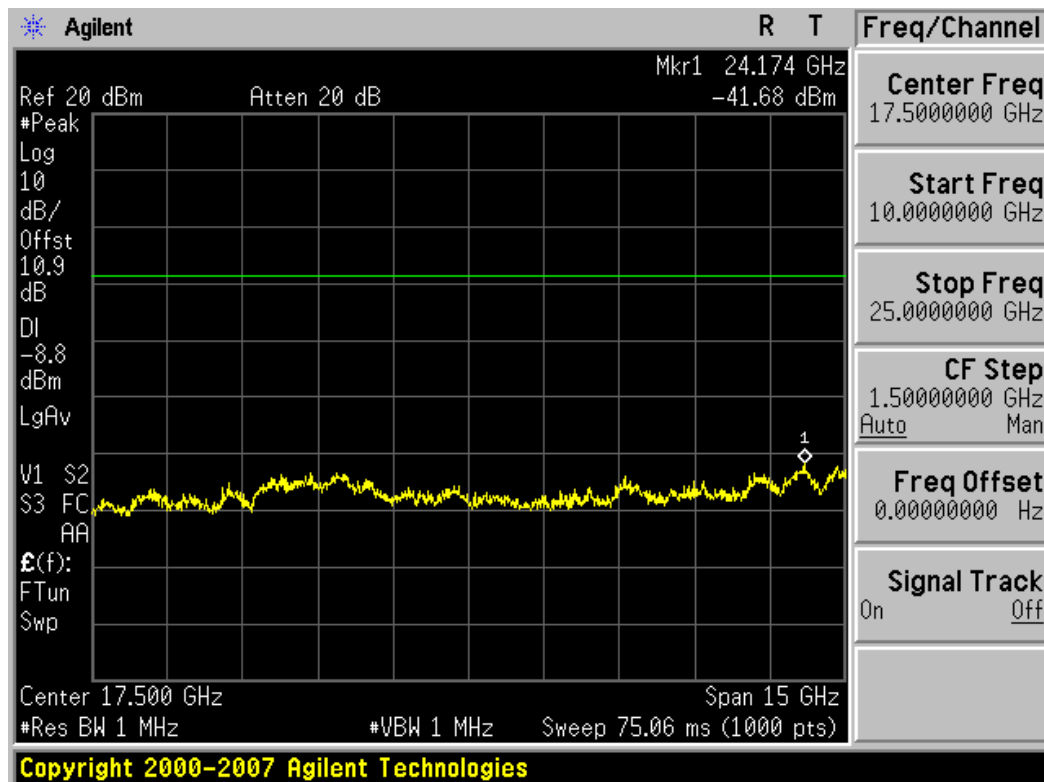


Plot 6-54. Conducted Spurious Plot (802.11b – Ch. 1) – Aux Antenna

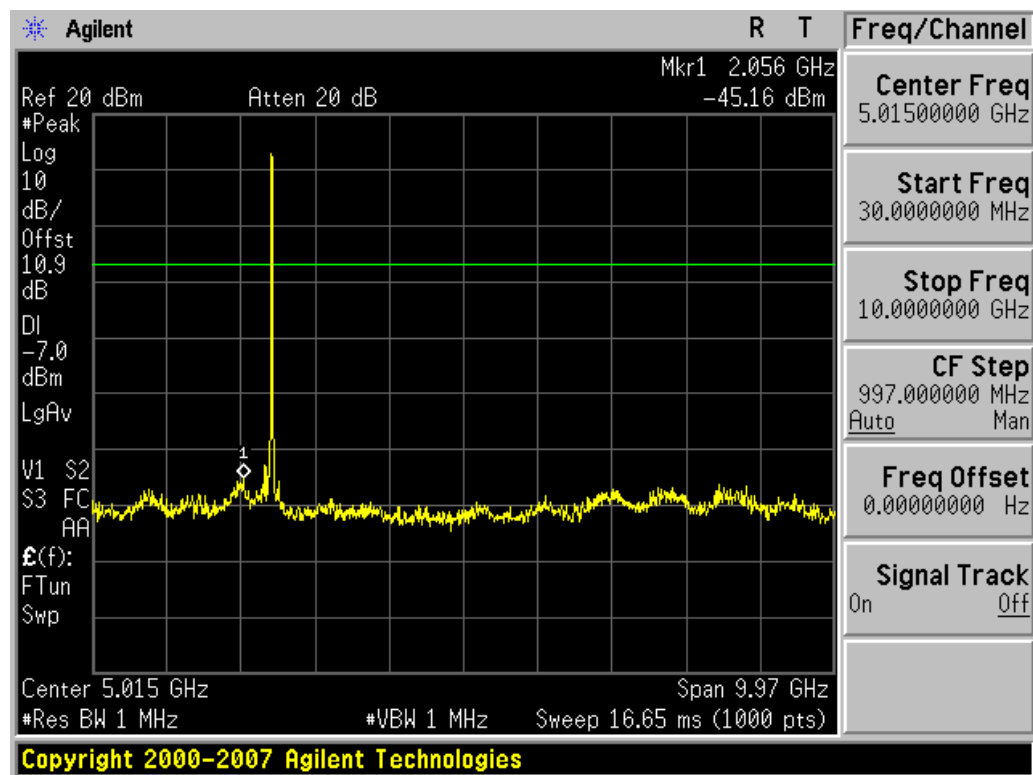


Plot 6-55. Conducted Spurious Plot (802.11b – Ch. 6) – Aux Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 54 of 73

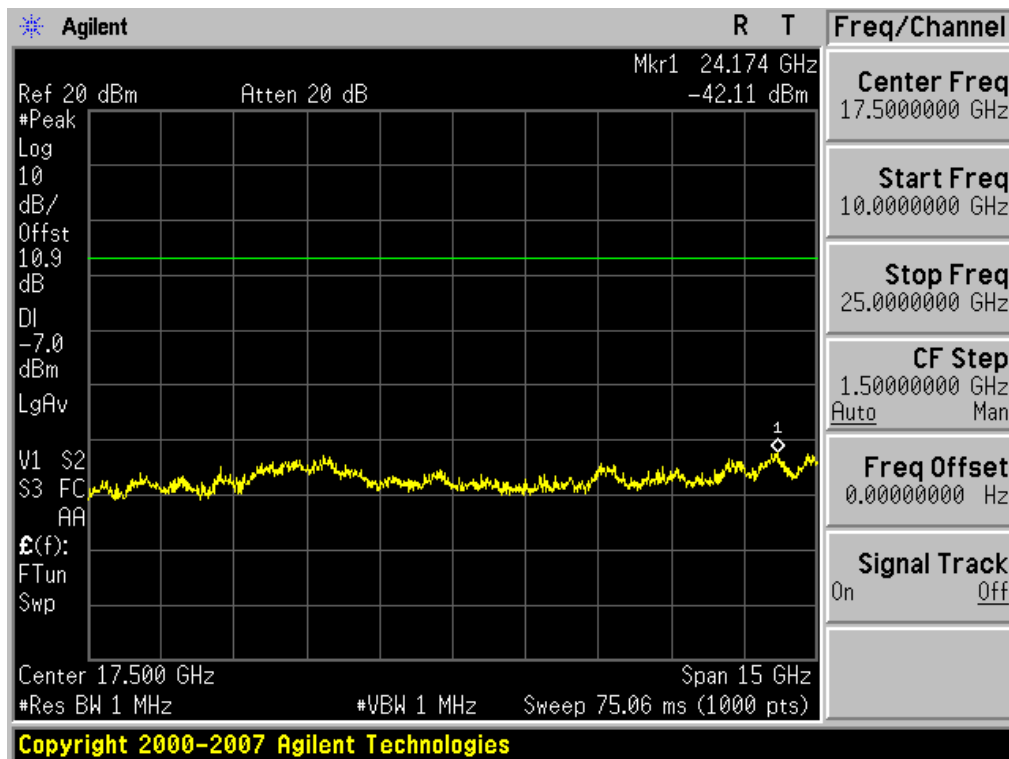


Plot 6-56. Conducted Spurious Plot (802.11b – Ch. 6) – Aux Antenna

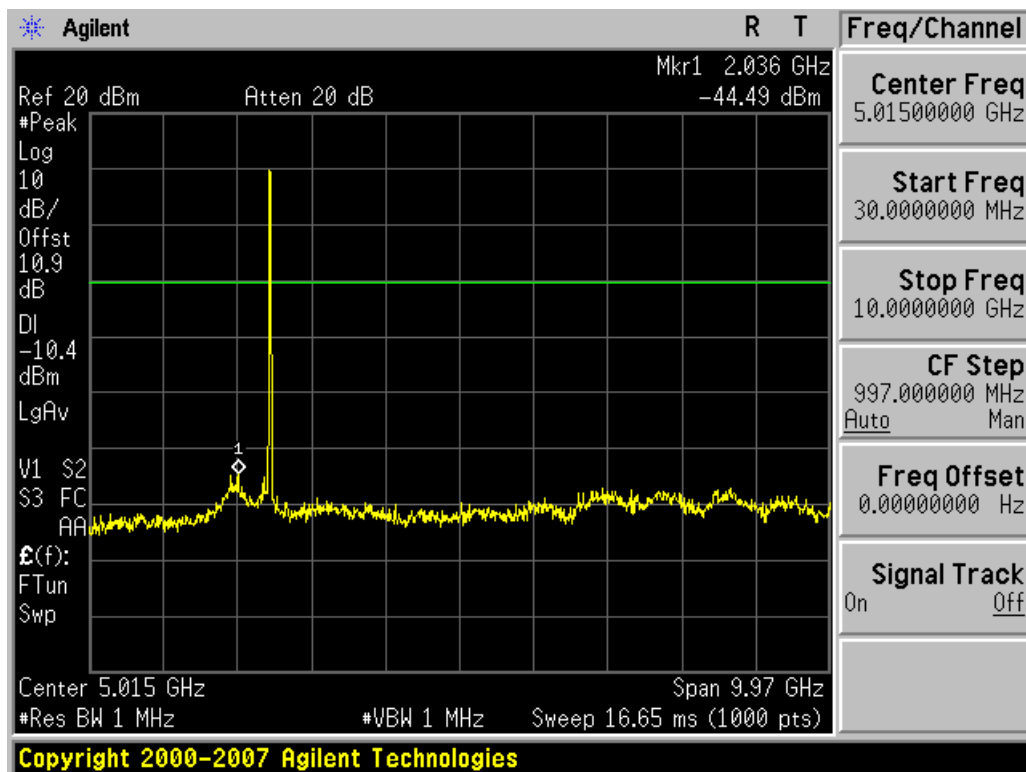

Plot 6-57. Conducted Spurious Plot (802.11b – Ch. 11) – Aux Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 55 of 73

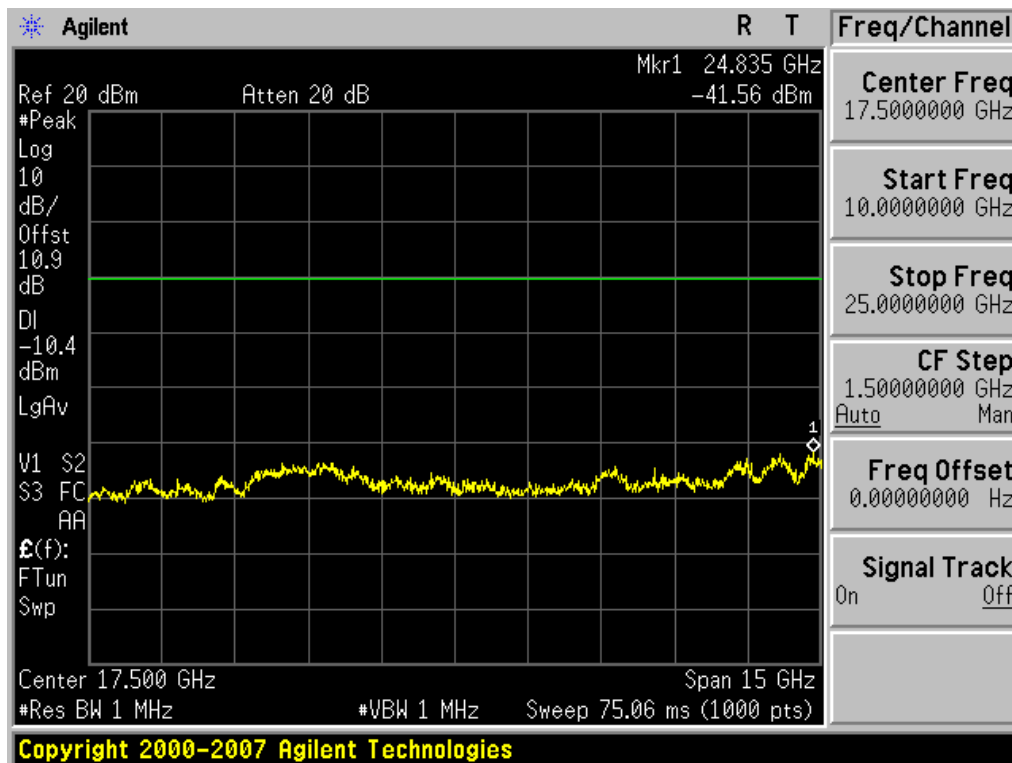

Plot 6-58. Conducted Spurious Plot (802.11b – Ch. 11) – Aux Antenna

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 56 of 73

6.9 Radiated Spurious Emission Measurements

\$15.247(d) / \$15.205 & \$15.209

The EUT was tested from 9kHz to the tenth harmonic of the fundamental frequency of the transmitter. Below 1GHZ a CISPR quasi peak detector was used. Above 1 GHz average measurements were taken, using RBW= 1MHz, VBW= 10Hz, and linearly polarized horn antennas. In addition, peak measurements (RBW= 1MHz, VBW= 1MHz) were taken to ensure that the peak levels are not more than 20dB above the average limit. No harmonics/spurs peak emissions are more than 20dB above the average limit. Special attention is taken for the EUT's harmonic and spurious radiated emissions in the restricted bands of operations, as defined in Section 15.205.

Note: All modes and antennas were investigated for radiated spurious emissions. Transmitting from the Aux antenna only had the lowest emissions. Transmitting with the Main + Aux antennas also had low emissions but these emissions were close to the emissions when transmitting with the main antenna only. The worse case emissions are reported in the tables below with the EUT transmitting from the main antenna only.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-25. Radiated Limits

Sample Calculation

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB]}$

Notes:

- AFCL = Antenna Factor $_{[dB]} + \text{Cable Loss}_{[dB]}$

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 57 of 73

Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209

Mode: 802.11b

Transfer Rate: 1 Mbps

Distance of Measurements: 1 Meters

Operating Frequency: 2412MHz

Channel: 1

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4824.00	-98.20	Avg	V	37.90	-9.54	37.16	53.98	-16.82
4824.00	-93.90	Peak	V	37.90	-9.54	41.46	73.98	-32.52
12060.00	-135.00	Avg	V	51.95	0.00	23.95	53.98	-30.03
12060.00	-125.00	Peak	V	51.95	0.00	33.95	73.98	-40.03

Table 6-26. Radiated Measurements @ 1 meters

NOTES:

1. All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-25.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 58 of 73

Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209

Mode: 802.11b

Transfer Rate: 1 Mbps

Distance of Measurements: 1 Meters

Operating Frequency: 2437 MHz

Channel: 6

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4874.00	-96.61	Avg	V	38.01	-9.54	38.85	53.98	-15.12
4874.00	-91.11	Peak	V	38.01	-9.54	44.35	73.98	-29.62
7311.00	-135.00	Avg	V	42.94	0.00	14.94	53.98	-39.04
7311.00	-125.00	Peak	V	42.94	0.00	24.94	73.98	-49.04
12185.00	-135.00	Avg	V	52.18	0.00	24.18	53.98	-29.80
12185.00	-125.00	Peak	V	52.18	0.00	34.18	73.98	-39.80

Table 6-27. Radiated Measurements @ 1 meters

NOTES:

1. All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-25.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 59 of 73

Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209

Mode: 802.11b

Transfer Rate: 1 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 2462 MHz

Channel: 11

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4924.00	-98.63	Avg	V	38.12	-9.54	36.95	53.98	-17.03
4924.00	-96.13	Peak	V	38.12	-9.54	39.45	73.98	-34.53
7386.00	-135.00	Avg	V	43.04	0.00	15.04	53.98	-38.94
7386.00	-125.00	Peak	V	43.04	0.00	25.04	73.98	-48.94
12310.00	-135.00	Avg	V	52.41	0.00	24.41	53.98	-29.57
12310.00	-125.00	Peak	V	52.41	0.00	34.41	73.98	-39.57

Table 6-28. Radiated Measurements @ 1 meters

NOTES:

1. All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-25.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 60 of 73

6.10 Radiated Restricted Band Edge Measurements

§15.205 / §15.209

Note: All modes and antennas were investigated for radiated band edge emissions. Transmitting from the Aux antenna only had the lowest emissions. Transmitting with the Main + Aux antennas also had low emissions but these emissions were close to the emissions when transmitting with the main antenna only. The worse case emissions are reported in the tables below with the EUT transmitting from the main antenna only.

Mode: 802.11g

Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meters

Channel 11

Operating Frequency 2462 MHz

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
2484.10	-89.41	Avg	V	32.49	-9.54	40.54	53.98	-13.44
2484.10	-74.01	Peak	V	32.49	-9.54	55.94	73.98	-18.04
2485.90	-91.61	Avg	V	32.49	-9.54	38.34	53.98	-15.64
2485.90	-75.91	Peak	V	32.49	-9.54	54.04	73.98	-19.94
2489.10	-94.12	Avg	V	32.49	-9.54	35.84	53.98	-18.14
2489.10	-80.32	Peak	V	32.49	-9.54	49.64	73.98	-24.34

Table 6-29. Upper Radiated Restricted Band Measurements at 1-meter

NOTES:

1. All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-25.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 61 of 73

Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209

Mode: 802.11g

Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meters

Channel: 10

Operating Frequency: 2457 MHz

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
2484.30	-90.64	Avg	V	31.86	-9.54	38.68	53.98	-15.30
2484.30	-73.24	Peak	V	31.86	-9.54	56.08	73.98	-17.90
2486.50	-92.74	Avg	V	31.86	-9.54	36.58	53.98	-17.40
2486.50	-74.74	Peak	V	31.86	-9.54	54.58	73.98	-19.40
2488.70	-95.02	Avg	V	31.97	-9.54	34.41	53.98	-19.57
2488.70	-75.52	Peak	V	31.97	-9.54	53.91	73.98	-20.07

Table 6-30. Upper Radiated Restricted Band Measurements at 1-meter

NOTES:

1. All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-25.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 62 of 73

Radiated Restricted Band Edge Measurements(Cont'd)

§15.205 / §15.209

Mode: 802.11n

Transfer Rate: 13.5 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 2452MHz

Channel: 9

Bandwidth 40MHz

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
2483.50	-103.04	Avg	V	31.86	-9.54	26.28	53.98	-27.70
2483.50	-87.74	Peak	V	31.86	-9.54	41.58	73.98	-32.40
2485.30	-103.44	Avg	V	31.86	-9.54	25.88	53.98	-28.10
2485.30	-87.44	Peak	V	31.86	-9.54	41.88	73.98	-32.10
2487.30	-104.32	Avg	V	31.97	-9.54	25.11	53.98	-28.87
2487.30	-90.82	Peak	V	31.97	-9.54	38.61	73.98	-35.37

Table 6-31. Upper Radiated Restricted Band Measurements at 1-meter

NOTES:

1. All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-25.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 63 of 73

Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209

Mode: 802.11g

Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 2412 MHz

Channel: 1

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
2331.60	-93.74	Avg	V	31.86	-9.54	35.58	53.98	-18.40
2331.60	-82.74	Peak	V	31.86	-9.54	46.58	73.98	-27.40
2361.20	-91.34	Avg	V	31.86	-9.54	37.98	53.98	-16.00
2361.20	-79.74	Peak	V	31.86	-9.54	49.58	73.98	-24.40
2390.00	-91.92	Avg	V	31.97	-9.54	37.51	53.98	-16.47
2390.00	-77.12	Peak	V	31.97	-9.54	52.31	73.98	-21.67

Table 6-32. Lower Radiated Restricted Band Measurements at 1-meter

NOTES:

1. All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-25.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 64 of 73

Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209

Mode: 802.11g

Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 2417 MHz

Channel: 2

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
2334.80	-90.81	Avg	V	32.49	-9.54	39.14	53.98	-14.84
2334.80	-79.61	Peak	V	32.49	-9.54	50.34	73.98	-23.64
2375.60	-88.91	Avg	V	32.49	-9.54	41.04	53.98	-12.94
2375.60	-78.51	Peak	V	32.49	-9.54	51.44	73.98	-22.54
3888.80	-92.12	Avg	V	32.49	-9.54	37.84	53.98	-16.14
3888.80	-77.22	Peak	V	32.49	-9.54	52.74	73.98	-21.24

Table 6-33. Lower Radiated Restricted Band Measurements at 1-meter

NOTES:

1. All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-25.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 65 of 73

Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209

Mode: 802.11n

Transfer Rate: 13.5 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 2422 MHz

Channel: 3

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
2347.60	-104.51	Avg	V	32.49	-9.54	25.44	53.98	-28.54
2347.60	-93.21	Peak	V	32.49	-9.54	36.74	73.98	-37.24
2386.60	-103.51	Avg	V	32.49	-9.54	26.44	53.98	-27.54
2386.60	-91.41	Peak	V	32.49	-9.54	38.54	73.98	-35.44
2390.00	-102.62	Avg	V	32.49	-9.54	27.34	53.98	-26.64
2390.00	-90.22	Peak	V	32.49	-9.54	39.74	73.98	-34.24

Table 6-34. Lower Radiated Restricted Band Measurements at 1-meter

NOTES:

1. All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-25.
2. Average Measurements > 1GHz using RBW = 1MHz VBW = 10Hz
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 66 of 73


6.11 Line-Conducted Test Data

§15.207

PCTEST Engineering Laboratory Inc.

Company : Panasonic Corporation of North America Power Source : AC120V/60Hz
 Model Number : CF-19 Tested Date : 08/13/2010
 FCC ID Code : ACJ9TGCF-19F Note : Tested with WLAN b ON
 Standard : FCC Part 15C, 15.207

Conducted Emission Measurement

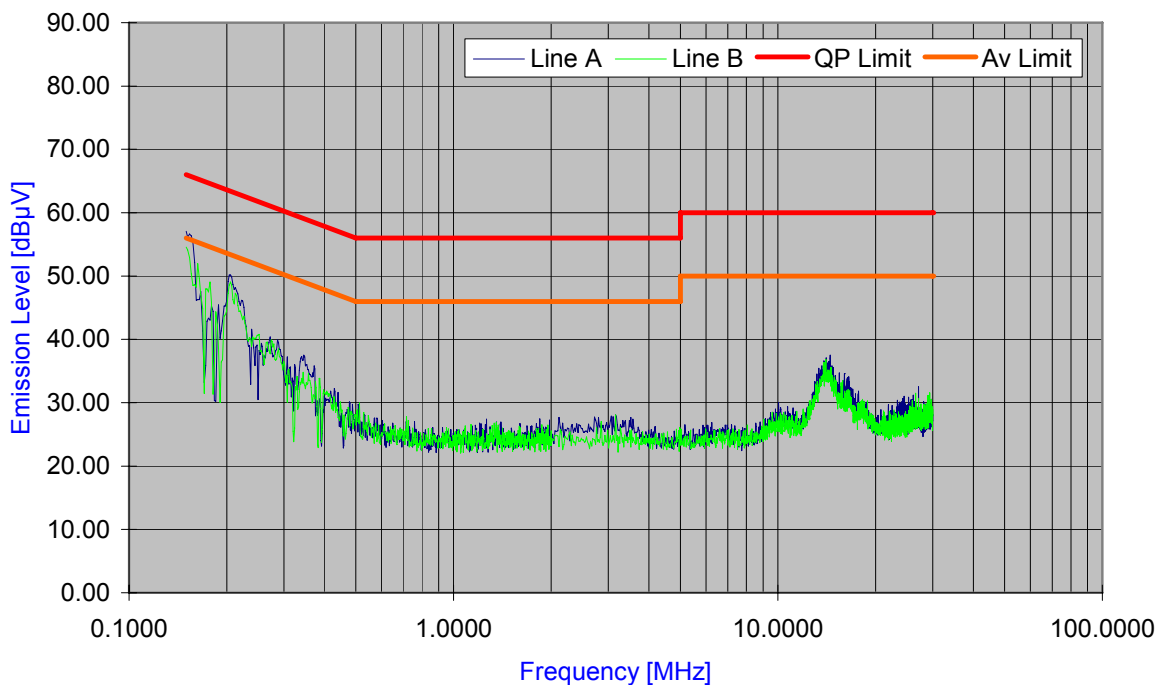

Ver.1.1 ©PCTEST 2006.08

Plot 6-59. Line Conducted Plot with 802.11b

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 67 of 73

Line-Conducted Test Data (Cont'd)

§15.207

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.150	6.85	56.96	66.00	-9.04	41.27	56.00	-14.73
2	A	0.151	6.85	54.07	66.00	-11.93	32.15	56.00	-23.85
3	A	0.168	6.86	41.57	65.07	-23.50	30.21	55.07	-24.86
4	A	0.206	6.87	44.35	63.35	-19.00	31.18	53.35	-22.17
5	A	0.272	6.90	34.82	61.05	-26.23	23.41	51.05	-27.64
6	A	0.278	6.90	34.70	61.04	-26.34	23.25	51.04	-27.79
7	A	0.291	6.91	32.94	60.49	-27.55	21.10	50.49	-29.39
8	A	0.339	6.93	30.46	59.23	-28.77	20.44	49.23	-28.79
9	A	0.350	6.93	29.82	58.97	-29.15	20.60	48.97	-28.37
10	A	14.474	8.03	30.61	60.00	-29.39	24.34	50.00	-25.66
11	B	0.150	6.84	54.11	66.00	-11.89	39.07	56.00	-16.93
12	B	0.160	6.85	42.90	65.45	-22.55	30.59	55.45	-24.86
13	B	0.168	6.85	41.89	65.08	-23.19	29.78	55.08	-25.30
14	B	0.205	6.87	43.42	63.39	-19.97	29.86	53.39	-23.53
15	B	0.273	6.90	34.58	61.04	-26.46	23.87	51.04	-27.17
16	B	0.275	6.90	34.43	61.03	-26.60	23.92	51.03	-27.11
17	B	0.341	6.93	28.99	59.19	-30.20	20.03	49.19	-29.16
18	B	0.369	6.93	27.02	58.52	-31.50	19.04	48.52	-29.48
19	B	14.114	8.05	29.73	60.00	-30.27	21.50	50.00	-28.50
20	B	14.557	8.09	29.18	60.00	-30.82	21.39	50.00	-28.61

Table 6-35. Line Conducted Data with 802.11b

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 68 of 73


Line-Conducted Test Data (Cont'd)

§15.207

PCTEST Engineering Laboratory Inc.

Company : Panasonic Corporation of North America Power Source : AC120V/60Hz
Model Number : CF-19 Tested Date : 08/13/2010
FCC ID Code : ACJ9TGCF-19F Note : Tested with WLAN g ON
Standard : FCC Part 15C, 15.207

Conducted Emission Measurement

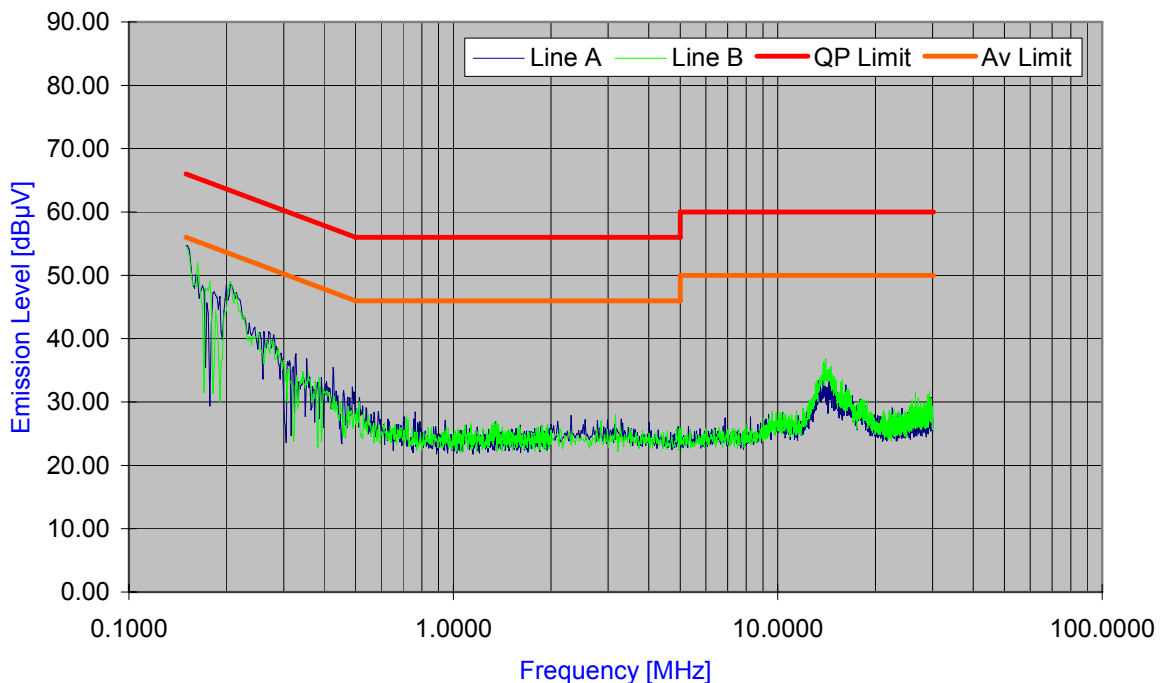

Ver.1.1 ©PCTEST 2006.08

Plot 6-60. Line Conducted Plot with 802.11g

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 69 of 73

Line-Conducted Test Data (Cont'd)

§15.207

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.150	6.85	53.32	66.00	-12.68	39.41	56.00	-16.59
2	A	0.166	6.86	42.36	65.16	-22.80	29.42	55.16	-25.74
3	A	0.205	6.87	42.68	63.42	-20.74	29.84	53.42	-23.58
4	A	0.277	6.90	34.36	60.91	-26.55	22.34	50.91	-28.57
5	A	0.295	6.91	31.89	60.37	-28.48	20.43	50.37	-29.94
6	A	0.313	6.92	28.90	59.89	-30.99	20.00	49.89	-29.89
7	A	0.340	6.93	28.78	59.20	-30.42	20.20	49.20	-29.00
8	A	0.392	6.94	25.82	58.01	-32.19	19.04	48.01	-28.97
9	A	0.407	6.95	25.75	57.71	-31.96	19.11	47.71	-28.60
10	A	0.471	6.96	24.34	56.49	-32.15	19.05	46.49	-27.44
11	B	0.150	6.84	54.11	66.00	-11.89	39.07	56.00	-16.93
12	B	0.160	6.85	42.90	65.45	-22.55	30.59	55.45	-24.86
13	B	0.168	6.85	41.89	65.08	-23.19	29.78	55.08	-25.30
14	B	0.205	6.87	43.42	63.39	-19.97	29.86	53.39	-23.53
15	B	0.273	6.90	34.58	61.04	-26.46	23.87	51.04	-27.17
16	B	0.274	6.90	34.43	61.03	-26.60	23.92	51.03	-27.11
17	B	0.341	6.93	28.99	59.19	-30.20	20.03	49.19	-29.16
18	B	0.369	6.93	27.02	58.52	-31.50	19.04	48.52	-29.48
19	B	14.114	8.05	29.73	60.00	-30.27	21.50	50.00	-28.50
20	B	14.557	8.09	29.18	60.00	-30.82	21.39	50.00	-28.61

Table 6-36. Line Conducted Data with 802.11g

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 70 of 73


Line-Conducted Test Data (Cont'd)

§15.207

PCTEST Engineering Laboratory Inc.

Company : Panasonic Corporation of North America Power Source : AC120V/60Hz
Model Number : CF-19 Tested Date : 08/13/2010
FCC ID Code : ACJ9TGCF-19F Note : Tested with WLAN n ON
Standard : FCC Part 15C, 15.207

Conducted Emission Measurement

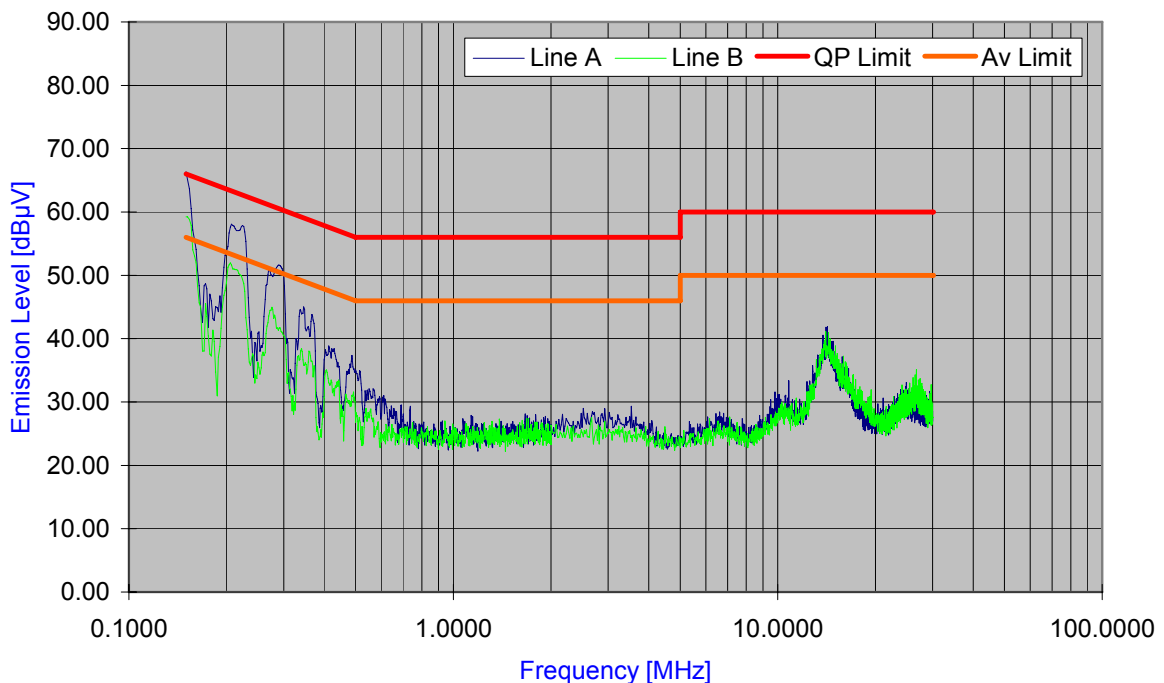

Ver.1.1 ©PCTEST 2006.08

Plot 6-61. Line Conducted Plot with 802.11n

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: ACJ9TGCF-19F	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 71 of 73

Line-Conducted Test Data (Cont'd)

§15.207

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.150	6.85	64.30	66.00	-1.70	47.52	56.00	-8.48
2	A	0.154	6.85	52.28	65.78	-13.50	31.43	55.78	-24.35
3	A	0.207	6.87	53.29	63.34	-10.05	32.54	53.34	-20.80
4	A	0.274	6.90	44.87	61.01	-16.14	26.03	51.01	-24.98
5	A	0.339	6.93	39.43	59.22	-19.79	22.47	49.22	-26.75
6	A	0.349	6.93	38.36	58.98	-20.62	21.65	48.98	-27.33
7	A	0.406	6.94	33.00	57.73	-24.73	20.20	47.73	-27.53
8	A	0.473	6.96	28.50	56.47	-27.97	19.26	46.47	-27.21
9	A	14.139	8.00	33.03	60.00	-26.97	26.94	50.00	-23.06
10	A	14.202	8.01	32.98	60.00	-27.02	26.85	50.00	-23.15
11	B	0.150	6.84	60.32	66.00	-5.68	41.88	56.00	-14.12
12	B	0.156	6.84	42.27	65.67	-23.40	31.16	55.67	-24.51
13	B	0.206	6.87	47.41	63.38	-15.97	31.74	53.38	-21.64
14	B	0.273	6.90	39.21	61.04	-21.83	24.31	51.04	-26.73
15	B	0.339	6.93	33.46	59.22	-25.76	21.61	49.22	-27.61
16	B	0.341	6.93	33.11	59.17	-26.06	21.15	49.17	-28.02
17	B	14.088	8.05	33.36	60.00	-26.64	26.86	50.00	-23.14
18	B	14.234	8.06	34.93	60.00	-25.07	26.98	50.00	-23.02
19	B	14.429	8.08	33.20	60.00	-26.80	26.64	50.00	-23.36
20	B	15.030	8.14	31.49	60.00	-28.51	25.34	50.00	-24.66

Table 6-37. Line Conducted Data with 802.11n

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 72 of 73

CONCLUSION

The data collected relate only the item(s) tested and show that the **Panasonic Toughbook Model: CF-19mk4**
FCC ID: ACJ9TGCF-19F is in compliance with Part 15C of the FCC Rules.

FCC ID: ACJ9TGCF-19F		FCC Pt. 15.247 802.11 b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1007231224.ACJ	Test Dates: August 13, 2010	EUT Type: Toughbook Model: CF-19mk4		Page 73 of 73