

# **FURUNO**

## **OPERATOR'S MANUAL**

### *MARINE RADAR*

**FAR-2218**

**FAR-2218-BB**

**FAR-2228**

**FAR-2228-BB**

**FAR-2238S**

**FAR-2238S-BB**

**FAR-2238S-NXT**

**FAR-2238S-NXT-BB**

**FAR-2258**

**FAR-2268DS**

**FAR-2318**

**FAR-2328**

**FAR-2338S**

**FAR-2338S-NXT**

Model

---

(FISHING SPECIFICATION)



(Elemental Chlorine Free)

The paper used in this manual  
is elemental chlorine free.

## FURUNO ELECTRIC CO., LTD.

9-52 Ashihara-cho,  
Nishinomiya, 662-8580, JAPAN

• FURUNO Authorized Distributor/Dealer

All rights reserved.

Printed in Japan

Pub. No. OME-36521-D21

(REFU ) FAR-2218F

A : OCT. 2018

D21 : MAR. 25, 2021



0 0 0 1 9 5 6 2 2 1 3

# IMPORTANT NOTICES

---

## General

- This manual has been authored with simplified grammar, to meet the needs of international users.
- The operator of this equipment must read and follow the instructions in this manual.  
Wrong operation or maintenance can void the warranty or cause injury.
- Do not copy any part of this manual without written permission from FURUNO.
- If this manual is lost or worn, contact your dealer about replacement.
- The contents of this manual and the equipment specifications can change without notice.
- The example screens (or illustrations) shown in this manual can be different from the screens you see on your display. The screens you see depend on your system configuration and equipment settings.
- Save this manual for future reference.
- Any modification of the equipment (including software) by persons not authorized by FURUNO will void the warranty.
- The following concern acts as our importer in Europe, as defined in DECISION No 768/2008/EC.
  - Name: FURUNO EUROPE B.V.
  - Address: Ridderhaven 19B, 2984 BT Ridderkerk, The Netherlands
- The following concern acts as our importer in UK, as defined in SI 2016/1025 as amended SI 2019/470.
  - Name: FURUNO (UK) LTD.
  - Address: West Building Penner Road Havant Hampshire PO9 1QY, U.K.
- InstantAccess bar™ is a registered trademark of FURUNO Electric co., Ltd.
- SDHC is a registered trademark of SD-3C, LLC.
- All brand, product names, trademarks, registered trademarks, and service marks belong to their respective holders.

## How to discard this product


Discard this product according to local regulations for the disposal of industrial waste. For disposal in the USA, see the homepage of the Electronics Industries Alliance (<http://www.eiae.org/>) for the correct method of disposal.

## How to discard a used battery

Some FURUNO products have a battery(ies). To see if your product has a battery, see the chapter on Maintenance. Follow the instructions below if a battery is used. Tape the + and - terminals of battery before disposal to prevent fire, heat generation caused by short circuit.


### In the European Union

The crossed-out trash can symbol indicates that all types of batteries must not be discarded in standard trash, or at a trash site. Take the used batteries to a battery collection site according to your national legislation and the Batteries Directive 2006/66/EU.



### In the USA

The Mobius loop symbol (three chasing arrows) indicates that Ni-Cd and lead-acid rechargeable batteries must be recycled. Take the used batteries to a battery collection site according to local laws.



### In the other countries

There are no international standards for the battery recycle symbol. The number of symbols can increase when the other countries make their own recycle symbols in the future.



# SAFETY INSTRUCTIONS

The operator must read the applicable safety instructions before attempting to operate the equipment.



## DANGER

Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.



## WARNING

Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.



## CAUTION

Indicates a potentially hazardous situation which, if not avoided, could result in minor or moderate injury.



Warning, Caution



Prohibitive Action



Mandatory Action



## WARNING



### Radio Frequency Radiation Hazard

The radar antenna emits electromagnetic radio frequency (RF) energy that can be harmful, particularly to your eyes. Never look directly into the antenna aperture from a close distance while the radar is in operation or expose yourself to the transmitting antenna at a close distance. Distances at which RF radiation level of 100, 50 and 10 W/m<sup>2</sup> are given in the table below.

**Note:** If the antenna unit is installed at a close distance in front of the wheel house, your administration may require halt of transmission within a certain sector of antenna revolution. This is possible. Ask your FURUNO representative or dealer to provide this feature.

|                   | Model                               | Transceiver     | Magnetron | Antenna* | 100 W/m <sup>2</sup> | 50 W/m <sup>2</sup> | 10 W/m <sup>2</sup> |
|-------------------|-------------------------------------|-----------------|-----------|----------|----------------------|---------------------|---------------------|
| Magnetron radar   | FAR-2218(-BB)<br>FAR-2318           | RTR-105 (12 kW) | FNE1201   | XN12CF   | 0.6 m                | 1.4 m               | 4.4 m               |
|                   |                                     |                 |           | XN20CF   | 0.4 m                | 0.9 m               | 3.0 m               |
|                   |                                     |                 |           | XN24CF   | 0.3 m                | 0.6 m               | 2.5 m               |
|                   | FAR-2228(-BB)<br>FAR-2328           | RTR-106 (25 kW) | MG5436    | XN12CF   | 1.3 m                | 2.7 m               | 9.5 m               |
|                   |                                     |                 |           | XN20CF   | 1.0 m                | 1.7 m               | 6.8 m               |
|                   |                                     |                 |           | XN24CF   | 0.7 m                | 1.3 m               | 5.5 m               |
|                   | FAR-2238S(-BB)<br>FAR-2338S         | RTR-107 (30 kW) | MG5223F   | SN24CF** | 1.7 m                | 2.4 m               | 3.8 m               |
|                   |                                     |                 |           | SN30CF** | 1.4 m                | 2.1 m               | 3.4 m               |
|                   |                                     |                 |           | SN36CF   | N/A                  | 0.5 m               | 4.6 m               |
|                   | FAR-2258                            | RTR-122 (50 kW) | 9M31      | XN24AF   | 2.3 m                | 4.5 m               | 13.9 m              |
|                   |                                     |                 |           | XN30AF   | 2.3 m                | 4.3 m               | 13.9 m              |
|                   | FAR-2268DS                          | RTR-129 (60 kW) | MG5240F   | SN30AF** | 1.42 m               | 3.15 m              | 15 m                |
|                   |                                     |                 |           | SN36AF** | 1.3 m                | 3.0 m               | 16 m                |
|                   |                                     |                 |           | SN30DF** | 1.65 m               | 3.3 m               | 15.6 m              |
| Solid state radar | FAR-2238S-NXT(-BB)<br>FAR-2338S-NXT | RTR-111 (250 W) | —         | SN24CF** | N/A                  | N/A                 | N/A                 |
|                   |                                     |                 |           | SN30CF** | N/A                  | N/A                 | N/A                 |
|                   |                                     |                 |           | SN36CF   | N/A                  | N/A                 | 1.0 m               |

\*: The following numerical values, shown in the antenna types, indicate antenna length.

[12]: 4 ft, [20]: 6.5 ft, [24]: 8 ft, [30]: 10 ft, [36]: 12 ft

\*\* : Unavailable on IMO-type radars

|  <b>WARNING</b> |                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 | <p><b>ELECTRICAL SHOCK HAZARD.</b><br/><b>Do not open the equipment.</b></p> <p>Only qualified personnel should work inside the equipment.</p>                                                                                                                                                                           |
|                 | <p><b>Turn off the radar power switch before servicing the antenna unit. Post a warning sign near the switch indicating it should not be turned on while the antenna unit is being serviced.</b></p> <p>If the antenna rotates while there is personnel nearby or servicing the antenna, injury or death may result.</p> |
|                 | <p><b>Do not disassemble or modify the equipment.</b></p> <p>Fire, electrical shock or serious injury can result.</p>                                                                                                                                                                                                    |
|               | <p><b>Immediately turn off the power at the ship's mains switchboard if water leaks into the equipment or the equipment is emitting smoke or fire.</b></p> <p>Continued use can cause fatal damage to the equipment.</p>                                                                                                 |
|               | <p><b>Keep the area around the antenna free of ropes and other items that may get tangled.</b></p> <p>If the antenna becomes tangled, damage to the equipment or injury to personnel may occur.</p>                                                                                                                      |
|               | <p><b>Make sure no rain or water splash leaks into the equipment.</b></p> <p>Fire or electrical shock can result if water leaks into the equipment.</p>                                                                                                                                                                  |

|  <b>WARNING</b> |                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  | <p><b>Use the proper fuse.</b></p> <p>Use of a wrong fuse can result in damage to the equipment or cause fire.</p>                                                                                |
|                  | <p><b>Keep heater away from equipment.</b></p> <p>Heat can alter equipment shape and melt the power cord, which can cause fire or electrical shock.</p>                                           |
|                  | <p><b>Do not place liquid-filled containers near the equipment.</b></p> <p>Fire or electrical shock can result if a liquid spills into the equipment.</p>                                         |
|                  | <p><b>Do not operate the equipment with wet hands.</b></p> <p>Electrical shock can result.</p>                                                                                                    |
|                | <p><b>Before servicing the radar, turn off the appropriate external breaker.</b></p> <p>Power is not removed from the radar simply by turning off its power switch.</p>                           |
|                | <p><b>This equipment has a valid latitude range of 85°N to 85°S. Operation outside of this range can result in a larger margin of error when calculating position, heading, bearing, etc.</b></p> |

## **WARNING**

**No one navigational aid should be relied upon for the safety of vessel and crew. The navigator has the responsibility to check all aids available to confirm position. Electronic aids are not a substitute for basic navigational principles and common sense.**

- ◆ This TT automatically tracks automatically or manually acquired radar targets and calculates their courses and speeds, indicating them by vectors. Since the data generated by the auto plotter are based on what radar targets are selected, the radar must always be optimally tuned for use with the auto plotter, to ensure required targets will not be lost or unwanted targets such as sea returns and noise will not be acquired and tracked.
- ◆ A target does not always mean a land-mass, reef, ships or other surface vessels but can imply returns from sea surface and clutter. As the level of clutter changes with environment, the operator should properly adjust the A/C SEA, A/C RAIN and GAIN controls to be sure target echoes are not eliminated from the radar screen.

### **WARNING LABEL**

**Warning labels are attached to the equipment. Do not remove any label. If a label is missing or damaged, contact a FURUNO agent or dealer about replacement.**



### **DISPLAY UNIT. POWER SUPPLY UNIT & PROCESSOR UNIT**

Name: Warning Label 1  
Type: 86-003-1011-3  
Code No.: 100-236-233-10



### **TRANSCIEIVER UNIT (RTR-105/106/107/108/109)**

Name: Warning Label  
Type: 03-160-1042-0  
Code No.: 100-302-750-10

## **CAUTION**

**The plotting accuracy and response of this TT meets IMO standards. Tracking accuracy is affected by the following:**

- ◆ Tracking accuracy is affected by course change. One to two minutes is required to restore vectors to full accuracy after an abrupt course change. (The actual amount depends on gyrocompass specifications.)
- ◆ The amount of tracking delay is inversely proportional to the relative speed of the target. Delay is on the order of 15 - 30 seconds for high relative speed; 30 - 60 seconds for low relative speed.
- ◆ The target tracking and pertinent vector calculation accuracy is influenced by the following:
  - Echo intensity
  - The range measurement accuracy; characterized by both random and biased measurement errors.
  - The angular measurement accuracy; characterized by beam shape, target glint and bias errors.
  - Radar transmission pulsewidth
  - Gyrocompass heading error
  - Speed log error
  - Current and wind (set & drift)
  - Course change (own ship and target)

**The data generated by TT, AIS and video plotter are intended for reference only.**

Refer to official nautical charts for detailed and up-to-date information.

**Do not depend on one navigation device for the navigation of the vessel.**

Always check your position against all available aids to navigation, for the safety of the vessel and crew.

**This equipment is not suitable for use in locations where children are likely to be present.**

# TABLE OF CONTENTS

---

|                                                                             |            |
|-----------------------------------------------------------------------------|------------|
| <b>FOREWORD</b> .....                                                       | <b>xiv</b> |
| <b>SYSTEM CONFIGURATION</b> .....                                           | <b>xx</b>  |
| <b>1. OPERATIONAL OVERVIEW</b> .....                                        | <b>1-1</b> |
| 1.1 Controls Overview .....                                                 | 1-1        |
| 1.1.1 Control Unit RCU-014 .....                                            | 1-1        |
| 1.1.2 Control Unit RCU-031 (C-types only) .....                             | 1-4        |
| 1.1.3 Control Unit RCU-015/RCU-016 .....                                    | 1-7        |
| 1.2 How to Turn the Radar On/Off.....                                       | 1-8        |
| 1.3 How to Adjust the Brilliance.....                                       | 1-9        |
| 1.4 Display Overview.....                                                   | 1-9        |
| 1.4.1 Display examples .....                                                | 1-9        |
| 1.4.2 InstantAccess bar™ .....                                              | 1-15       |
| 1.5 Menu Operations .....                                                   | 1-17       |
| 1.5.1 How to open and close the main menu .....                             | 1-17       |
| 1.5.2 How to operate the menus .....                                        | 1-18       |
| 1.5.3 Alphanumeric input.....                                               | 1-19       |
| 1.6 How to Use the On-screen Box Menus .....                                | 1-20       |
| 1.7 [CURSOR] Menu and Cursor Operations.....                                | 1-21       |
| 1.7.1 How to show/hide the cursor (C-type only) .....                       | 1-21       |
| 1.7.2 Cursor data box.....                                                  | 1-21       |
| 1.7.3 How to Use the [CURSOR] Menu .....                                    | 1-22       |
| 1.7.4 How to change the cursor data attributes (C-type only) .....          | 1-23       |
| 1.8 Function Keys.....                                                      | 1-24       |
| 1.8.1 How to set the function key mode (C-types only).....                  | 1-24       |
| 1.8.2 How to use the function keys .....                                    | 1-25       |
| 1.8.3 How to change the function(s) assigned to a key.....                  | 1-26       |
| 1.9 How to Customize Operation.....                                         | 1-27       |
| 1.10 Heading Input .....                                                    | 1-30       |
| 1.10.1 How to select the data source for heading input .....                | 1-30       |
| 1.10.2 How to adjust for magnetic correction (C-types only).....            | 1-30       |
| 1.11 How to Set Own Ship's Speed .....                                      | 1-31       |
| 1.11.1 Automatic speed input (log or EPFS navigator) .....                  | 1-31       |
| 1.11.2 Manual speed input.....                                              | 1-32       |
| 1.12 Own Ship Position .....                                                | 1-33       |
| 1.12.1 How to set the Own Ship position .....                               | 1-33       |
| 1.12.2 How to set the display format for position data (C-types only) ..... | 1-34       |
| 1.12.3 How to select the datum to use for positioning (C-types only) .....  | 1-34       |
| 1.13 Date and Time .....                                                    | 1-35       |
| 1.13.1 How to switch between UTC and local date/time .....                  | 1-35       |
| 1.13.2 How to adjust the local time .....                                   | 1-35       |
| 1.13.3 How to change the date/time display format (C-types only) .....      | 1-36       |
| 1.14 User Settings (IMO-types only) .....                                   | 1-36       |
| 1.14.1 How to reset the user settings .....                                 | 1-38       |
| 1.14.2 How to save/load user settings .....                                 | 1-38       |
| 1.15 How to Start/Stop Transmission .....                                   | 1-39       |
| 1.16 How to Tune the Receiver (Magnetron Radars Only) .....                 | 1-40       |
| 1.16.1 How to select the tuning method .....                                | 1-40       |
| 1.16.2 How to initialize tuning.....                                        | 1-40       |
| 1.16.3 How to tune the receiver manually .....                              | 1-41       |

## TABLE OF CONTENTS

|        |                                                                             |      |
|--------|-----------------------------------------------------------------------------|------|
| 1.17   | How to Select a Pulselength .....                                           | 1-41 |
| 1.17.1 | How to select a pulselength .....                                           | 1-41 |
| 1.17.2 | How to change the preset pulselength .....                                  | 1-42 |
| 1.18   | MOB Mark .....                                                              | 1-42 |
| 1.19   | How to Adjust Sensitivity .....                                             | 1-43 |
| 1.20   | How to Reduce Sea Clutter .....                                             | 1-44 |
| 1.20.1 | How to select the method of clutter adjustment .....                        | 1-44 |
| 1.20.2 | How to fine-tune sea clutter reduction .....                                | 1-44 |
| 1.20.3 | How to manually reduce sea clutter .....                                    | 1-45 |
| 1.20.4 | How to use the BERTHING STC function .....                                  | 1-45 |
| 1.21   | How to Reduce Rain Clutter .....                                            | 1-46 |
| 1.21.1 | How to select the method of rain clutter reduction .....                    | 1-46 |
| 1.21.2 | How to manually reduce the rain clutter .....                               | 1-46 |
| 1.22   | Interference Rejector .....                                                 | 1-48 |
| 1.23   | Echo Stretch .....                                                          | 1-49 |
| 1.24   | Echo Averaging .....                                                        | 1-50 |
| 1.25   | Automatic Clutter Elimination (ACE) Function .....                          | 1-52 |
| 1.25.1 | How to turn the Automatic Clutter Elimination (ACE) function on/off .....   | 1-52 |
| 1.25.2 | How to adjust the gain in Automatic Clutter Elimination (ACE) mode .....    | 1-52 |
| 1.25.3 | How to get high sensitivity .....                                           | 1-53 |
| 1.25.4 | How to suppress false echoes .....                                          | 1-53 |
| 1.26   | Noise Rejector .....                                                        | 1-54 |
| 1.27   | Wiper .....                                                                 | 1-54 |
| 1.28   | How to Preset Controls for a Specific Navigation Purpose .....              | 1-55 |
| 1.28.1 | How to select a customized echo .....                                       | 1-61 |
| 1.28.2 | How to edit a customized echo .....                                         | 1-62 |
| 1.28.3 | How to restore a user customized echo to the saved settings .....           | 1-63 |
| 1.28.4 | How to restore a user customized echo to the factory default settings ..... | 1-63 |
| 1.28.5 | How to edit the available customized echoes .....                           | 1-64 |
| 1.28.6 | How to change the name of a customization (C-types only) .....              | 1-64 |
| 1.28.7 | How to link the customization with a range (C-types only) .....             | 1-65 |
| 1.29   | How to Reject Second-trace Echoes .....                                     | 1-66 |
| 1.30   | Orientation Modes .....                                                     | 1-67 |
| 1.30.1 | How to select an presentation mode .....                                    | 1-67 |
| 1.30.2 | Description of presentation modes .....                                     | 1-67 |
| 1.31   | How to Select a Range Scale .....                                           | 1-69 |
| 1.32   | How to Measure Range .....                                                  | 1-70 |
| 1.32.1 | How to show/hide the range rings .....                                      | 1-70 |
| 1.32.2 | How to measure range with the variable range marker (VRM) .....             | 1-70 |
| 1.32.3 | How to set the VRM unit of measurement (C-types only) .....                 | 1-72 |
| 1.32.4 | How to set the short distance measurement unit (C-types only) .....         | 1-72 |
| 1.32.5 | How to show TTG to VRM .....                                                | 1-73 |
| 1.33   | How to Measure Bearing .....                                                | 1-73 |
| 1.33.1 | Methods to measure bearing .....                                            | 1-74 |
| 1.33.2 | True or relative bearing .....                                              | 1-75 |
| 1.34   | Collision Assessment by Offset EBL .....                                    | 1-76 |
| 1.34.1 | How to assess risk of collision using the offset EBL .....                  | 1-76 |
| 1.34.2 | How to set the origin point reference for EBL OFFSET .....                  | 1-77 |
| 1.35   | How to Measure Range and Bearing Between Two Targets .....                  | 1-78 |
| 1.36   | How to Off-Center the Display .....                                         | 1-81 |
| 1.36.1 | How to off-center the display from the control unit (RCU-014/RCU-031) ....  | 1-81 |
| 1.36.2 | How to off-center the display from the on-screen menu .....                 | 1-82 |
| 1.37   | Target Trails .....                                                         | 1-82 |
| 1.37.1 | True or relative trails .....                                               | 1-82 |
| 1.37.2 | Trail time .....                                                            | 1-84 |
| 1.37.3 | Trail gradation .....                                                       | 1-85 |

|         |                                                                                |       |
|---------|--------------------------------------------------------------------------------|-------|
| 1.37.4  | Trail level .....                                                              | 1-85  |
| 1.37.5  | Narrow trails (C-type only).....                                               | 1-86  |
| 1.37.6  | How to hide the trails temporarily .....                                       | 1-86  |
| 1.37.7  | Trail stabilization in true motion.....                                        | 1-86  |
| 1.37.8  | How to erase/restart trails .....                                              | 1-87  |
| 1.37.9  | How to prevent sea clutter in true trails .....                                | 1-87  |
| 1.37.10 | How to show/hide OS trails .....                                               | 1-88  |
| 1.37.11 | How to show/hide land trails (C-type only) .....                               | 1-88  |
| 1.37.12 | How to set the trail length (C-type only) .....                                | 1-89  |
| 1.37.13 | How to set the trail color (C-type only) .....                                 | 1-89  |
| 1.37.14 | How to remove the colors from a section of a multicolor trail (C-type only) .. | 1-90  |
| 1.37.15 | How to offset the colors for multicolored trail (C-type only) .....            | 1-91  |
| 1.38    | Target Analyzer (C-type only).....                                             | 1-92  |
| 1.38.1  | How to activate/deactivate the target analyzer.....                            | 1-93  |
| 1.39    | Target Alarm.....                                                              | 1-94  |
| 1.39.1  | How to set a target alarm .....                                                | 1-94  |
| 1.39.2  | How to mute the target alarm .....                                             | 1-95  |
| 1.39.3  | How to deactivate a target alarm.....                                          | 1-95  |
| 1.39.4  | How to change target alarm attributes .....                                    | 1-95  |
| 1.40    | PI (Parallel Index) Lines .....                                                | 1-96  |
| 1.40.1  | How to show/hide the PI lines .....                                            | 1-96  |
| 1.40.2  | How to set the maximum number of lines to display .....                        | 1-96  |
| 1.40.3  | How to change PI line bearing and interval.....                                | 1-97  |
| 1.40.4  | How to change the PI line bearing reference (C-type only).....                 | 1-97  |
| 1.40.5  | How to change the PI line orientation.....                                     | 1-98  |
| 1.40.6  | How to reset the PI lines to default (ship's heading) .....                    | 1-98  |
| 1.40.7  | How to change PI line length.....                                              | 1-99  |
| 1.40.8  | How to change the PI line color (C-types only) .....                           | 1-99  |
| 1.41    | How to Use the Net (Diamond) Cursor (C-type only) .....                        | 1-100 |
| 1.41.1  | How to activate the net cursor .....                                           | 1-100 |
| 1.41.2  | How to set the net cursor dimensions and orientation .....                     | 1-101 |
| 1.42    | Circle Cursor (C-types only) .....                                             | 1-102 |
| 1.43    | Zoom .....                                                                     | 1-103 |
| 1.44    | How to Use Marks .....                                                         | 1-104 |
| 1.44.1  | Heading line mark .....                                                        | 1-104 |
| 1.44.2  | How to hide/show the stern mark .....                                          | 1-105 |
| 1.44.3  | North mark.....                                                                | 1-105 |
| 1.44.4  | Bearing ring .....                                                             | 1-106 |
| 1.44.5  | How to set up the own ship mark .....                                          | 1-107 |
| 1.44.6  | How to set the barge marker .....                                              | 1-107 |
| 1.44.7  | Antenna mark .....                                                             | 1-108 |
| 1.45    | Drop Mark.....                                                                 | 1-108 |
| 1.45.1  | How to inscribe a drop mark.....                                               | 1-109 |
| 1.45.2  | How to erase drop marks .....                                                  | 1-109 |
| 1.46    | Brilliance and Color Schemes .....                                             | 1-109 |
| 1.46.1  | How to select a brilliance and color scheme .....                              | 1-109 |
| 1.46.2  | How to change the color schemes settings.....                                  | 1-110 |
| 1.46.3  | How to change the color schemes settings.....                                  | 1-111 |
| 1.47    | How to Display and Set Up Navigational Data .....                              | 1-112 |
| 1.47.1  | How to set up the navigational data .....                                      | 1-112 |
| 1.47.2  | How to display navigational data .....                                         | 1-113 |
| 1.48    | How to Use the Information Box.....                                            | 1-113 |
| 1.49    | Interswitch .....                                                              | 1-116 |
| 1.49.1  | How to display antenna information .....                                       | 1-116 |
| 1.49.2  | How to preset antenna and display combinations.....                            | 1-117 |
| 1.49.3  | How to clear the interswitch .....                                             | 1-119 |

## TABLE OF CONTENTS

|           |                                                               |            |
|-----------|---------------------------------------------------------------|------------|
| 1.50      | Performance Monitor.....                                      | 1-119      |
| 1.50.1    | How to activate/deactivate the performance monitor .....      | 1-119      |
| 1.50.2    | How to check the radar's performance .....                    | 1-121      |
| 1.51      | How to Change the Reference Position .....                    | 1-122      |
| 1.52      | Anchor Watch.....                                             | 1-123      |
| 1.53      | Alerts.....                                                   | 1-124      |
| 1.53.1    | What is an alert? .....                                       | 1-124      |
| 1.53.2    | Alert box overview.....                                       | 1-125      |
| 1.53.3    | How to silence the buzzer.....                                | 1-125      |
| 1.53.4    | How to acknowledge an alert.....                              | 1-125      |
| 1.53.5    | Alert list .....                                              | 1-126      |
| 1.53.6    | Alert icons and their meanings.....                           | 1-127      |
| 1.54      | Icing Prevention .....                                        | 1-128      |
| 1.55      | How to Select an Echo Display Area (C-type Only) .....        | 1-129      |
| 1.56      | How to Use the Watch Alert.....                               | 1-129      |
| 1.57      | Loran Decca Setup (C-types Only) .....                        | 1-130      |
| 1.58      | How to Manage SD Card Data.....                               | 1-132      |
| 1.58.1    | Formatting the SD card.....                                   | 1-132      |
| 1.58.2    | Cautionary notes on handling SD cards.....                    | 1-132      |
| 1.58.3    | Compatible SD cards .....                                     | 1-132      |
| 1.58.4    | How to insert SD cards .....                                  | 1-133      |
| 1.58.5    | How to remove SD cards .....                                  | 1-133      |
| 1.58.6    | How to save data to an SD card (IMO-types only).....          | 1-134      |
| 1.58.7    | How to read (load) data from an SD card (IMO-types only)..... | 1-134      |
| 1.58.8    | How to delete data from an SD card (IMO-types only) .....     | 1-134      |
| 1.59      | Internal Memory (C-types only).....                           | 1-135      |
| 1.59.1    | How to save data to the internal memory.....                  | 1-135      |
| 1.59.2    | How to view the contents of the internal memory .....         | 1-137      |
| 1.59.3    | How to load the contents of the internal memory.....          | 1-138      |
| 1.59.4    | How to delete the contents of the internal memory.....        | 1-139      |
| 1.59.5    | How to backup data in the internal memory.....                | 1-140      |
| 1.59.6    | How to load backup data from the internal memory.....         | 1-141      |
| 1.60      | USB Flash Memory (C-types only).....                          | 1-142      |
| 1.60.1    | USB Flash memory connection.....                              | 1-142      |
| 1.60.2    | How to remove the USB flash memory safely.....                | 1-142      |
| 1.60.3    | How to save data to the USB flash memory .....                | 1-143      |
| 1.60.4    | How to load data from the USB memory.....                     | 1-144      |
| 1.60.5    | How to transfer USB data to the internal memory.....          | 1-146      |
| 1.60.6    | How to save the backup data to the USB flash memory.....      | 1-147      |
| 1.60.7    | How to load backup data from the USB flash memory .....       | 1-148      |
| 1.60.8    | How to import data from other equipment.....                  | 1-148      |
| 1.61      | How to Take a Screenshot.....                                 | 1-150      |
| <b>2.</b> | <b>RADAR OBSERVATION .....</b>                                | <b>2-1</b> |
| 2.1       | General .....                                                 | 2-1        |
| 2.1.1     | Minimum range .....                                           | 2-1        |
| 2.1.2     | Maximum range .....                                           | 2-1        |
| 2.1.3     | X-band and S-band.....                                        | 2-2        |
| 2.1.4     | Radar resolution.....                                         | 2-2        |
| 2.1.5     | Bearing accuracy .....                                        | 2-3        |
| 2.1.6     | Range measurement.....                                        | 2-3        |
| 2.2       | False Echoes .....                                            | 2-3        |
| 2.3       | SART (Search and Rescue Transponder) .....                    | 2-5        |
| 2.3.1     | SART description .....                                        | 2-5        |
| 2.3.2     | How to show SART marks on the radar display.....              | 2-6        |
| 2.3.3     | General remarks on receiving SARTs.....                       | 2-6        |

|           |                                                                           |            |
|-----------|---------------------------------------------------------------------------|------------|
| 2.4       | RACON.....                                                                | 2-7        |
| 2.5       | Radar Target Enhancer (RTE) .....                                         | 2-7        |
| 2.6       | Solid state radar .....                                                   | 2-8        |
| <b>3.</b> | <b>TARGET TRACKING (TT).....</b>                                          | <b>3-1</b> |
| 3.1       | Precautions when Using Target Tracking.....                               | 3-1        |
| 3.2       | TT Controls.....                                                          | 3-2        |
| 3.3       | How to Show/Hide the TT Symbols.....                                      | 3-2        |
| 3.4       | How to Select the TT mode.....                                            | 3-3        |
| 3.4.1     | How to setup the acquisition method .....                                 | 3-3        |
| 3.4.2     | How to manually acquire targets .....                                     | 3-4        |
| 3.4.3     | How to automatically acquire targets .....                                | 3-4        |
| 3.5       | How to Enter Own Ship Speed.....                                          | 3-5        |
| 3.5.1     | Echo-referenced speed input .....                                         | 3-5        |
| 3.6       | How to Cancel Target Tracking.....                                        | 3-7        |
| 3.6.1     | How to cancel tracking for individual TT targets.....                     | 3-7        |
| 3.6.2     | How to cancel tracking for all TT targets .....                           | 3-7        |
| 3.7       | Lost Target .....                                                         | 3-8        |
| 3.7.1     | How to set the lost target filter.....                                    | 3-8        |
| 3.7.2     | How to enable/disable the lost target alert .....                         | 3-8        |
| 3.8       | TT Symbols and Attributes .....                                           | 3-9        |
| 3.8.1     | How to adjust symbol brilliance .....                                     | 3-9        |
| 3.8.2     | How to set the symbol color .....                                         | 3-9        |
| 3.8.3     | How to set the symbol size (C-types only) .....                           | 3-10       |
| 3.8.4     | How to select a TT symbol (C-type only) .....                             | 3-10       |
| 3.8.5     | How to change the attributes for a TT symbol preset.....                  | 3-11       |
| 3.9       | How to Display/Remove Target Data .....                                   | 3-13       |
| 3.9.1     | TT pop up information .....                                               | 3-13       |
| 3.9.2     | How to show target data in the data display area .....                    | 3-14       |
| 3.9.3     | How to display, hide and sort the target list.....                        | 3-15       |
| 3.10      | Vector Modes .....                                                        | 3-17       |
| 3.10.1    | Description of vectors.....                                               | 3-17       |
| 3.10.2    | Vector mode and vector length .....                                       | 3-19       |
| 3.10.3    | How to change the vector appearance (C-types only) .....                  | 3-19       |
| 3.11      | Past Position Display.....                                                | 3-20       |
| 3.11.1    | How to display past position points and select the plotting interval..... | 3-20       |
| 3.11.2    | How to select the number of past position points to be displayed.....     | 3-20       |
| 3.11.3    | How to change the color of TT tracks (C-types only) .....                 | 3-21       |
| 3.12      | Set and Drift.....                                                        | 3-21       |
| 3.13      | Collision Alarm (CPA, TCPA) .....                                         | 3-22       |
| 3.13.1    | How to set the CPA and TCPA ranges .....                                  | 3-22       |
| 3.13.2    | How to acknowledge the TT collision alarm .....                           | 3-23       |
| 3.14      | Acquisition Zone .....                                                    | 3-23       |
| 3.14.1    | How to enable the acquisition zones.....                                  | 3-23       |
| 3.14.2    | How to activate the first acquisition zone (AZ1) .....                    | 3-24       |
| 3.14.3    | How to set a polygon acquisition zone (AZ2).....                          | 3-24       |
| 3.14.4    | How to sleep/deactivate an acquisition zone .....                         | 3-25       |
| 3.14.5    | How to acknowledge the acquisition zone alert .....                       | 3-25       |
| 3.14.6    | How to select the target type to acquire (C-types only).....              | 3-25       |
| 3.14.7    | How to change the acquisition zone reference .....                        | 3-25       |
| 3.14.8    | How to set acquisition zone shape and stabilization .....                 | 3-26       |
| 3.15      | Trial Maneuvers (IMO-types only) .....                                    | 3-27       |
| 3.15.1    | Types of trial maneuvers .....                                            | 3-27       |
| 3.15.2    | How to perform a trial maneuver .....                                     | 3-28       |
| 3.15.3    | How to stop the trial maneuver.....                                       | 3-30       |
| 3.16      | TT System Messages.....                                                   | 3-31       |

## TABLE OF CONTENTS

|           |                                                                            |            |
|-----------|----------------------------------------------------------------------------|------------|
| 3.17      | TT Simulation Mode .....                                                   | 3-32       |
| 3.18      | Criteria for Tracking Target Selection .....                               | 3-33       |
| 3.19      | Factors Affecting Target Tracking .....                                    | 3-34       |
| <b>4.</b> | <b>AIS OPERATION .....</b>                                                 | <b>4-1</b> |
| 4.1       | Controls for AIS .....                                                     | 4-2        |
| 4.2       | How to Select the AIS Display Mode .....                                   | 4-3        |
| 4.3       | AIS Symbols and Their Meanings .....                                       | 4-3        |
| 4.4       | How to Use the AIS Display Filter .....                                    | 4-4        |
| 4.5       | How to Activate AIS Targets .....                                          | 4-5        |
| 4.5.1     | How to activate specific targets manually .....                            | 4-5        |
| 4.5.2     | How to set the AIS auto activate function .....                            | 4-6        |
| 4.6       | How to Sleep AIS Targets .....                                             | 4-7        |
| 4.6.1     | How to sleep individual AIS targets .....                                  | 4-7        |
| 4.6.2     | How to sleep all AIS targets .....                                         | 4-8        |
| 4.7       | How to Set Up For a Voyage .....                                           | 4-8        |
| 4.7.1     | How to access the [VOYAGE DATA] menu .....                                 | 4-8        |
| 4.8       | How to Display AIS Target Data .....                                       | 4-10       |
| 4.8.1     | AIS pop-up information .....                                               | 4-10       |
| 4.8.2     | How to display basic AIS target data .....                                 | 4-11       |
| 4.8.3     | How to display expanded AIS target data .....                              | 4-12       |
| 4.8.4     | How to remove target data from the display area .....                      | 4-12       |
| 4.9       | How to Change AIS Symbol Attributes .....                                  | 4-13       |
| 4.9.1     | How to adjust the AIS symbol brilliance .....                              | 4-13       |
| 4.9.2     | How to change the color of the AIS symbol .....                            | 4-13       |
| 4.9.3     | How to change the color of the ATON symbol .....                           | 4-14       |
| 4.9.4     | How to change the size of the AIS symbol .....                             | 4-14       |
| 4.9.5     | How to customize the AIS symbol display (C-types only) .....               | 4-14       |
| 4.9.6     | How to edit or remove AIS customizations (C-types only) .....              | 4-15       |
| 4.9.7     | How to show/hide the customized AIS name (C-types only) .....              | 4-16       |
| 4.10      | Past Position Display .....                                                | 4-16       |
| 4.10.1    | How to display past position points and select the plotting interval ..... | 4-16       |
| 4.10.2    | How to select the number of past position points to be displayed .....     | 4-17       |
| 4.10.3    | Past position display orientation .....                                    | 4-17       |
| 4.10.4    | Stabilization in true motion .....                                         | 4-17       |
| 4.10.5    | How to set the AIS track color (C-types only) .....                        | 4-17       |
| 4.11      | Lost Target .....                                                          | 4-18       |
| 4.11.1    | How to set the lost target filter .....                                    | 4-18       |
| 4.11.2    | How to enable/disable the lost target alert .....                          | 4-19       |
| 4.12      | ROT Setting .....                                                          | 4-19       |
| 4.13      | AIS Collision Alarm (CPA, TCPA) .....                                      | 4-20       |
| 4.13.1    | How to set CPA and TCPA .....                                              | 4-20       |
| 4.14      | How to Associate TT and AIS Targets .....                                  | 4-21       |
| 4.15      | How to View Own Ship Data .....                                            | 4-23       |
| 4.16      | How to Use AIS Messages .....                                              | 4-24       |
| 4.16.1    | How to create and save messages .....                                      | 4-24       |
| 4.16.2    | How to transmit messages .....                                             | 4-25       |
| 4.16.3    | How to view messages .....                                                 | 4-26       |
| 4.16.4    | How to set up the AIS message notification .....                           | 4-26       |
| 4.16.5    | How to display AIS alert messages .....                                    | 4-27       |
| 4.17      | AIS System Messages .....                                                  | 4-27       |
| <b>5.</b> | <b>PLOTTER OPERATION (IMO-TYPES) .....</b>                                 | <b>5-1</b> |
| 5.1       | Orientation Modes .....                                                    | 5-1        |
| 5.2       | How to Select a Mark Type .....                                            | 5-1        |
| 5.3       | How to Select the Mark Inscription Position .....                          | 5-2        |

|           |                                                         |            |
|-----------|---------------------------------------------------------|------------|
| 5.4       | Radar Map.....                                          | 5-3        |
| 5.4.1     | How to show/hide the radar map.....                     | 5-3        |
| 5.4.2     | How to inscribe marks.....                              | 5-3        |
| 5.4.3     | How to delete marks.....                                | 5-5        |
| 5.4.4     | How to align the radar map.....                         | 5-6        |
| 5.5       | Origin Mark.....                                        | 5-7        |
| 5.5.1     | How to inscribe origin marks.....                       | 5-7        |
| 5.5.2     | How to set origin mark stabilization.....               | 5-8        |
| 5.5.3     | How to delete origin marks.....                         | 5-8        |
| 5.6       | How to Change the Shape of the Own Ship Mark.....       | 5-9        |
| 5.7       | How to Use ECDIS Chart Marks.....                       | 5-10       |
| 5.8       | Own Ship Track.....                                     | 5-11       |
| 5.8.1     | How to show/hide tracks.....                            | 5-11       |
| 5.8.2     | How to set the plotting interval.....                   | 5-12       |
| 5.8.3     | How to delete tracks.....                               | 5-12       |
| 5.9       | How to Use Waypoints.....                               | 5-13       |
| 5.9.1     | How to set the data source for waypoints.....           | 5-13       |
| 5.9.2     | How to enter waypoints.....                             | 5-13       |
| 5.9.3     | How to edit waypoints.....                              | 5-14       |
| 5.9.4     | How to erase waypoints.....                             | 5-15       |
| 5.9.5     | How to display the waypoint list.....                   | 5-16       |
| 5.9.6     | How to show/hide the waypoint name/number.....          | 5-16       |
| 5.10      | Routes.....                                             | 5-17       |
| 5.10.1    | How to set/edit an internal route.....                  | 5-17       |
| 5.10.2    | How to display routes.....                              | 5-18       |
| 5.10.3    | How to skip a waypoint.....                             | 5-18       |
| 5.10.4    | How to set the route width.....                         | 5-19       |
| 5.10.5    | How to show/hide the turning line.....                  | 5-19       |
| 5.10.6    | How to use the waypoint arrival distance function.....  | 5-20       |
| 5.10.7    | How to delete internal routes.....                      | 5-20       |
| 5.10.8    | How to view the routes list.....                        | 5-21       |
| 5.11      | How to Show/Hide Grid Lines.....                        | 5-21       |
| <b>6.</b> | <b>PLOTTER OPERATION (C-TYPES) .....</b>                | <b>6-1</b> |
| 6.1       | Tracks.....                                             | 6-1        |
| 6.1.1     | Symbols.....                                            | 6-1        |
| 6.1.2     | How to show/hide ships' tracks.....                     | 6-3        |
| 6.1.3     | How to set own ship track recording.....                | 6-5        |
| 6.1.4     | How to stop and re-start tracks.....                    | 6-6        |
| 6.1.5     | How to change track color.....                          | 6-6        |
| 6.1.6     | How to show/hide own track based on color.....          | 6-11       |
| 6.1.7     | How to change the track line.....                       | 6-12       |
| 6.1.8     | How to set tracks recording method and interval.....    | 6-13       |
| 6.1.9     | How to delete own ship tracks.....                      | 6-14       |
| 6.1.10    | How to edit own ship's tracks.....                      | 6-16       |
| 6.1.11    | How to view information for consorts and GPS buoys..... | 6-17       |
| 6.1.12    | How to delete other ship's tracks.....                  | 6-19       |
| 6.2       | Marks.....                                              | 6-20       |
| 6.2.1     | How to set up marks.....                                | 6-20       |
| 6.2.2     | How to enter marks and lines.....                       | 6-22       |
| 6.2.3     | How to delete marks and lines.....                      | 6-26       |
| 6.2.4     | How to edit marks and lines.....                        | 6-28       |
| 6.2.5     | How to view mark and line information.....              | 6-29       |
| 6.2.6     | Mark filter.....                                        | 6-31       |
| 6.3       | Origin Marks.....                                       | 6-36       |
| 6.3.1     | How to set up an origin mark.....                       | 6-36       |

## TABLE OF CONTENTS

|           |                                                               |            |
|-----------|---------------------------------------------------------------|------------|
| 6.3.2     | How to enter an origin mark.....                              | 6-37       |
| 6.3.3     | How to delete origin marks.....                               | 6-38       |
| 6.3.4     | How to set a comment for origin marks.....                    | 6-38       |
| 6.4       | Waypoints .....                                               | 6-39       |
| 6.4.1     | How to create a waypoint.....                                 | 6-39       |
| 6.4.2     | How to edit a waypoint.....                                   | 6-45       |
| 6.4.3     | How to delete a waypoint.....                                 | 6-45       |
| 6.4.4     | How to search for a waypoint.....                             | 6-46       |
| 6.4.5     | How to set the voyage speed for calculations.....             | 6-47       |
| 6.4.6     | How to view waypoint information.....                         | 6-47       |
| 6.4.7     | How to change the on-screen size of waypoint indications..... | 6-48       |
| 6.4.8     | How to change the way waypoint names are displayed .....      | 6-48       |
| 6.4.9     | How to use external waypoints .....                           | 6-49       |
| 6.5       | Routes.....                                                   | 6-50       |
| 6.5.1     | How to create a route.....                                    | 6-50       |
| 6.5.2     | How to edit a route .....                                     | 6-54       |
| 6.5.3     | How to delete a route .....                                   | 6-55       |
| 6.5.4     | How to search for a route.....                                | 6-55       |
| 6.5.5     | How to set the voyage speed for calculations.....             | 6-56       |
| 6.5.6     | How to use external routes .....                              | 6-56       |
| 6.6       | Destinations .....                                            | 6-57       |
| 6.6.1     | How to set up GOTO points.....                                | 6-57       |
| 6.6.2     | How to set a waypoint as a destination.....                   | 6-59       |
| 6.6.3     | How to set a route as a destination.....                      | 6-61       |
| 6.6.4     | How to set up the waypoint data display.....                  | 6-64       |
| 6.6.5     | How to stop navigation to a destination .....                 | 6-65       |
| 6.7       | Plotter-related alerts.....                                   | 6-65       |
| 6.7.1     | How to set waypoint arrival/departure alerts.....             | 6-65       |
| 6.7.2     | How to set mid-route alerts .....                             | 6-66       |
| 6.7.3     | How to set XTE/border route alerts.....                       | 6-67       |
| 6.7.4     | How to active/deactivate intrusion alerts.....                | 6-68       |
| 6.7.5     | How to set temperature alerts .....                           | 6-68       |
| 6.7.6     | How to set sheer alerts .....                                 | 6-69       |
| 6.7.7     | How to set depth alerts .....                                 | 6-69       |
| 6.8       | Chart Functions.....                                          | 6-70       |
| 6.8.1     | How to show/hide the chart.....                               | 6-70       |
| 6.8.2     | How to align the chart position .....                         | 6-71       |
| 6.8.3     | How to select the chart type.....                             | 6-72       |
| 6.8.4     | Chart settings menu .....                                     | 6-73       |
| 6.8.5     | How to show/hide land mass emphasis.....                      | 6-74       |
| 6.8.6     | How to set up depth lines.....                                | 6-75       |
| 6.8.7     | How to display detailed depth lines.....                      | 6-76       |
| 6.8.8     | How to check your charts/symbol versions.....                 | 6-77       |
| 6.9       | Grid Lines.....                                               | 6-77       |
| <b>7.</b> | <b>MAINTENANCE, TROUBLESHOOTING.....</b>                      | <b>7-1</b> |
| 7.1       | Periodic Maintenance Schedule.....                            | 7-2        |
| 7.2       | How to Replace the Fuse.....                                  | 7-3        |
| 7.3       | Life Expectancy of Major Parts .....                          | 7-4        |
| 7.4       | Trackball Maintenance .....                                   | 7-4        |
| 7.5       | Easy Troubleshooting .....                                    | 7-5        |
| 7.6       | Advanced-level Troubleshooting.....                           | 7-6        |
| 7.7       | Diagnostics.....                                              | 7-8        |
| 7.8       | Sentence Monitor .....                                        | 7-13       |
| 7.9       | Fallback Arrangements .....                                   | 7-15       |

|                                                              |                 |
|--------------------------------------------------------------|-----------------|
| <b>APPENDIX 1 MENU TREE .....</b>                            | <b>AP-1</b>     |
| <b>APPENDIX 2 LONGITUDE ERROR TABLE (96 NM SCALE) .....</b>  | <b>AP-15</b>    |
| <b>APPENDIX 3 ALERT CODES, MESSAGES &amp; MEANINGS .....</b> | <b>AP-17</b>    |
| <b>APPENDIX 4 DATA COLOR AND MEANING.....</b>                | <b>AP-26</b>    |
| <b>APPENDIX 5 ABBREVIATIONS.....</b>                         | <b>AP-27</b>    |
| <b>APPENDIX 6 SYMBOLS.....</b>                               | <b>AP-32</b>    |
| <b>APPENDIX 7 PARTS LOCATION .....</b>                       | <b>AP-37</b>    |
| <b>APPENDIX 8 RADIO REGULATORY INFORMATION .....</b>         | <b>AP-47</b>    |
| <br><b>SPECIFICATIONS .....</b>                              | <br><b>SP-1</b> |
| <br><b>INDEX .....</b>                                       | <br><b>IN-1</b> |

# FOREWORD

## A Word to the Owner of FAR-22x8/23x8 Series Marine Radar

Congratulations on your choice of the FURUNO FAR-22x8/FAR-23x8 series of radars. We are confident you will see why FURUNO has become synonymous with quality and reliability.

Since 1948, FURUNO Electric Company has enjoyed an enviable reputation for innovative and dependable marine electronics equipment. This dedication to excellence is furthered by our extensive global network of agents and dealers.

Your radar is designed and constructed to meet the rigorous demands of the marine environment. However, no machine can perform its intended function unless installed, operated and maintained properly. Please carefully read and follow the recommended procedures for operation and maintenance. We would appreciate hearing from you, the end-user, about whether we are achieving our goal.

Thank you for considering and purchasing FURUNO equipment.

### Features

- The FAR-2xx8 series consists of the following models and configurations:

#### Magnetron radar

| Model        | Frequency band | Size of monitor unit* | Output power | Transceiver location |
|--------------|----------------|-----------------------|--------------|----------------------|
| FAR-2218     | X-band         | 19.0"                 | 12 kW        | Antenna unit         |
| FAR-2218-BB  |                | Local supply          | 12 kW        |                      |
| FAR-2318     |                | 23.1"/27"             | 12 kW        |                      |
| FAR-2228     |                | 19.0"                 | 25 kW        |                      |
| FAR-2228-BB  |                | Local supply          | 25 kW        |                      |
| FAR-2328     |                | 23.1"/27"             | 12 kW        |                      |
| FAR-2258     |                | Local supply          | 50 kW        |                      |
| FAR-2238S    | S-band         | 19.0"                 | 30 kW        | Antenna unit         |
| FAR-2238S-BB |                | Local supply          | 30 kW        |                      |
| FAR-2338S    |                | 23.1"/27"             | 30 kW        |                      |
| FAR-2268DS   |                | Local supply          | 60 kW        |                      |

#### Solid state radar

| Model            | Frequency band | Size of monitor unit* | Output power | Transceiver location |
|------------------|----------------|-----------------------|--------------|----------------------|
| FAR-2238S-NXT    | S-band         | 19.0"                 | 250 W        | Antenna unit         |
| FAR-2238S-NXT-BB |                | Local supply          | 250 W        | Antenna unit         |
| FAR-2338S-NXT    |                | 23.1"/27"             | 250 W        | Antenna unit         |

\*: Viewing distances are as follows: MU-190/MU-270W: 1020 mm; MU-231: 1200 mm.

- Two methods of operation are available: RCU-014/RCU-031 (standard supply control unit) and RCU-015/RCU-016 (optional trackball unit). The ergonomically designed palm rest on the RCU-015/RCU-016 makes them easy to use.
- Simple operation with "point-and-click" menu functionality.
- All functions can be accessed using only the trackball unit.

- TT, AIS\*, Radar Map and Interswitch are supplied as standard.  
\*: Requires connection to a compatible AIS transponder.
- FURUNO's unique Target Analyzer function helps to find targets in high noise areas (rain/snow), or where there is interference from surface reflections (C-types only).
- The Automatic Clutter Elimination (ACE) function detects sea and rain clutter from received echoes' and automatically reduces sea and rain clutter accordingly.
- Targets activate the user-set alarm/acquisition zone when entering or exiting the zone.
- CPA/TCPA alarms.
- Radar screen can be overlaid with the chart display (C-types only).
- Full plotter functionality (C-types only).
- The FAR-2xx8 series complies with MED 2014/90/EU\* and also the following directives: IEC62388, IEC 62288, IMO MSC. 192(79)\*.  
\*: Excludes FAR-2258 and FAR-2268DS.

## Radar Type and Function Availability

The software for advanced fishing specifications is available in two specification types, and function availability depends on specification type. The table below shows the function that have limited availability. This manual provides descriptions for all functions of this radar series, and we have endeavored to denote in the text those functions that have limited availability. For detailed information on the function availability, see the menu tree at the back of this manual.

### Type abbreviations and their meanings

- IMO: Meets the IMO requirements and is compliant with IMO regulations
- C: Advanced fishing specifications

### Function availability and specification type

| Function                      | Type        |                                                               |
|-------------------------------|-------------|---------------------------------------------------------------|
|                               | IMO         | C                                                             |
| Echo area configuration       | No          | Yes                                                           |
| Target Analyzer               | No          | Yes                                                           |
| Customized echo - assign name | No          | Yes                                                           |
| Trails - 5-step gradation     | No          | Yes                                                           |
| Trail Eraser                  | No          | Yes                                                           |
| Trails - Long                 | No          | Yes                                                           |
| Trails - Hide                 | No          | Yes                                                           |
| Trails - Narrow               | No          | Yes                                                           |
| Trails - Color                | No          | Yes                                                           |
| Echo Average level 4          | No          | Yes                                                           |
| True view                     | No          | Yes                                                           |
| Marks - No. available         | Max. 20,000 | Max. 30,000                                                   |
| Area Marks                    | No          | Max. 50                                                       |
| ECDIS marks                   | Yes         | No                                                            |
| Marks filter                  | No          | Yes                                                           |
| Mark information display      | No          | Yes                                                           |
| Mark comment display          | No          | Yes                                                           |
| Own track - Points            | Max. 20,000 | Memory capacity: Max. 30,000<br>Display capacity: Max. 10,000 |
| Own track - Edit              | No          | Yes                                                           |

| Function                                                                               | Type                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                        | IMO                                                                                   | C                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Own track - Color                                                                      | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Own track - Stop/start plotting                                                        | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Own track - Save intervals                                                             | [OFF], [DRAW ONLY]<br>with intervals of 10s, 30s,<br>1min, 2min, 3min, 6min,<br>15min | [OFF], [TRACK INTERVAL 1],<br>[TRACK INTERVAL 2] with time<br>intervals of 0s to 59m59s or dis-<br>tance intervals of 0NM to 9.99NM.                                                                                                                                                                                                                                                                                 |
| Other tracks - Points                                                                  | No                                                                                    | <ul style="list-style-type: none"> <li>• TT targets:<br/>Memory capacity: Max. 100,000<br/>Display capacity: Max. 10,000</li> <li>• AIS targets:<br/>Memory capacity: Max. 10,000<br/>Display capacity: Max. 10,000</li> <li>• Consort vessels:<br/>Memory capacity: Max. 10,000<br/>Display capacity: Max. 1,000</li> <li>• GPS buoys:<br/>Memory capacity: Max. 10,000<br/>Display capacity: Max. 1,000</li> </ul> |
| Other tracks - Edit                                                                    | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Other tracks - Stop/start plotting                                                     | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Other tracks - Save intervals                                                          | No                                                                                    | [OFF], [TRACK INTERVAL 1],<br>[TRACK INTERVAL 2] with time<br>intervals of 0s to 59m59s or dis-<br>tance intervals of 0NM to 9.99NM.                                                                                                                                                                                                                                                                                 |
| Chart Display                                                                          | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Individual contour line display                                                        | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| WPT - No. of marks                                                                     | Max. 200 (+1 external)                                                                | Max. 3,500 (+100 external)                                                                                                                                                                                                                                                                                                                                                                                           |
| PI lines - No. of lines                                                                | Max. 6                                                                                | Max. 11                                                                                                                                                                                                                                                                                                                                                                                                              |
| PI lines - Mode                                                                        | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| PI lines - Linked to EBL/VRM                                                           | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| PI lines - Color                                                                       | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Range                                                                                  | [0.125], [0.25], [0.5],<br>[0.75], [1.5], [3], [6], [12],<br>[24], [48], [96]         | [0.025]* <sup>1</sup> , [0.05]* <sup>1</sup> , [0.075]* <sup>1</sup> ,<br>[0.1m]* <sup>1</sup> , [0.125]* <sup>2</sup> , [0.25], [0.5],<br>[0.75], [1], [1.5], [2], [3], [4], [6], [8],<br>[12], [16], [24], [32], [48], [96],<br>[120]* <sup>3</sup>                                                                                                                                                                |
| Range unit                                                                             | [NM] only                                                                             | [NM], [SM], [km], [kyd]                                                                                                                                                                                                                                                                                                                                                                                              |
| Range rings - No. available                                                            | Fixed                                                                                 | Max. 6 rings                                                                                                                                                                                                                                                                                                                                                                                                         |
| Range rings - 32 point display                                                         | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| VRM - Unit selection                                                                   | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| VRM - Close distance unit                                                              | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Cursor - Range unit selection                                                          | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Cursor - Size                                                                          | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Cursor - Enlarged information box                                                      | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Cursor - Color                                                                         | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Net Cursor                                                                             | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Circle Cursor                                                                          | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Plotter-related alerts<br>(XTE, arrival, departure, intrusion,<br>temp., sheer, depth) | No                                                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                  |

| Function                                                             | Type                             |         |
|----------------------------------------------------------------------|----------------------------------|---------|
|                                                                      | IMO                              | C       |
| Acquisition zone - Check area around ship                            | No                               | Yes     |
| TT - Symbol selection, symbol color, individual settings for symbols | No                               | Yes     |
| TT - Vector line type                                                | No                               | Yes     |
| TT - Acquisition by target type                                      | No                               | Yes     |
| TT - Lat./Long. data display                                         | No                               | Yes     |
| TT - Display up to 5 targets' data in information area               | No                               | Yes     |
| AIS - Symbol color                                                   | No                               | Yes     |
| GPS buoy display                                                     | No                               | Yes     |
| Consort vessel - display                                             | No                               | Yes     |
| Trial Maneuver                                                       | Yes                              | No      |
| Data import from other equipment                                     | No<br>(File conversion required) | Yes     |
| Magnetic bearing input and display                                   | No                               | Yes     |
| Alternative positioning systems (LO-RAN, DECCA, TOKYO datum)         | No                               | Yes     |
| Date/time display format selection                                   | No                               | Yes     |
| Echoes in multi-color                                                | No                               | Yes     |
| Echoes in amber color                                                | No                               | Yes     |
| Chart/Plotter brilliance adjustment                                  | No                               | Yes     |
| User settings, Pilot settings                                        | Yes                              | No      |
| Shuttle Ferry mode                                                   | Yes                              | No      |
| Simplified screen layout                                             | No                               | Yes     |
| Display Scroll                                                       | No                               | Yes     |
| Customizable [CURSOR] menu                                           | No                               | Yes     |
| Function keys - [CURSOR CENTER/ DISPLAY MODE] function               | No                               | Yes     |
| Show/hide the cursor                                                 | No                               | Yes     |
| Function keys - Assign multiple functions                            | No                               | Yes     |
| Origin marks                                                         | Max. 20                          | Max. 40 |

\*1: Available only when radar is transmitting.

\*2: Not available if using [km/kyd] range units and radar is transmitting.

\*3: Available only when the range unit is set to [NM] or [SM].

**Signal processing functions**

This radar has the signal processing functions listed in the table below.

| Function                      | Description                                                                                                                                                                                                                                                                     | Reference        |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Interference rejector         | Suppresses interference by other radars. Interference received simultaneously from multiple radars may be difficult to reduce.                                                                                                                                                  | See section 1.22 |
| Echo stretch                  | Enlarges target echoes, especially small echoes. Suppress interference, sea clutter and rain clutter before using echo stretch, to prevent enlargement of unwanted echoes.                                                                                                      | See section 1.23 |
| Echo averaging                | The radar samples echoes with each scan. Targets that show a large change with each scan are judged as clutter and are reduced to display only echoes from legitimate targets.                                                                                                  | See section 1.24 |
| Automatic clutter elimination | Discriminates clutter from the radar echo, then reduces the clutter automatically.                                                                                                                                                                                              | See section 1.25 |
| Noise rejector                | Reduces white noise then improves the on-screen S/N ratio by processing the weighted moving average filter for the received echoes in the range direction. Use this function with caution. Weak target echoes may disappear from the screen or the range resolution may worsen. | See section 1.26 |

**Program numbers**

Please access the following URL if you need software information:

[http://www.furuno.com/en/merchant/radar/FAR-22x8\\_23x8/#SoftwareVersion](http://www.furuno.com/en/merchant/radar/FAR-22x8_23x8/#SoftwareVersion)

| System                                              | Program no. | Version no. | Remarks                                                  |
|-----------------------------------------------------|-------------|-------------|----------------------------------------------------------|
| <b>Antenna unit (common to all antennas)</b>        |             |             |                                                          |
| SPU                                                 | 0359281     | 01.xx       | For magnetron radar (other than FAR-2258 and FAR-2268DS) |
| SPU                                                 | 0359286     | 01.xx       | For solid state radar                                    |
| MTR-DRV                                             | 0359293     | 01.xx       |                                                          |
| PM                                                  | 0359296     | 01.xx       |                                                          |
| RF-Converter                                        | 0359302     | 01.xx       | For solid state radar                                    |
| <b>Processor Unit: RPU-025</b>                      |             |             |                                                          |
| MAIN                                                | 0359377     | 50.xx       |                                                          |
| SUB                                                 | 0359380     | 50.xx       |                                                          |
| <b>Control Unit</b>                                 |             |             |                                                          |
| KEY                                                 | 0359385     | 01.xx       | RCU-014/RCU-015/RCU-016                                  |
| KEY                                                 | 0359464     | 01.xx       | RCU-031                                                  |
| <b>Power Supply Unit (FAR-2258/FAR-2268DS only)</b> |             |             |                                                          |
| SPU                                                 | 0359472     | 01.xx       |                                                          |

xx: Denotes minor changes to the software.

### **About the programs used in C-type radars**

- Ubiquitous QuickBoot Copyright© 2015. Ubiquitous Corp. All right reserved.
- Portions of this software are copyright© 2016. The FreeType Project ([www.freetype.org](http://www.freetype.org)). All right reserved.
- This equipment includes GPL2.0, LGPL2.0, Apache, BSD, MIT or other licensed softwares. For further software information, please access the following URL:  
[https://www.furuno.co.jp/en/contact/cnt\\_oss\\_e01.html](https://www.furuno.co.jp/en/contact/cnt_oss_e01.html)

### **Terminology standards used in this manual**

This manual uses the following terminology standards:

| Terminology     | Meaning or usage example                                                                                                                                                                                                                                                                                                                                                   |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Select          | <ul style="list-style-type: none"> <li>• Use the trackball or scrollwheel on the control unit to move the cursor over the item to be “selected”, then left-click.</li> <li>• With a menu open: Press the appropriate menu number.</li> <li>• With the setting/value/menu selected: Spin the scrollwheel to highlight the item to be “selected”, then left-click</li> </ul> |
| Left-click      | Press the left mouse button.                                                                                                                                                                                                                                                                                                                                               |
| Right-click     | Press the right mouse button.                                                                                                                                                                                                                                                                                                                                              |
| Control Unit    | Refers to the RCU-014 Control Unit, unless otherwise specified.                                                                                                                                                                                                                                                                                                            |
| Open the menu.  | Press the <b>MENU</b> key to show the [MENU].                                                                                                                                                                                                                                                                                                                              |
| Close the menu. | Press the <b>MENU</b> key to close the [MENU].                                                                                                                                                                                                                                                                                                                             |

For the sake of brevity, all procedures in this manual use the terms “Open the menu.” and “Close the menu”.

Unless otherwise stated, operations in this manual use the scrollwheel for procedures which require menu selection, or settings changed.

### **CE Declaration**

With regards to CE declarations, please refer to our website ([www.furuno.com](http://www.furuno.com)) for further information about RoHS conformity declarations.

# SYSTEM CONFIGURATION

## NOTICE


For IMO-type radars, interconnected sensors must meet the following type approval requirements.  
For C-type radars, it is recommended that the interconnected sensors meet these requirements:

- Gyrocompass (or equivalent devices) meeting the requirements of the IMO resolution A.424(XI).
- EPFS meeting the requirements of the IMO resolution MSC.112(73).
- SDME meeting the requirements of IMO resolution MSC.96(72).

The radar may be interconnected via HUB-3000 to other FURUNO processing units having approved LAN ports.


## X-band: FAR-2218(-BB)/FAR-2228(-BB)/FAR-2328

**Note:** The footnotes for \*1 to \*11 are listed in "Notes" on page xxiv.

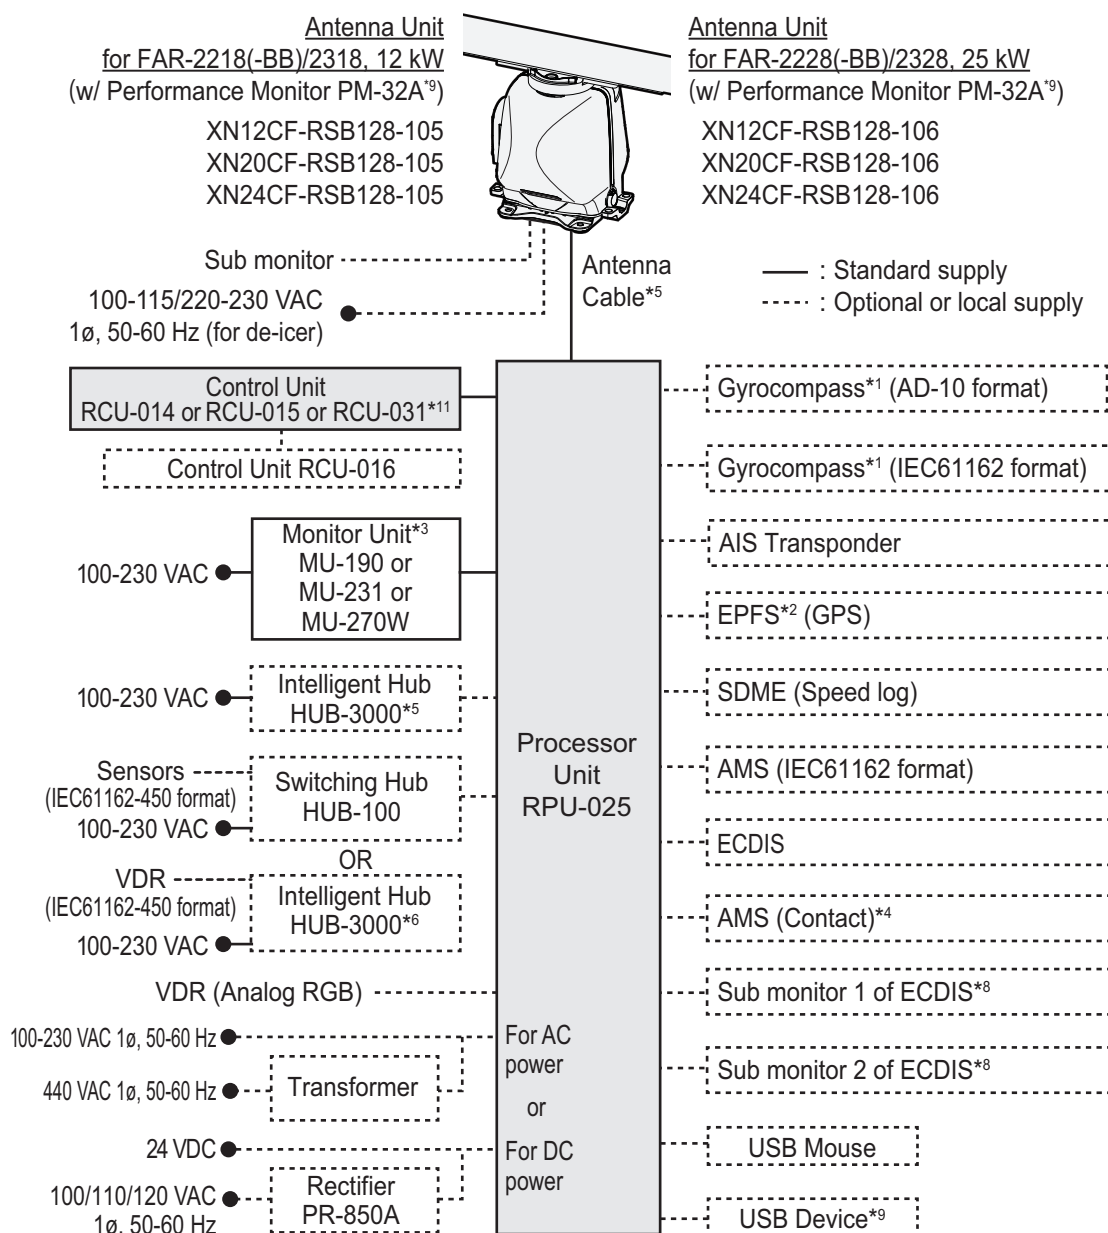


## X-band: FAR-2258

**Note:** The footnotes for \*1 to \*11 are listed in "Notes" on page xxiv.

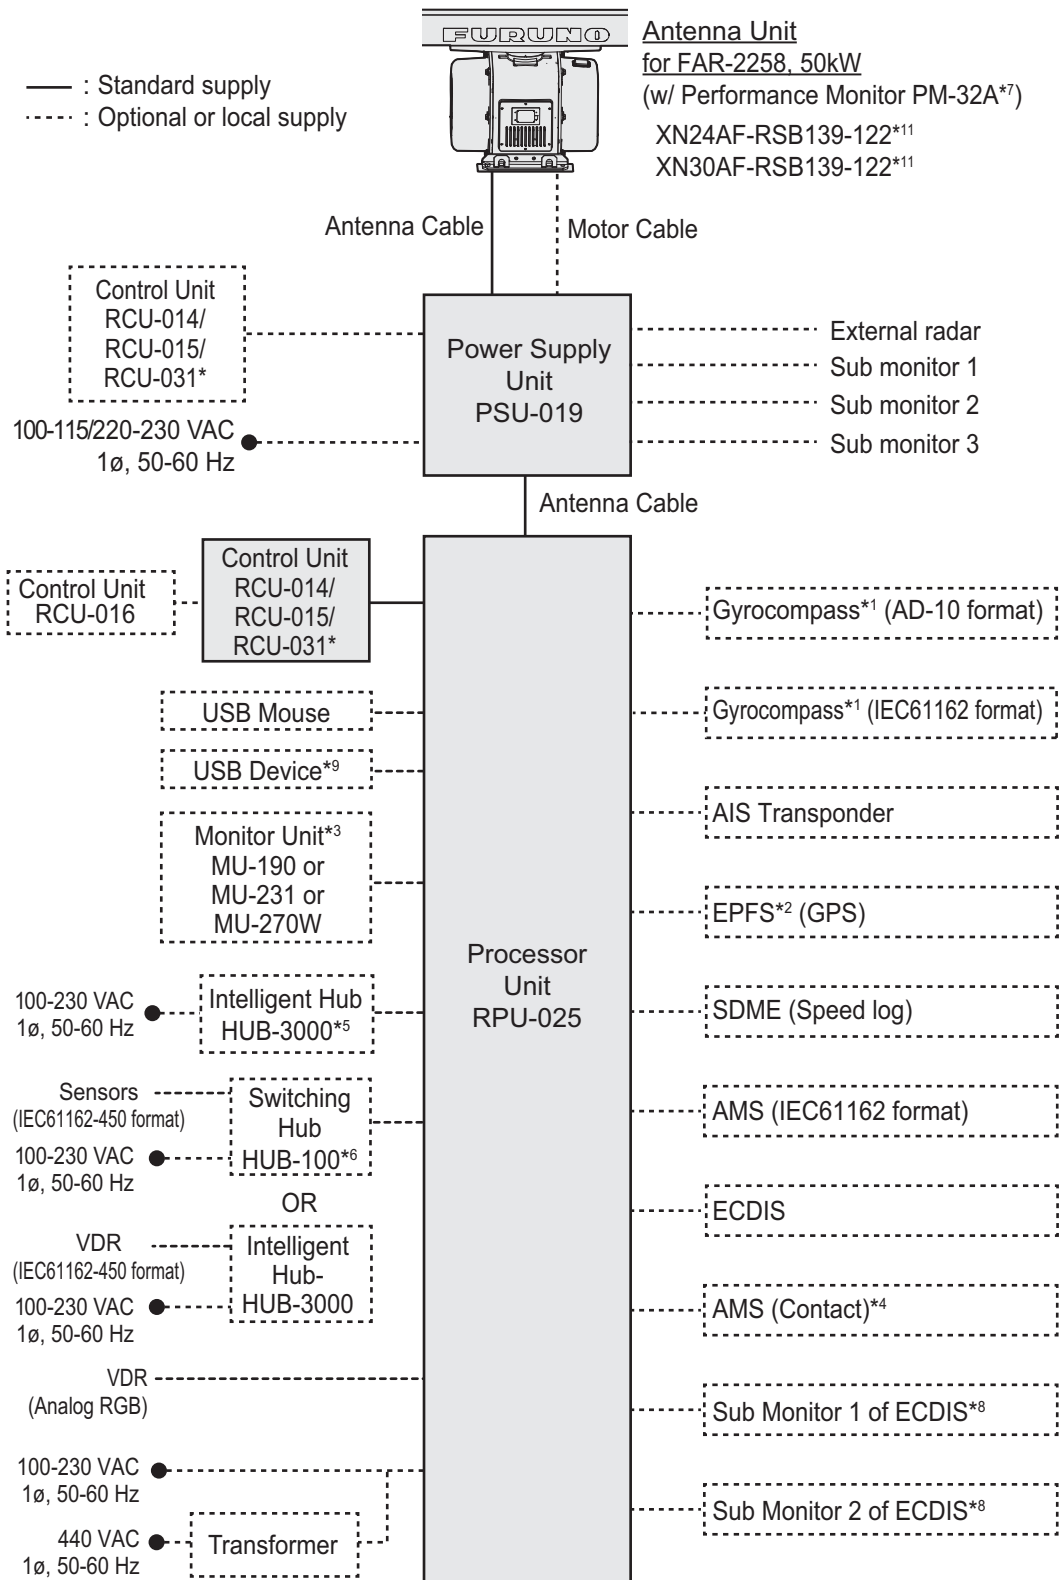


## S-band: FAR-2238S(-BB)/FAR-2338S/FAR2238S-NXT(-BB)/ FAR-2338-NXT

**Note:** The footnotes for \*1 to \*11 are listed in "Notes" on page xxiv.

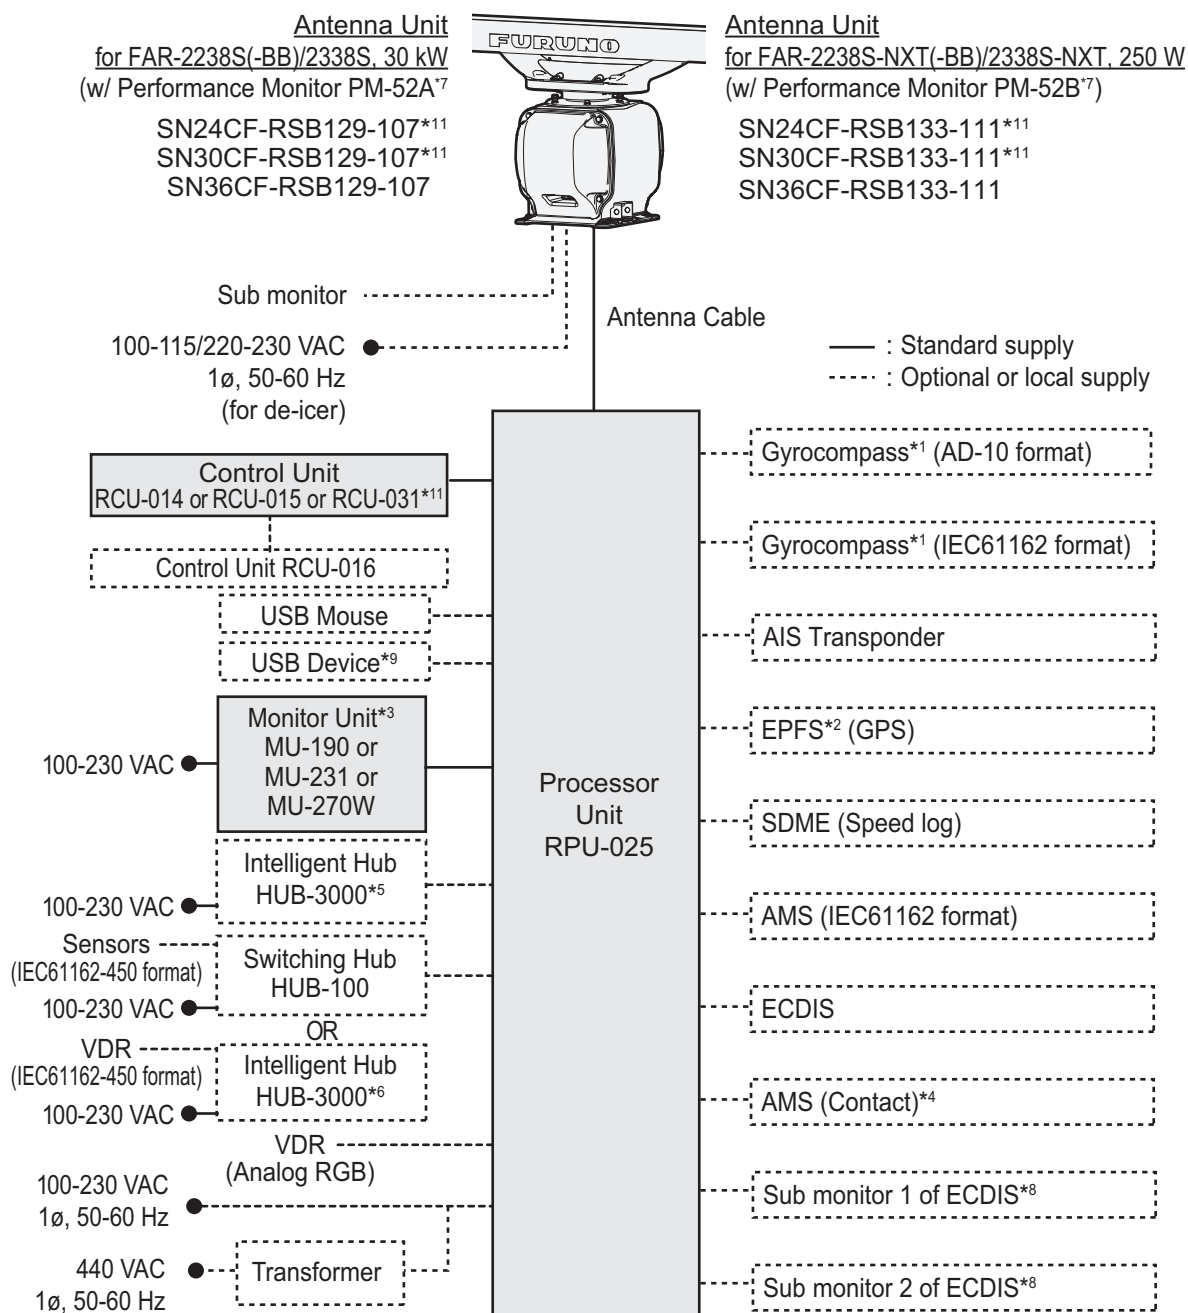

## S-band: FAR-2268DS

**Note:** The footnotes for \*<sup>1</sup> to \*<sup>11</sup> are listed in "Notes" on page xxiv.

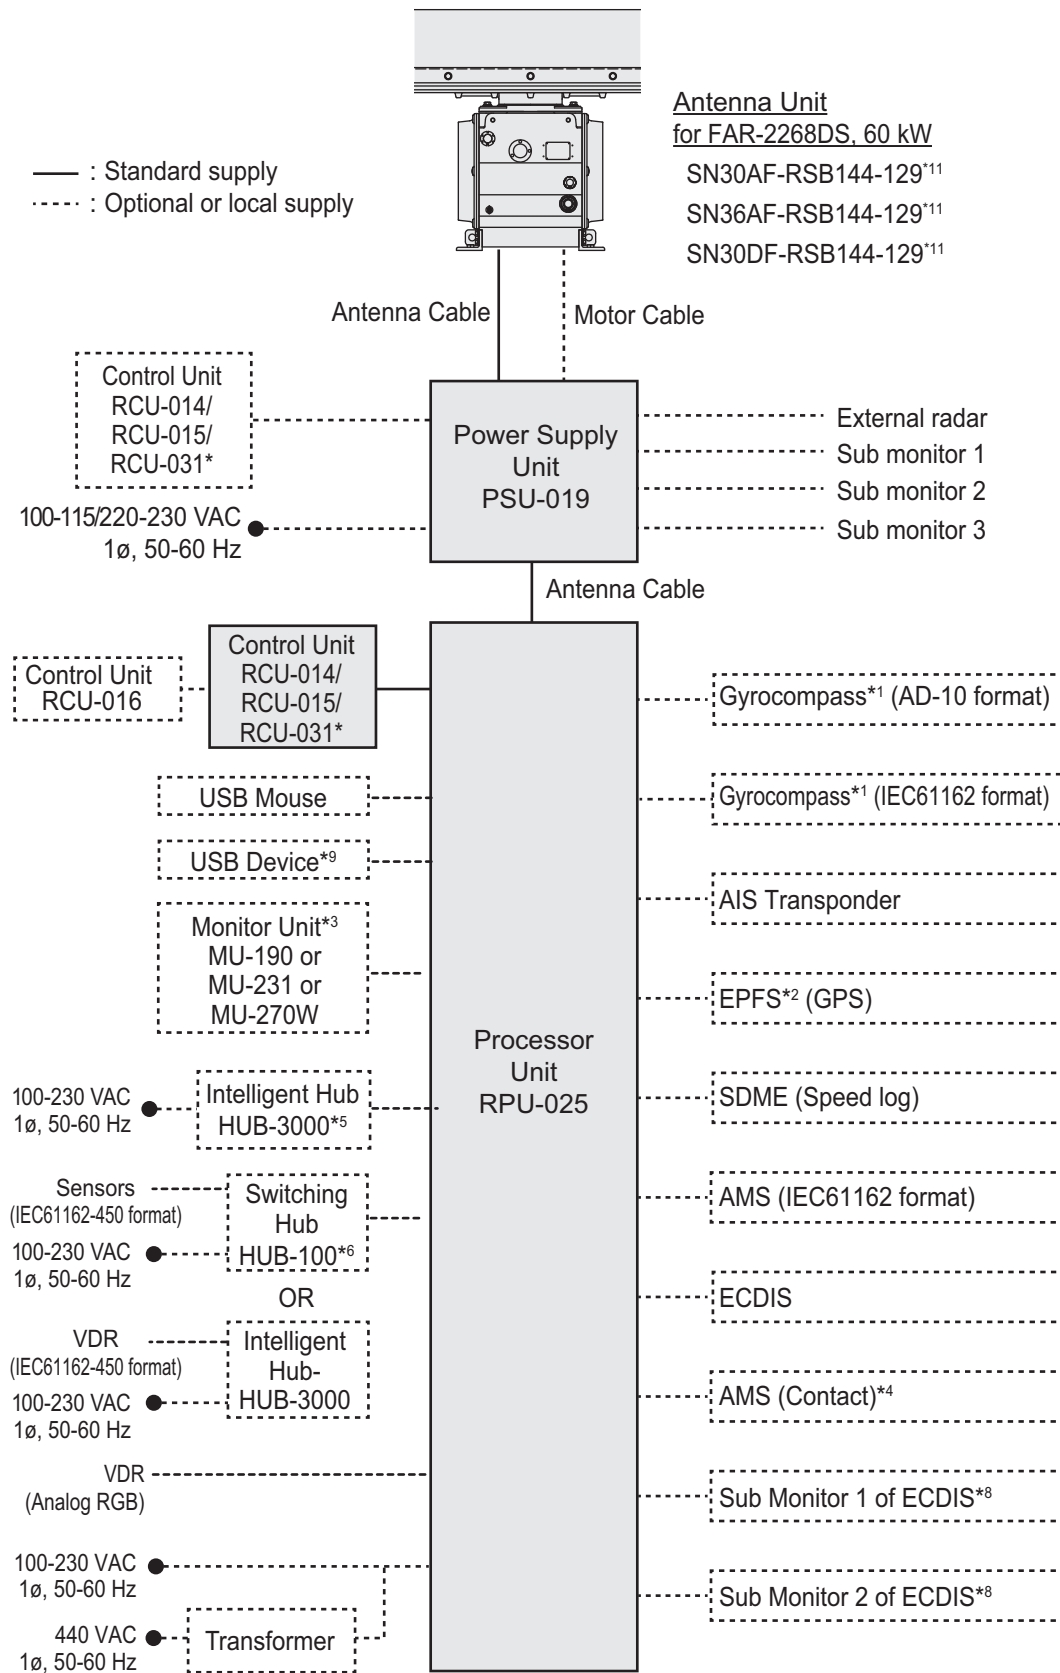

## Category of units

Antenna units: Exposed to the weather.

Other units: Protected from the weather.

## Notes

- 1) The gyrocompass must be type approved for compliance with IMO resolution A.424(XI) (and/or resolution A.821(19) for installation on HSC). The gyrocompass must also have an update rate that is adequate for the ship's rate of turn. The update rate must be better than 40 Hz (HSC) or 20 Hz (conventional vessel).
- 2) The EPFS must be type approved for compliance with IMO resolution MSC.112(73).
- 3) These monitors have been approved by the IMO, MU-190 for CAT 2 and CAT 2H, MU-231/MU-270W for CAT 1 and CAT 1H. If a different monitor is to be used on IMO vessels, its effective diameter must meet the applicable Category requirements:
  - CAT 1 and CAT 1H: effective diameter 320 mm or higher;
  - CAT 2 and CAT 2H: effective diameter 250 mm or higher.For installation, operation and viewing distance of other monitor, see its manuals.  
For BB type, a monitor unit is prepared by user.
- 4) Characteristics of contact output for Alarm:
  - (Load current) 250 mA;
  - (Polarity) Normally Open: 2 ports, Normally Close: 2 ports;
  - Serial I/O for alarm is also possible, which complies with IEC 61162-1.
- 5) For configurations with 3 or more radars/ECDIS (FMD-3100/FMD-3200/FMD-3300) connected, connect via the HUB-3000. For 2 radars, HUB-100 can be used. (Connection to ECDIS is not available for C-types.)
- 6) For configurations with a VDR connected, connect via the HUB-3000. (Connection to VDR is not available for C-types.)
- 7) Some antenna configurations do not have an in-built Performance Monitor. This type of antenna is not usable for IMO-type radars.
- 8) For connection of non-FURUNO ECDIS only. For connection of radars or plotters, the connection must be done at the radar antenna via the sub monitor connector.
- 9) Available for C-types only.
- 10) For X-Band TR-UP radars only, a junction box is required for antenna cable extension to lengths greater than 100 m. The maximum cable length is 400 m.
- 11) Unavailable on IMO-type radars.

# 1. OPERATIONAL OVERVIEW


## 1.1 Controls Overview

Two types of control units are available for your FAR-2xx8: a full keyboard (RCU-014/RCU-031) or palm control (RCU-015/RCU-016).

Most operations can be done with either type of Control Unit. Throughout the manual, procedures are outlined using the RCU-014, unless otherwise specified.

### 1.1.1 Control Unit RCU-014

You can control almost all aspects of your radar from the RCU-014. The figure and table below show an overview of the control unit with a brief description of the controls.

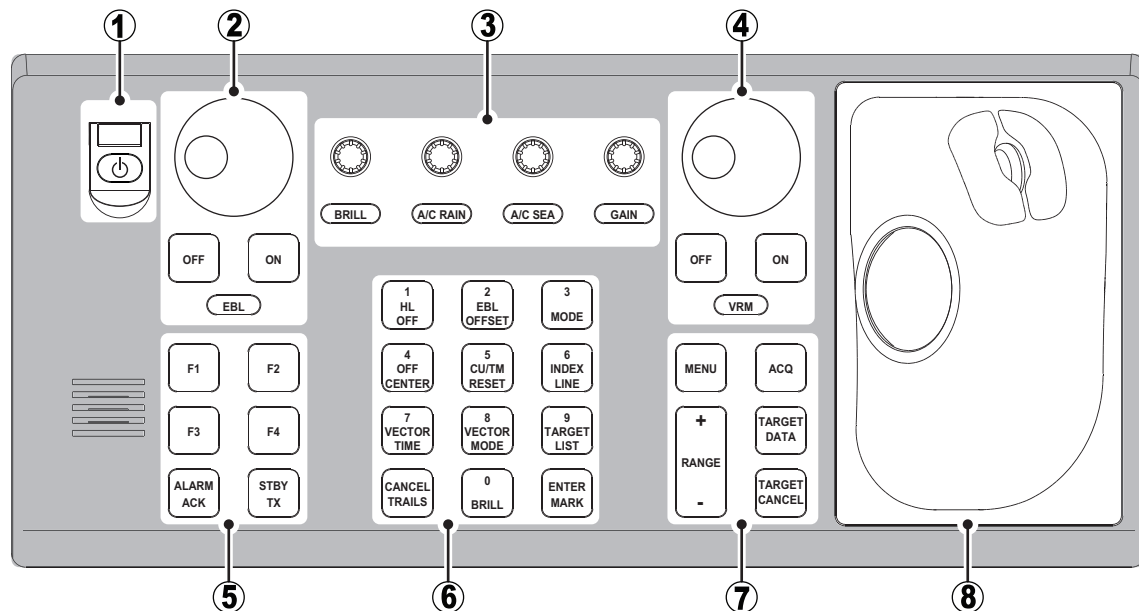

| No. | Control Name  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Power button  | Turn the power on or off. See section 1.2.                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 2   | EBL controls  | <ul style="list-style-type: none"><li>• <b>EBL keys:</b> Turn the EBLs on or off.</li><li>• <b>EBL knob:</b><br/><u>For IMO-types</u><br/>Move the selected EBL. See section 1.33.<br/><u>For C-types</u><ul style="list-style-type: none"><li>• <b>with the cursor shown:</b> adjust the direction (bearing) of EBLs, PI lines and the diamond cursor; moves the cursor up/downwards.</li><li>• <b>when entering marks in normal display mode:</b> moves the chart up/downwards.</li></ul></li></ul> |
| 3   | BRILL knob    | Adjust echo brilliance and screen brilliance. See section 1.3.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|     | A/C RAIN knob | Adjust auto/manual clutter reduction for rain. See section 1.21.                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|     | A/C SEA knob  | Adjust auto/manual clutter reduction for rough seas. See section 1.20.                                                                                                                                                                                                                                                                                                                                                                                                                                |
|     | GAIN knob     | Adjust the gain (sensitivity). See section 1.19.                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

## 1. OPERATIONAL OVERVIEW


| No. | Control Name                              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4   | <b>VRM</b> controls                       | <ul style="list-style-type: none"> <li>• <b>VRM</b> keys: Turn the VRMs on or off.</li> <li>• <b>VRM</b> knob:<br/>For IMO-types<br/>Move the selected VRM. See section 1.32.<br/>For C-types <ul style="list-style-type: none"> <li>• <b>with the cursor shown</b>: adjust the distance (range) of VRMs or PI line intervals; moves the cursor left/rightwards.</li> <li>• <b>when entering marks in normal display mode</b>: moves the chart left/rightwards.</li> </ul> </li> </ul> |
| 5   | Functions keys ( <b>F1</b> to <b>F4</b> ) | <ul style="list-style-type: none"> <li>• Perform a pre-registered function. See section 1.8.</li> <li>• <b>with pop up window shown</b>: perform the operation shown in the window.</li> </ul>                                                                                                                                                                                                                                                                                         |
|     | <b>ALARM ACK</b> key                      | Acknowledge active alerts. See section 1.53.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|     | <b>STBY TX</b> key                        | Toggle the radar operation between transmit (TX) and standby (STBY). See section 1.15.                                                                                                                                                                                                                                                                                                                                                                                                 |
| 6   | <b>1, HL OFF</b> key                      | <ul style="list-style-type: none"> <li>• <b>With the menu open</b>: Select menu item "1".</li> <li>• Press and hold to hide the heading line. Release to re-show the heading line. See section 1.44.1.</li> </ul>                                                                                                                                                                                                                                                                      |
|     | <b>2, EBL OFFSET</b> key                  | <ul style="list-style-type: none"> <li>• <b>With the menu open</b>: Select menu item "2".</li> <li>• Sets the positive/negative value to "+". See section 1.13 and section 1.9.</li> <li>• Offset or reset the EBL. See section 1.34.</li> </ul>                                                                                                                                                                                                                                       |
|     | <b>3, MODE</b> key                        | For IMO-types <ul style="list-style-type: none"> <li>• <b>With the menu open</b>: Select menu item "3".</li> <li>• Change the orientation mode. See section 1.30.</li> </ul> For C-types<br><b>When the MODE key is set to ORIENTATION</b> :<br>Same operation as IMO-types.<br><b>When the MODE key is set to CURSOR/DISPLAY</b> : <ul style="list-style-type: none"> <li>• With the menu open: Select menu item 3.</li> <li>• Show/hide the cursor.</li> </ul>                       |
|     | <b>4, OFF CENTER</b> key                  | <ul style="list-style-type: none"> <li>• <b>With the menu open</b>: Select menu item "4".</li> <li>• <b>With the cursor shown</b>: enable or disable off-center. See section 1.36.</li> <li>• <b>With the cursor hidden (C-types only)</b>: move the screen center (OS position).</li> </ul>                                                                                                                                                                                           |
|     | <b>5, CU/TM RESET</b> key                 | <ul style="list-style-type: none"> <li>• <b>With the menu open</b>: Select menu item "5".</li> <li>• <b>Course Up mode</b>: Reset the heading line to 000°. See section 1.30.</li> <li>• <b>True Motion mode</b>: Move Own Ship position 75% of the radius in opposite direction of the current heading. See section 1.30.</li> </ul>                                                                                                                                                  |
|     | <b>6, INDEX LINE</b> key                  | <ul style="list-style-type: none"> <li>• <b>With the menu open</b>: Select menu item "6".</li> <li>• <b>Short press</b>: Select a PI line. See section 1.40.</li> <li>• <b>Long press</b>: Show or hide the selected PI line. See section 1.40.</li> </ul>                                                                                                                                                                                                                             |
|     | <b>7, VECTOR TIME</b> key                 | <ul style="list-style-type: none"> <li>• <b>With the menu open</b>: Select menu item "7".</li> <li>• Change the vector time. See section 3.10.2.</li> </ul>                                                                                                                                                                                                                                                                                                                            |
|     | <b>8, VECTOR MODE</b> key                 | <ul style="list-style-type: none"> <li>• <b>With the menu open</b>: Select menu item "8".</li> <li>• Sets the positive/negative value to "-". See section 1.13 and section 1.9.</li> <li>• Toggle between true and relative vectors. See section 3.10.</li> </ul>                                                                                                                                                                                                                      |
|     | <b>9, TARGET LIST</b> key                 | <ul style="list-style-type: none"> <li>• <b>With the menu open</b>: Select menu item "9".</li> <li>• Show or hide the TT/AIS target list. See section 3.9.3.</li> </ul>                                                                                                                                                                                                                                                                                                                |

| No. | Control Name             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6   | <b>CANCEL TRAILS</b> key | Without the menu open (see <a href="#">section 1.37.2</a> ):<br><ul style="list-style-type: none"> <li>• <b>Short press</b>: Change the trail display time.</li> <li>• <b>Long press</b>: Erase displayed trails.</li> </ul> With the menu open (see <a href="#">section 1.5</a> ):<br><ul style="list-style-type: none"> <li>• Go back one level in the menu. Closes the menu if the top level is displayed.</li> <li>• Cancel changes made to a menu setting.</li> </ul> |
|     | <b>0, BRILL</b> key      | <ul style="list-style-type: none"> <li>• <b>With the menu open</b>: Select menu item "0".</li> <li>• Change the color scheme. See <a href="#">section 1.46</a>.</li> </ul>                                                                                                                                                                                                                                                                                                 |
|     | <b>ENTER MARK</b> key    | Inside the Operational Display Area (ODA):<br>Inscribe a mark. See <a href="#">section 1.44</a> .<br><u>With the menu open</u> :<br>Confirm changes, open the selected menu. See <a href="#">section 1.5</a>                                                                                                                                                                                                                                                               |
| 7   | <b>MENU</b> key          | Open or close the menu the menu. See <a href="#">section 1.5</a> .<br><b>Note</b> : The <b>MENU</b> key will not open/close the menu in the following situations:<br><ul style="list-style-type: none"> <li>• VRM or EBL is being set.</li> <li>• DROP MARK or MARK is being inscribed.</li> <li>• Alarm Zone (AZ) or TARGET ALARM is being set.</li> </ul>                                                                                                                |
|     | <b>RANGE</b> controls    | Increase or decrease the range. See <a href="#">section 1.31</a> .                                                                                                                                                                                                                                                                                                                                                                                                         |
|     | <b>ACQ</b> key           | <ul style="list-style-type: none"> <li>• Manually acquire the cursor-highlighted target for Target Tracking (TT).</li> </ul>                                                                                                                                                                                                                                                                                                                                               |
|     | <b>TARGET DATA</b> key   | <ul style="list-style-type: none"> <li>• Show the information for the cursor-highlighted target.</li> <li>• Activate a sleeping AIS target. See <a href="#">section 3.2</a>.</li> </ul>                                                                                                                                                                                                                                                                                    |
|     | <b>TARGET CANCEL</b> key | <ul style="list-style-type: none"> <li>• Cancel tracking for the selected target.</li> <li>• Sleep the selected AIS target.</li> <li>• Long press: Cancel tracking for all TT targets. See <a href="#">section 3.2</a>.</li> <li>• Delete marks/waypoints*.</li> <li>• Cancel character input*.</li> </ul> *: C-type only.                                                                                                                                                 |
| 8   | Trackball controls       | See <a href="#">section 1.1.3</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## 1. OPERATIONAL OVERVIEW

### 1.1.2 Control Unit RCU-031 (C-types only)

The figure and table below show an overview of the control unit with a brief description of the controls.

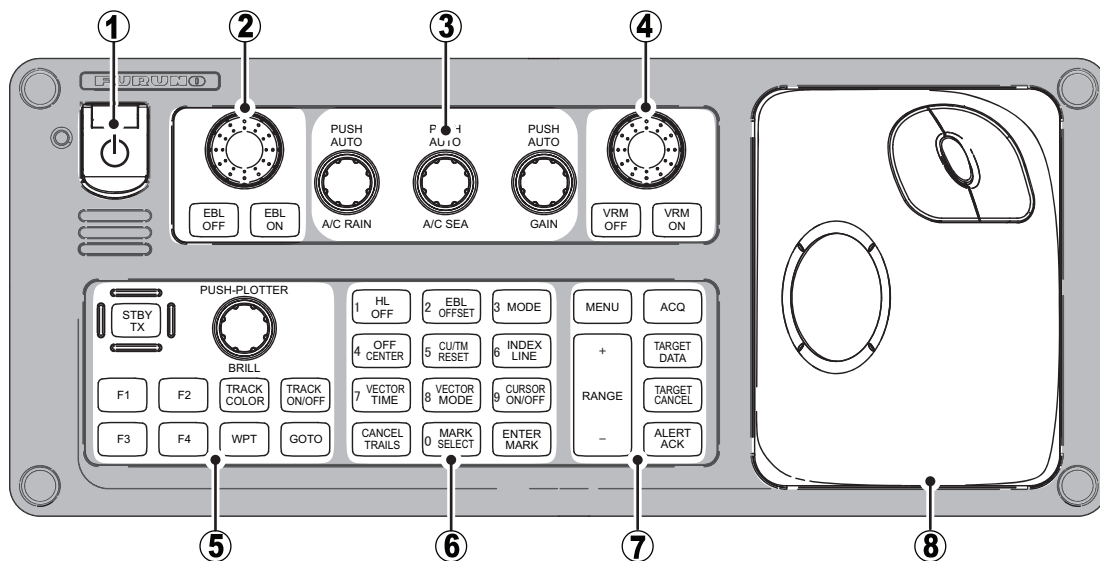

| No. | Control Name              | Description                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Power button              | Turn the power on or off. See section 1.2.                                                                                                                                                                                                                                                                                                                                                                                      |
| 2   | EBL controls              | <ul style="list-style-type: none"> <li>• <b>EBL keys:</b> Turn the EBLs on or off.</li> <li>• <b>EBL knob:</b> <ul style="list-style-type: none"> <li>• <b>with the cursor shown:</b> adjust the direction (bearing) of EBLs, PI lines and the diamond cursor; moves the cursor up/downwards.</li> <li>• <b>when entering marks in normal display mode, or in standby:</b> moves the chart up/downwards.</li> </ul> </li> </ul> |
| 3   | A/C RAIN knob             | <ul style="list-style-type: none"> <li>• <b>Turn:</b> Adjust auto/manual clutter reduction for rain. See section 1.21.</li> <li>• <b>Press:</b> Toggle the A/C RAIN function on/off.</li> </ul>                                                                                                                                                                                                                                 |
|     | A/C SEA knob              | <ul style="list-style-type: none"> <li>• <b>Turn:</b> Adjust auto/manual clutter reduction for rough seas. See section 1.20.</li> <li>• <b>Press:</b> Toggle the A/C SEA function on/off.</li> </ul>                                                                                                                                                                                                                            |
|     | GAIN knob                 | <ul style="list-style-type: none"> <li>• <b>Turn:</b> Adjust the gain (sensitivity). See section 1.19.</li> <li>• <b>Press:</b> Toggle the ACE (Automatic Clutter Elimination) function on/off.</li> </ul>                                                                                                                                                                                                                      |
| 4   | VRM controls              | <ul style="list-style-type: none"> <li>• <b>VRM keys:</b> Turn the VRMs on or off.</li> <li>• <b>VRM knob:</b> <ul style="list-style-type: none"> <li>• <b>with the cursor shown:</b> adjust the distance (range) of VRMs or PI line intervals; moves the cursor left/rightwards.</li> <li>• <b>when entering marks in normal display mode, or in standby:</b> moves the chart left/rightwards.</li> </ul> </li> </ul>          |
| 5   | STBY TX key               | Toggle the radar operation between transmit (TX) and standby (STBY). See section 1.15.                                                                                                                                                                                                                                                                                                                                          |
|     | BRILL knob                | Adjust echo brilliance and screen brilliance. See section 1.3.                                                                                                                                                                                                                                                                                                                                                                  |
|     | Functions keys (F1 to F4) | <ul style="list-style-type: none"> <li>• Perform a pre-registered function. See section 1.8.</li> <li>• <b>with pop up window shown:</b> perform the operation shown in the window.</li> </ul>                                                                                                                                                                                                                                  |
|     | TRACK COLOR key           | Opens the [CHANGE TRACK COLOR] window.                                                                                                                                                                                                                                                                                                                                                                                          |
|     | TRACK ON/OFF key          | Starts/stops own ship track recording.                                                                                                                                                                                                                                                                                                                                                                                          |


| No. | Control Name              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5   | <b>WPT</b> key            | Opens the [WAYPOINT ENTRY] window.<br>(Requires [ROUTE DATA SOURCE] in the [ROUTES•WAY-POINTS] to be set as [INTERNAL DATA].)                                                                                                                                                                                                                                                                                                                                                    |
|     | <b>GOTO</b> key           | Set/remove a GOTO destination.                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 6   | <b>1, HL OFF</b> key      | <ul style="list-style-type: none"> <li>• <b>With the menu open:</b> Select menu item "1".</li> <li>• Press and hold to hide the heading line. Release to re-show the heading line. See section 1.44.1.</li> </ul>                                                                                                                                                                                                                                                                |
|     | <b>2, EBL OFFSET</b> key  | <ul style="list-style-type: none"> <li>• <b>With the menu open:</b> Select menu item "2".</li> <li>• Sets the positive/negative value to "+". See section 1.13 and section 1.9.</li> <li>• Offset or reset the EBL. See section 1.34.</li> </ul>                                                                                                                                                                                                                                 |
|     | <b>3, MODE</b> key        | <p><b>When the MODE key is set to ORIENTATION:</b></p> <ul style="list-style-type: none"> <li>• <b>With the menu open:</b> Select menu item "3".</li> <li>• Change the orientation mode. See section 1.30.</li> </ul> <p><b>When the MODE key is set to CURSOR/DISPLAY:</b></p> <ul style="list-style-type: none"> <li>• With the menu open: Select menu item 3.</li> <li>• Show/hide the cursor.</li> </ul>                                                                     |
|     | <b>4, OFF CENTER</b> key  | <ul style="list-style-type: none"> <li>• <b>With the menu open:</b> Select menu item "4".</li> <li>• <b>With the cursor shown:</b> enable or disable off-center. See section 1.36.</li> <li>• <b>With the cursor hidden:</b> move the screen center (OS position).</li> </ul>                                                                                                                                                                                                    |
|     | <b>5, CU/TM RESET</b> key | <ul style="list-style-type: none"> <li>• <b>With the menu open:</b> Select menu item "5".</li> <li>• <b>Course Up mode:</b> Reset the heading line to 000°. See section 1.30.</li> <li>• <b>True Motion mode:</b> Move Own Ship position 75% of the radius in opposite direction of the current heading. See section 1.30.</li> </ul>                                                                                                                                            |
|     | <b>6, INDEX LINE</b> key  | <ul style="list-style-type: none"> <li>• <b>With the menu open:</b> Select menu item "6".</li> <li>• <b>Short press:</b> Select a PI line. See section 1.40.</li> <li>• <b>Long press:</b> Show or hide the selected PI line. See section 1.40.</li> </ul>                                                                                                                                                                                                                       |
|     | <b>7, VECTOR TIME</b> key | <ul style="list-style-type: none"> <li>• <b>With the menu open:</b> Select menu item "7".</li> <li>• Change the vector time. See section 3.10.2.</li> </ul>                                                                                                                                                                                                                                                                                                                      |
|     | <b>8, VECTOR MODE</b> key | <ul style="list-style-type: none"> <li>• <b>With the menu open:</b> Select menu item "8".</li> <li>• Sets the positive/negative value to "-". See section 1.13 and section 1.9.</li> <li>• Toggle between true and relative vectors. See section 3.10.</li> </ul>                                                                                                                                                                                                                |
|     | <b>9, TARGET LIST</b> key | <ul style="list-style-type: none"> <li>• <b>With the menu open:</b> Select menu item "9".</li> <li>• Show or hide the TT/AIS target list. See section 3.9.3.</li> </ul>                                                                                                                                                                                                                                                                                                          |
|     | <b>CANCEL TRAILS</b> key  | <p>Without the menu open (see <a href="#">section 1.37.2</a>):</p> <ul style="list-style-type: none"> <li>• <b>Short press:</b> Change the trail display time.</li> <li>• <b>Long press:</b> Erase displayed trails.</li> </ul> <p>With the menu open (see <a href="#">section 1.5</a>):</p> <ul style="list-style-type: none"> <li>• Go back one level in the menu. Closes the menu if the top level is displayed.</li> <li>• Cancel changes made to a menu setting.</li> </ul> |
|     | <b>0, BRILL</b> key       | <ul style="list-style-type: none"> <li>• <b>With the menu open:</b> Select menu item "0".</li> <li>• Change the color scheme. See section 1.46.</li> </ul>                                                                                                                                                                                                                                                                                                                       |
|     | <b>ENTER MARK</b> key     | <p><u>Inside the Operational Display Area (ODA):</u><br/>Inscribe a mark. See section 1.44.</p> <p><u>With the menu open:</u><br/>Confirm changes, open the selected menu. See section 1.5</p>                                                                                                                                                                                                                                                                                   |

## 1. OPERATIONAL OVERVIEW

| No. | Control Name             | Description                                                                                                                                                                                                                                                                                                                            |
|-----|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | <b>MENU</b> key          | Open or close the menu the menu. See section 1.5.<br><b>Note:</b> The <b>MENU</b> key will not open/close the menu in the following situations: <ul style="list-style-type: none"> <li>• VRM or EBL is being set.</li> <li>• DROP MARK or MARK is being inscribed.</li> <li>• Alarm Zone (AZ) or TARGET ALARM is being set.</li> </ul> |
|     | <b>RANGE</b> controls    | Increase or decrease the range. See section 1.31.                                                                                                                                                                                                                                                                                      |
|     | <b>ACQ</b> key           | <ul style="list-style-type: none"> <li>• Manually acquire the cursor-highlighted target for Target Tracking (TT).</li> </ul>                                                                                                                                                                                                           |
|     | <b>TARGET DATA</b> key   | <ul style="list-style-type: none"> <li>• Show the information for the cursor-highlighted target.</li> <li>• Activate a sleeping AIS target. See section 3.2.</li> </ul>                                                                                                                                                                |
|     | <b>TARGET CANCEL</b> key | <ul style="list-style-type: none"> <li>• Cancel tracking for the selected target.</li> <li>• Sleep the selected AIS target.</li> <li>• Long press: Cancel tracking for all TT targets. See section 3.2.</li> <li>• Delete marks/waypoints.</li> <li>• Cancel character input.</li> </ul>                                               |
|     | <b>ALARM ACK</b> key     | Acknowledge active alerts. See section 1.53.                                                                                                                                                                                                                                                                                           |
| 8   | Trackball controls       | See section 1.1.3.                                                                                                                                                                                                                                                                                                                     |

### 1.1.3 Control Unit RCU-015/RCU-016

The RCU-015 and RCU-016 offer an easy to use mouse-like control interface, without the bulkiness of the RCU-014. You can access all your radar functions from the RCU-015/RCU-016, however, only the function keys are available as short-cut keys.

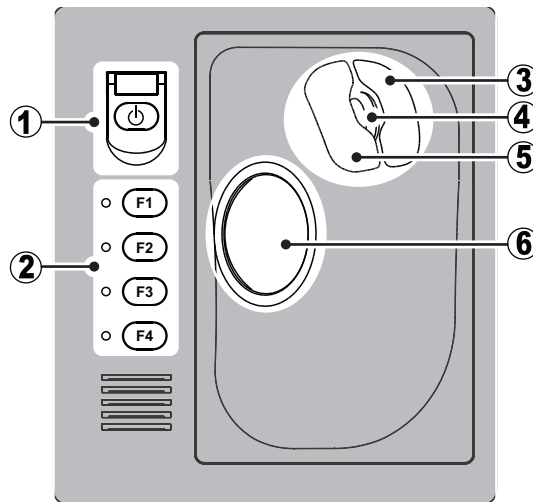

| No. | Control Name              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Power button*             | Turn the power on or off.<br>See section 1.2.                                                                                                                                                                                                                                                                                                                                                                                                             |
| 2   | Functions keys (F1 to F4) | Perform a pre-registered function.<br>See section 1.8.                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3   | Right mouse button        | <u>Short press:</u> <ul style="list-style-type: none"> <li>Show the pop up menu for the highlighted item.</li> <li>Cancel changes to the currently selected setting.</li> <li><b>With TT target or mark symbol highlighted:</b> Open the editing window (C-types only).</li> <li><b>With pop up menus shown:</b> Hide pop up menus.</li> </ul> <u>Long press:</u> <ul style="list-style-type: none"> <li>Change the screen brilliance to [50].</li> </ul> |
| 4   | Scrollwheel               | <ul style="list-style-type: none"> <li>Change settings.</li> <li>Highlight a menu item.</li> <li><b>With TT target selected:</b> Change the TT target's symbol (C-types only).</li> </ul>                                                                                                                                                                                                                                                                 |
| 5   | Left mouse button         | Select a highlighted object or menu item.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 6   | Trackball                 | <u>For IMO-types</u> <ul style="list-style-type: none"> <li>Moves the cursor.</li> <li>Highlight an object or menu item.</li> </ul> <u>For C-types</u> <ul style="list-style-type: none"> <li>Moves the cursor (when the cursor is shown).</li> <li>Moves the chart (when the cursor is hidden).</li> <li>Highlight an object or menu item.</li> </ul>                                                                                                    |

\*: The RCU-016 Control Unit has no power button. To turn the power on or off when using a RCU-016 Control Unit, use the power button on the RCU-014/RCU-015/RCU-031 Control Unit.

#### About the terminology used in this manual

Unless otherwise started, the terms “click” and “left-click” mean “use the trackball to place the cursor on the specified item, then press the left mouse button”. The term “right-click” means “use the trackball to place the cursor on the specified item, then press the right mouse button”.

## 1.2 How to Turn the Radar On/Off

The power button (⏻) is located at the top-left corner of the RCU-014, RCU-015 and RCU-031 Control Units.

To turn the power on, open the power switch cover, then press the power button.

The LED to the left of the power button lights up (green color) and the system begins the startup process. The indication "Initializing....." appears at the center of the screen.

C-types also display two messages regarding charts, after the startup process is complete.



When the startup process is complete, the system begins warm-up procedures to prepare the magnetron for transmission. The warm-up can take up to three minutes.

During the warm-up, indications for total on-time (magnetron on-time since installation) and total transmission time (since installation) appear below the warm-up countdown timer. These indications are also displayed when the radar is in standby mode.

When the warm-up process is complete, the radar goes into standby (STBY) mode and the indication "RADAR STBY" (IMO-types) or "STBY" (C-types) appears. This indication also appears whenever the equipment is in STBY mode.

**Note 1:** For C-types, the "STBY" indication appears only once, when the equipment is turned on. Further, the numerals on the heading dial (outer-most range ring) are not shown and the AIS function is active, however the TT function is inactive while in standby (STBY) mode.

**Note 2:** Do not turn on the power directly after it has been turned off. Wait several seconds before you reapply the power, to be sure the radar starts up properly.

**Note 3:** The RCU-016 Control Unit has no power button. To turn the power on or off when using a RCU-016 Control Unit, use the power button on the RCU-014/RCU-015/RCU-031 Control Unit.

**Note 4:** Solid state radars do not have a magnetron, therefore they have no warming period.

To turn the power off, open the power switch cover, then press the power button.

## 1.3 How to Adjust the Brilliance

The screen brilliance (brightness) for monitors can be adjusted as shown below.


**Note:** The following procedure applies only to monitors supplied by FURUNO for this system. For other monitors, see the monitor operator's manual to adjust the brilliance.

### **Brilliance adjustment from the Control Unit (RCU-014/RCU-031)**

Rotate the **BRILL** knob clockwise to increase the brilliance (brighter), or rotate the **BRILL** knob counter-clockwise to reduce the brilliance (darker).

### **Brilliance adjustment from the on-screen box**

Select the brilliance indication in the lower half of the [BRILL] box, the spin the scrollwheel on the Control Unit upwards to reduce the brilliance (darker) or downwards to increase the brilliance (brighter).



**Note:** The above scrollwheel operation is based on default settings for [2 MOUSE WHEEL DIR]. See section 1.9.

## 1.4 Display Overview

### 1.4.1 Display examples

C-type radars have two display formats, [NORMAL] and [SIMPLE]. IMO-types have one standard display format. The information shown on-screen changes depending on the radar type and the display format selected.

You can change the display format for C-types from [6 DISPLAY MODE] (located in [9 INITIAL SETTINGS] → [5 OPERATION] menu; see section 1.9).

**Note 1:** The example screen below may differ slightly from your display, depending on the monitor used in your configuration. The overall information however, is the same.

**Note 2:** Unless otherwise indicated, the example figures for C-type radars used in this manual are taken using the [NORMAL] display.


### **Display specifications**

|                          | MU-190  | MU-231  | MU-270W |
|--------------------------|---------|---------|---------|
| Nominal viewing distance | 1.02 m  | 1.20 m  | 1.02 m  |
| Text height (min. font)  | 3.53 mm | 4.23 mm | 3.64 mm |
| Text width (min. font)   | 2.36 mm | 2.97 mm | 2.43 mm |


## 1. OPERATIONAL OVERVIEW

### Standard display

- IMO-type standard display

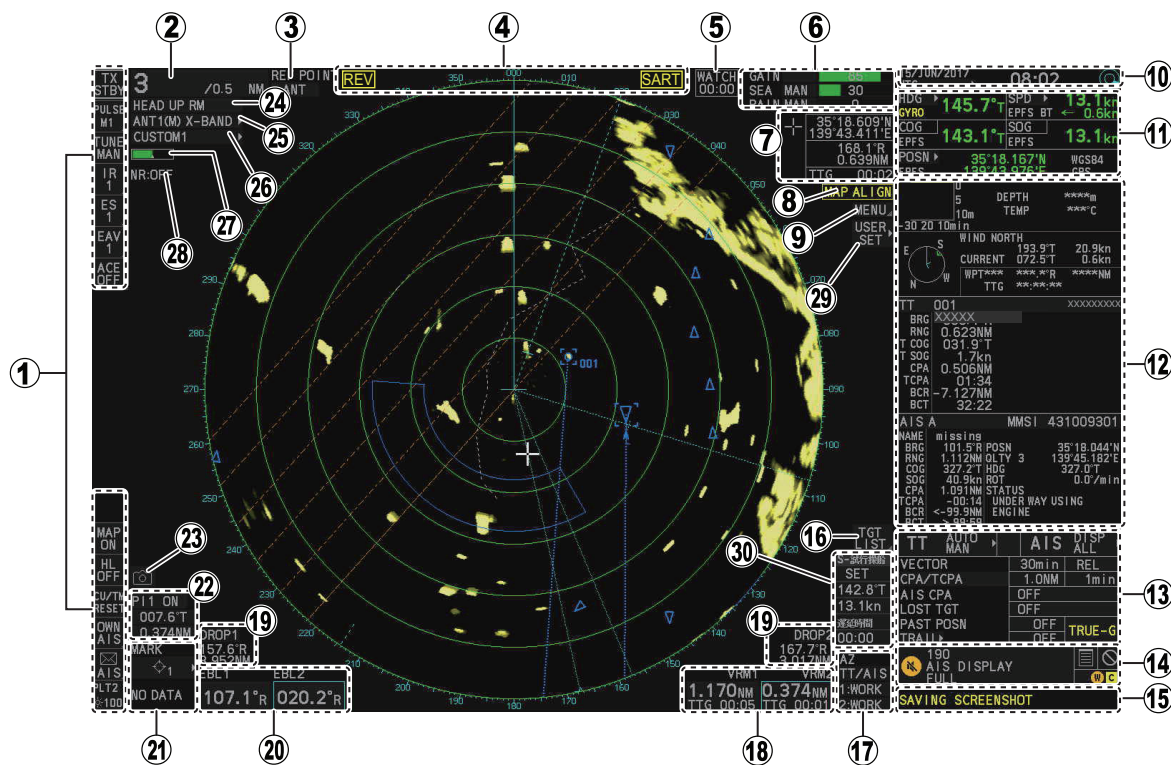

- C-type standard display

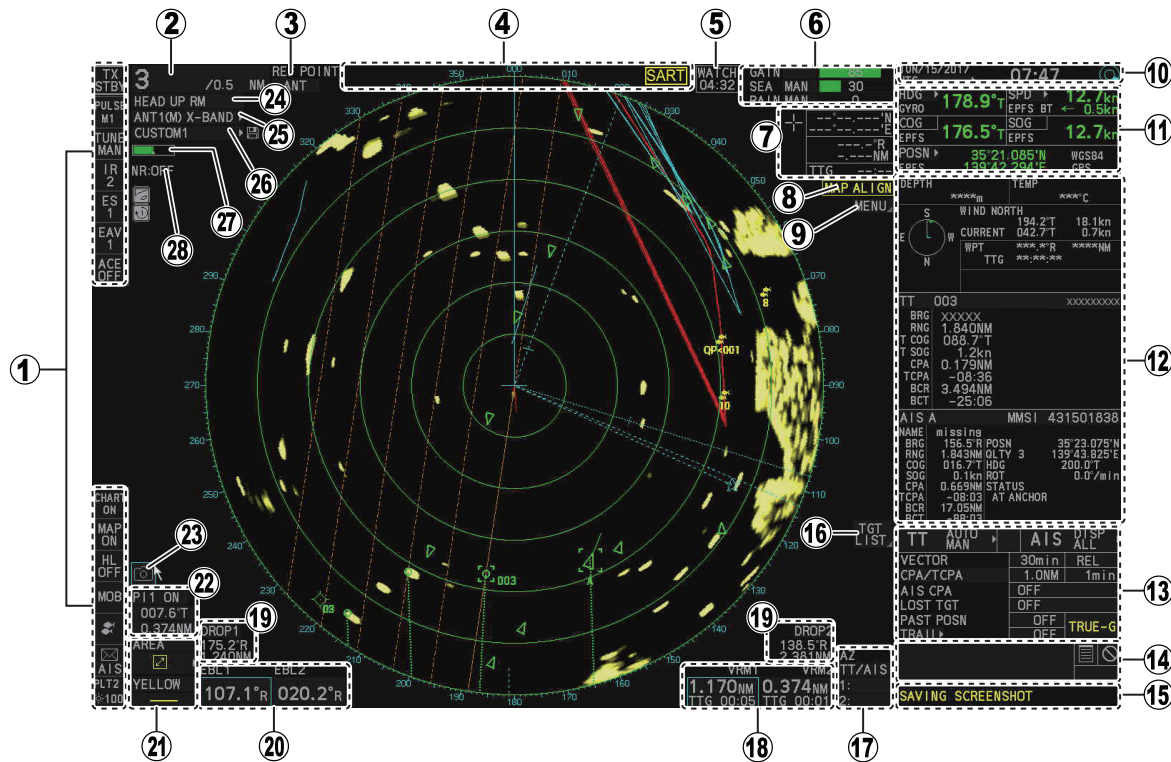


| No. | Name                    | Description                                                                                                                                                                                                                                                                                                                       |
|-----|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | InstantAccess bar™      | Contains functions and features which are used regularly and allows easy access/activation. For descriptions of each button on the bar, see section 1.4.2                                                                                                                                                                         |
| 2   | [RANGE] box             | Shows/changes the current range in use.                                                                                                                                                                                                                                                                                           |
| 3   | [REF POINT] box         | Shows/changes the point of reference.                                                                                                                                                                                                                                                                                             |
| 4   | Indications             | Shows indications for SART, shuttle ferry mode (IMO-type only) etc.                                                                                                                                                                                                                                                               |
| 5   | [WATCH] box             | <ul style="list-style-type: none"> <li>Shows the watch alert countdown timer.</li> <li>Resets the watch alert countdown.</li> </ul>                                                                                                                                                                                               |
| 6   | [ECHO ADJUST] box       | Place the cursor on a box to adjust the setting. <ul style="list-style-type: none"> <li>[GAIN] bar: Shows the level of gain in use.</li> <li>[SEA] bar: Shows the level and mode of sea clutter reduction.</li> <li>[RAIN] bar: Shows the level and mode of rain clutter reduction.</li> </ul>                                    |
| 7   | Cursor position details | Shows the location (coordinates) of the cursor with the estimated TTG to the cursor position.                                                                                                                                                                                                                                     |
| 8   | [MAP ALIGN] indication  | Shows/hides the map alignment status.                                                                                                                                                                                                                                                                                             |
| 9   | [MENU] box              | Opens/closes the menu.                                                                                                                                                                                                                                                                                                            |
| 10  | Date/Time               | <ul style="list-style-type: none"> <li>Shows date and time (with offset indication).</li> <li>Working indication (blue circle) indicates that the system is working correctly. Stops rotating when the system is frozen or malfunctioning.</li> </ul>                                                                             |
| 11  | Own Ship information    | Shows heading, speed, water tracking speed* <sup>1</sup> , COG, SOG* <sup>2</sup> , coordinates and sensor used for data input.<br>* <sup>1</sup> : Drift speed and direction (port/starboard) is indicated with arrows and numerals.<br>* <sup>2</sup> : When connected with a speed log, the indication changes to read "SLOG". |
| 12  | Information box         | <ul style="list-style-type: none"> <li>Shows information for selected TT or AIS targets.</li> <li>Shows the currently selected menu.</li> <li>Shows navigational data.</li> <li>Shows the performance monitor graph.</li> <li>Shows the zoomed area.</li> </ul>                                                                   |
| 13  | TT/AIS settings         | <ul style="list-style-type: none"> <li>Adjust TT/AIS vector settings.</li> <li>Adjust CPA/TCPA settings.</li> <li>Activate/sleep AIS targets.</li> <li>Adjust lost target alert settings.</li> <li>Adjust track plotting intervals.</li> <li>Adjust trail times.</li> </ul>                                                       |
| 14  | Alert box               | Shows active alerts and contains the buzzer silence button and a shortcut to the alert list.                                                                                                                                                                                                                                      |
| 15  | Guidance box            | Shows operational guidance for the Control Unit's <b>left button</b> and <b>right button</b> .                                                                                                                                                                                                                                    |
| 16  | [TGT LIST] box          | Shows the target details list for tracked TTs and active AIS targets.                                                                                                                                                                                                                                                             |
| 17  | [ACQUISITION ZONE] box  | <ul style="list-style-type: none"> <li>Adjust acquisition zone settings for target alarms.</li> <li>Toggle between sentry zone and acquisition zone alert modes.</li> </ul>                                                                                                                                                       |
| 18  | [VRM] box               | <ul style="list-style-type: none"> <li>Activate/deactivate the VRM (Variable Range Marker).</li> <li>Adjust the active (selected) VRM.</li> <li>Shows VRM range and TTG.</li> </ul>                                                                                                                                               |
| 19  | [DROP MARK] box         | Shows the bearing and range to the drop mark(s).                                                                                                                                                                                                                                                                                  |

## 1. OPERATIONAL OVERVIEW

| No.                          | Name                        | Description                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 20                           | [EBL] box                   | <ul style="list-style-type: none"> <li>• Activate/deactivate the EBL (Electronic Bearing Line).</li> <li>• Adjust the active (selected) EBL.</li> <li>• Shows EBL bearing.</li> </ul>                                                                                                                                                                                                                 |
| 21                           | [MARK] box                  | <ul style="list-style-type: none"> <li>• Selects a map mark to use.</li> <li>• Inscribes the selected map mark.</li> <li>• <b>Right-click</b>: opens the [RADAR MAP] menu (IMO-types); opens the [MARK] menu (C-types).</li> </ul>                                                                                                                                                                    |
| 22                           | [PI Lines] box              | <ul style="list-style-type: none"> <li>• Selects PI line set to use.</li> <li>• Shows/hides the selected PI lines.</li> <li>• Shows the angle, reference and range interval for the PI lines.</li> </ul>                                                                                                                                                                                              |
| 23                           | Screenshot button           | <p>Saves a screenshot of the entire displayed area.</p> <p><b>Note:</b> Requires SD card to be inserted in the Processor Unit. Shown in gray and not selectable if no SD card is inserted.</p>                                                                                                                                                                                                        |
| 24                           | [PRESENTATION MODE] box     | Change the presentation (orientation) mode for the radar images.                                                                                                                                                                                                                                                                                                                                      |
| 25                           | [ANTENNA SELECTION] box     | Selects the antenna to use for radar images.                                                                                                                                                                                                                                                                                                                                                          |
| 26                           | [PICTURE] box               | Customize the way in which echoes are displayed.                                                                                                                                                                                                                                                                                                                                                      |
| 27                           | [NOISE REJECTOR] indication | Shows the noise rejector function's ON/OFF status.                                                                                                                                                                                                                                                                                                                                                    |
| 28                           | [TUNING LEVEL] bar          | <ul style="list-style-type: none"> <li>• Shows the level of tuning in use. See section 1.16.</li> <li>• Adjusts the tuning (manual only). See section 1.16.3.</li> </ul> <p><b>Note 1:</b> The [TUNING LEVEL] bar is not shown for solid state radars.</p> <p><b>Note 2:</b> The [TUNING LEVEL] bar is not shown on FAR-2x58 and FAR-2268DS monitors which are assigned as [SUB] at installation.</p> |
| 29                           | User settings box*          | <ul style="list-style-type: none"> <li>• Loads pilot settings.</li> <li>• Opens the [USER SET] menu.</li> </ul>                                                                                                                                                                                                                                                                                       |
| 30                           | [TRIAL MANEUVERS] box*      | <ul style="list-style-type: none"> <li>• Activates/deactivates trial maneuvers.</li> <li>• Sets up trial maneuver parameters.</li> </ul>                                                                                                                                                                                                                                                              |
| *: Shown only for IMO-types. |                             |                                                                                                                                                                                                                                                                                                                                                                                                       |

**Simple display (C-types only)**

**Note:** TT/AIS settings are not available in the simple display. To change or adjust TT/AIS settings, make the changes/adjustments at the standard display, then switch to the simple display.

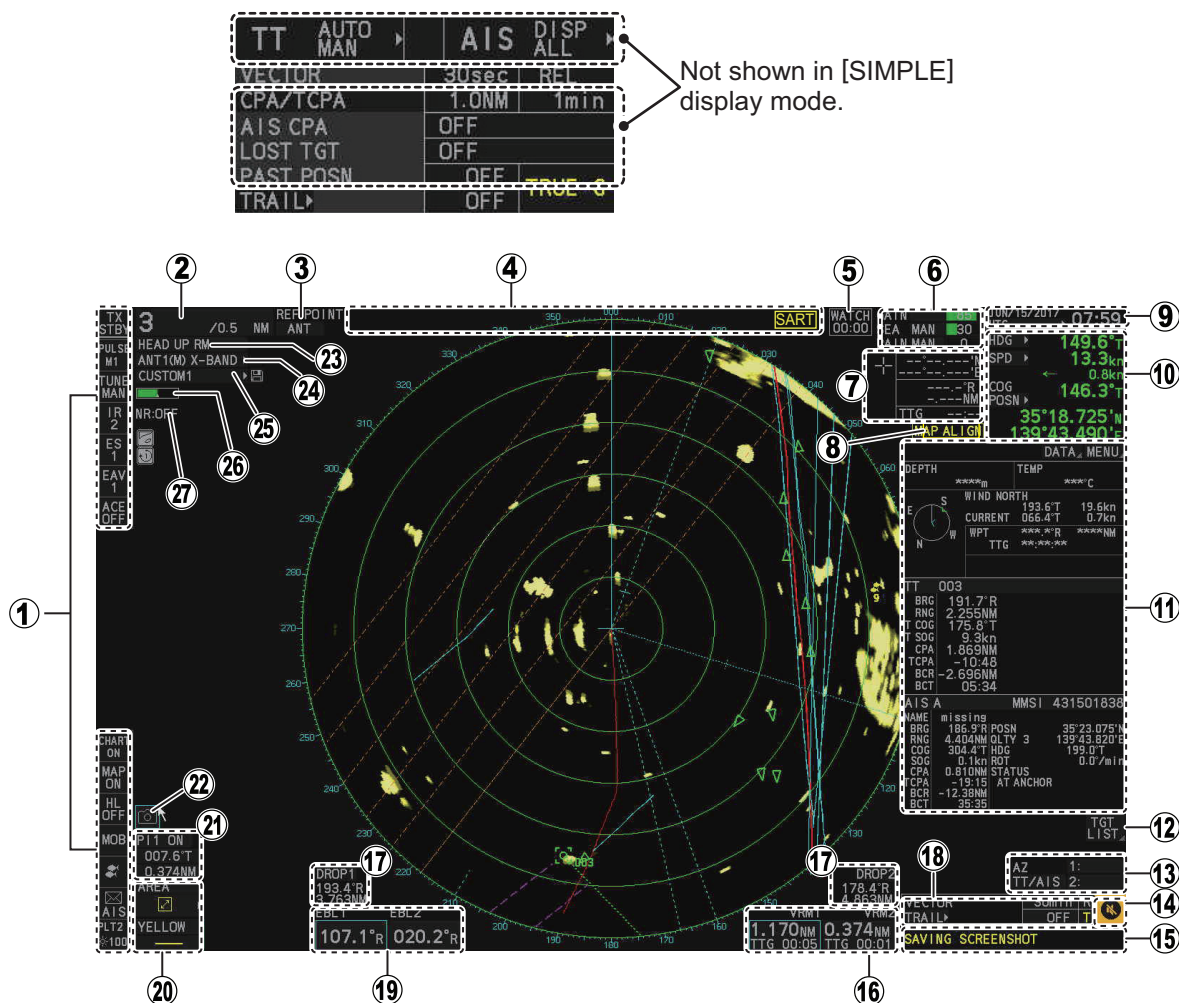


| No. | Name                    | Description                                                                                                                                                                                                                                                                                    |
|-----|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | InstantAccess bar™      | Contains functions and features which are used regularly and allows easy access/activation. For descriptions of each button on the bar, see section 1.4.2                                                                                                                                      |
| 2   | [RANGE] box             | Shows/changes the current range in use.                                                                                                                                                                                                                                                        |
| 3   | [REF POINT] box         | Shows/changes the point of reference.                                                                                                                                                                                                                                                          |
| 4   | Indications             | Shows indications for SART, etc.                                                                                                                                                                                                                                                               |
| 5   | [WATCH] box             | <ul style="list-style-type: none"> <li>Shows the watch alert countdown timer.</li> <li>Resets the watch alert countdown.</li> </ul>                                                                                                                                                            |
| 6   | [ECHO ADJUST] box       | Place the cursor on a box to adjust the setting. <ul style="list-style-type: none"> <li>[GAIN] bar: Shows the level of gain in use.</li> <li>[SEA] bar: Shows the level and mode of sea clutter reduction.</li> <li>[RAIN] bar: Shows the level and mode of rain clutter reduction.</li> </ul> |
| 7   | Cursor position details | Shows the location (coordinates) of the cursor with the estimated TTG to the cursor position.                                                                                                                                                                                                  |
| 8   | [MAP ALIGN] indication  | Shows/hides the map alignment status.                                                                                                                                                                                                                                                          |
| 9   | Date/Time               | Shows date and time (with offset indication).                                                                                                                                                                                                                                                  |

## 1. OPERATIONAL OVERVIEW

| No. | Name                        | Description                                                                                                                                                                                                                                                                                                                                                                              |
|-----|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10  | Own Ship information        | Shows heading, speed, water tracking speed* <sup>1</sup> , COG, SOG* <sup>2</sup> , coordinates and sensor used for data input.<br>* <sup>1</sup> : Drift speed and direction (port/starboard) is indicated with arrows and numerals.<br>* <sup>2</sup> : When connected with a speed log, the indication changes to read "SLOG".                                                        |
| 11  | Information box             | <ul style="list-style-type: none"> <li>Click [MENU] to show the menu.</li> <li>Click [DATA] to show the data box; the following information can be displayed. <ul style="list-style-type: none"> <li>Shows information for selected TT or AIS targets.</li> <li>Shows navigational data.</li> <li>Shows the performance monitor graph.</li> </ul> </li> </ul>                            |
| 12  | [TGT LIST] box              | Shows the target details list for tracked TTs and active AIS targets.                                                                                                                                                                                                                                                                                                                    |
| 13  | [ACQUISITION ZONE] box      | <ul style="list-style-type: none"> <li>Adjust acquisition zone settings for target alarms.</li> <li>Toggle between sentry zone and acquisition zone alert modes.</li> </ul>                                                                                                                                                                                                              |
| 14  | Alert box                   | Shows active alerts and contains the buzzer silence button and a shortcut to the alert list.                                                                                                                                                                                                                                                                                             |
| 15  | Guidance box                | Shows operational guidance for the Control Unit's <b>left button</b> and <b>right button</b> .                                                                                                                                                                                                                                                                                           |
| 16  | [VRM] box                   | <ul style="list-style-type: none"> <li>Activate/deactivate the VRM (Variable Range Marker).</li> <li>Adjust the active (selected) VRM.</li> <li>Shows VRM range and TTG.</li> </ul>                                                                                                                                                                                                      |
| 17  | [DROP MARK] box             | Shows the bearing and range to the drop mark(s).                                                                                                                                                                                                                                                                                                                                         |
| 18  | Vector/Trail box            | <ul style="list-style-type: none"> <li>Set vector/trail times for TT/AIS targets.</li> <li>Switch between true/relative trails and vectors.</li> </ul>                                                                                                                                                                                                                                   |
| 19  | [EBL] box                   | <ul style="list-style-type: none"> <li>Activate/deactivate the EBL (Electronic Bearing Line).</li> <li>Adjust the active (selected) EBL.</li> <li>Shows EBL bearing.</li> </ul>                                                                                                                                                                                                          |
| 20  | [MARK] box                  | <ul style="list-style-type: none"> <li>Selects a map mark to use.</li> <li>Inscribes the selected map mark.</li> <li><b>Right-click</b>: opens the [MARK] menu.</li> </ul>                                                                                                                                                                                                               |
| 21  | [PI Lines] box              | <ul style="list-style-type: none"> <li>Selects PI line set to use.</li> <li>Shows/hides the selected PI lines.</li> <li>Shows the angle, reference and range interval for the PI lines.</li> </ul>                                                                                                                                                                                       |
| 22  | Screenshot button           | Saves a screenshot of the entire displayed area.<br><b>Note</b> : Requires SD card to be inserted in the Processor Unit. Shown in gray and not selectable if no SD card is inserted.                                                                                                                                                                                                     |
| 23  | [PRESENTATION MODE] box     | Change the presentation (orientation) mode for the radar images.                                                                                                                                                                                                                                                                                                                         |
| 24  | [ANTENNA SELECTION] box     | Selects the antenna to use for radar images.                                                                                                                                                                                                                                                                                                                                             |
| 25  | [PICTURE] box               | Customize the way in which echoes are displayed.                                                                                                                                                                                                                                                                                                                                         |
| 26  | [NOISE REJECTOR] indication | Shows the noise rejector function's ON/OFF status.                                                                                                                                                                                                                                                                                                                                       |
| 27  | [TUNING LEVEL] bar          | <ul style="list-style-type: none"> <li>Shows the level of tuning in use. See section 1.16.</li> <li>Adjusts the tuning (manual only). See section 1.16.3.</li> </ul> <b>Note 1</b> : The [TUNING LEVEL] bar is not shown for solid state radars.<br><b>Note 2</b> : The [TUNING LEVEL] bar is not shown on FAR-2x58 and FAR-2268DS monitors which are assigned as [SUB] at installation. |

### 1.4.2 InstantAccess bar™

The InstantAccess bar™ contains functions and features which are used regularly and allows easy access/activation. For descriptions of each button on the bar, see the table in this section.

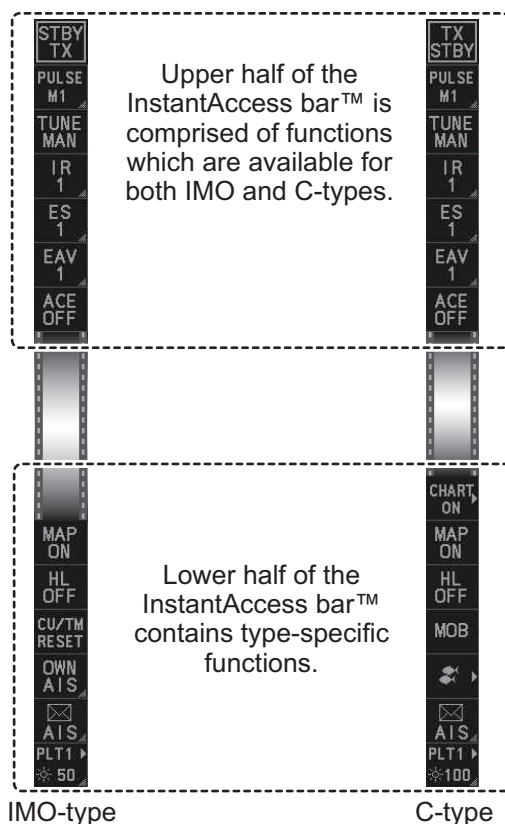

| Button                                                                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Upper Half - Common functions/features for both IMO and C-types</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                        | [Standby/Transmit] button.<br>Toggle between standby (STBY) and transmit (TX).                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                                                                        | [Pulselength] button.<br>Selects the pulselength.<br><b>Note:</b> The [Pulselength] button is not shown on FAR-2x58 and FAR-2268DS monitors which are assigned as [SUB] at installation; instead the button is replaced with the indication "SUB".                                                                                                                                                                                                                                                          |
|                                                                        | [Tune] button.<br>Toggles between automatic and manual tuning. (See section 1.16.1.)<br><b>Note 1:</b> For SSD antennas, this button appears as "TX CH x" ("x" denotes the channel used for transmission). If your radar is receiving interference from another radar operating at the same frequency, use the [TX CH] button to change the TX frequency.<br><b>Note 2:</b> The [Tune] button is grayed out and inoperable on FAR-2x58 and FAR-2268DS monitors which are assigned as [SUB] at installation. |
|                                                                        | [Interference Rejector] button.<br>Activates/deactivates the interference rejector feature.                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                                                                        | Echo Stretch button.<br>Activates/deactivates the echo stretch function.<br><b>Note:</b> This item is grayed out under the following conditions: <ul style="list-style-type: none"> <li>• ACE function is active.</li> <li>• No position data is input (excludes Dead Reckoning).</li> </ul>                                                                                                                                                                                                                |

## 1. OPERATIONAL OVERVIEW

| Button                                                                              | Description                                                                                                                                                                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | [Echo Average] button.<br>Activates/deactivates the echo average function.                                                                                                                                                                                                                                                                           |
|    | [ACE] button.<br>Activates/deactivates the ACE (Auto Clutter Elimination) function.                                                                                                                                                                                                                                                                  |
| <b>Lower Half - IMO-types</b>                                                       |                                                                                                                                                                                                                                                                                                                                                      |
|    | [Radar Map] button.<br>Shows/hides the radar map marks.                                                                                                                                                                                                                                                                                              |
|    | [HEADING LINE] button.<br>Left-click and hold to hide the heading line.                                                                                                                                                                                                                                                                              |
|    | [CU/TM RESET] button <ul style="list-style-type: none"> <li>• Puts the ship's heading at the top of the screen in course-up mode the moment this button is pressed.</li> <li>• Resets the ship's position to a point of 75% radius opposite to the extension of the heading line passing through the display center in true motion modes.</li> </ul> |
|    | [Own Ship AIS] button.<br>Shows the AIS VOYAGE DATA for AIS data setup.                                                                                                                                                                                                                                                                              |
|    | [AIS Message] button. <ul style="list-style-type: none"> <li>• Displays received AIS messages.</li> <li>• Opens the [AIS Message] menu.</li> </ul>                                                                                                                                                                                                   |
|   | [Brilliance] button. <ul style="list-style-type: none"> <li>• Adjusts the screen brilliance</li> <li>• Opens the [BRILLIANCE] menu.</li> <li>• Selects the color palette. See section 1.46.3.</li> </ul>                                                                                                                                             |
| <b>Lower Half - C-types (Standard and Simple display modes)</b>                     |                                                                                                                                                                                                                                                                                                                                                      |
|  | [Chart] button. <ul style="list-style-type: none"> <li>• Shows/hides the chart.</li> <li>• Opens the [CHART] menu.</li> </ul>                                                                                                                                                                                                                        |
|  | [Radar Map] button.<br>Shows/hides the radar map marks.                                                                                                                                                                                                                                                                                              |
|  | [HEADING LINE] button.<br>Left-click and hold to hide the heading line.                                                                                                                                                                                                                                                                              |
|  | [MOB] button<br>Inserts an MOB mark at the current OS location.                                                                                                                                                                                                                                                                                      |
|  | [WPT MARK] button. (Icon shown to the left changes depending on your selection.) <ul style="list-style-type: none"> <li>• Left-click/Spin the scrollwheel to select a waypoint (WPT) mark icon to use.</li> <li>• Right-click to show the [ROUTES•WAYPOINTS] menu.</li> </ul>                                                                        |
|  | [AIS Message] button. <ul style="list-style-type: none"> <li>• Displays received AIS messages.</li> <li>• Opens the [AIS Message] menu.</li> </ul>                                                                                                                                                                                                   |
|  | [Brilliance] button. <ul style="list-style-type: none"> <li>• Adjusts the screen brilliance</li> <li>• Opens the [BRILLIANCE] menu.</li> <li>• Selects the color palette. See section 1.46.3.</li> </ul>                                                                                                                                             |

## 1.5 Menu Operations

### 1.5.1 How to open and close the main menu

The main menu can be accessed from the control unit or from the on-screen box. The [MAIN MENU] appears in the information box at the right side of the screen.

#### From the control unit (RCU-014/RCU-031)

Press the **MENU** key on the control panel.

#### From the on-screen box

Select the [MENU] box, then press the **left button**.

| MAIN MENU |                  |
|-----------|------------------|
| 1         | ECHO             |
| 2         | MARKS            |
| 3         | NAV TOOLS        |
| 4         | ALERTS           |
| 5         | TT·AIS           |
| 6         | FILES            |
| 7         | INFORMATION BOX  |
| 8         | NAV LINE·WPT     |
| 9         | INITIAL SETTINGS |

IMO-types' Main Menu

| MAIN MENU |                  |
|-----------|------------------|
| 1         | ECHO             |
| 2         | MARKS·PLOTTER    |
| 3         | CURSOR·EBL·VRM   |
| 4         | ALERTS           |
| 5         | TT·AIS           |
| 6         | FILES            |
| 7         | INFORMATION BOX  |
| 8         | ROUTES·WAYPOINTS |
| 9         | INITIAL SETTINGS |


C-types' Main Menu

**Note 1:** For the sake of abbreviation in procedures, the above methods are written collectively as “Open the menu.” and “Close the menu.”

**Note 2:** Unless otherwise stated, this manual uses display and menu examples from the C-type.

## 1.5.2 How to operate the menus

1. Open the menu.
2. Roll the scrollwheel to select a menu item, then left-click. The menu item currently selected is highlighted and shown in reverse video. You can also select a menu item by pressing the corresponding numeric key on the control unit.

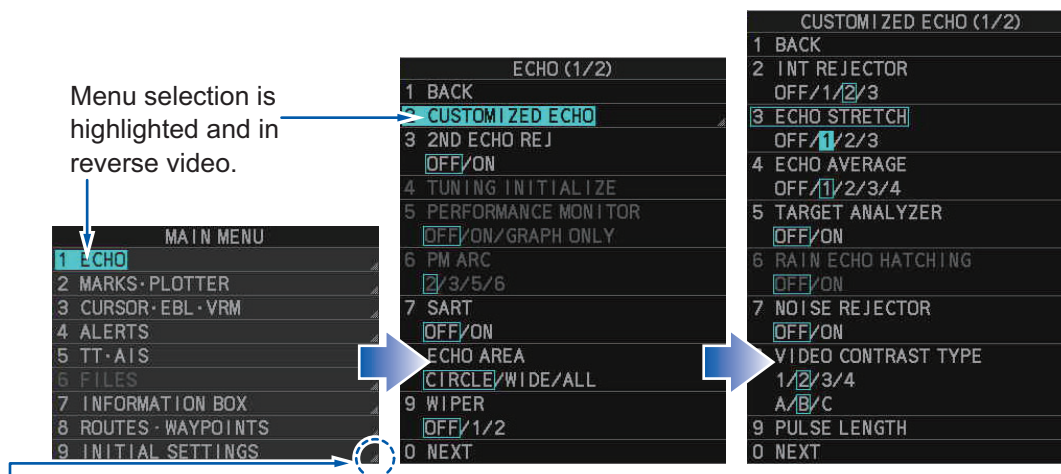

Select menu items with arrows (↵) to access the next menu layer.

In this example, the [ECHO] menu is accessed, then the [CUSTOMIZED ECHO] menu is accessed.

The next menu layer appears. Menu items with arrows, as shown in the above example figure, have their own menu layer. You can select these items to show the respective menu.

3. Roll the scrollwheel to select a menu item, then left-click. You can also select a menu item by pressing the corresponding numeric key.

When required, repeat this step to access the next menu.

In the example, [1 ECHO] is selected, which opens the [ECHO (1/2)] menu. Next, [2 CUSTOMIZED ECHO] is selected, which opens the [CUSTOMIZED ECHO (1/2)] menu. Finally, [3 ECHO STRETCH] is selected, in order to change settings. Menus such as the [ECHO] menu and [CUSTOMIZED ECHO] menu have more than one page. In this case, the currently displayed page is indicated in brackets to the right of the menu title.

**To view the next page of a menu,** select [0 NEXT].

**To go back one layer (or page) in the menu,** left-click [1 BACK], or right-click.

4. Roll the scrollwheel to select the desired setting, then left-click. The selected setting is highlighted and displayed in reverse video.

In the above example, the selected setting at [3 ECHO STRETCH] is [1].

5. Close the menu.

**Note 1:** Unless otherwise stated, operations in this manual use the scrollwheel for procedures which require menu selection, or settings changed.

**Note 2:** The term “Select” has the following meanings in this manual:

- Use the trackball to place the cursor on the indicated item, then left-click.
- Roll the scrollwheel to select the indicated menu option/setting.

### 1.5.3 Alphanumeric input


When alphanumeric input is required, the software keyboard (shown in the figure below) or the alphanumeric input window (C-types only) appears.

#### Operating the software keyboard

Select the number/character desired with the cursor, then left-click. When you finish entering the desired numbers/characters, left-click the [END] button on the software keyboard.



#### Alphanumeric input window

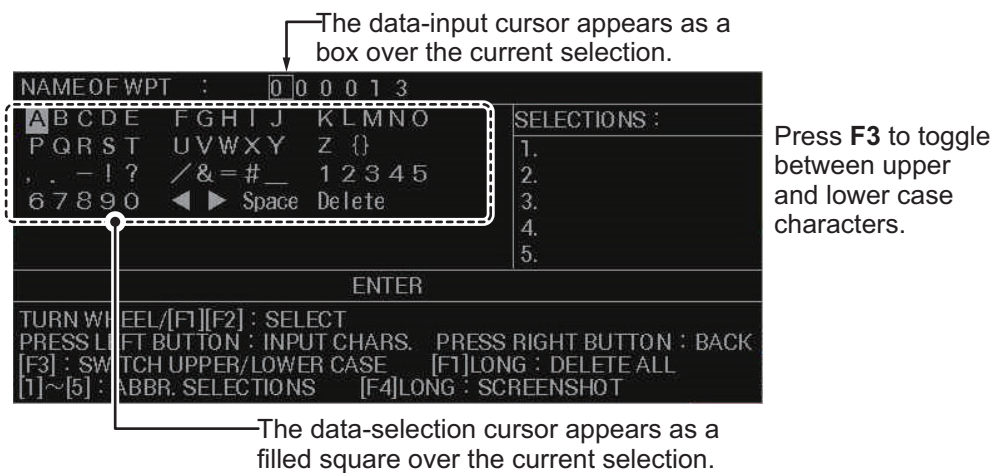

- Using the trackball or the scrollwheel, select the character/numeral you want to input, then left-click. The selected character/numeral appears at the location of the data-input cursor, then the data-input cursor moves to the next character/numeral.
- Repeat step 1 as required.
  - To move the data-input cursor, select [**◀**] or [**▶**] as required.
  - To delete a character/numeral, move the data-input cursor to the character/numeral that you want to delete, then left-click [Delete].
  - To clear the input area of all characters/numerals, press and hold **F1**.
- Select [ENTER] to complete alphanumeric input and close the window.

**Note:** You can store up to five “input shortcuts”. These shortcuts appear in the [SELECTIONS] column of the window. To create/edit a shortcut, press the appropriate key, as listed below.


- [SELECTION 1]: **1 HL OFF**
- [SELECTION 2]: **2 EBL OFFSET**
- [SELECTION 3]: **3 MODE**
- [SELECTION 4]: **4 OFF CENTER**
- [SELECTION 5]: **5 CU/TM RESET**

If no shortcuts are registered by the user, the system stores the 5 most frequently used items to each of the shortcuts.

## 1.6 How to Use the On-screen Box Menus

Some radar functions can be accessed using the on-screen box as a shortcut to the respective menus. A "►" at the right side of an on-screen box indicates that there is a menu shortcut available.

**Note:** The cursor changes shape according to its location. When placed outside the operational display area the cursor is an arrow (  ) shape. When placed inside the operational display area, it is a cross (  ).

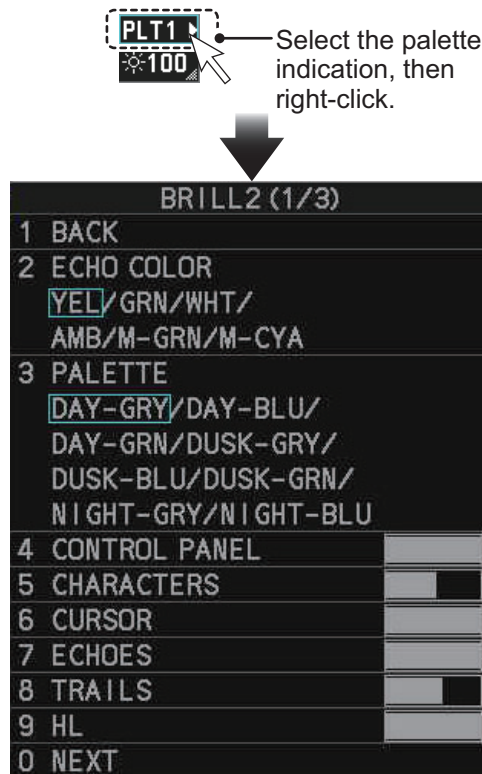

For the purpose of this example, place the cursor on the palette indication (displayed as "PLTx", where x is the currently selected palette number), inside the brilliance settings box at the bottom-left of the screen.

The selected item appears highlighted with a light-blue colored box.

Right-click to show the brilliance menu.

Shortcuts are available from the following on-screen boxes/indications/buttons:

- [PICTURE] box.
- [AIS] box.\*
- [TT] box.\*
- [HDG] indication.
- [SPD] indication.
- [POSN] indication.
- [PLT] indication.
- [ANTENNA SELECTION] box.
- User settings box.\*\*
- [MARK] box.
- Time indication ("UTC" or "Local").
- [TRAIL] indication.
- [CHART] button.\*\*\*
- [WPT MARK] button.\*\*\*

\*: Not shown on C-type simple display.

\*\*: Shown only on IMO-types.

\*\*\*: Shown only on C-types.

## 1.7 [CURSOR] Menu and Cursor Operations


### 1.7.1 How to show/hide the cursor (C-type only)

You can show/hide the cursor with one of the following methods:

- Press the **9 CURSOR ON/OFF** key.
- Press the **3 MODE** key. This method requires [5 MODE KEY FUNCTION] set to [CURSOR ON-OFF] (located in [9 INITIAL SETTINGS] → page 2 of [5 OPERATIONS] menu; see section 1.9).
- Press the function key assigned with [CURSOR ON-OFF] (see section 1.8).
- Select [CURSOR ON-OFF] from the [CURSOR] menu (see section 1.7.3).

### 1.7.2 Cursor data box

Place the cursor on a target/echo to show information for that location in the cursor data box, located at the top-right of the display (see example figure below).

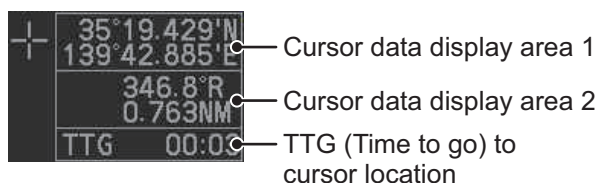

The following data can be shown in the cursor data box.

| Radar type                                                                                              | Cursor data display area 1                                                                                                                                                                                                                                               | Cursor data display area 2                                                                                                                     |
|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| IMO-type                                                                                                | Latitude/longitude for the cursor location.                                                                                                                                                                                                                              | <ul style="list-style-type: none"><li>• Range and bearing to the cursor location.</li><li>• X/Y coordinates for the cursor location.</li></ul> |
| C-type                                                                                                  | <ul style="list-style-type: none"><li>• Latitude/longitude for the cursor location.</li><li>• Range and bearing to the cursor location.</li><li>• X/Y coordinates for the cursor location.</li><li>• Difference between cursor location and Loran/Decca data.*</li></ul> |                                                                                                                                                |
| *: Requires [8 LORAN/DECCA] set to [ON] in the [4 CURSOR] menu (located in the [3 CURSOR•EBL•VRM] menu) |                                                                                                                                                                                                                                                                          |                                                                                                                                                |

Place the cursor on the cursor data area (1 or 2) in the cursor data box, then press the **left button** to change the displayed information. For IMO-types, data area 1 is fixed at latitude/longitude and cannot be changed.


**Note 1:** For the X-Y co-ordinates display, the Y-axis is the upper/lower half of the screen, the upper half of the screen is “plus” and the lower part of the screen is “minus”. The X-axis is the left/right-side of the screen, right is “plus”, left is “minus”.

**Note 2:** Cursor data reads “- - -” when the cursor is placed outside the operational display area.

### 1.7.3 How to Use the [CURSOR] Menu

Functions that require the use of the cursor, such as EBL offset and zoom, can be activated directly from the [CURSOR] menu. Below is the procedure for choosing cursor-related functions from the [CURSOR] menu.

1. Select the operational display area, then press the **right button**.  
The [CURSOR] menu appears.
2. Select the desired function, then left-click.
3. The guidance box shows "XX / EXIT" (XX = function selected). Use the trackball to place the cursor where desired.  
**Note:** You can also select the cursor function, when the cursor is inside the operational display area, by spinning the scrollwheel.
4. Left-click to execute the function selected at step 3.
5. To quit the selected function, right-click when the guidance box shows "XX / EXIT" (XX = function selected).  
The table below lists the contents of the cursor context menu with a brief description.

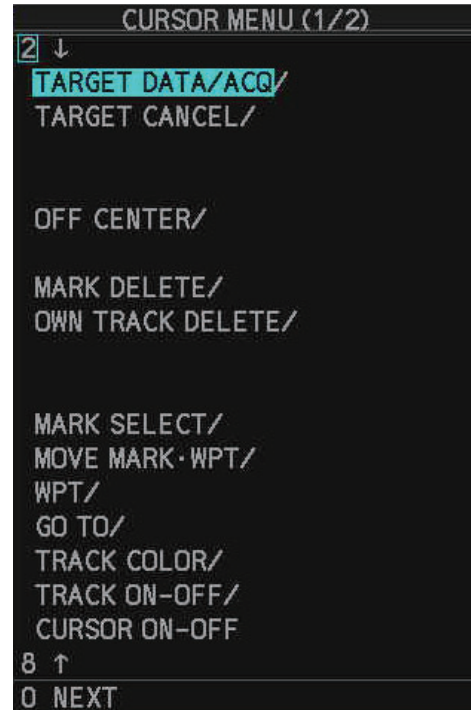

| Menu Item                     | Description                                                                                                                                                 |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Page 1                        |                                                                                                                                                             |
| [TARGET DATA / ACQ]           | <b>TT:</b> Acquires target; displays data for selected tracked target.<br><b>AIS:</b> Activates sleeping AIS target; displays data for selected AIS target. |
| [TARGET CANCEL]               | <b>TT:</b> Cancels tracking on selected tracked target.<br><b>AIS:</b> Sleeps selected AIS target.                                                          |
| [TT TGT DATA / ACQ]           | Acquires selected echo as tracked target.                                                                                                                   |
| [REF MARK]* <sup>1</sup>      | Inscribes reference mark, for target-based speed input.                                                                                                     |
| [EBL OFFSET]                  | Offsets EBL to measure range and bearing between two targets.                                                                                               |
| [OFFCENTER]                   | Shifts screen center to selected location.                                                                                                                  |
| [ZOOM]                        | Zooms selected location.                                                                                                                                    |
| [MARK DELETE]                 | Deletes selected mark (plotter mark, origin mark or waypoint mark).                                                                                         |
| [OWN TRACK DELETE]            | Deletes own ship's tracks.                                                                                                                                  |
| [MAP ALIGN]                   | Aligns charts (maps) with the radar picture.                                                                                                                |
| [TRAIL ERASER]* <sup>2</sup>  | Erases trails.                                                                                                                                              |
| [MARK SELECT]* <sup>2</sup>   | Opens the [MARK COLOR/SHAPE] window.                                                                                                                        |
| [MOVE MARK·WPT]* <sup>2</sup> | Moves the selected mark or waypoint.                                                                                                                        |
| [WPT]* <sup>2</sup>           | Inserts a waypoint.                                                                                                                                         |
| [GO TO]* <sup>2</sup>         | Selects/deselect a destination.                                                                                                                             |

| Menu Item                                                                            | Description                            |
|--------------------------------------------------------------------------------------|----------------------------------------|
| [TRACK COLOR]* <sup>2</sup>                                                          | Opens the [CHANGE TRACK COLOR] window. |
| [TRACK ON/OFF]* <sup>2</sup>                                                         | Start/stop track recording.            |
| [CURSOR ON/OFF]* <sup>2</sup>                                                        | Show/hide the cursor.                  |
| Page 2                                                                               |                                        |
| [TARGET DATA / ACQ SETTING]                                                          | Change target tracking settings.       |
| [TARGET CANCEL SETTING]                                                              | Change target cancel settings.         |
| [CIRCLE CURSOR]* <sup>2</sup>                                                        | Insert/remove the circle cursor.       |
| * <sup>1</sup> : For C-types, this menu item appears on page 2 of the [CURSOR] menu. |                                        |
| * <sup>2</sup> : These menu items only appear for C-types.                           |                                        |

**Note 1:** Menu items set to [OFF] at [CURSOR MENU SELECT] (located in [9 INITIAL SETTINGS] → page 2 of the [5 OPERATION] menu) are not shown in the [CURSOR] menu.

**Note 2:** The following [CURSOR] menu items appear for C-types when the cursor is shown.

- [TARGET CANCEL]
- [TT TGT DATA / ACQ]
- [REF MARK]
- [EBL OFFSET]
- [ZOOM]
- [MARK DELETE]
- [MAP ALIGN]
- [TRAIL ERASER]
- [MOVE MARK•WPT]

**Note 3:** The following items are not shown in the CURSOR menu when the radar is transmitting.

- [TT TGT DATA / ACQ]
- [REF MARK]
- [EBL OFFSET]
- [ZOOM]
- [MAP ALIGN]
- [TRAIL ERASER]

### 1.7.4 How to change the cursor data attributes (C-type only)

You can change the cursor bearing reference, cursor range unit, cursor size and also align the cursor by latitude/longitude. Changing some of these settings affects the indications in the cursor data display.

1. Open the menu.
2. Select [3 EBL•VRM•CURSOR SET].
3. Select [4 CURSOR]. The [CURSOR] menu appears.

| CURSOR |                      |
|--------|----------------------|
| 1      | BACK                 |
| 2      | CURSOR BEARING       |
|        | REL/TRUE             |
| 3      | CURSOR RANGE         |
|        | NM/km/SM/kyd         |
| 4      | CURSOR SIZE          |
|        | SMALL/LARGE          |
| 5      | CURSOR L/L ALIGN     |
|        | OFF/ON               |
| 6      | ENLARGED CURSOR INFO |
|        | OFF/ON               |
| 7      | CURSOR COLOR         |
|        | RED/GRN/BLU/YEL/     |
|        | CYA/MAG/WHT          |
| 8      | LORAN/DECCA          |
|        | OFF/ON               |

## 1. OPERATIONAL OVERVIEW

### 4. Select the item you want to change, referring to the list below.

- [2 CURSOR BEARING]: Sets the bearing reference.
- [3 CURSOR RANGE]: Sets the unit of measurement for cursor range.  
**Note:** If a different measurement unit is used for short distances, adjust the setting (see section 1.32.4).
- [4 CURSOR SIZE]: Sets the cursor size.
- [5 CURSOR L/L ALIGN]\*: Sets whether to align the cursor with latitude/longitude.



- [6 ENLARGED CURSOR INFO]: Sets whether to show enlarged cursor data box contents in a separate window. You can move the enlarged data box with the following procedure:
  - 1) Place the cursor on the enlarged data box, then left-click.
  - 2) Use the trackball to move the data box to the desired location.
  - 3) Left-click to “anchor” the box at the new location.
- [7 CURSOR COLOR]: Sets the color for the cursor.
- [8 LORAN/DECCA]: Sets whether to show LORAN/DECCA data in the cursor data box.

\*: For IMO-types, this menu item is located in [MAIN MENU] → [3 NAV TOOLS] → [3 EBL•VRM•CURSOR SET].

### 5. Close the menu.

## 1.8 Function Keys

Some menu functions and menus can be assigned to a function key. This allows one-touch access to the assigned function or menu.


### 1.8.1 How to set the function key mode (C-types only)

You can set the function keys to have on of the following modes:

- SINGLE: One function per function key, activated when the key is pressed.
- MULTI: Multiple functions per function key. A function selection window appears when the key is pressed.

To set the function mode, do the following:

1. Open the [MAIN MENU].
2. Select [9 INITIAL SETTINGS].
3. Select [6 FUNCTION KEY SETUP].
4. [0 NEXT] to show the second page of the menu.
5. Select the appropriate function key whose mode you want to change.
6. Select [SINGLE] or [MULTI], as required.
7. Close the menu.

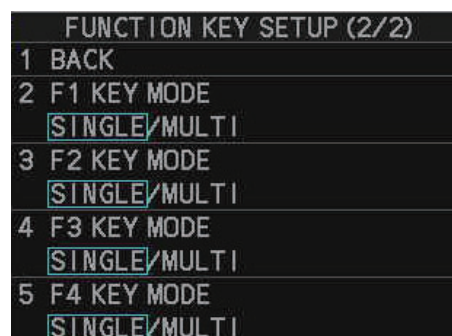

## 1.8.2 How to use the function keys

To activate an assigned function, press the corresponding function key (**F1**, **F2**, **F3** or **F4**). The pre-assigned (default) functions differ, depending on your radar type (C-types or IMO-type) and the selected mode (C-types only).

### Default functions for C-types using [SINGLE] mode and IMO-types

| Function key | IMO-type default           | C-type default |
|--------------|----------------------------|----------------|
| <b>F1</b>    | IR (Interference Rejector) | TRK COLOR SEL  |
| <b>F2</b>    | ES (Echo Stretch)          | TRK INTVL      |
| <b>F3</b>    | AUTO-SEA                   | MARK SELECT    |
| <b>F4</b>    | AUTO-RAIN                  | TLL            |

### Default function for C-types using [MULTI] mode

| F1               | F2                  | F3               | F4               |
|------------------|---------------------|------------------|------------------|
| 2 TRK COLOR SEL  | 2 TRK INTVL         | 2 MARK SELECT    | 2 TLL            |
| 3 IR             | 3 CHART DISPLAY     | 3 WPT            | 3 MOB            |
| 4 ES             | 4 NAV AIDS          | 4 GO TO          | 4 DISPLAY MODE   |
| 5 EAV            | 5 OWN TRACK DISPLAY | 5 TRK COLOR SEL  | 5 SCREEN SHOT    |
| 6 ACE            | 6 TT-DISP           | 6 TRK INTVL      | 6 (Not assigned) |
| 7 AUTO-SEA       | 7 AIS-DISP          | 7 CURSOR ON-OFF  | 7 (Not assigned) |
| 8 AUTO-RAIN      | 8 ((Not assigned))  | 8 (Not assigned) | 8 (Not assigned) |
| 9 (Not assigned) | 9 (Not assigned)    | 9 (Not assigned) | 9 (Not assigned) |

To activate an assigned function [MULTI] mode, do the following:

1. Press the function key that contains the function you want to use.  
The corresponding menu appears. (**F4** is pressed in the following example.)

| F4 KEY EXECUTION |                 |
|------------------|-----------------|
| 1                | TLL             |
| 2                | MOB             |
| 3                | DISPLAY MODE    |
| 4                | SCREEN SHOT     |
| 5                |                 |
| 6                |                 |
| 7                |                 |
| 8                |                 |
| 9                | F4 FUNCTION KEY |
| 0                | CLOSE           |

2. Select the appropriate function.

**Note:** You can select [9 Fx FUNCTION KEY] (where “x” is the number of the selected function key) to access the function key setup menu.

### 1.8.3 How to change the function(s) assigned to a key

You can change the function assigned to each key using the following procedure.

1. Open the [MAIN MENU].
2. Select [9 INITIAL SETTINGS].
3. Select [6 FUNCTION KEY SETUP]. The function key setup menu appears.



When [SINGLE] is selected as the key mode, the current setting for the function key is shown here. Function keys with [MULTI] selected as their mode are hidden.

4. Select the function key to set up.  
**Note:** If the selected key's mode is set to [MULTI], the function selection menu appears after you select the function key.
5. Referring to the table of available functions below, select a function category, then left-click.

You can check the currently assigned functions in the bottom half of the menu.

| Function category | Available functions                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [2 ECHO]          | CUSTOM SELECT, IR, ES, EAV, NOISE REJ, ANT SELECT, PULSE LENGTH, AUTO-SEA, AUTO-RAIN, TUNE SELECT* <sup>4</sup> , TX CHANNEL* <sup>3</sup> , 2ND ECHO REJ, STC CURVE, STC RANGE, PM, SART, ECHO TRAIL, TRAIL T/R, WIPER* <sup>1</sup> , ACE, ACE HIGH SENSITIVITY, TARGET ANALYZER                                                                                                       |
| [3 STD KEY]       | ALERT ACK, STBY TX, HL OFF, EBL OFFSET, ORIENTATION-MODE, OFF CENTER, CU-TM RESET, PI LINE, VECTOR TIME, VECTOR MODE, TARGET LIST, BRILL, MARK, MENU, RANGE UP, RANGE DOWN, ACQ, TARGET DATA, TARGET CANCEL                                                                                                                                                                              |
| [4 TT•AIS]        | TT-DISP, AIS-DISP, TARGET DATA & ACQ, PAST POSN INTERVAL, REF MARK, CPA LIMIT, CPA, TCPA, AZ1, AZ2, TARGET LIST SORT, TRIAL MANEUVER* <sup>2</sup> , TRIAL MODE CHANGE* <sup>2</sup> , ASSOCIATION, AIS MESSAGE, AIS SCALED SYMBOL, CONSORT-DISP* <sup>1</sup> , GPS BUOY-DISP* <sup>1</sup> , CONSORT LIST* <sup>1</sup> , GPS BUOY LIST* <sup>1</sup> , CONSORT MESSAGES* <sup>1</sup> |
| [5 DELETE DATA]   | MARK DELETE, MARK ALL DELETE, OWN TRK DELETE, OWN TRK ALL DELETE, TGT TRK DELETE* <sup>1</sup> , TGT TRK ALL DELETE* <sup>1</sup>                                                                                                                                                                                                                                                        |
| [6 OPERATION]     | BUZZER STOP, ECHO AREA* <sup>1</sup> , ECHO COLOR, PALETTE, RING(ON/OFF), ZOOM, MOB* <sup>2</sup> , ALARM1, ALARM2, WATCH ALERT RESET, TLL* <sup>1</sup> , MAP ALIGN, ANCHOR WATCH, DROP MARK, SCREEN SHOT, CHART DISPLAY* <sup>1</sup> , NAV AIDS* <sup>1</sup> , CURSOR ON-OFF* <sup>1</sup> , CURSOR CENTER/DISPLAY MODE* <sup>1</sup>                                                |

| Function category                                                                                                                                           | Available functions                                                                                                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7 PLOTTER]* <sup>1</sup>                                                                                                                                   | WPT, GO TO, WAYPOINT LIST, MARK SELECT, TRK COLOR SEL, TRK INTVL, PLOTTER, EDIT TRACK, MARK SIZE, WAYPOINT MARK, OWN TRACK DISPLAY, TRK ROUTE CONVERSION, GRID, ENLARGED CURSOR INFO, TRK TEMP DATA DISP, TRK DEPTH DATA DISP |
| [8 PICTURE]* <sup>1</sup>                                                                                                                                   | PICTURE1 through PICTURE12                                                                                                                                                                                                    |
| * <sup>1</sup> : C-types only; * <sup>2</sup> : IMO-types only; * <sup>3</sup> : Used for SSD radars only; * <sup>4</sup> : Used for magnetron radars only. |                                                                                                                                                                                                                               |

- Repeat the procedure as necessary to set up other function keys.
- Close the menu.

## 1.9 How to Customize Operation

Several operation items can be customized to suit your needs.

- Open the menu.
- Select [9 INITIAL SETTING].
- Select [5 OPERATION]. The [OPERATION] menu appears.
- Referring to the table below, press the menu item number to select the appropriate menu item to customize.

| OPERATION(1/2) |                                     |
|----------------|-------------------------------------|
| 1              | BACK                                |
| 2              | MOUSE WHEEL DIR<br>[NORMAL]/REVERSE |
| 3              | KEY BEEP<br>[OFF]/LOW/MID/HIGH      |
| 4              | OWN SHIP VECTOR<br>OFF/HDG/[COURSE] |
| 5              | STERN UP RM<br>OFF/[ON]             |
| 6              | DISPLAY MODE<br>[NORMAL]/SIMPLE     |
| 7              | ICING PREVENTION<br>[OFF]/ON        |
| 8              | HDG FINE ADJUST<br>+0. 0°           |
| 9              | USB MOUSE SPEED<br>1/2/[3]/4/5      |
| 0              | NEXT                                |

| Menu items                     | Description                                                                                                                                                                                                                                                                                       |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Page 1                         |                                                                                                                                                                                                                                                                                                   |
| [2 MOUSE WHEEL DIR]            | Sets the direction of the wheel drive (scrollwheel). <ul style="list-style-type: none"> <li>[NORMAL]: Scroll downwards to increase, or upwards to decrease the value.</li> <li>[REVERSE]: Scroll directions are reverse of [NORMAL].</li> </ul>                                                   |
| [3 KEY BEEP]                   | Changes the key beep volume.<br>Select [OFF] to silence the key beeps. Select [LOW], [MID], [HIGH] to adjust the volume for key beeps.                                                                                                                                                            |
| [4 OWN SHIP VECTOR]            | Select how the own ship vector is displayed. <ul style="list-style-type: none"> <li>[OFF]: Own ship vector is not displayed.</li> <li>[HDG]: Vector is displayed in heading direction.</li> <li>[COURSE]: Vector is displayed in course direction.</li> </ul>                                     |
| [5 STERN UP RM]* <sup>1</sup>  | Select [ON] to show [STERN UP RM] orientation in the selection cycle (see section 1.30).                                                                                                                                                                                                          |
| [6 DISPLAY MODE]* <sup>1</sup> | Switch between [SIMPLE] and [NORMAL] display mode. See section 1.4.1 for display examples.<br><b>Note:</b> TT/AIS settings are not available in the simple display. To change or adjust TT/AIS settings, make the changes/adjustments at the standard display, then switch to the simple display. |
| Continued on following page    |                                                                                                                                                                                                                                                                                                   |
| Continued from previous page   |                                                                                                                                                                                                                                                                                                   |

## 1. OPERATIONAL OVERVIEW

| Menu items                           | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------|--------|--------|---------------------------|--------------------------|-----------------------------|-------------------------|------------------------|---------------------------|------------------------|-----------------|------------------|-------------------|-------------------------|-------------------------|------------------------------|--------------------------|-----------------------|---------------------------|--------|--|
| [6 SHUTTLE FERRY]* <sup>2</sup>      | <p>Sets the shuttle ferry mode to use.</p> <ul style="list-style-type: none"> <li>[OFF]: Shuttle ferry mode is deactivated.</li> <li>[MODE1]: Shuttle ferry mode is activated. See "Shuttle ferry mode (IMO-types only)" on next page.</li> <li>[MODE2]: Shuttle ferry mode is activated. See "Shuttle ferry mode (IMO-types only)" on next page.</li> </ul> <p><b>Note:</b> Shuttle ferry mode requires an external switch.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| [7 ICING PREVENTION]                 | Select [ON] to rotate the antenna without transmission, to prevent ice buildup. See section 1.54.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| [8 HDG FINE ADJUST]                  | Adjusts the heading line location. 0.0°, the default setting, shows the heading line pointing towards the top of the screen.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| [9 USB MOUSE SPEED]                  | Adjust the USB mouse sensitivity. A higher value increase the mouse cursor's movement speed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| Page 2                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| [2 AUTO COURSE UP RESET]             | Select [ON] to enable, or [OFF] to disable the automatic reset of the screen when using COURSE UP orientation and your course is more than 22.5° to either side the center of the screen.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| [3 DISPLAY SCROLL]* <sup>1</sup>     | Select [ON] to enable, [OFF] to disable display scrolling. When set to [ON], move the cursor to the edge of the screen in the direction you want to scroll.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| [4 CURSOR MENU SELECT]* <sup>1</sup> | <p>Open the [CURSOR MENU SELECT] menu. You can show/hide menu items which appear in the [CURSOR] menu. Select [OFF] to hide, [ON] to show the menu item.</p> <div> <table> <thead> <tr> <th>CURSOR MENU SELECT (1/2)</th><th>CURSOR MENU SELECT (2/2)</th></tr> </thead> <tbody> <tr><td>1 BACK</td><td>1 BACK</td></tr> <tr><td>2 TARGET CANCEL<br/>OFF/ON</td><td>2 TRAIL ERASER<br/>OFF/ON</td></tr> <tr><td>3 TT TGT DATA/ACQ<br/>OFF/ON</td><td>3 MARK SELECT<br/>OFF/ON</td></tr> <tr><td>4 EBL OFFSET<br/>OFF/ON</td><td>4 MOVE MARK·WPT<br/>OFF/ON</td></tr> <tr><td>5 OFF CENTER<br/>OFF/ON</td><td>5 WPT<br/>OFF/ON</td></tr> <tr><td>6 ZOOM<br/>OFF/ON</td><td>6 GO TO<br/>OFF/ON</td></tr> <tr><td>7 MARK DELETE<br/>OFF/ON</td><td>7 TRACK COLOR<br/>OFF/ON</td></tr> <tr><td>8 OWN TRACK DELETE<br/>OFF/ON</td><td>8 TRACK ON-OFF<br/>OFF/ON</td></tr> <tr><td>9 MAP ALIGN<br/>OFF/ON</td><td>9 CURSOR ON-OFF<br/>OFF/ON</td></tr> <tr><td>0 NEXT</td><td></td></tr> </tbody> </table> </div> | CURSOR MENU SELECT (1/2) | CURSOR MENU SELECT (2/2) | 1 BACK | 1 BACK | 2 TARGET CANCEL<br>OFF/ON | 2 TRAIL ERASER<br>OFF/ON | 3 TT TGT DATA/ACQ<br>OFF/ON | 3 MARK SELECT<br>OFF/ON | 4 EBL OFFSET<br>OFF/ON | 4 MOVE MARK·WPT<br>OFF/ON | 5 OFF CENTER<br>OFF/ON | 5 WPT<br>OFF/ON | 6 ZOOM<br>OFF/ON | 6 GO TO<br>OFF/ON | 7 MARK DELETE<br>OFF/ON | 7 TRACK COLOR<br>OFF/ON | 8 OWN TRACK DELETE<br>OFF/ON | 8 TRACK ON-OFF<br>OFF/ON | 9 MAP ALIGN<br>OFF/ON | 9 CURSOR ON-OFF<br>OFF/ON | 0 NEXT |  |
| CURSOR MENU SELECT (1/2)             | CURSOR MENU SELECT (2/2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| 1 BACK                               | 1 BACK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| 2 TARGET CANCEL<br>OFF/ON            | 2 TRAIL ERASER<br>OFF/ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| 3 TT TGT DATA/ACQ<br>OFF/ON          | 3 MARK SELECT<br>OFF/ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| 4 EBL OFFSET<br>OFF/ON               | 4 MOVE MARK·WPT<br>OFF/ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| 5 OFF CENTER<br>OFF/ON               | 5 WPT<br>OFF/ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| 6 ZOOM<br>OFF/ON                     | 6 GO TO<br>OFF/ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| 7 MARK DELETE<br>OFF/ON              | 7 TRACK COLOR<br>OFF/ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| 8 OWN TRACK DELETE<br>OFF/ON         | 8 TRACK ON-OFF<br>OFF/ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| 9 MAP ALIGN<br>OFF/ON                | 9 CURSOR ON-OFF<br>OFF/ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| 0 NEXT                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| [5 MODE KEY FUNCTION]* <sup>1</sup>  | <p>Set the behavior of the [3 MODE] key.</p> <ul style="list-style-type: none"> <li>[ORIENTATION]: change the orientation mode with each press.</li> <li>[CURSOR ON-OFF]: Show/hide the cursor with each press.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |
| [6 TRAIL TIME LINK]* <sup>1</sup>    | <ul style="list-style-type: none"> <li>[NO LINK]: Trail time is not linked with changes in range.</li> <li>[LINK RANGE]: Link [TRAIL TIME] with the range. As the range changes, the trail time is also automatically regulated to show a constant trail. When linked, the trail time indication appears in yellow color.</li> </ul> <p><b>Note 1:</b> When using a range that is valid only when in stand-by mode, the trail time is automatically adjusted to match either the maximum or minimum range available in transmit mode.</p> <p><b>Note 2:</b> Linking is only applied when [TRAIL TIME] is set to [NORMAL] (see section 1.37.2).</p>                                                                                                                                                                                                                                                                                                                                                          |                          |                          |        |        |                           |                          |                             |                         |                        |                           |                        |                 |                  |                   |                         |                         |                              |                          |                       |                           |        |  |