



FCC Test Report

FCC Part 15.247 for DSSS systems

for the
SONY Corporation

Notebook PC

Model Number: VAIO-VGN TZ

FCC ID: AK8PCG4L1L

IC-ID: 409B-PCG4L1L

TEST REPORT #: SONYE_016_07001_FCC15_247WLAN_AK8PCG4L1L
DATE: 4/25/2007



FCC listed#
101450

IC recognized

3925

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

TABLE OF CONTENTS

1	ASSESSMENT	3
	TECHNICAL RESPONSIBILITY FOR AREA OF TESTING:	3
	EMC & Radio	3
2	ADMINISTRATIVE DATA	4
2.1	Identification of the Testing Laboratory Issuing the SAR Assessment Report	4
2.2	Identification of the Client	4
2.3	Identification of the Manufacturer	4
3	EQUIPMENT UNDER TEST (EUT)	5
3.1	Specification of the Equipment under Test	5
4	SUBJECT OF INVESTIGATION	6
5	MEASUREMENTS	7
5.1.1	MAXIMUM PEAK OUTPUT POWER § 15.247 (b) (1)	7
5.2	RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205	20
5.2.1	LIMITS	20
5.2.2	Results Lower Restricted Band 2310 MHz to 2390 MHz	21
5.2.3	Results Upper Restricted Band 2483.5 MHz to 2500 MHz	29
5.3	TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209	37
5.3.1	LIMITS	37
5.3.2	RESULTS	38
5.4	AC POWER LINE CONDUCTED EMISSIONS § 15.107/207	50
5.4.1	Limits	50
5.4.2	Results	51
6	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	52
7	BLOCK DIAGRAMS	53



The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the SAR Assessment Report

Company Name:	CETECOM Inc.
Department:	SAR
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt

2.2 Identification of the Client

Applicant's Name:	SONY Corporation
Address:	1-7-1 Konan, Minato-ku, Tokyo 108-0075, Japan
Contact Person:	Michio Kobayashi
Phone No.	+81-263-72-5696
Fax:	+81-263-72-9755
e-mail:	Michio.Kobayashi@jp.sony.com

2.3 Identification of the Manufacturer

Manufacturer's Name:	Sony EMCS Corporation
Manufacturer's Address:	5432 Toyoshima, Azumino-Shi, Nagano 399- 8282 Japan

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Product Type	Notebook PC
Marketing Name:	VAIO-VGN TZ
Model No:	PCG-4L1L
FCC-ID:	AK8PCG4L1L
IC-ID :	409B-PCG4L1L
Frequency Range:	2412 MHz to 2462 MHz
Number of Channels	
Type(s) of Modulation:	OFDM
Antenna Type:	PIFA
Output Power ¹ :	19.04 dBm (0.08W) EIRP WLAN 802.11b 26.02 dBm (0.4W) EIRP WLAN 802.11g



4 Subject Of Investigation

All testing was performed on the product referred to in Section 3 as EUT.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations. The maximization of portable equipment is conducted in accordance with ANSI C63.4.

5 Measurements

5.1.1 MAXIMUM PEAK OUTPUT POWER (RADIATED)

§ 15.247 (b) (1)

EIRP:

802.11b

TEST CONDITIONS			MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)			2412	2437	2462
Chain A	$T_{\text{nom}}(23)^{\circ}$ C	V_{nom}	15.27	16.83	19.04
Chain B	$T_{\text{nom}}(23)^{\circ}$ C	V_{nom}	13.77	14.95	14.82
Measurement uncertainty			$\pm 0.5\text{dBm}$		

802.11g

TEST CONDITIONS			MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)			2412	2437	2462
Chain A	$T_{\text{nom}}(23)^{\circ}$ C	V_{nom}	22.52	24.02	26.02
Chain B	$T_{\text{nom}}(23)^{\circ}$ C	V_{nom}	17.13	20.55	20.41
Measurement uncertainty			$\pm 0.5\text{dBm}$		

EIRP: 2412MHz (802.11b) Chain A

CETECOM Inc.

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 1, 1Mbps, chain A

ANT Orientation: H

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "EIRP RLAN CH1"

Marker: 2.412951904 GHz 15.27 dBm

Level [dBm]

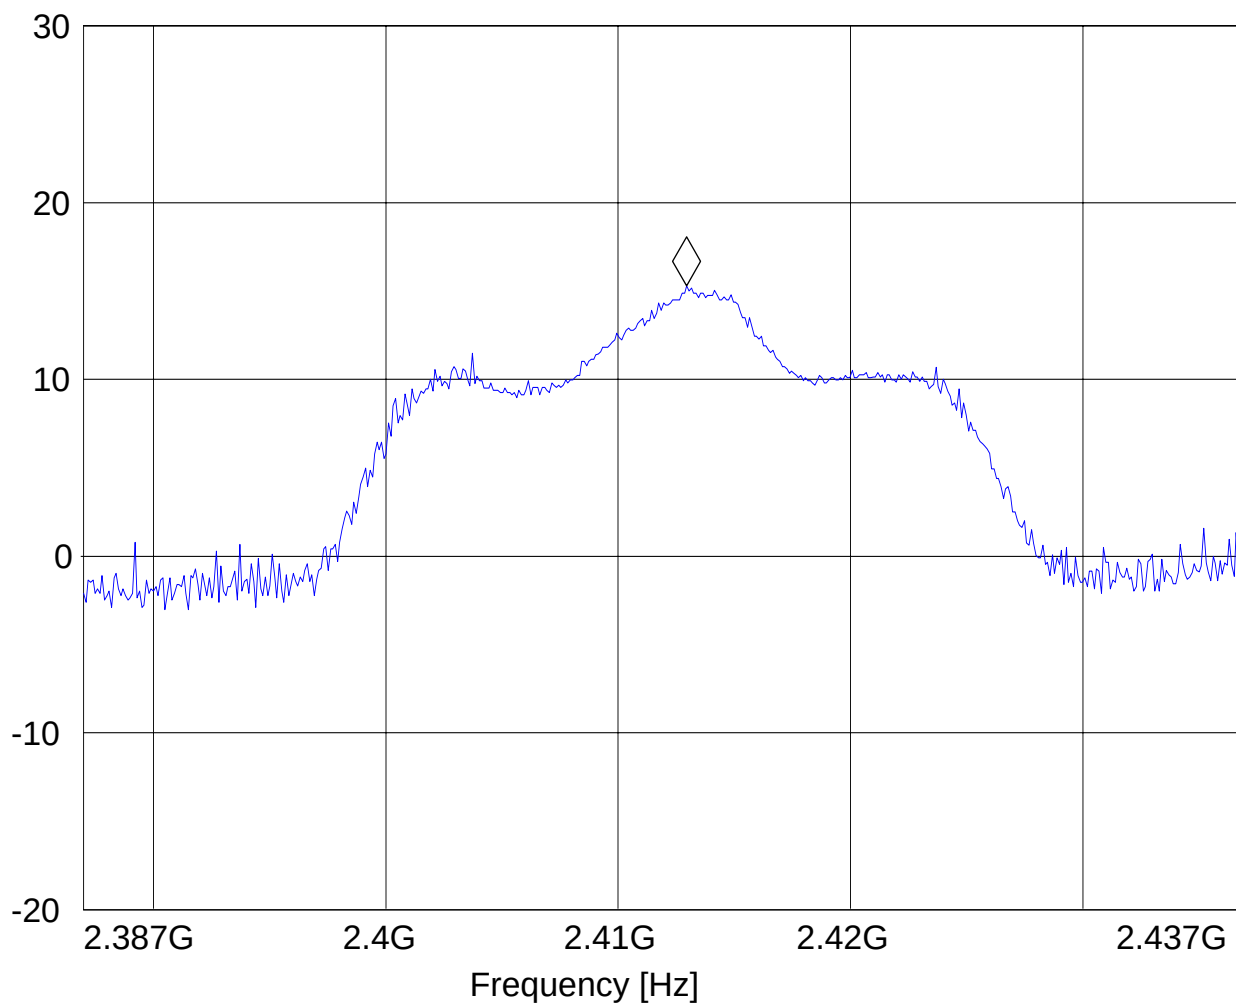



EIRP: 2412MHz (802.11b) Chain B

CETECOM Inc.

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 1, 1Mbps, chain A

ANT Orientation: V


EUT Orientation: H

Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "EIRP RLAN CH1"

Marker: 2.414254509 GHz 13.77 dBm

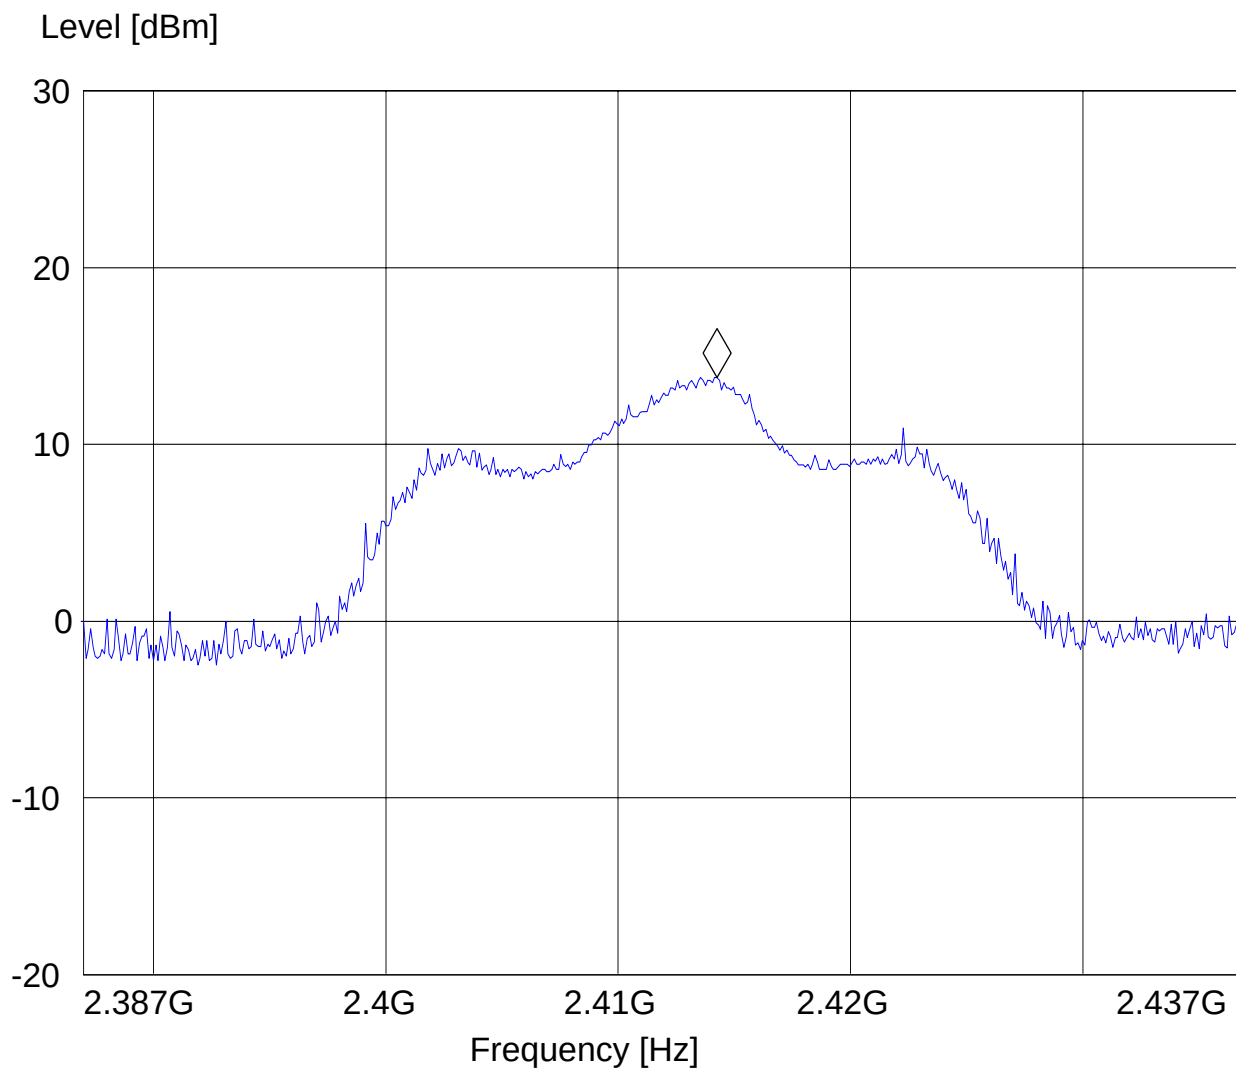



EIRP: 2437MHz (802.11b) Chain A

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 6, 1Mbps, chain A

ANT Orientation: H


EUT Orientation: H

Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "EIRP RLAN CH6"

Marker: 2.438452906 GHz 16.83 dBm

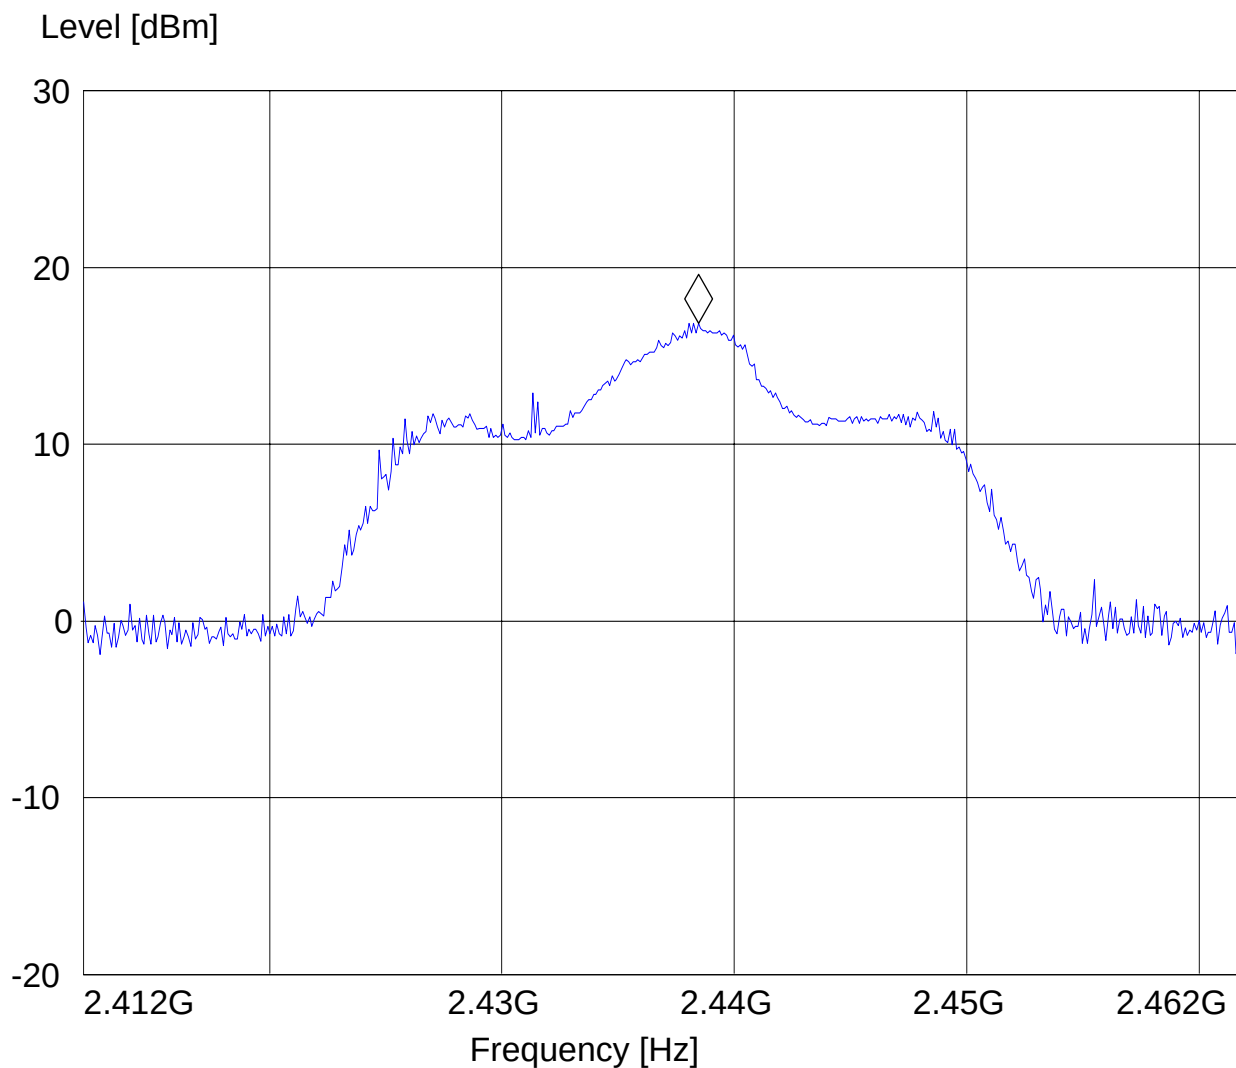



EIRP: 2437MHz (802.11b) Chain B

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 6, 1Mbps, chain A

ANT Orientation: V


EUT Orientation: H

Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "EIRP RLAN CH6"

Marker: 2.438252505 GHz 14.95 dBm

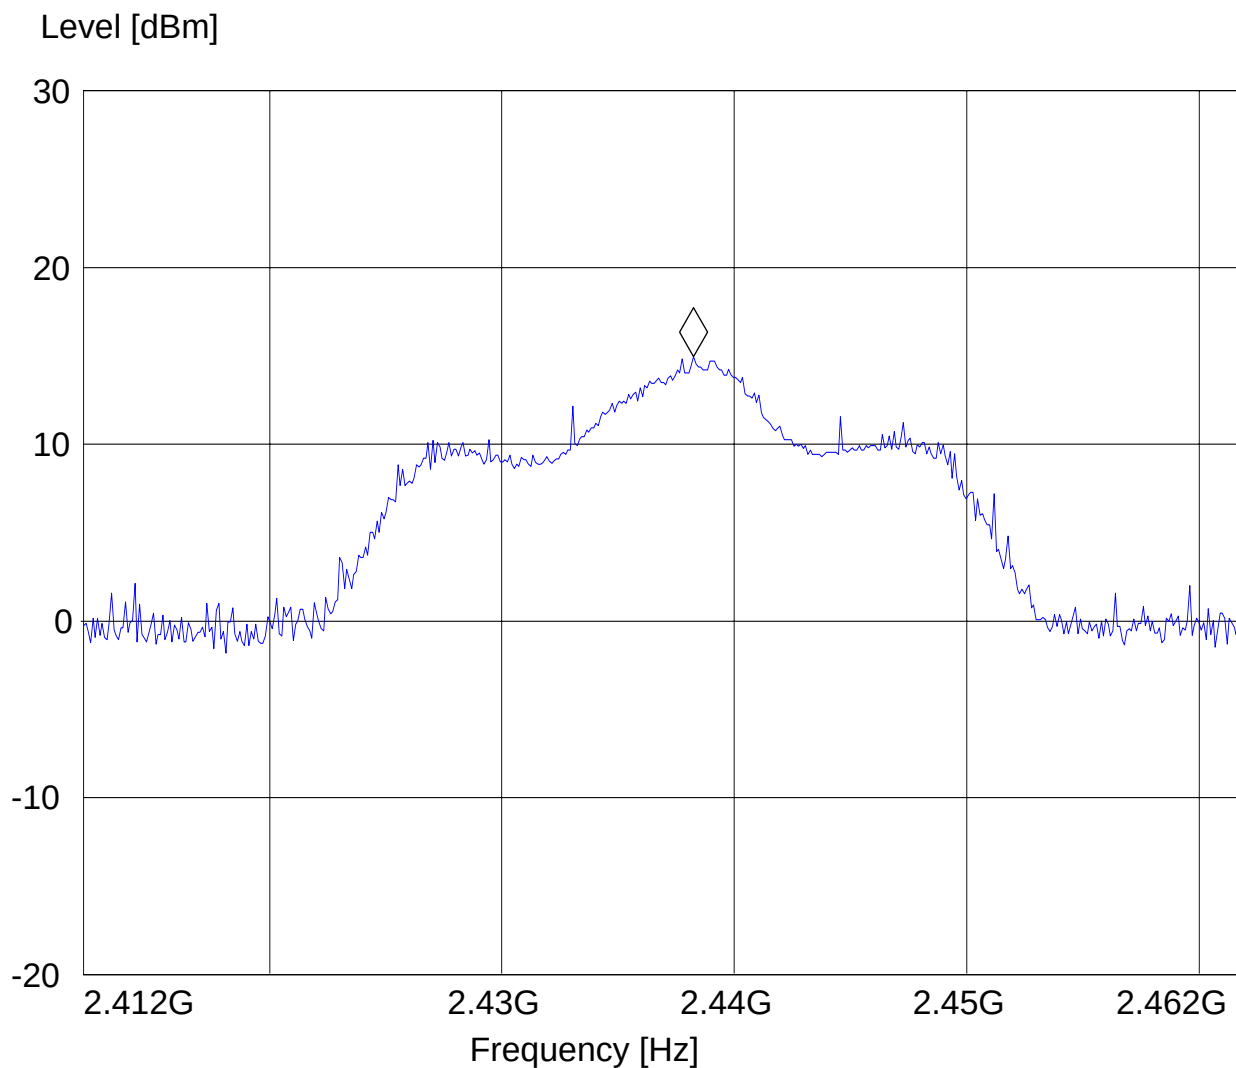

EIRP: 2462MHz (802.11b) Chain A

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 11, 1Mbps, chain A

ANT Orientation: H

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "EIRP RLAN CH11"

Marker: 2.463452906 GHz 19.04 dBm

Level [dBm]

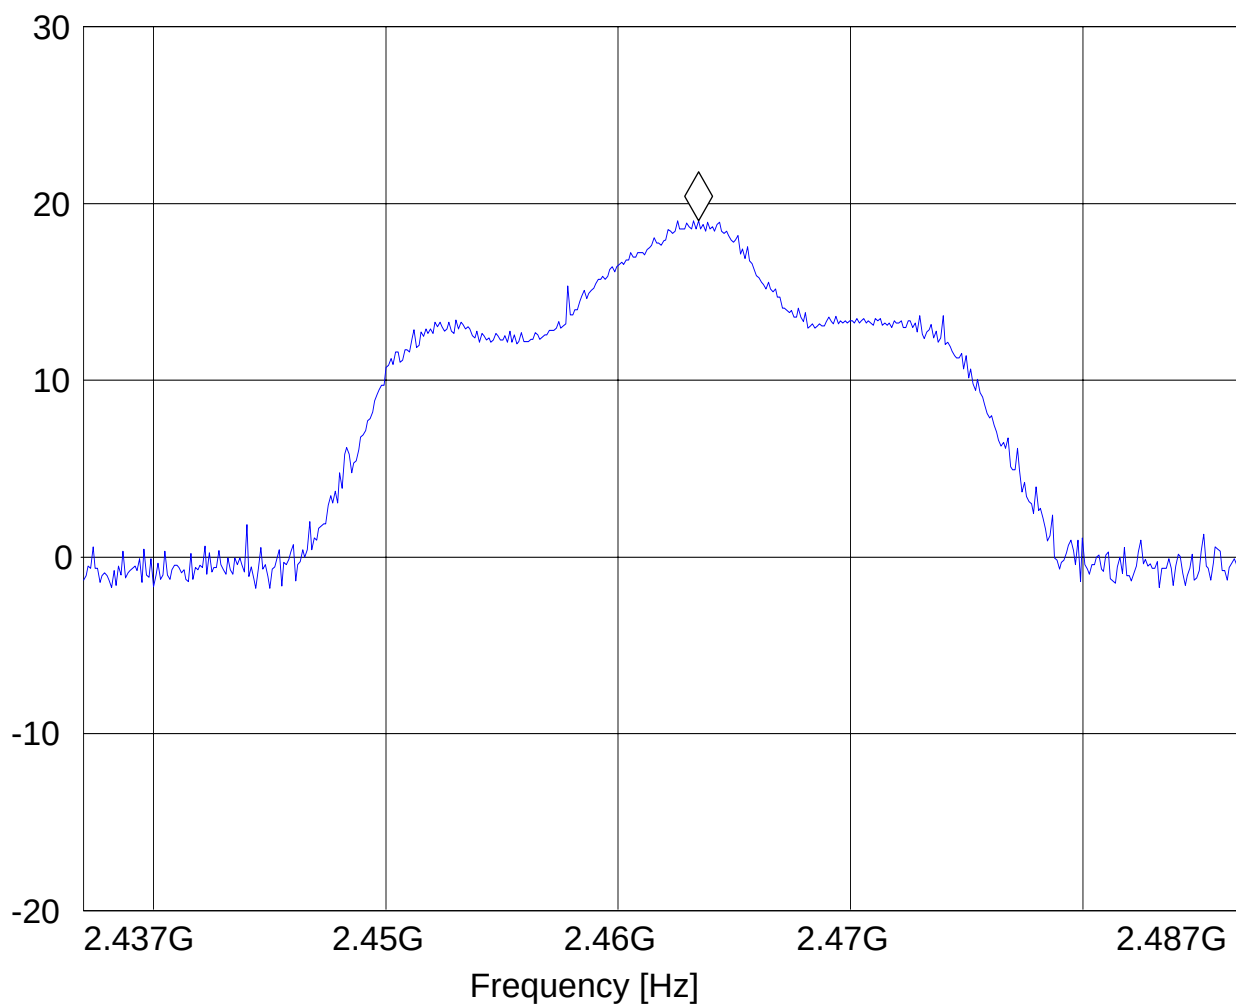



EIRP: 2462MHz (802.11b) Chain B

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 11, 1Mbps, chain A

ANT Orientation: V


EUT Orientation: H

Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "EIRP RLAN CH11"

Marker: 2.464054108 GHz 14.82 dBm

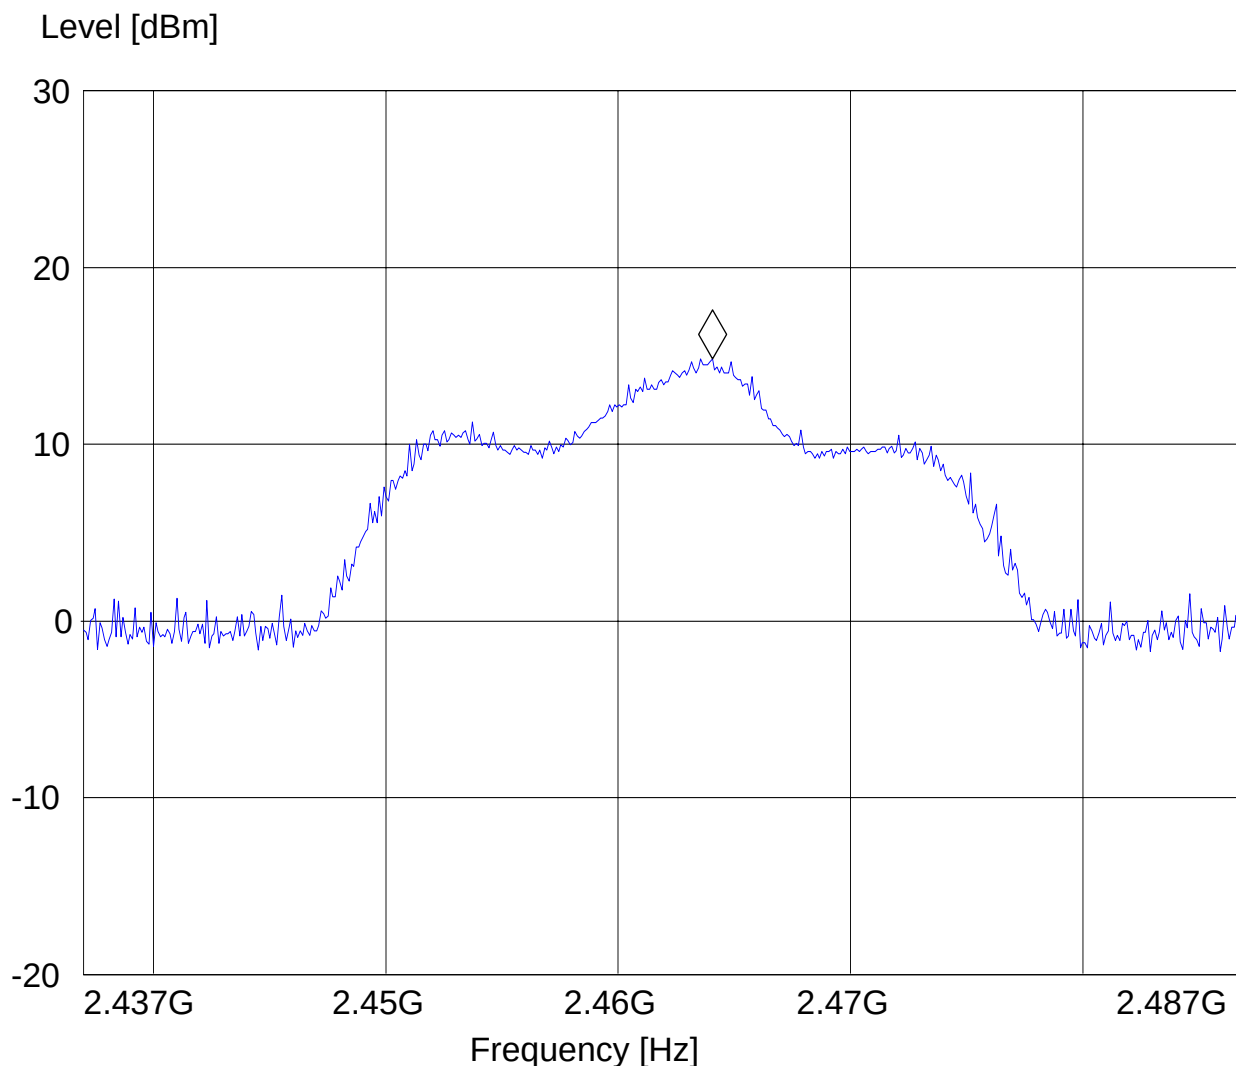

EIRP: 2412MHz (802.11g) Chain A

CETECOM Inc.

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch1, Chain A, 12Mbps

ANT Orientation: H

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "EIRP RLAN CH1"

Marker: 2.410446894 GHz 22.52 dBm

Level [dBm]

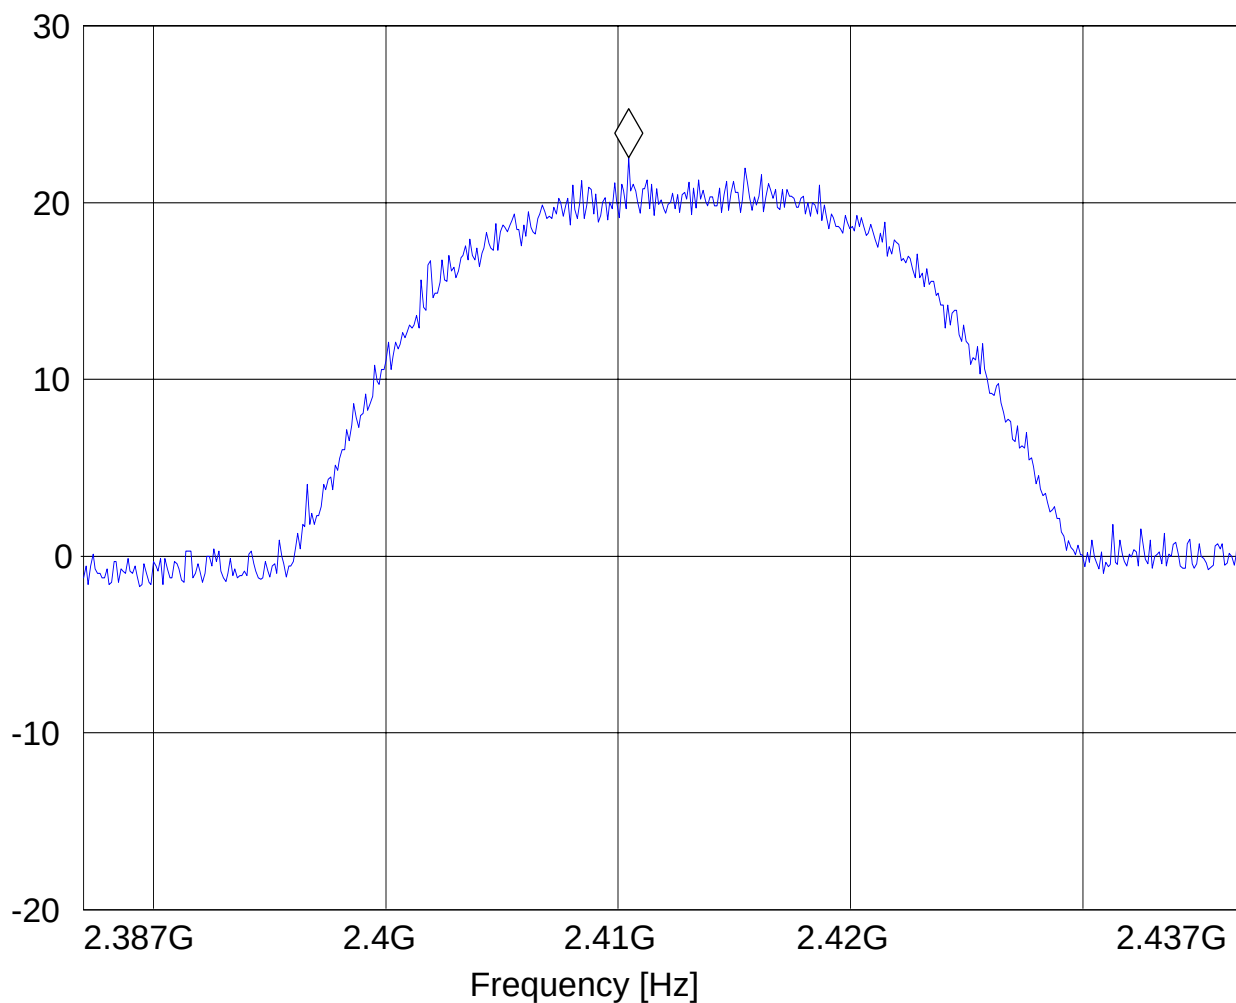



EIRP: 2412MHz (802.11g) Chain B

CETECOM Inc.

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch 1, Chain B, 12Mbps

ANT Orientation: V


EUT Orientation: H

Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "EIRP RLAN CH1"

Marker: 2.413052104 GHz 17.13 dBm

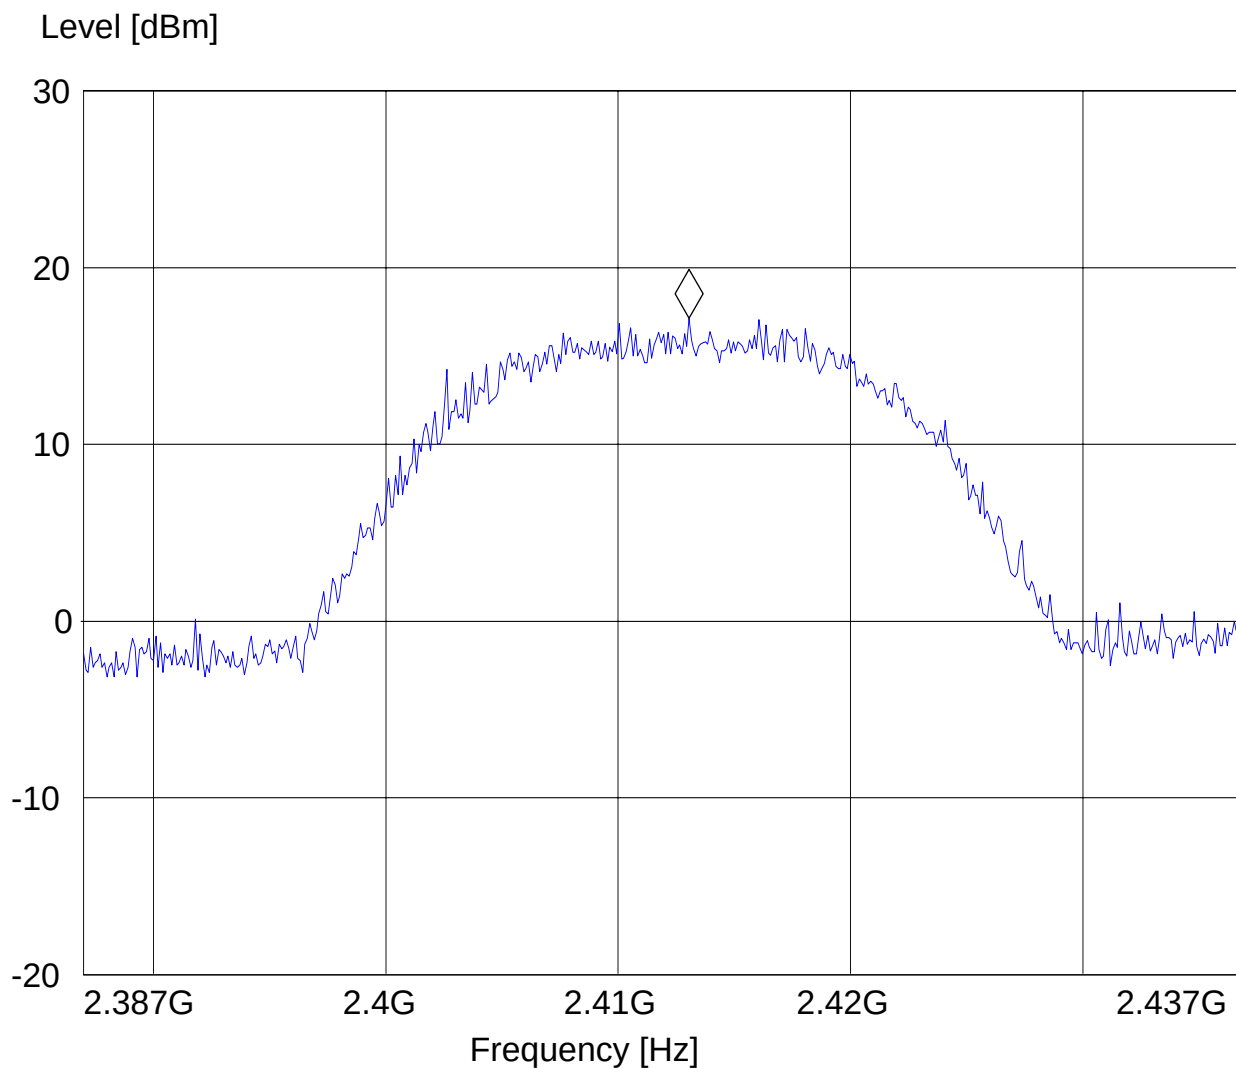

EIRP: 2437MHz (802.11g) Chain A

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch 6, Chain A, 12Mbps

ANT Orientation: H

EUT Orientation: H

Test Engineer: Ed


Voltage: AC adapter

SWEEP TABLE: "EIRP RLAN CH6"

Detector: Mode:

Marker: 2.438252505 GHz 24.02 dBm

Level [dBm]

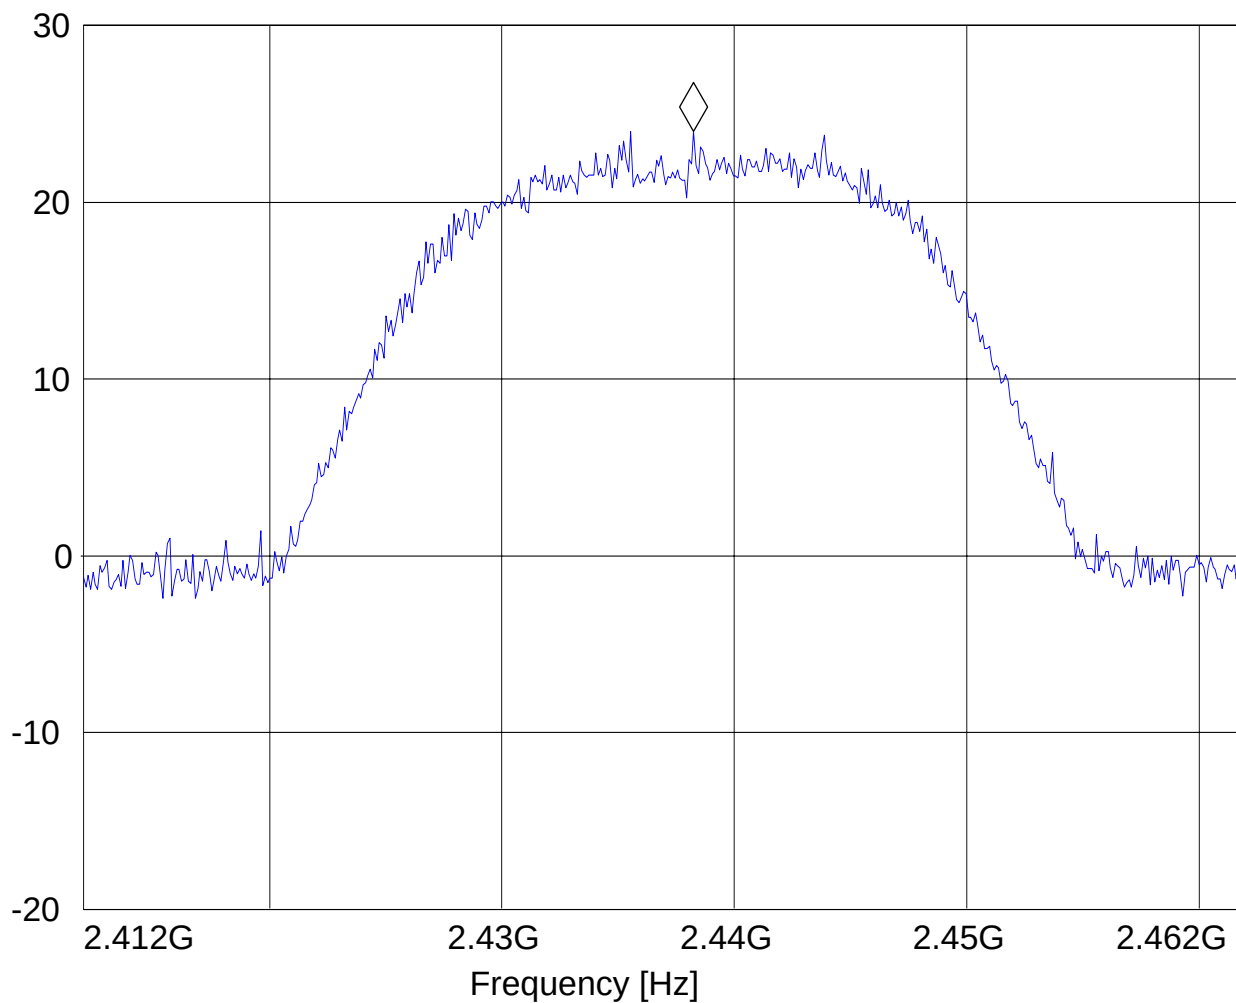

EIRP: 2437MHz (802.11g) Chain B

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch 6, Chain B, 12Mbps


ANT Orientation: V

EUT Orientation: H

Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "EIRP RLAN CH6"

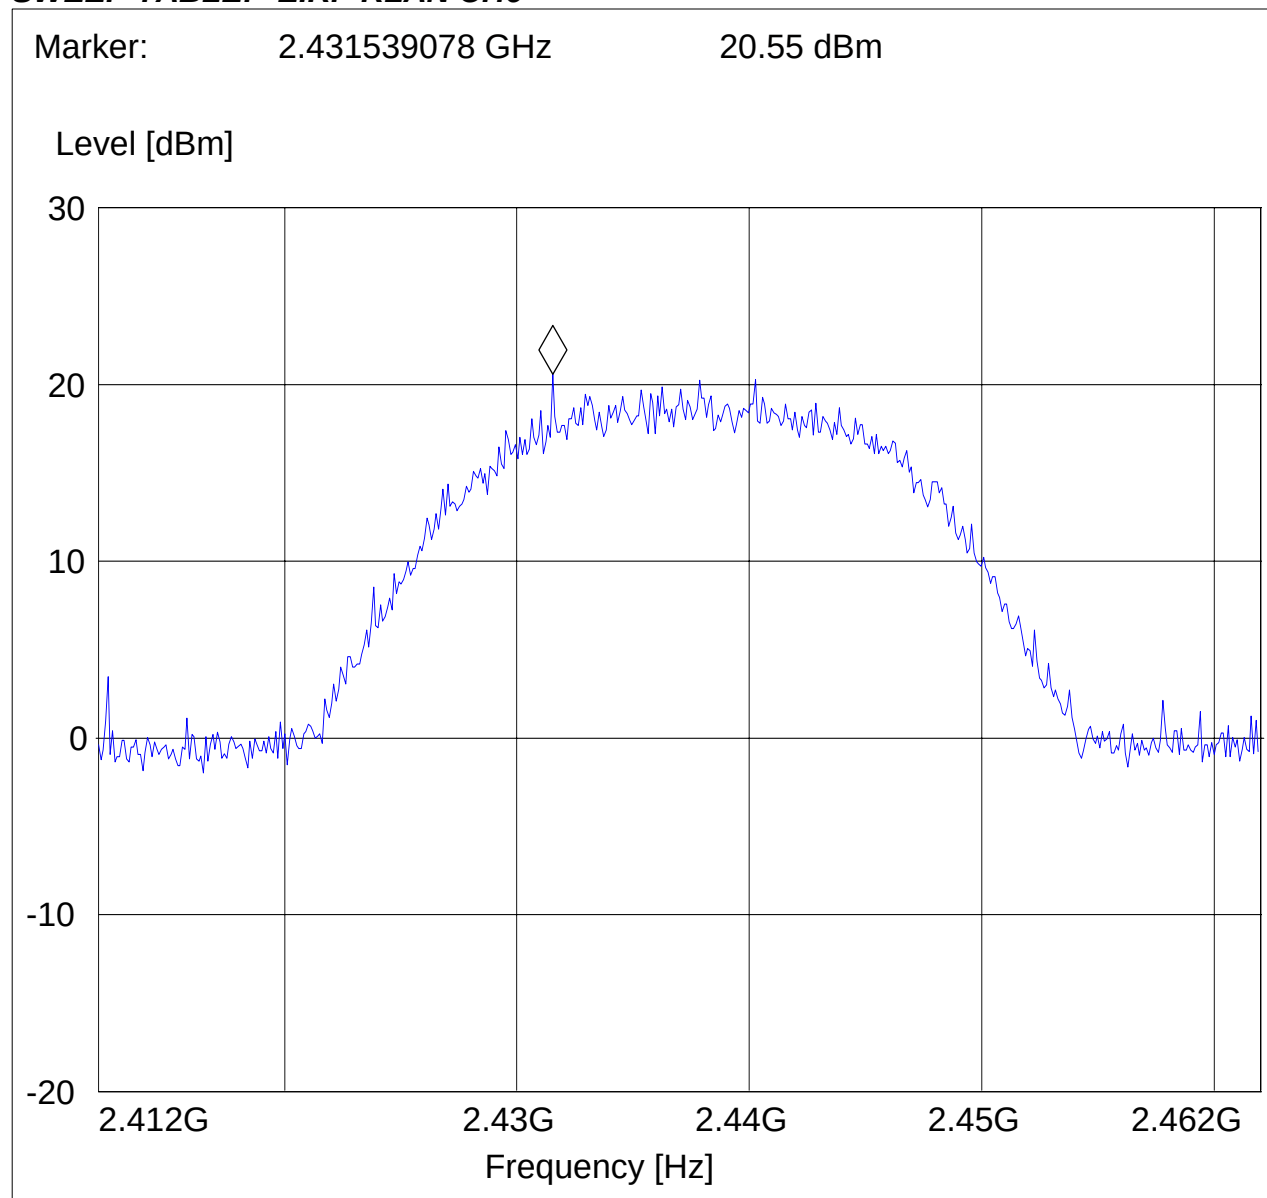

EIRP: 2462MHz (802.11g) Chain A

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch 11, Chain A, 12Mbps


ANT Orientation: H

EUT Orientation: H

Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "EIRP RLAN CH11"

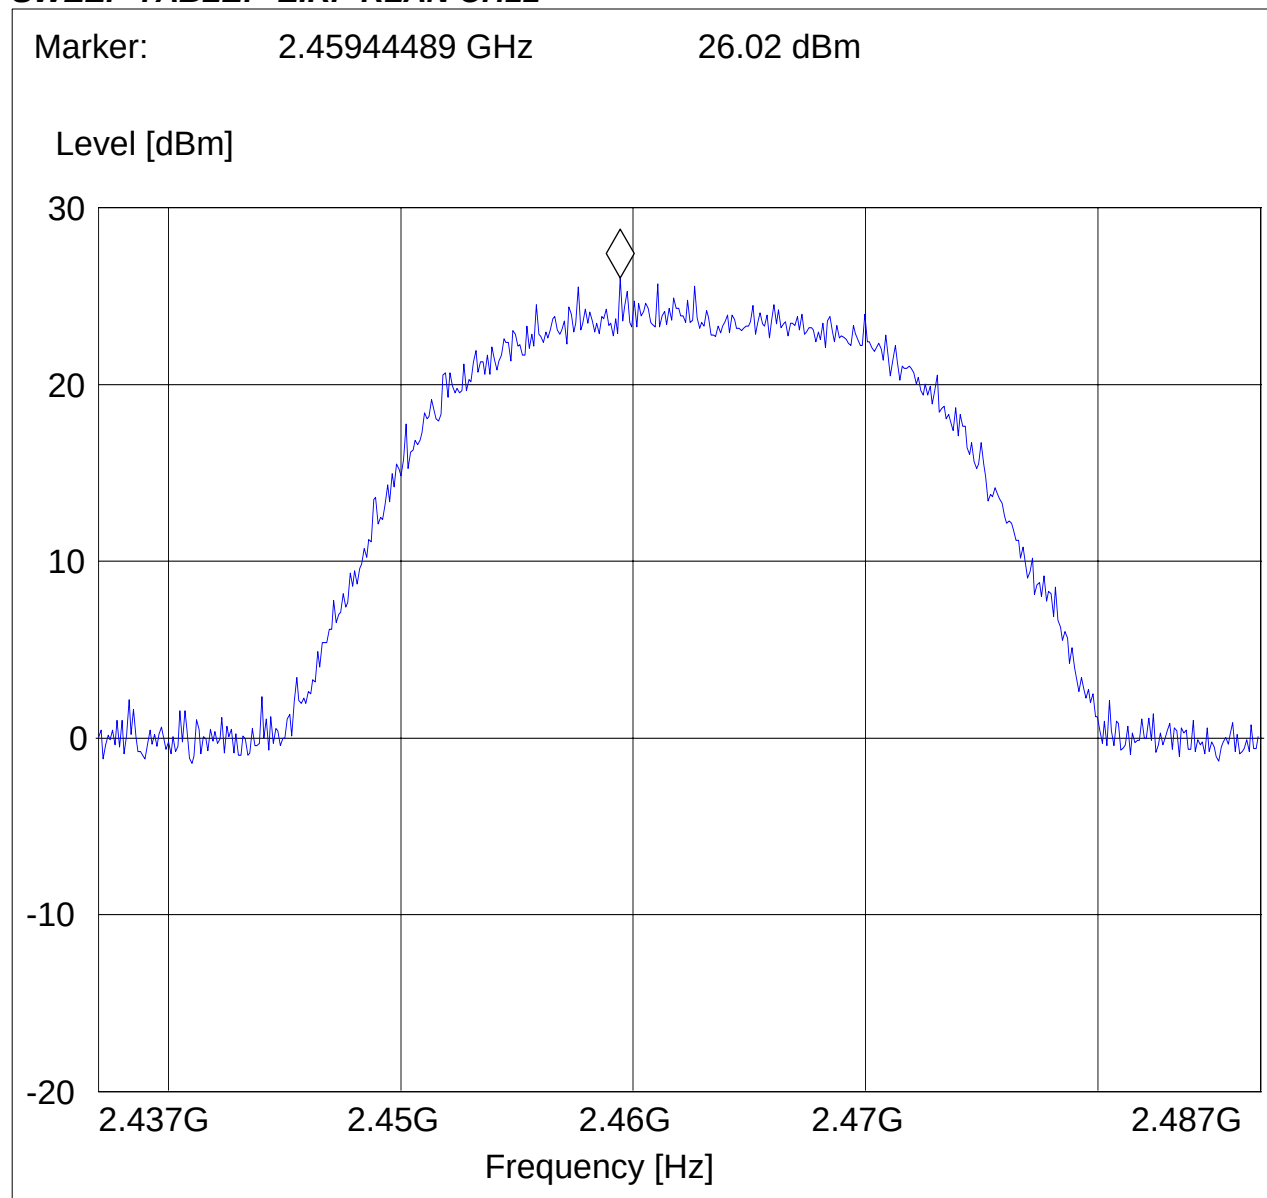

EIRP: 2462MHz (802.11g) Chain B

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch 11, Chain B, 12Mbps


ANT Orientation: V

EUT Orientation: H

Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "EIRP RLAN CH11"

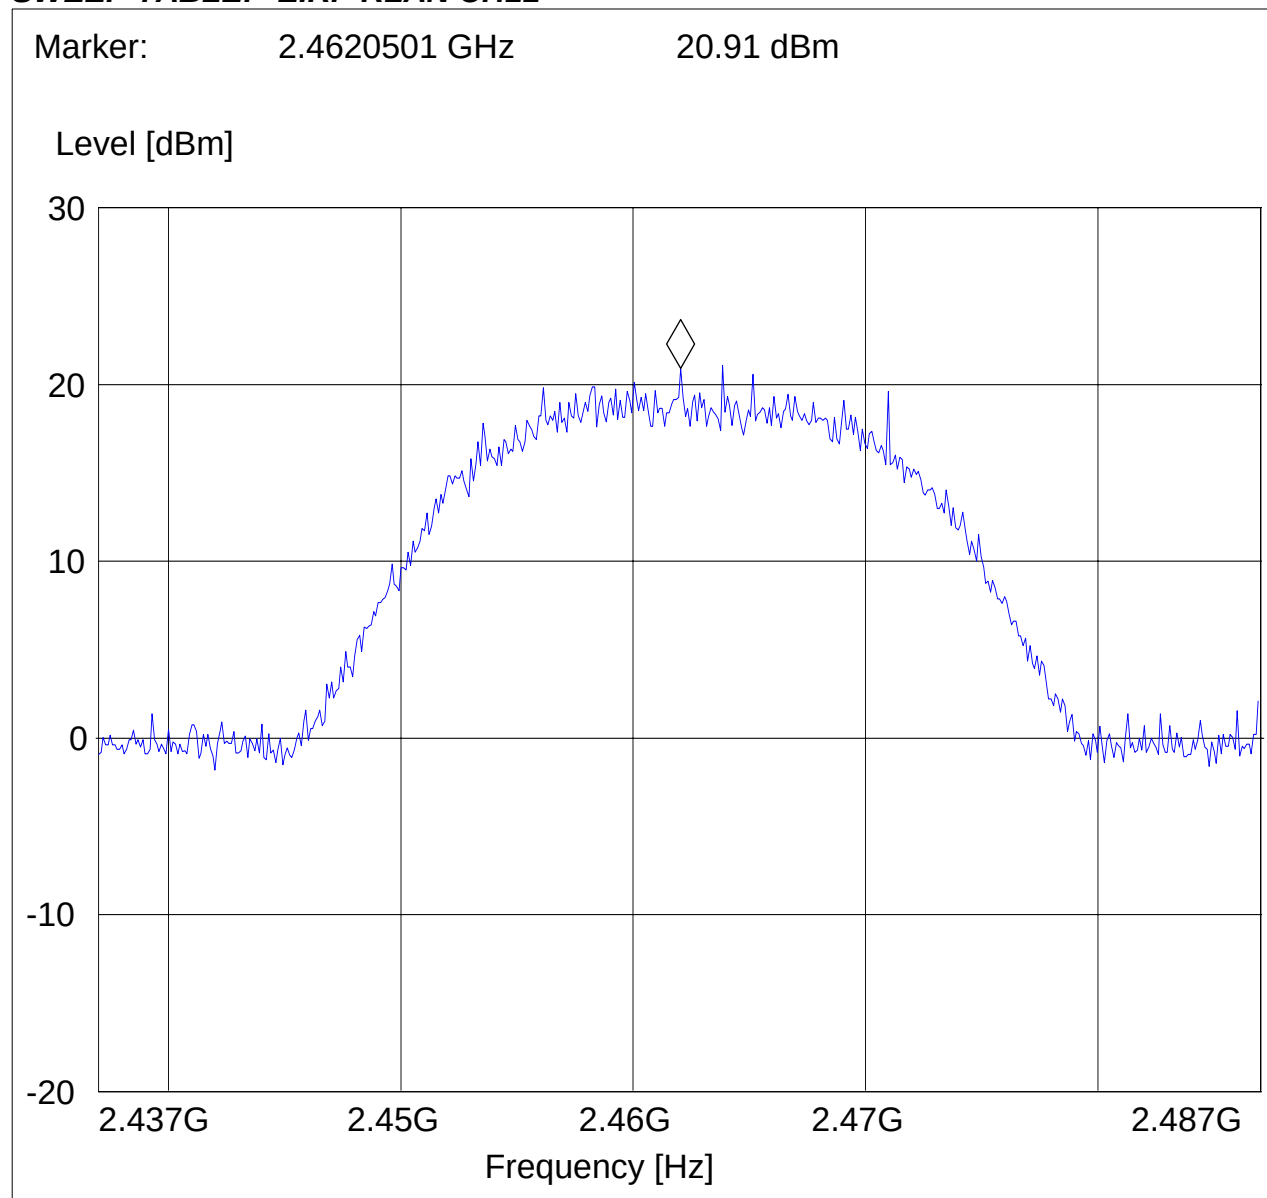

5.2 RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205

5.2.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

***PEAK LIMIT= 74dBuV/m**

***AVG. LIMIT= 54dBuV/m**

Notes:

1. Radiated emissions are maximized by rotating the EUT 360° at 0.5 meter height increments between 1 and 4 meters.
2. Measurements were performed with the EUT in X, Y and Z orientations with the measurement antenna in both horizontal and vertical polarity. The plots below show the results of the worst case orientation and polarity.

5.2.2 Results Lower Restricted Band 2310 MHz to 2390 MHz

802.11b (2412MHz) PEAK Chain A

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 1, 1Mbps, chain A


ANT Orientation: H

EUT Orientation: H

Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 LBE_PK"

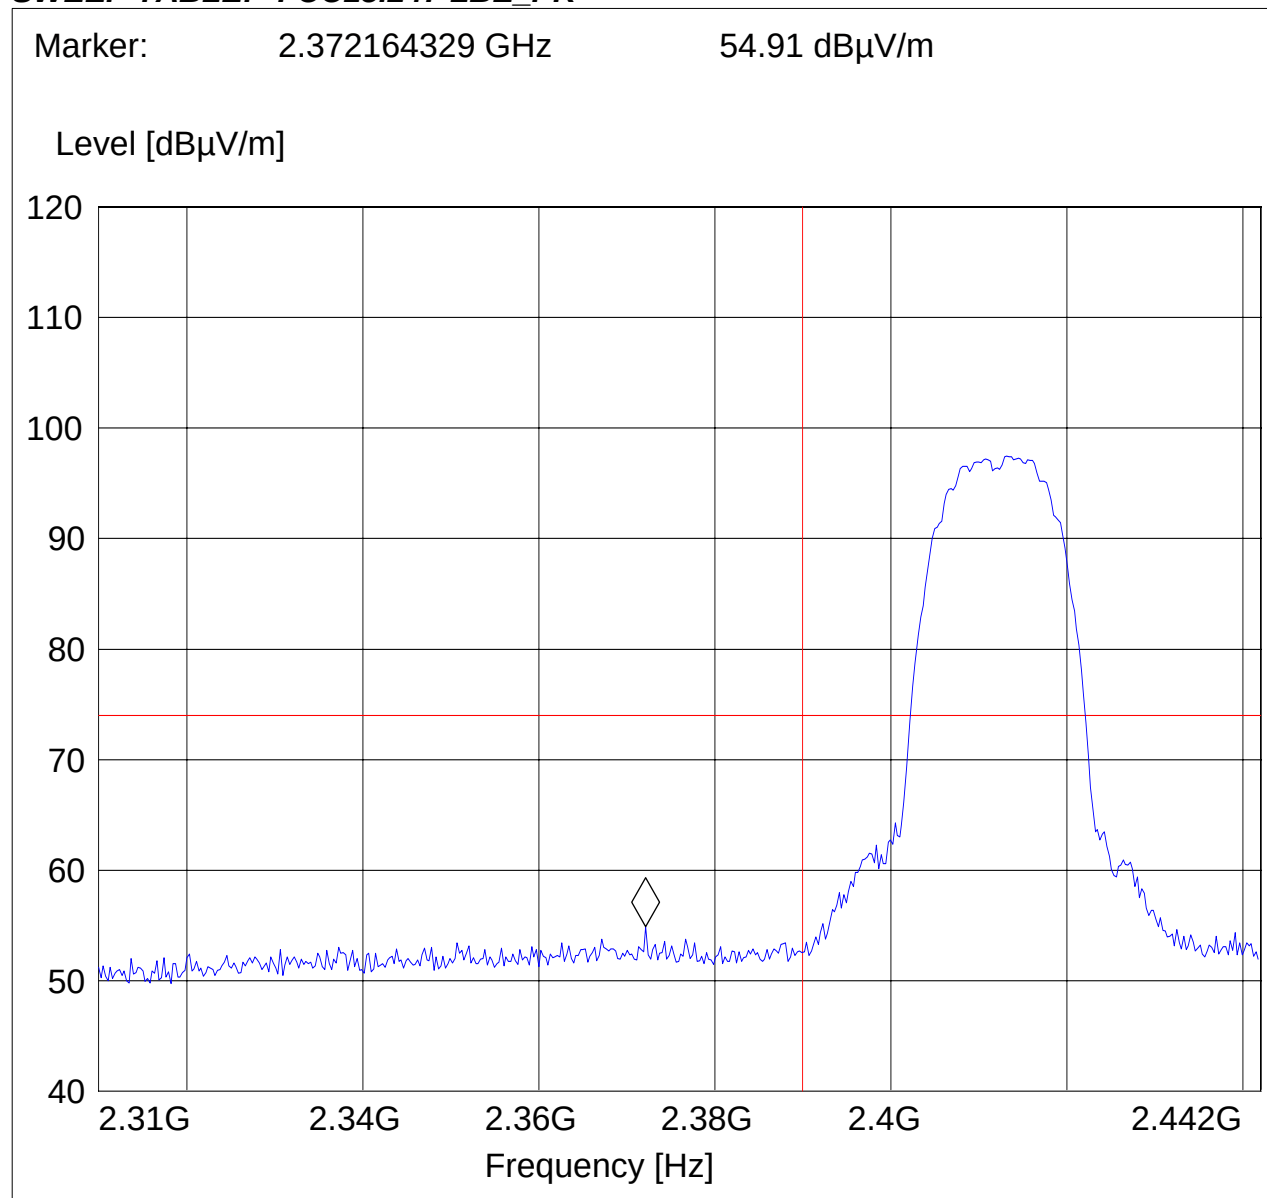

802.11b (2412MHz) AVG Chain A

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 1, 1Mbps, chain A

ANT Orientation: H

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 LBE_AVG"

Marker: 2.37238477 GHz 42.12 dB μ V/m

Level [dB μ V/m]

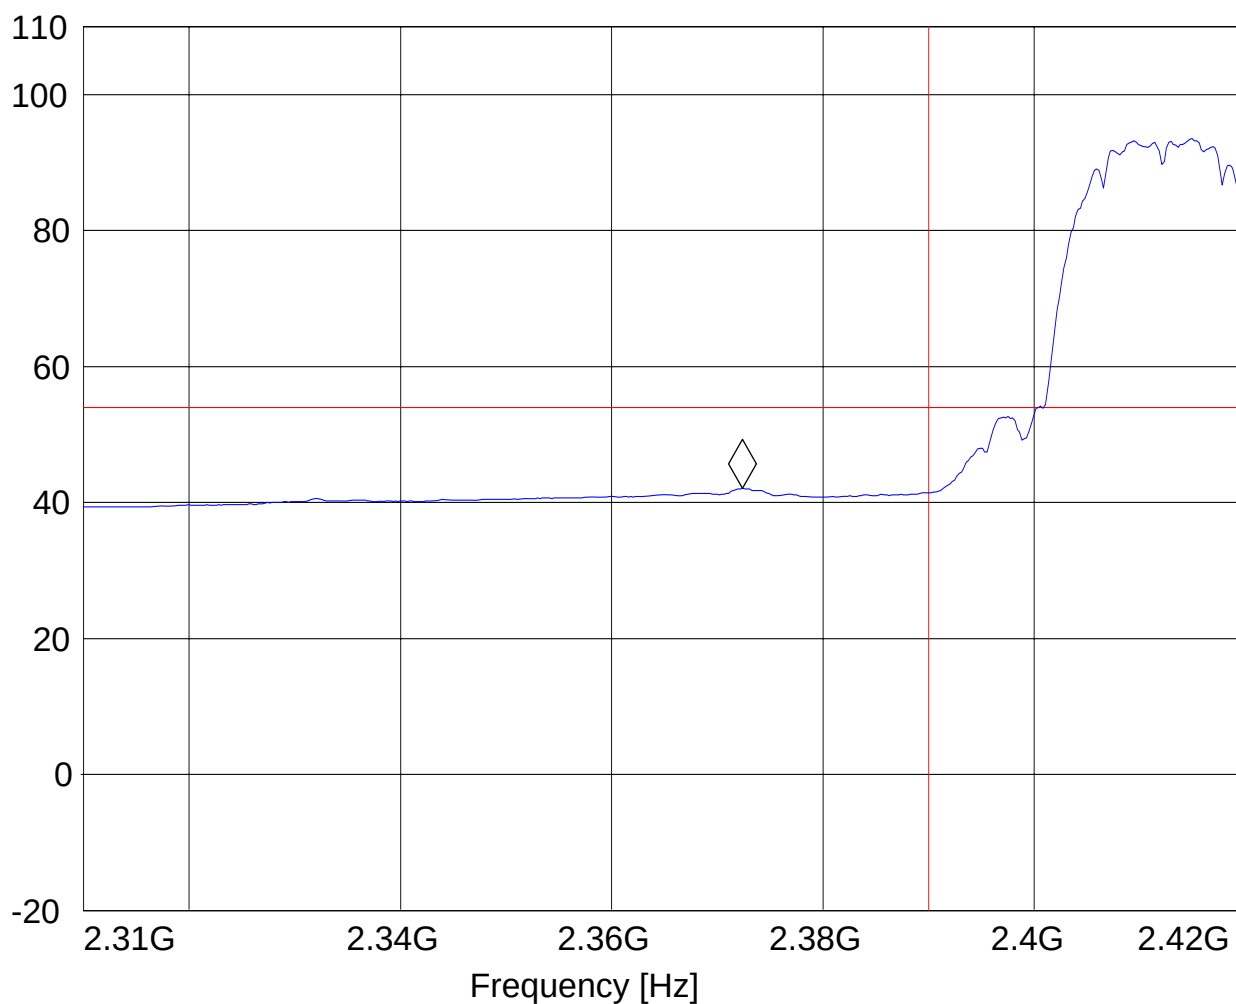

802.11b (2412MHz) PEAK Chain B

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 1, 1Mbs, chain B

ANT Orientation: V

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 LBE_PK"

Marker: 2.335130261 GHz 53.14 dB μ V/m

Level [dB μ V/m]

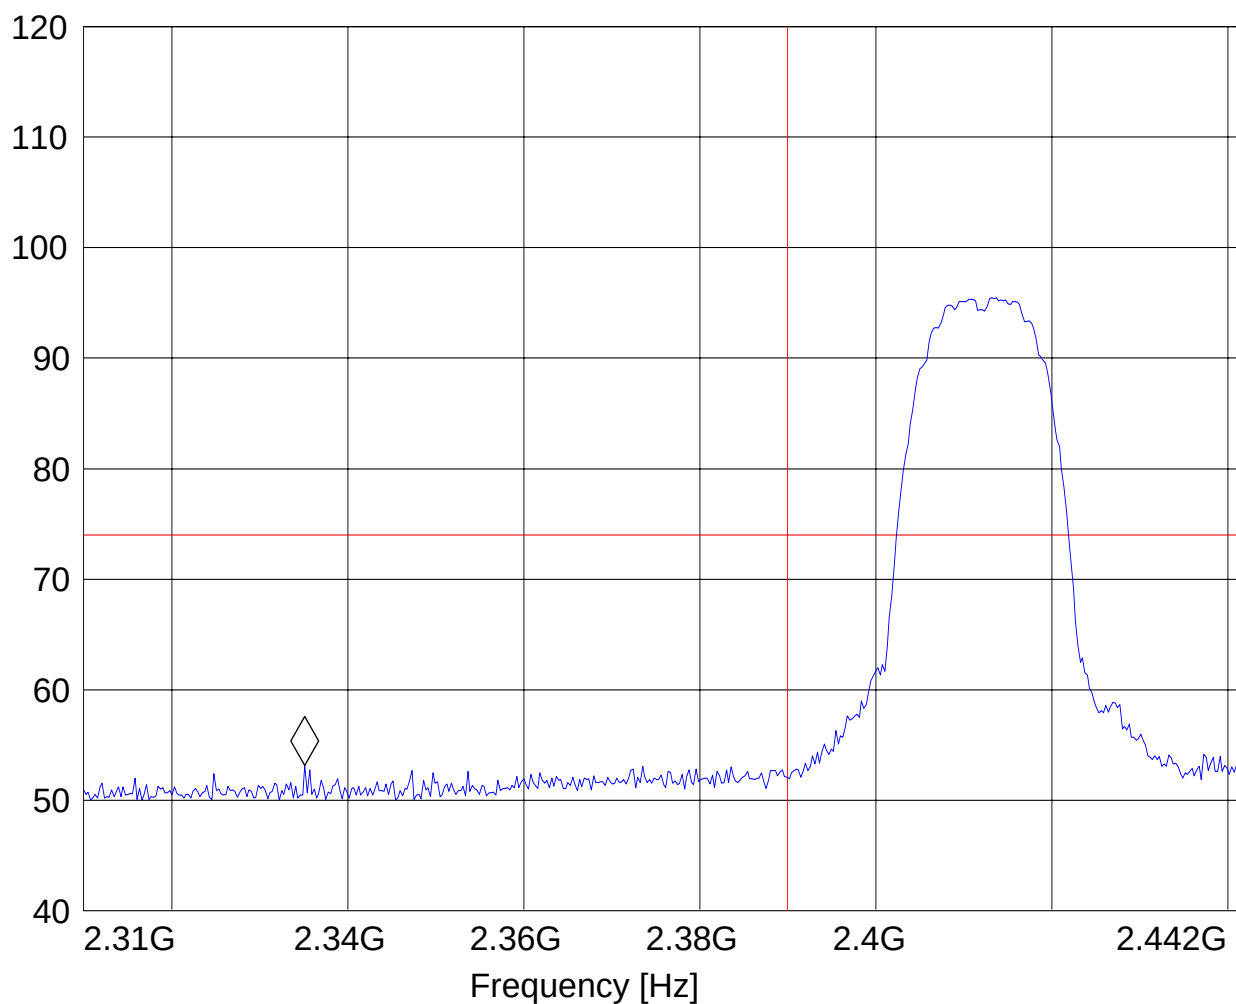

802.11b (2412MHz) AVG Chain B

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 1, 1Mbs, chain B

ANT Orientation: V

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 LBE_AVG"

Marker: 2.41492986 GHz 91.7 dB μ V/m

Level [dB μ V/m]

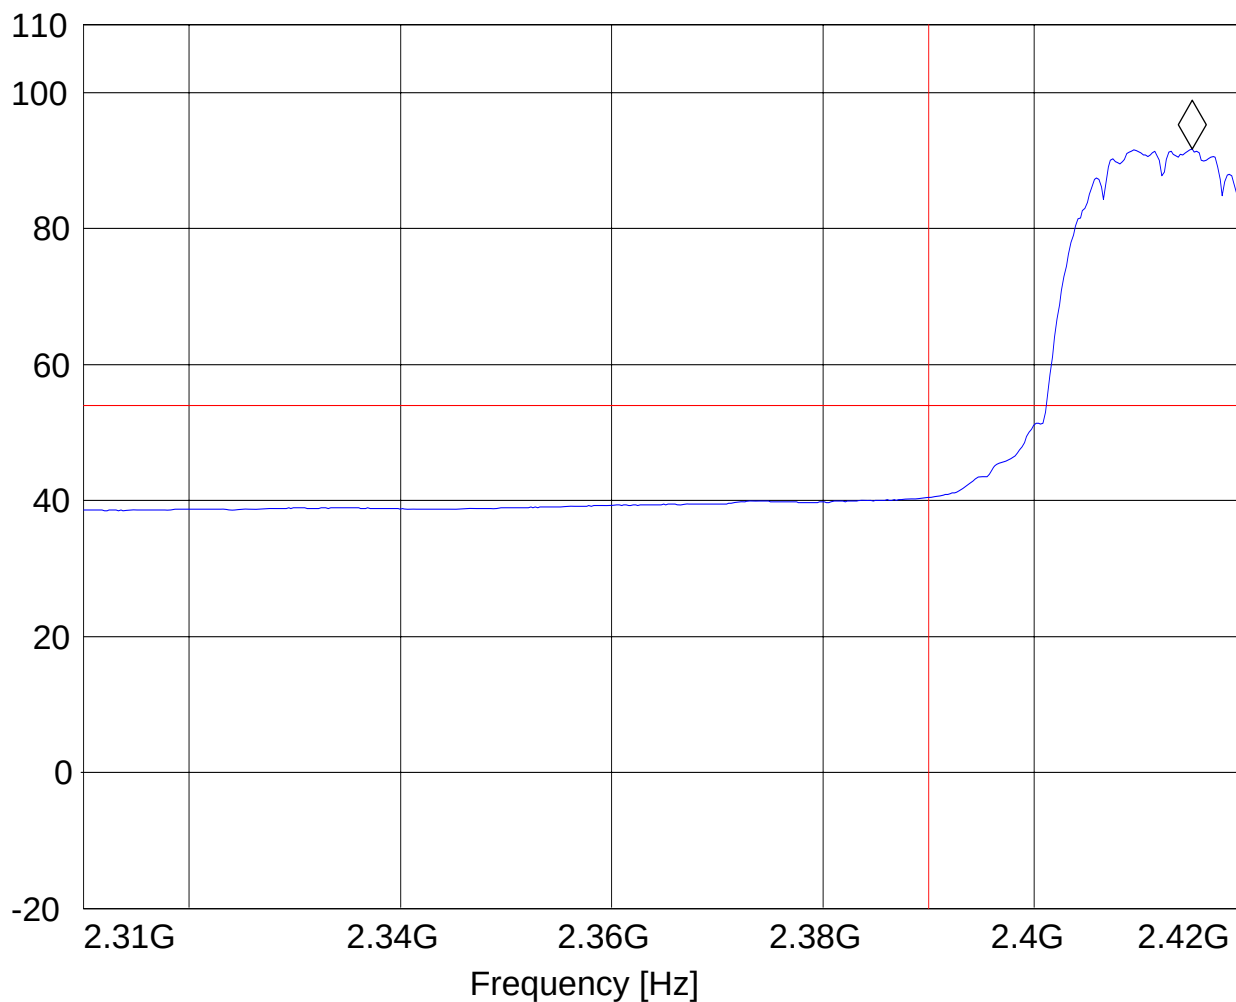

802.11g (2412MHz) PEAK Chain A

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch 1, Chain A, 12Mbps

ANT Orientation: H

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 LBE_PK"

Marker: 2.389094188 GHz 63.39 dBμV/m

Level [dBμV/m]

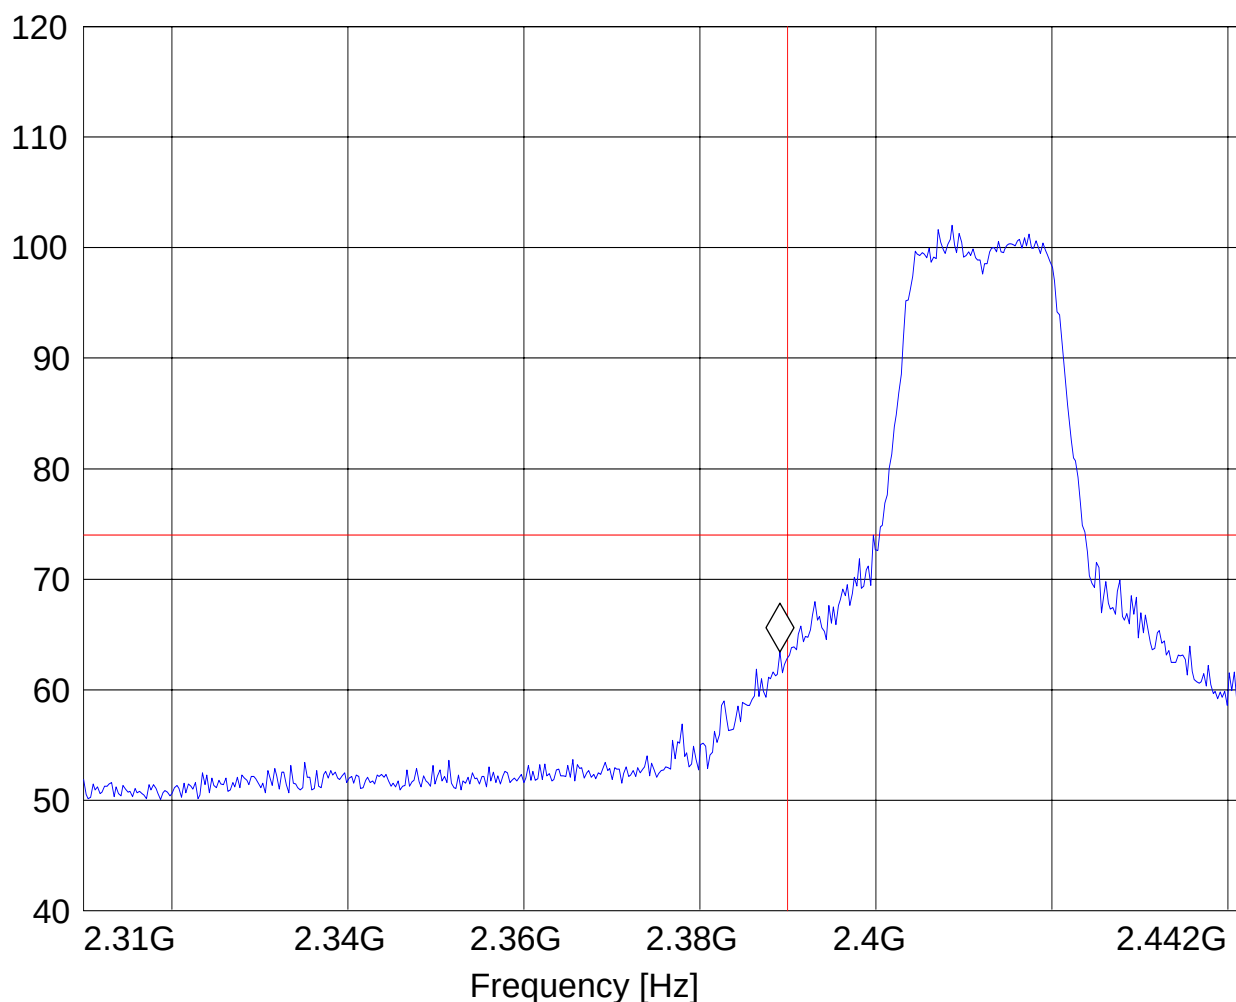

802.11g (2412MHz) AVG Chain A

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch 1, Chain A, 12Mbps

ANT Orientation: H

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 LBE_AVG"

Marker: 2.389799599 GHz 43.48 dB μ V/m

Level [dB μ V/m]

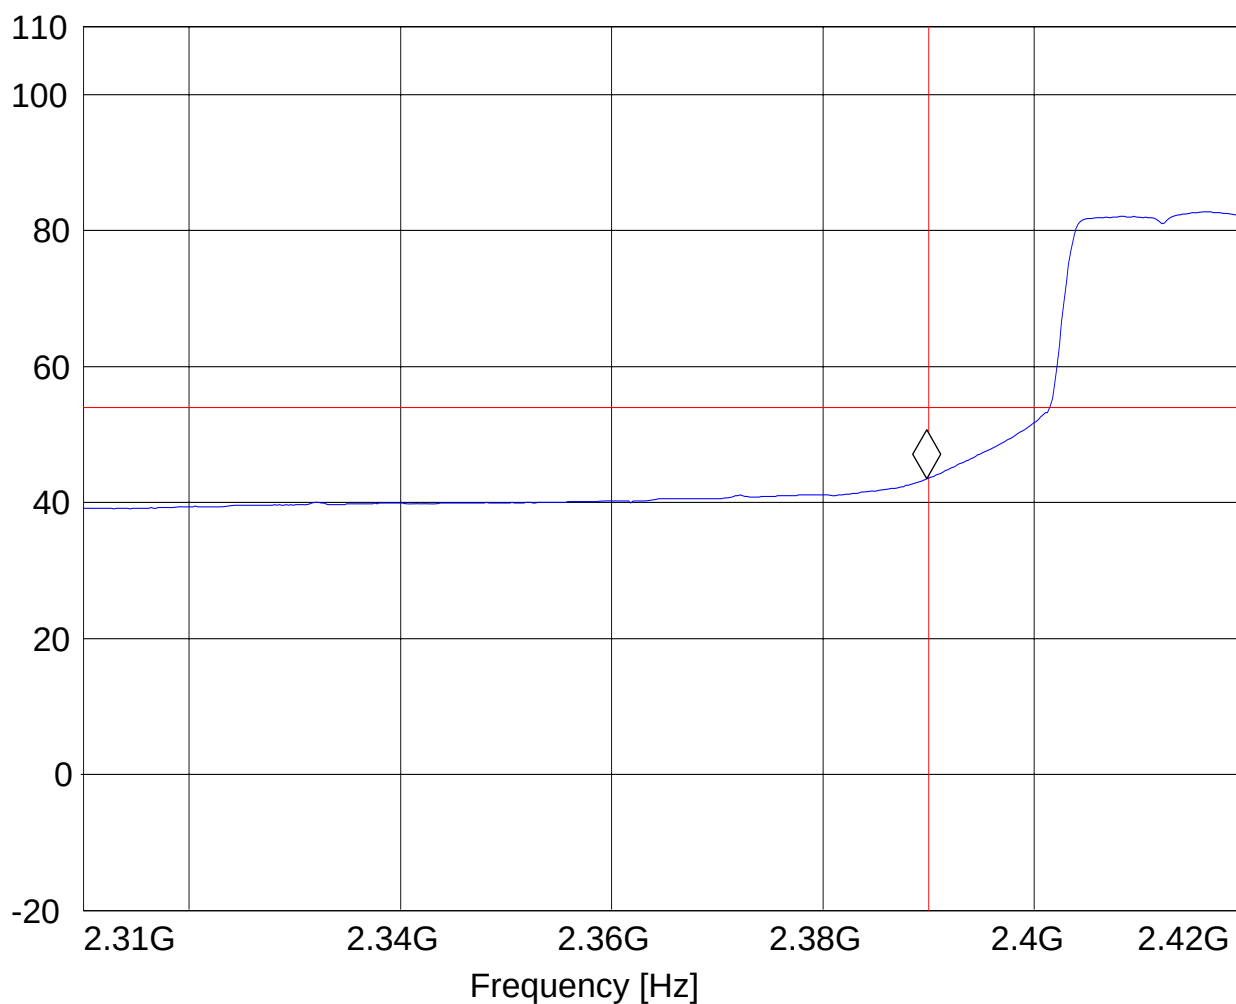

802.11g (2412MHz) PEAK Chain B

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch 1, Chain B, 12Mbps

ANT Orientation: V

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 LBE_PK"

Marker: 2.389623246 GHz 58.41 dBμV/m

Level [dBμV/m]

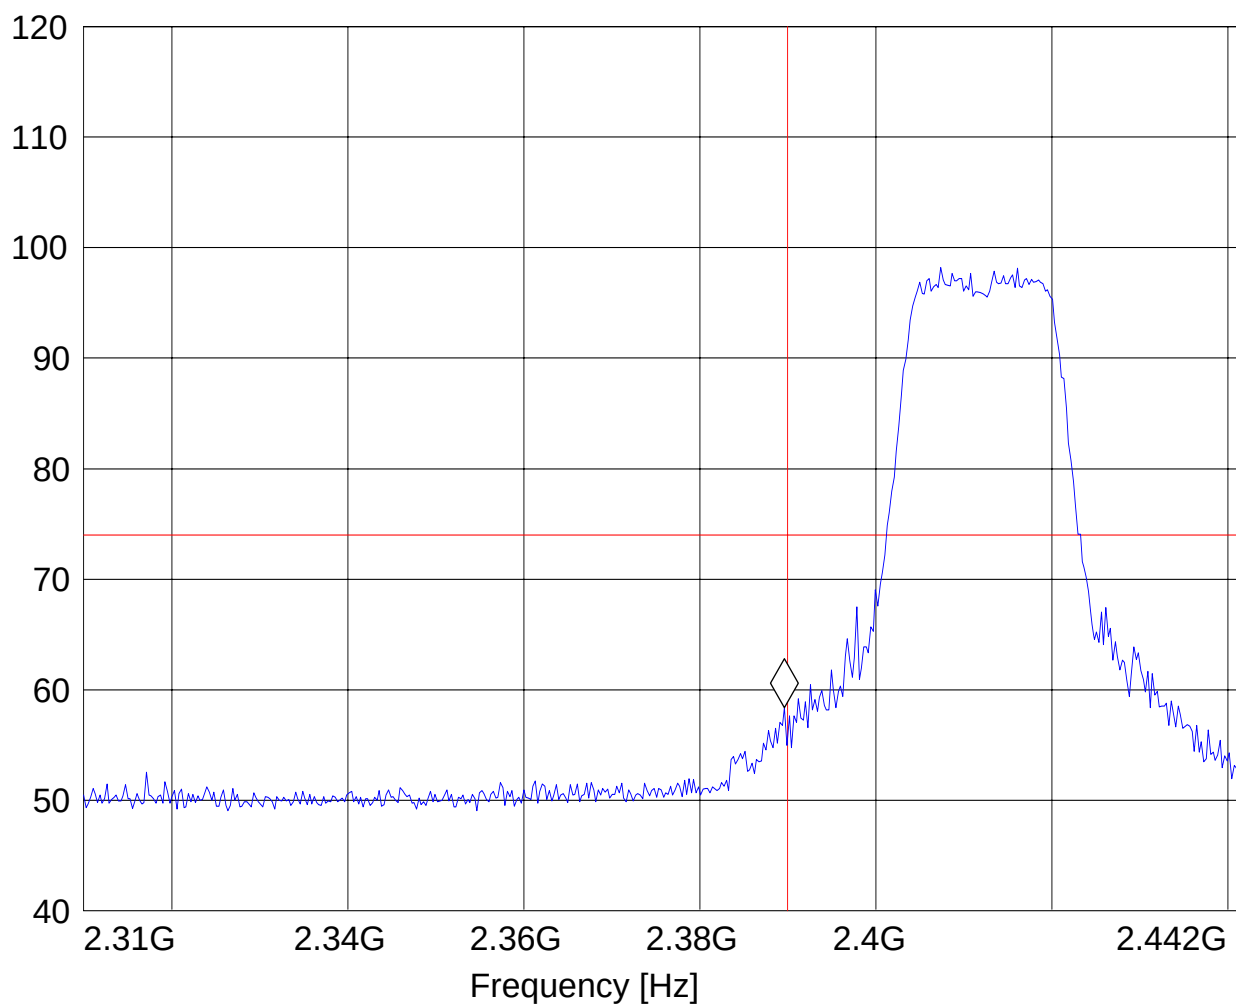

802.11g (2412MHz) AVG Chain B

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch 1, Chain B, 12Mbps


ANT Orientation: V

EUT Orientation: H

Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 LBE_AVG"

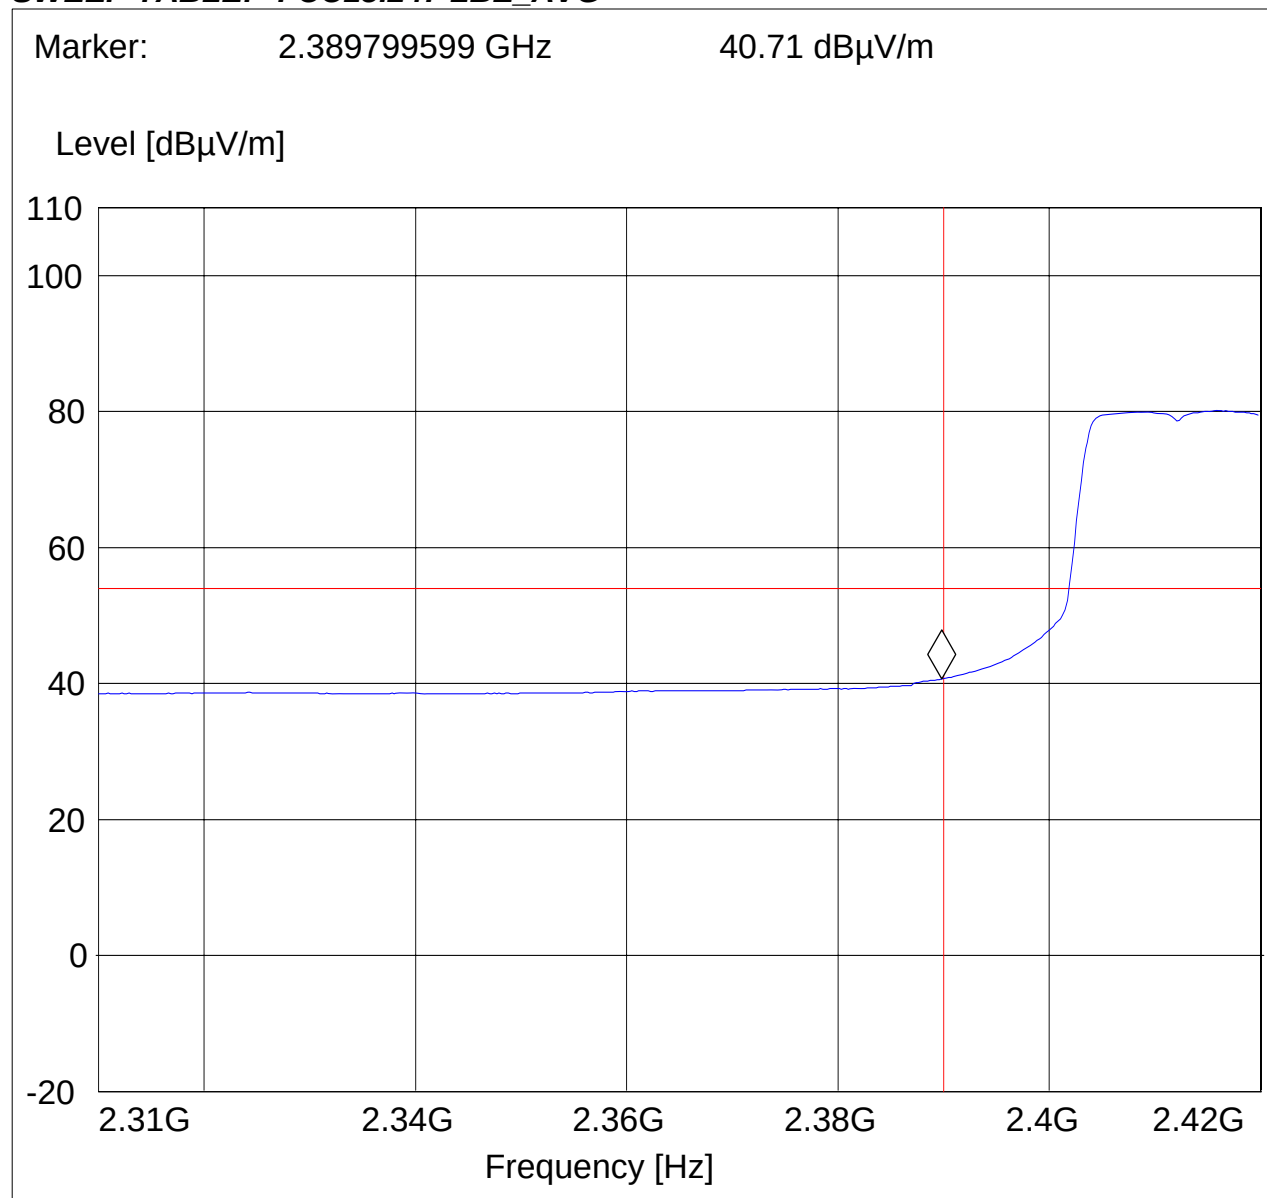

5.2.3 Results Upper Restricted Band 2483.5 MHz to 2500 MHz

802.11b (2462MHz) PEAK Chain A

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 11, 1Mbps, chain A


ANT Orientation: H

EUT Orientation: H

Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 HBE_PK"

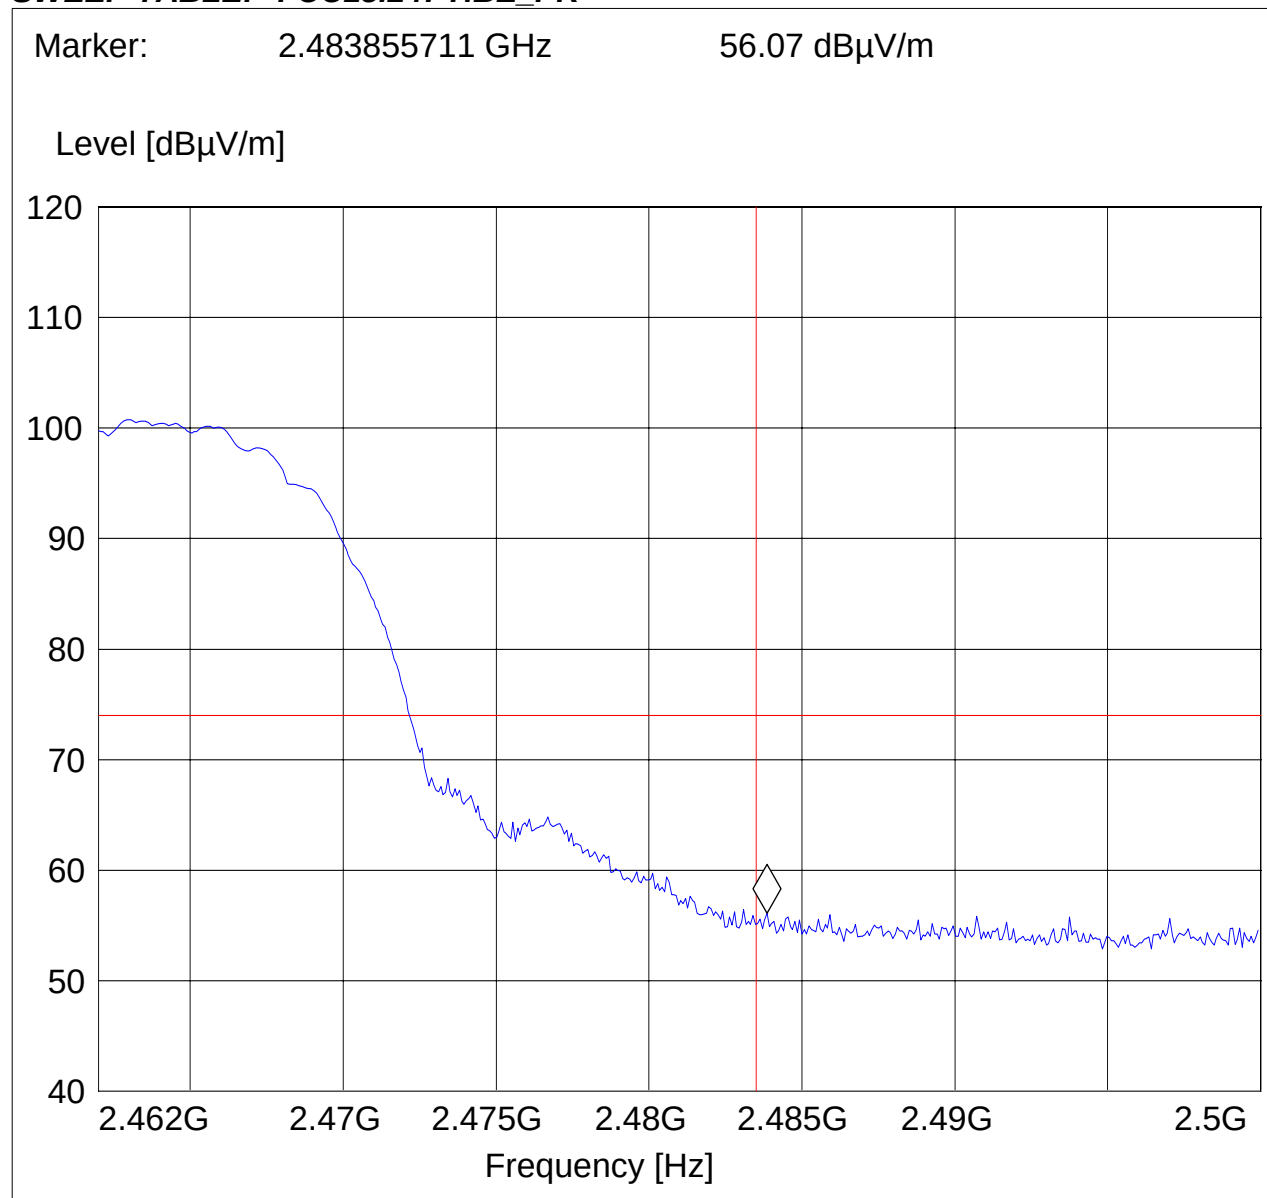

802.11b (2462MHz) AVG Chain A

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 11, 1Mbps, chain A

ANT Orientation: H

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 HBE_AVG"

Marker: 2.483627255 GHz 50.13 dB μ V/m

Level [dB μ V/m]

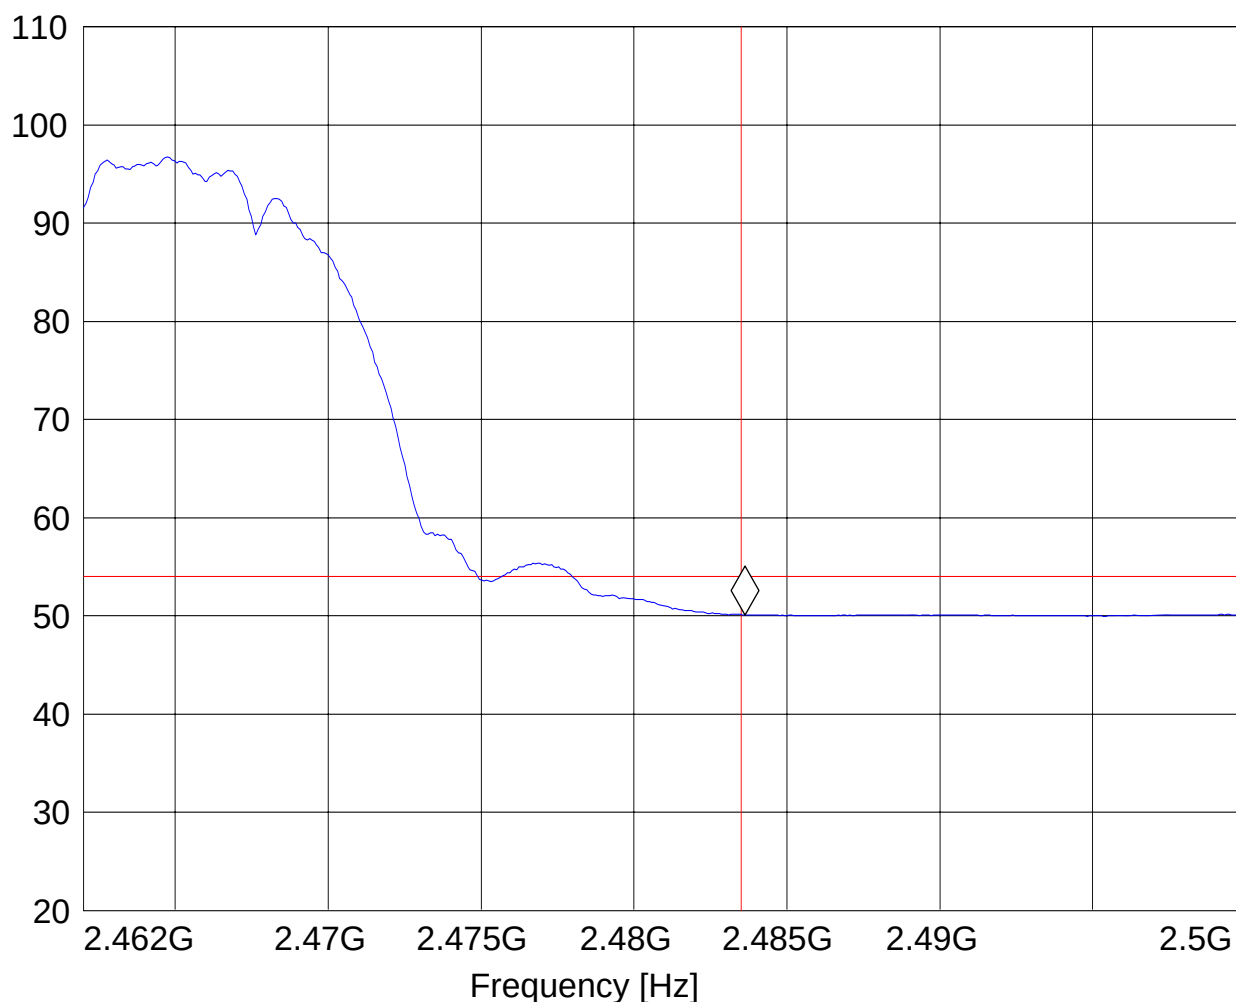

802.11b (2462MHz) PEAK Chain B

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 11, 1Mbps, chain B

ANT Orientation: V

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 HBE_PK"

Marker: 2.485911824 GHz 53.78 dB μ V/m

Level [dB μ V/m]

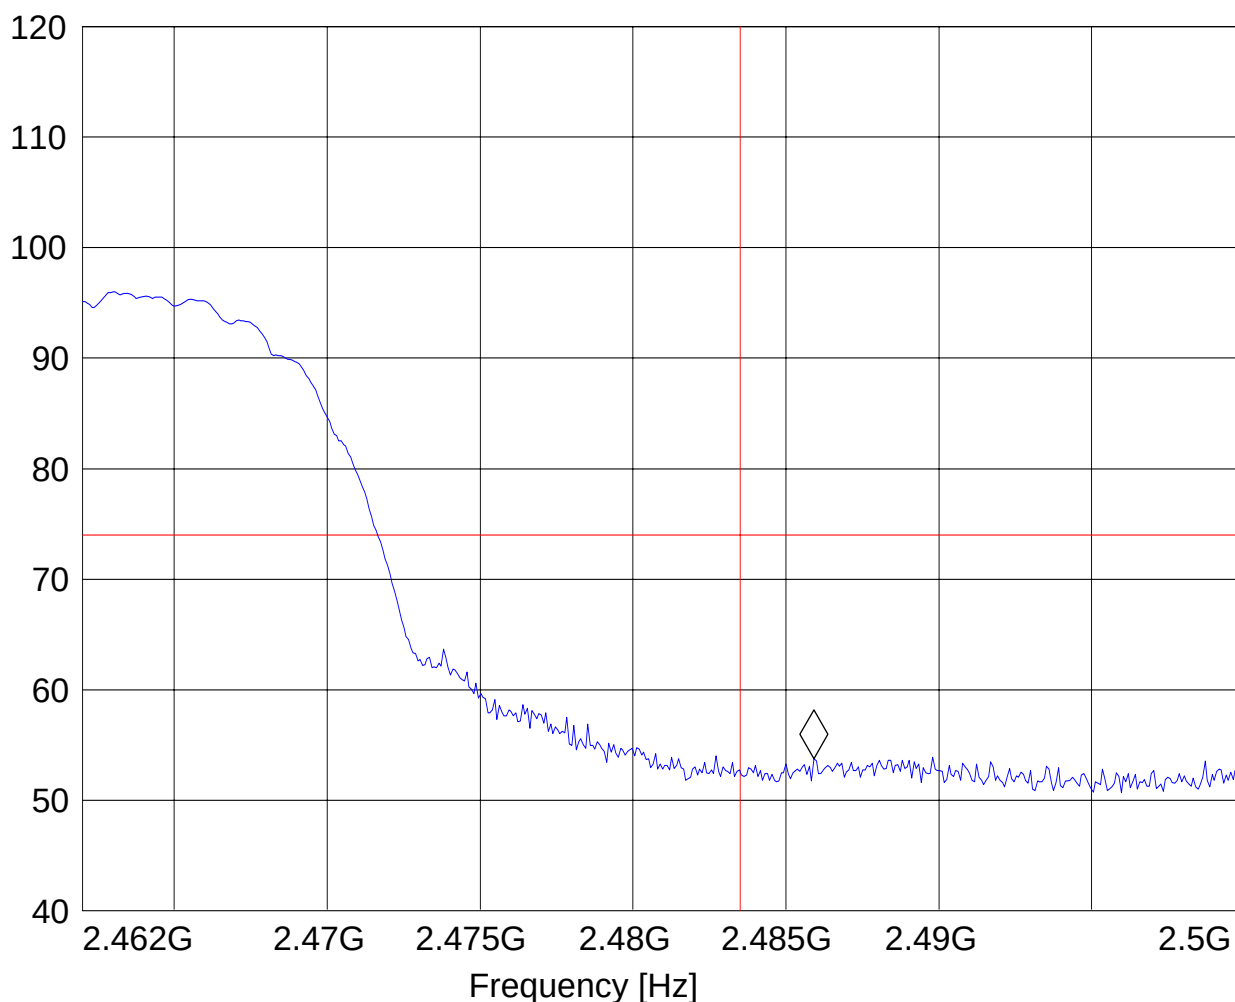

802.11b (2462MHz) AVG Chain B

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 11, 1Mbps, chain B

ANT Orientation: V

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 HBE_AVG"

Marker: 2.48644489 GHz 49.92 dB μ V/m

Level [dB μ V/m]

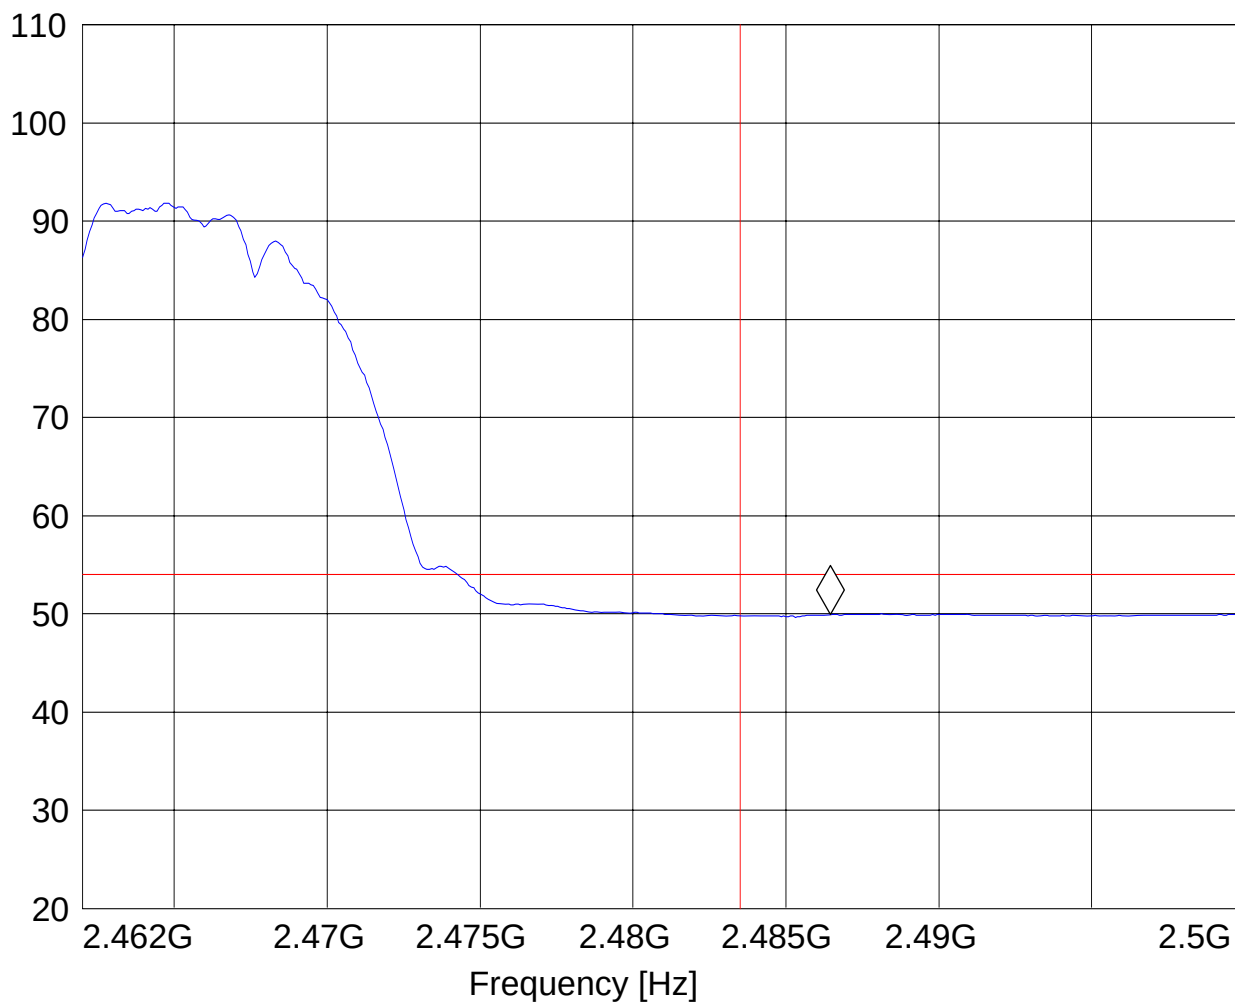

802.11g (2462MHz) PEAK Chain A

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 11, 1Mbps, chain B

ANT Orientation: V

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 HBE_PK"

Marker: 2.485911824 GHz 53.78 dB μ V/m

Level [dB μ V/m]

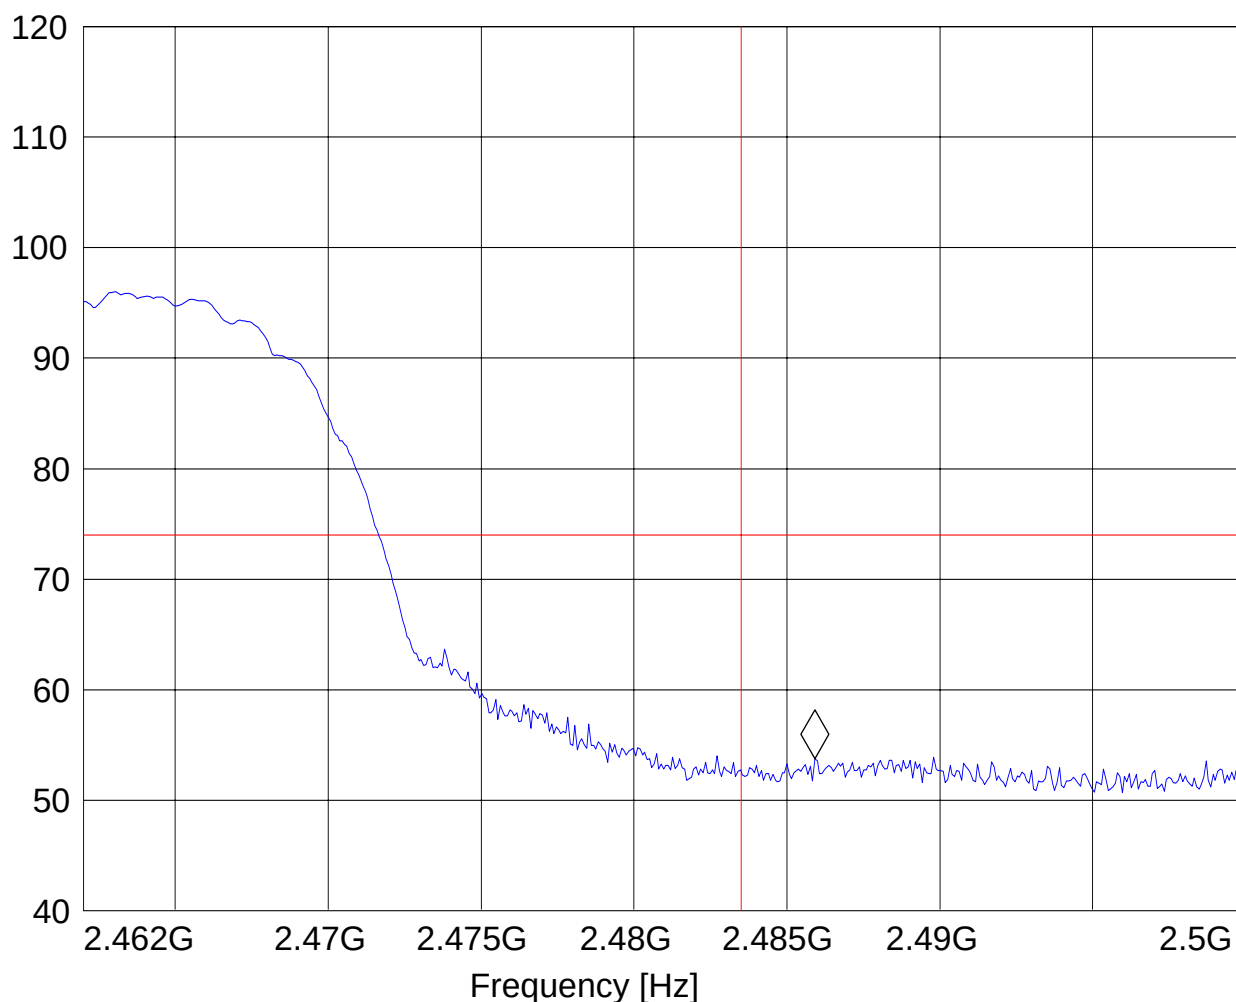

802.11g (2462MHz) AVG Chain A

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11b, ch 11, 1Mbps, chain B

ANT Orientation: V

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 HBE_AVG"

Marker: 2.48644489 GHz 49.92 dB μ V/m

Level [dB μ V/m]

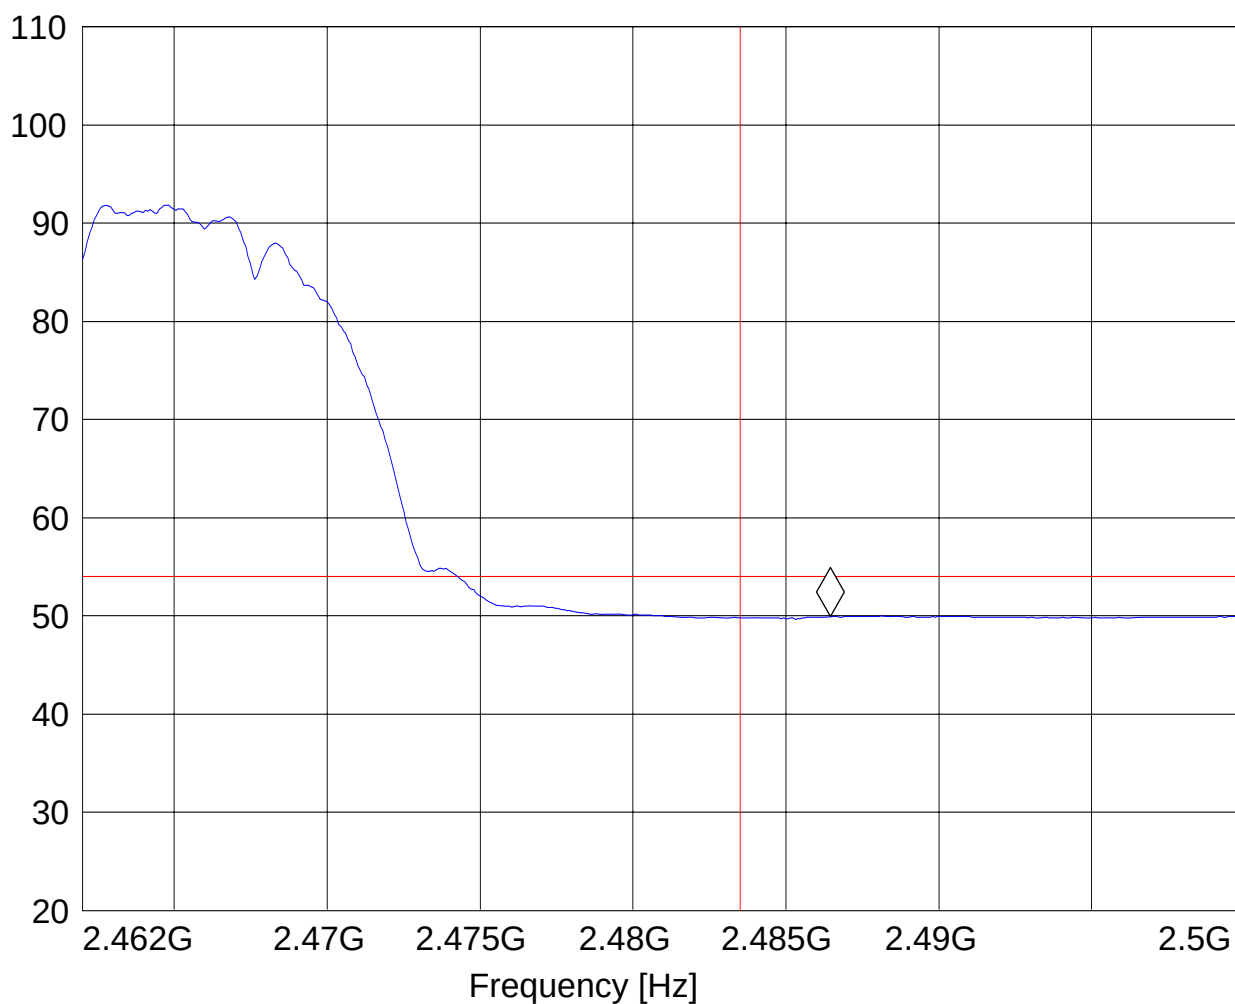

802.11g (2462MHz) PEAK Chain B

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch 11, Chain B, 12Mbps

ANT Orientation: V

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 HBE_PK"

Marker: 2.484693387 GHz 58.53 dB μ V/m

Level [dB μ V/m]

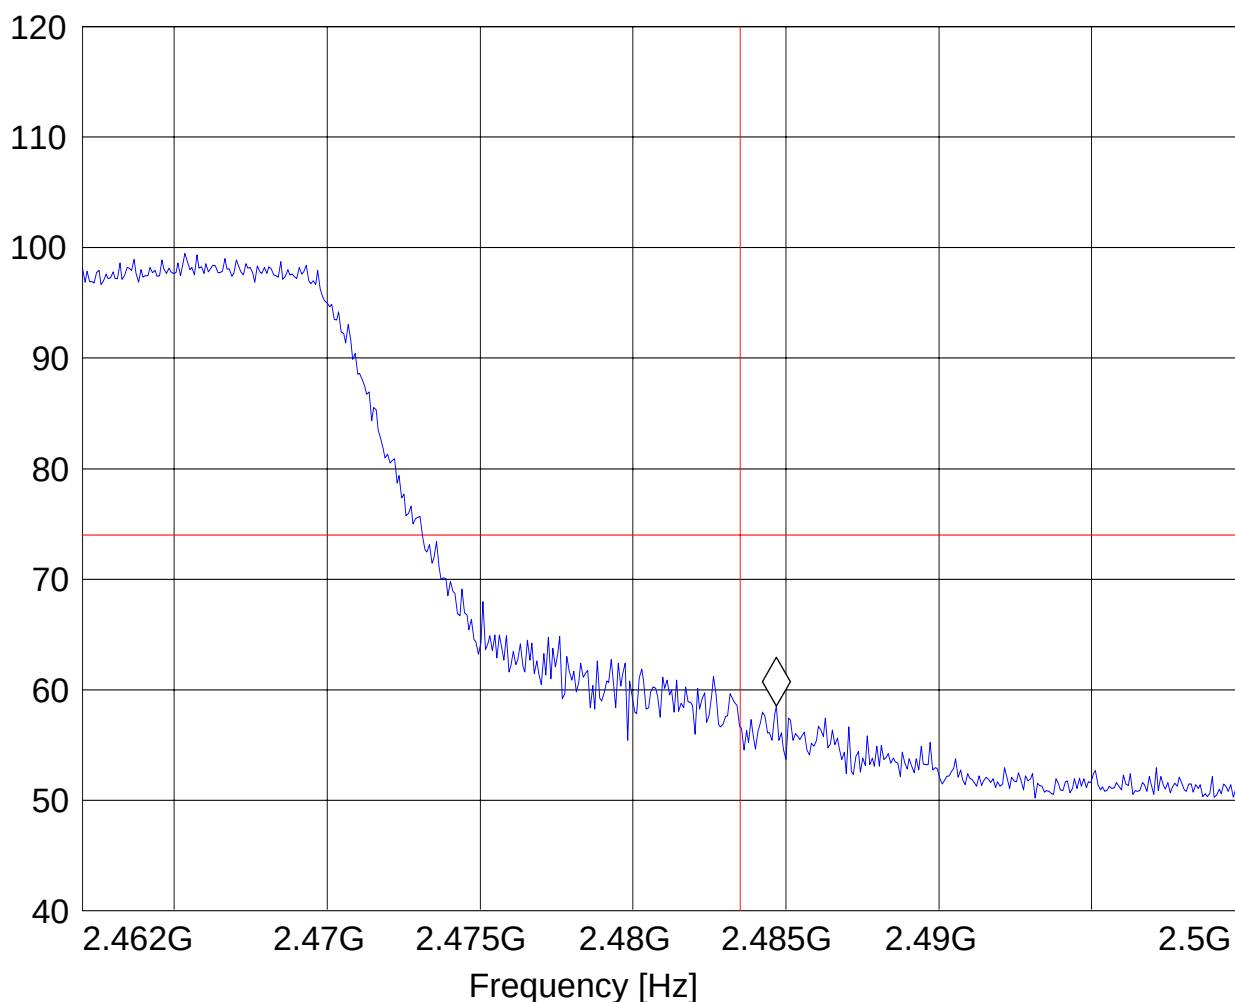

802.11g (2462MHz) AVG Chain B

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch 11, Chain B, 12Mbps

ANT Orientation: V

EUT Orientation: H


Test Engineer: Ed

Voltage: AC adapter

SWEEP TABLE: "FCC15.247 HBE_AVG"

Marker: 2.484008016 GHz 49.79 dB μ V/m

Level [dB μ V/m]

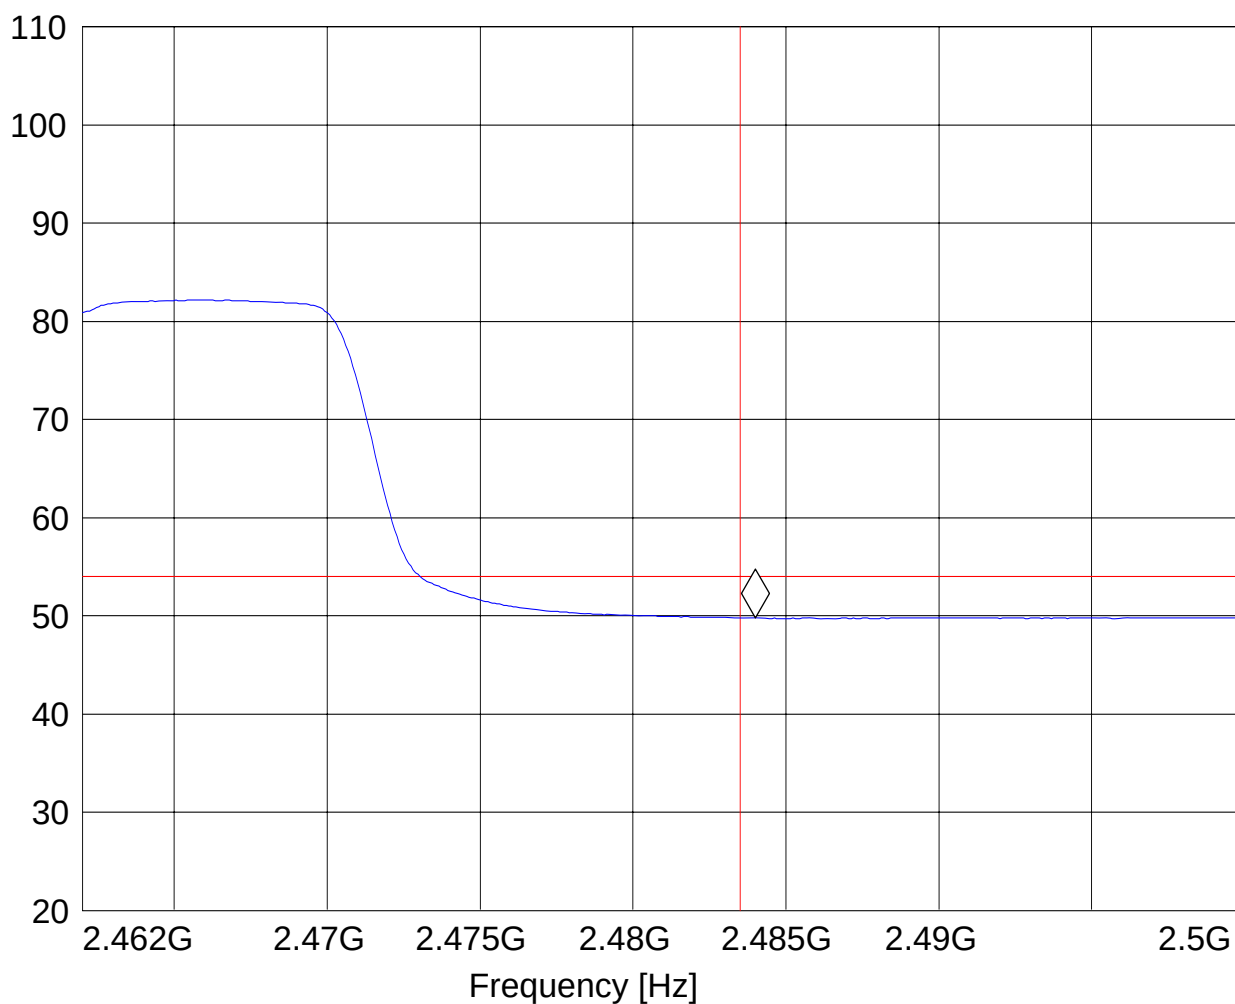

5.3 TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209

5.3.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

***PEAK LIMIT= 74dBuV/m**

***AVG. LIMIT= 54dBuV/m**

Notes:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode using an average limit , unless specified with the plots.
3. Radiated emissions are maximized by rotating the EUT 360° at 0.5 meter height increments between 1 and 4 meters.
4. Measurements were performed with the EUT in X, Y and Z orientations with the measurement antenna in both horizontal and vertical polarity. The plots below show the results of the worst case orientation and polarity

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

5.3.2 RESULTS

30MHz – 1GHz Chain A

Antenna: vertical

Note: This plot is valid for low, mid, high channels (worst-case plot)

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony


Test Mode: 802.11g, Ch 1, Chain A, 12 Mbs

ANT Orientation: V

EUT Orientation: H

Test Engineer: Ed

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

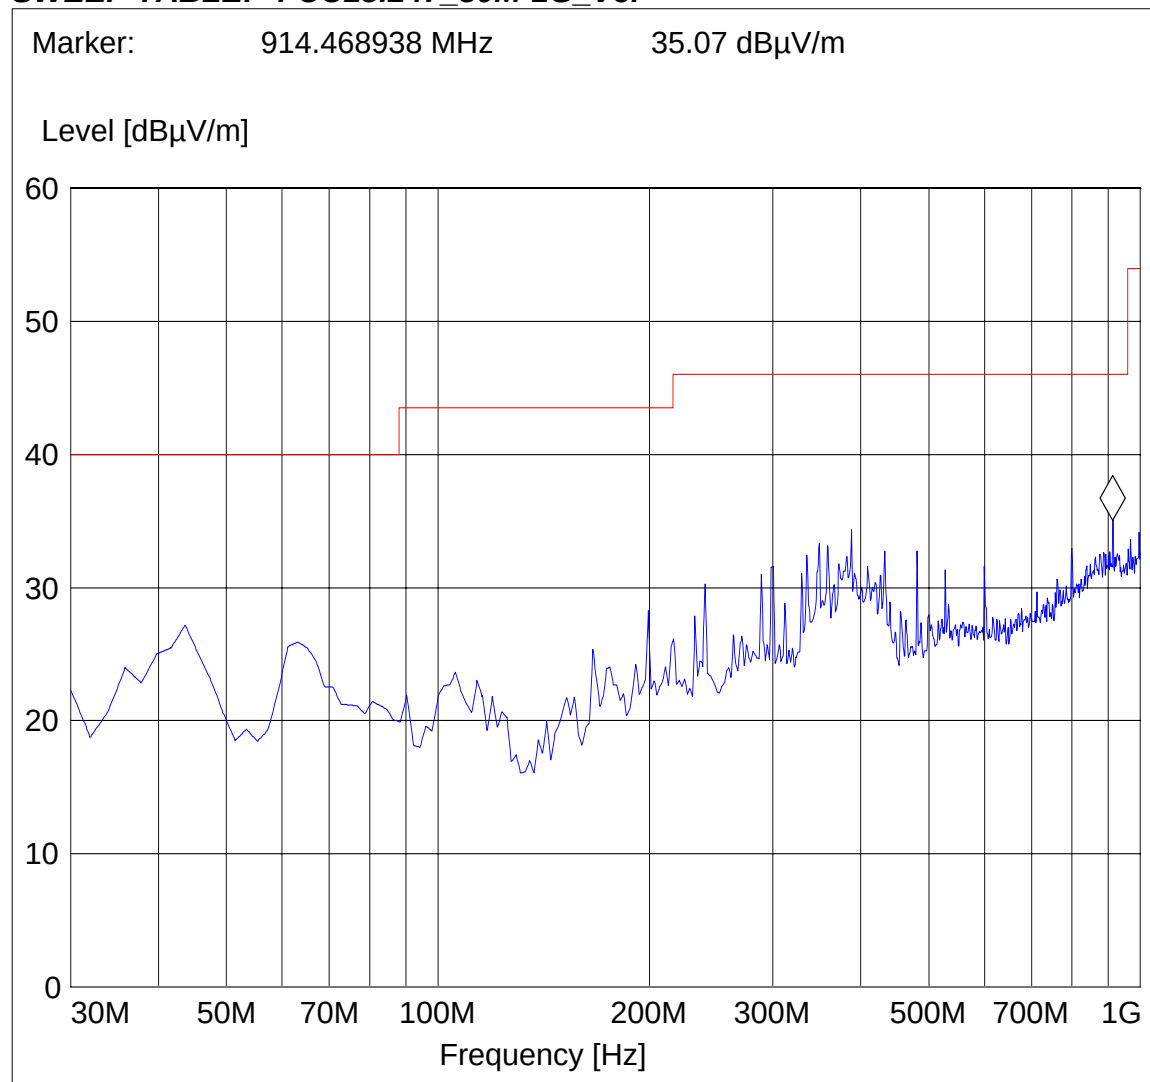

30MHz – 1GHz Chain A

Antenna: horizontal

Note: This plot is valid for low, mid, high channels (worst-case plot)

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony


Test Mode: 802.11g, Ch 1, Chain A, 12 Mbs

ANT Orientation: H

EUT Orientation: H

Test Engineer: Ed

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

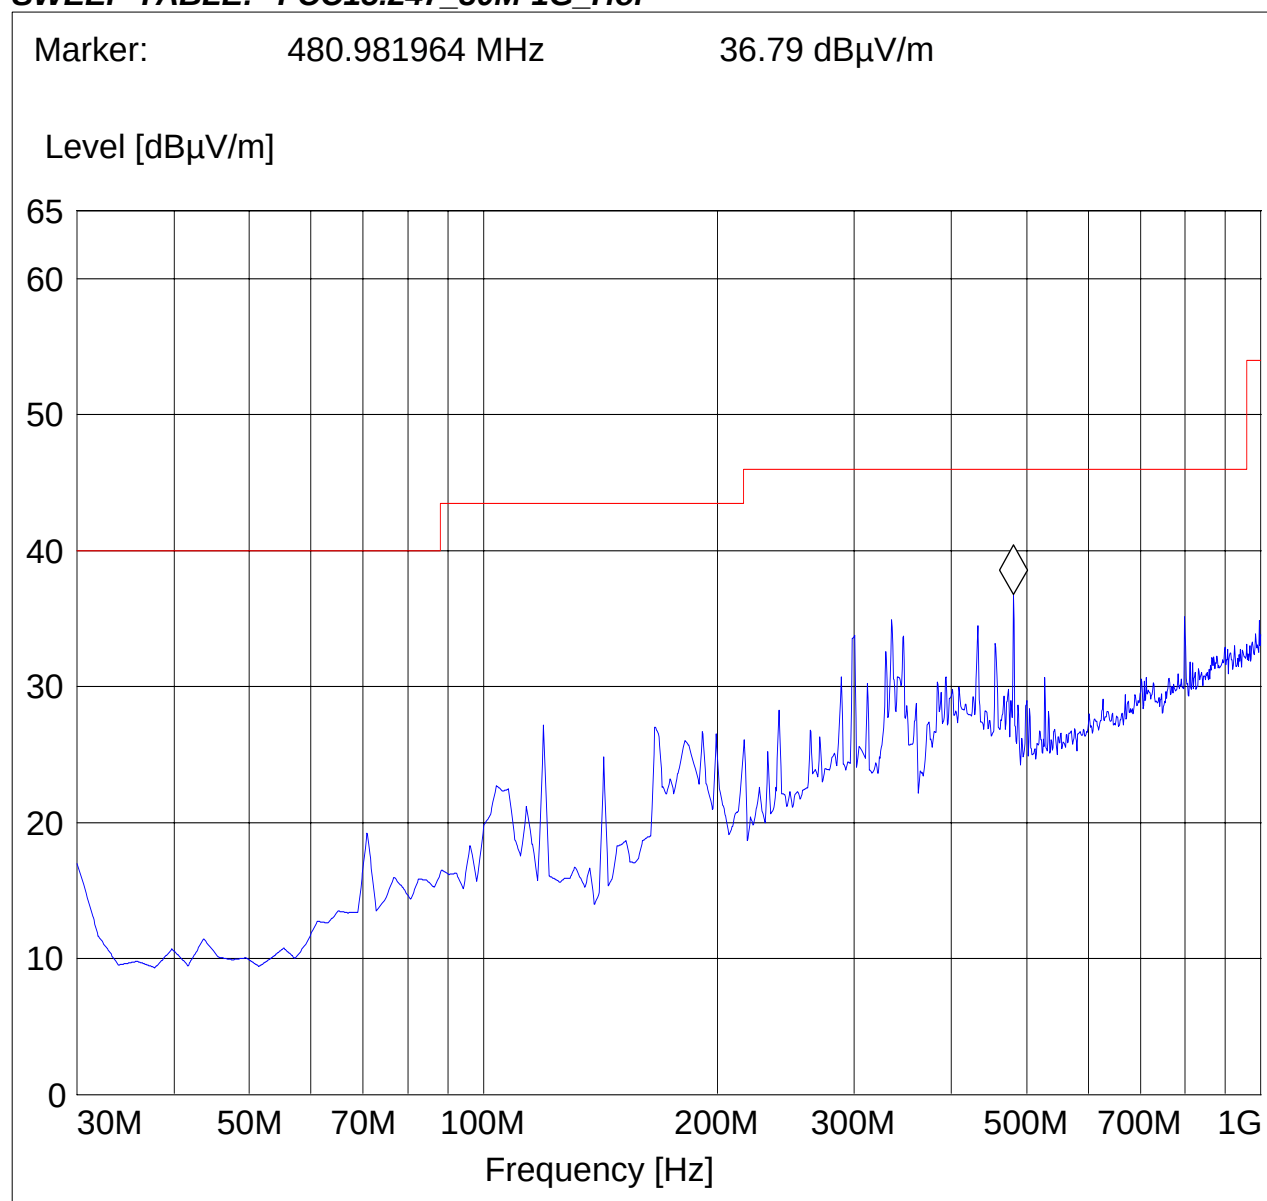

1-18GHz (2412MHz) Chain A

Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

CETECOM Inc.

411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: ES725

Manufacturer: Sony Electronics

Test mode: 802.11g, Ch 1, chain A, 12Mbps

EUT: H


Antenna: H

Test Engineer: Ed

SWEEP TABLE: "FCC 15.407 1-18G"

Marker: 2.396793587 GHz 63.42 dBμV/m

Level [dBμV/m]

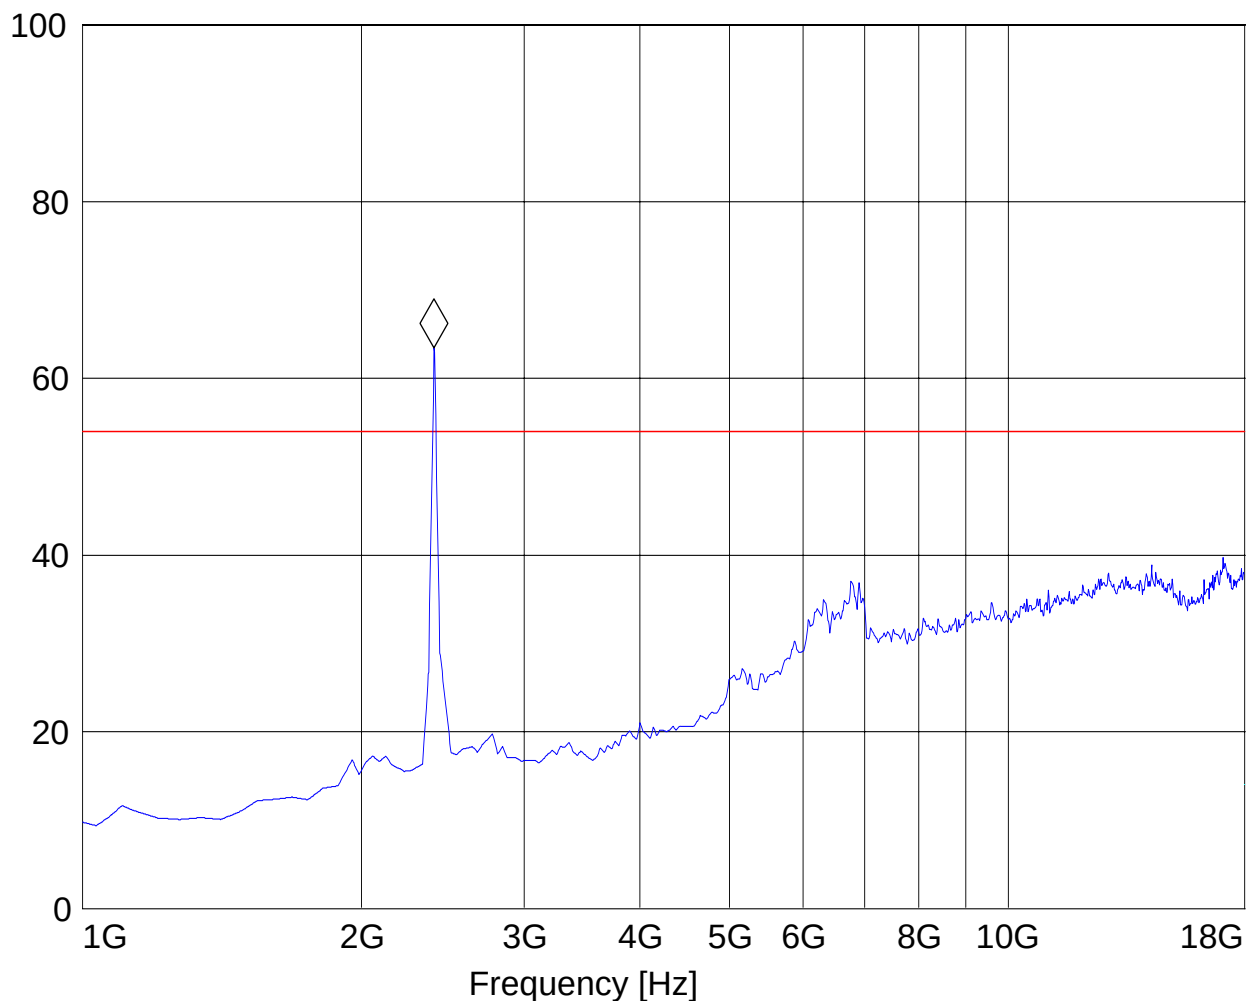

1-18GHz (2437MHz) Chain A

Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

CETECOM Inc.

411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: ES725

Manufacturer: Sony Electronics

Test mode: 802.11g, Ch 6, chain A, 12Mbps

EUT: H


Antenna: H

Test Engineer: Ed

SWEEP TABLE: "FCC 15.407 1-18G"

Marker: 2.430861723 GHz 66.48 dB μ V/m

Level [dB μ V/m]

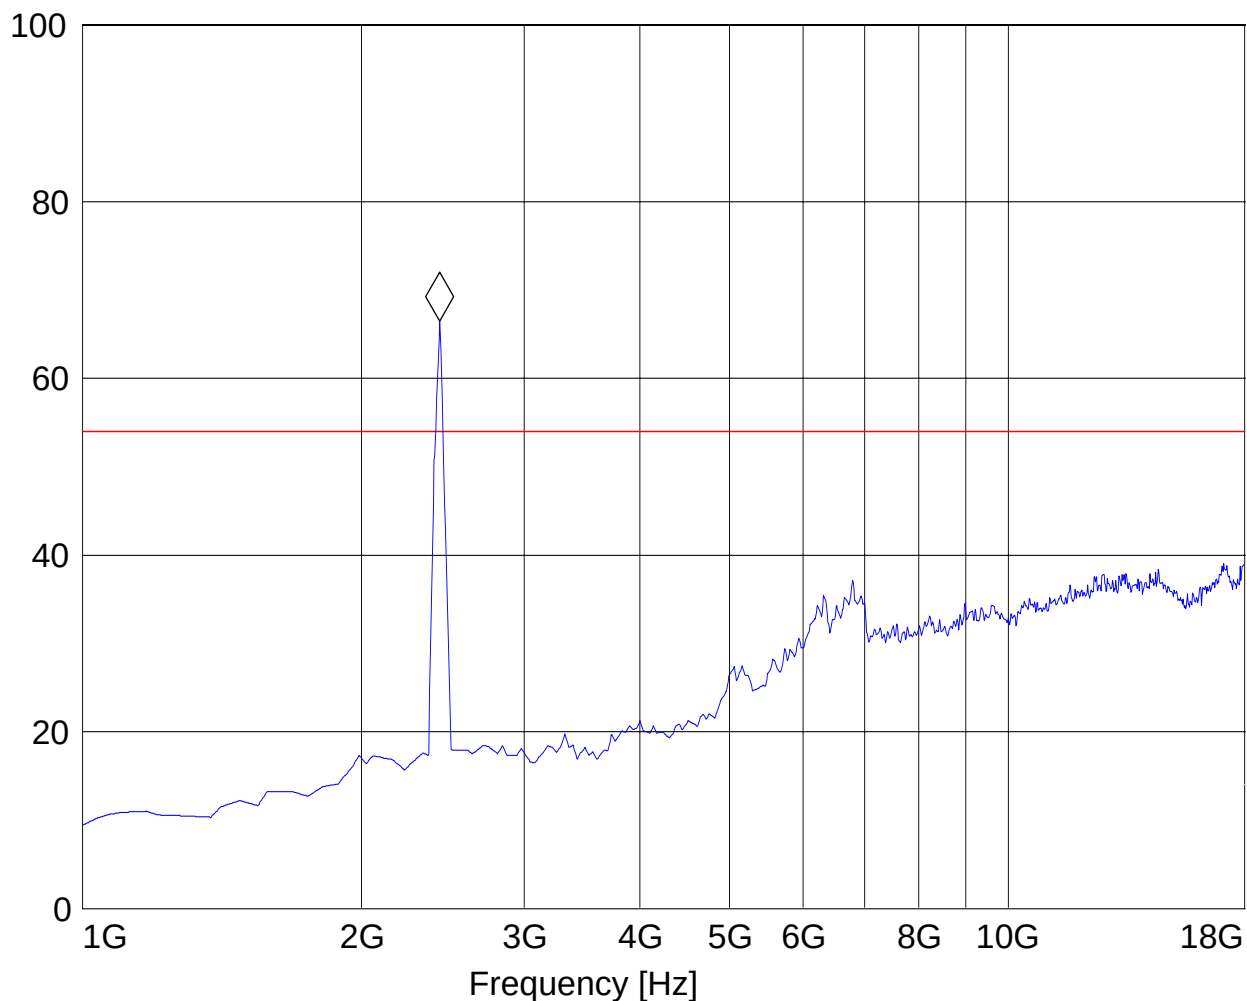

1-18GHz (2462MHz) Chain A

Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

CETECOM Inc.

411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: ES725

Manufacturer: Sony Electronics


Test mode: 802.11g, Ch 11, chain A, 12Mbps

EUT: H

Antenna: H

Test Engineer: Ed

SWEEP TABLE: "FCC 15.407 1-18G"

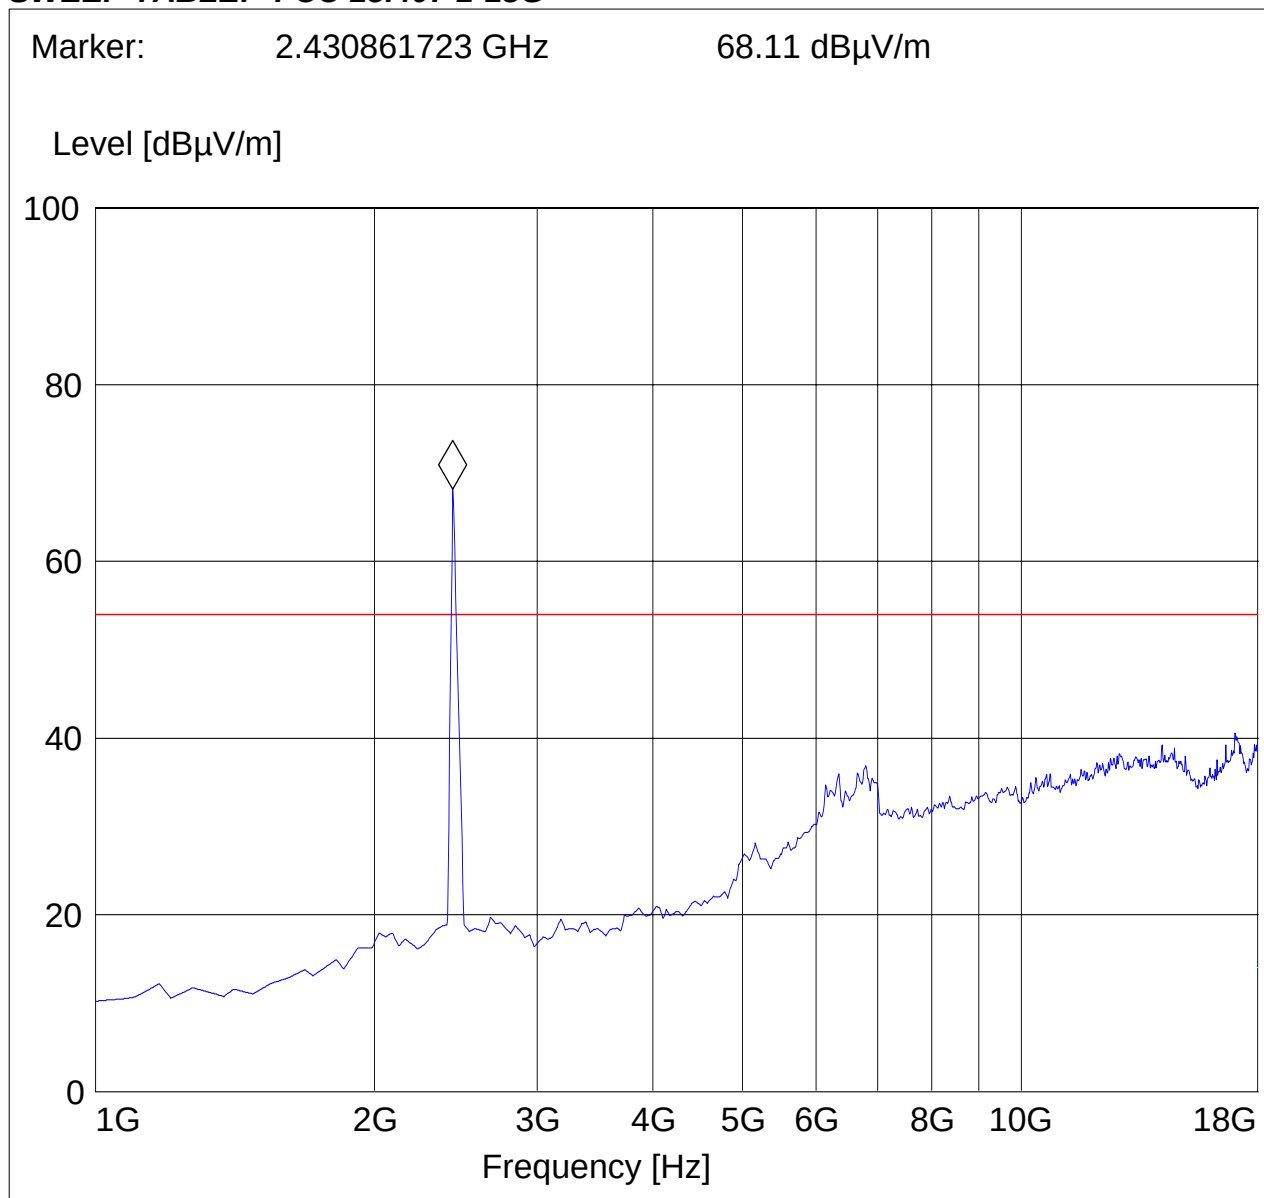

18-25GHz Chain A

Note: This plot is valid for low, mid, high channels (worst-case plot)

Note: Peak Reading vs. Average limit

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch 1, Chain A, 12Mbps

ANT Orientation: H


EUT Orientation: H

Test Engineer: Ed

SWEEP TABLE: "FCC15.247_18-26.5G"

Marker: 22.616232465 GHz 27.61 dB μ V/m

Level [dB μ V/m]

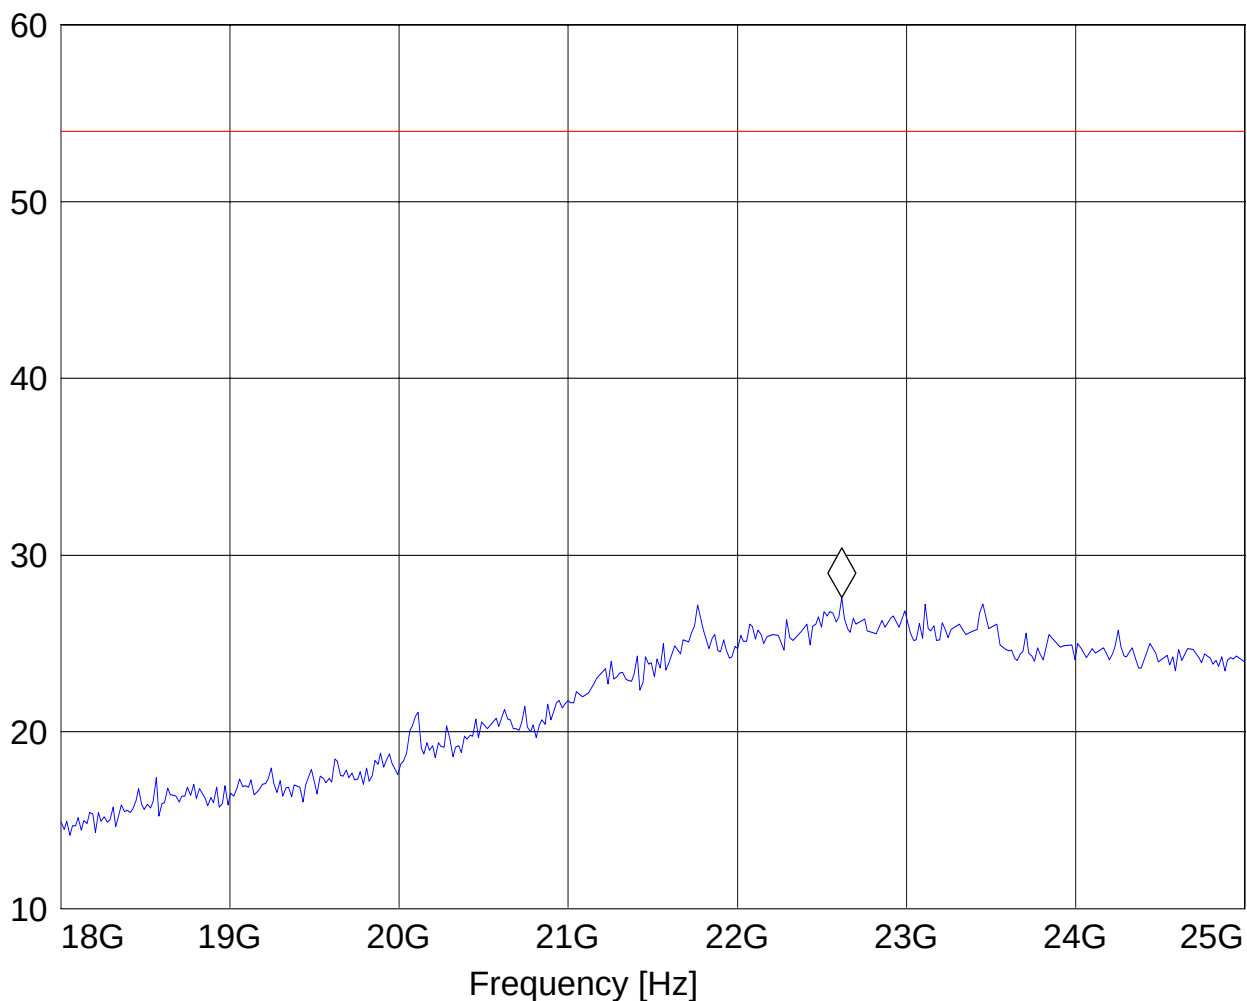

30MHz – 1GHz Chain B

Antenna: vertical

Note: This plot is valid for low, mid, high channels (worst-case plot)

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony


Test Mode: 802.11g, Ch 1, Chain B, 12 Mbs

ANT Orientation: V

EUT Orientation: H

Test Engineer: Ed

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

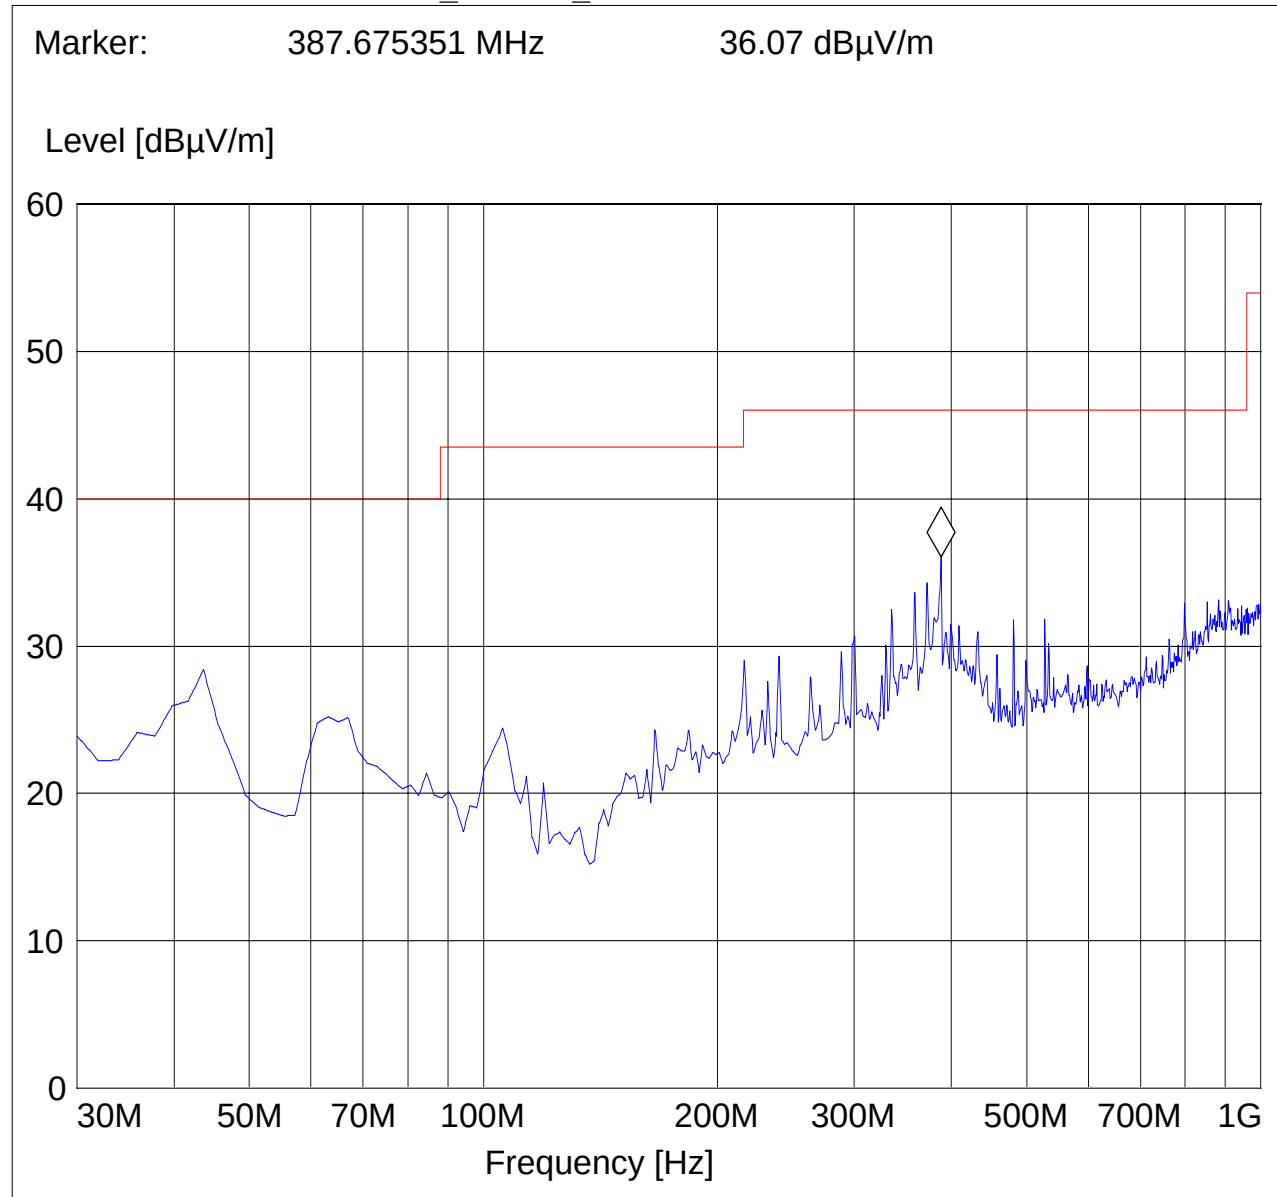

30MHz – 1GHz Chain B

Antenna: horizontal

Note: This plot is valid for low, mid, high channels (worst-case plot)

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony


Test Mode: 802.11g, Ch 1, Chain B, 12 Mbs

ANT Orientation: H

EUT Orientation: H

Test Engineer: Ed

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

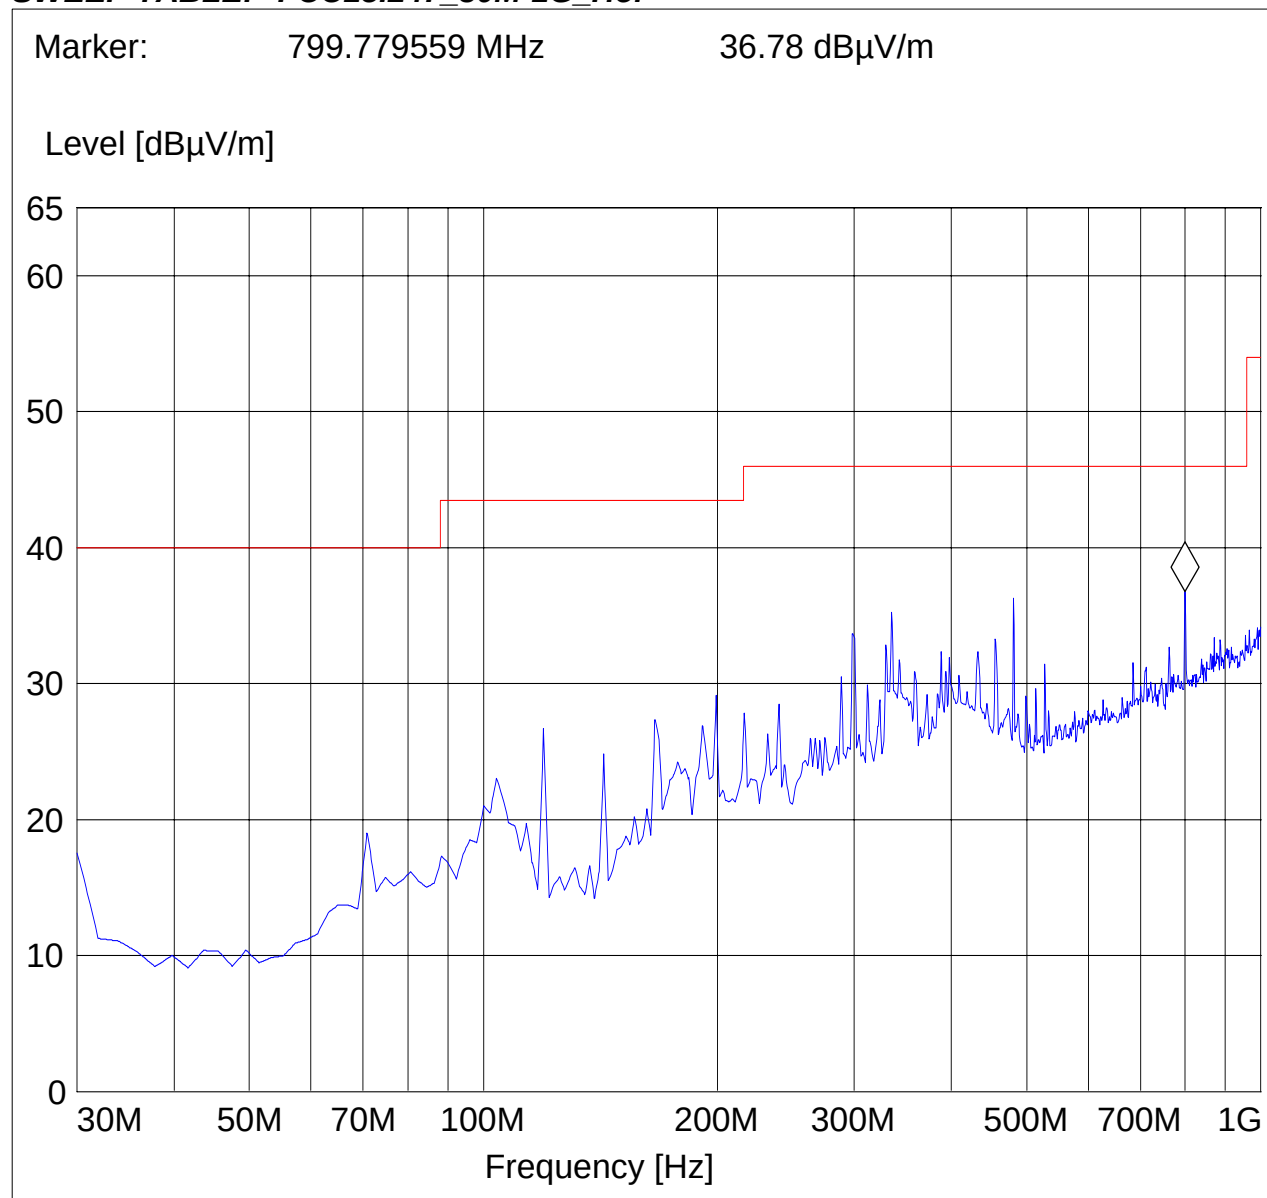

1-18GHz (2412MHz) Chain B

Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

CETECOM Inc.

411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: ES725

Manufacturer: Sony Electronics

Test mode: 802.11g, Ch 1, chain B, 12Mbps

EUT: H


Antenna: V

Test Engineer: Ed

SWEEP TABLE: "FCC 15.407 1-18G"

Marker: 2.396793587 GHz 59.74 dB μ V/m

Level [dB μ V/m]

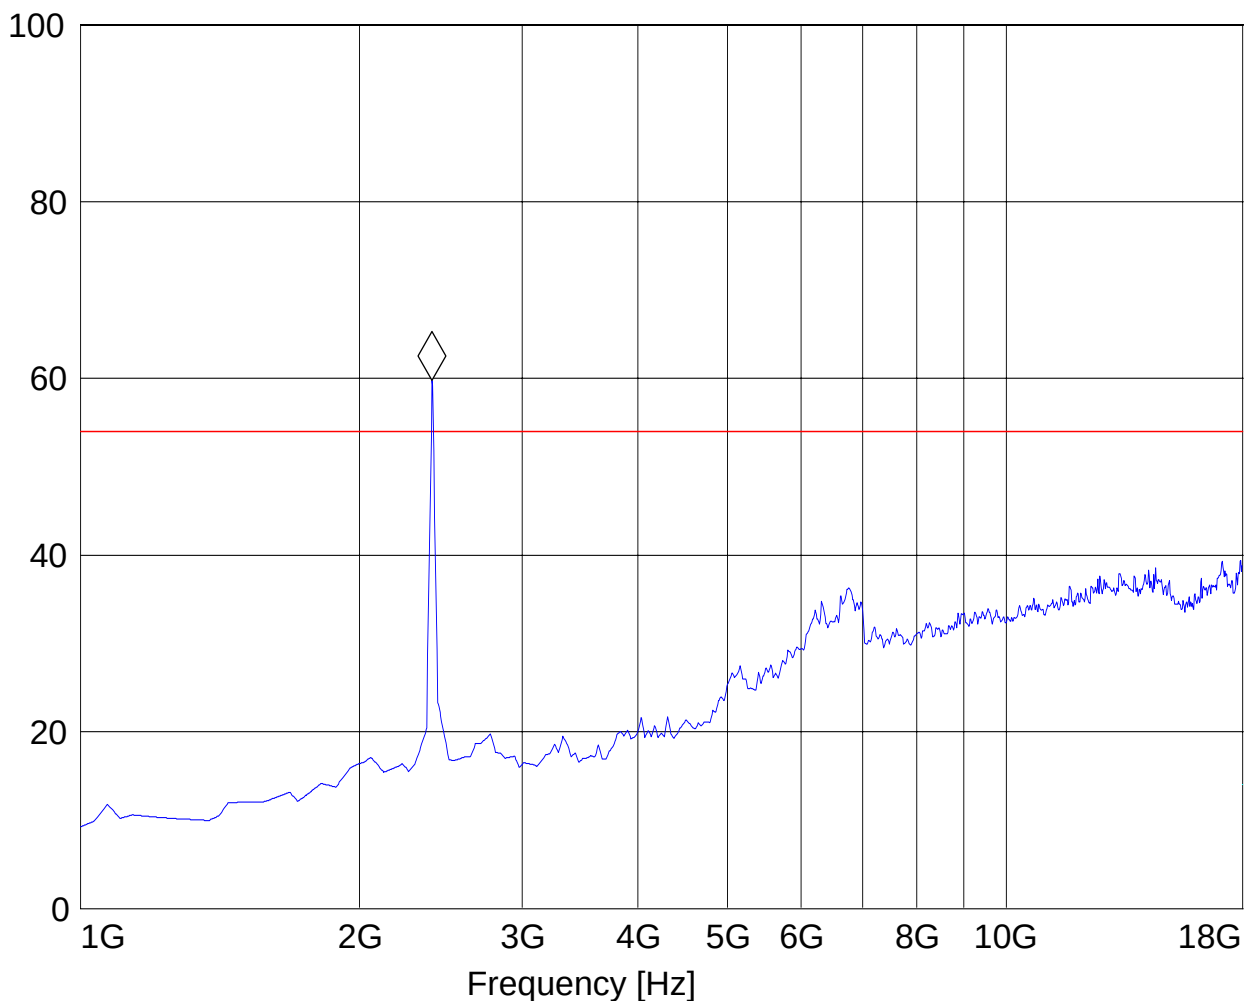

1-18GHz (2437MHz) Chain B

Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

CETECOM Inc.

411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: ES725

Manufacturer: Sony Electronics


Test mode: 802.11g, Ch 6, chain B, 12Mbps

EUT: H

Antenna: V

Test Engineer: Ed

SWEEP TABLE: "FCC 15.407 1-18G"

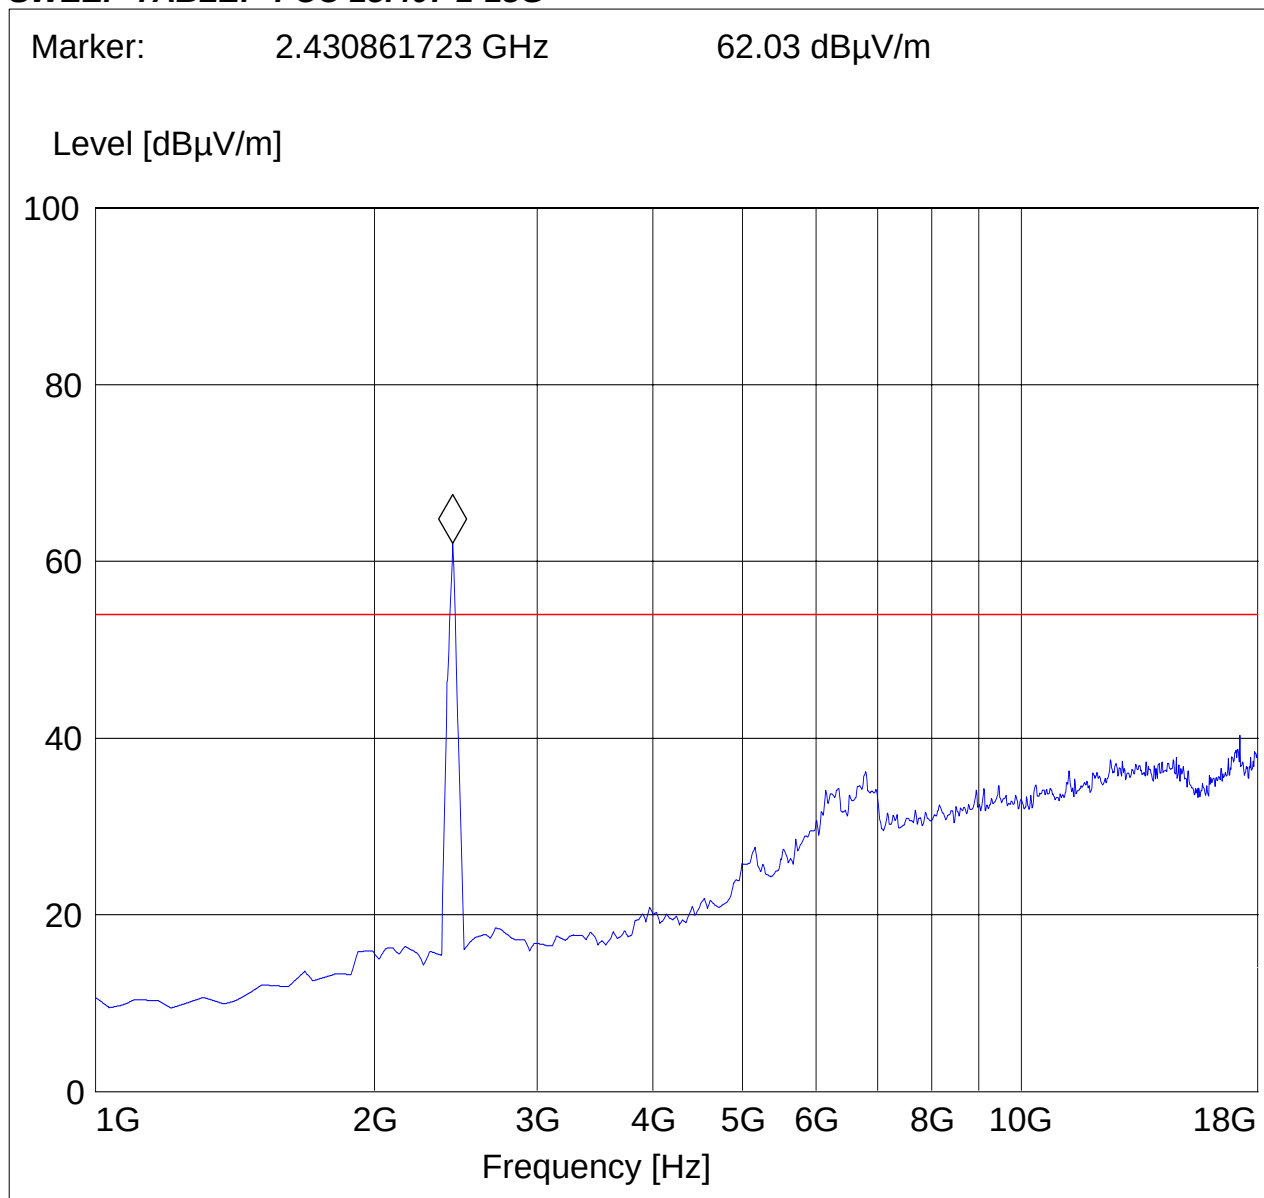

1-18GHz (2462MHz) Chain B

Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

CETECOM Inc.

411 Dixon Landing Road; Milpitas, CA 95035

EUT / Description: ES725

Manufacturer: Sony Electronics

Test mode: 802.11g, Ch 11, chain B, 12Mbps

EUT: H


Antenna: V

Test Engineer: Ed

SWEEP TABLE: "FCC 15.407 1-18G"

Marker: 2.46492986 GHz 63.04 dB μ V/m

Level [dB μ V/m]

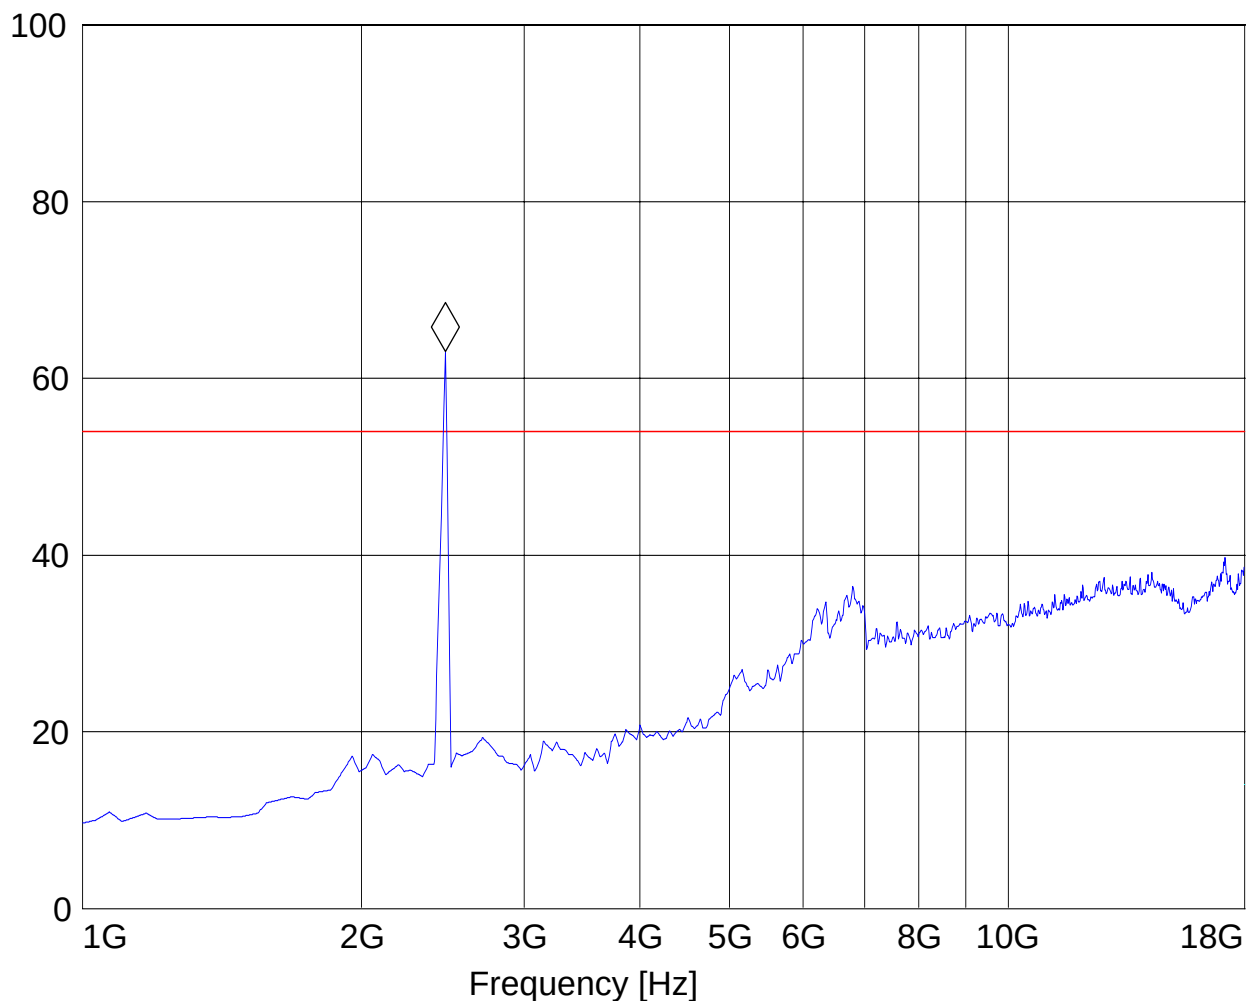

18-25GHz Chain B

Note: This plot is valid for low, mid, high channels (worst-case plot)

Note: Peak Reading vs. Average limit

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT: ES725

Customer: Sony

Test Mode: 802.11g, Ch 1, Chain B, 12Mbps

ANT Orientation: V


EUT Orientation: H

Test Engineer: Ed

SWEEP TABLE: "FCC15.247_18-26.5G"

Marker: 22.837675351 GHz 26.43 dB μ V/m

Level [dB μ V/m]

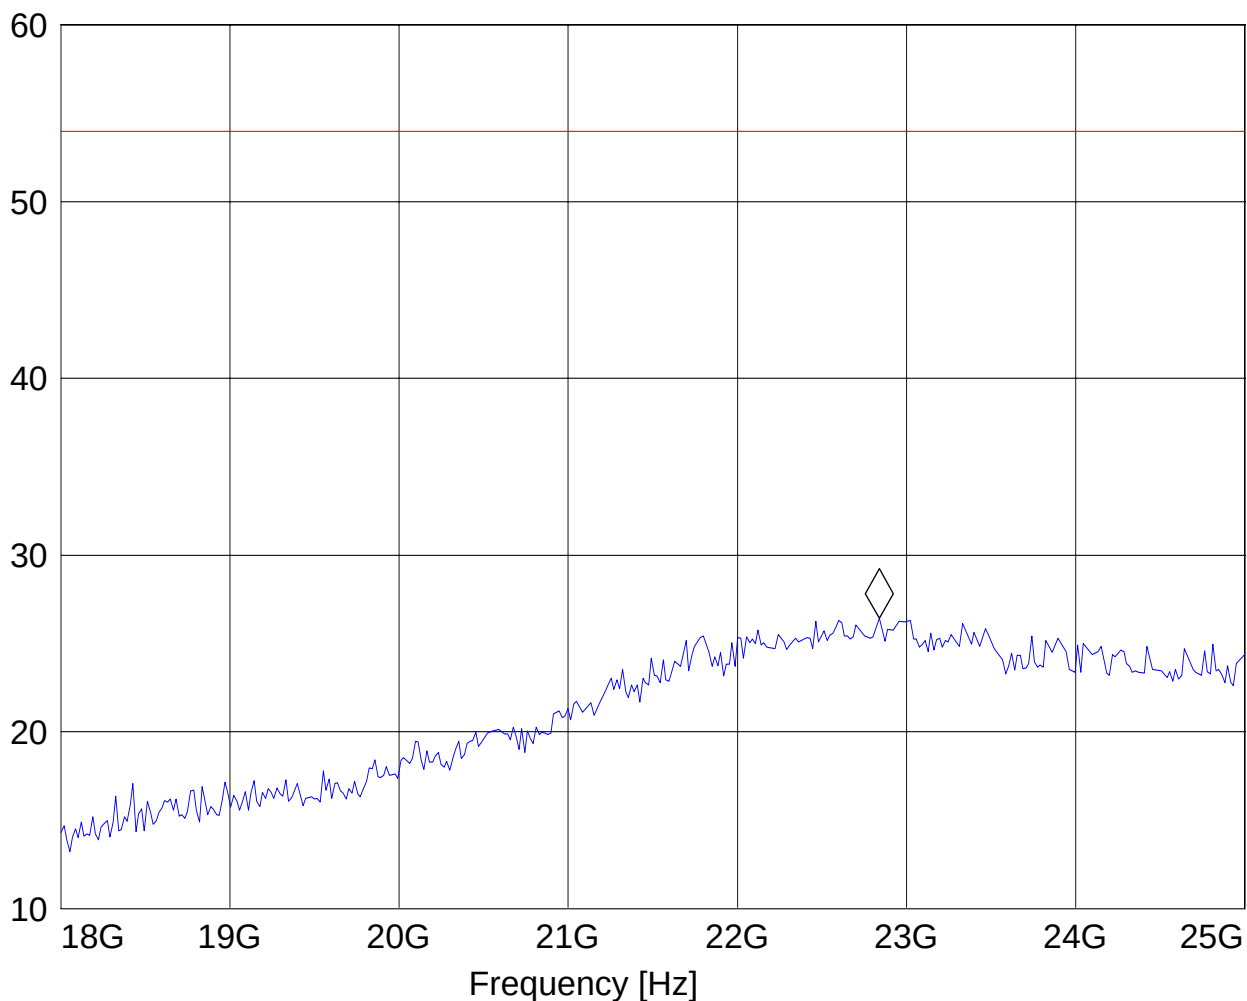

5.4 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207

5.4.1 Limits

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Limit


Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

ANALYZER SETTINGS: RBW = 10KHz


VBW = 10KHz

5.4.2 Results

Line:

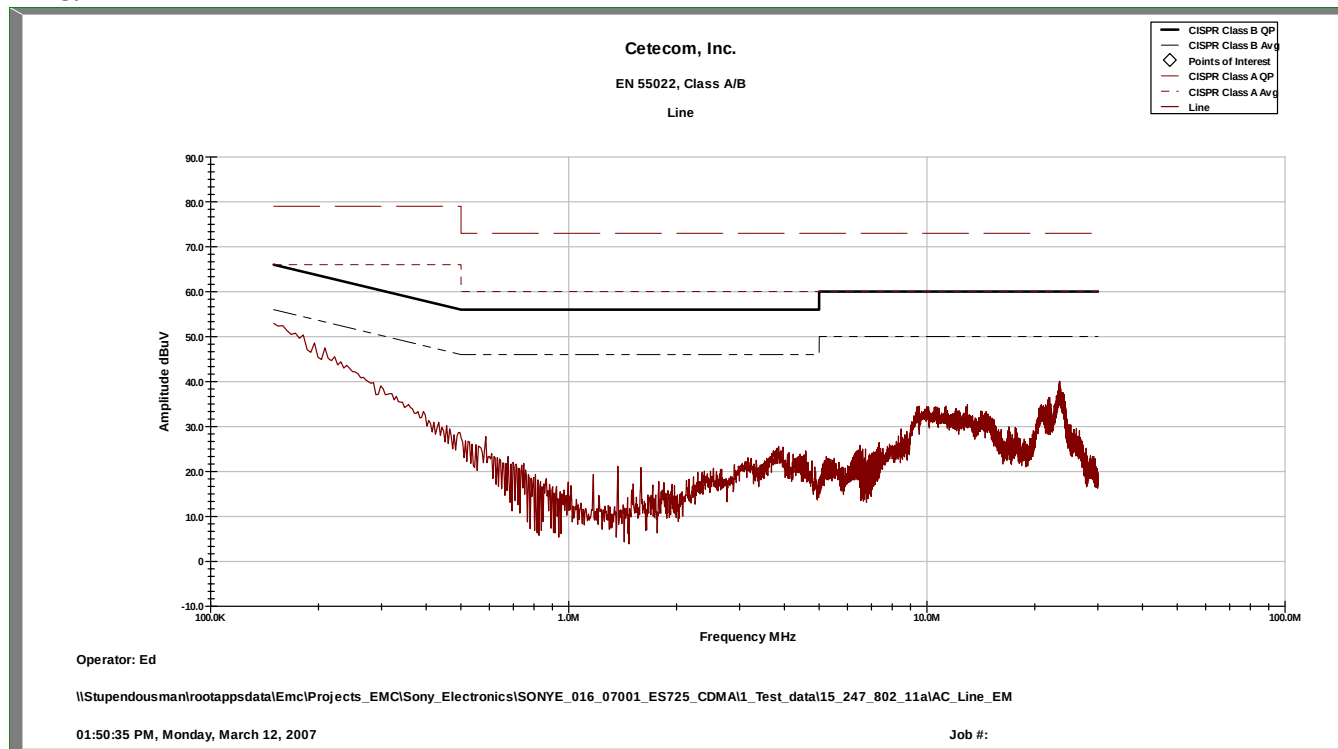

Neutral:

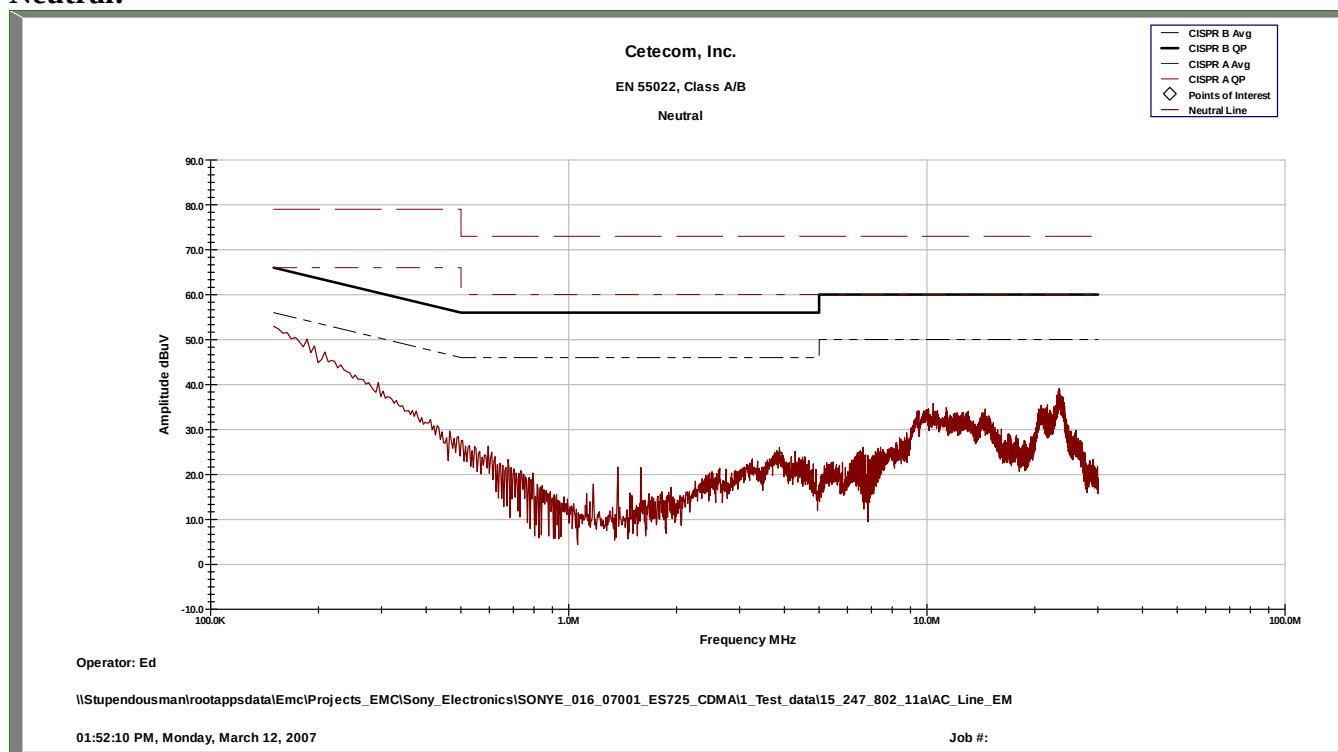

6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2007	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2007	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2007	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2007	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2007	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2007	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2007	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2007	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2007	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2007	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2007	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2007	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2007	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2007	2 years

7 BLOCK DIAGRAMS

Radiated Testing

