

**FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 Issue 4**

TEST REPORT

For

BLUETOOTH HEADSET

MODEL NUMBER: TUNE FLEX 3

REPORT NUMBER: 4792137414-1-RF-1

ISSUE DATE: June 17, 2026

**FCC ID: APITUNEFLEX3
IC: 6132A-TUNEFLEX3**

Prepared for

**HARMAN INTERNATIONAL INDUSTRIES INC
8500 Balboa Blvd Nothridge CA 91325, UNITED STATES**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	June 17, 2026	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC 15.203 RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2020 Clause 6.2	FCC Part 15.207	N/A
Conducted Output Power	ANSI C63.10-2020 Clause 7.8.5	FCC 15.247 (b) (1) RSS-247 Clause 6.2.3.2	Pass
20 dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2020 Clause 6.9.2 & 6.9.3	FCC 15.247 (a) (1) RSS-247 Clause 6.2.3.1 (a) RSS-Gen Clause 6.7	Pass
Carrier Hopping Channel Separation	ANSI C63.10-2020 Clause 7.8.2	FCC 15.247 (a) (1) RSS-247 Clause 6.2.3.1 (a)	Pass
Number of Hopping Frequency	ANSI C63.10-2020 Clause 7.8.3	15.247 (a) (1) III RSS-247 Clause 6.2.3.1 (b)	Pass
Time of Occupancy (Dwell Time)	ANSI C63.10-2020 Clause 7.8.4	15.247 (a) (1) III RSS-247 Clause 6.2.3.1 (b)	Pass
Conducted Bandedge and Spurious Emission	ANSI C63.10-2020 Clause 6.10.4 & Clause 7.8.7	FCC 15.247 (d) RSS-247 Clause 6.6	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2020 Clause 6.4 & 6.5 & 6.6 & 7.8.8	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 6.6 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
Duty Cycle	ANSI C63.10-2020, Clause 11.6	None; for reporting purposes only.	Pass

Note:

1. For FCC&ISED, this report is also performed according to ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 standards.
2. "N/A" means not applicable in this report.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <FCC 47 CFR PART 15 SUBPART C

ISED RSS-247 Issue 4> when <Simple Acceptance> decision rule is applied. Decision rule for statement of conformity: The measurement uncertainty is not taken into account for statement of conformity.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	7
2. TEST METHODOLOGY.....	8
3. FACILITIES AND ACCREDITATION.....	8
4. CALIBRATION AND UNCERTAINTY	9
4.1. MEASURING INSTRUMENT CALIBRATION	9
4.2. MEASUREMENT UNCERTAINTY	9
5. EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF EUT	10
5.2. CHANNEL LIST	10
5.3. MAXIMUM POWER	11
5.4. TEST CHANNEL CONFIGURATION.....	11
5.5. THE WORSE CASE POWER SETTING PARAMETER	11
5.6. DESCRIPTION OF AVAILABLE ANTENNAS	12
5.7. SUPPORT UNITS FOR SYSTEM TEST	13
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	14
7. ANTENNA PORT TEST RESULTS	17
7.1. CONDUCTED OUTPUT POWER	17
7.2. 20 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	18
7.3. CARRIER HOPPING CHANNEL SEPARATION.....	20
7.4. NUMBER OF HOPPING FREQUENCY.....	22
7.5. TIME OF OCCUPANCY (DWELL TIME).....	24
7.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSION	26
7.7. DUTY CYCLE	28
8. RADIATED TEST RESULTS	29
8.1. RESTRICTED BANDEDGE-LEFT	37
8.2. RESTRICTED BANDEDGE-RIGHT	42
8.3. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-LEFT	47
8.4. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-RIGHT	53
8.5. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)-LEFT	59
8.6. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)-RIGHT	71
8.7. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)-LEFT.....	83
8.8. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)-RIGHT	86

8.9.	SPURIOUS EMISSIONS(18 GHZ~26 GHZ)-LEFT.....	89
8.10.	SPURIOUS EMISSIONS(18 GHZ~26 GHZ)-RIGHT	91
8.11.	SPURIOUS EMISSIONS(30 MHZ~1 GHZ)-LEFT	93
8.12.	SPURIOUS EMISSIONS(30 MHZ~1 GHZ)-RIGHT	95
9.	ANTENNA REQUIREMENT	97
10.	TEST DATA.....	98
10.1.	APPENDIX A: 20DB EMISSION BANDWIDTH.....	98
10.1.1.	Test Result-Left.....	98
10.1.2.	Test Graphs-Left	99
10.1.3.	Test Result-Right	101
10.1.4.	Test Graphs-Right.....	102
10.2.	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....	104
10.2.1.	Test Result-Left.....	104
10.2.2.	Test Graphs-Left	105
10.2.3.	Test Result-Right	107
10.2.4.	Test Graphs-Right.....	108
10.3.	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....	110
10.3.1.	Test Result-Left.....	110
10.3.2.	Test Result-Right	110
10.4.	APPENDIX D: CARRIER FREQUENCY SEPARATION	111
10.4.1.	Test Result-Left.....	111
10.4.2.	Test Graphs-Left	111
10.4.3.	Test Result-Right	112
10.4.4.	Test Graphs-Right.....	112
10.5.	APPENDIX E: TIME OF OCCUPANCY	113
10.5.1.	Test Result-Left.....	113
10.5.2.	Test Graphs-Left	114
10.5.3.	Test Result-Right	116
10.5.4.	Test Graphs-Right.....	117
10.6.	APPENDIX F: NUMBER OF HOPPING CHANNELS.....	119
10.6.1.	Test Result-Left.....	119
10.6.2.	Test Graphs-Left	119
10.6.3.	Test Result-Right	120
10.6.4.	Test Graphs-Right.....	120
10.7.	APPENDIX G: BAND EDGE MEASUREMENTS	121
10.7.1.	Test Result-Left.....	121
10.7.2.	Test Result-Right	122
10.7.3.	Test Graphs-Left.....	123
10.7.4.	Test Graphs-Right.....	126
10.8.	APPENDIX H: CONDUCTED SPURIOUS EMISSION.....	129
10.8.1.	Test Result-Left.....	129
10.8.2.	Test Result-Right	130
10.8.3.	Test Graphs-Left	131
10.8.4.	Test Graphs-Right.....	137

10.9.	APPENDIX I: DUTY CYCLE	143
10.9.1.	Test Result-Left.....	143
10.9.2.	Test Graphs-Left.....	143
10.9.3.	Test Result-Right	144
10.9.4.	Test Graphs-Right.....	144

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: HARMAN INTERNATIONAL INDUSTRIES INC
Address: 8500 Balboa Blvd Nothridge CA 91325, UNITED STATES

Manufacturer Information

Company Name: HARMAN INTERNATIONAL INDUSTRIES INC
Address: 8500 Balboa Blvd Nothridge CA 91325, UNITED STATES

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: TUNE FLEX 3
Brand: JBL
Sample Received Date: May 9, 2026
Sample Status: Normal
Sample ID: 9724933
Date of Tested: May 18, 2026 to June 17, 2026

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR PART 15 SUBPART C ISED RSS-247 Issue 4	Pass


Prepared By:



Johnson Liu

Laboratory Engineer Associate

Checked By:



Kebo Zhang

Operations Leader

Approved By:



Stephen Guo

Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC 47 CFR PART 15 SUBPART C ISED RSS-247 Issue 4, KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, FCC 47 CFR Part 2, ANSI C63.10-2020, ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	4.36 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.47 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.65 dB (1 GHz ~ 18 GHz)
	4.73 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
20dB Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Carrier Frequency Separation	±1.9%
Maximum Conducted Output Power	±0.743 dB
Number of Hopping Channel	±1.9%
Time of Occupancy	±0.028%
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

Remark: For Radiated Emission measurements (200 MHz - 18 GHz), the EUT support table is made of Expanded Polystyrene (EPS). This material is characterized by a low dielectric constant, as recognized in CISPR 16-1-4, to minimize its influence on field strength measurements. This influence has been considered in the uncertainty budget.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	BLUETOOTH HEADSET
Model	TUNE FLEX 3

Frequency Range:	2402 MHz to 2480 MHz
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Type of Modulation:	GFSK, $\Pi/4$ DQPSK
Ratings	DC 3.7V via Battery

5.2. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

5.3. MAXIMUM POWER

Left:

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)
GFSK	2402 ~ 2480	0-78[79]	10.67
$\Pi/4$ -DQPSK	2402 ~ 2480	0-78[79]	10.69

Right:

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)
GFSK	2402 ~ 2480	0-78[79]	9.80
$\Pi/4$ -DQPSK	2402 ~ 2480	0-78[79]	9.78

Note:

1. Maximum peak output power = measured value + cable loss (provided by UL)

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK	CH 00(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
$\Pi/4$ -DQPSK	CH 00(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
GFSK	Hopping	
$\Pi/4$ -DQPSK	Hopping	

PACKET TYPE CONFIGURATION

Test Mode	Packet Type	Setting (Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
$\Pi/4$ -DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679

5.5. THE WORSE CASE POWER SETTING PARAMETER

WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate (Mbps)
BR	FHSS	GFSK	1Mbit/s
EDR	FHSS	$\Pi/4$ -DQPSK	2Mbit/s

Note: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations data rates.

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		BQB.exe		
Modulation Type	Transmit Antenna Number	Test Software setting value		
		CH 00	CH 39	CH 78
GFSK	Left & Right	2	2	2
π/4-DQPSK	Left & Right	2	2	2

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
Left	2402 ~ 2480	LDS	-2.54
Right	2402 ~ 2480	LDS	-0.60

Note: The antenna gain is provided by clients.

Test Mode	Transmit and Receive Mode	Description
GFSK	☒1TX, 1RX	Antenna Left or Right can be used as transmitting/receiving antenna.
π/4-DQPSK	☒1TX, 1RX	Antenna Left or Right can be used as transmitting/receiving antenna.

5.7. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E14	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

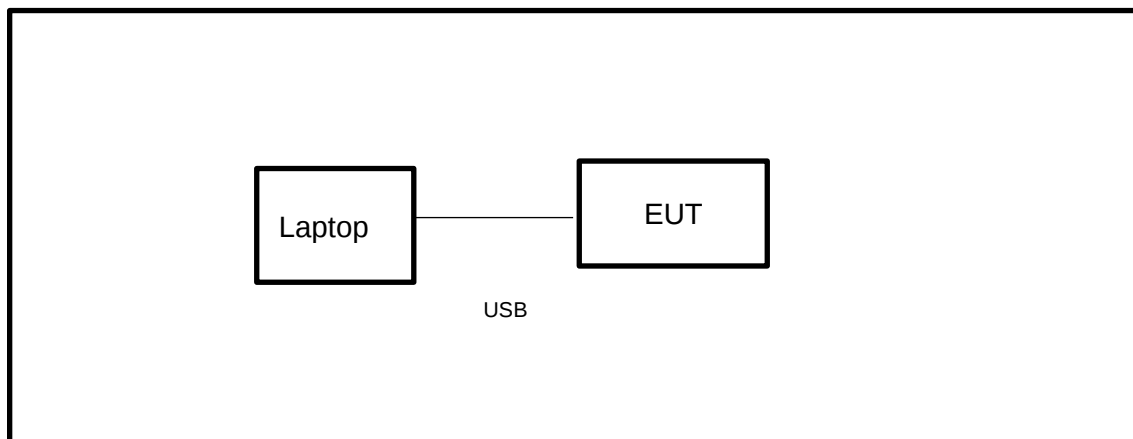

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Dec.26,2025	Dec.25,2026
Vector Signal Generator	R&S	SMBV100A	261637	Sep.12, 2025	Sep.11, 2026
Signal Generator	R&S	SMB100A	178553	Sep.12, 2025	Sep.11, 2026
Signal Analyzer	R&S	FSV40	101118	Sep.12, 2025	Sep.11, 2026
Software					
Description		Manufacturer	Name	Version	
For R&S TS 8997 Test System		Rohde & Schwarz	EMC 32	10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.12, 2025	Sep.11, 2026
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.12, 2025	Sep.11, 2026
DC power supply	TSSTAKASAGO	ZX-400L	409150160137	Sep.12, 2025	Sep.11, 2026
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.12, 2025	Sep.11, 2026
Attenuator	Aglient	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026
RF Control Unit	Tonscend	JS0806-2	23B80620666	Dec.26,2025	Dec.25,2026
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Radiated Emissions(Below 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.12, 2025	Sep.11, 2026
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.12, 2025	Sep.11, 2026
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions(Above 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Signal Analyzer	R&S	FSV40	101117	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-001-3000	TRS-302-00051	Sep.12, 2025	Sep.11, 2026
Horn Antenna	ETS-Lindgren	3117	00213191	Jan.29,2026	Jan.28,2029
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.12, 2025	Sep.11, 2026
High Gain Horn Antenna	Schwarzbeck	BBHA-9170	697	Jun. 30, 2024	Jun. 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00002	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.12, 2025	Sep.11, 2026
Highpass Filter	Wainwright	WHKX10-2700-3000-1800-40SS	24	Sep.12, 2025	Sep.11, 2026
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Sep.12, 2025	Sep.11, 2026
Software					
Description		Manufacturer	Name		Version
Test Software for Radiated Emission		Tonscend	JS32-RE		5.0.0
Test Software for Radiated Emissions		Farad	EZ-EMC		Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Sep.16, 2025	Sep.15, 2026
Barometer	Yiyi	Baro	N/A	Sep.19, 2025	Sep.18, 2026
Attenuator	Agilent	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS


FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247 (b) (1) ISED RSS-247 Clause 6.2.3.2	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30 dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel: 125 mW or 21 dBm	2400-2483.5

TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.3°C	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.7V

TEST DATE / ENGINEER

Test Date	May 22, 2026	Test By	Eason He
-----------	--------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix C

7.2. 20 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247 (a) (1) RSS-247 Clause 6.2.3.1 (a)	20 dB Bandwidth	None; for reporting purposes only.	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2020 clause 6.9.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Bandwidth: approximately 3×RBW For 99 % Occupied Bandwidth: ≥ 3×RBW
Span	Between 2 times and 5.0 times the OBW
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99 % occupied bandwidth and 20 dB Bandwidth.

TEST SETUP

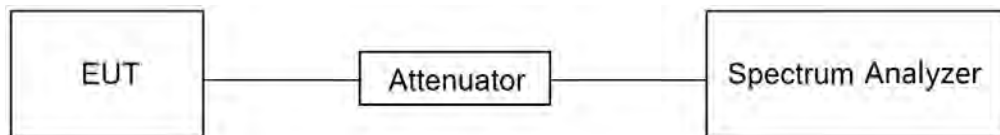

TEST ENVIRONMENT

Temperature	24.3°C	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.7V

TEST DATE / ENGINEER

Test Date	May 22, 2026	Test By	Eason He
-----------	--------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix A&B

7.3. CARRIER HOPPING CHANNEL SEPARATION

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247 (a) (1) ISED RSS-247 Clause 6.2.3.1 (a)	Carrier Frequency Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 7.8.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	≥RBW
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

TEST SETUP

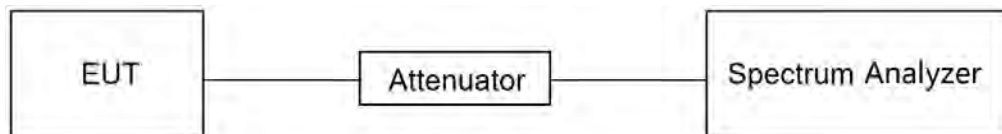

TEST ENVIRONMENT

Temperature	24.3°C	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.7V

TEST DATE / ENGINEER

Test Date	May 22, 2026	Test By	Eason He
-----------	--------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. NUMBER OF HOPPING FREQUENCY

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
FCC 47 CFR 15.247 (a) (1) III ISED RSS-247 Clause 6.2.3.1 (b)	Number of Hopping Frequency	at least 15 hopping channels

TEST PROCEDURE


Refer to ANSI C63.10-2020 clause 7.8.3.

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	≥RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

TEST SETUP

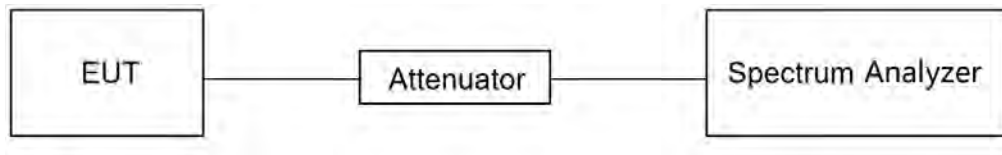

TEST ENVIRONMENT

Temperature	24.3°C	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.7V

TEST DATE / ENGINEER

Test Date	May 22, 2026	Test By	Eason He
-----------	--------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix F

7.5. TIME OF OCCUPANCY (DWELL TIME)

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
FCC 47 CFR 15.247 (a) (1) III ISED RSS-247 Clause 6.2.3.1 (b)	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 7.8.4.

Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected transmission time per hop
VBW	$\geq$ RBW
Span	Zero span, centered on a hopping channel
Trace	Clear-write, single sweep
Sweep time	Set so that the start of the first transmission and end of the last transmission for the hop are clearly captured. Setting the sweep time to be slightly longer than the hopping period per channel (hopping period = 1/hopping rate) should achieve this

Use the marker-delta function to determine the transmit time per hop (Burst Width). If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

For FHSS Mode (79 Channel):

DH1/3DH1 Dwell Time: $\text{Burst Width} * (1600/2) * 31.6 / (\text{channel number})$

DH3/3DH3 Dwell Time: $\text{Burst Width} * (1600/4) * 31.6 / (\text{channel number})$


DH5/3DH5 Dwell Time: $\text{Burst Width} * (1600/6) * 31.6 / (\text{channel number})$

For AFHSS Mode (20 Channel):

DH1/3DH1 Dwell Time: $\text{Burst Width} * (800/2) * 8 / (\text{channel number})$

DH3/3DH3 Dwell Time: $\text{Burst Width} * (800/4) * 8 / (\text{channel number})$

DH5/3DH5 Dwell Time: $\text{Burst Width} * (800/6) * 8 / (\text{channel number})$

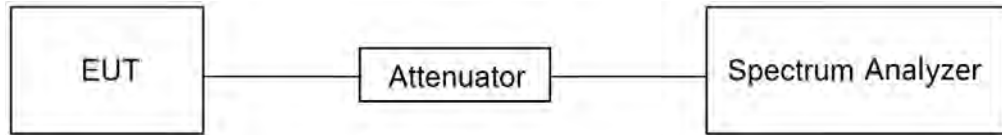TEST SETUP**TEST ENVIRONMENT**

Temperature	24.3℃	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.7V

TEST DATE / ENGINEER

Test Date	May 22, 2026	Test By	Eason He
-----------	--------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix E

7.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSION

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
FCC 47 CFR §15.247 (d) ISED RSS-247 6.6	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 7.8.7.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times 20\text{dB}$ bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum

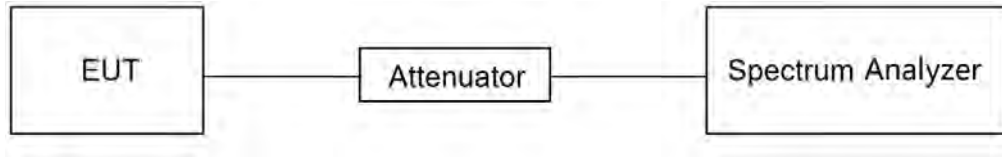TEST SETUP**TEST ENVIRONMENT**

Temperature	24.3℃	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.7V

TEST DATE / ENGINEER

Test Date	May 22, 2026	Test By	Eason He
-----------	--------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix G&H

7.7. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2020 Zero – Span Spectrum Analyzer method.

TEST SETUP

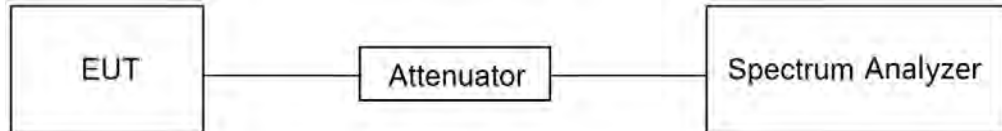

TEST ENVIRONMENT

Temperature	24.3°C	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.7V

TEST DATE / ENGINEER

Test Date	May 22, 2026	Test By	Eason He
-----------	--------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix I

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC 47 CFR §15.205 and §15.209.

Please refer to ISSED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3280 - 3287	
16.42 - 16.423	3332 - 3339	
16.80475 - 16.80525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5480	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC 47 CFR §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.7. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

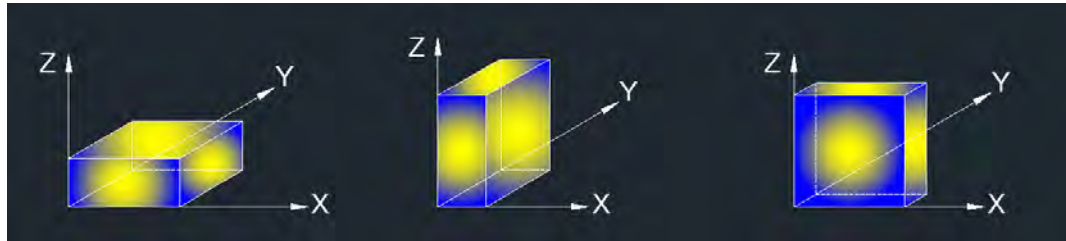

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

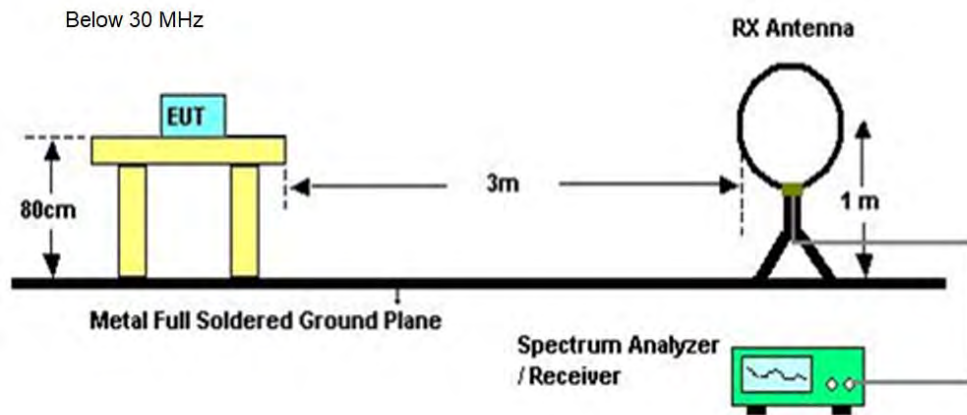

Below 1 GHz and above 30 MHz

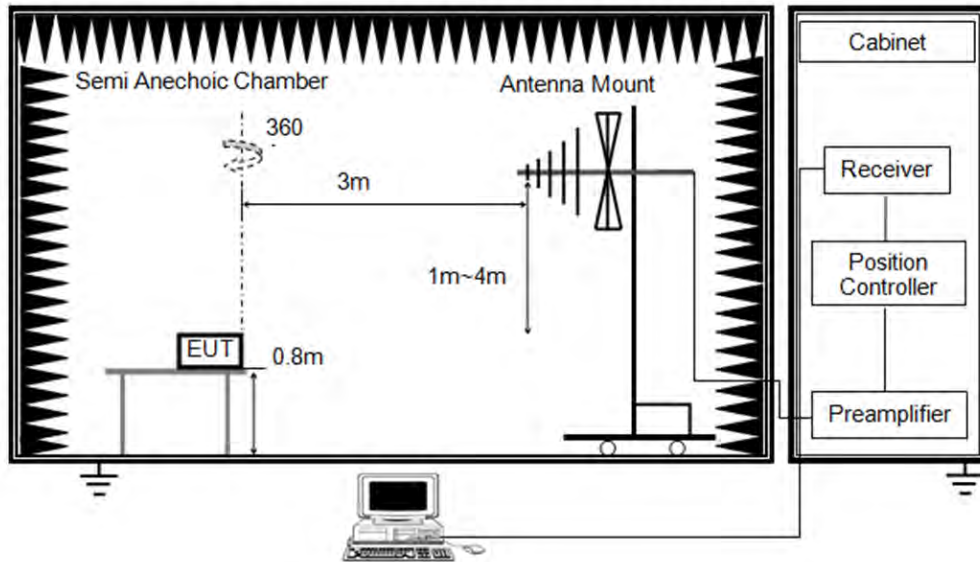

Above 1GHz

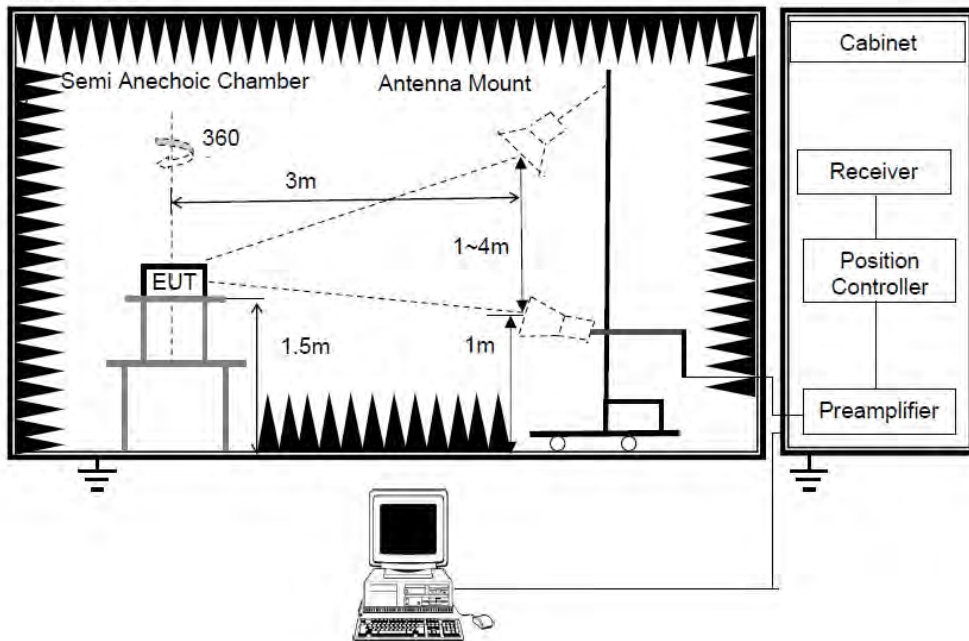

TEST ENVIRONMENT


Temperature	23.2°C	Relative Humidity	54%
Atmosphere Pressure	101kPa	Test Voltage	

TEST DATE / ENGINEER

Test Date	June 3, 2026	Test By	Leslie Xie
-----------	--------------	---------	------------


TEST RESULTS

8.1. RESTRICTED BANDEDGE-LEFT

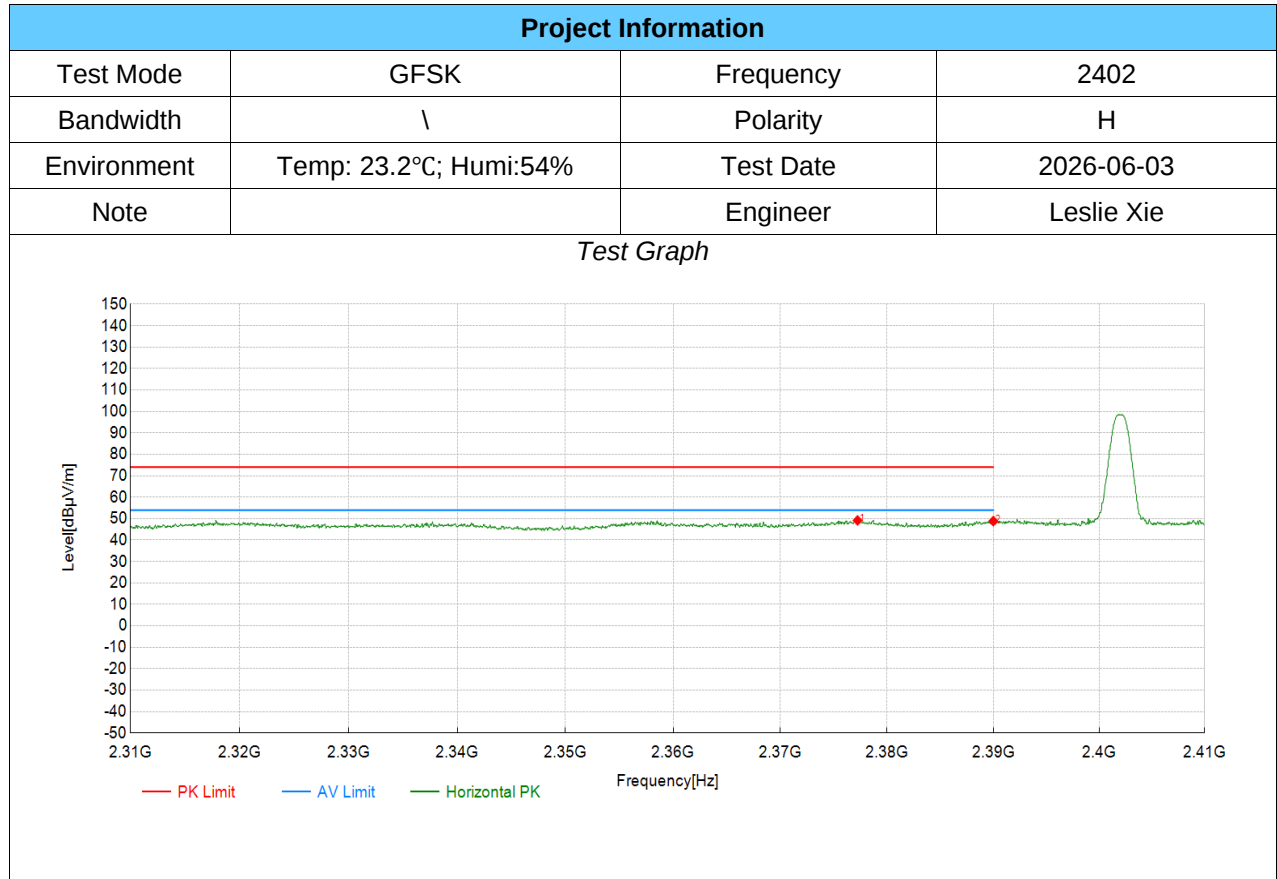


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2377.23	40.67	49.20	8.53	74.00	24.80	PK	Horizontal	PASS
2	2390.00	40.17	48.87	8.70	74.00	25.13	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

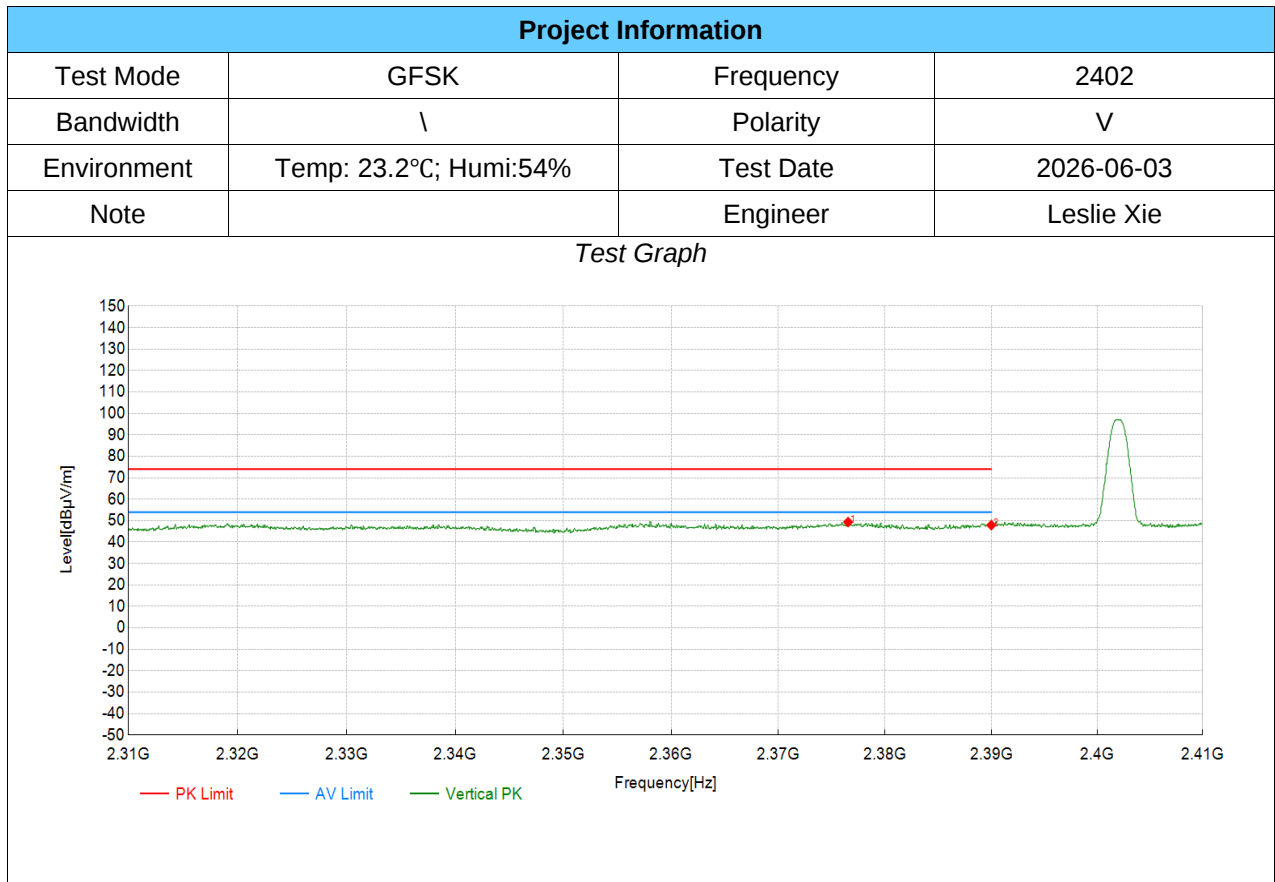


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2376.53	40.79	49.31	8.52	74.00	24.69	PK	Vertical	PASS
2	2390.00	39.19	47.89	8.70	74.00	26.11	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

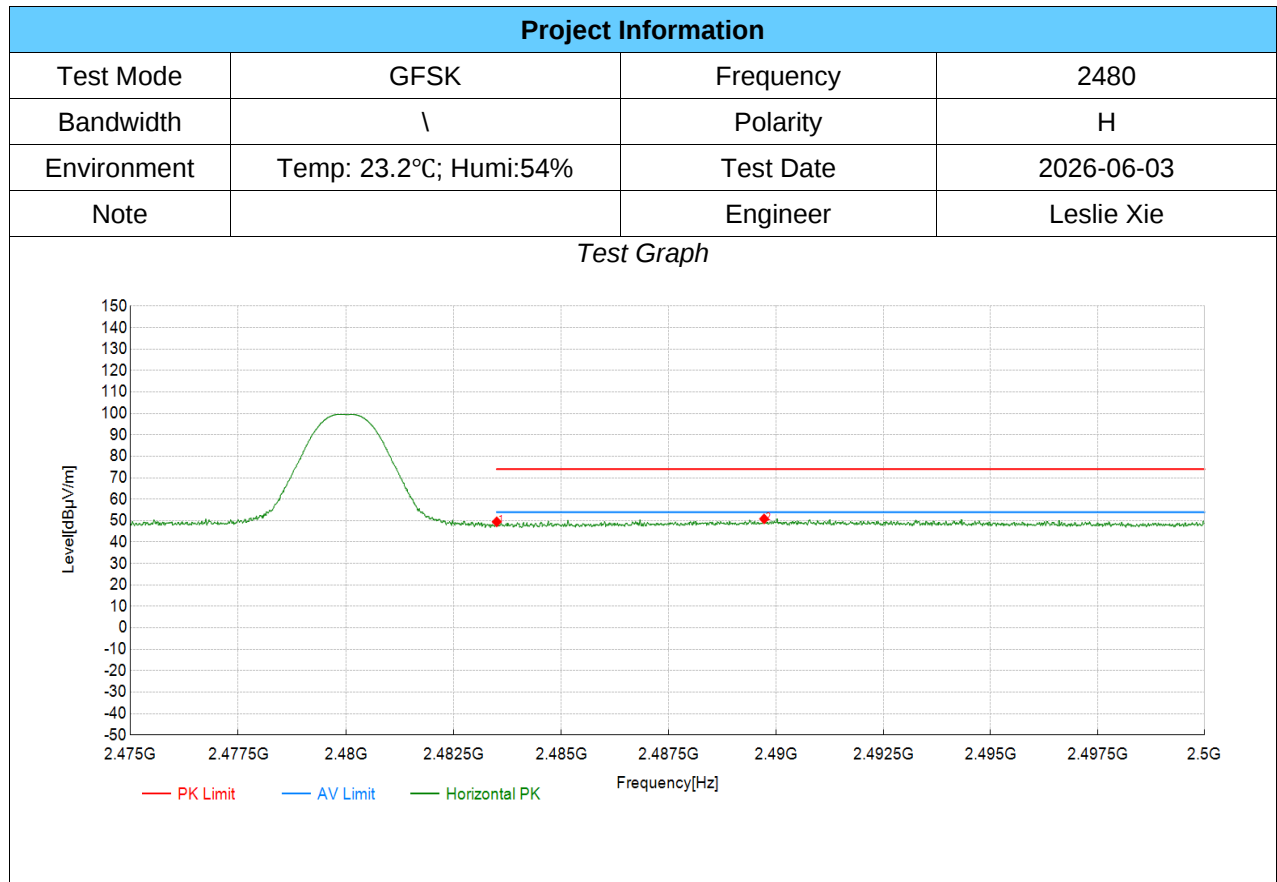


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	39.45	49.44	9.99	74.00	24.56	PK	Horizontal	PASS
2	2489.72	40.72	50.80	10.08	74.00	23.20	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

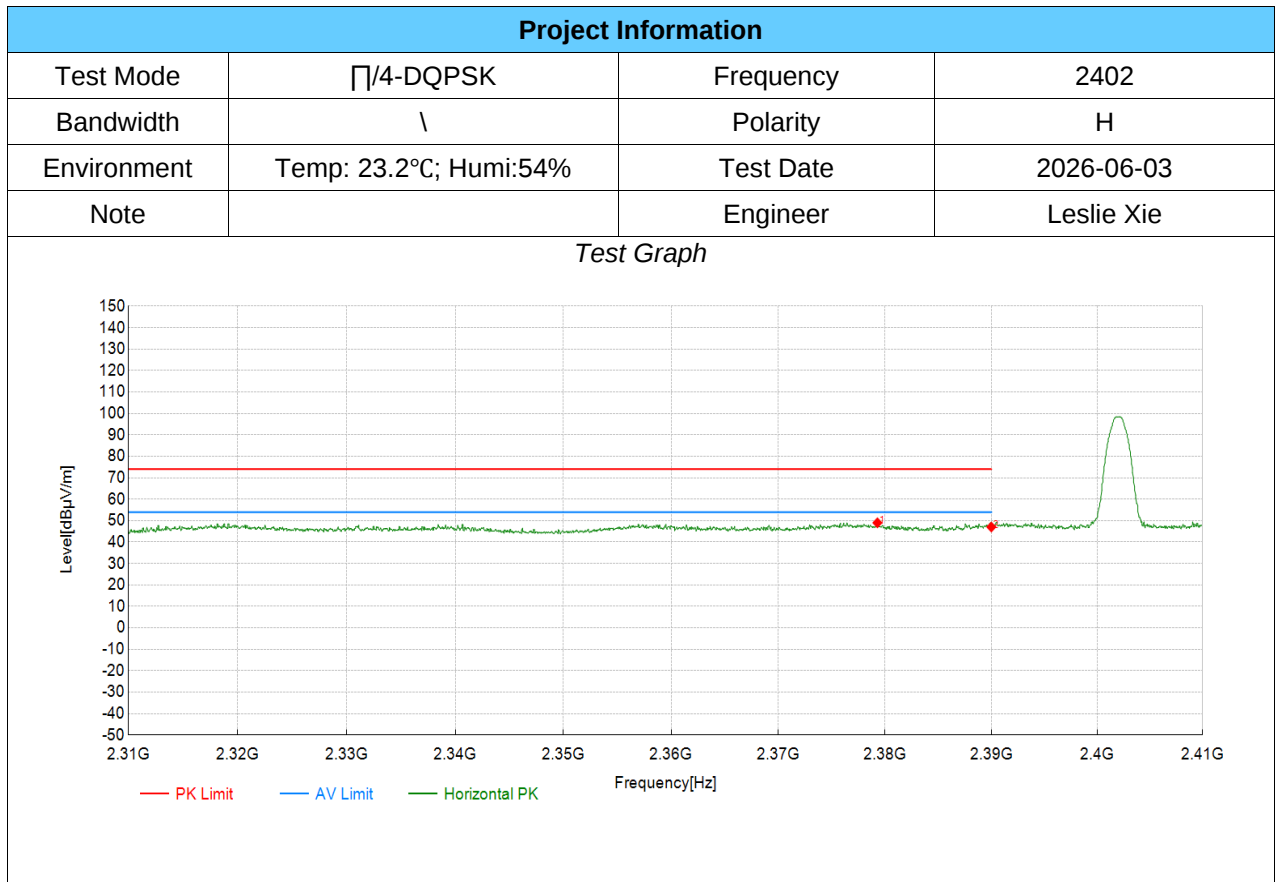

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2379.28	40.43	48.98	8.55	74.00	25.02	PK	Horizontal	PASS
2	2390.00	38.35	47.05	8.70	74.00	26.95	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

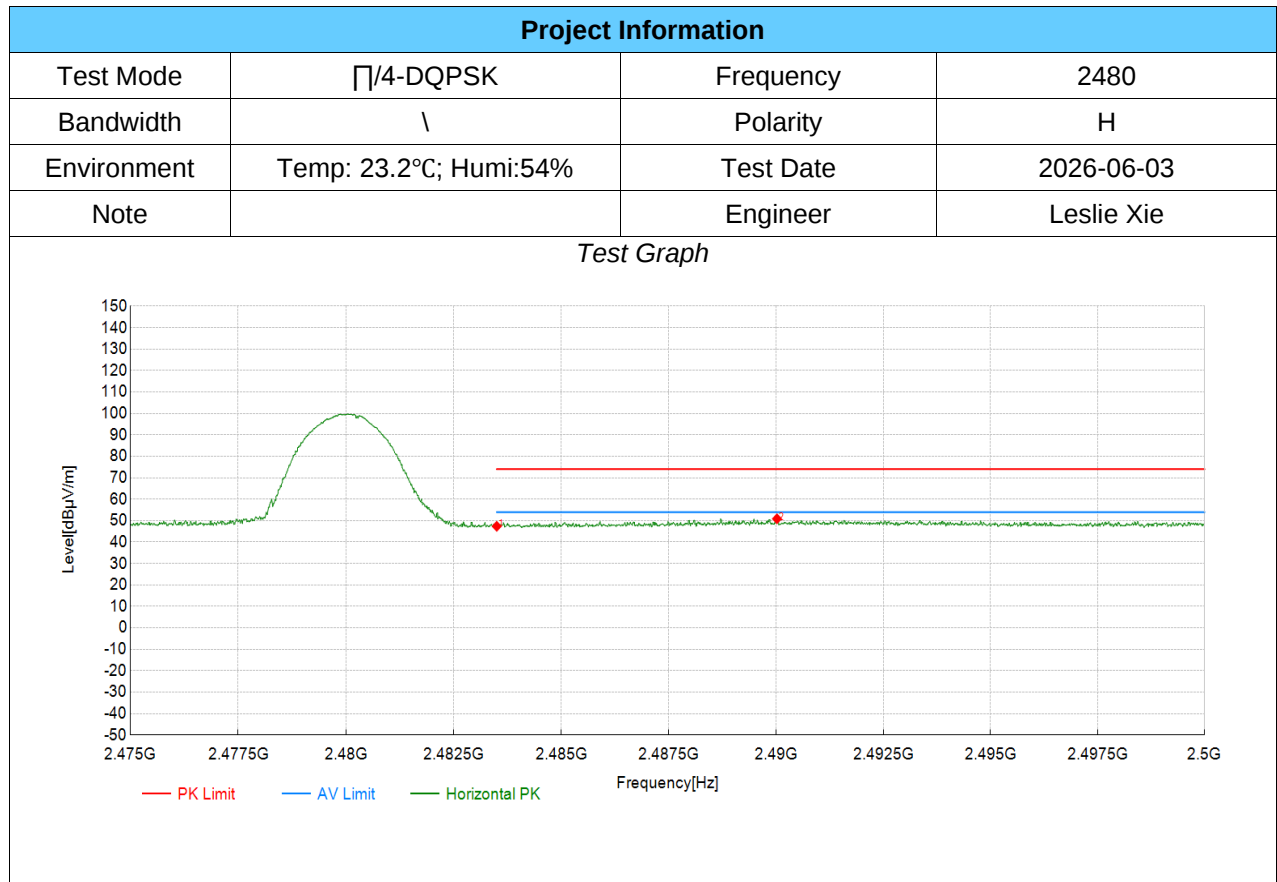

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	37.39	47.38	9.99	74.00	26.62	PK	Horizontal	PASS
2	2490.02	40.79	50.87	10.08	74.00	23.13	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

8.2. RESTRICTED BANDEDGE-RIGHT

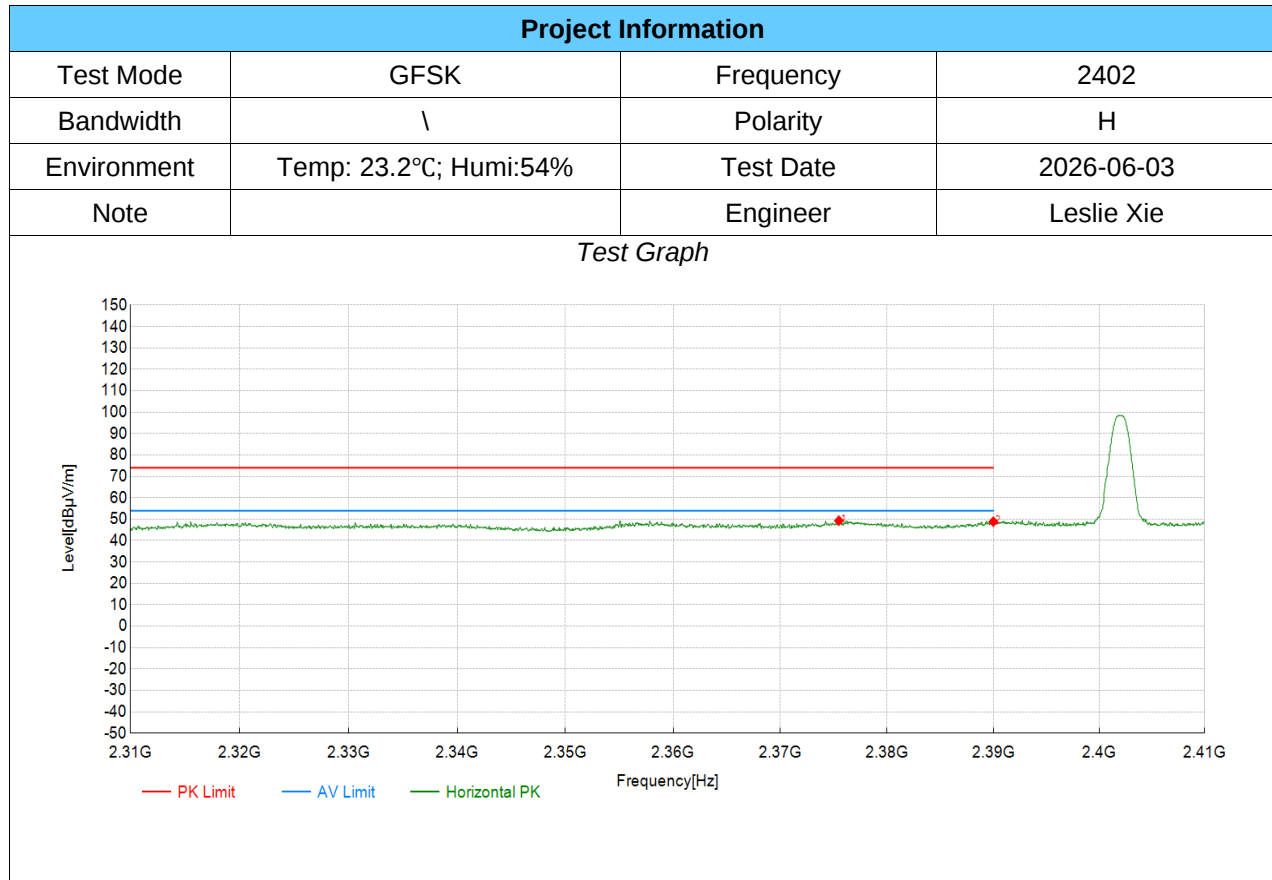


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2375.48	40.80	49.30	8.50	74.00	24.70	PK	Horizontal	PASS
2	2390.00	40.14	48.84	8.70	74.00	25.16	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

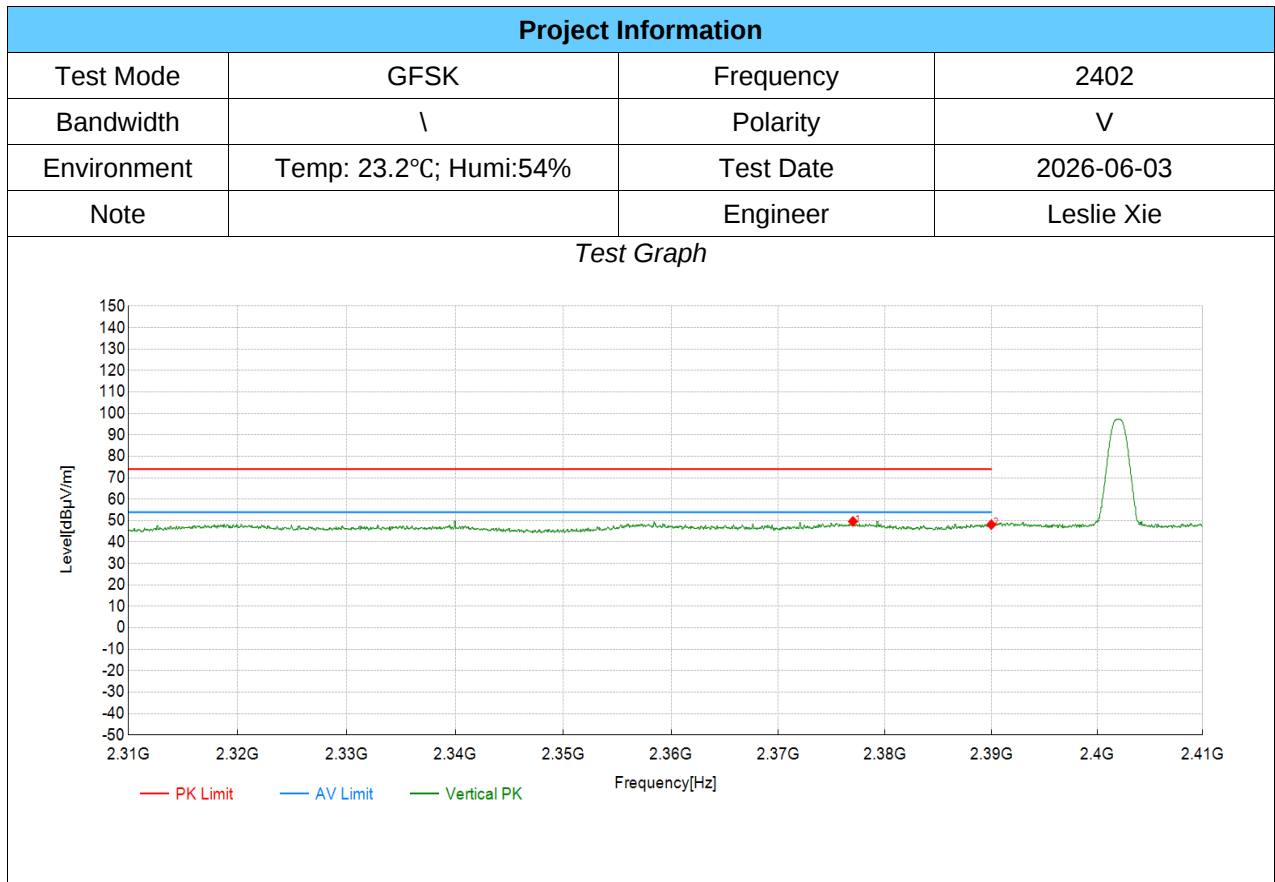


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2376.98	41.12	49.64	8.52	74.00	24.36	PK	Vertical	PASS
2	2390.00	39.44	48.14	8.70	74.00	25.86	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

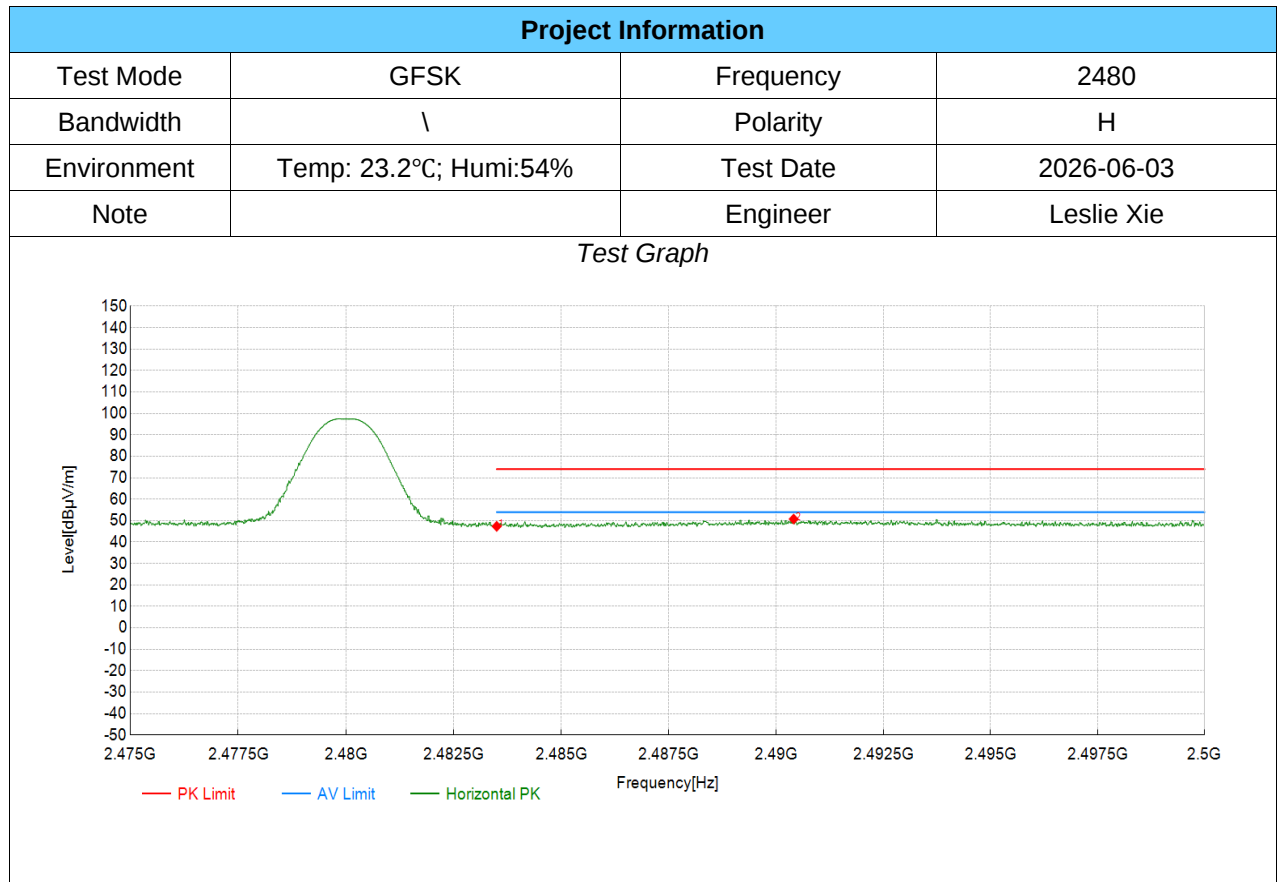


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	37.35	47.34	9.99	74.00	26.66	PK	Horizontal	PASS
2	2490.41	40.65	50.73	10.08	74.00	23.27	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

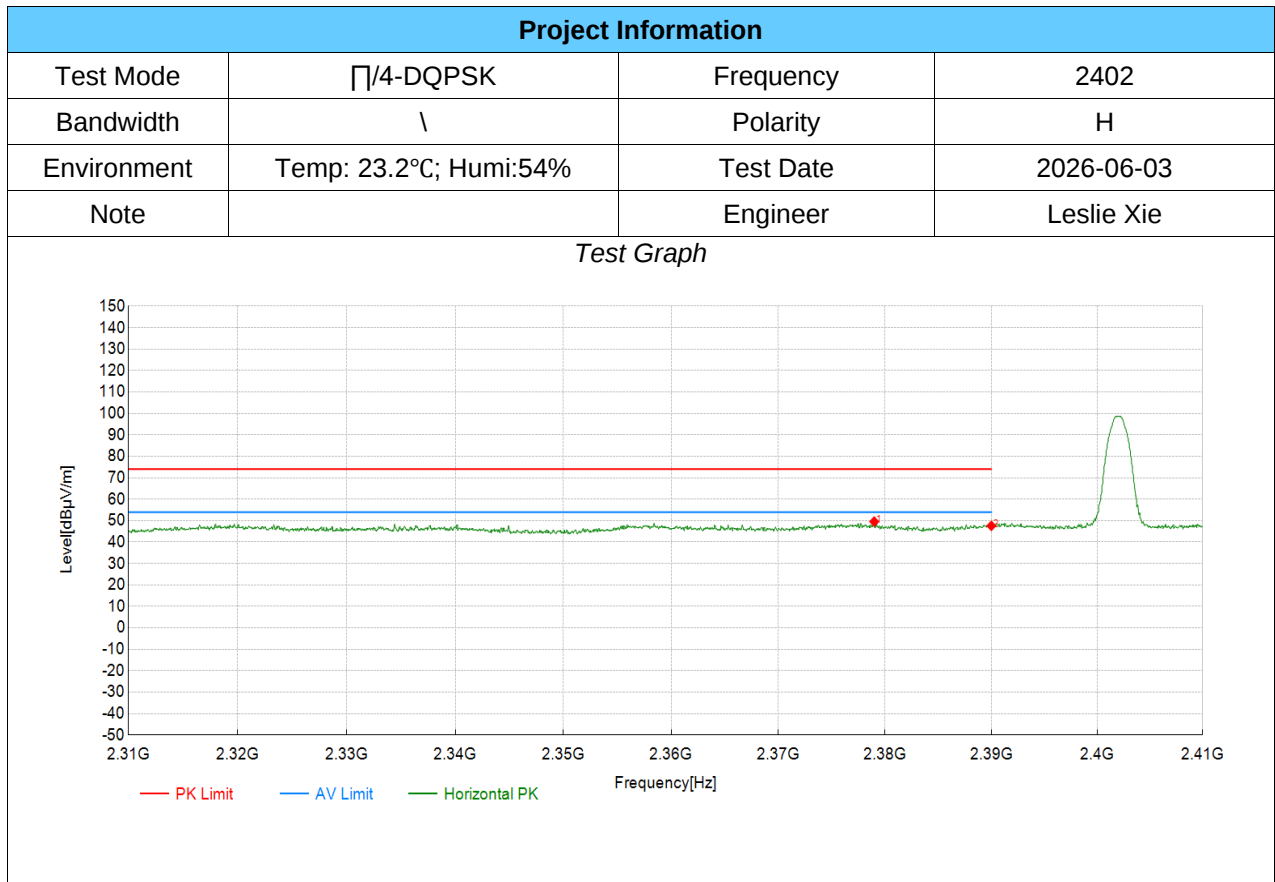

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2378.98	41.01	49.56	8.55	74.00	24.44	PK	Horizontal	PASS
2	2390.00	38.87	47.57	8.70	74.00	26.43	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

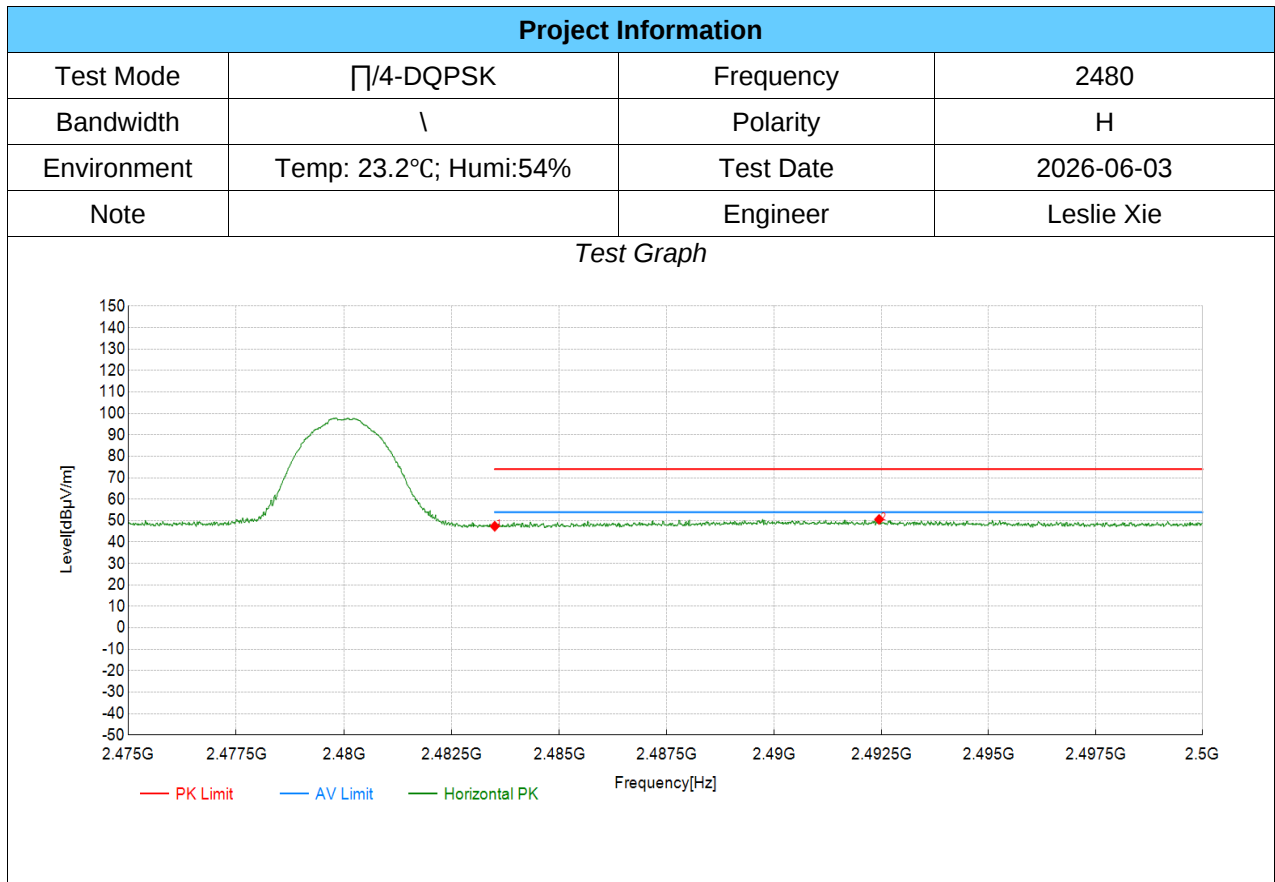

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	37.38	47.37	9.99	74.00	26.63	PK	Horizontal	PASS
2	2492.45	40.47	50.58	10.11	74.00	23.42	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

8.3. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-LEFT

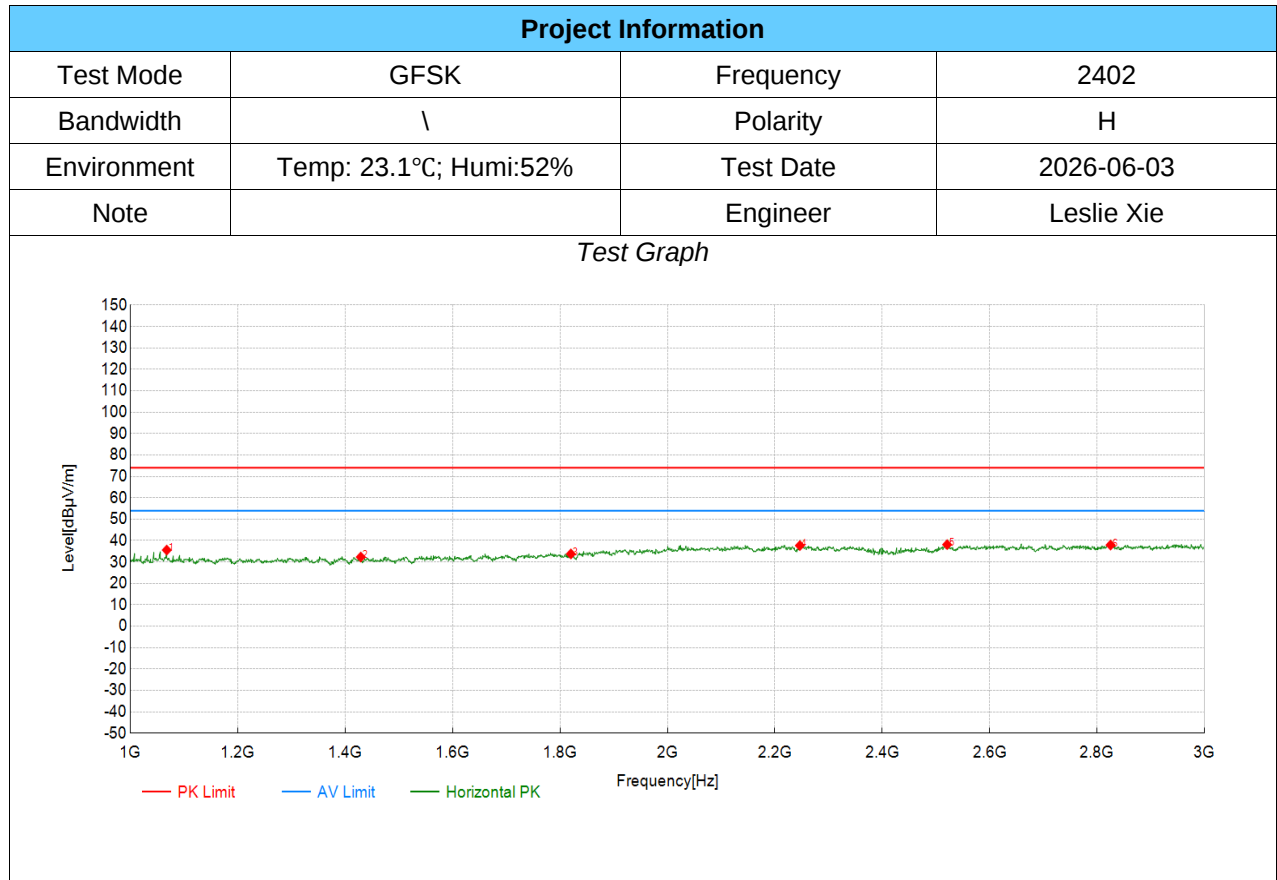


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1068.03	60.43	35.58	-24.85	74.00	38.42	PK	Horizontal	PASS
2	1429.21	56.96	32.34	-24.62	74.00	41.66	PK	Horizontal	PASS
3	1820.41	55.83	33.78	-22.05	74.00	40.22	PK	Horizontal	PASS
4	2246.62	57.39	37.69	-19.70	74.00	36.31	PK	Horizontal	PASS
5	2520.76	57.71	38.13	-19.58	74.00	35.87	PK	Horizontal	PASS
6	2824.91	57.04	37.93	-19.11	74.00	36.07	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

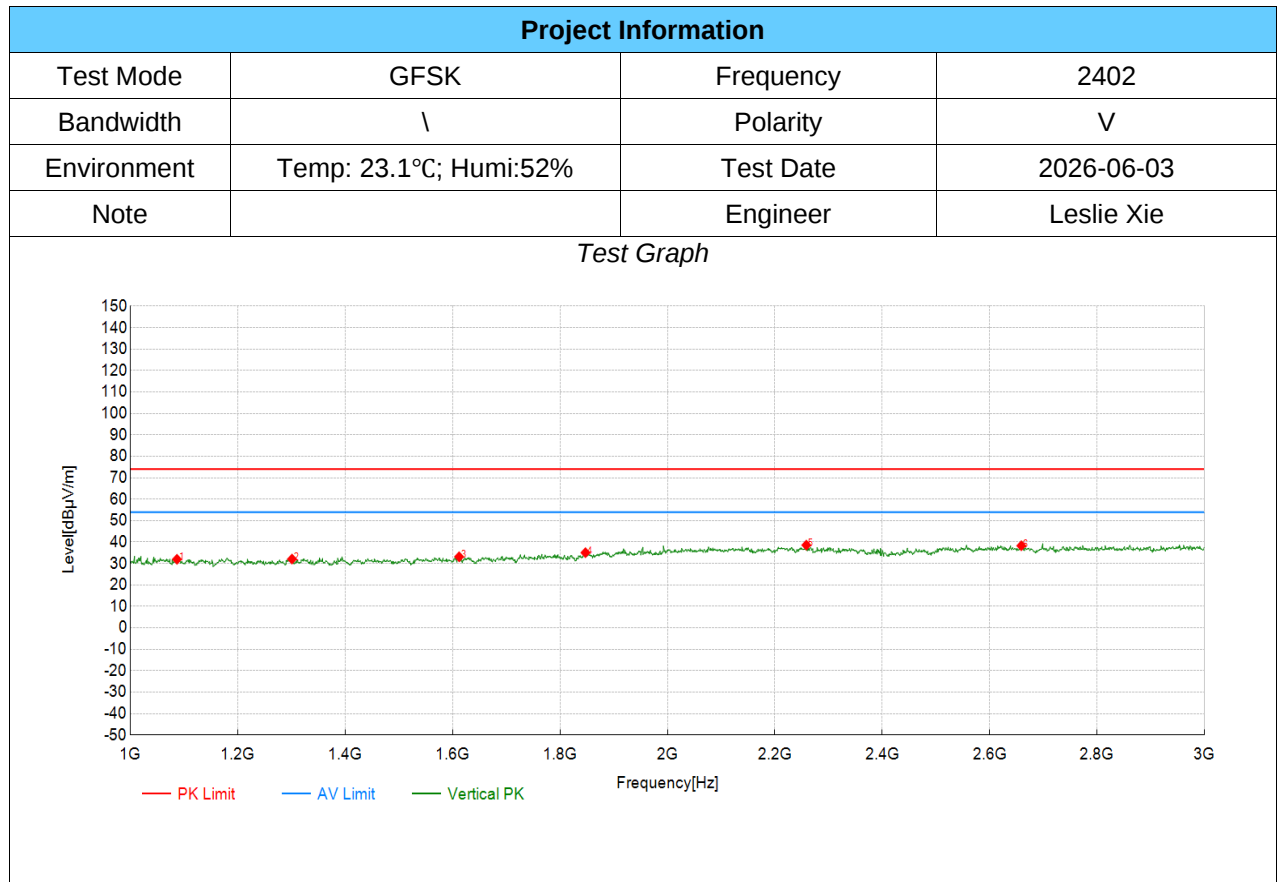


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1087.04	56.80	31.98	-24.82	74.00	42.02	PK	Vertical	PASS
2	1301.15	56.70	32.09	-24.61	74.00	41.91	PK	Vertical	PASS
3	1612.31	56.85	33.14	-23.71	74.00	40.86	PK	Vertical	PASS
4	1847.42	56.83	35.07	-21.76	74.00	38.93	PK	Vertical	PASS
5	2258.63	58.27	38.58	-19.69	74.00	35.42	PK	Vertical	PASS
6	2658.83	57.66	38.29	-19.37	74.00	35.71	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

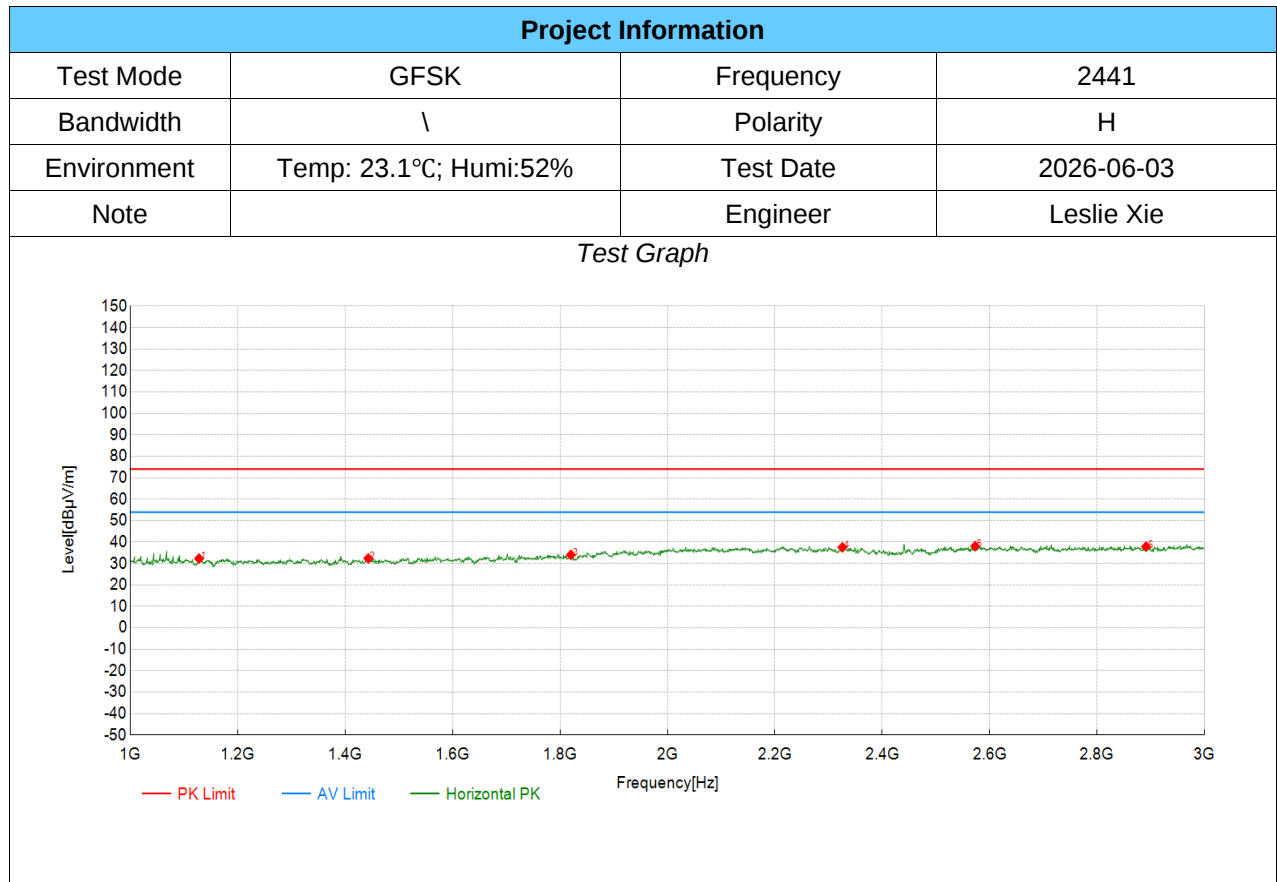


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1128.06	57.02	32.29	-24.73	74.00	41.71	PK	Horizontal	PASS
2	1443.22	57.01	32.40	-24.61	74.00	41.60	PK	Horizontal	PASS
3	1820.41	56.10	34.05	-22.05	74.00	39.95	PK	Horizontal	PASS
4	2325.66	57.21	37.54	-19.67	74.00	36.46	PK	Horizontal	PASS
5	2572.79	57.59	38.08	-19.51	74.00	35.92	PK	Horizontal	PASS
6	2890.95	56.94	37.87	-19.07	74.00	36.13	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

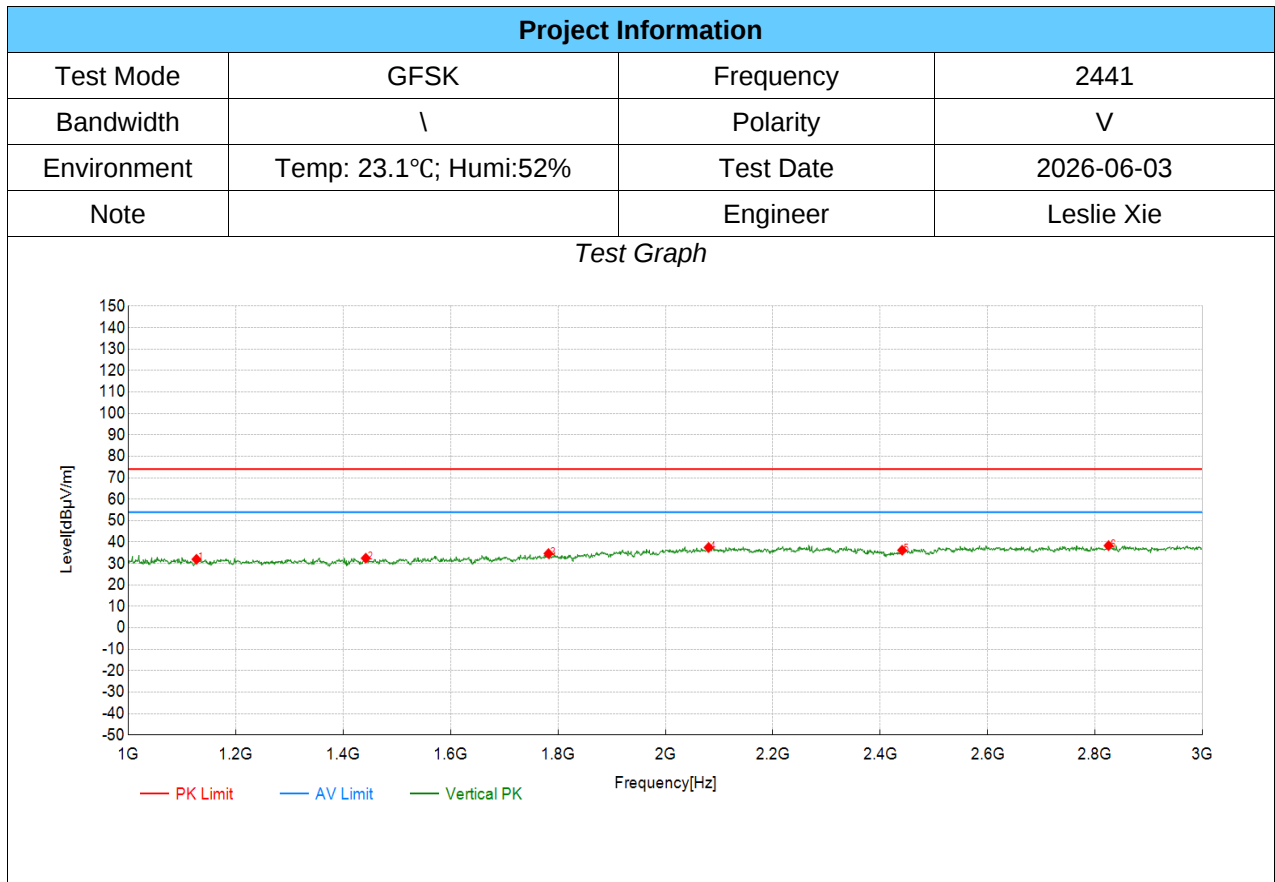


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1127.06	56.69	31.96	-24.73	74.00	42.04	PK	Vertical	PASS
2	1442.22	57.10	32.49	-24.61	74.00	41.51	PK	Vertical	PASS
3	1782.39	57.04	34.64	-22.40	74.00	39.36	PK	Vertical	PASS
4	2080.54	57.46	37.50	-19.96	74.00	36.50	PK	Vertical	PASS
5	2440.72	55.82	36.19	-19.63	74.00	37.81	PK	Vertical	PASS
6	2824.91	57.45	38.34	-19.11	74.00	35.66	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

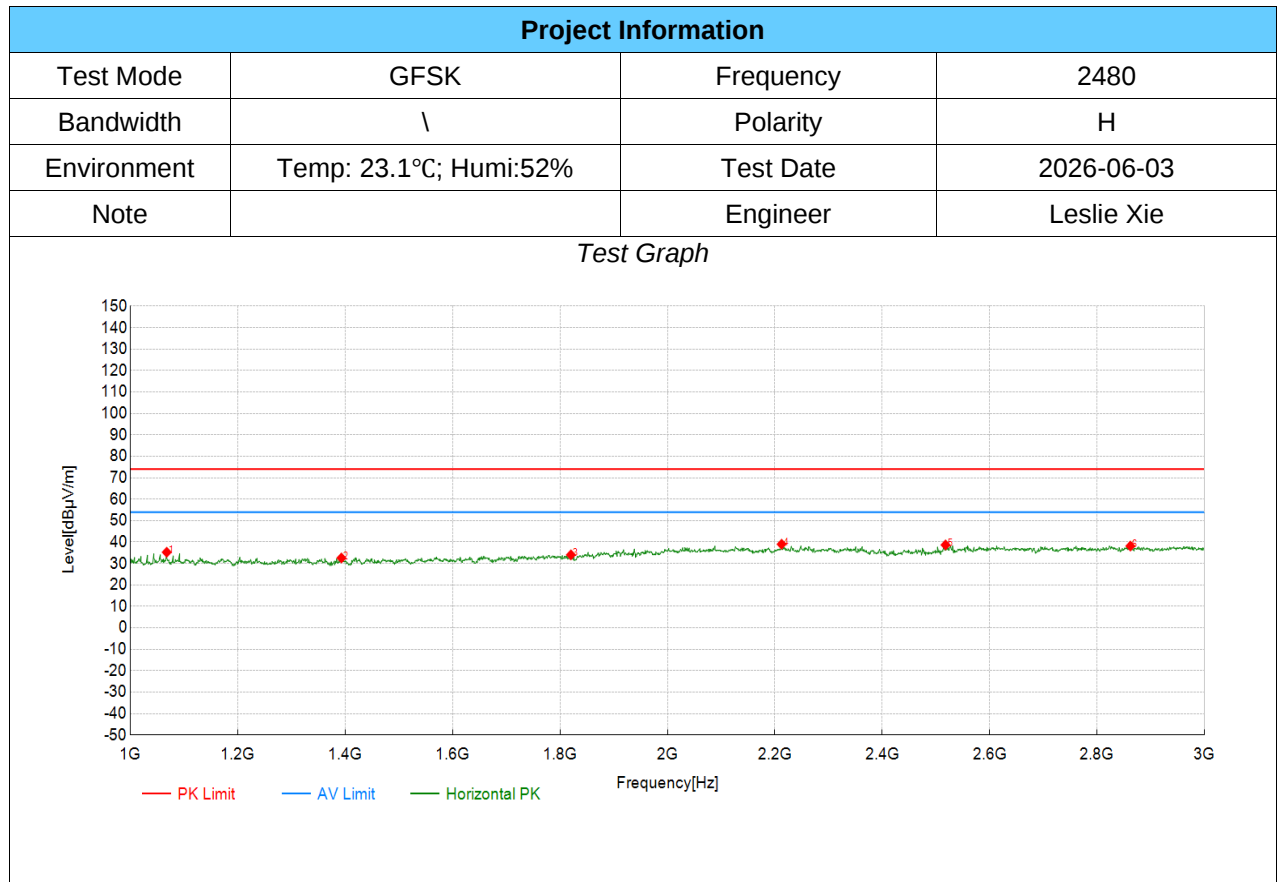

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1068.03	60.12	35.27	-24.85	74.00	38.73	PK	Horizontal	PASS
2	1393.20	57.21	32.59	-24.62	74.00	41.41	PK	Horizontal	PASS
3	1820.41	56.10	34.05	-22.05	74.00	39.95	PK	Horizontal	PASS
4	2212.61	58.72	39.01	-19.71	74.00	34.99	PK	Horizontal	PASS
5	2517.76	58.25	38.66	-19.59	74.00	35.34	PK	Horizontal	PASS
6	2861.93	57.24	38.16	-19.08	74.00	35.84	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

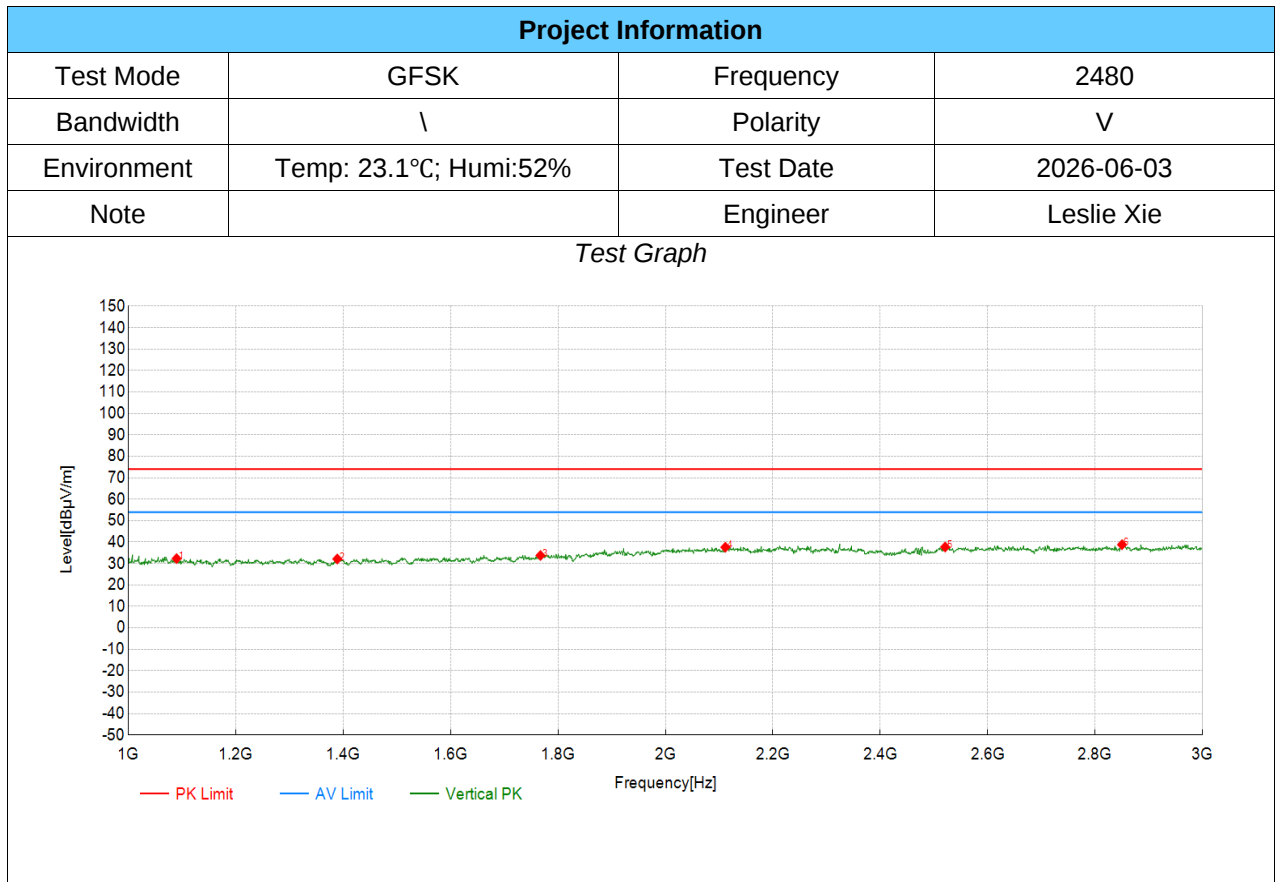

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1090.05	57.11	32.30	-24.81	74.00	41.70	PK	Vertical	PASS
2	1389.19	56.74	32.11	-24.63	74.00	41.89	PK	Vertical	PASS
3	1767.38	56.31	33.78	-22.53	74.00	40.22	PK	Vertical	PASS
4	2111.56	57.48	37.59	-19.89	74.00	36.41	PK	Vertical	PASS
5	2520.76	57.28	37.70	-19.58	74.00	36.30	PK	Vertical	PASS
6	2849.92	57.90	38.80	-19.10	74.00	35.20	PK	Vertical	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

8.4. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-RIGHT

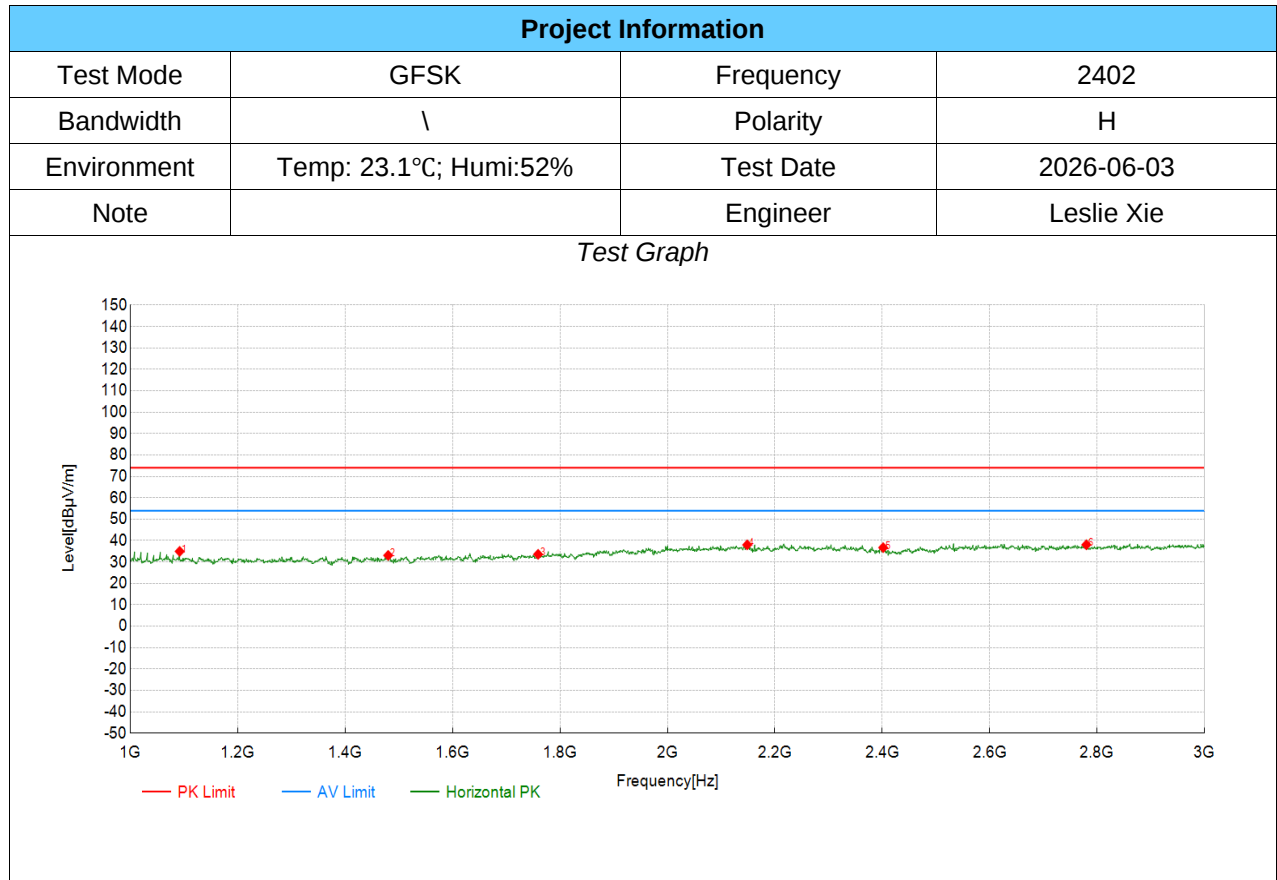


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1092.05	59.75	34.96	-24.79	74.00	39.04	PK	Horizontal	PASS
2	1480.24	57.68	33.08	-24.60	74.00	40.92	PK	Horizontal	PASS
3	1759.38	56.17	33.59	-22.58	74.00	40.41	PK	Horizontal	PASS
4	2148.57	57.84	38.02	-19.82	74.00	35.98	PK	Horizontal	PASS
5	2401.70	56.35	36.72	-19.63	74.00	37.28	PK	Horizontal	PASS
6	2779.89	57.22	38.06	-19.16	74.00	35.94	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

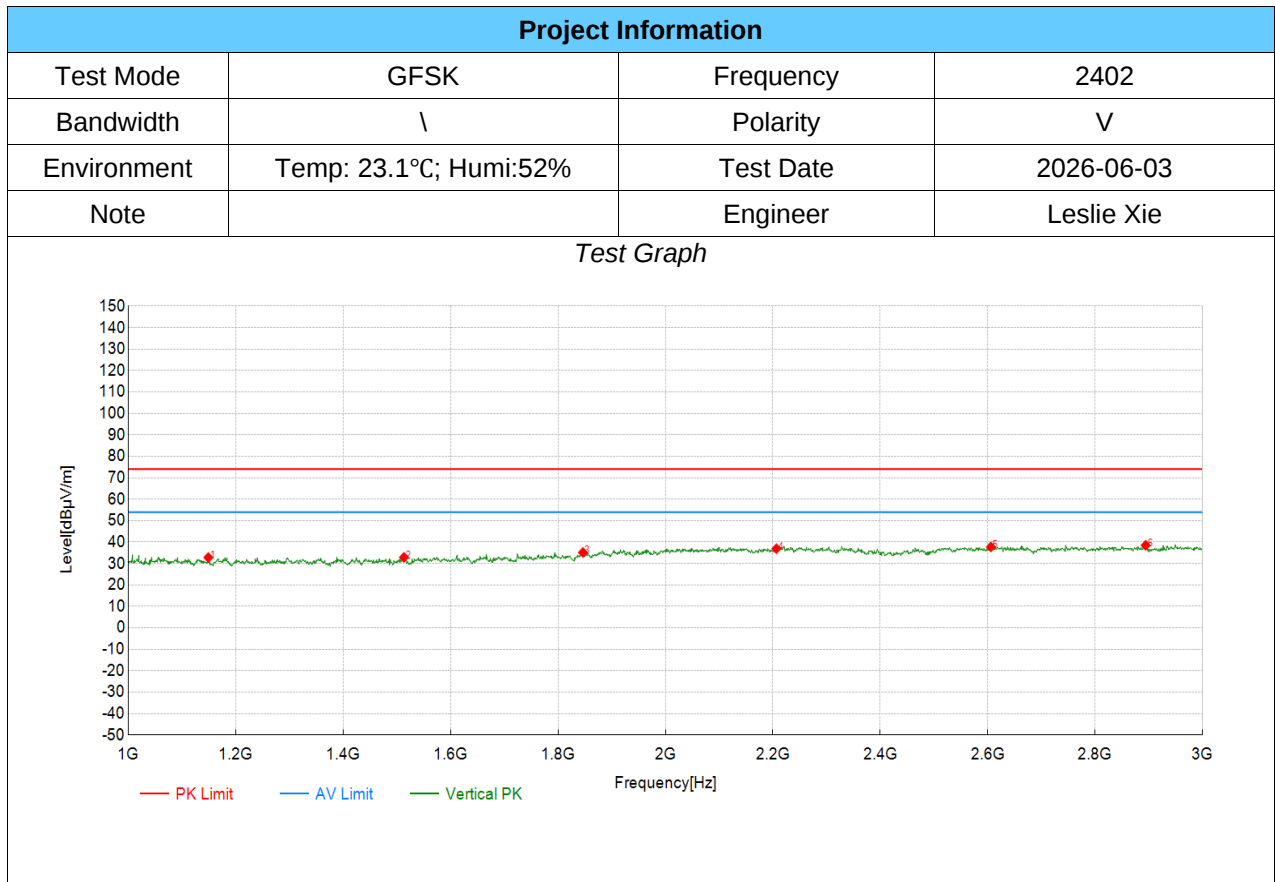


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1149.07	57.48	32.79	-24.69	74.00	41.21	PK	Vertical	PASS
2	1513.26	57.38	32.89	-24.49	74.00	41.11	PK	Vertical	PASS
3	1846.42	56.91	35.14	-21.77	74.00	38.86	PK	Vertical	PASS
4	2206.60	56.66	36.94	-19.72	74.00	37.06	PK	Vertical	PASS
5	2605.80	57.21	37.74	-19.47	74.00	36.26	PK	Vertical	PASS
6	2893.95	57.54	38.48	-19.06	74.00	35.52	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

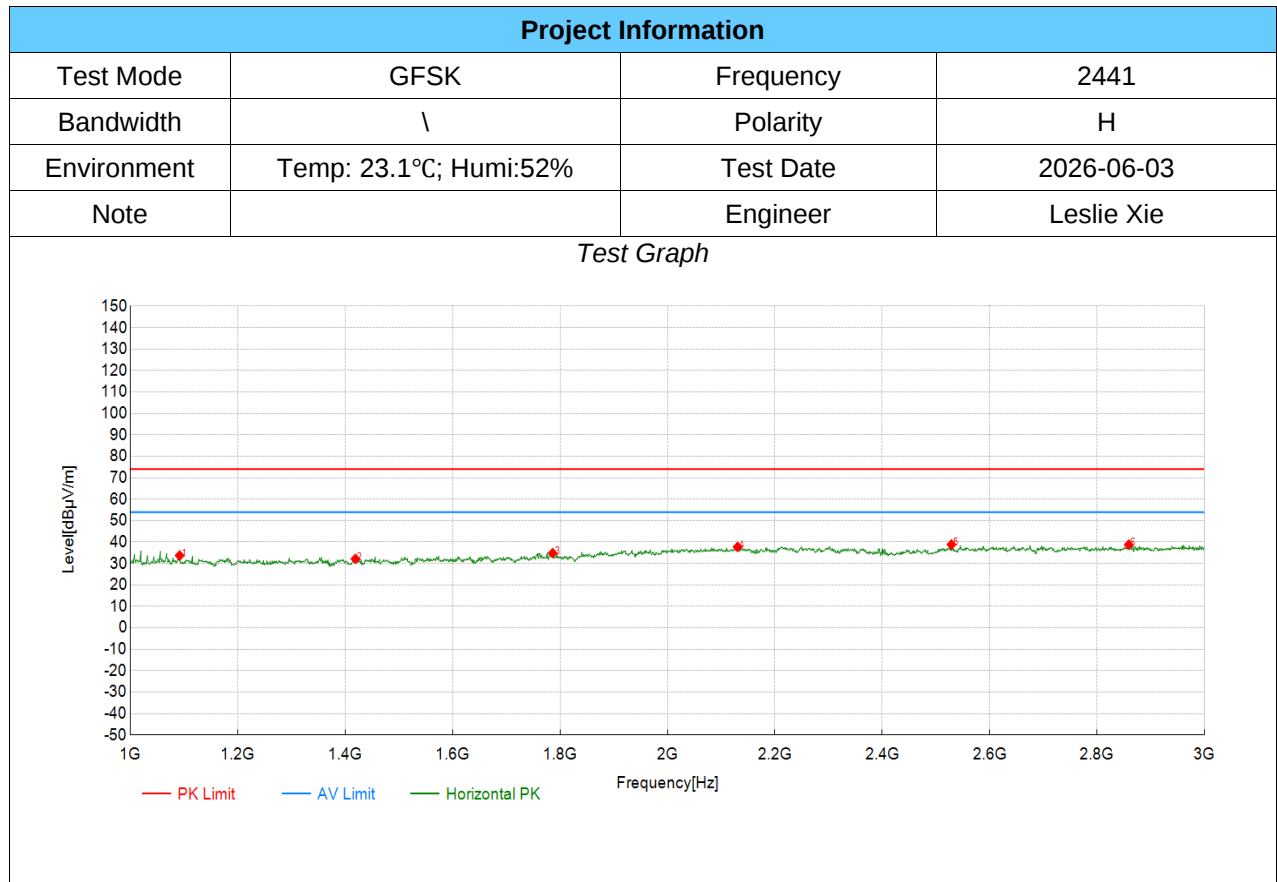


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1092.05	58.52	33.73	-24.79	74.00	40.27	PK	Horizontal	PASS
2	1419.21	56.81	32.18	-24.63	74.00	41.82	PK	Horizontal	PASS
3	1786.39	57.21	34.83	-22.38	74.00	39.17	PK	Horizontal	PASS
4	2130.57	57.60	37.74	-19.86	74.00	36.26	PK	Horizontal	PASS
5	2528.76	58.46	38.88	-19.58	74.00	35.12	PK	Horizontal	PASS
6	2858.93	57.87	38.78	-19.09	74.00	35.22	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

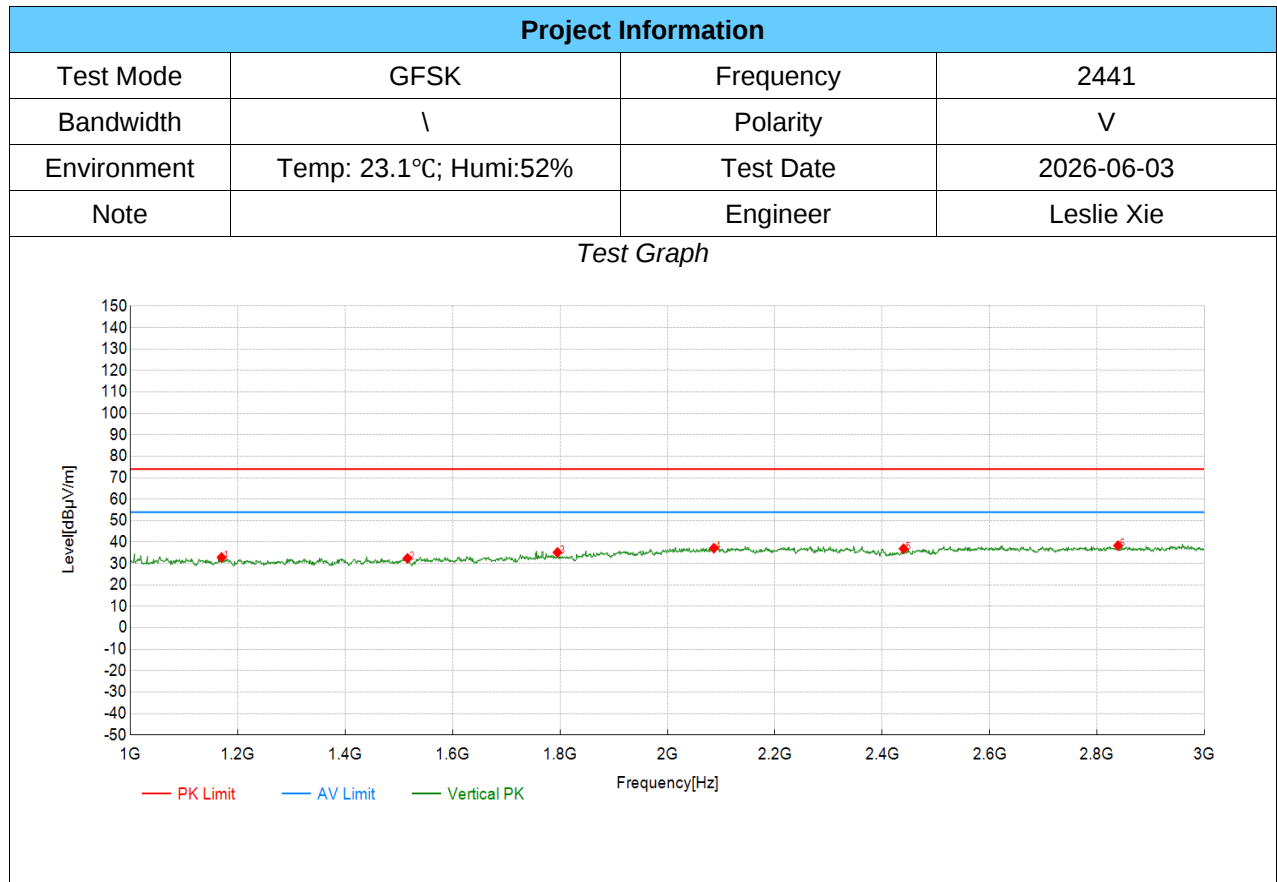


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1170.09	57.47	32.82	-24.65	74.00	41.18	PK	Vertical	PASS
2	1516.26	56.89	32.41	-24.48	74.00	41.59	PK	Vertical	PASS
3	1795.40	57.47	35.16	-22.31	74.00	38.84	PK	Vertical	PASS
4	2086.54	57.08	37.14	-19.94	74.00	36.86	PK	Vertical	PASS
5	2439.72	56.53	36.90	-19.63	74.00	37.10	PK	Vertical	PASS
6	2838.92	57.45	38.35	-19.10	74.00	35.65	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

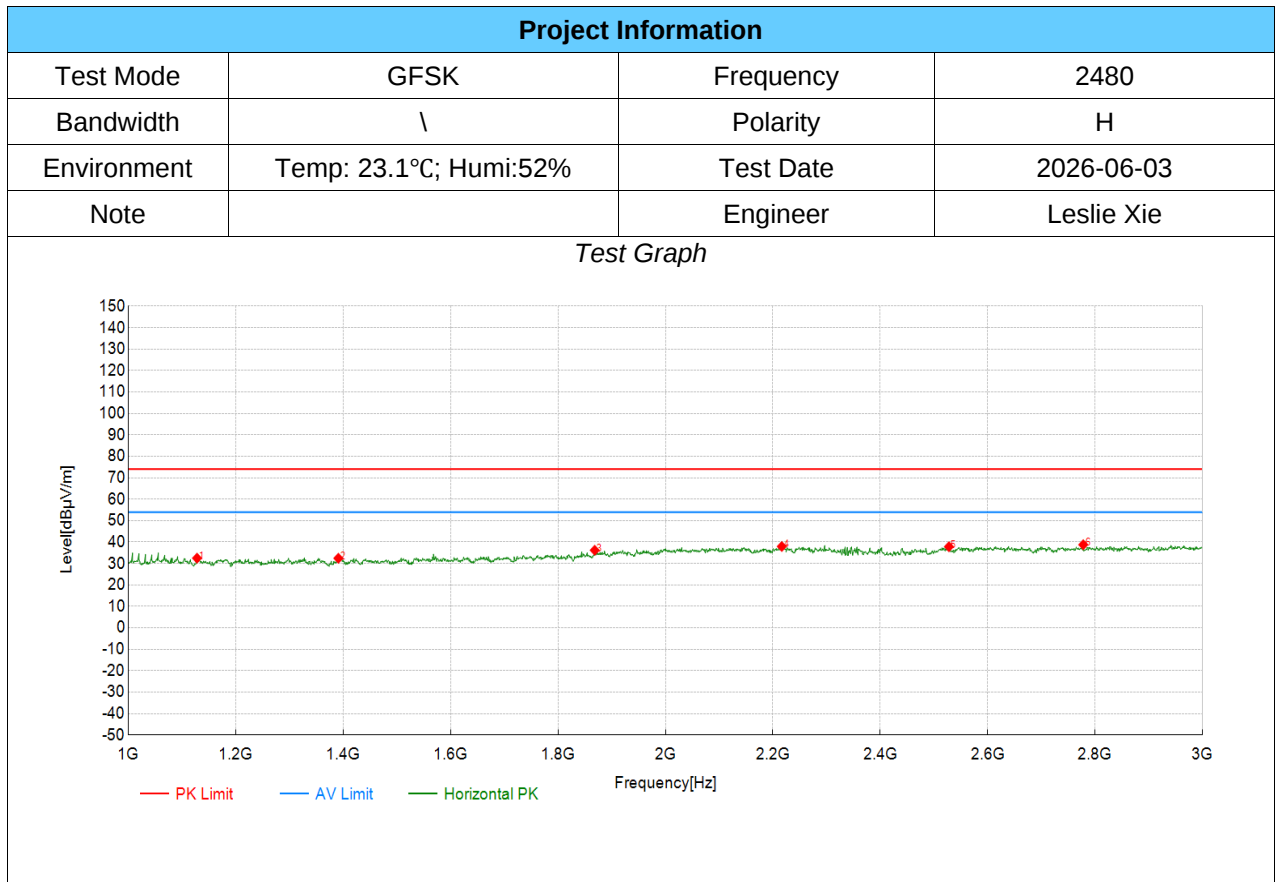

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1128.06	57.22	32.49	-24.73	74.00	41.51	PK	Horizontal	PASS
2	1391.20	57.08	32.45	-24.63	74.00	41.55	PK	Horizontal	PASS
3	1868.43	57.72	36.19	-21.53	74.00	37.81	PK	Horizontal	PASS
4	2216.61	57.67	37.95	-19.72	74.00	36.05	PK	Horizontal	PASS
5	2527.76	57.41	37.83	-19.58	74.00	36.17	PK	Horizontal	PASS
6	2777.89	57.94	38.77	-19.17	74.00	35.23	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

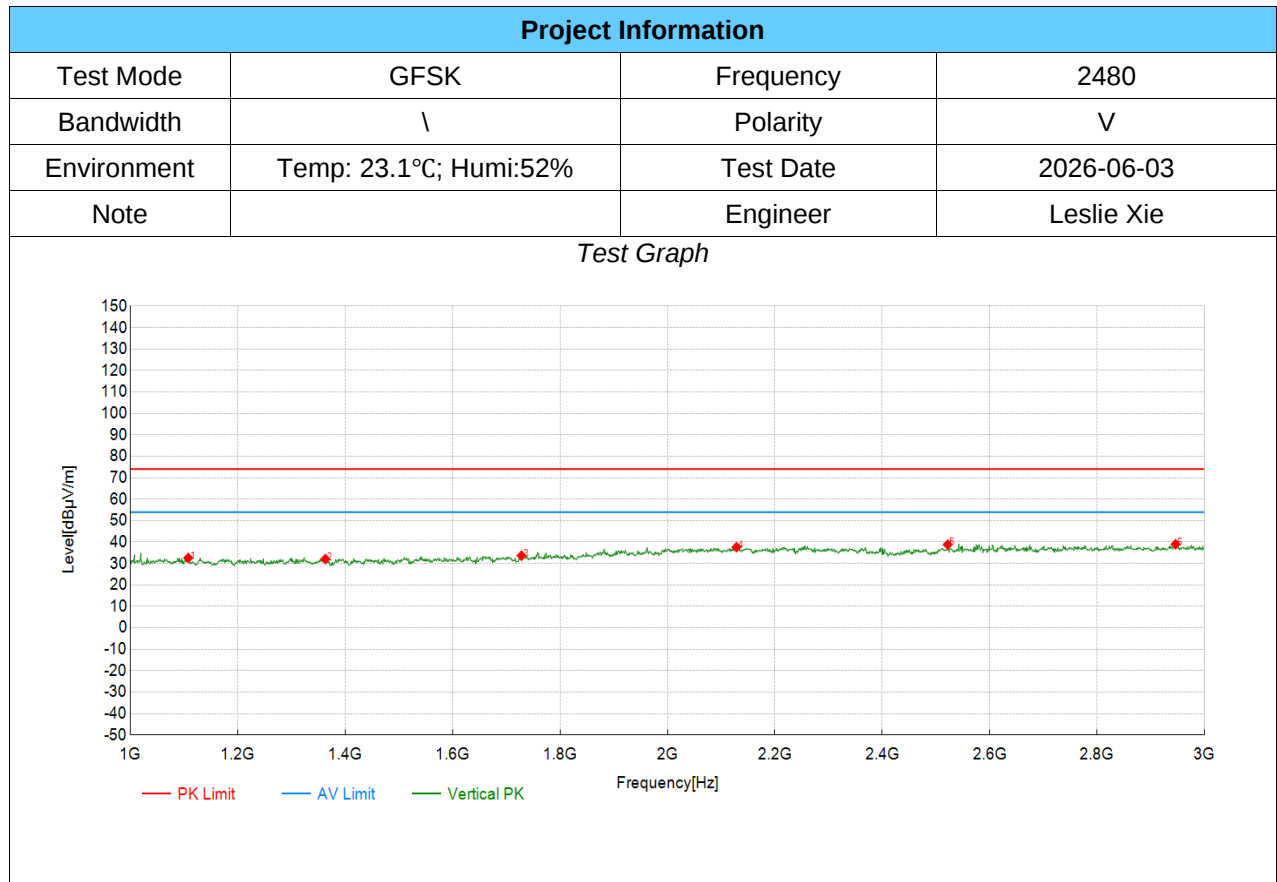

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1108.05	57.38	32.60	-24.78	74.00	41.40	PK	Vertical	PASS
2	1363.18	56.69	32.07	-24.62	74.00	41.93	PK	Vertical	PASS
3	1728.36	56.49	33.66	-22.83	74.00	40.34	PK	Vertical	PASS
4	2128.56	57.45	37.59	-19.86	74.00	36.41	PK	Vertical	PASS
5	2521.76	58.39	38.81	-19.58	74.00	35.19	PK	Vertical	PASS
6	2945.97	58.00	38.96	-19.04	74.00	35.04	PK	Vertical	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

8.5. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)-LEFT

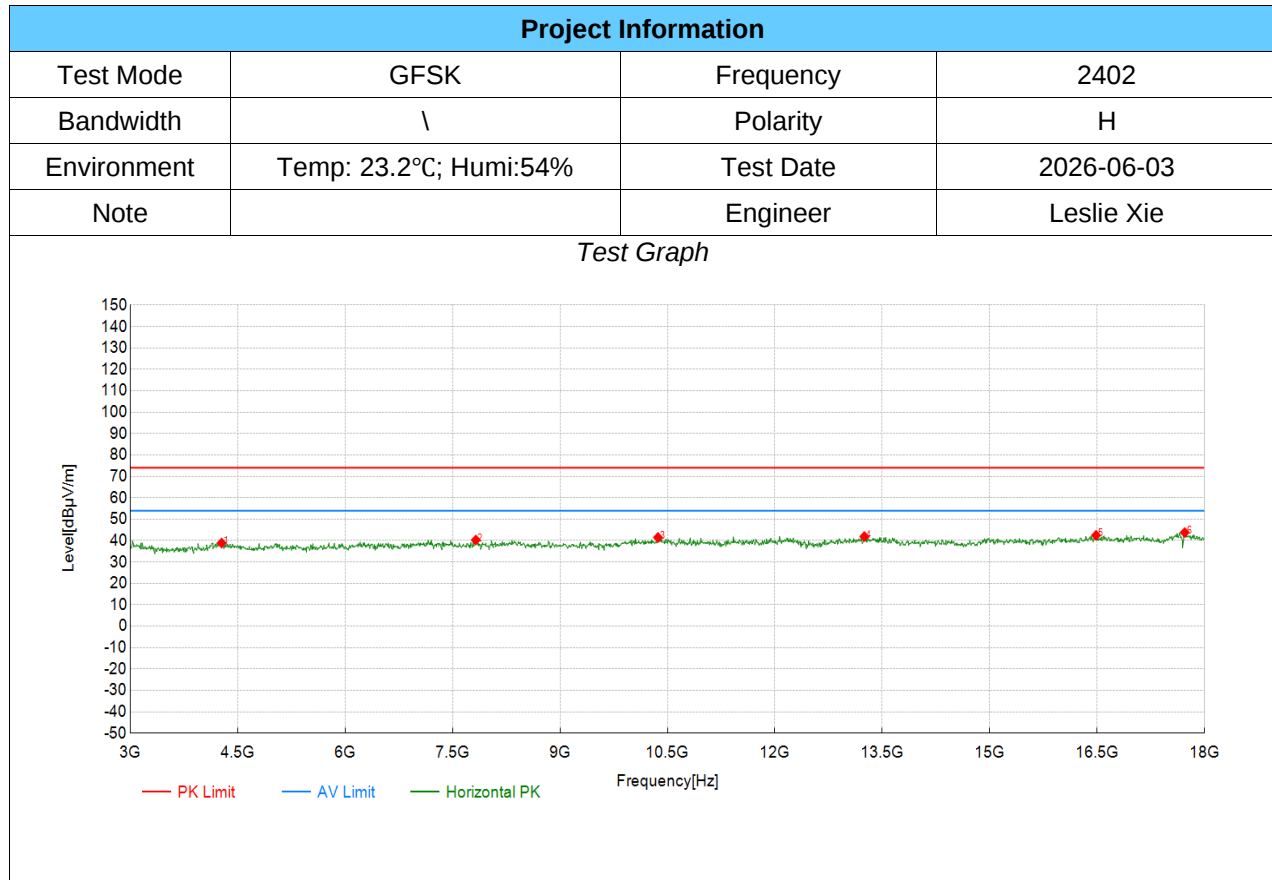


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4275.64	56.56	38.88	-17.68	74.00	35.12	PK	Horizontal	PASS
2	7824.91	55.13	40.28	-14.85	74.00	33.72	PK	Horizontal	PASS
3	10368.68	51.38	41.48	-9.90	74.00	32.52	PK	Horizontal	PASS
4	13250.13	52.83	41.89	-10.94	74.00	32.11	PK	Horizontal	PASS
5	16484.24	50.34	42.49	-7.85	74.00	31.51	PK	Horizontal	PASS
6	17722.36	48.87	43.80	-5.07	74.00	30.20	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

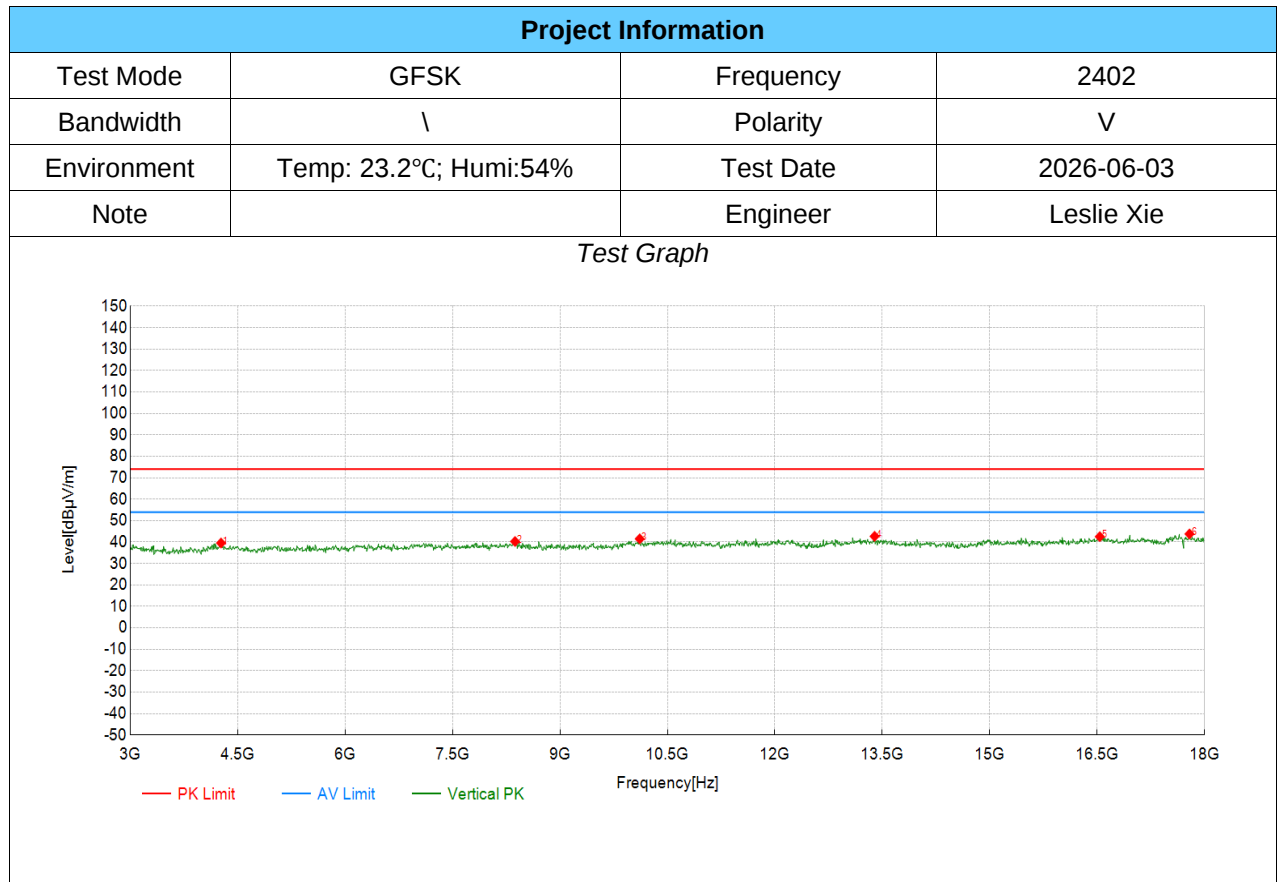


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4268.13	57.22	39.56	-17.66	74.00	34.44	PK	Vertical	PASS
2	8372.69	52.98	40.27	-12.71	74.00	33.73	PK	Vertical	PASS
3	10113.56	52.55	41.52	-11.03	74.00	32.48	PK	Vertical	PASS
4	13392.70	53.97	42.69	-11.28	74.00	31.31	PK	Vertical	PASS
5	16536.77	50.25	42.54	-7.71	74.00	31.46	PK	Vertical	PASS
6	17789.89	48.90	43.79	-5.11	74.00	30.21	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

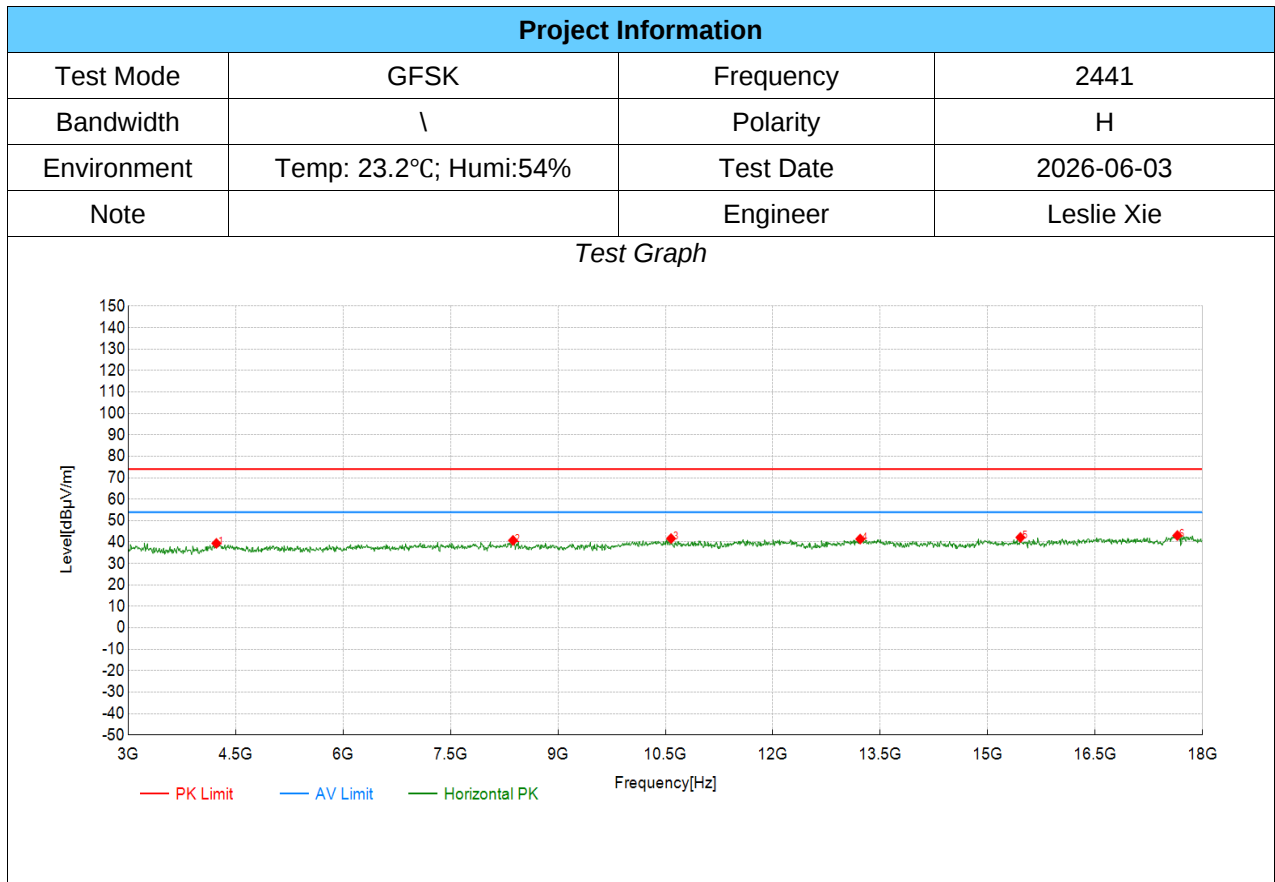


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4230.62	56.95	39.39	-17.56	74.00	34.61	PK	Horizontal	PASS
2	8372.69	53.48	40.77	-12.71	74.00	33.23	PK	Horizontal	PASS
3	10578.79	51.17	41.65	-9.52	74.00	32.35	PK	Horizontal	PASS
4	13220.11	52.29	41.41	-10.88	74.00	32.59	PK	Horizontal	PASS
5	15456.23	51.50	42.18	-9.32	74.00	31.82	PK	Horizontal	PASS
6	17647.32	48.09	43.06	-5.03	74.00	30.94	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

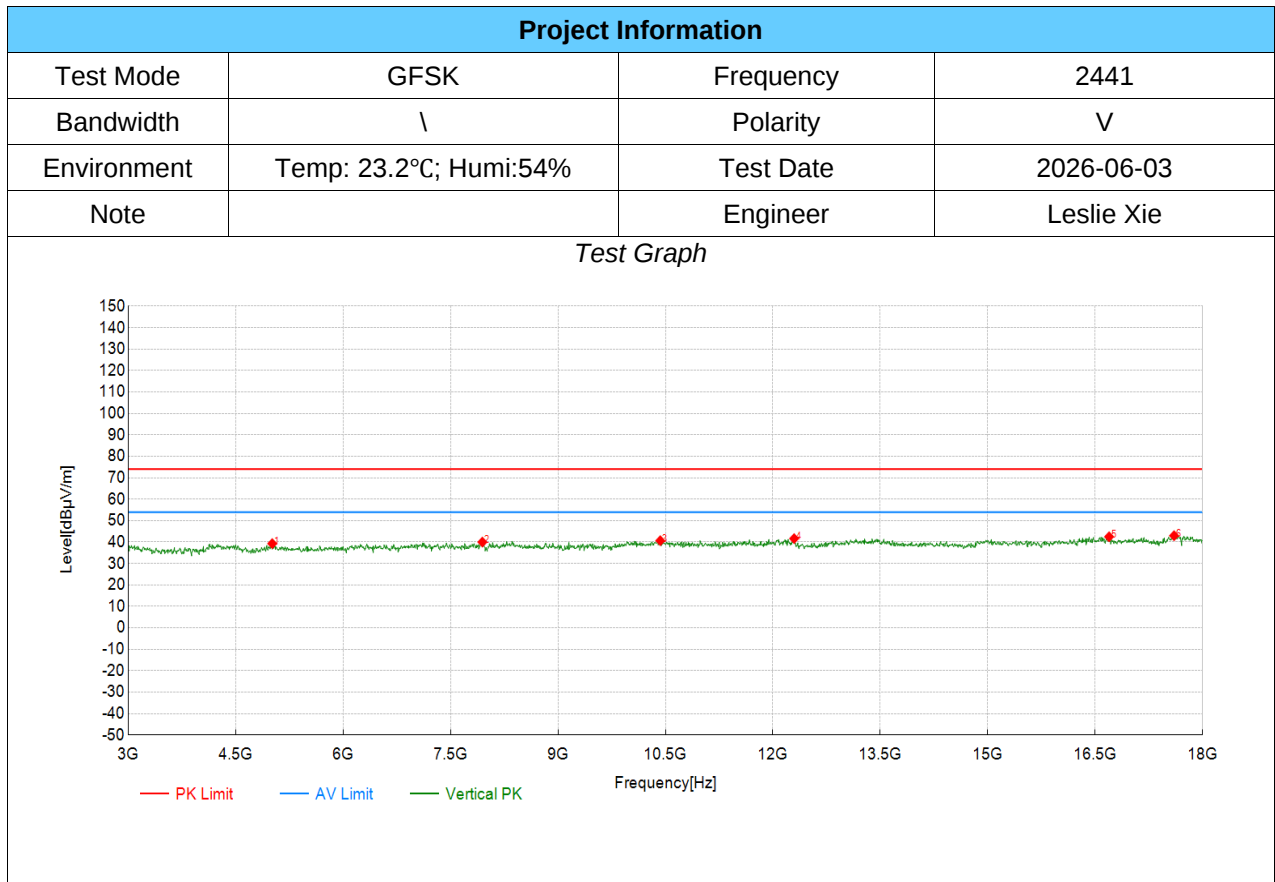


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5011.01	56.83	39.28	-17.55	74.00	34.72	PK	Vertical	PASS
2	7944.97	54.96	39.99	-14.97	74.00	34.01	PK	Vertical	PASS
3	10428.71	50.26	40.65	-9.61	74.00	33.35	PK	Vertical	PASS
4	12297.15	52.01	41.63	-10.38	74.00	32.37	PK	Vertical	PASS
5	16694.35	50.20	42.49	-7.71	74.00	31.51	PK	Vertical	PASS
6	17602.30	47.98	42.98	-5.00	74.00	31.02	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

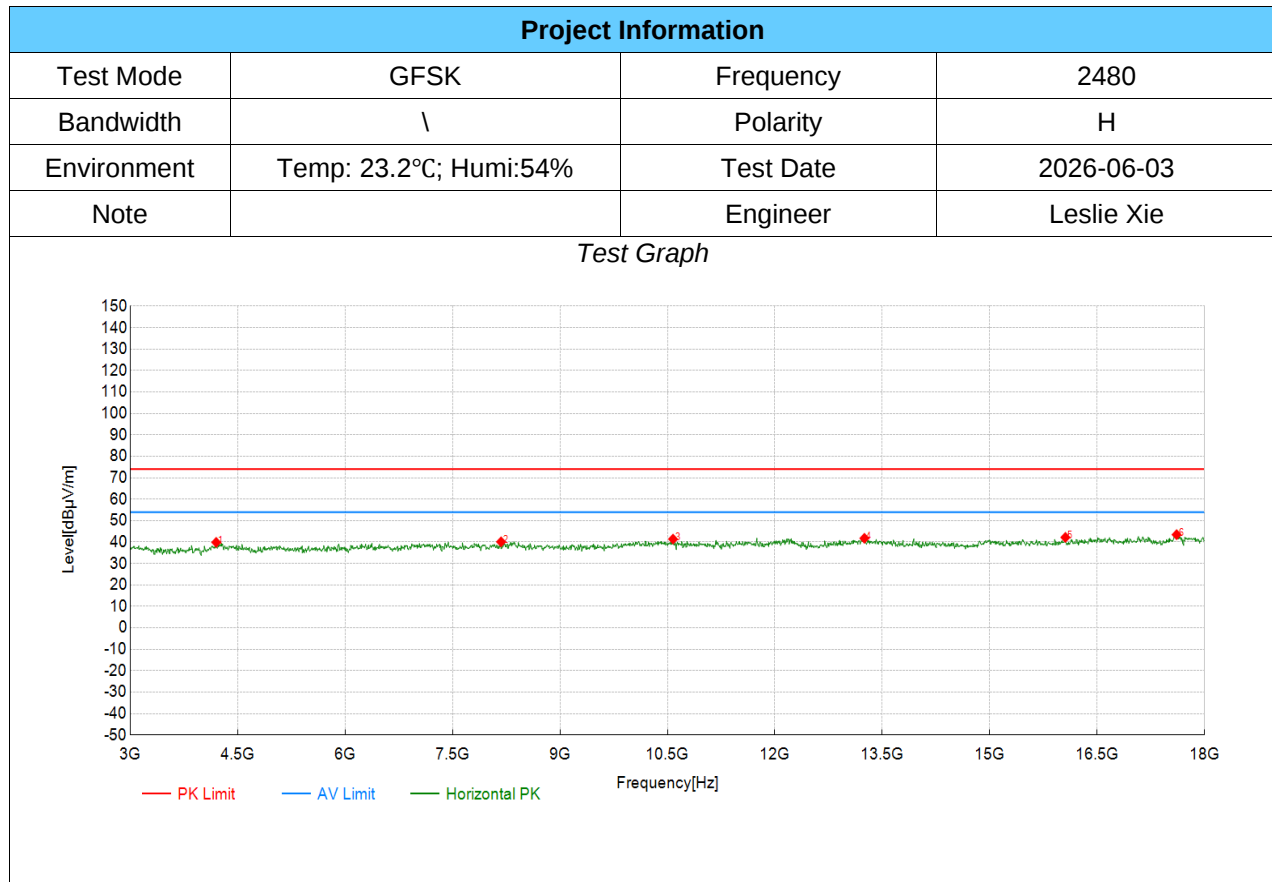


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4200.60	57.38	39.88	-17.50	74.00	34.12	PK	Horizontal	PASS
2	8177.59	54.49	40.11	-14.38	74.00	33.89	PK	Horizontal	PASS
3	10578.79	50.91	41.39	-9.52	74.00	32.61	PK	Horizontal	PASS
4	13250.13	52.70	41.76	-10.94	74.00	32.24	PK	Horizontal	PASS
5	16056.53	50.54	42.20	-8.34	74.00	31.80	PK	Horizontal	PASS
6	17609.80	48.46	43.46	-5.00	74.00	30.54	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

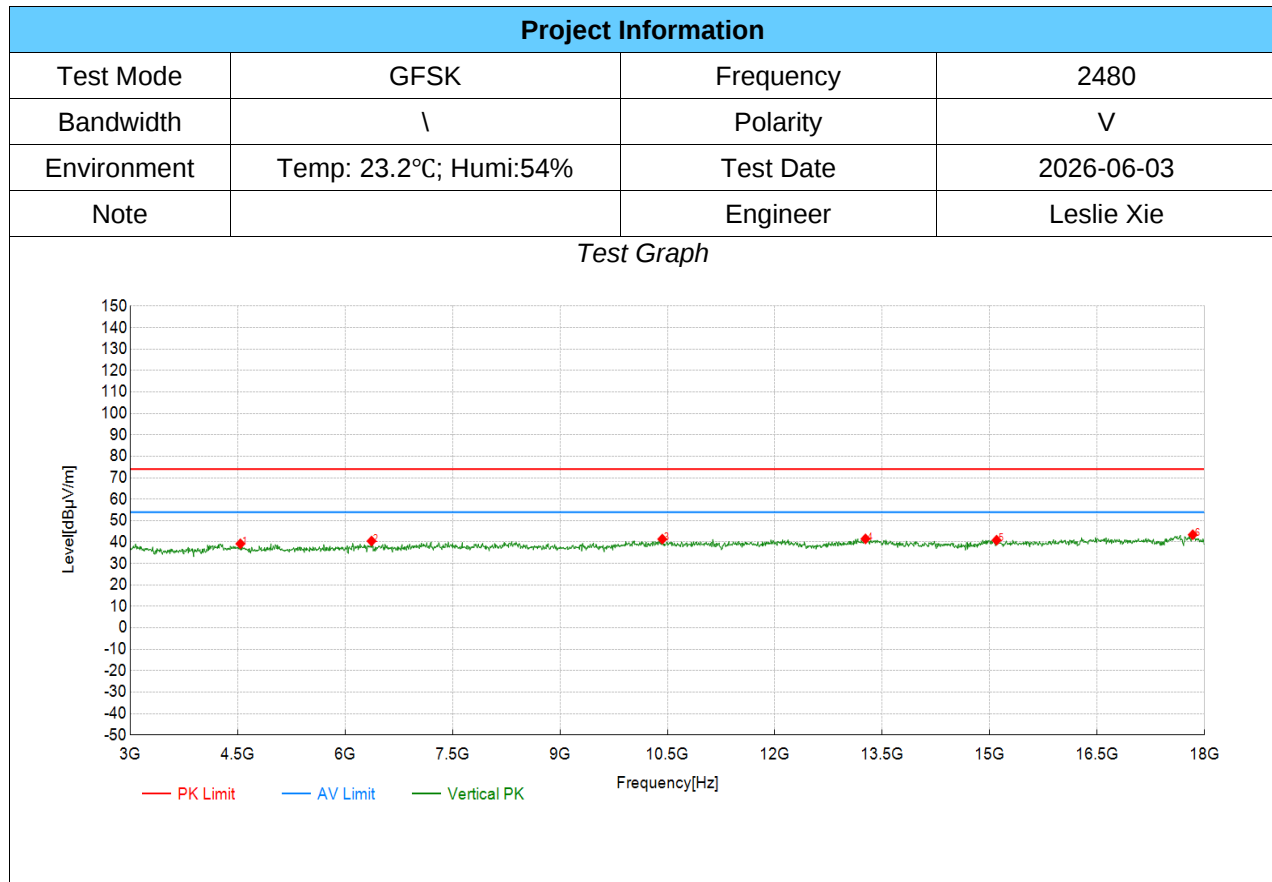


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4538.27	57.38	39.20	-18.18	74.00	34.80	PK	Vertical	PASS
2	6369.18	56.78	40.48	-16.30	74.00	33.52	PK	Vertical	PASS
3	10428.71	50.99	41.38	-9.61	74.00	32.62	PK	Vertical	PASS
4	13265.13	52.46	41.48	-10.98	74.00	32.52	PK	Vertical	PASS
5	15096.05	50.65	40.88	-9.77	74.00	33.12	PK	Vertical	PASS
6	17834.92	48.67	43.42	-5.25	74.00	30.58	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

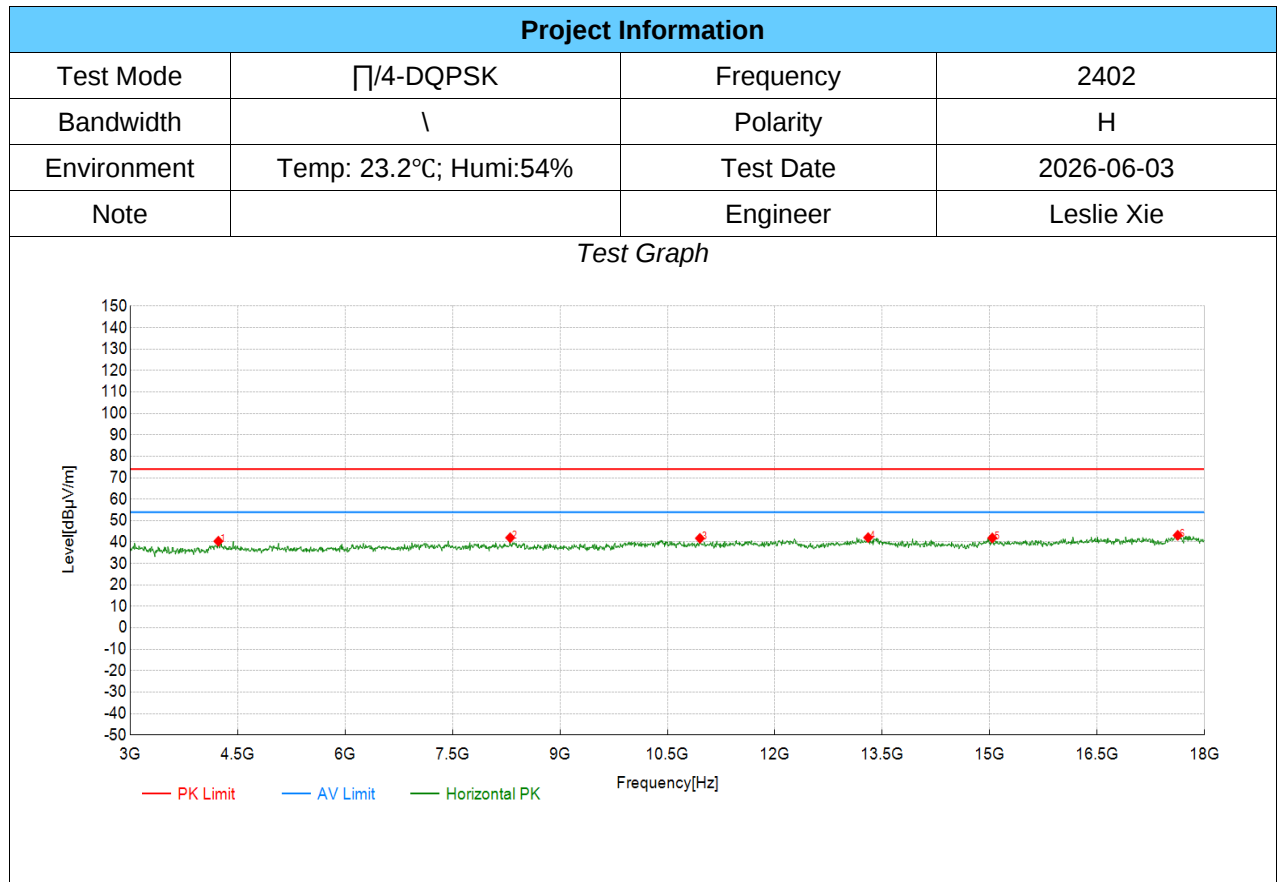


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4230.62	57.95	40.39	-17.56	74.00	33.61	PK	Horizontal	PASS
2	8305.15	55.37	42.04	-13.33	74.00	31.96	PK	Horizontal	PASS
3	10953.98	50.70	41.75	-8.95	74.00	32.25	PK	Horizontal	PASS
4	13302.65	53.15	42.08	-11.07	74.00	31.92	PK	Horizontal	PASS
5	15036.02	51.36	41.92	-9.44	74.00	32.08	PK	Horizontal	PASS
6	17624.81	48.17	43.15	-5.02	74.00	30.85	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

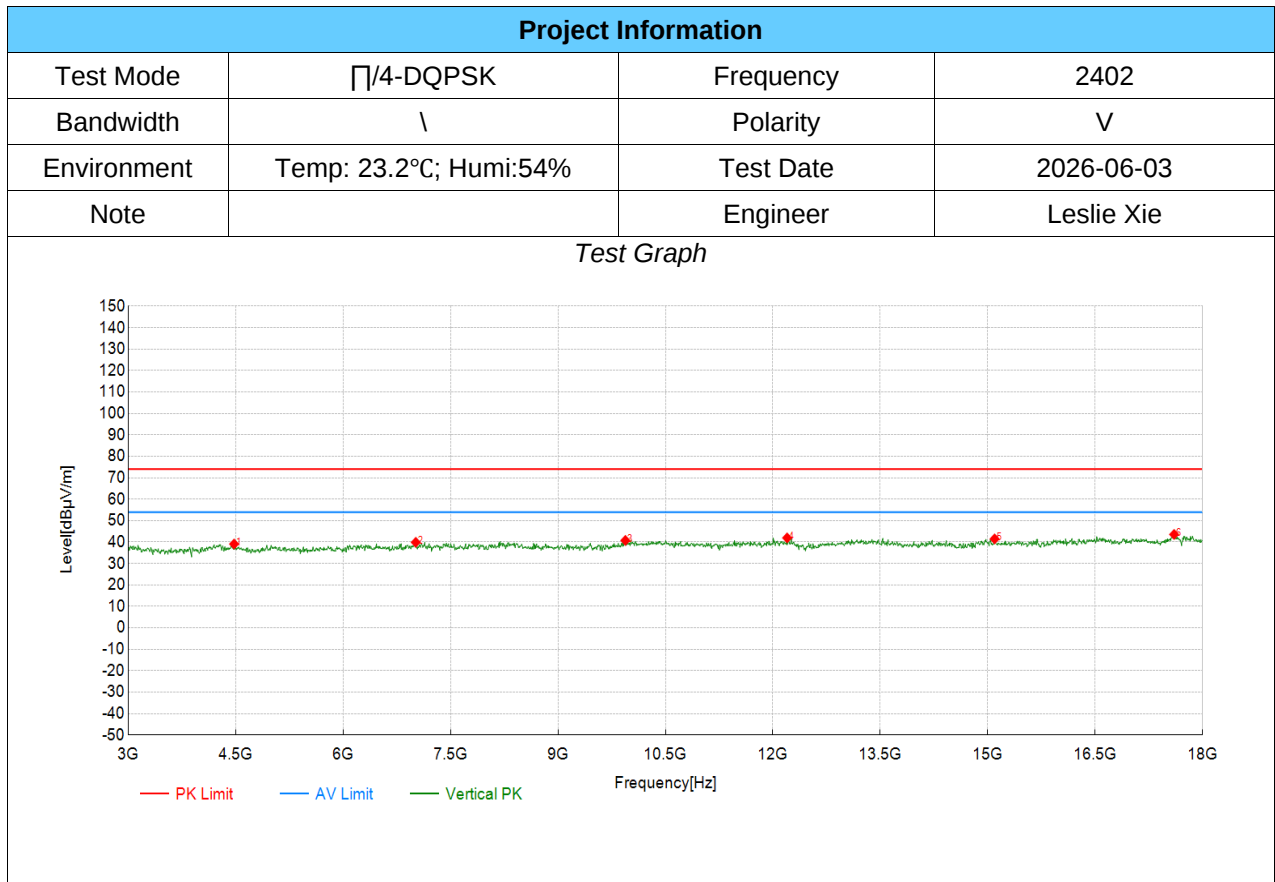


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4478.24	57.16	39.09	-18.07	74.00	34.91	PK	Vertical	PASS
2	7014.51	54.74	39.89	-14.85	74.00	34.11	PK	Vertical	PASS
3	9940.97	51.81	40.77	-11.04	74.00	33.23	PK	Vertical	PASS
4	12199.60	51.71	41.95	-9.76	74.00	32.05	PK	Vertical	PASS
5	15096.05	51.24	41.47	-9.77	74.00	32.53	PK	Vertical	PASS
6	17602.30	48.58	43.58	-5.00	74.00	30.42	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

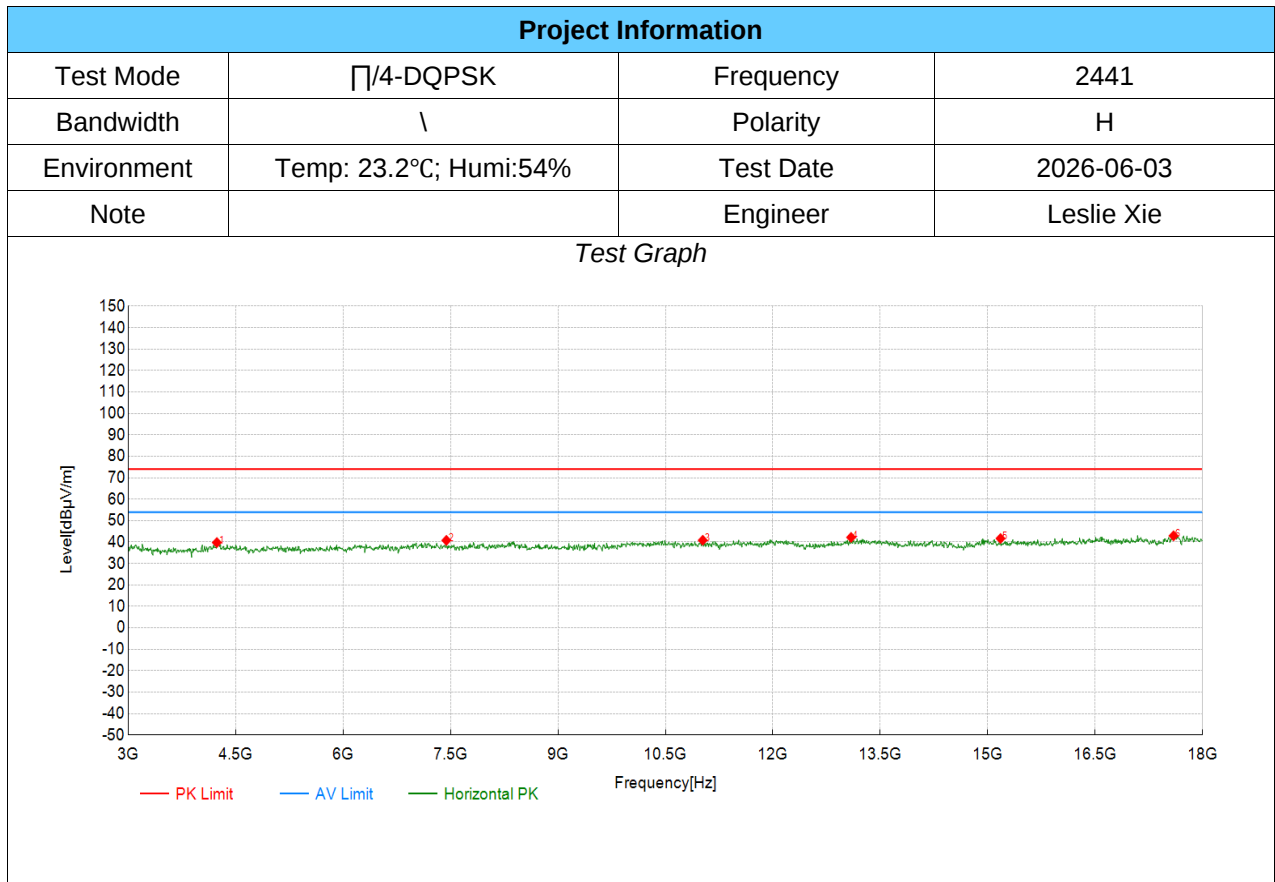


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4238.12	57.36	39.78	-17.58	74.00	34.22	PK	Horizontal	PASS
2	7442.22	56.04	40.81	-15.23	74.00	33.19	PK	Horizontal	PASS
3	11021.51	49.73	40.87	-8.86	74.00	33.13	PK	Horizontal	PASS
4	13092.55	53.43	42.20	-11.23	74.00	31.80	PK	Horizontal	PASS
5	15178.59	51.91	41.68	-10.23	74.00	32.32	PK	Horizontal	PASS
6	17594.80	47.99	42.92	-5.07	74.00	31.08	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

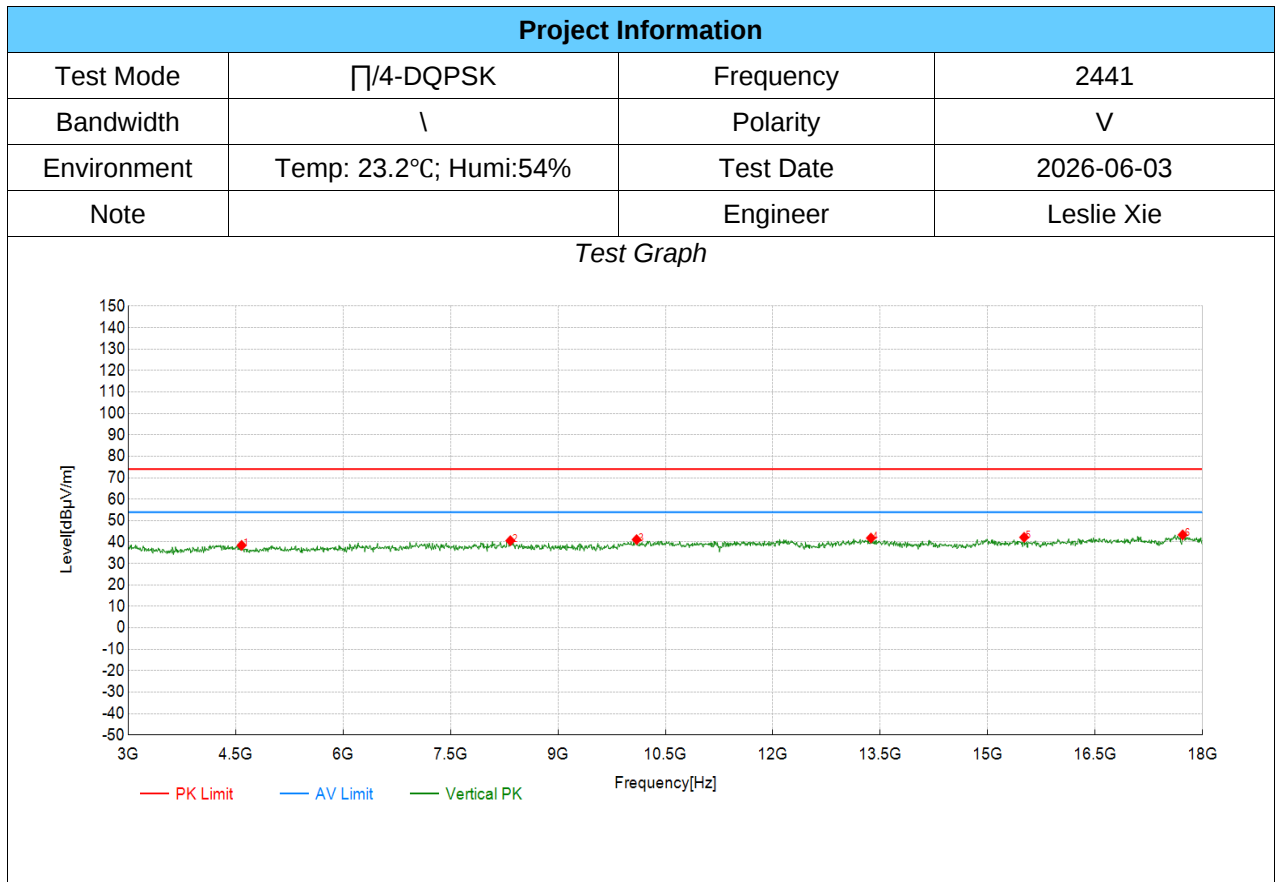


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4583.29	56.76	38.46	-18.30	74.00	35.54	PK	Vertical	PASS
2	8335.17	53.70	40.64	-13.06	74.00	33.36	PK	Vertical	PASS
3	10098.55	52.14	41.16	-10.98	74.00	32.84	PK	Vertical	PASS
4	13370.19	53.13	41.89	-11.24	74.00	32.11	PK	Vertical	PASS
5	15508.75	51.66	42.23	-9.43	74.00	31.77	PK	Vertical	PASS
6	17722.36	48.42	43.35	-5.07	74.00	30.65	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

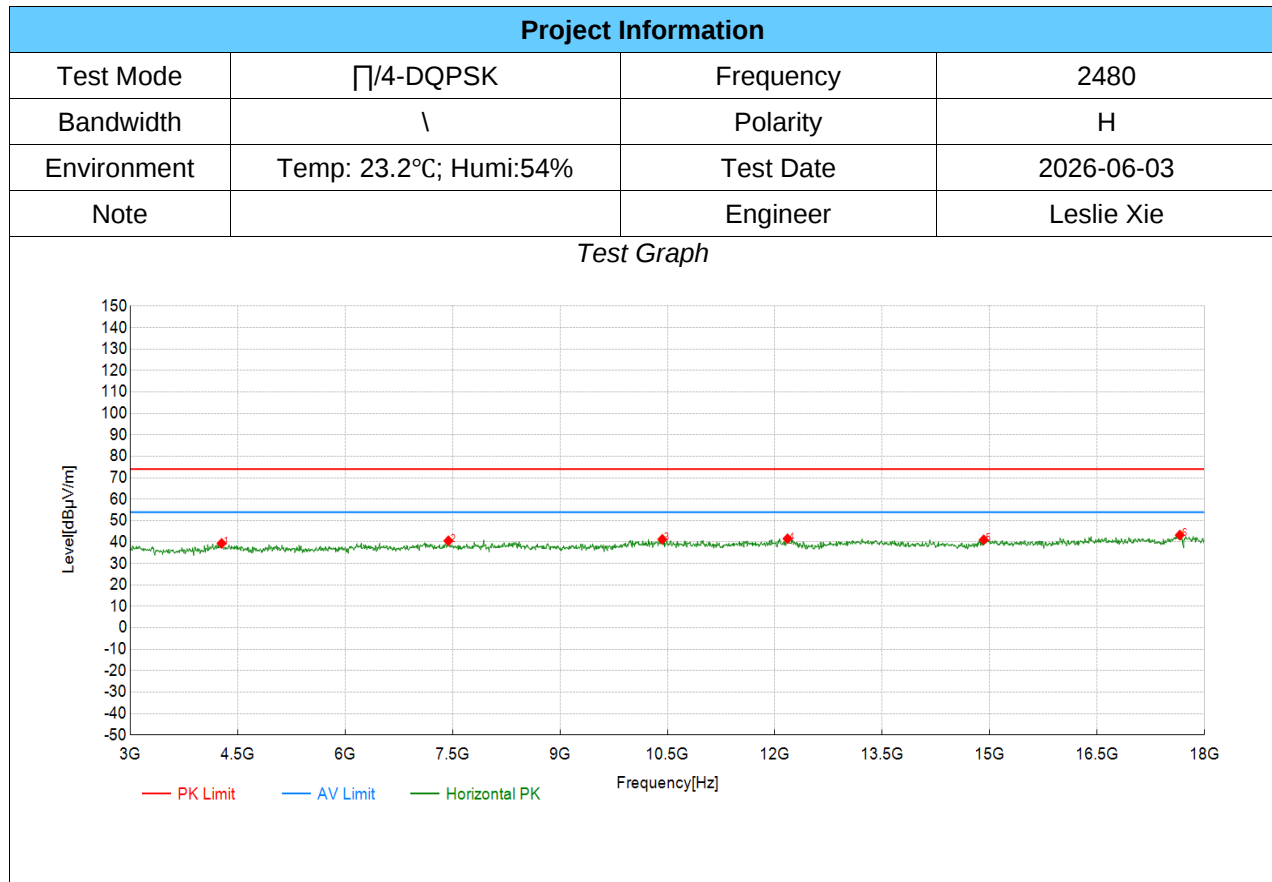

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4275.64	57.05	39.37	-17.68	74.00	34.63	PK	Horizontal	PASS
2	7442.22	55.82	40.59	-15.23	74.00	33.41	PK	Horizontal	PASS
3	10428.71	50.91	41.30	-9.61	74.00	32.70	PK	Horizontal	PASS
4	12177.09	51.32	41.58	-9.74	74.00	32.42	PK	Horizontal	PASS
5	14915.96	50.62	41.06	-9.56	74.00	32.94	PK	Horizontal	PASS
6	17654.83	48.29	43.26	-5.03	74.00	30.74	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

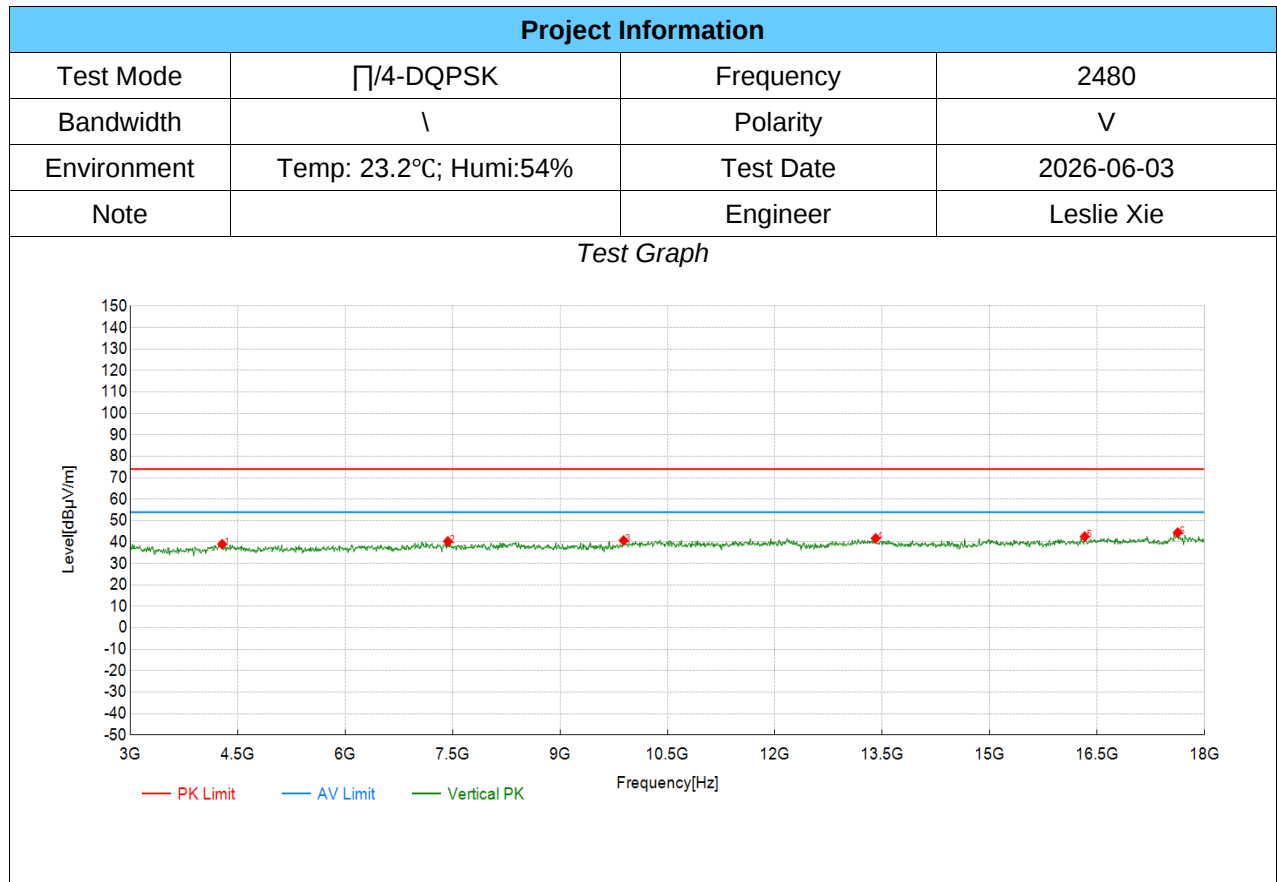

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4283.14	56.69	39.00	-17.69	74.00	35.00	PK	Vertical	PASS
2	7434.72	55.53	40.32	-15.21	74.00	33.68	PK	Vertical	PASS
3	9888.44	52.11	40.70	-11.41	74.00	33.30	PK	Vertical	PASS
4	13407.70	53.07	41.71	-11.36	74.00	32.29	PK	Vertical	PASS
5	16326.66	50.90	42.57	-8.33	74.00	31.43	PK	Vertical	PASS
6	17624.81	49.43	44.41	-5.02	74.00	29.59	PK	Vertical	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

8.6. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)-RIGHT

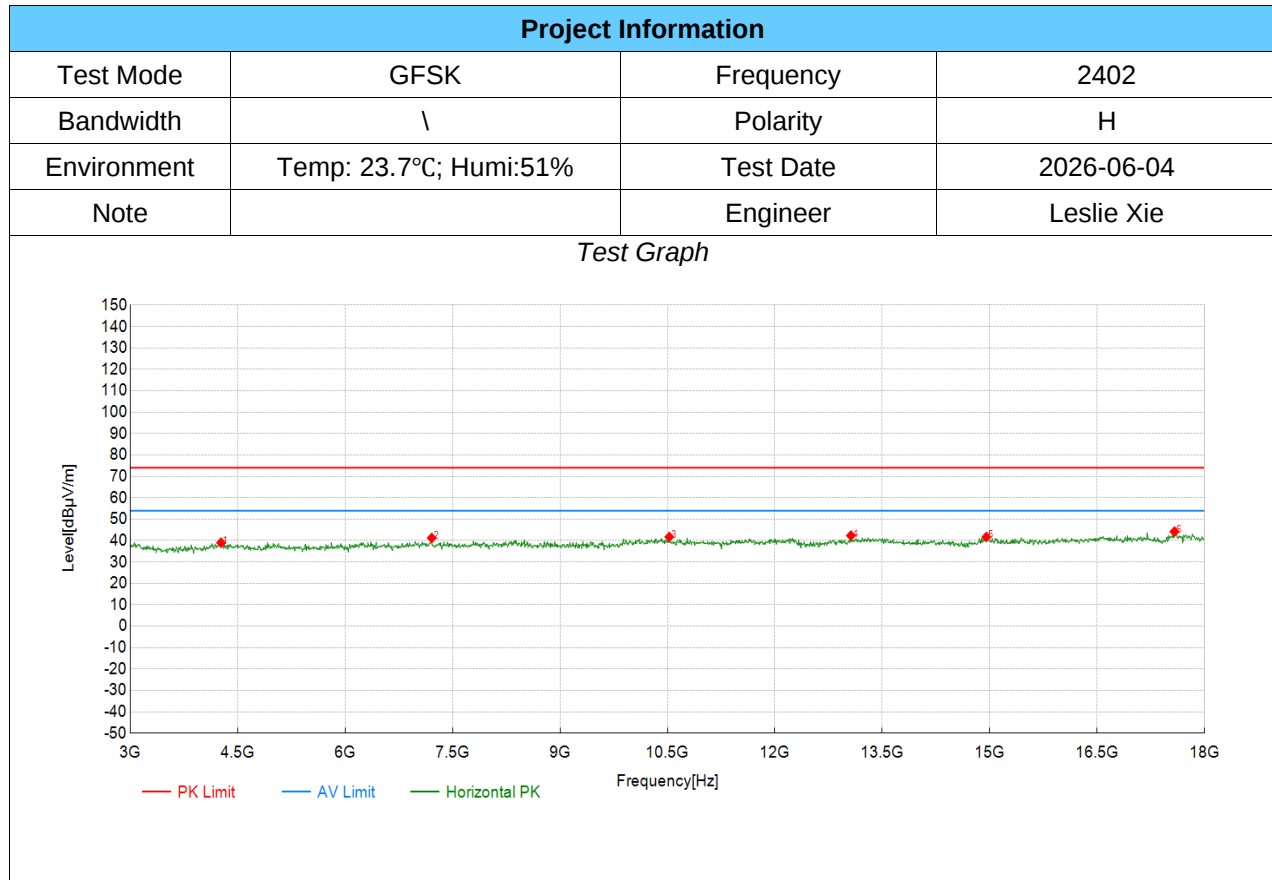


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4268.13	56.65	38.99	-17.66	74.00	35.01	PK	Horizontal	PASS
2	7209.60	56.46	41.22	-15.24	74.00	32.78	PK	Horizontal	PASS
3	10526.26	51.27	41.72	-9.55	74.00	32.28	PK	Horizontal	PASS
4	13062.53	53.71	42.36	-11.35	74.00	31.64	PK	Horizontal	PASS
5	14953.48	51.11	41.70	-9.41	74.00	32.30	PK	Horizontal	PASS
6	17579.79	49.49	44.20	-5.29	74.00	29.80	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

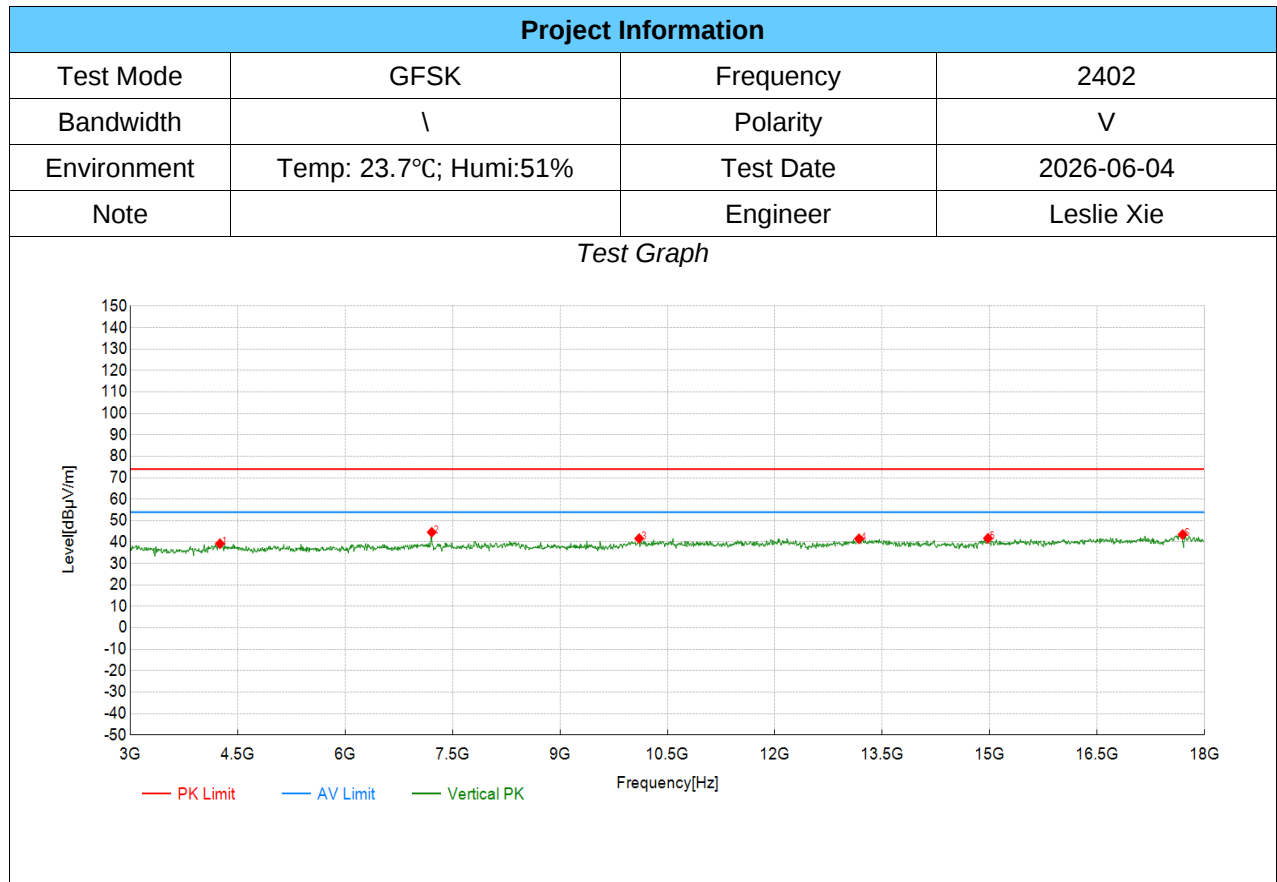


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4253.13	56.88	39.25	-17.63	74.00	34.75	PK	Vertical	PASS
2	7209.60	59.82	44.58	-15.24	74.00	29.42	PK	Vertical	PASS
3	10106.05	52.65	41.65	-11.00	74.00	32.35	PK	Vertical	PASS
4	13175.09	52.46	41.54	-10.92	74.00	32.46	PK	Vertical	PASS
5	14975.99	51.05	41.73	-9.32	74.00	32.27	PK	Vertical	PASS
6	17692.35	48.58	43.52	-5.06	74.00	30.48	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

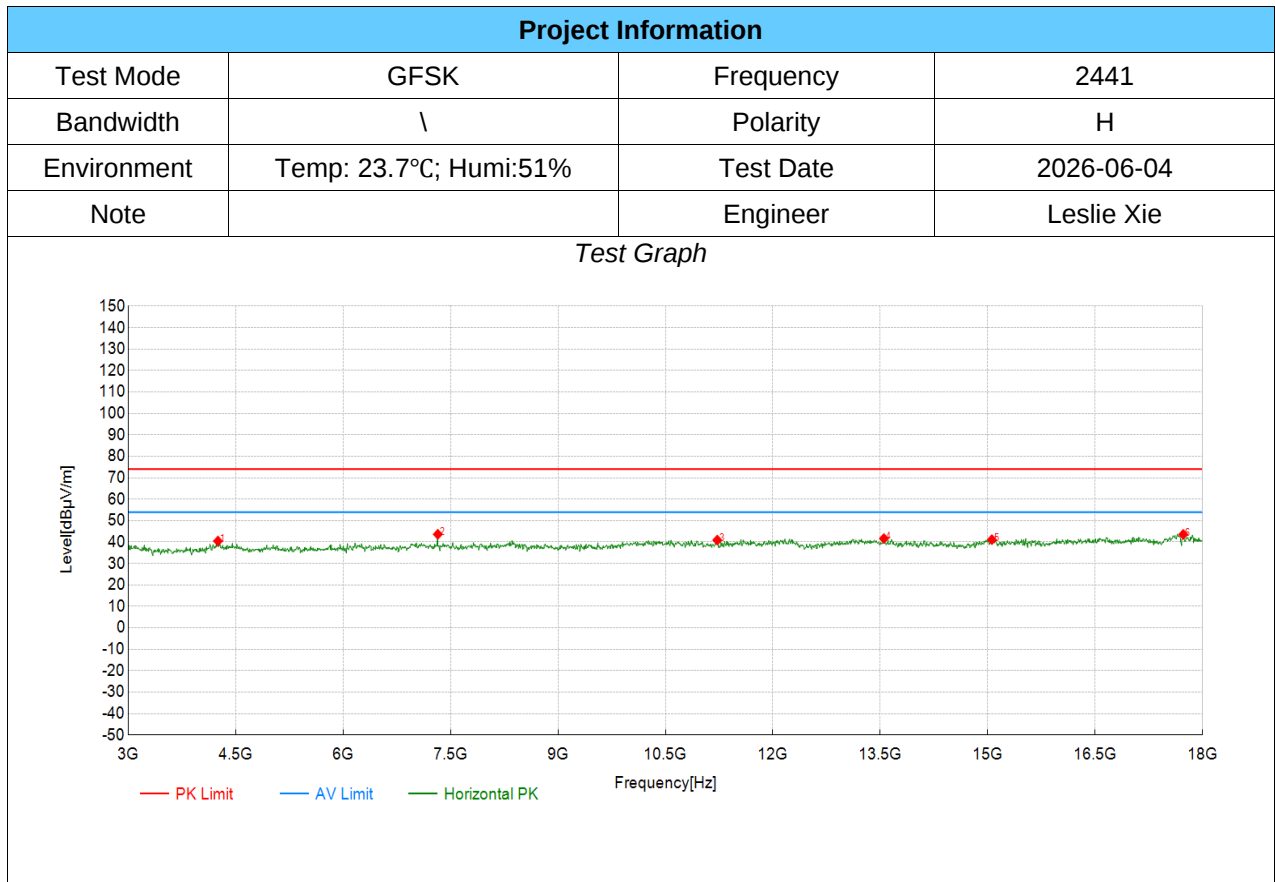


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4253.13	58.11	40.48	-17.63	74.00	33.52	PK	Horizontal	PASS
2	7322.16	58.82	43.64	-15.18	74.00	30.36	PK	Horizontal	PASS
3	11224.11	49.61	40.93	-8.68	74.00	33.07	PK	Horizontal	PASS
4	13550.28	53.83	41.67	-12.16	74.00	32.33	PK	Horizontal	PASS
5	15058.53	50.70	41.14	-9.56	74.00	32.86	PK	Horizontal	PASS
6	17729.86	48.65	43.58	-5.07	74.00	30.42	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

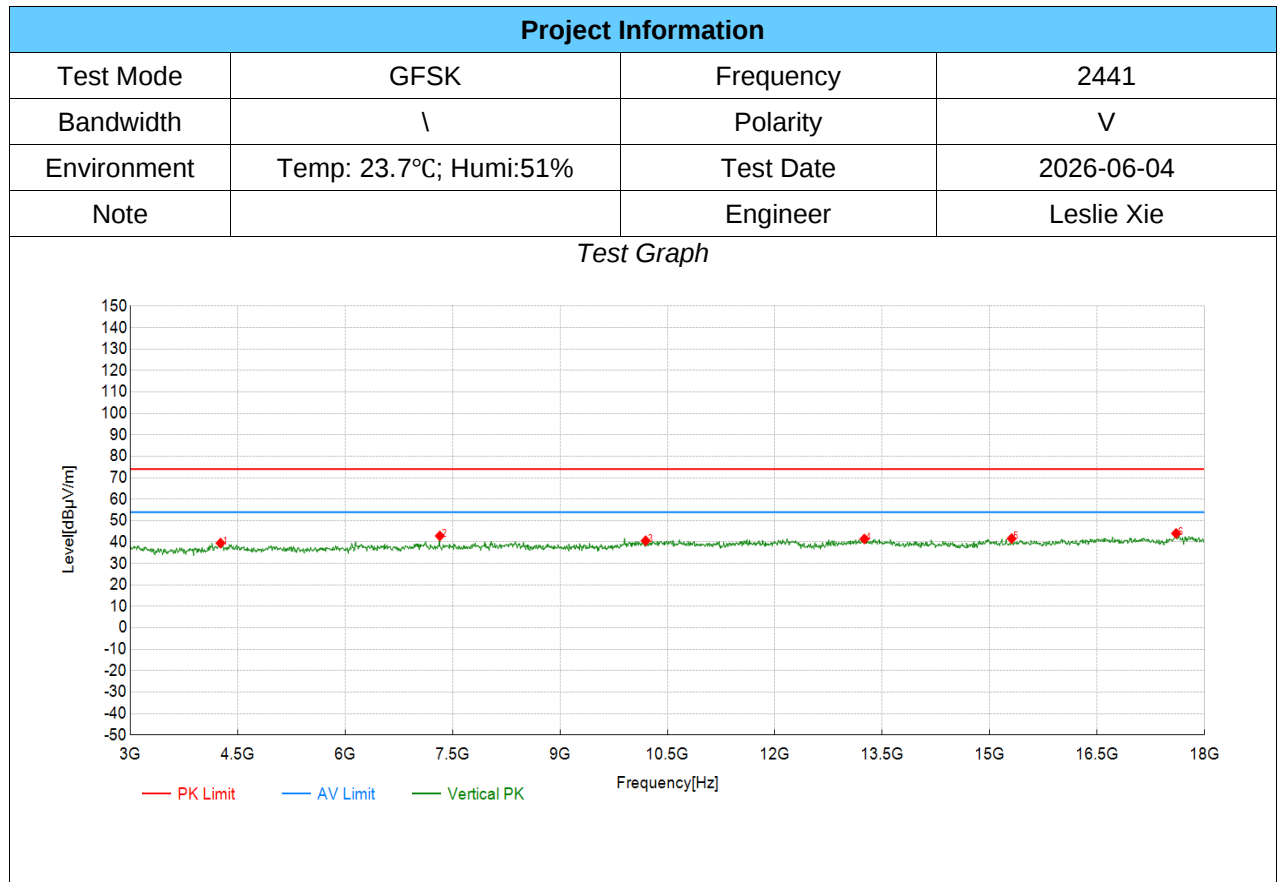


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4260.63	57.16	39.51	-17.65	74.00	34.49	PK	Vertical	PASS
2	7322.16	58.06	42.88	-15.18	74.00	31.12	PK	Vertical	PASS
3	10196.10	51.94	40.62	-11.32	74.00	33.38	PK	Vertical	PASS
4	13250.13	52.38	41.44	-10.94	74.00	32.56	PK	Vertical	PASS
5	15306.15	51.36	41.62	-9.74	74.00	32.38	PK	Vertical	PASS
6	17602.30	49.02	44.02	-5.00	74.00	29.98	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

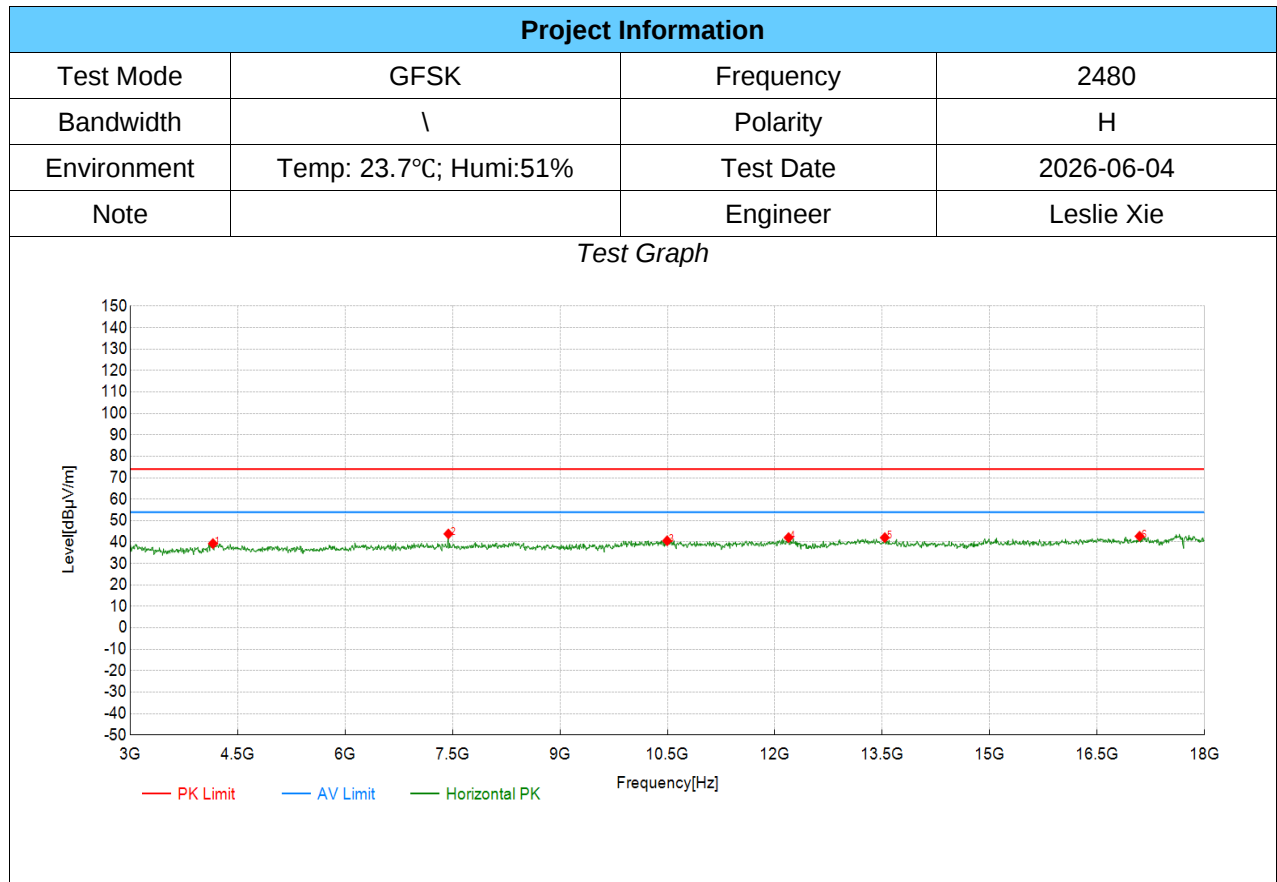


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4155.58	57.27	39.30	-17.97	74.00	34.70	PK	Horizontal	PASS
2	7442.22	59.04	43.81	-15.23	74.00	30.19	PK	Horizontal	PASS
3	10496.25	50.17	40.61	-9.56	74.00	33.39	PK	Horizontal	PASS
4	12192.10	51.83	42.08	-9.75	74.00	31.92	PK	Horizontal	PASS
5	13535.27	54.17	42.08	-12.09	74.00	31.92	PK	Horizontal	PASS
6	17092.05	49.85	42.71	-7.14	74.00	31.29	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

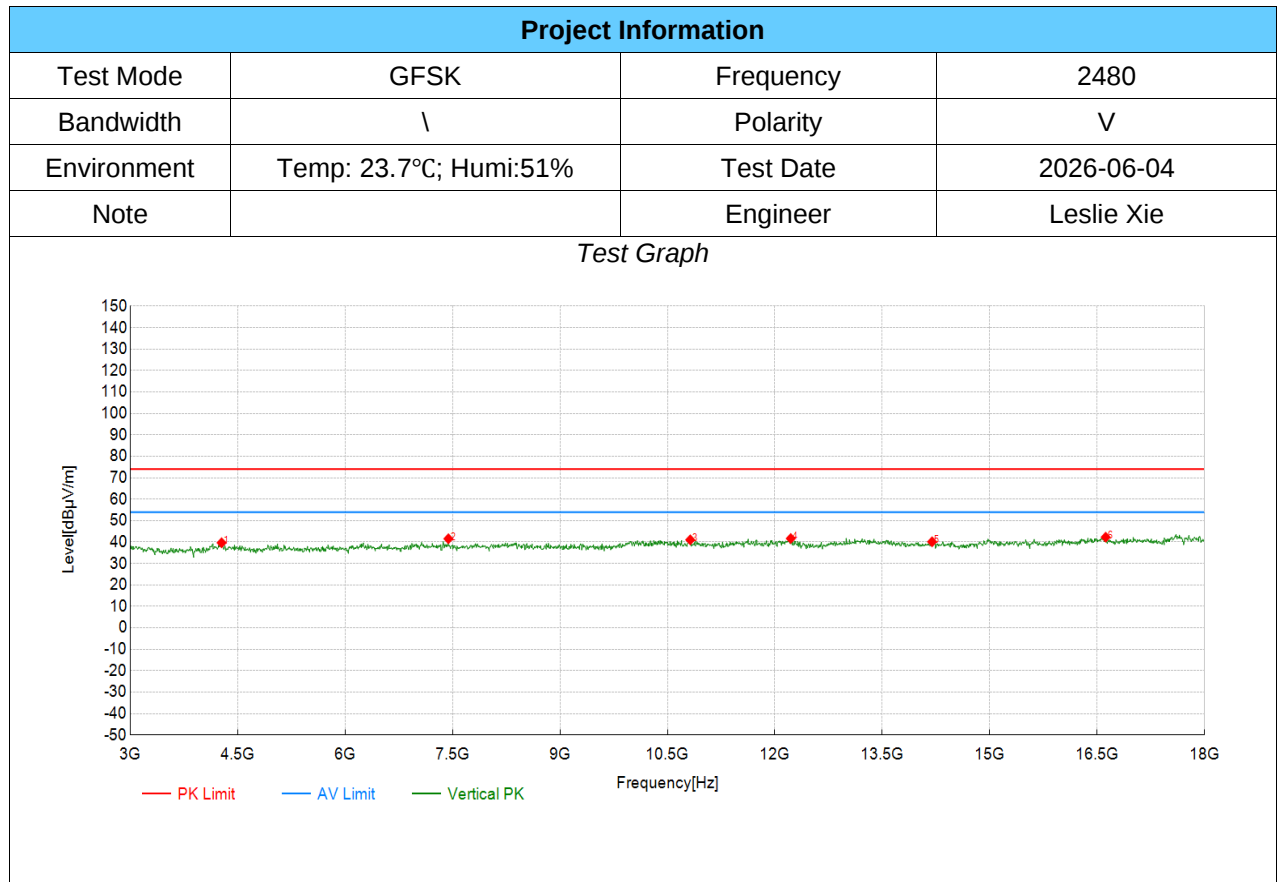


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4275.64	57.35	39.67	-17.68	74.00	34.33	PK	Vertical	PASS
2	7442.22	56.78	41.55	-15.23	74.00	32.45	PK	Vertical	PASS
3	10818.91	50.13	41.05	-9.08	74.00	32.95	PK	Vertical	PASS
4	12222.11	51.59	41.68	-9.91	74.00	32.32	PK	Vertical	PASS
5	14195.60	50.73	40.15	-10.58	74.00	33.85	PK	Vertical	PASS
6	16619.31	49.87	42.28	-7.59	74.00	31.72	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

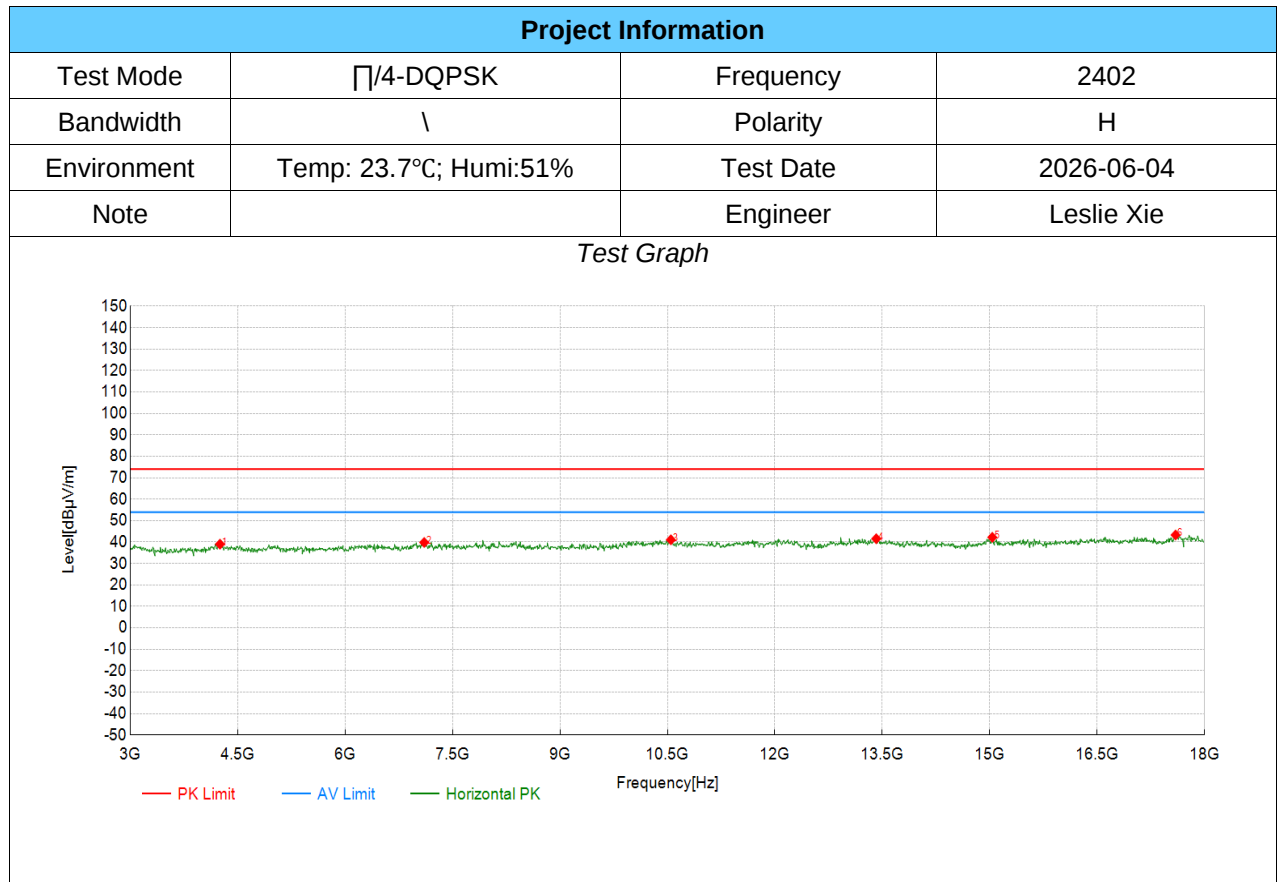


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4253.13	56.66	39.03	-17.63	74.00	34.97	PK	Horizontal	PASS
2	7104.55	54.88	39.84	-15.04	74.00	34.16	PK	Horizontal	PASS
3	10548.77	50.62	41.08	-9.54	74.00	32.92	PK	Horizontal	PASS
4	13415.21	52.96	41.56	-11.40	74.00	32.44	PK	Horizontal	PASS
5	15036.02	51.66	42.22	-9.44	74.00	31.78	PK	Horizontal	PASS
6	17594.80	48.39	43.32	-5.07	74.00	30.68	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

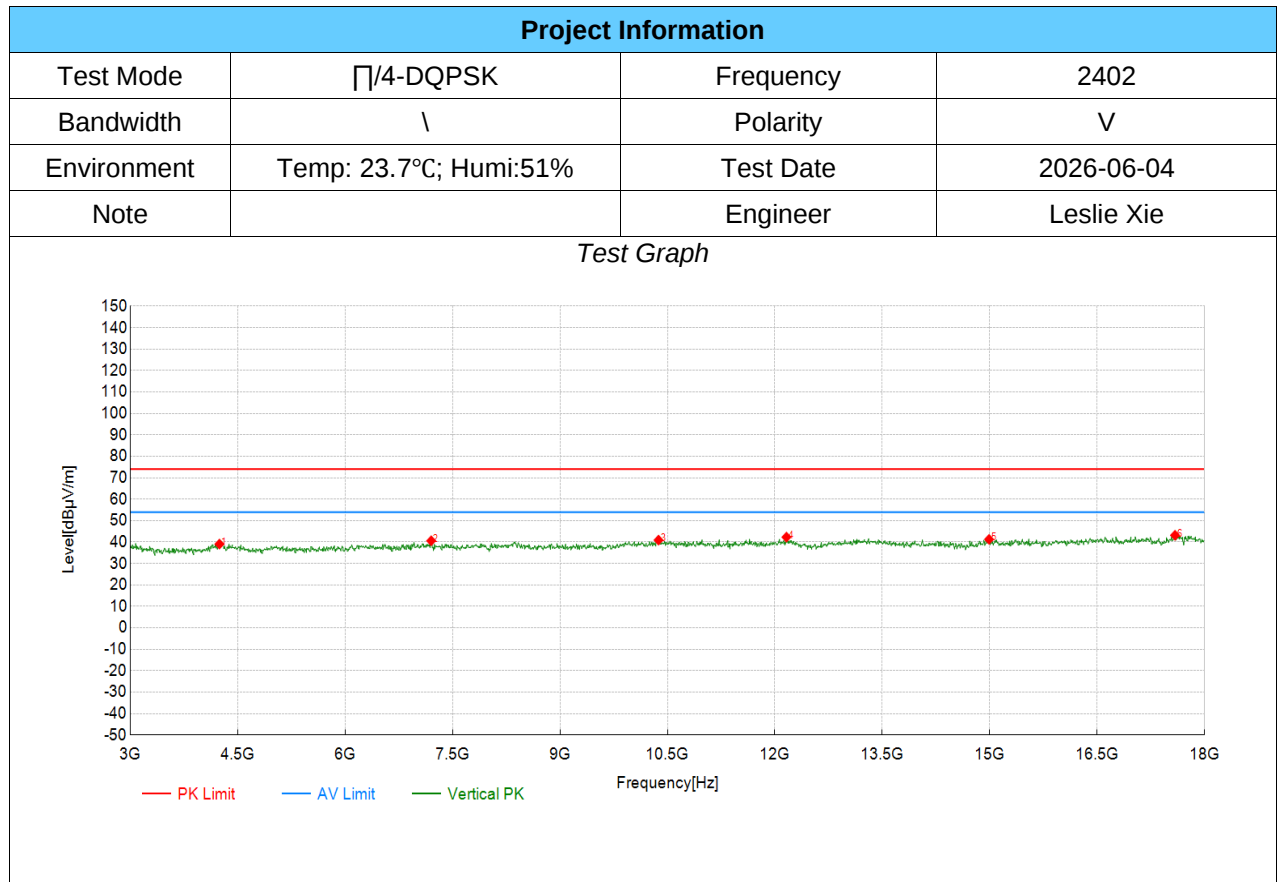


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4245.62	56.67	39.06	-17.61	74.00	34.94	PK	Vertical	PASS
2	7202.10	55.85	40.61	-15.24	74.00	33.39	PK	Vertical	PASS
3	10376.19	50.76	40.93	-9.83	74.00	33.07	PK	Vertical	PASS
4	12162.08	52.04	42.30	-9.74	74.00	31.70	PK	Vertical	PASS
5	14991.00	50.55	41.27	-9.28	74.00	32.73	PK	Vertical	PASS
6	17587.29	48.35	43.17	-5.18	74.00	30.83	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

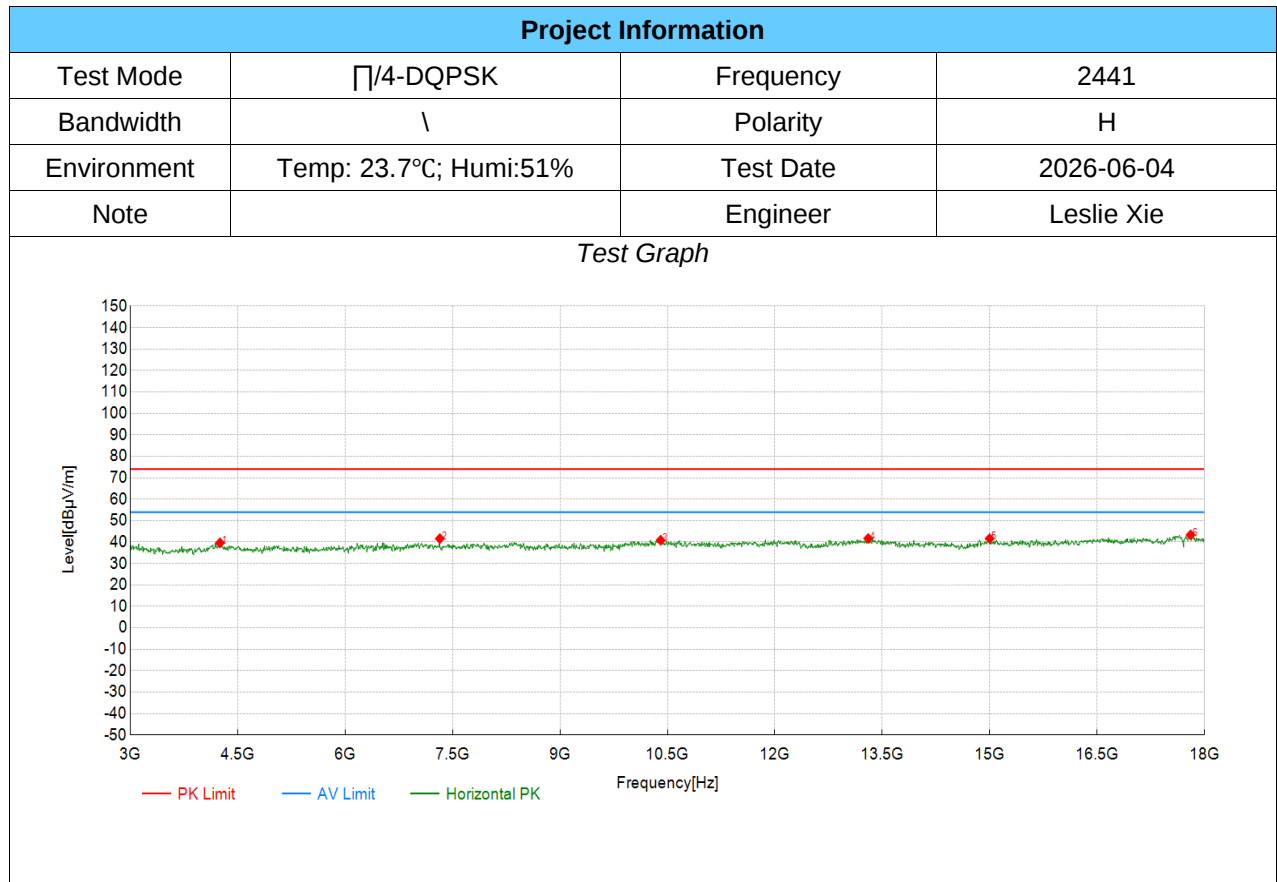


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4253.13	57.26	39.63	-17.63	74.00	34.37	PK	Horizontal	PASS
2	7322.16	56.80	41.62	-15.18	74.00	32.38	PK	Horizontal	PASS
3	10406.20	50.48	40.86	-9.62	74.00	33.14	PK	Horizontal	PASS
4	13302.65	52.75	41.68	-11.07	74.00	32.32	PK	Horizontal	PASS
5	14998.50	50.86	41.62	-9.24	74.00	32.38	PK	Horizontal	PASS
6	17804.90	48.48	43.34	-5.14	74.00	30.66	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

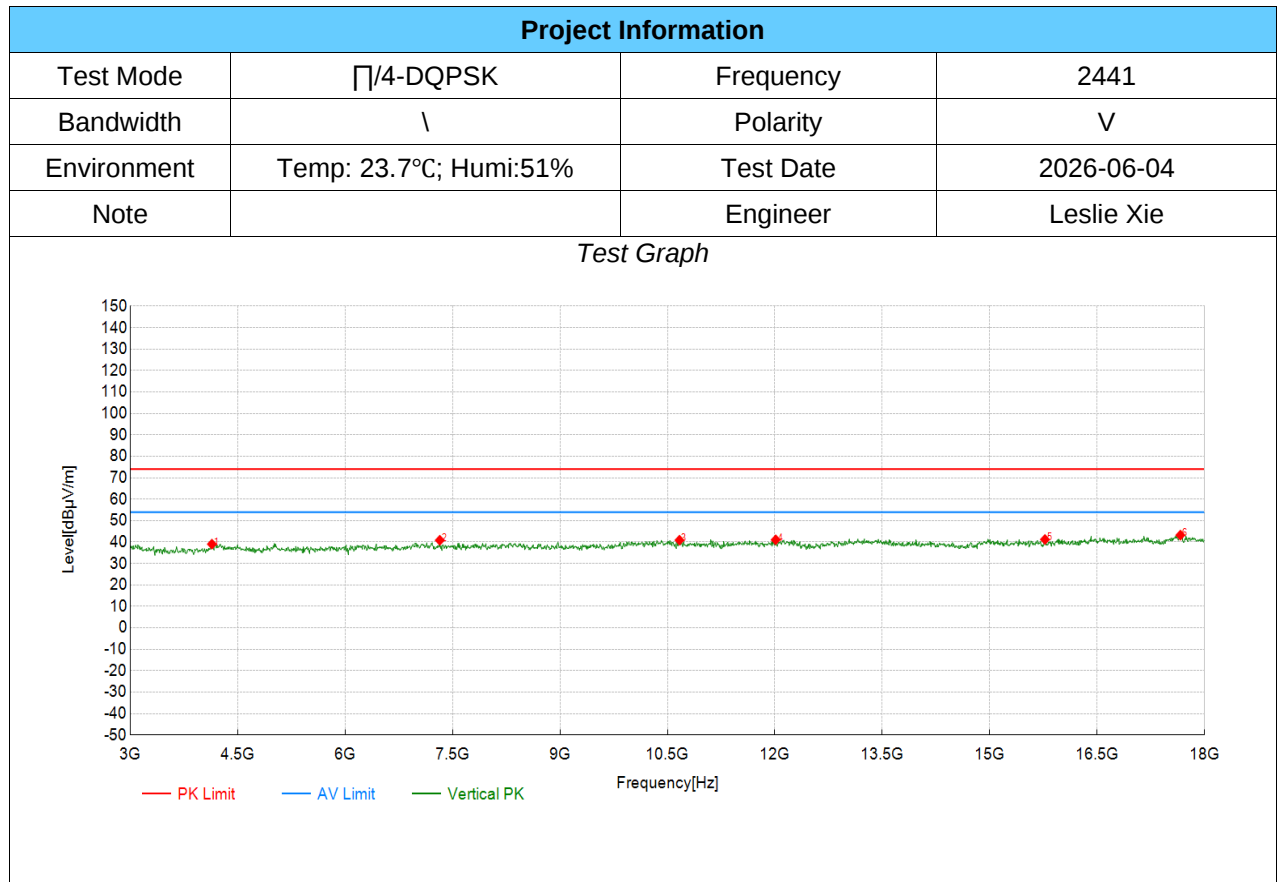


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4140.57	57.16	39.04	-18.12	74.00	34.96	PK	Vertical	PASS
2	7322.16	56.04	40.86	-15.18	74.00	33.14	PK	Vertical	PASS
3	10668.83	50.27	40.90	-9.37	74.00	33.10	PK	Vertical	PASS
4	12012.01	50.70	41.07	-9.63	74.00	32.93	PK	Vertical	PASS
5	15771.39	51.11	41.21	-9.90	74.00	32.79	PK	Vertical	PASS
6	17662.33	48.27	43.23	-5.04	74.00	30.77	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

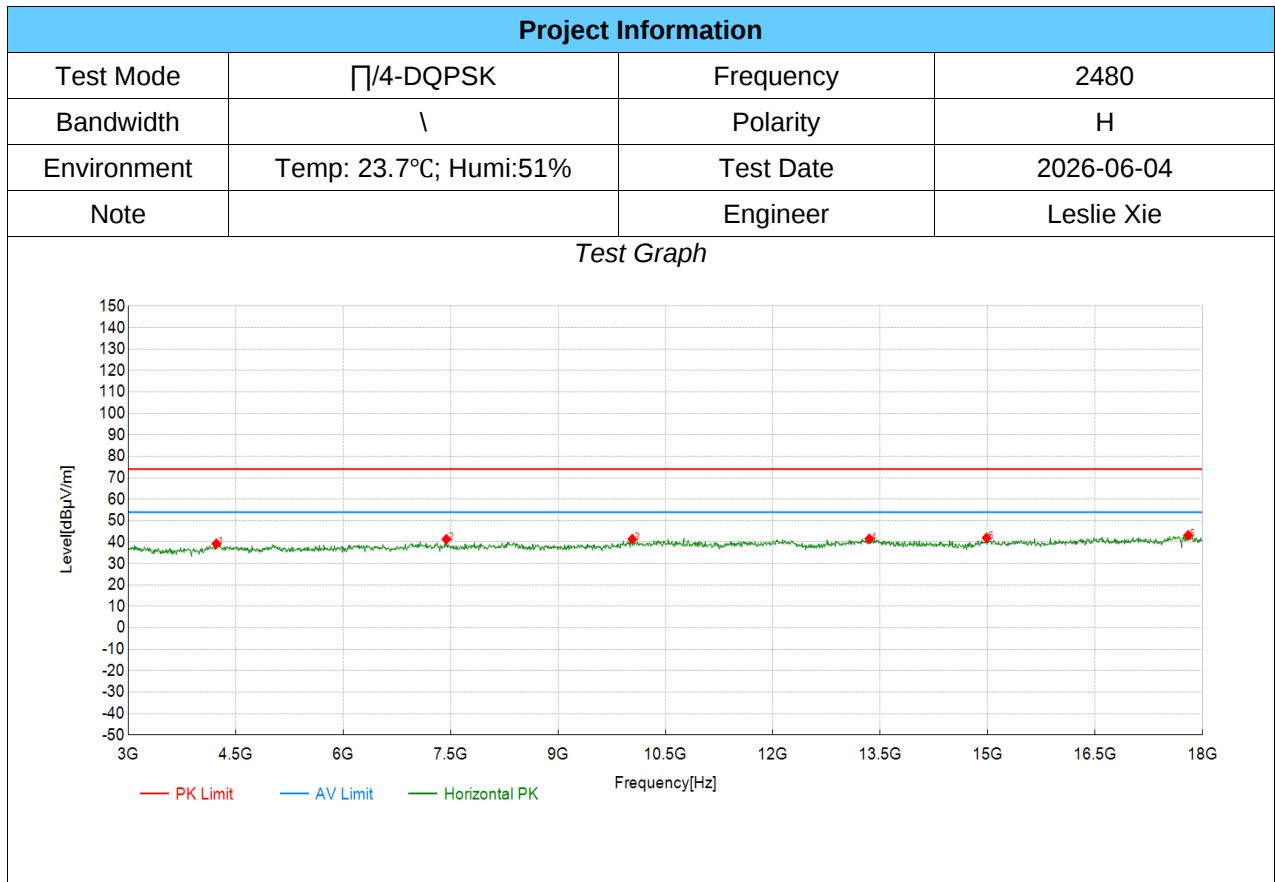

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4230.62	56.78	39.22	-17.56	74.00	34.78	PK	Horizontal	PASS
2	7442.22	56.57	41.34	-15.23	74.00	32.66	PK	Horizontal	PASS
3	10038.52	52.15	41.38	-10.77	74.00	32.62	PK	Horizontal	PASS
4	13347.67	52.68	41.49	-11.19	74.00	32.51	PK	Horizontal	PASS
5	14983.49	51.25	41.95	-9.30	74.00	32.05	PK	Horizontal	PASS
6	17797.40	48.27	43.15	-5.12	74.00	30.85	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

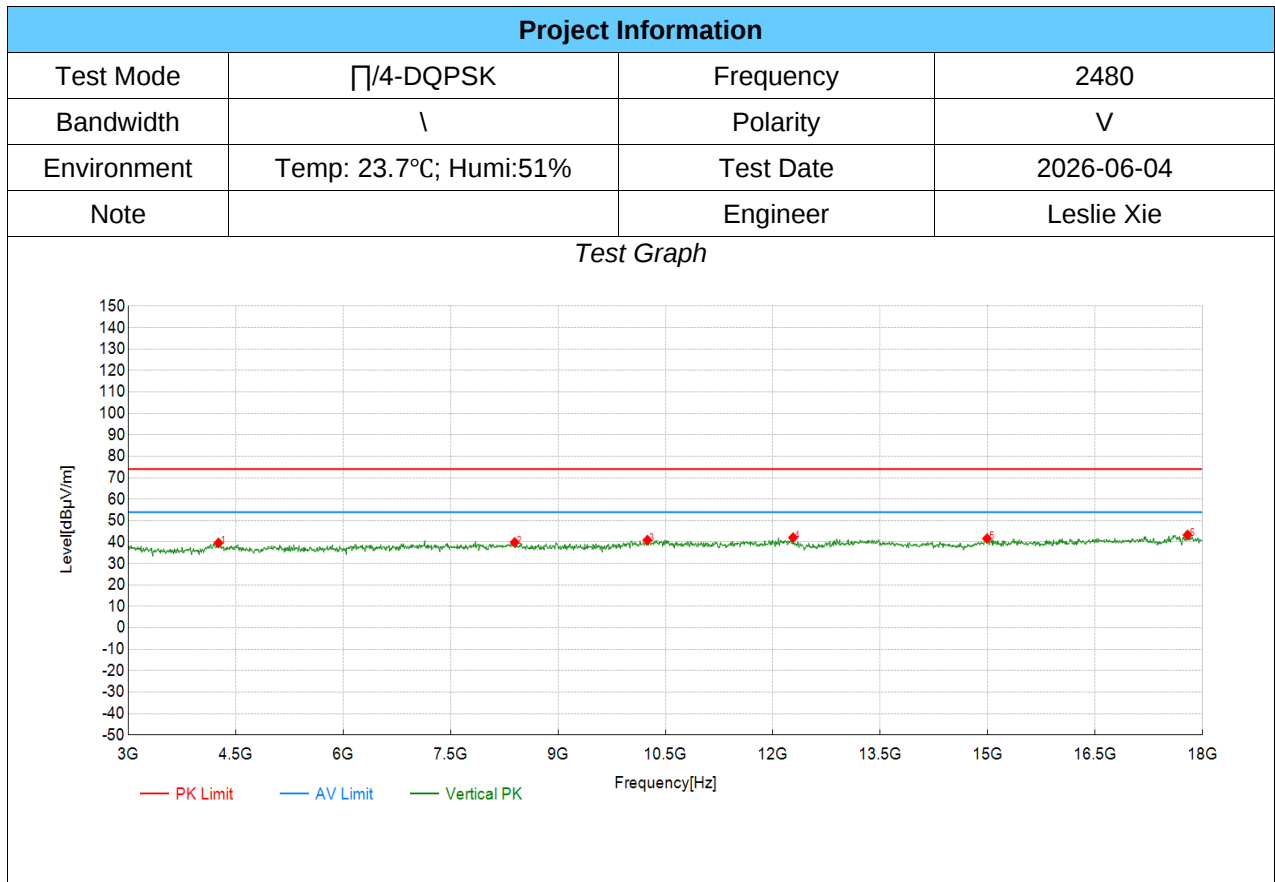


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4260.63	57.24	39.59	-17.65	74.00	34.41	PK	Vertical	PASS
2	8395.20	52.39	39.88	-12.51	74.00	34.12	PK	Vertical	PASS
3	10248.62	51.84	40.92	-10.92	74.00	33.08	PK	Vertical	PASS
4	12282.14	52.36	42.07	-10.29	74.00	31.93	PK	Vertical	PASS
5	14991.00	50.91	41.63	-9.28	74.00	32.37	PK	Vertical	PASS
6	17789.89	48.43	43.32	-5.11	74.00	30.68	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


8.7. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)-LEFT

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.7V

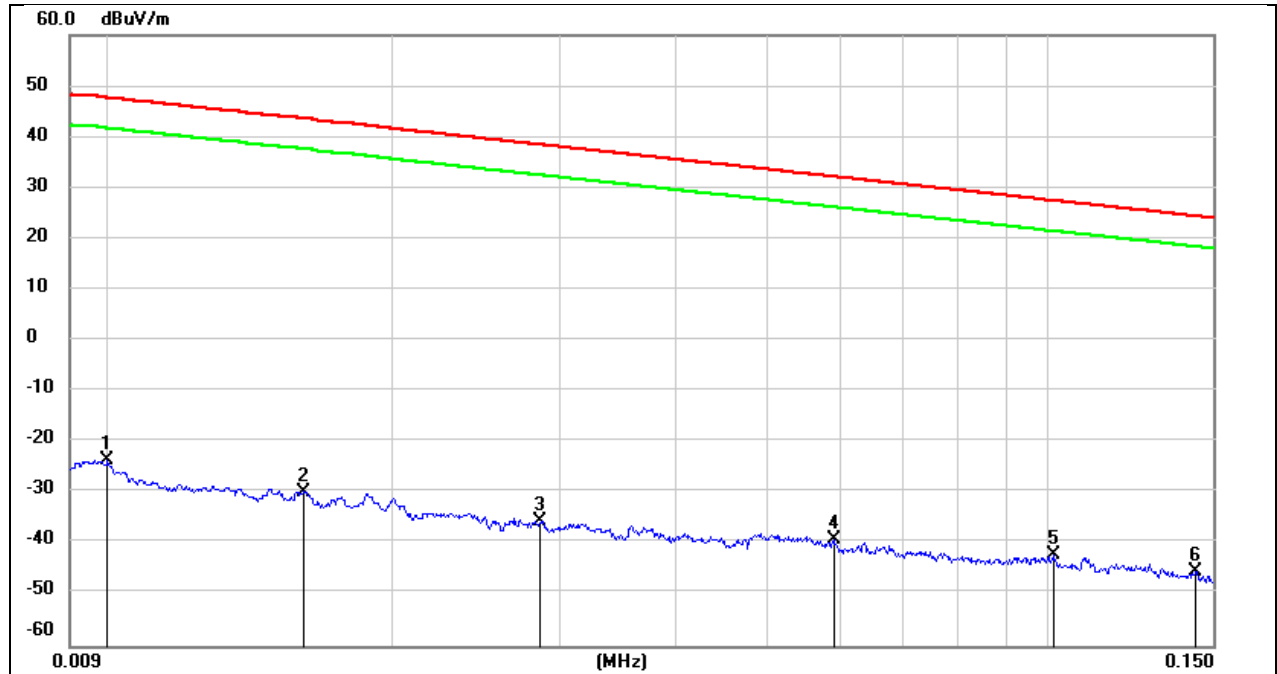


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	77.72	-101.40	-23.68	47.60	-71.28	peak
2	0.0160	71.41	-101.37	-29.96	43.52	-73.48	peak
3	0.0286	65.96	-101.38	-35.42	38.47	-73.89	peak
4	0.0589	62.31	-101.52	-39.21	32.20	-71.41	peak
5	0.1014	59.56	-101.79	-42.23	27.48	-69.71	peak
6	0.1440	56.32	-101.65	-45.33	24.43	-69.76	peak

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.7V

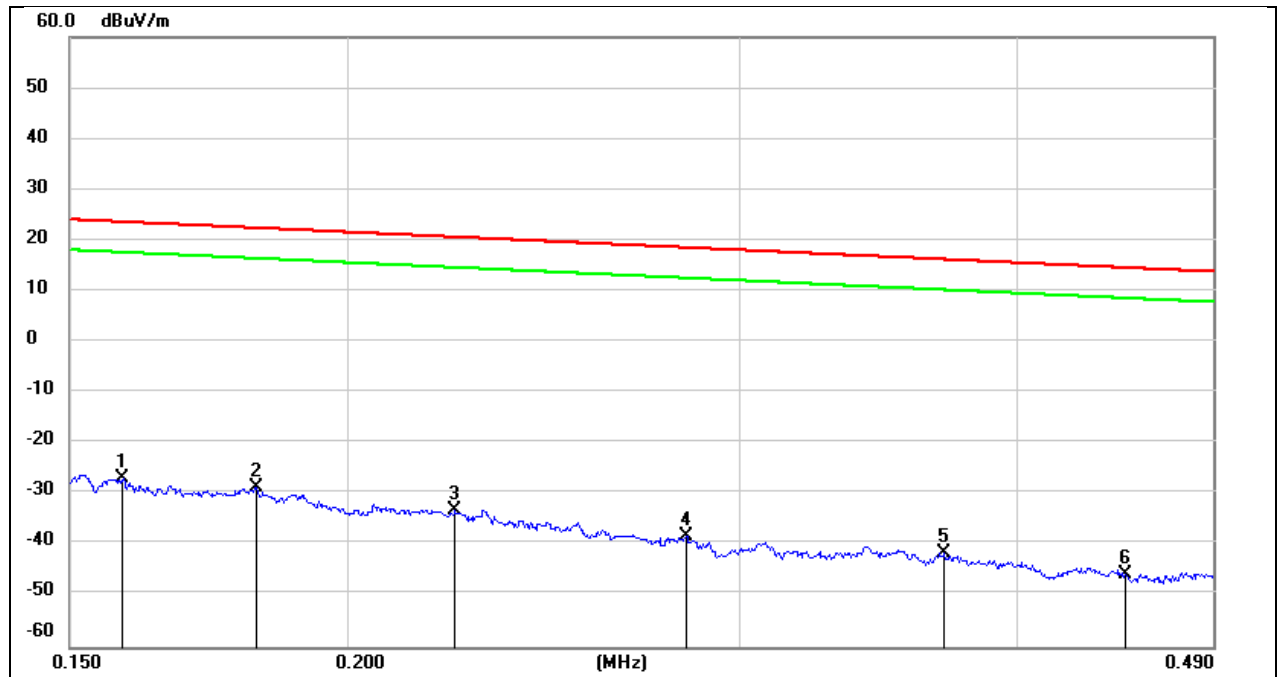

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1585	74.72	-101.65	-26.93	23.60	-50.53	peak
2	0.1819	72.99	-101.68	-28.69	22.41	-51.10	peak
3	0.2235	68.45	-101.75	-33.30	20.61	-53.91	peak
4	0.2837	63.72	-101.83	-38.11	18.54	-56.65	peak
5	0.3709	60.36	-101.93	-41.57	16.22	-57.79	peak
6	0.4475	56.18	-102.01	-45.83	14.59	-60.42	peak


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.7V

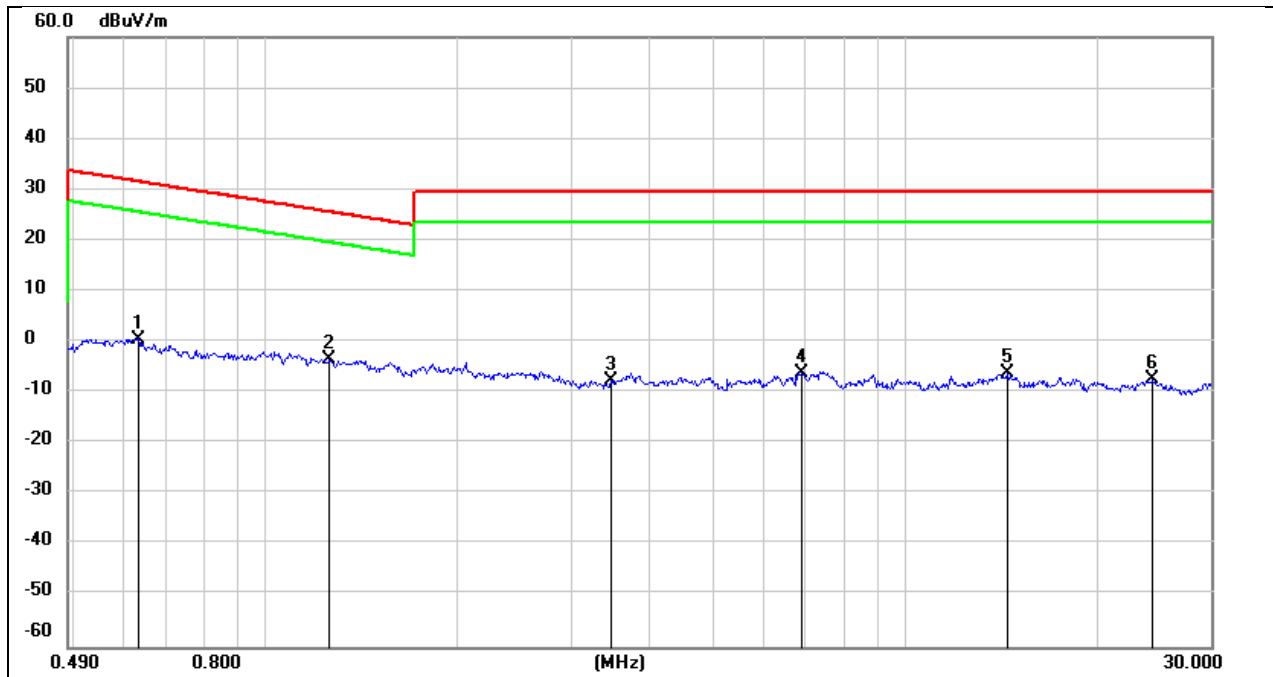

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.6320	62.69	-62.09	0.60	31.59	-30.99	peak
2	1.2573	58.75	-62.15	-3.40	25.62	-29.02	peak
3	3.4704	53.85	-61.46	-7.61	29.54	-37.15	peak
4	6.8936	55.09	-61.22	-6.13	29.54	-35.67	peak
5	14.4777	54.76	-60.99	-6.23	29.54	-35.77	peak
6	24.3636	53.12	-60.50	-7.38	29.54	-36.92	peak


8.8. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)-RIGHT

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.7V

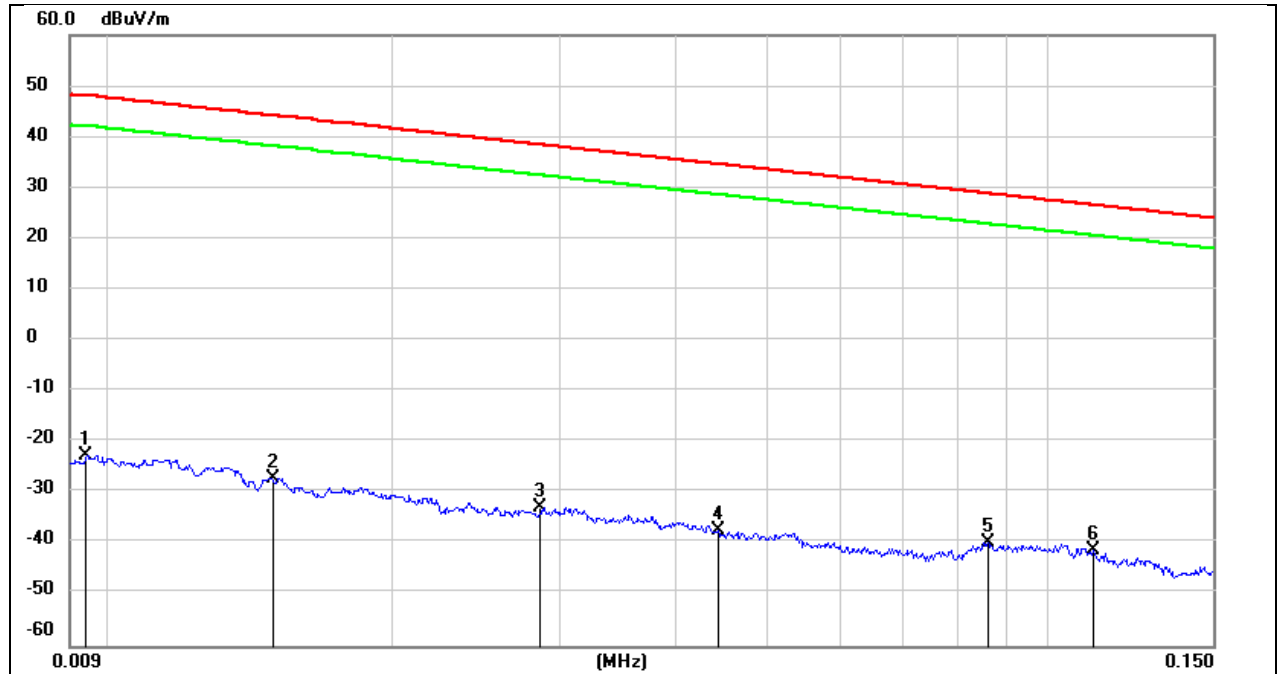


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0094	78.66	-101.35	-22.69	48.05	-74.19	-3.45	-70.74	peak
2	0.0149	74.37	-101.37	-27.00	44.14	-78.50	-7.36	-71.14	peak
3	0.0286	68.46	-101.38	-32.92	38.47	-84.42	-13.03	-71.39	peak
4	0.0444	64.04	-101.45	-37.41	34.65	-88.91	-16.85	-72.06	peak
5	0.0863	61.99	-101.69	-39.70	28.88	-91.20	-22.62	-68.58	peak
6	0.1116	60.39	-101.76	-41.37	26.65	-92.87	-24.85	-68.02	peak

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.7V

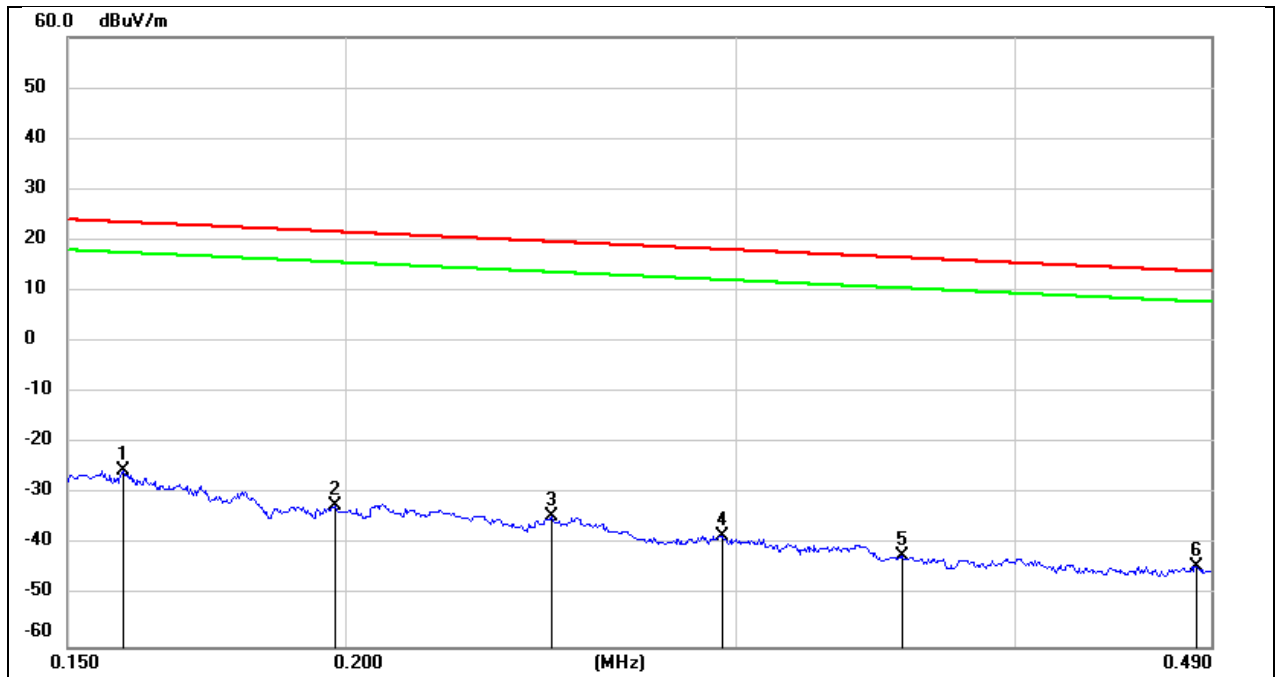

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.1590	76.32	-101.65	-25.33	23.57	-76.83	-27.93	-48.90	peak
2	0.1978	69.48	-101.72	-32.24	21.68	-83.74	-29.82	-53.92	peak
3	0.2474	67.44	-101.80	-34.36	19.73	-85.86	-31.77	-54.09	peak
4	0.2953	63.63	-101.85	-38.22	18.20	-89.72	-33.30	-56.42	peak
5	0.3558	59.69	-101.91	-42.22	16.58	-93.72	-34.92	-58.80	peak
6	0.4823	57.69	-102.04	-44.35	13.94	-95.85	-37.56	-58.29	peak


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.7V

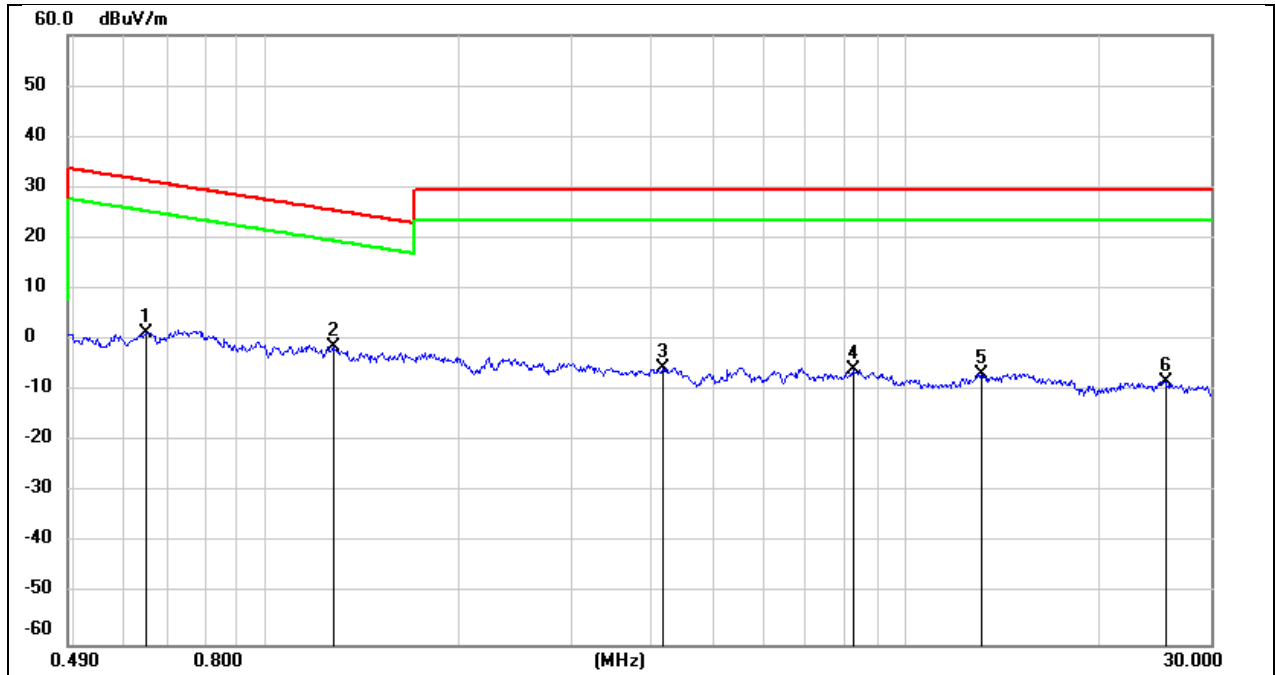

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.6481	63.57	-62.10	1.47	31.37	-50.03	-20.13	-29.90	peak
2	1.2721	60.74	-62.15	-1.41	25.52	-52.91	-25.98	-26.93	peak
3	4.1801	55.82	-61.35	-5.53	29.54	-57.03	-21.96	-35.07	peak
4	8.2804	55.18	-61.03	-5.85	29.54	-57.35	-21.96	-35.39	peak
5	13.1498	54.22	-60.94	-6.72	29.54	-58.22	-21.96	-36.26	peak
6	25.4847	52.22	-60.40	-8.18	29.54	-59.68	-21.96	-37.72	peak


8.9. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)-LEFT

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.7V

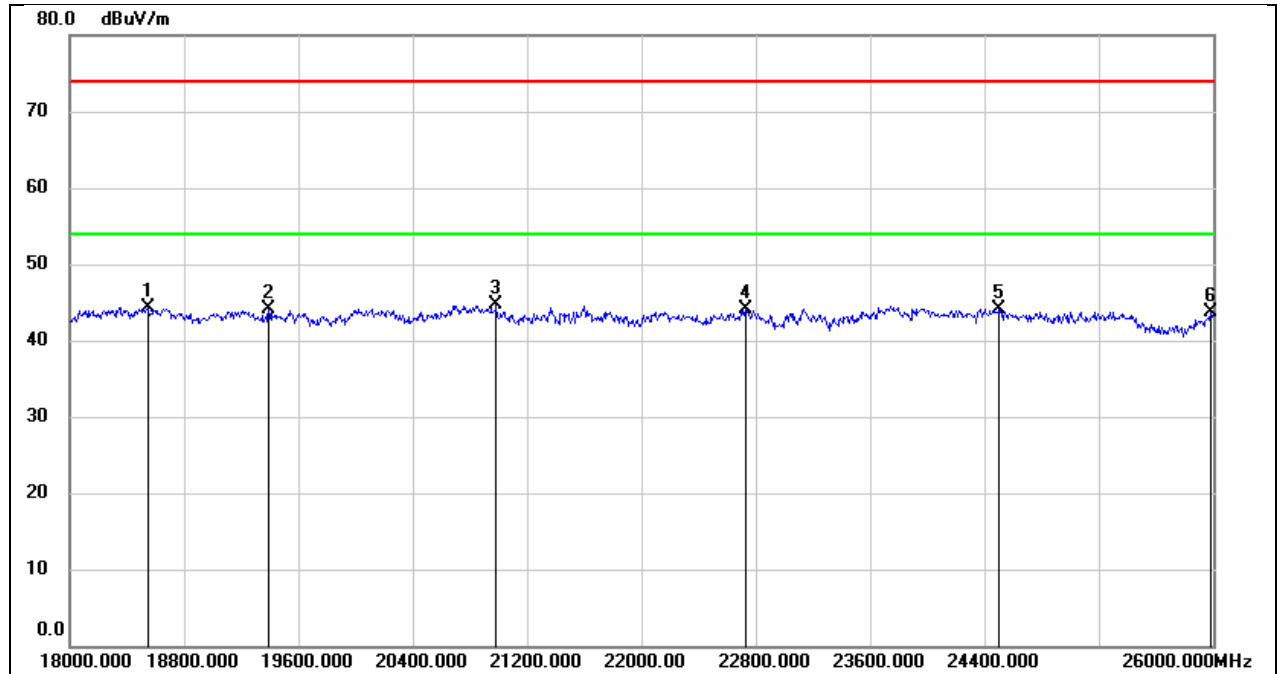

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18544.000	49.52	-5.28	44.24	74.00	-29.76	peak
2	19392.000	49.62	-5.57	44.05	74.00	-29.95	peak
3	20984.000	49.56	-4.89	44.67	74.00	-29.33	peak
4	22728.000	47.77	-3.71	44.06	74.00	-29.94	peak
5	24504.000	46.37	-2.32	44.05	74.00	-29.95	peak
6	25984.000	44.65	-1.03	43.62	74.00	-30.38	peak


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.7V

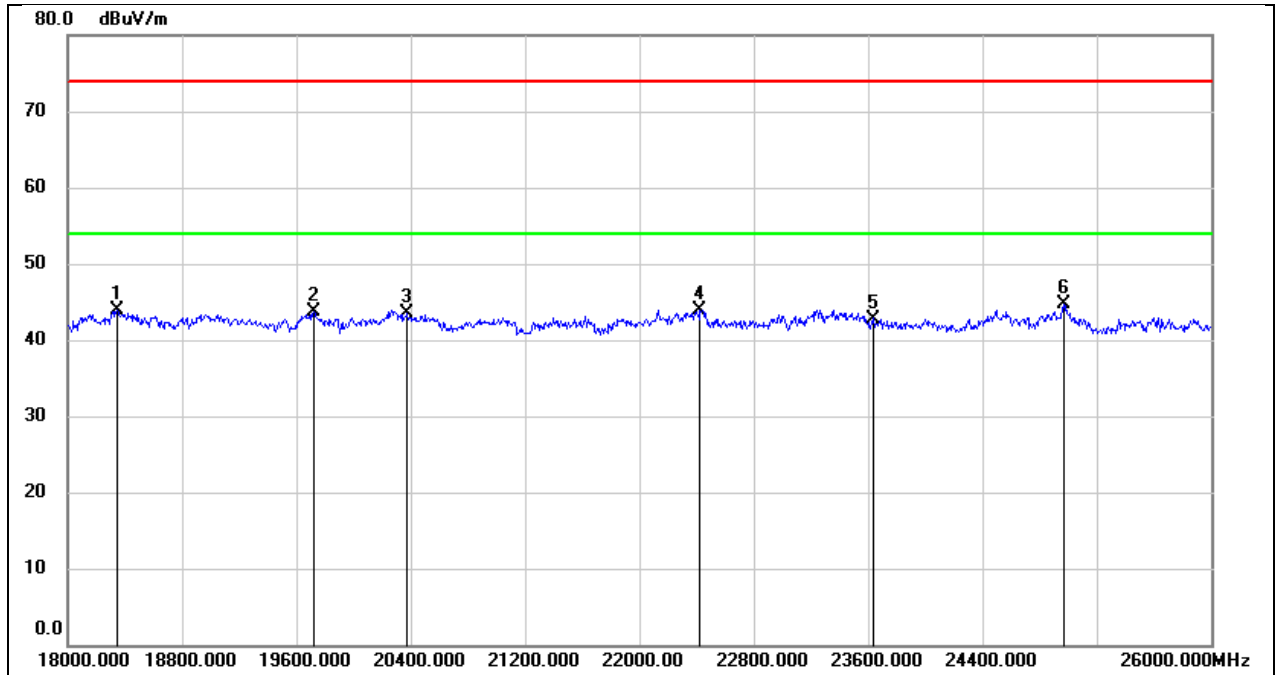

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18344.000	49.34	-5.44	43.90	74.00	-30.10	peak
2	19720.000	48.92	-5.28	43.64	74.00	-30.36	peak
3	20376.000	48.91	-5.48	43.43	74.00	-30.57	peak
4	22424.000	47.91	-3.99	43.92	74.00	-30.08	peak
5	23640.000	45.97	-3.17	42.80	74.00	-31.20	peak
6	24968.000	46.76	-2.14	44.62	74.00	-29.38	peak


8.10. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)-RIGHT

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.7V

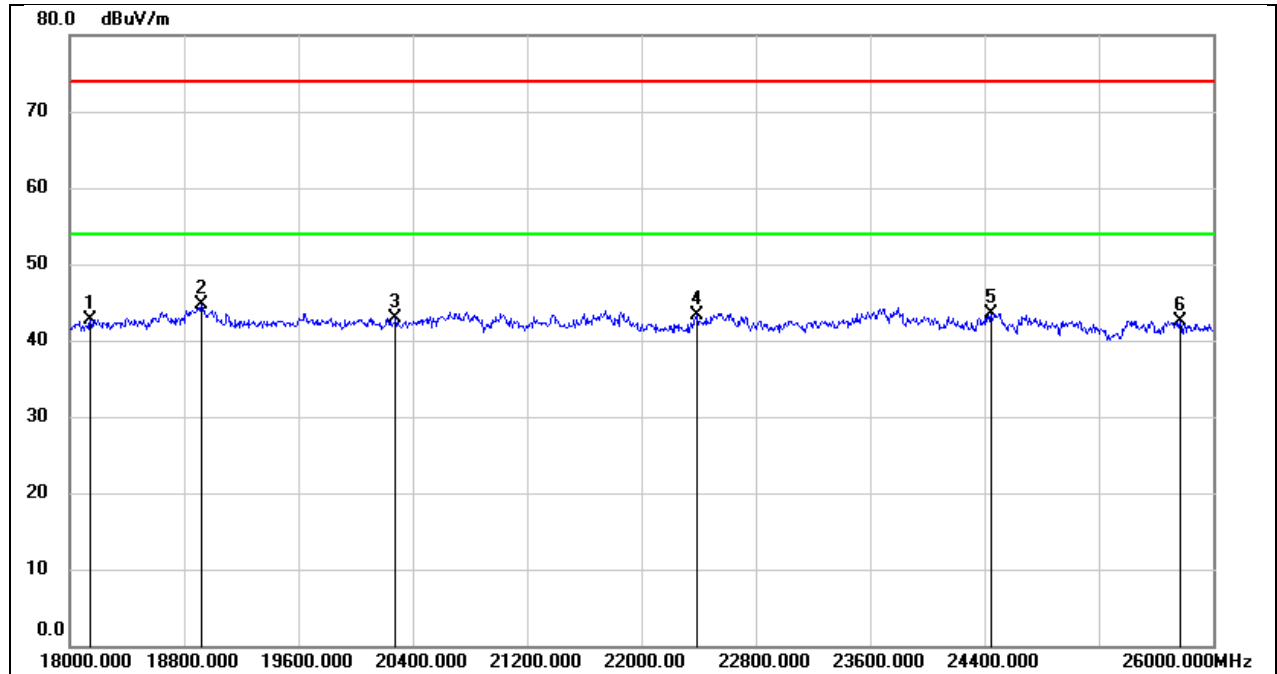

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	48.27	-5.48	42.79	74.00	-31.21	peak
2	18920.000	49.93	-5.29	44.64	74.00	-29.36	peak
3	20280.000	48.47	-5.58	42.89	74.00	-31.11	peak
4	22392.000	47.33	-4.02	43.31	74.00	-30.69	peak
5	24448.000	45.84	-2.42	43.42	74.00	-30.58	peak
6	25768.000	43.14	-0.64	42.50	74.00	-31.50	peak


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.7V

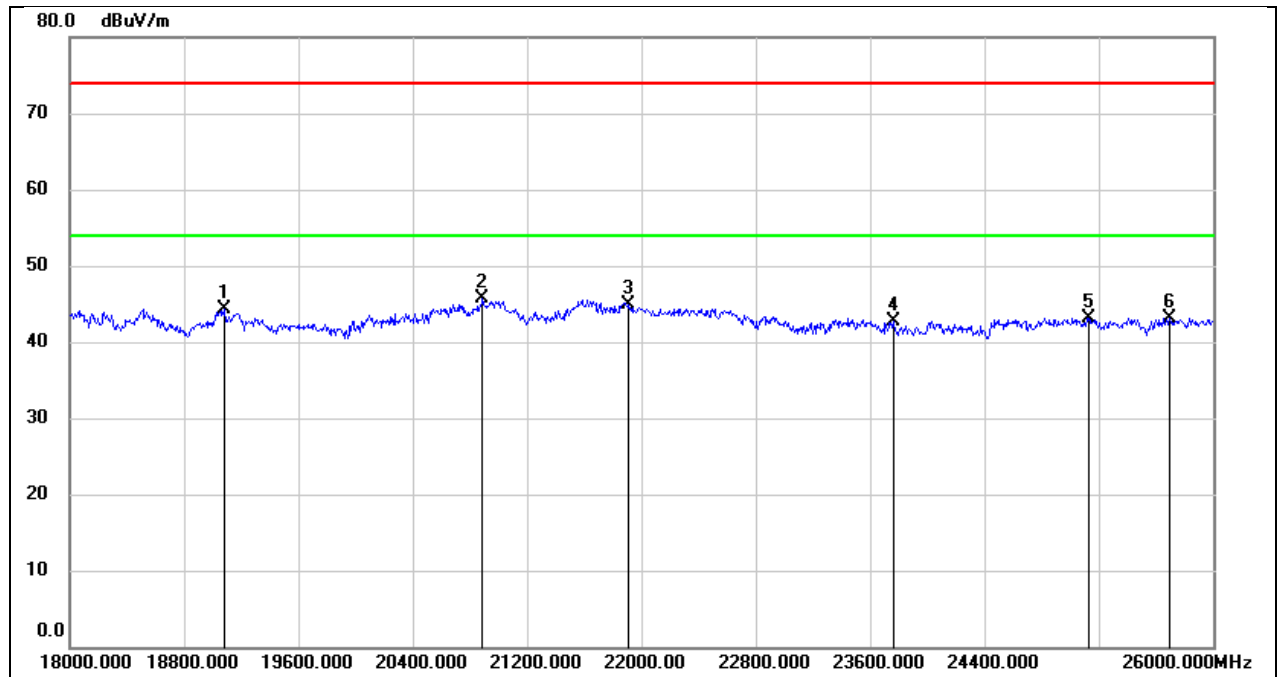

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19080.000	49.60	-5.34	44.26	74.00	-29.74	peak
2	20888.000	50.77	-4.98	45.79	74.00	-28.21	peak
3	21904.000	49.32	-4.42	44.90	74.00	-29.10	peak
4	23760.000	45.90	-3.18	42.72	74.00	-31.28	peak
5	25128.000	44.92	-1.89	43.03	74.00	-30.97	peak
6	25696.000	43.94	-0.86	43.08	74.00	-30.92	peak


8.11. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)-LEFT

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC3.7V

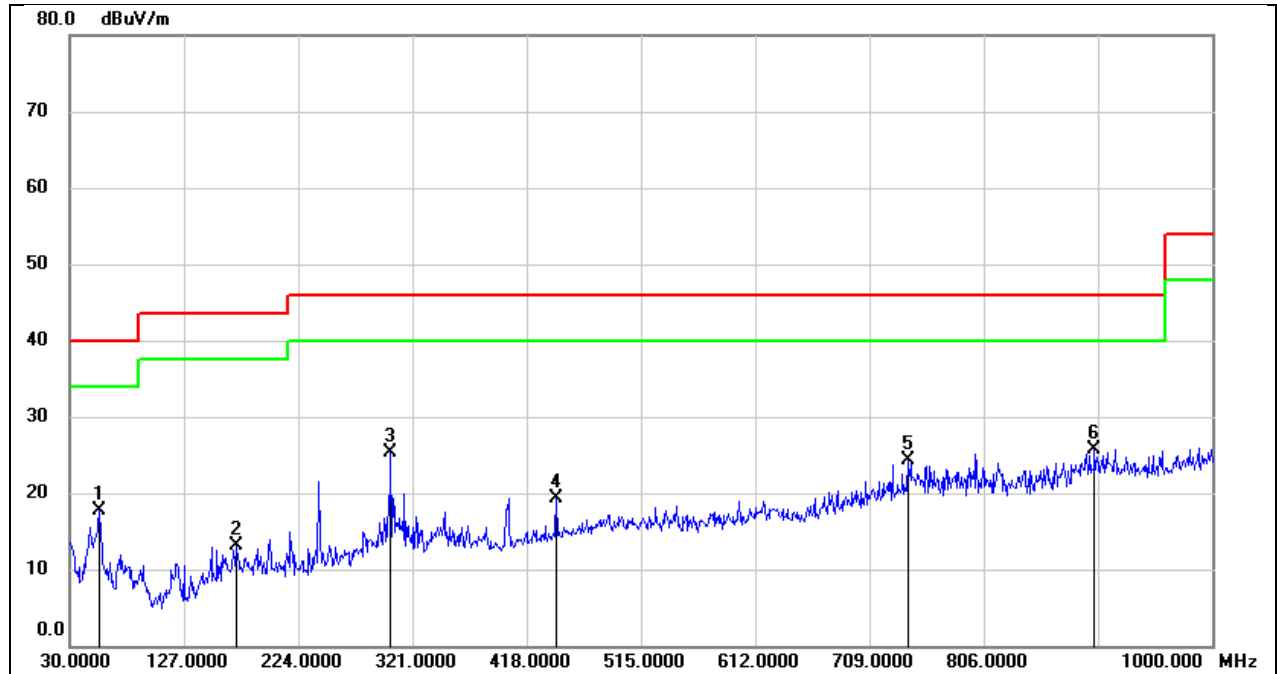

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	55.2200	33.18	-15.55	17.63	40.00	-22.37	peak
2	171.6200	24.77	-11.75	13.02	43.50	-30.48	peak
3	302.5700	36.28	-10.96	25.32	46.00	-20.68	peak
4	443.2200	27.27	-7.97	19.30	46.00	-26.70	peak
5	741.9800	26.76	-2.38	24.38	46.00	-21.62	peak
6	900.0900	26.78	-1.04	25.74	46.00	-20.26	peak


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC3.7V

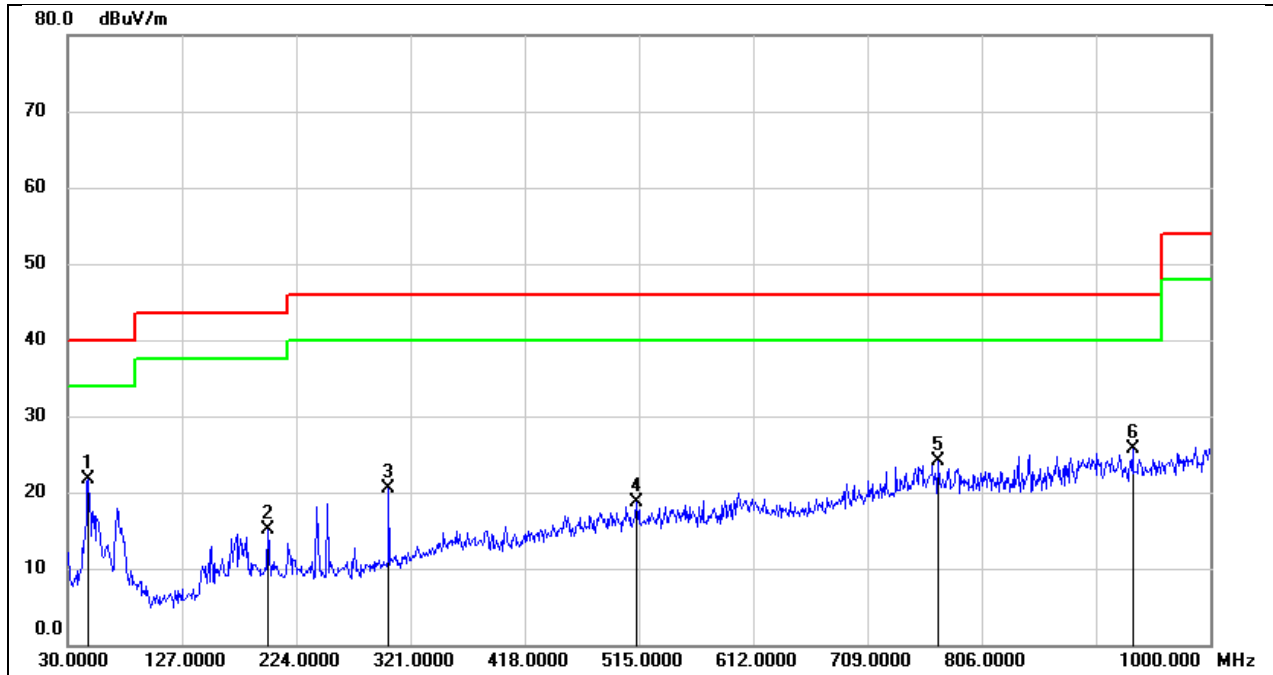

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	47.4600	36.84	-15.21	21.63	40.00	-18.37	peak
2	199.7500	26.98	-11.95	15.03	43.50	-28.47	peak
3	302.5700	31.43	-10.96	20.47	46.00	-25.53	peak
4	513.0600	25.26	-6.53	18.73	46.00	-27.27	peak
5	769.1400	26.24	-2.17	24.07	46.00	-21.93	peak
6	934.0400	26.99	-1.27	25.72	46.00	-20.28	peak


8.12. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)-RIGHT

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC3.7V

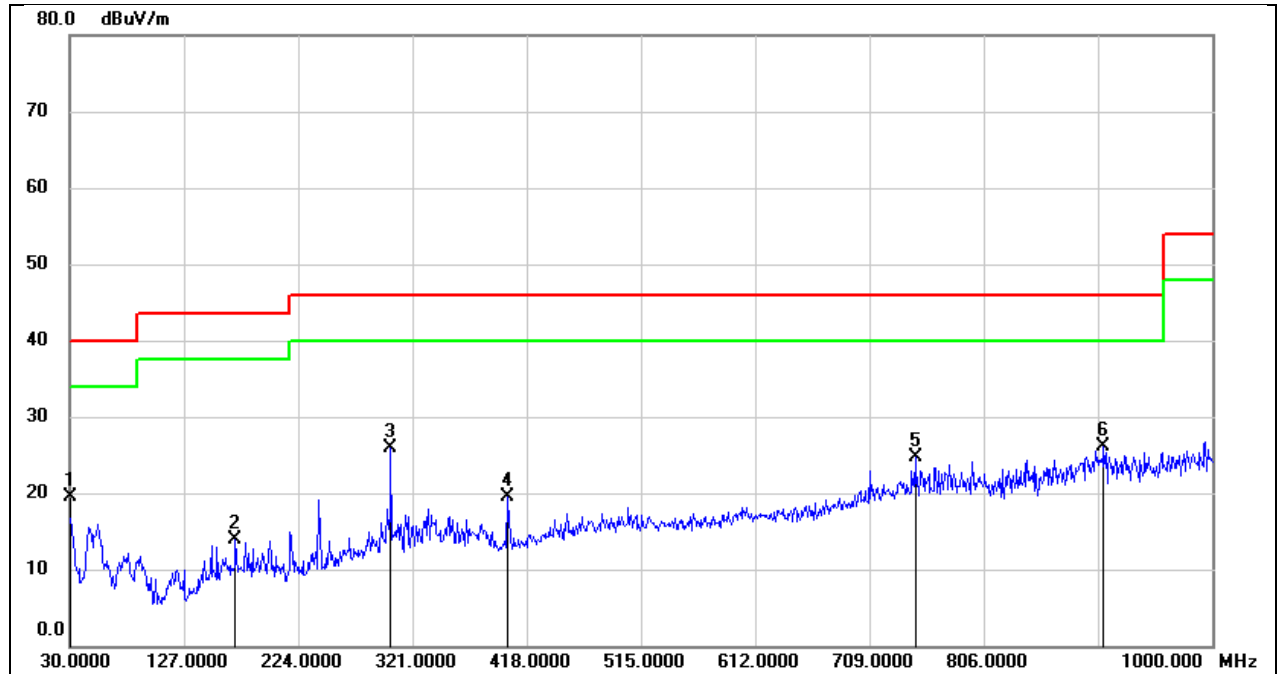

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	34.01	-14.52	19.49	40.00	-20.51	peak
2	170.6500	25.70	-11.75	13.95	43.50	-29.55	peak
3	302.5700	36.84	-10.96	25.88	46.00	-20.12	peak
4	401.5100	28.84	-9.31	19.53	46.00	-26.47	peak
5	747.8000	26.96	-2.17	24.79	46.00	-21.21	peak
6	907.8500	27.25	-1.06	26.19	46.00	-19.81	peak

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC3.7V

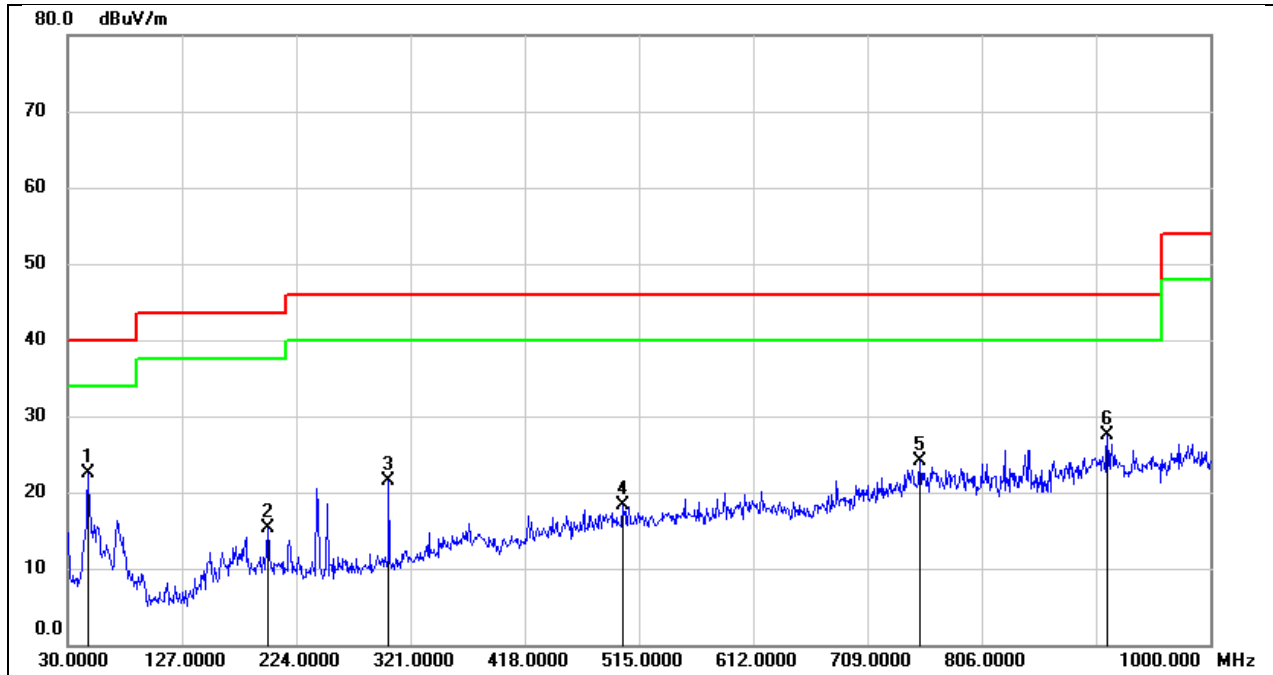

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	47.4600	37.80	-15.21	22.59	40.00	-17.41	peak
2	199.7500	27.25	-11.95	15.30	43.50	-28.20	peak
3	302.5700	32.40	-10.96	21.44	46.00	-24.56	peak
4	501.4200	24.94	-6.55	18.39	46.00	-27.61	peak
5	753.6200	26.30	-2.11	24.19	46.00	-21.81	peak
6	912.7000	28.59	-1.08	27.51	46.00	-18.49	peak

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass


10. TEST DATA

10.1. APPENDIX A: 20DB EMISSION BANDWIDTH

10.1.1. Test Result-Left

Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant L	2402	1.04	2401.47	2402.51	PASS
		2441	1.05	2440.47	2441.52	PASS
		2480	1.03	2479.49	2480.52	PASS
2DH5	Ant L	2402	1.28	2401.36	2402.64	PASS
		2441	1.24	2440.36	2441.61	PASS
		2480	1.23	2479.37	2480.60	PASS

10.1.2. Test Graphs-Left

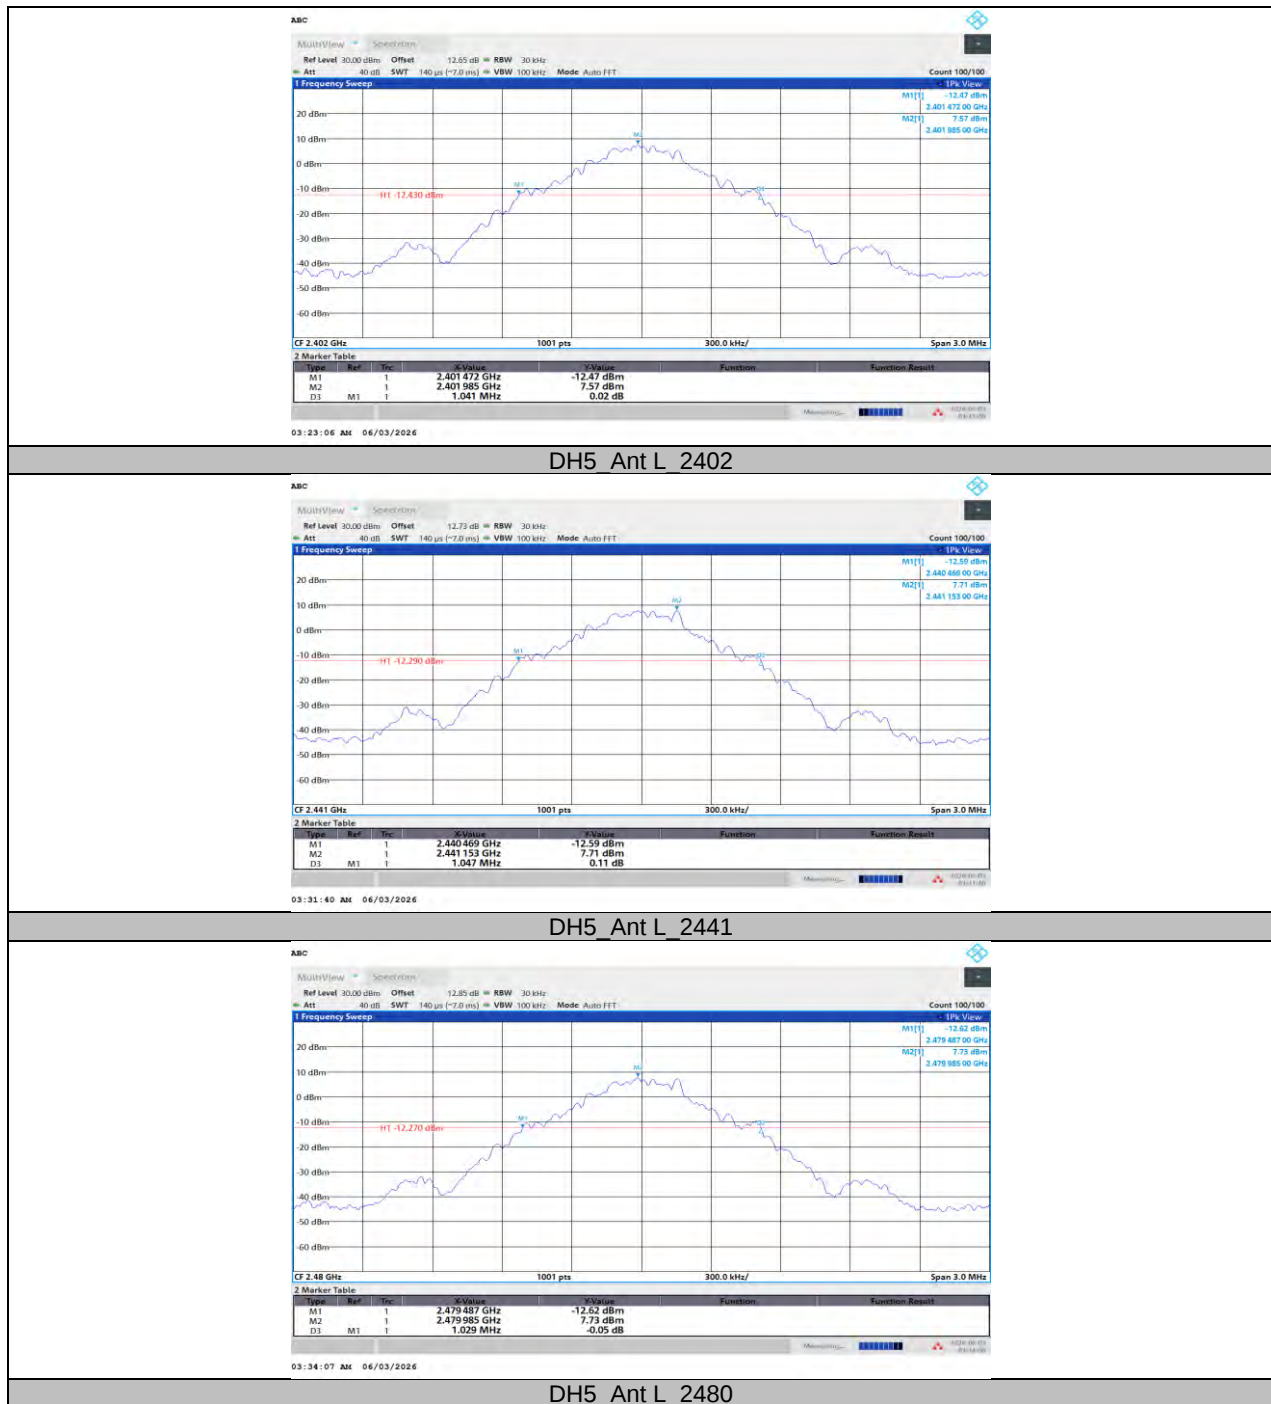



2DH5_Ant L_2402



2DH5_Ant L_2441



2DH5_Ant L_2480

10.1.3. Test Result-Right


Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant R	2402	1.02	2401.50	2402.52	PASS
		2441	1.03	2440.49	2441.52	PASS
		2480	1.03	2479.49	2480.52	PASS
2DH5	Ant R	2402	1.23	2401.38	2402.60	PASS
		2441	1.24	2440.37	2441.61	PASS
		2480	1.28	2479.37	2480.65	PASS

10.1.4. Test Graphs-Right






2DH5_Ant R_2402

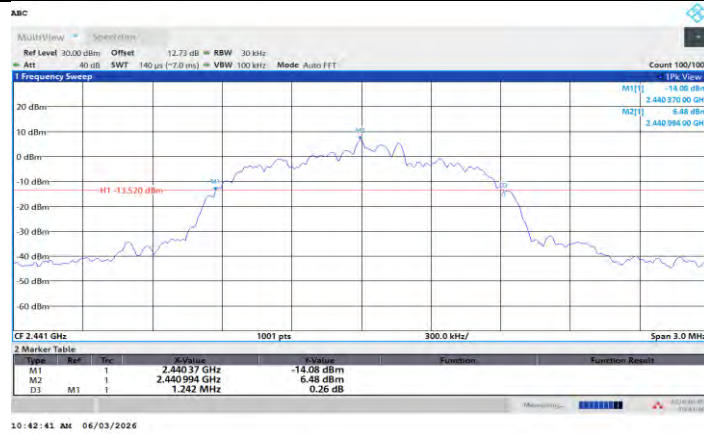

2DH5_Ant R_2441

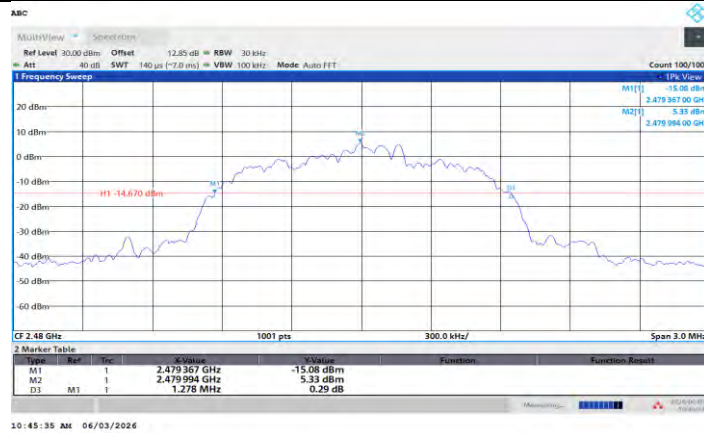


2DH5_Ant R_2480

10.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH**10.2.1. Test Result-Left**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant L	2402	0.90521	2401.5412	2402.4464	PASS
		2441	0.91081	2440.5461	2441.4569	PASS
		2480	0.90883	2479.5384	2480.4472	PASS
2DH5	Ant L	2402	1.1408	2401.4182	2402.5590	PASS
		2441	1.1464	2440.4144	2441.5608	PASS
		2480	1.1426	2479.4168	2480.5594	PASS

10.2.2. Test Graphs-Left

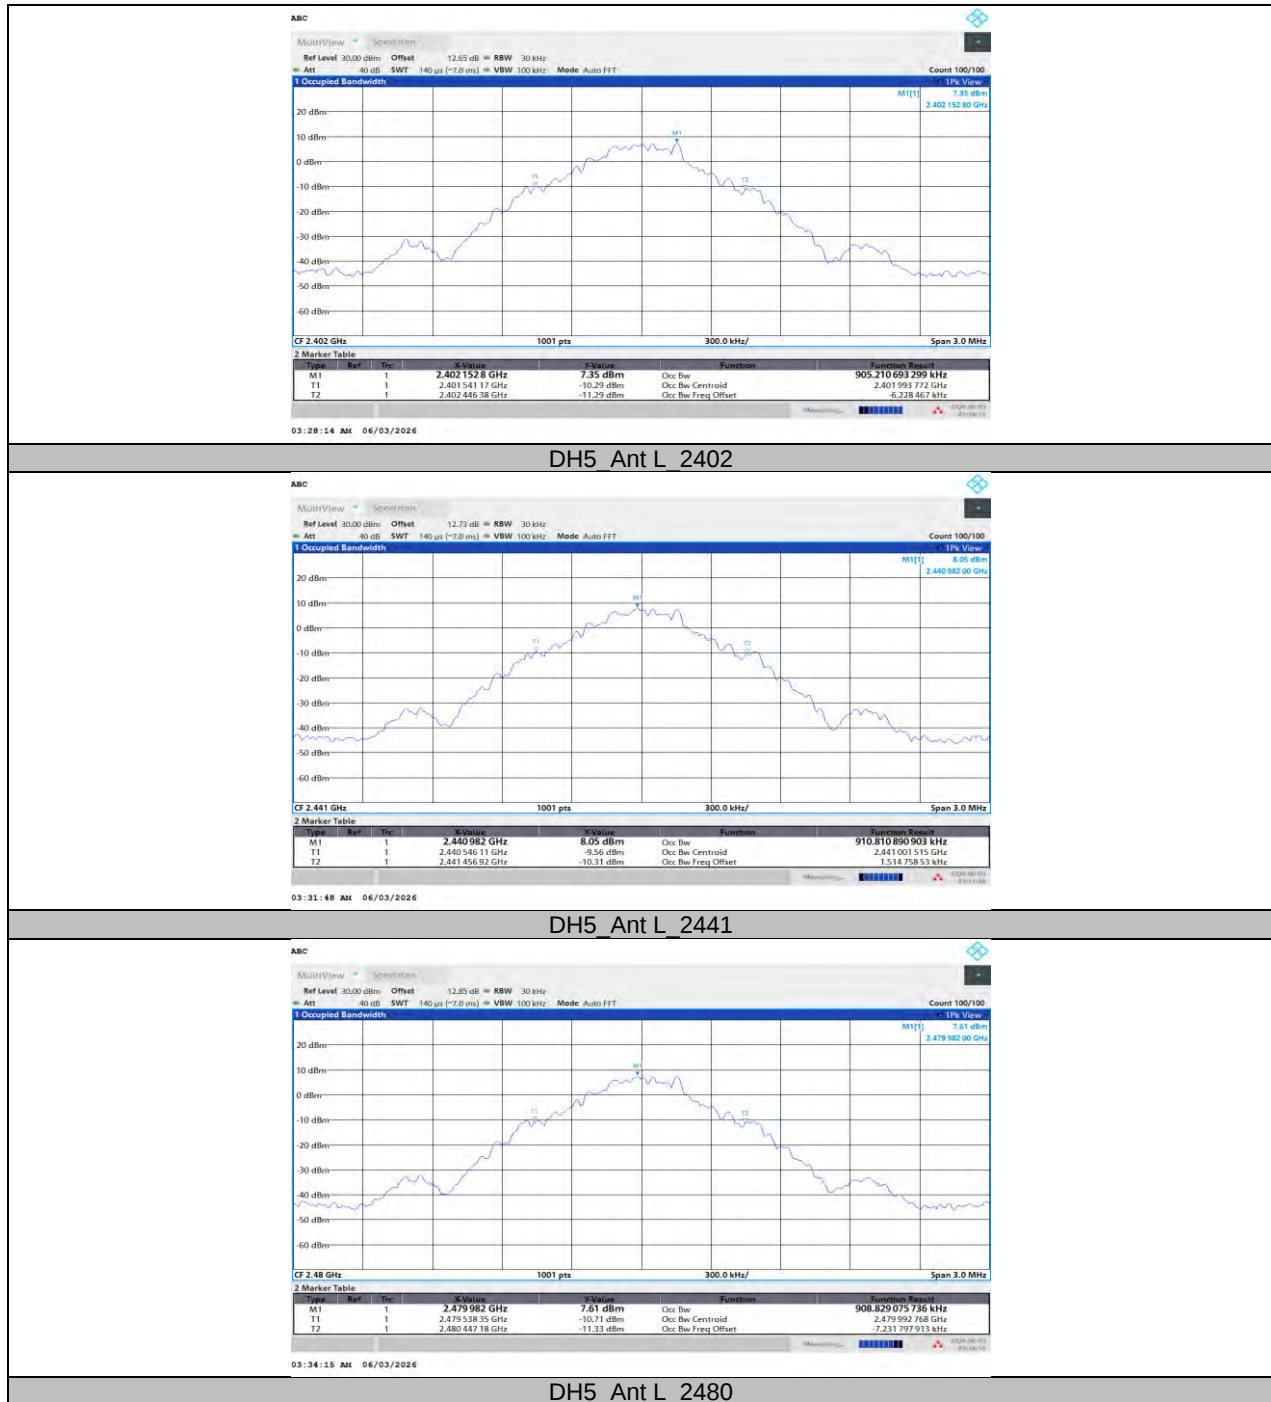



2DH5_Ant L_2402



2DH5_Ant L_2441




2DH5_Ant L_2480

10.2.3. Test Result-Right

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant R	2402	0.91564	2401.5444	2402.4600	PASS
		2441	0.90823	2440.5527	2441.4610	PASS
		2480	0.89322	2479.5497	2480.4429	PASS
2DH5	Ant R	2402	1.1375	2401.4251	2402.5625	PASS
		2441	1.1393	2440.4249	2441.5642	PASS
		2480	1.1458	2479.4206	2480.5664	PASS

10.2.4. Test Graphs-Right

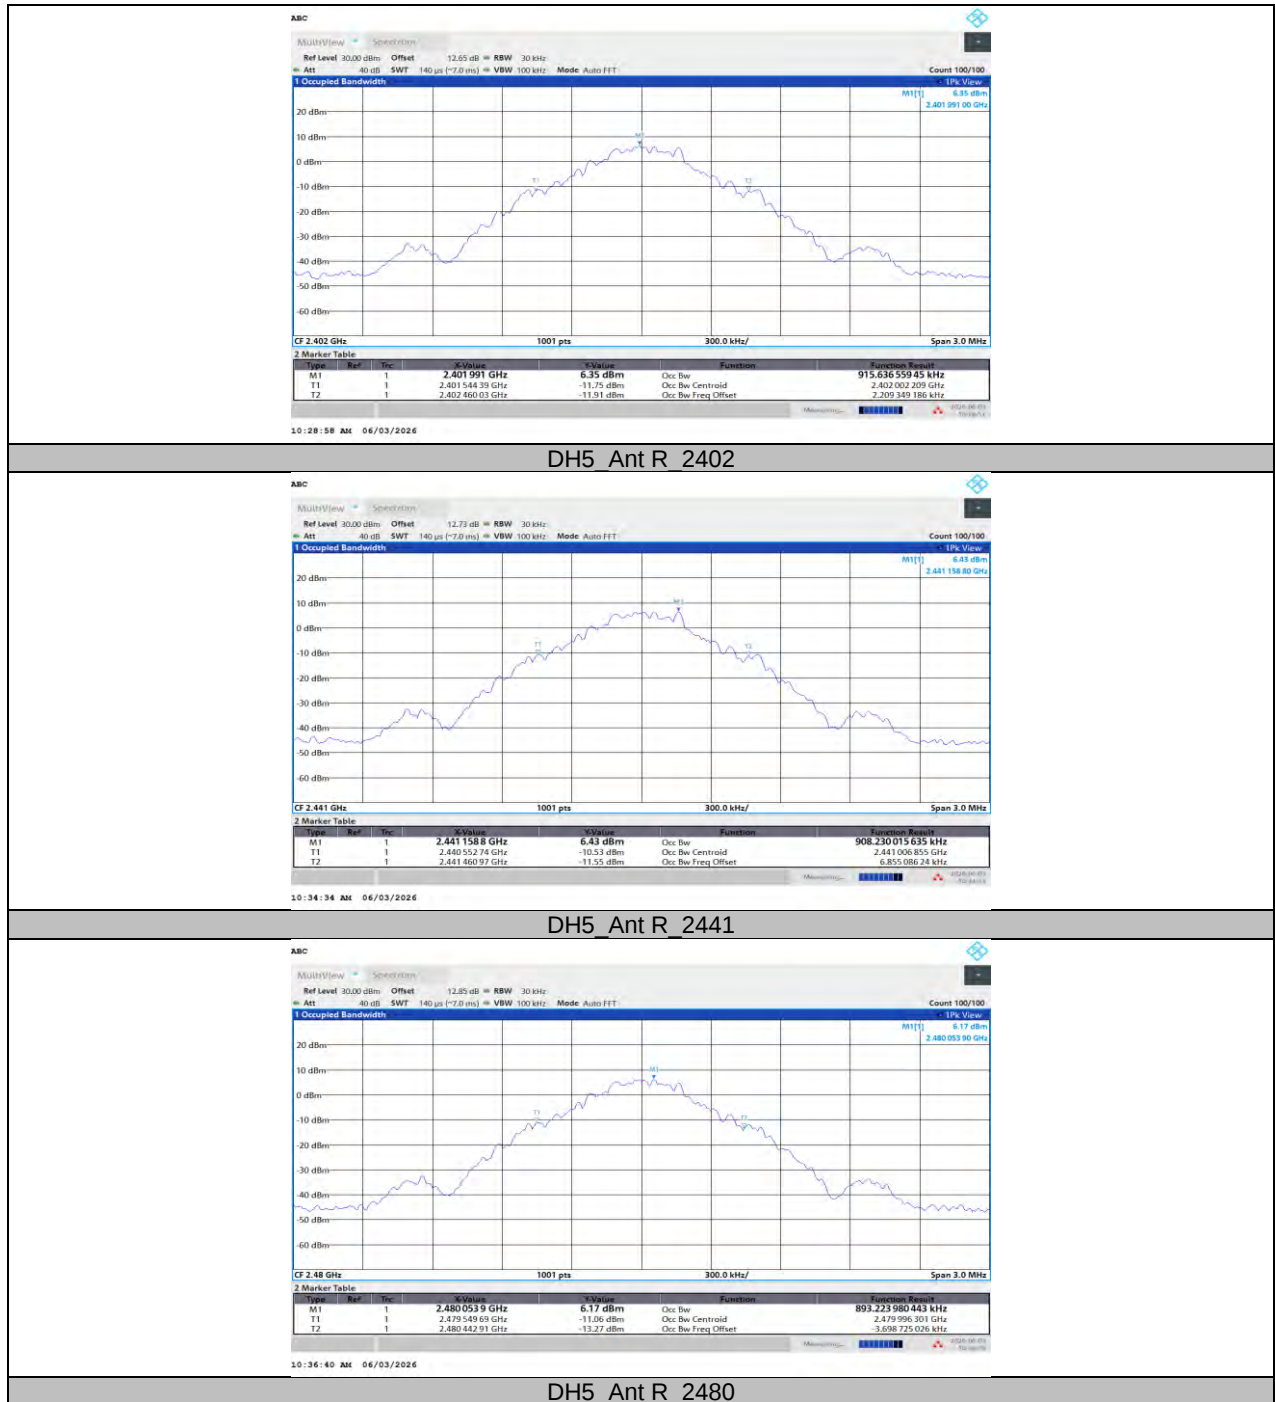



2DH5_Ant R_2402



2DH5_Ant R_2441



2DH5_Ant R_2480

10.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER**10.3.1. Test Result-Left**

Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant L	2402	10.39	≤30.00	PASS
		2441	10.67	≤30.00	PASS
		2480	10.14	≤30.00	PASS
2DH5	Ant L	2402	10.43	≤21	PASS
		2441	10.69	≤21	PASS
		2480	10.14	≤21	PASS

10.3.2. Test Result-Right


Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant R	2402	9.30	≤30	PASS
		2441	9.80	≤30	PASS
		2480	9.50	≤30	PASS
2DH5	Ant R	2402	9.25	≤21	PASS
		2441	9.78	≤21	PASS
		2480	9.45	≤21	PASS

10.4. APPENDIX D: CARRIER FREQUENCY SEPARATION

10.4.1. Test Result-Left

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant L	Hop	1.008	≥ 0.700	PASS
2DH5	Ant L	Hop	1.012	≥ 0.853	PASS


10.4.2. Test Graphs-Left

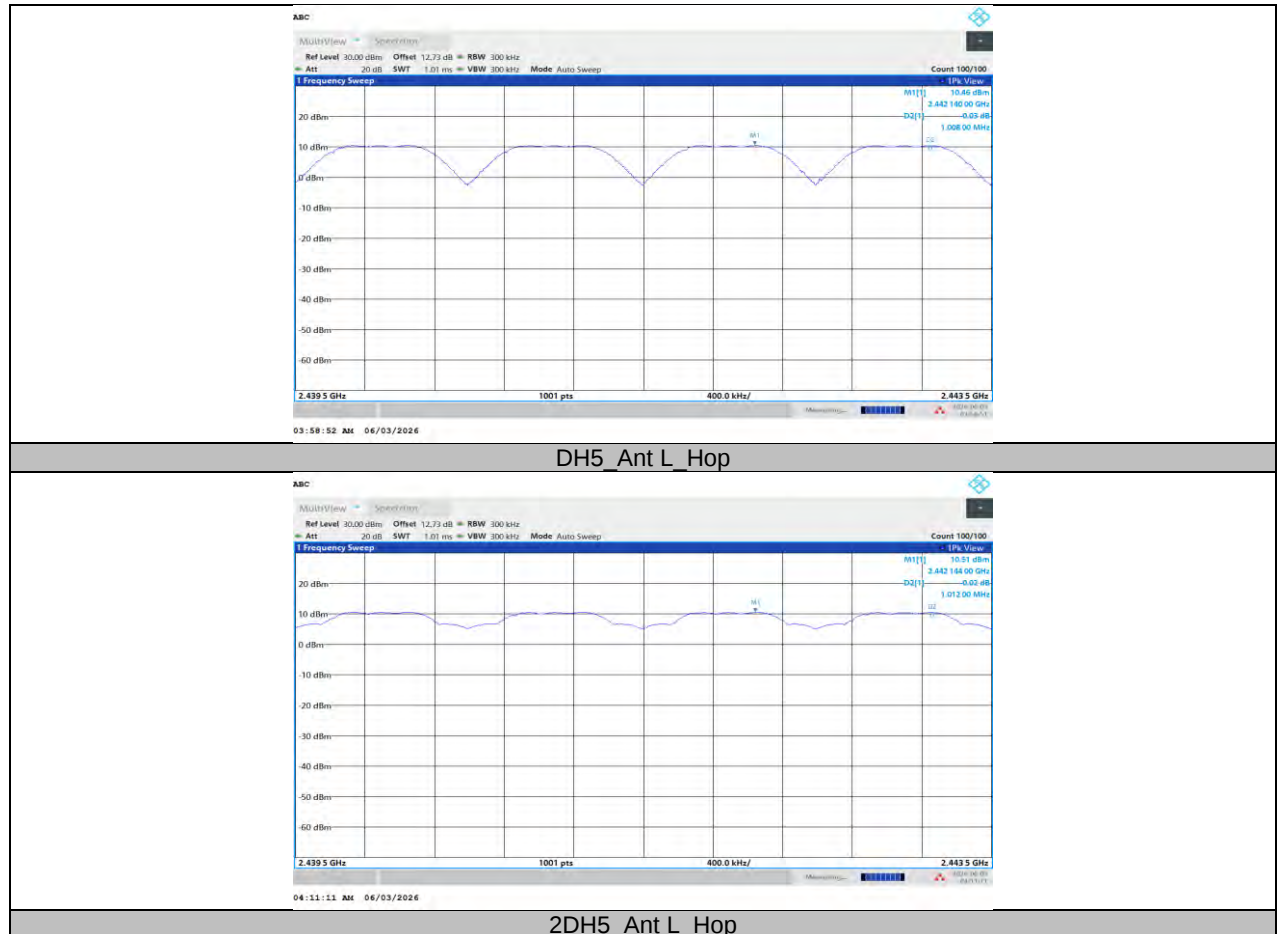

10.4.3. Test Result-Right

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant R	Hop	1.028	≥ 0.687	PASS
2DH5	Ant R	Hop	1.012	≥ 0.853	PASS

10.4.4. Test Graphs-Right

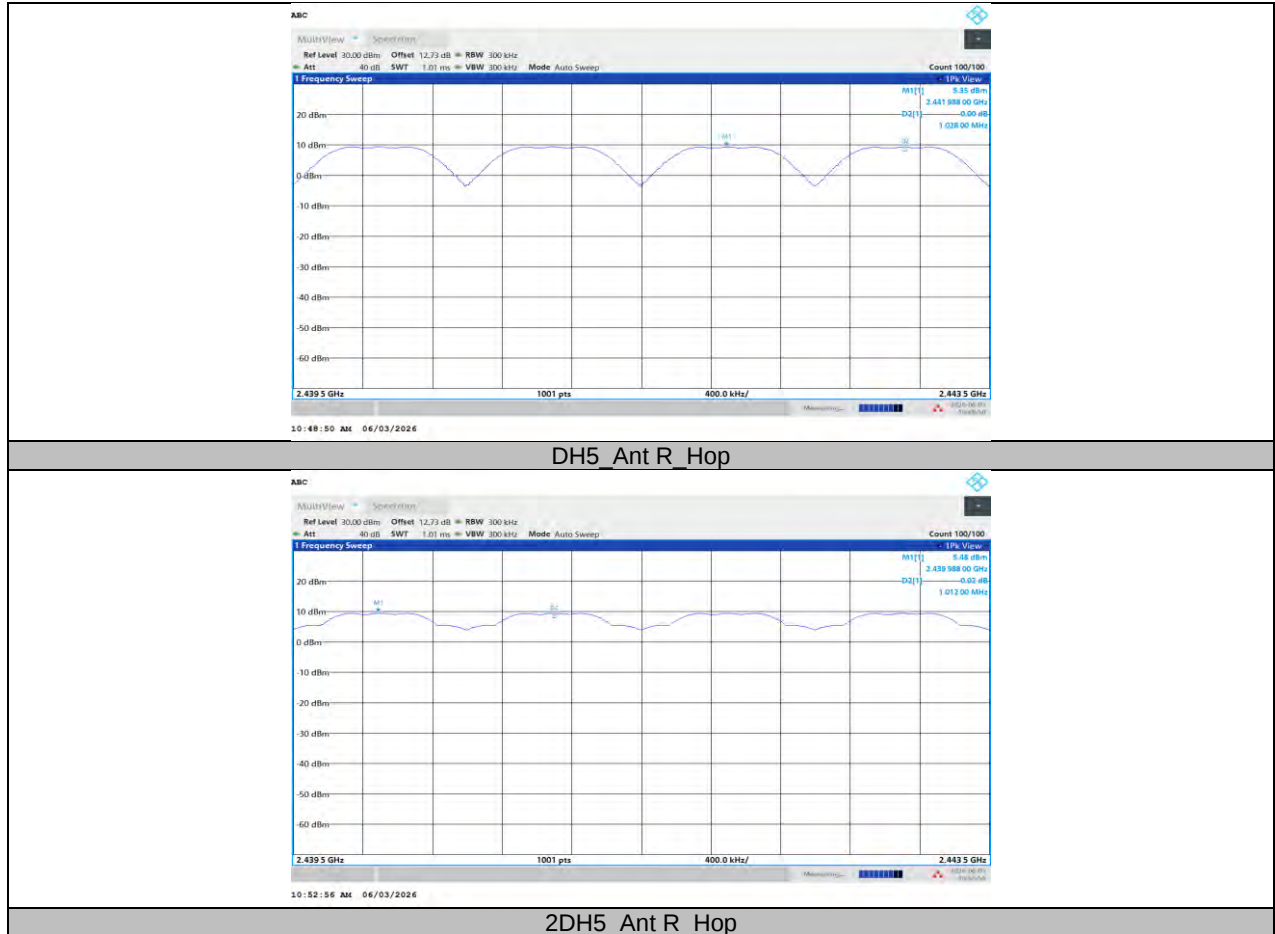


10.5. APPENDIX E: TIME OF OCCUPANCY


10.5.1. Test Result-Left

FHSS Mode						
Test Mode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant L	Hop	0.378	0.121	≤0.4	PASS
DH3	Ant L	Hop	1.634	0.261	≤0.4	PASS
DH5	Ant L	Hop	2.88	0.307	≤0.4	PASS
2DH1	Ant L	Hop	0.388	0.124	≤0.4	PASS
2DH3	Ant L	Hop	1.639	0.262	≤0.4	PASS
2DH5	Ant L	Hop	2.888	0.308	≤0.4	PASS


AFHSS Mode						
Test Mode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant L	Hop	0.378	0.060	≤0.4	PASS
DH3	Ant L	Hop	1.634	0.131	≤0.4	PASS
DH5	Ant L	Hop	2.88	0.154	≤0.4	PASS
2DH1	Ant L	Hop	0.388	0.062	≤0.4	PASS
2DH3	Ant L	Hop	1.639	0.131	≤0.4	PASS
2DH5	Ant L	Hop	2.888	0.154	≤0.4	PASS

10.5.2. Test Graphs-Left

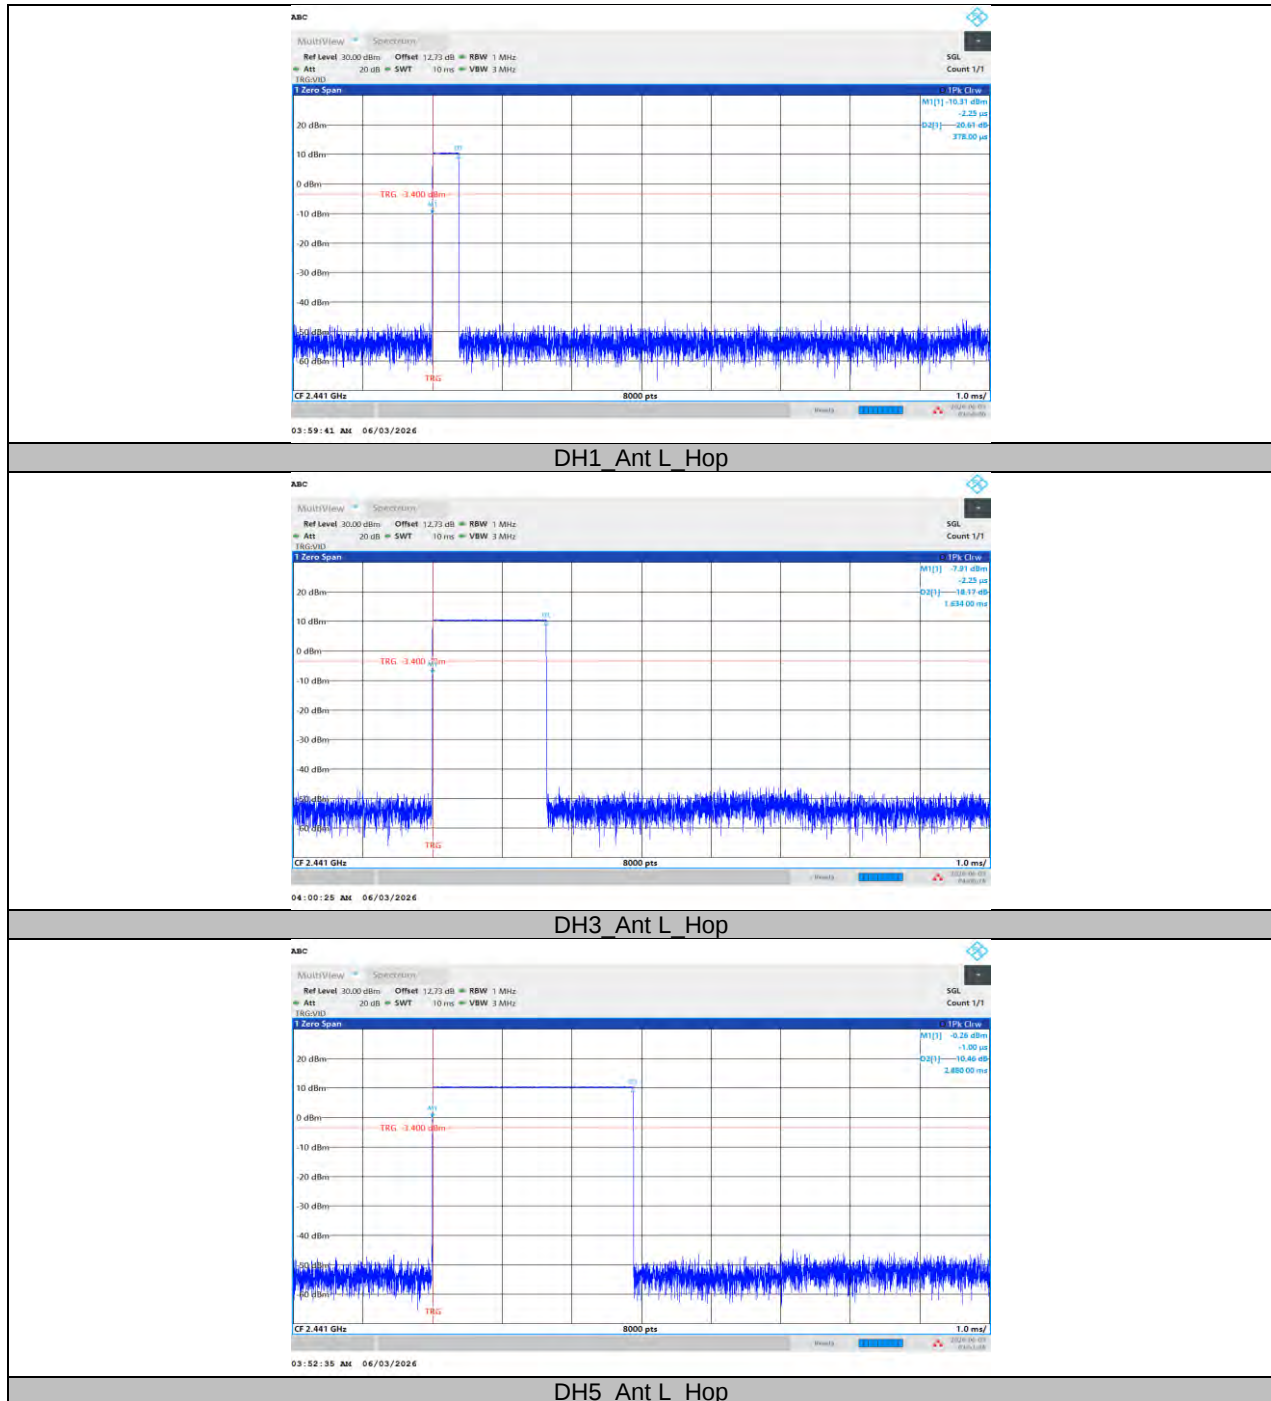


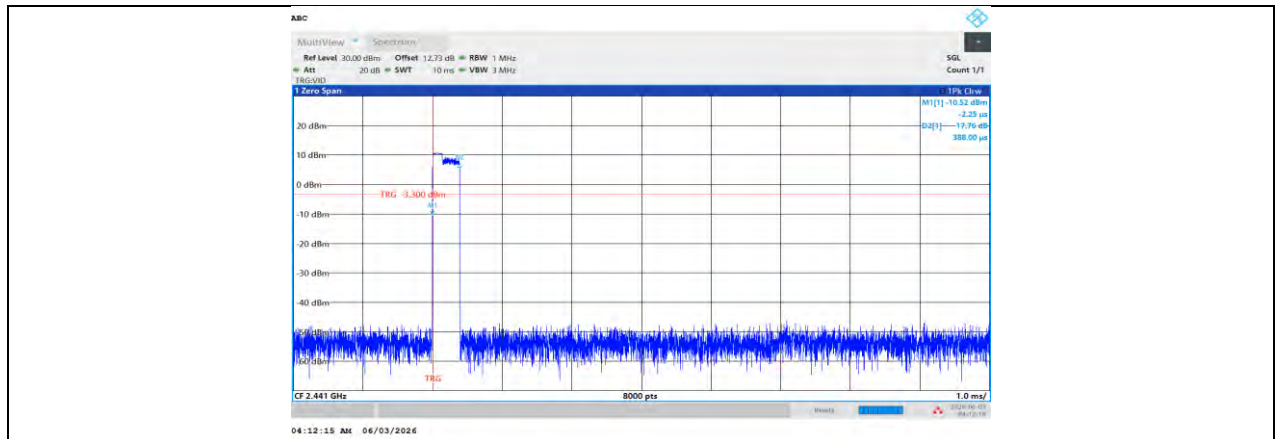

2DH1_Ant L_Hop

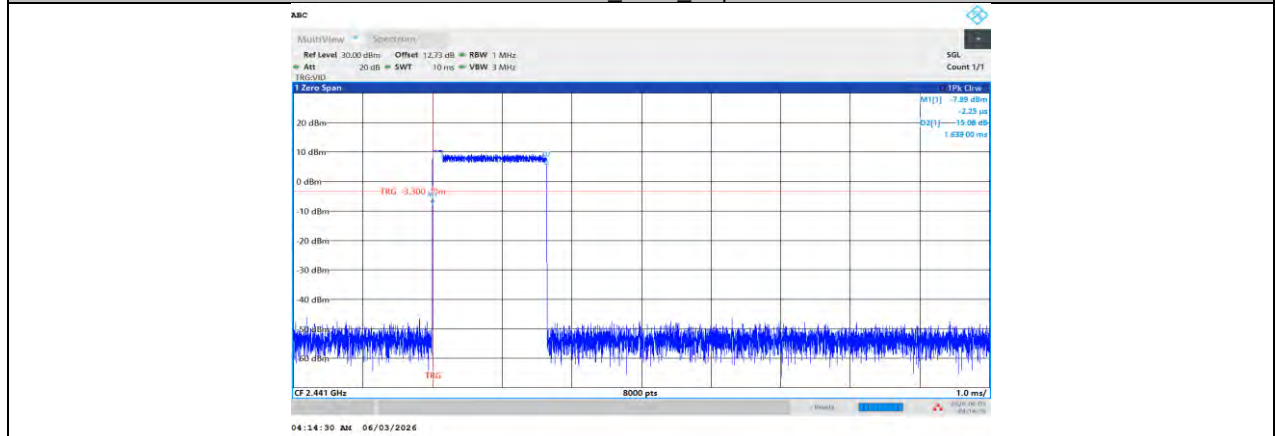

2DH3_Ant L_Hop

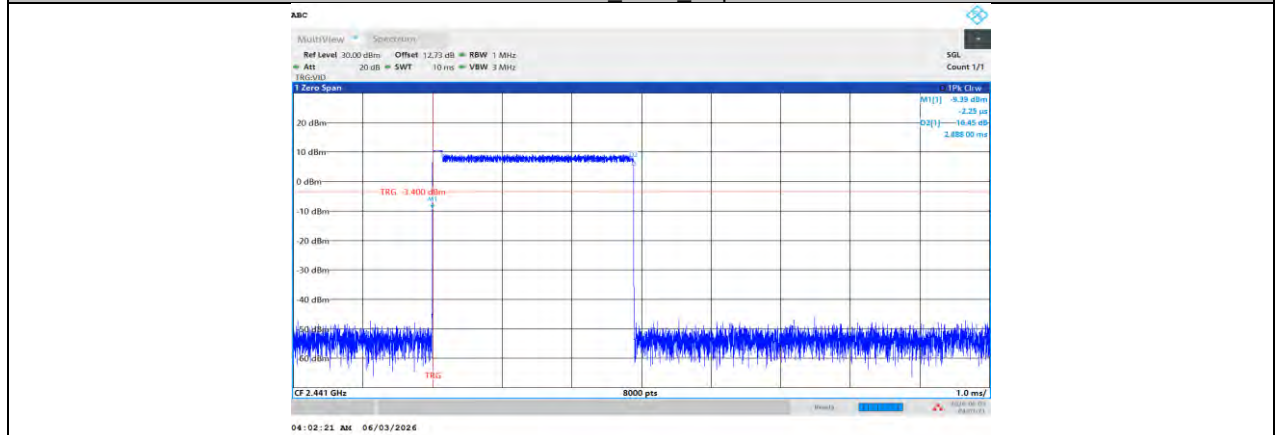


2DH5_Ant L_Hop


10.5.3. Test Result-Right

FHSS Mode						
Test Mode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant R	Hop	0.376	0.120	≤0.4	PASS
DH3	Ant R	Hop	1.633	0.261	≤0.4	PASS
DH5	Ant R	Hop	2.882	0.307	≤0.4	PASS
3DH1	Ant R	Hop	0.388	0.124	≤0.4	PASS
3DH3	Ant R	Hop	1.639	0.262	≤0.4	PASS
3DH5	Ant R	Hop	2.887	0.308	≤0.4	PASS


AFHSS Mode						
Test Mode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant R	Hop	0.376	0.060	≤0.4	PASS
DH3	Ant R	Hop	1.633	0.131	≤0.4	PASS
DH5	Ant R	Hop	2.882	0.154	≤0.4	PASS
3DH1	Ant R	Hop	0.388	0.062	≤0.4	PASS
3DH3	Ant R	Hop	1.639	0.131	≤0.4	PASS
3DH5	Ant R	Hop	2.887	0.154	≤0.4	PASS

10.5.4. Test Graphs-Right

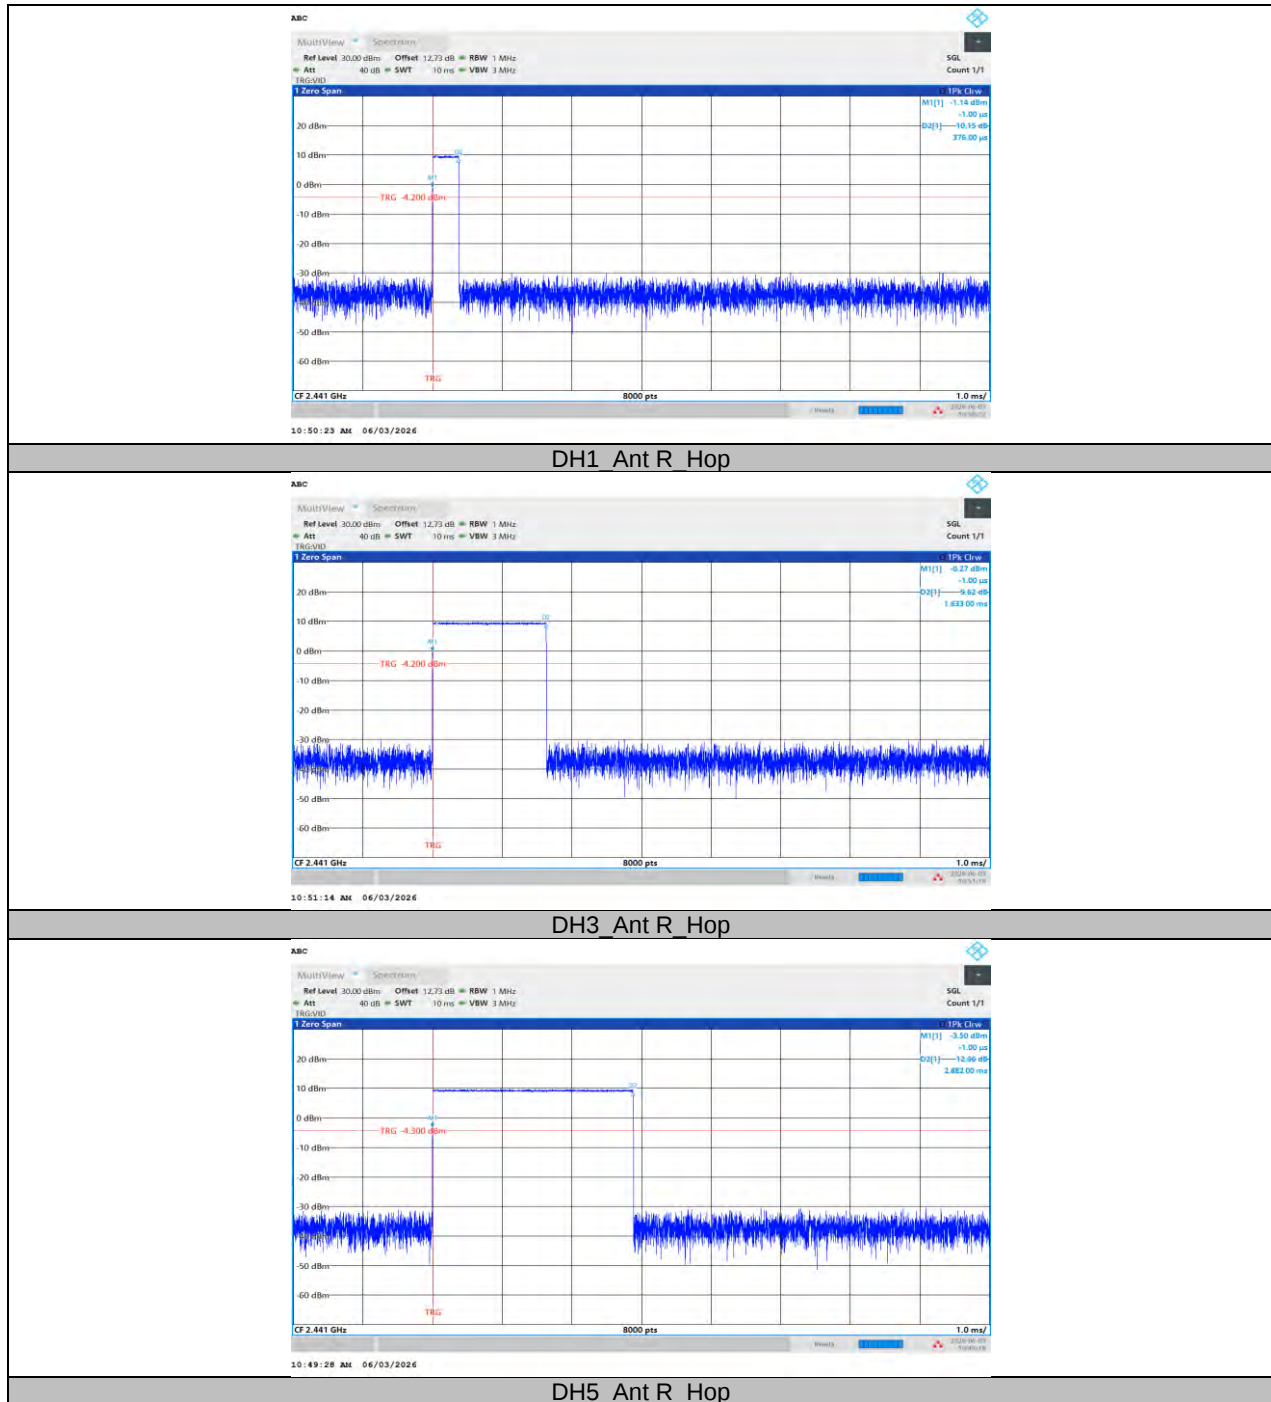


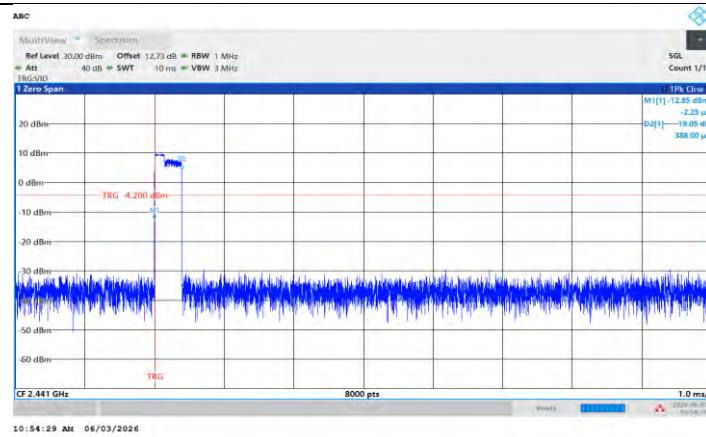

2DH1_Ant R_Hop

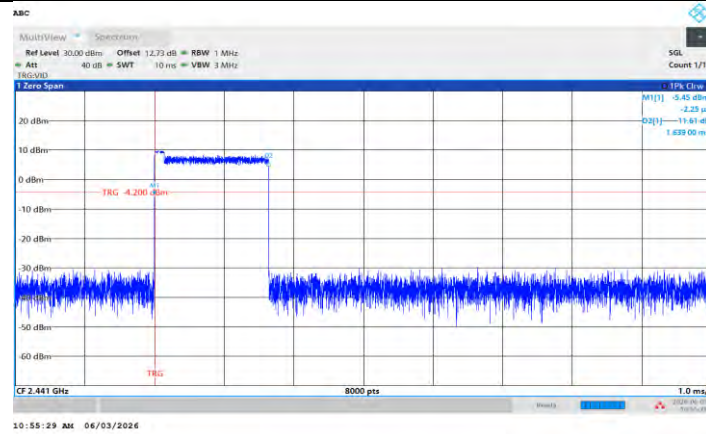

2DH3_Ant R_Hop

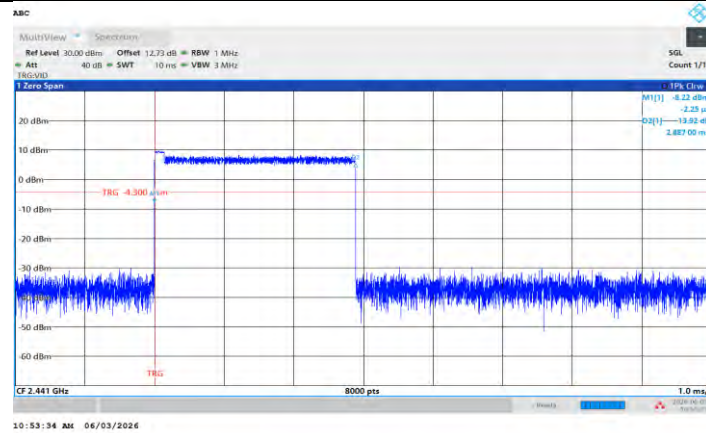


2DH5_Ant R_Hop

10.6. APPENDIX F: NUMBER OF HOPPING CHANNELS

10.6.1. Test Result-Left

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant L	Hop	79	≥15	PASS
2DH5	Ant L	Hop	79	≥15	PASS

10.6.2. Test Graphs-Left

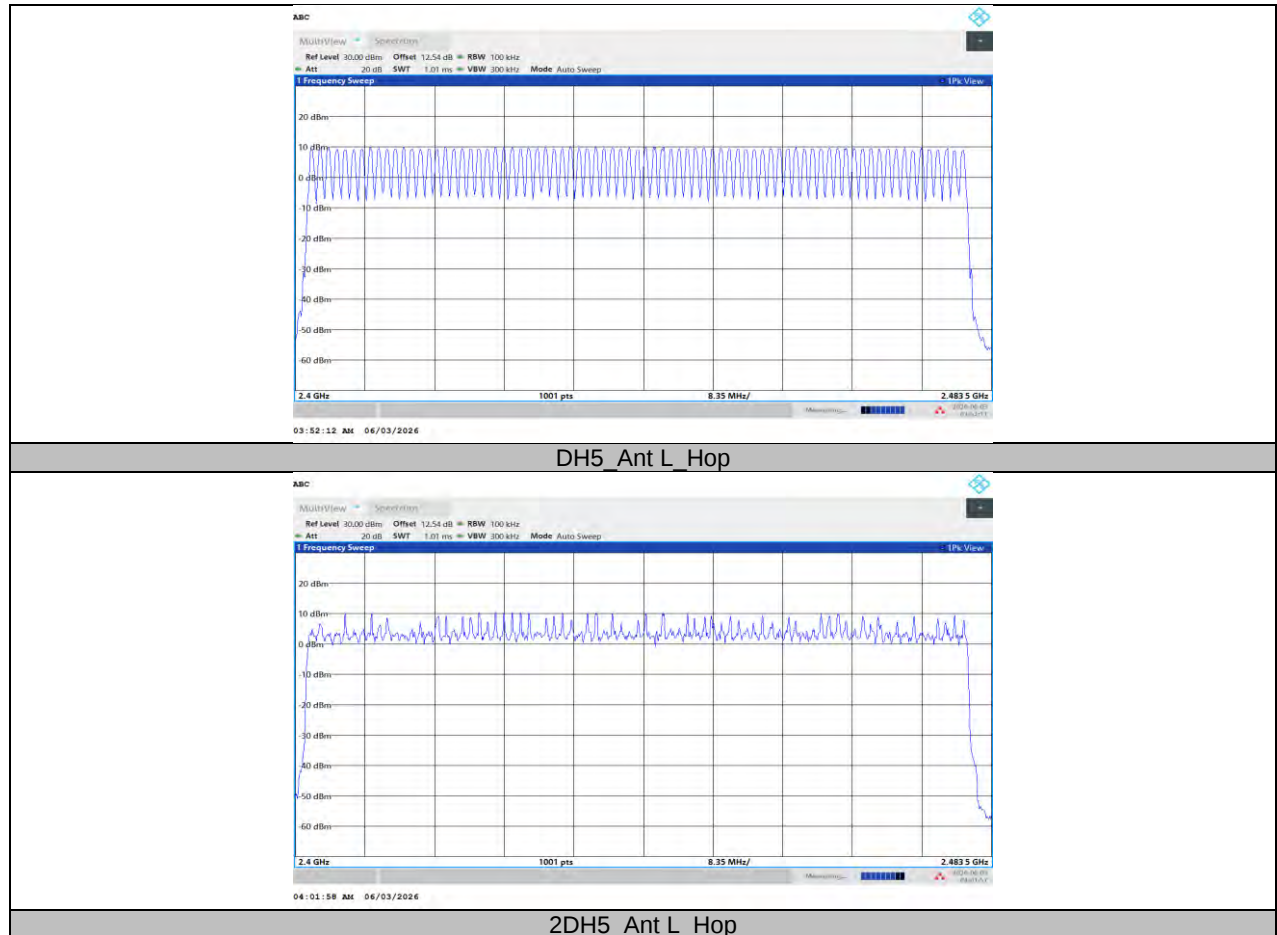

10.6.3. Test Result-Right

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant R	Hop	79	≥15	PASS
2DH5	Ant R	Hop	79	≥15	PASS

10.6.4. Test Graphs-Right



10.7. APPENDIX G: BAND EDGE MEASUREMENTS**10.7.1. Test Result-Left**

Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant L	Low	2402	10.08	-47.64	≤ -9.92	PASS
		High	2480	9.95	-48.02	≤ -10.05	PASS
		Low Hop	2402	9.31	-52.41	≤ -10.69	PASS
		High Hop	2480	10.21	-46.33	≤ -9.79	PASS
2DH5	Ant L	Low	2402	10.13	-45.32	≤ -9.87	PASS
		High	2480	9.65	-47.75	≤ -10.35	PASS
		Low Hop	2402	10.05	-51.94	≤ -9.95	PASS
		High Hop	2480	9.38	-43.07	≤ -10.62	PASS

10.7.2. Test Result-Right


Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant R	Low	2402	8.90	-47.78	≤-11.1	PASS
		High	2480	9.01	-36.39	≤-10.99	PASS
		Low	Hop_2402	8.72	-48.45	≤-11.28	PASS
		High	Hop_2480	9.32	-47.77	≤-10.68	PASS
2DH5	Ant R	Low	2402	8.87	-47.63	≤-11.13	PASS
		High	2480	9.02	-45	≤-10.98	PASS
		Low	Hop_2402	8.03	-47.52	≤-11.97	PASS
		High	Hop_2480	9.21	-45.61	≤-10.79	PASS

10.7.3. Test Graphs-Left






DH5_Ant L_High_Hop_2480

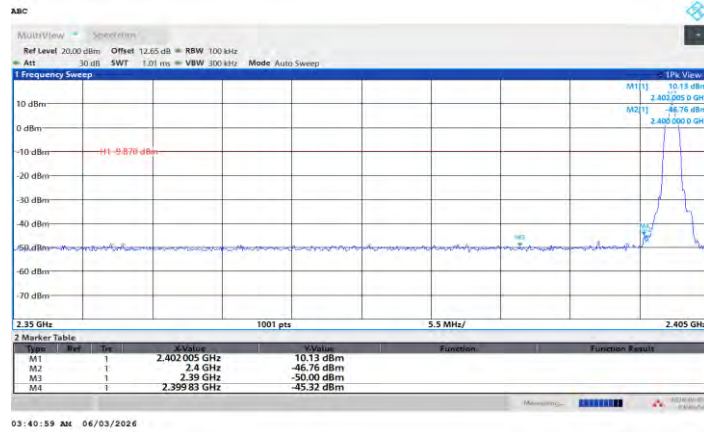


2DH5_Ant L_Low_2402

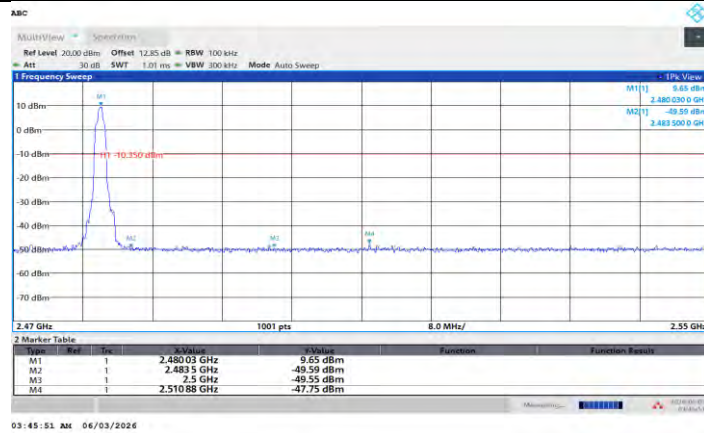

2DH5_Ant L_High_2480




2DH5_Ant L_Low_Hop_2402

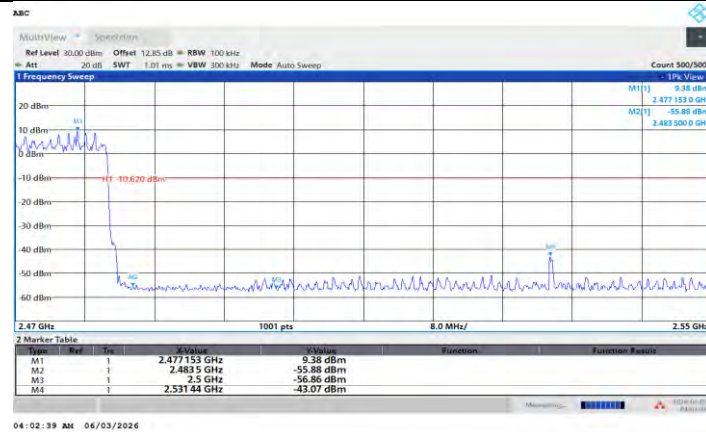

2DH5_Ant L_High_Hop_2480

10.7.4. Test Graphs-Right




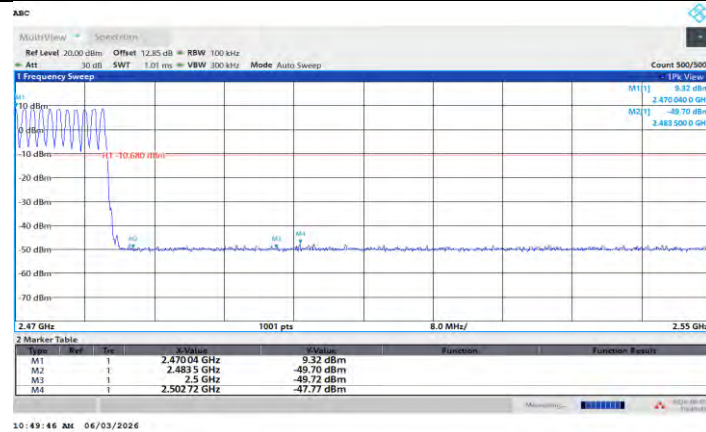


DH5_Ant R_High_Hop_2480




2DH5_Ant R_Low_2402

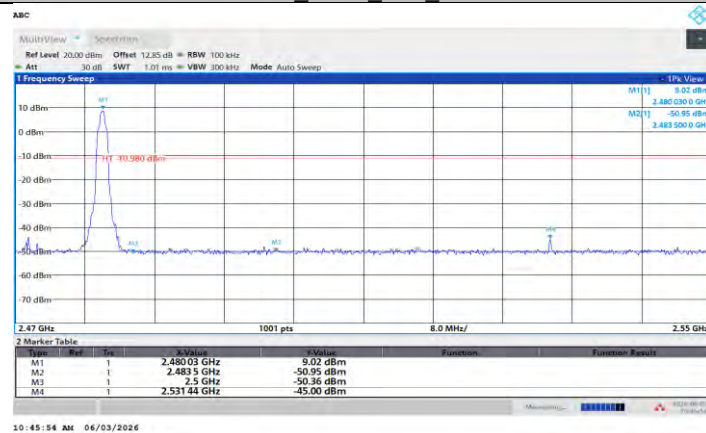

2DH5_Ant R_High_2480

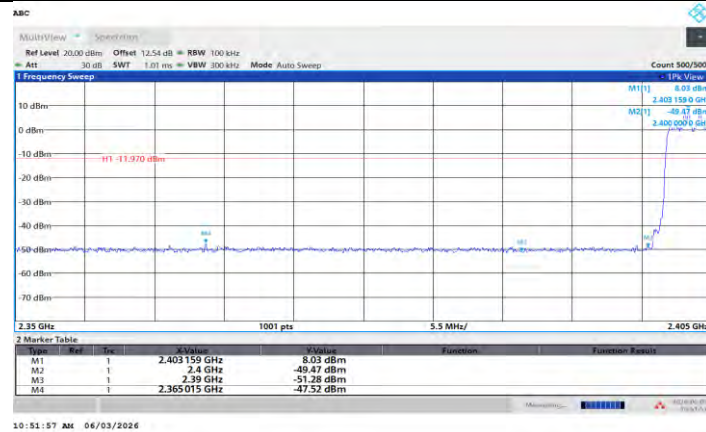

2DH5_Ant R_Low_Hop_2402

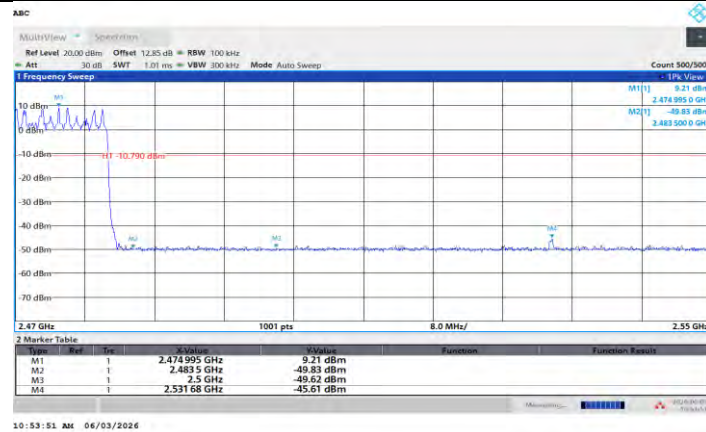

2DH5_Ant R_High_Hop_2480

10.8. APPENDIX H: CONDUCTED SPURIOUS EMISSION


10.8.1. Test Result-Left


Test Mode	Antenna	Frequency[MHz]	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant L	2402	Reference	10.06	---	PASS
			30~1000	-57.26	≤-9.94	PASS
			1000~26500	-46.59	≤-9.94	PASS
		2441	Reference	10.38	---	PASS
			30~1000	-56.48	≤-9.62	PASS
			1000~26500	-46.45	≤-9.62	PASS
		2480	Reference	9.88	---	PASS
			30~1000	-56.77	≤-10.12	PASS
			1000~26500	-45.76	≤-10.12	PASS
2DH5	Ant L	2402	Reference	10.14	---	PASS
			30~1000	-56.31	≤-9.86	PASS
			1000~26500	-44.64	≤-9.86	PASS
		2441	Reference	10.39	---	PASS
			30~1000	-57.42	≤-9.61	PASS
			1000~26500	-45.87	≤-9.61	PASS
		2480	Reference	9.81	---	PASS
			30~1000	-56.97	≤-10.19	PASS
			1000~26500	-46.26	≤-10.19	PASS

10.8.2. Test Result-Right


Test Mode	Antenna	Frequency[MHz]	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant R	2402	Reference	8.95	---	PASS
			30~1000	-56.84	≤-11.05	PASS
			1000~26500	-36.74	≤-11.05	PASS
		2441	Reference	9.44	---	PASS
			30~1000	-56.64	≤-10.56	PASS
			1000~26500	-45.94	≤-10.56	PASS
		2480	Reference	9.07	---	PASS
			30~1000	-56.95	≤-10.93	PASS
			1000~26500	-46.34	≤-10.93	PASS
2DH5	Ant R	2402	Reference	8.93	---	PASS
			30~1000	-56.89	≤-11.07	PASS
			1000~26500	-46.81	≤-11.07	PASS
		2441	Reference	9.44	---	PASS
			30~1000	-56.83	≤-10.56	PASS
			1000~26500	-45.71	≤-10.56	PASS
		2480	Reference	9.06	---	PASS
			30~1000	-57.18	≤-10.94	PASS
			1000~26500	-46.02	≤-10.94	PASS

10.8.3. Test Graphs-Left

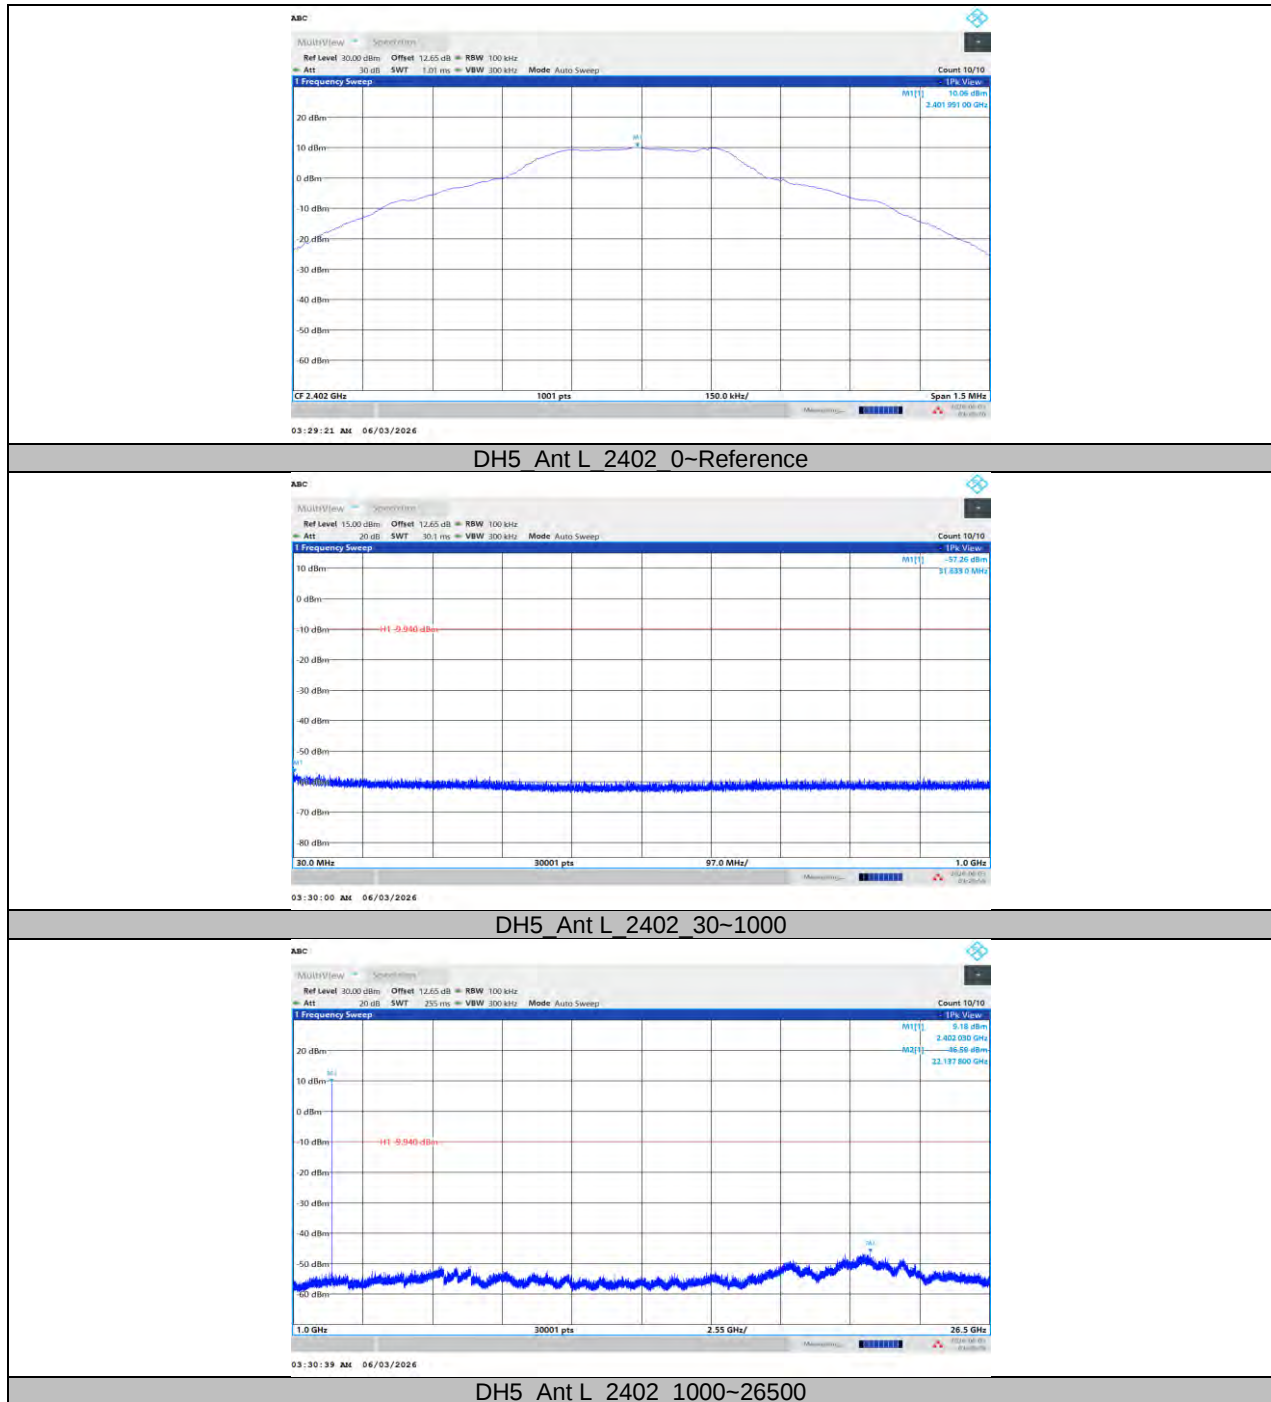


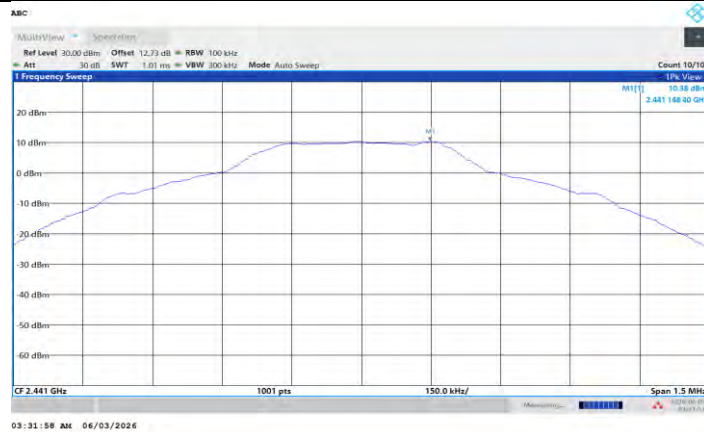


DH5_Ant L_2441_0~Reference

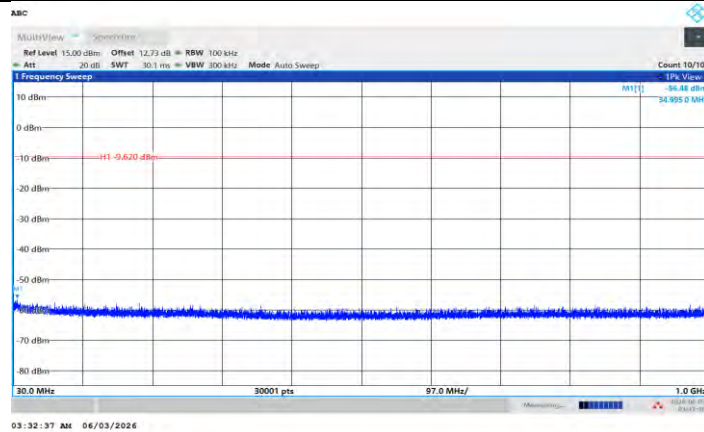


DH5_Ant L_2441_30~1000

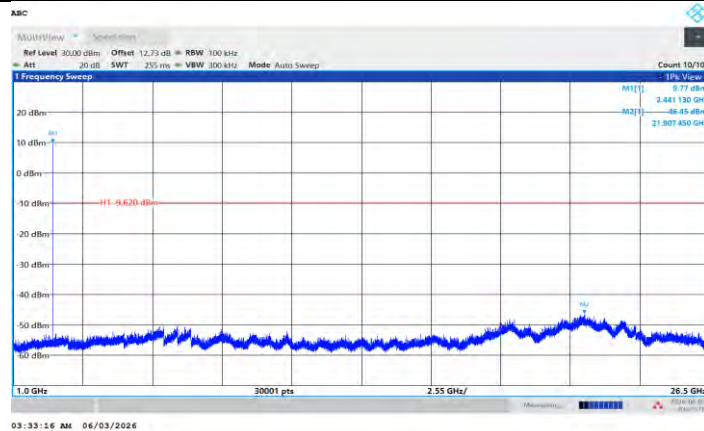


DH5_Ant L_2441_1000~26500

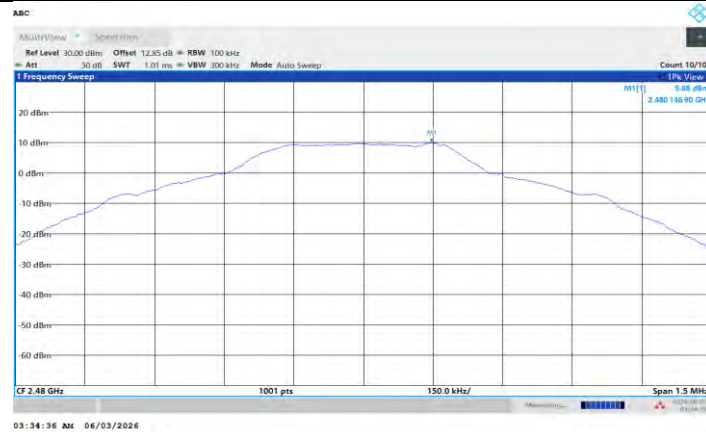


DH5_Ant L_2480_0~Reference

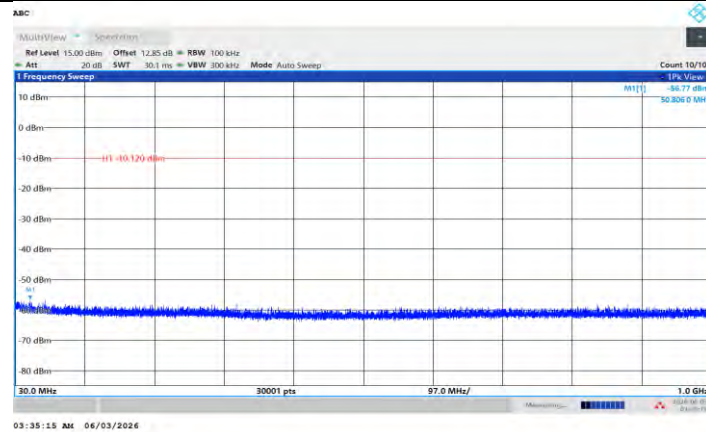


DH5_Ant L_2480_30~1000

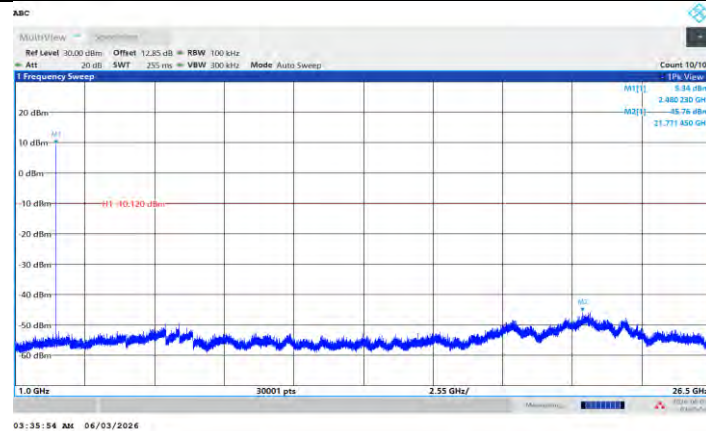


DH5_Ant L_2480_1000~26500

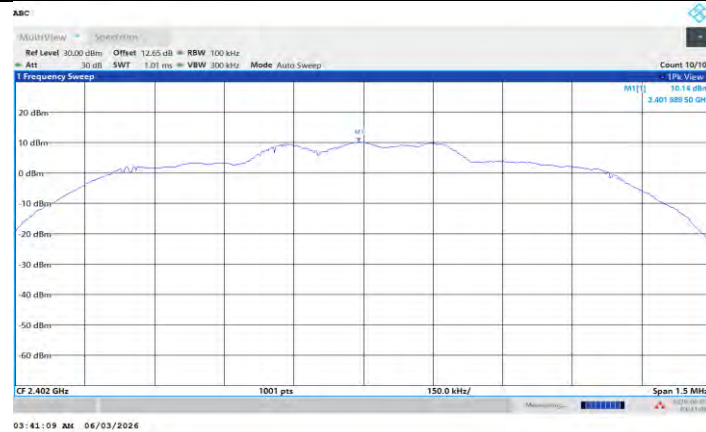


2DH5_Ant L_2402_0~Reference

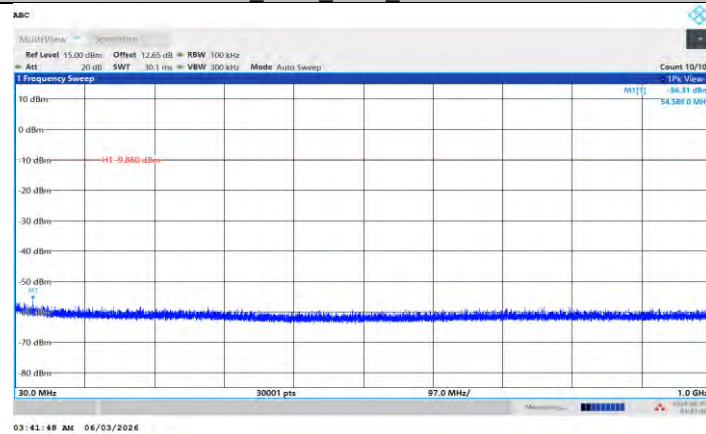


2DH5_Ant L_2402_30~1000

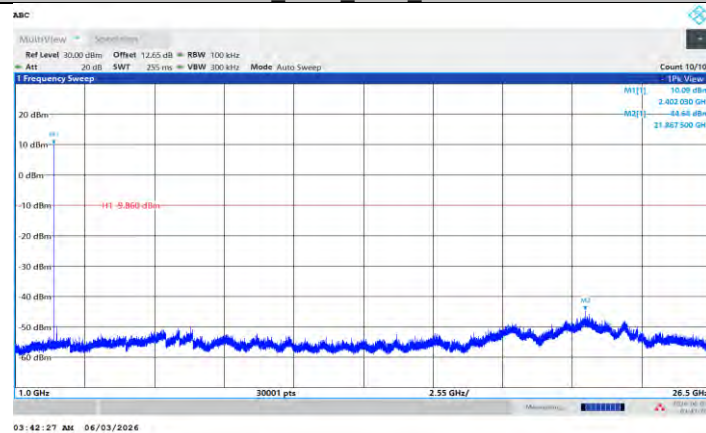


2DH5_Ant L_2402_1000~26500

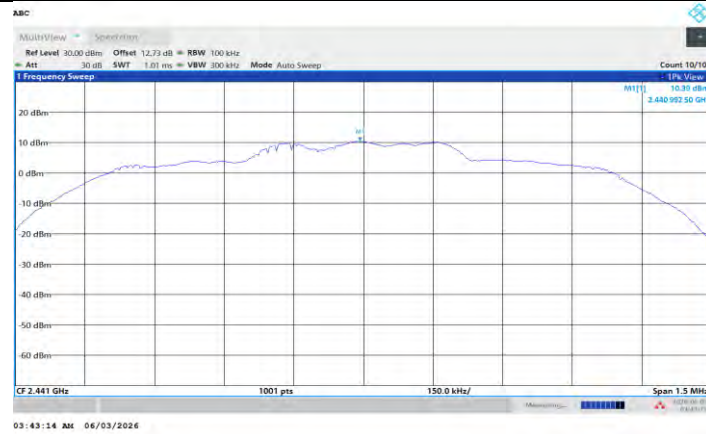


2DH5_Ant L_2441_0~Reference

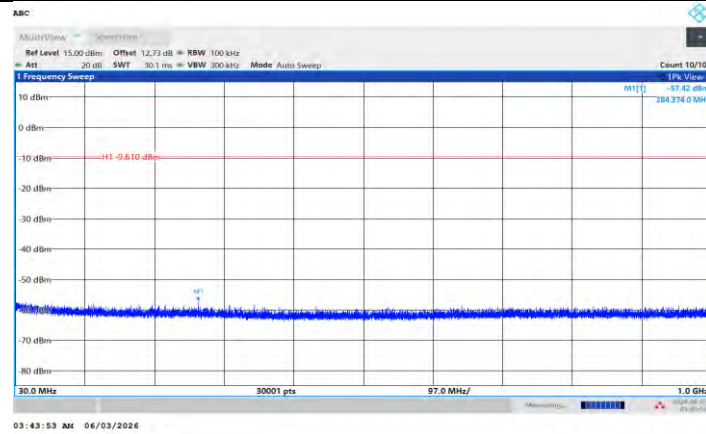


2DH5_Ant L_2441_30~1000

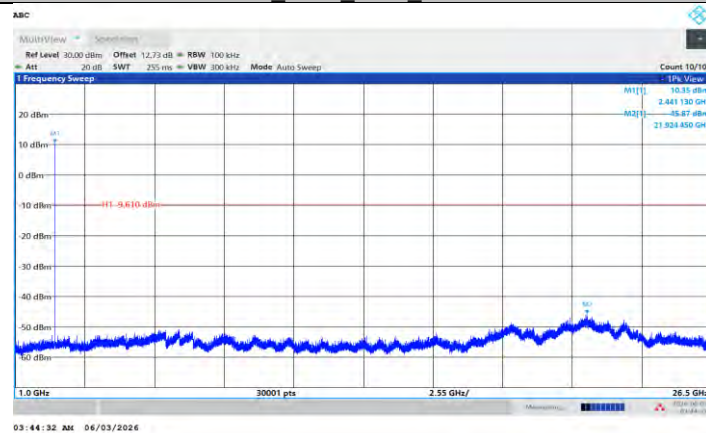


2DH5_Ant L_2441_1000~26500

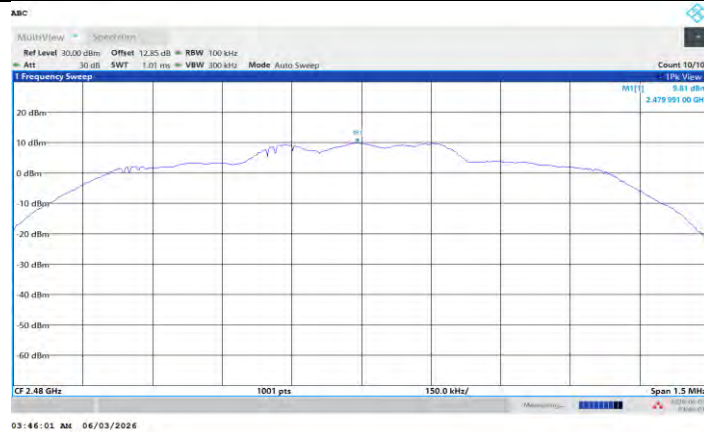

2DH5_Ant L_2480_0~Reference

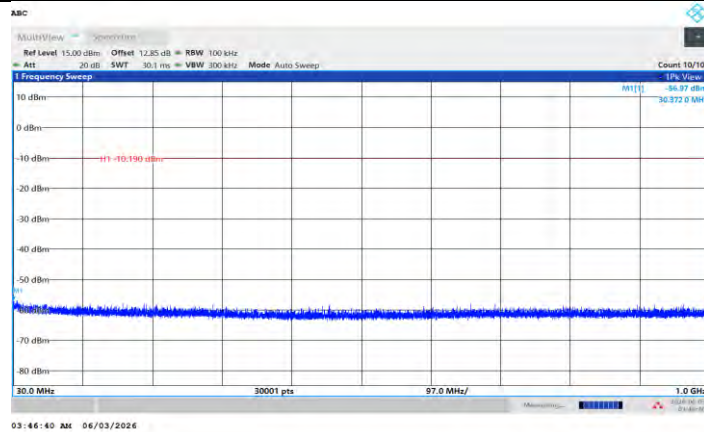



2DH5_Ant L_2480_30~1000

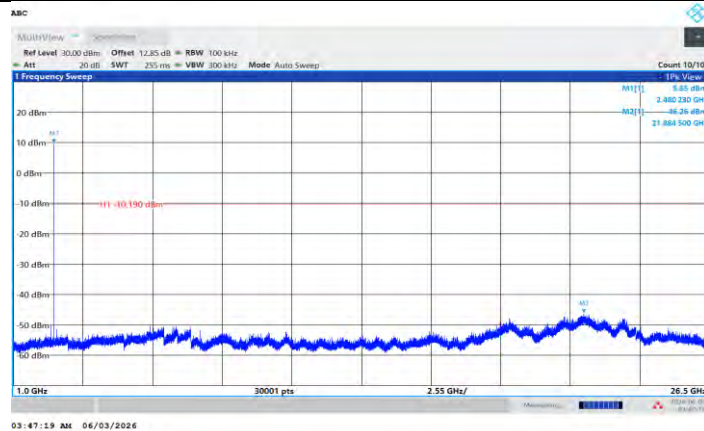


2DH5_Ant L_2480_1000~26500

10.8.4. Test Graphs-Right

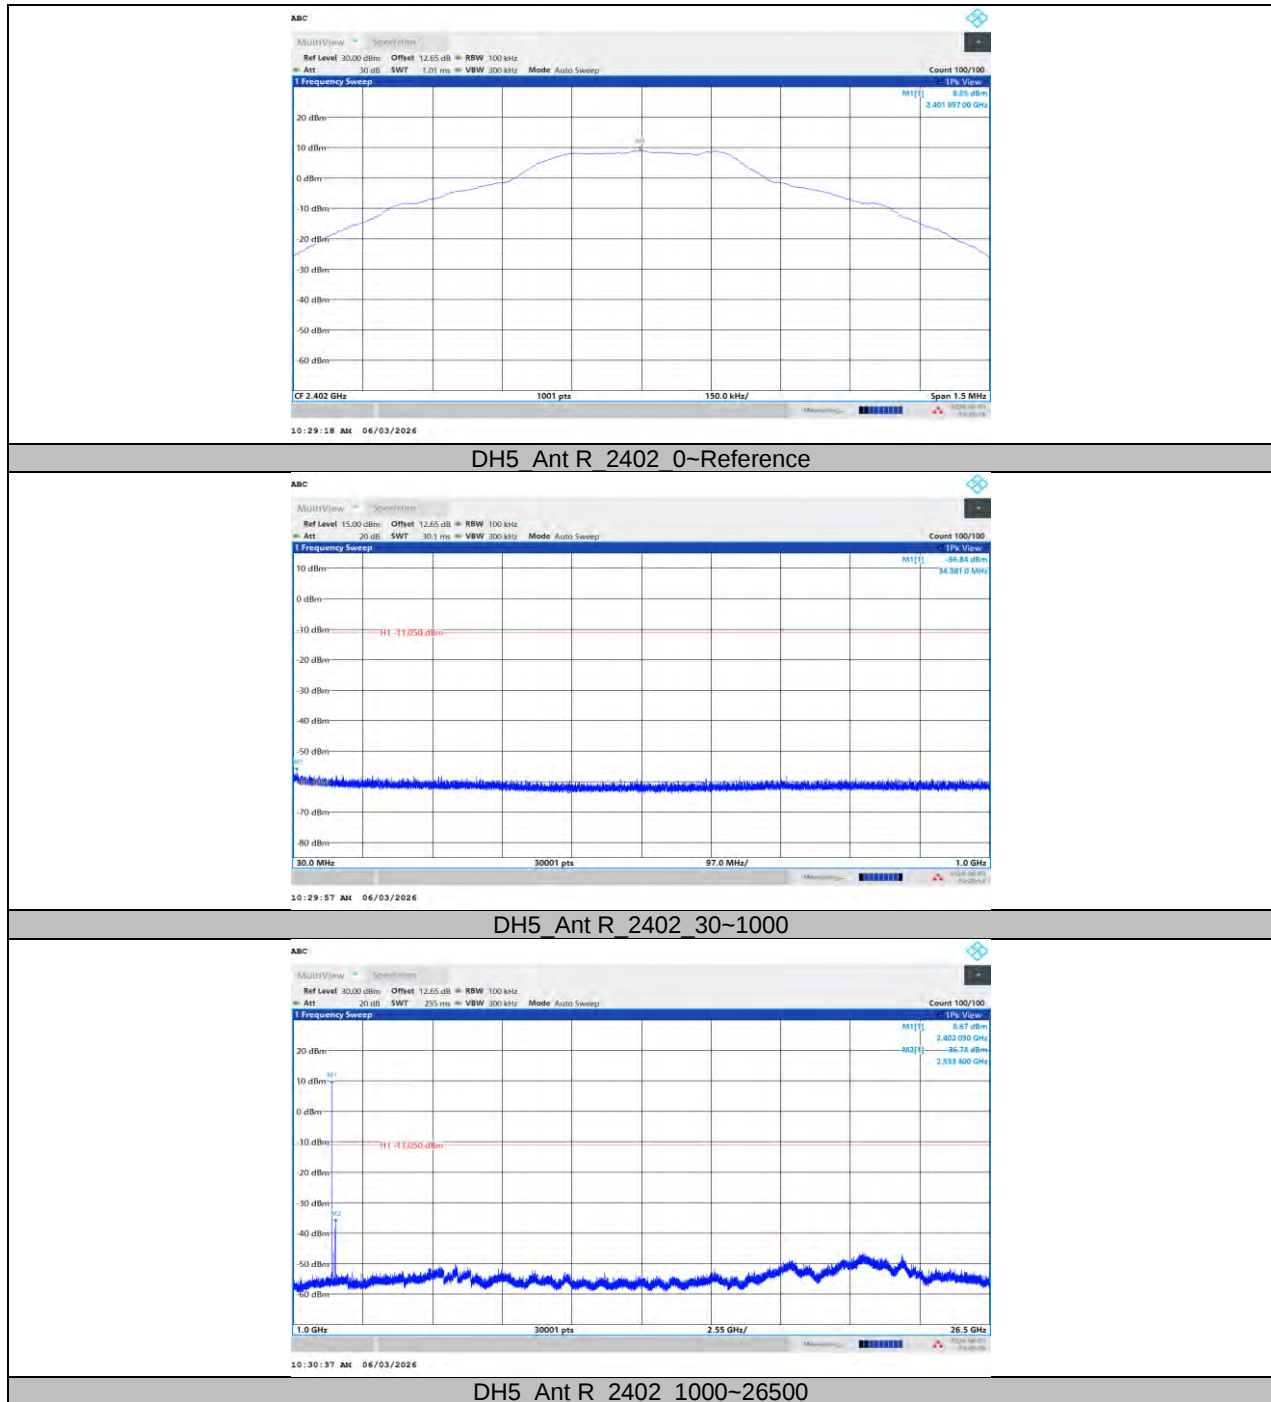


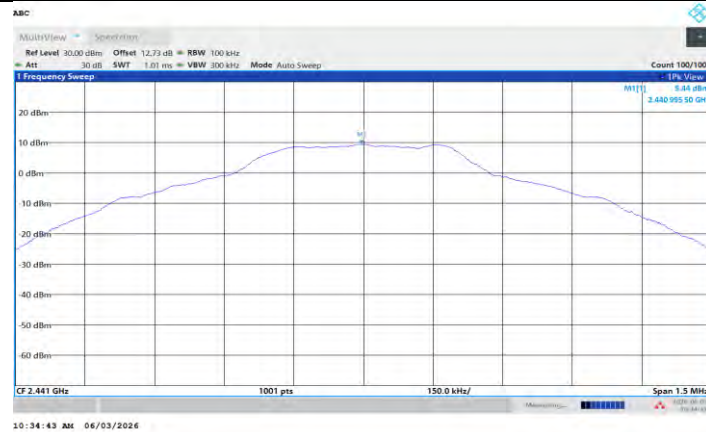


DH5_Ant R_2441_0~Reference

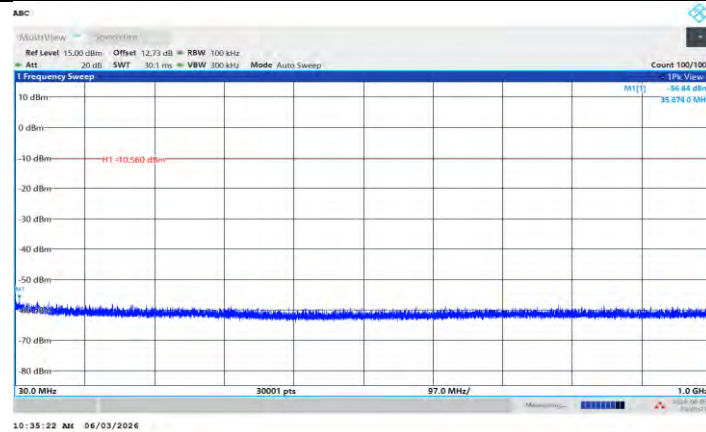


DH5_Ant R_2441_30~1000

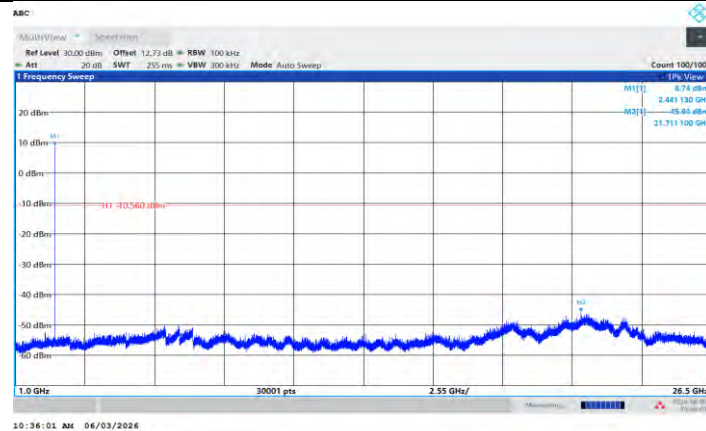


DH5_Ant R_2441_1000~26500

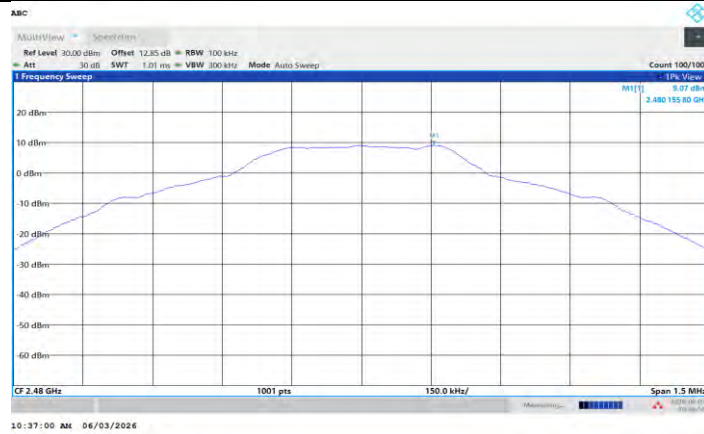




DH5_Ant R_2480_0~Reference



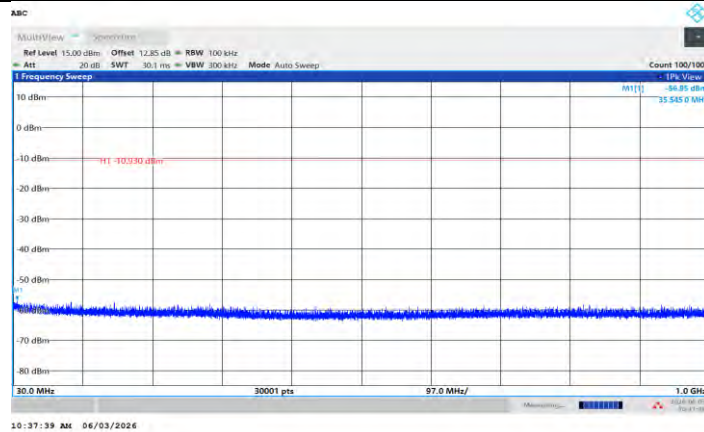



DH5_Ant R_2480_30~1000

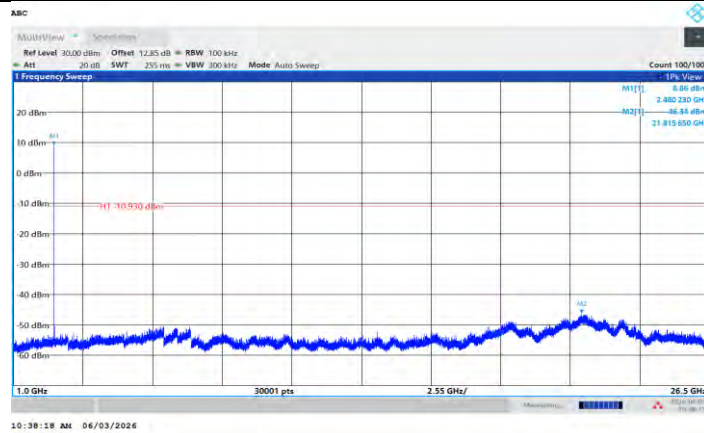


DH5_Ant R_2480_1000~26500

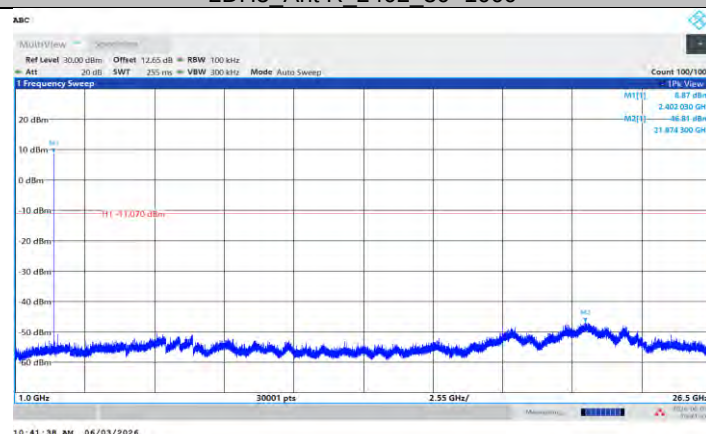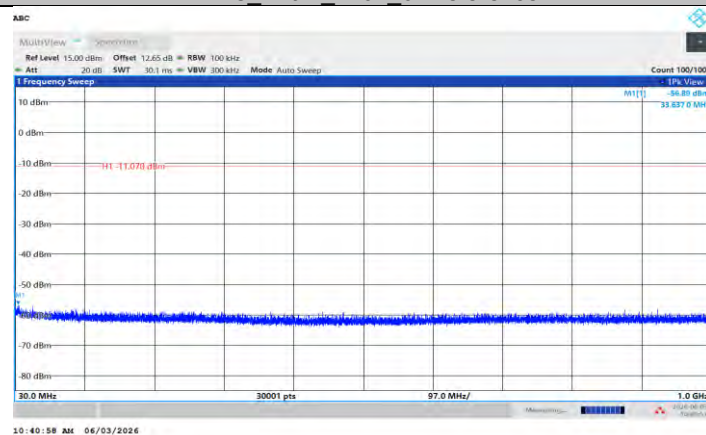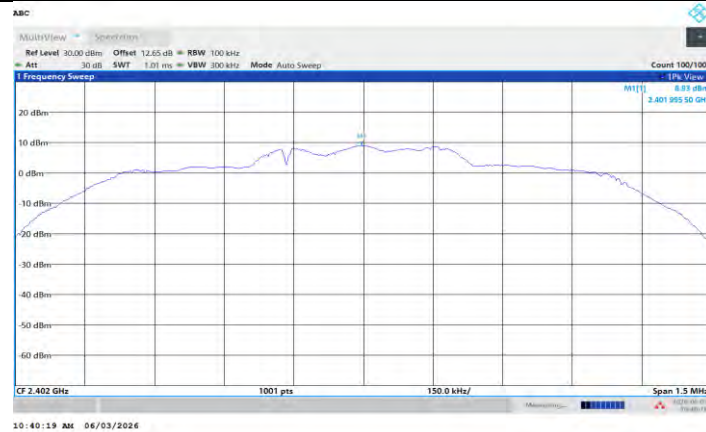

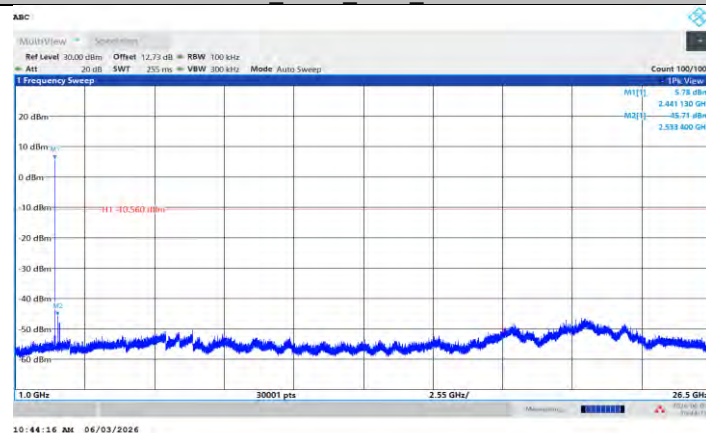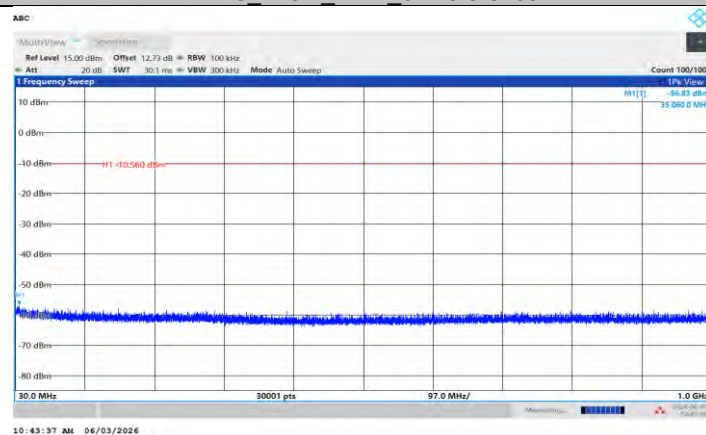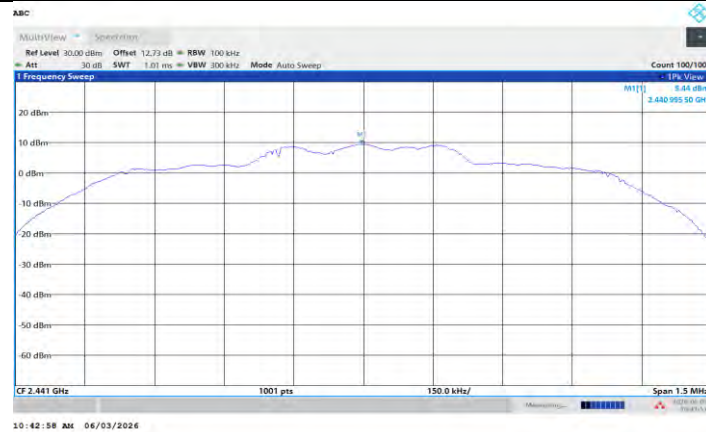


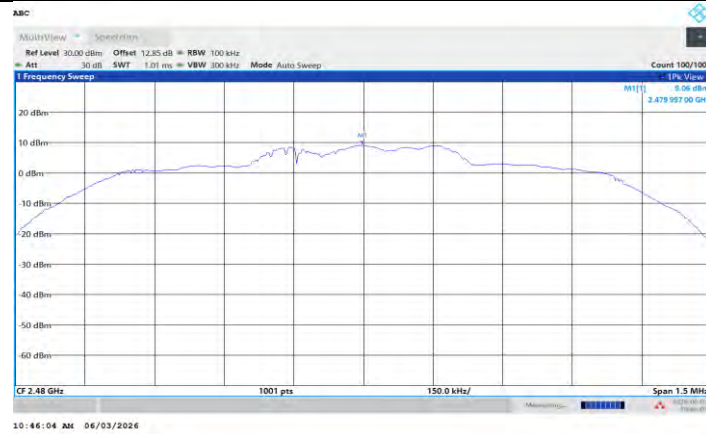

2DH5_Ant R_2480_0-Reference

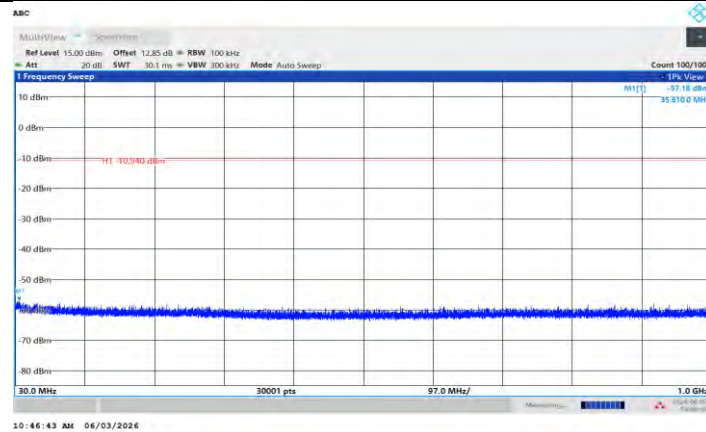

2DH5_Ant R_2480_30-1000

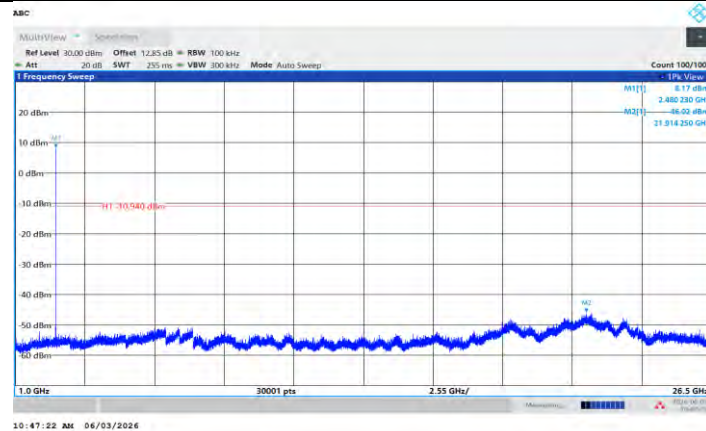

2DH5_Ant R_2480_1000-26500

10.9. APPENDIX I: DUTY CYCLE

10.9.1. Test Result-Left

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
DH5	2.88	5.00	0.5760	57.60	2.40	0.35	1
2DH5	2.88	5.00	0.5760	57.60	2.40	0.35	1

Note:

Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

The Duty Cycle test results for the left and right earphones were the same, only test data of left earphone was recorded in the report.

10.9.2. Test Graphs-Left

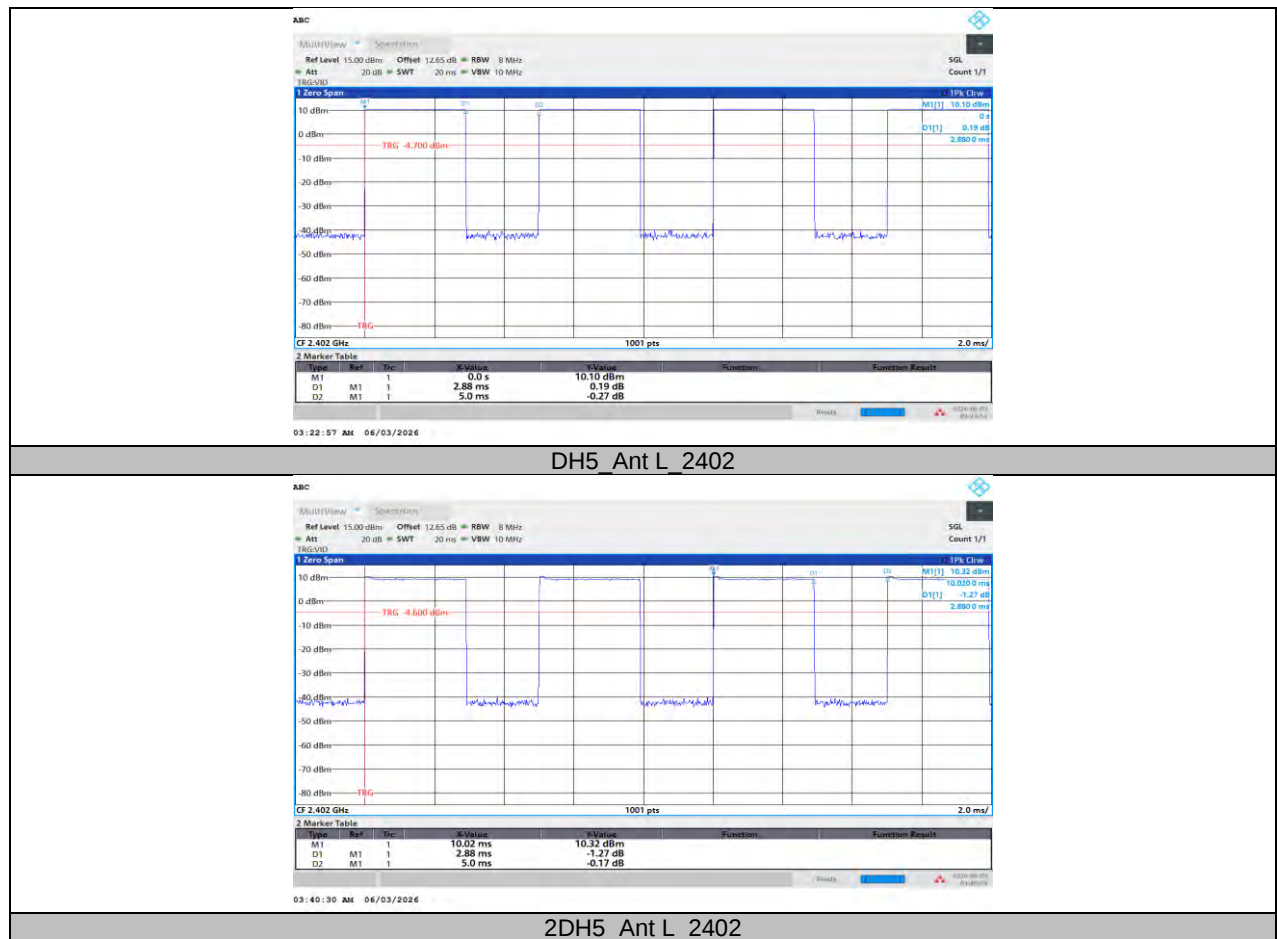

10.9.3. Test Result-Right

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
DH5	2.88	5.00	0.5760	57.60	2.40	0.35	1
2DH5	2.88	5.00	0.5760	57.60	2.40	0.35	1

Note:

Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

10.9.4. Test Graphs-Right



END OF REPORT