
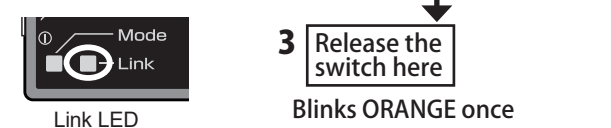


FASSTest12CH(Telemetry OFF) mode

This mode is forcibly turning off telemetry transmission to prevent collision of telemetry signals from the receiver to the transmitter when using dual RX link mode in FASSTest12ch mode.



- 1 Turn on the receiver. [Transmitter is always OFF]
- 2 Press and hold the SW for 5 seconds or more.

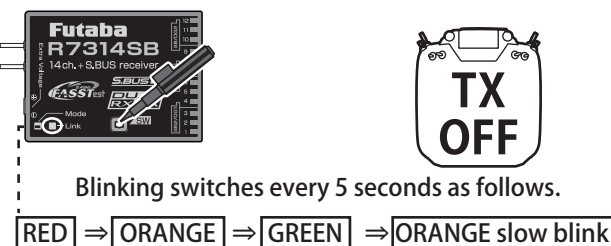


FASSTest12CH(Telemetry OFF) mode : INH

Press SW once more to return to flashing orange once

FASSTest12CH(Telemetry OFF) mode : ACT

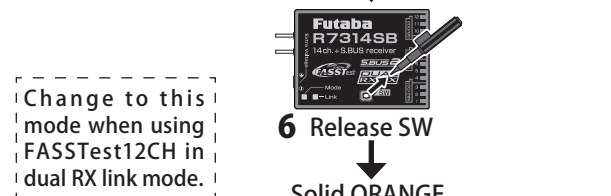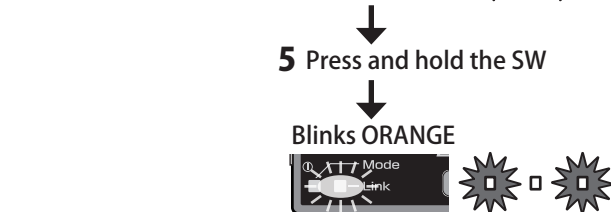

Change to this mode when using FASSTest12CH in dual RX link mode.

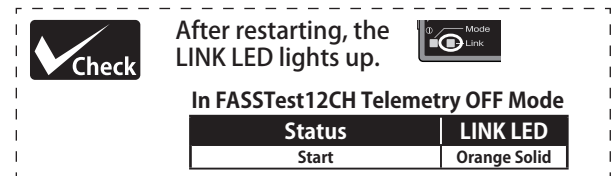


How to Dual Rx Link

- 1 Install two receivers on the aircraft as shown in the connection example.
- 2 Link the two receivers using the dual receiver feature of the transmitter.

For systems without dual receiver capability, link each receiver in turn.


Transmitter in link mode

For FASSTest 18CH Select dual mode and link primary

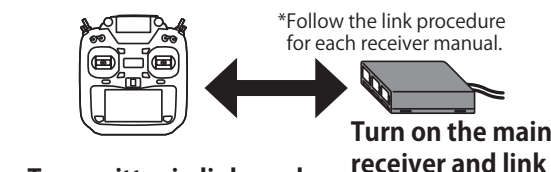

Transmitter in link mode

For FASSTest 18CH Select dual mode and link secondary

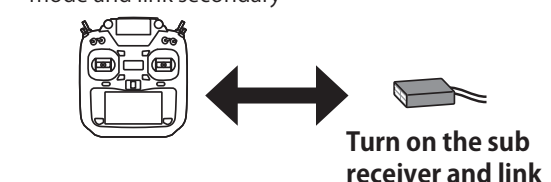


About telemetry system

When using the dual receiver function

- The telemetry function of the main receiver can be used
- Sub-receiver telemetry function is not available

Telemetry for FASSTest12CH

In FASSTest12CH mode, after linking R7314SB in telemetry OFF mode, link the receiver you want telemetry to. (The transmitter will show the telemetry of the last linked transmitter.)

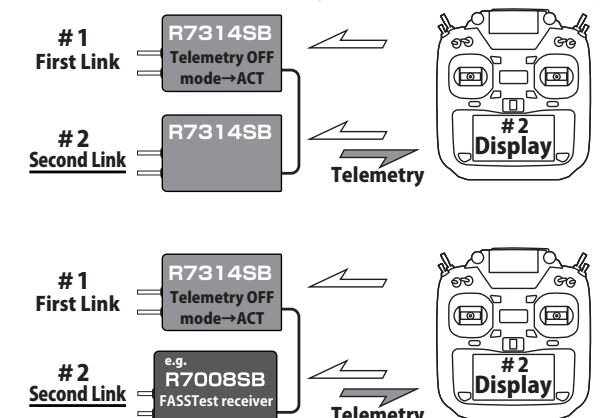

#2 Telemetry display of second-linked receiver. #1 Telemetry OFF first-linked receiver.

Compliance Information Statement (for U.S.A.)

This device, trade name Futaba Corporation, model number R7314SB, complies with part15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation.
CAUTION: To assure continued FCC compliance
1. Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.
2. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. The responsible party of this device compliance is:
FUTABA Corporation of America 2681 Wall Triana Hwy Huntsville, AL 35824, U.S.A.
Phone:1-256-461-9399 FAX:1-256-461-1059 E-mail: service@futabaUSA.com

1M23N36206

Futaba® R7314SB

- ◆ FASSTest-2.4GHz Bidirectional Communication System
- ◆ Dual Rx Link System Equipment
- ◆ S.BUS2 / S.BUS Port and 14 Channels for Conventional System Receiver

- Applicable systems: Futaba FASSTest-2.4GHz system transmitter

Usage precaution

- Analog servos cannot be used with the R7314SB in the FASSTest 12CH mode.
- Don't connect to Extra Voltage before turning on a receiver.
- Analog servos move slightly at startup in the FASSTest 18CH mode.

WARNING

- ① Changes or modification not approved by the party responsible for compliance could void the user's authority to operate the equipment.
- ① The R7314SB receiver should be protected from vibration by foam rubber, Velcro, or similar mounting methods. Protect from moisture.
- ① Keep away from conductive materials to avoid short circuits.

Antenna installation precaution

- ① Do not cut or bundle the receiver antenna wire.
- ① The antennas must be mounted in such a way to assure they are strain relieved.
- ① Keep the antenna as far away from the motor, ESC and other noise sources as you possibly can.
- ① Do not touch the antenna to metal, carbon, or other conductive material.
- ① Be sure that the two antennas are placed at 90 degrees to each other.
- The R7314SB has two antennas. In order to maximize signal reception and promote safe modeling Futaba has adopted a diversity antenna system. This allows the receiver to obtain RF signals on both antennas and fly problem-free.

(Typical installation)

- *Be sure that when using ESCs regulated output the capacity of the ESC must meet your usage condition.
- *Never use dry batteries for the power supply of the R7314SB as they may cause difficulties.

Extra Voltage Port
It connects with the battery for power, etc.
External voltage input cable of an option is used.
The voltage of the battery can be displayed with a transmitter.

R7314SB Specifications

- FASSTest-2.4 GHz system(18 ch/12 ch mode)
- S.BUS2 and S.BUS port and 14 channels for conventional system receiver
- Dual antenna diversity
- Size: 1.46 x 1.98 x 0.63 in. (37.0 x 50.2 x 15.9 mm)
- Weight: 0.69 oz. (19.5 g)
- Power requirement: 3.7 V to 7.4 V(Voltage range: 3.5 V to 8.4 V)
- Battery F/S Voltage: It sets up with a transmitter
- Extra Voltage port: 0 ~ 70 V DC

Thank you for purchasing a Futaba R7314SB FASSTest-2.4GHz compatible receiver. The R7314SB receiver features bi-directional communication with a FASSTest Futaba transmitter using the S.BUS2 port. Using the S.BUS2 port an impressive array of telemetry sensors may be utilized. It also includes both standard PWM output ports (1-14ch) and S.BUS output ports. The R7314SB can also be switched to the Dual Rx Link System. This system can ensure safety by mounting two FASSTest receivers on one aircraft.

Antenna installation for carbon fuselage

- ① You must leave 30mm at the tip of the antenna fully exposed. The exposed antenna should be secured so that it cannot move around or back inside of your aircraft.

Be careful of connector insertion


- ① Don't connect an S.BUS servo / gyro to S.BUS2 connector.

Link precaution

- ① Do not perform the linking procedure while the motor's main power is connected or the engine is operating as it may result in serious injury.
- ① When the linking is complete, please cycle the receiver power and ensure the receiver is properly linked to the transmitter.
- ① Power on the system in this order: Transmitter first, followed by the receiver.
- ① If the R7314SB receiver was previously linked to another transmitter, make sure that transmitter is not operating while linking the receiver to the new transmitter.

Connector precaution

- ① Don't connect a connector, as shown in this figure.
- It will short-circuit, if it connected in this way. A short circuit across the battery terminals may cause abnormal heating, fire and burns.

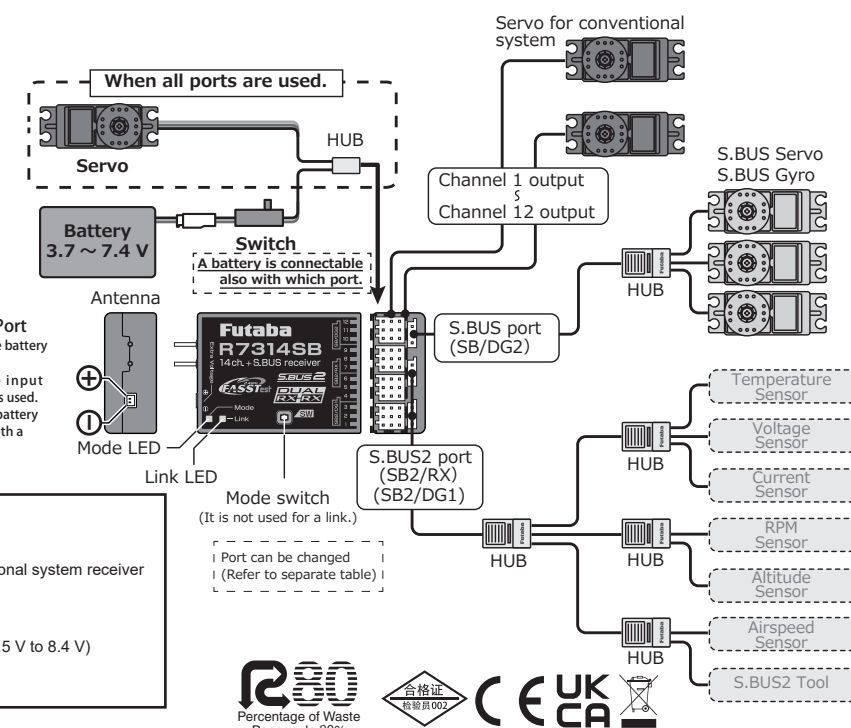

Percentage of Waste Paper pulp 80%

合格証
品質保証

UK
CA

FUTABA CORPORATION

Hobby Radio Control Business Center Sales & Marketing Department

1080 Yabutsuka, Chosei-mura, Chosei-gun, Chiba-ken, 299-4395, Japan TEL: +81-475-32-6051, FAX: +81-475-32-2915 ©FUTABA CORPORATION 2023, 6 (1)

LED Indication	
Status	LINK LED
No signal reception	Red Solid
Receiving signals	Green Solid
Waiting for link	Start → 2second later → Red Blink (3 second)
Unrecoverable error (EEPROM, etc.)	Red Green Alternate blink

In Dual RX Link Mode	
Status	MODE LED
External receiver is receiving error or not connected. S.BUS signal not received	Red Solid
S.BUS signal reception from external receiver (also received by external receiver)	Green Solid

In FASSTest12CH Telemetry OFF Mode	
Status	LINK LED
Start	Orange Solid

Link


FASSTest is a bidirectional communication system between the R7314SB receiver and FASSTest capable transmitters. Multiple optional telemetry sensors may be connected to the S.BUS2 on the receiver and that data is in turn displayed on the transmitter.

Link to the transmitter

- 1 Bring the transmitter and the receiver close to each other, within 20 inches (half meter).
 - 2 Turn on the transmitter. Place the transmitter into the receiver linking mode.
 - 3 Turn on the receiver.
 - 4 The receiver will wait for the linking process to begin for 2 seconds. Following that it will return to the normal operation mode.
 - 5 When the LED of the receiver changes from blinking red to solid green, linking is complete.
(A link waiting state is ended in 3 second.)
- Refer to the transmitter's operation manual for complete details on how to place the transmitter into the linking mode.
 - If there are many FASSTest systems turned on in close proximity, your receiver might have difficulty establishing a link to your transmitter. This is a rare occurrence. However, should another FASSTest transmitter/receiver be linking at the same time, your receiver could link to the wrong transmitter. This is very dangerous if not noticed. To avoid the problem, we strongly recommend that you double check whether your receiver is really under control by your transmitter.
 - If the System Type of the transmitter is changed, the receiver will need to be re-linked to the transmitter.

S.BUS2
S.BUS2 extends S.BUS and supports bidirectional communication. Sensors are connected to the S.BUS2 port.

Compliance Information Statement (for Canada)
This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device. This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.
French: Cet appareil radio est conforme au CNR-210 d'Industrie Canada. L'utilisation de ce dispositif est autorisée seulement aux deux conditions suivantes : (1) il ne doit pas produire de brouillage, et (2) l'utilisateur du dispositif doit être prêt à accepter tout brouillage radioélectrique reçu, même sice brouillage est susceptible de compromettre le fonctionnement du dispositif. Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé.
Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

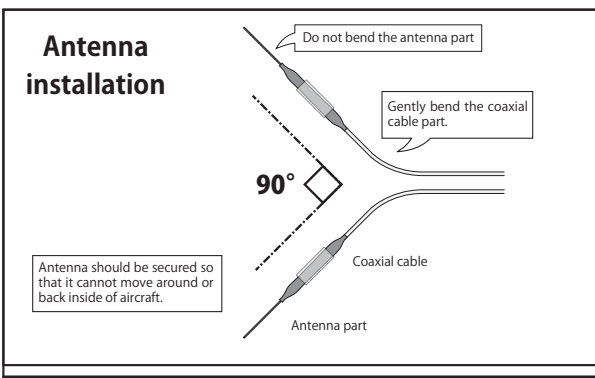

Channel Modes

The R7314SB is capable of changing its channel allocations as described in the table below. This is especially important when using the receiver in a dual receiver mode. See your transmitter operation manual for complete details on operating in the dual receiver mode.

Port	Channel							
	Mode A	Mode B	Mode C	Mode D	Mode E	Mode F	Mode G	Mode H
1	1	1	1	1	13	13	13	13
2	2	2	2	2	14	14	14	14
3	3	3	3	3	15	15	15	15
4	4	4	4	4	16	16	16	16
5	5	5	5	5	17	17	17	17
6	6	6	6	6	18	18	18	18
7	7	7	7	7	19	19	19	19
8	8	8	8	8	20	20	20	20
9	9	9	9	9	21	21	21	21
10	10	10	10	10	22	22	22	22
11	11	11	11	11	23	23	23	23
12	12	12	12	12	24	24	24	24
SB2/DG1	DG1	SB2	DG1	SB2	DG1	SB2	DG1	SB2
SB/DG2	DG2	SB	SB	DG2	DG2	SB	SB	DG2
LED	RED 1	RED 2	RED 3	RED 4	RED 5	GREEN 1	GREEN 2	GREEN 3


Default

- 1 Turn on the receiver. [Transmitter is always OFF]
- 2 Press and hold the SW for 5 seconds to 10 seconds.
- 3 When the LED of the receiver changes from blinking red to blinking orange, SW is released.
- 4 The LED should now blink red two times in the patterns described in the chart below.
- 5 Each press of the SW advances the receiver to the next mode.
- 6 When you reach the mode that you wish to operate in, press and hold the SW for more than 2 seconds. When LED blinks in orange, it is the completion of a mode change, SW is released.
- 7 Cycle the receiver power off and back on again after changing the Channel mode.


Check	LINK LED
1 Turn on the receiver. [Transmitter is always OFF]	Red Solid
2 Receiver enters link waiting state	Start → 2second later → Red Blink (3 second)
3 The LED will flash for the current CH output mode.	Current CH mode display

Dual Rx Link System

By installing two receivers in one aircraft, if one receiver becomes unable to communicate, the other receiver can be operated.

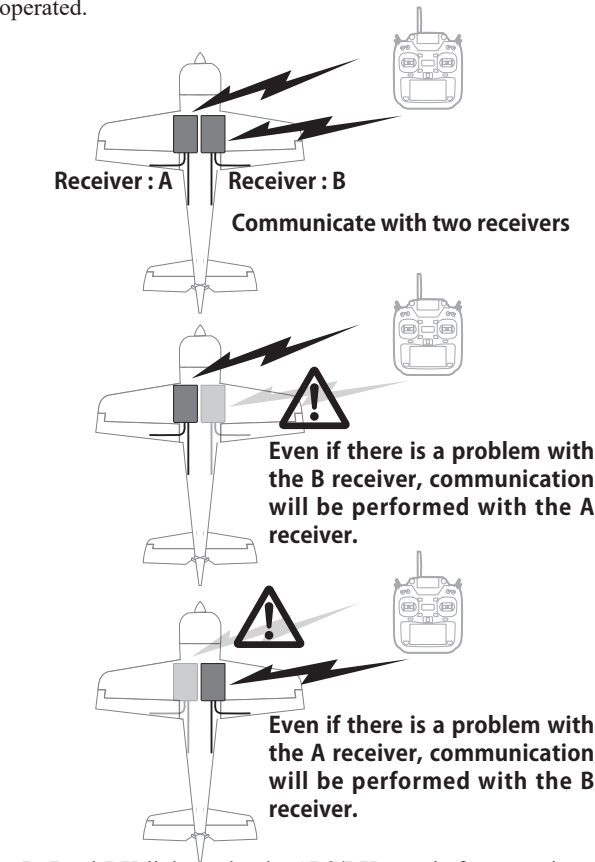

In Dual RX link mode, the SB2/RX port is for reception only, so use separate ports for S.BUS output and S.BUS2 input/output.

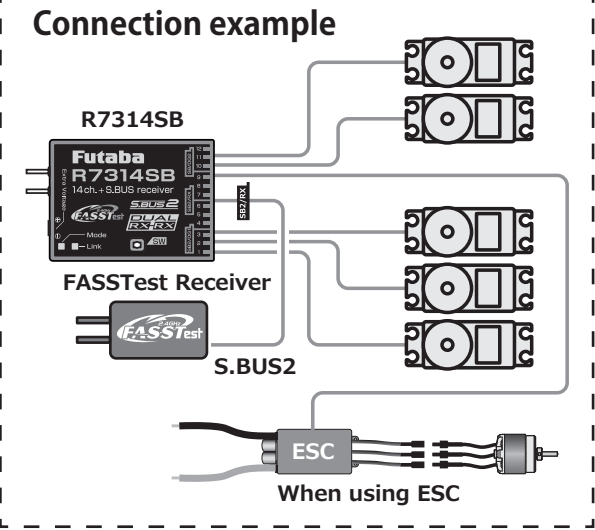


低功率射頻器材技術規範警語
取得審驗證明之低功率射頻器材，未經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規規定作業之無線電通信。
低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Declaration of Conformity (for EU)
Hereby, Futaba Corporation declares that the radio equipment type is R7314SB in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <https://www.rc.futaba.co.jp/support/manual/>

How to change to Dual RX Link mode

- 1 Turn on the receiver. [Transmitter is always OFF]
- 2 Press and hold the SW for 5 seconds or more.

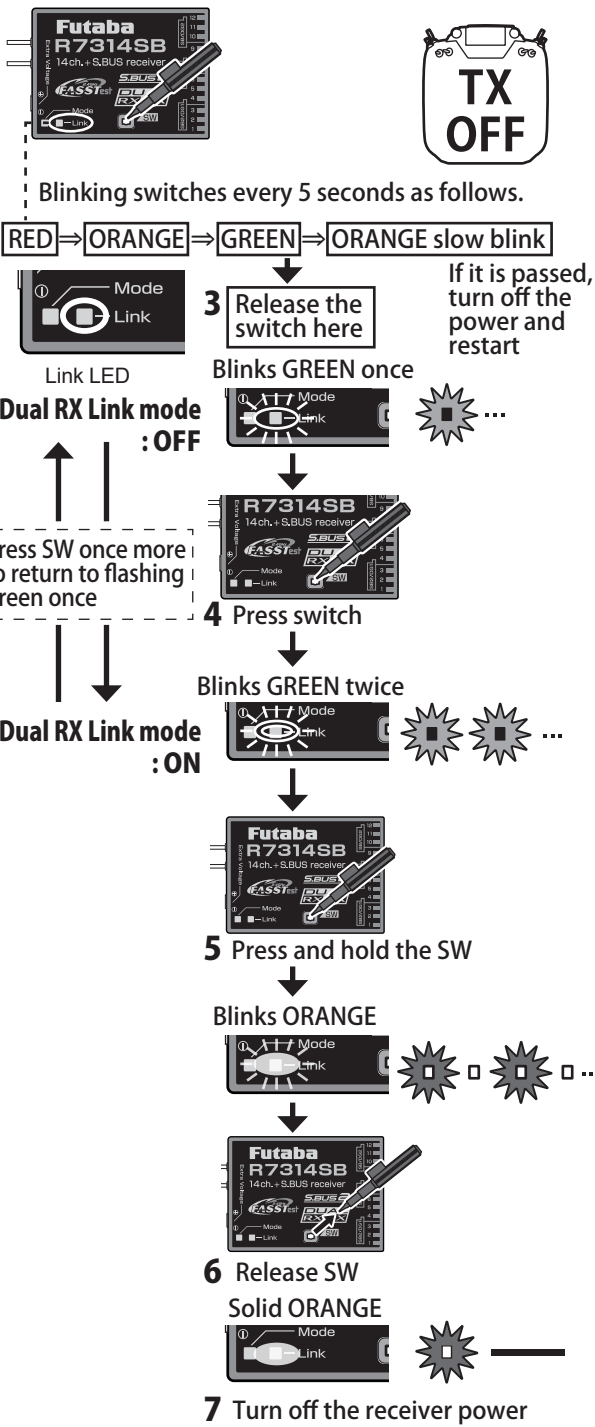



After restarting, the
MODE LED lights up.
Solid ORANGE



Status	MODE LED
External receiver is receiving error or not connected. S.BUS signal not received	Red Solid
S.BUS signal reception from external receiver (also received by external receiver)	Green Solid