

**GE Interlogix, Inc**

**GE Interlogix, Inc.  
Wireless IR Sensor  
B4Z-587-IR  
Certification**

|                                                                           |                           |              |
|---------------------------------------------------------------------------|---------------------------|--------------|
| 06/27/03 10:45 AM                                                         | <b>FCC ID: B4Z-587-IR</b> | Page 1 of 19 |
| D:\AA_files\PROJECTS\Indra's thermal RF sensor stuff\FCC\Pcs\FCC_REPT.DOC |                           |              |

**GE Interlogix, Inc**  
**Wireless IR Sensor**  
**B4Z-587-IR**

**6/26/03**

**GE Interlogix, Inc.**  
**2266 North Second Street**  
**North Saint Paul, MN 55109**  
**(651) 777-2690**

|                                   |                    |              |
|-----------------------------------|--------------------|--------------|
| FCC_REPT.DOC<br>06/27/03 10:45 AM | FCC ID: B4Z-587-IR | Page 2 of 19 |
|-----------------------------------|--------------------|--------------|

# GE Interlogix, Inc

|                                                                                  |    |
|----------------------------------------------------------------------------------|----|
| 1. INTRODUCTION                                                                  | 4  |
| 2. STATEMENT OF COMPLIANCE                                                       | 4  |
| 3. LAB MEASUREMENTS DISCUSSION / TEST NOTES                                      | 7  |
| 3.1 Test Notes                                                                   | 7  |
| 3.1.1 Transmissions shall cease within 5 seconds of activation [ §15.231(a)(2) ] | 7  |
| 3.1.2 Supervisory Calculation [ §15.231(a)(3) ]                                  | 9  |
| 3.1.3 Duty Cycle Correction Factor [§15.231(b)(2) and §15.35(c)]                 | 9  |
| 3.1.4 Bandwidth Measurement [ §15.231(c) ]                                       | 12 |
| 3.1.5 Emissions Measurements                                                     | 16 |
| 3.1.5.1 Radiated Emissions Summary                                               | 16 |
| 3.1.5.2 FCC Emissions Calculation                                                | 16 |
| 3.1.5.2.1 Terms                                                                  | 16 |
| 3.1.5.2.2 Example Calculation                                                    | 17 |
| 3.1.5.3 Radiated Emissions                                                       | 17 |
| 3.1.5.4 Forbidden Band4s                                                         | 18 |

# GE Interlogix, Inc

## 1. Introduction

This device monitors temperature of a bus bar connection in a power distribution panel. If the connection goes bad, the temperature goes up and an alarm message is sent to the control. The proper service technicians are then dispatched to take corrective action and reduce the chance of fire. The power for the transmitter is supplied from two 2/3 A lithium batteries. The transmitter's frequency is controlled by a SAW device, and is not adjustable by the user. The device measures approximately 4.75" by 1.75" by 1.5." The unit weighs about 7 ounces.

We are requesting Certification under FCC Rules, Part 15, Subpart C, Paragraph 15.231.

Please send comments/suggestions on the report format to [john.bergman@ge.com](mailto:john.bergman@ge.com).

Grantee Code: B4Z

## 2. Statement of Compliance

### **§2.907**      **Certification**

This is an application for certification

### **§2.911**      **Application**

- a) This is an application and has been filed electronically with form 731.
- b) All information required has been supplied.
- c) The applicant has signed the application (electronically).
- d) The technical data has been signed.  
(See Radiated Emissions)
- e) Applicant signature block on electronic form 731 completed by officer of the company or authorized company personnel.
- f) The appropriate fee has been paid electronically with VISA on 6/26/03.

### **§2.915**      **Grant**

This application demonstrates that all applicable technical standards have been met and a grant of this application will serve the public interest.

|                                   |                    |              |
|-----------------------------------|--------------------|--------------|
| FCC_REPT.DOC<br>06/27/03 10:45 AM | FCC ID: B4Z-587-IR | Page 4 of 19 |
|-----------------------------------|--------------------|--------------|

## GE Interlogix, Inc

### §2.925 Label

Each piece of equipment for which authorization will be granted will be uniquely identified with "FCC ID: B4Z-587-IR." The required statement will appear with the FCC ID on the product and, although not required, in the installation instructions. See Exhibit A, PDF file *id\_label.pdf*

### §2.947 Measurement Procedure

- a) The measurement procedure follows ANSI C63.4 procedure. Procedural notes are contained in the laboratory report.
- d) A list of test equipment used is contained in the laboratory report.

### §2.948 Description of Measurement Facilities

Measurements were performed at TUV Testing Services Open Test Site. The FCC keeps a full description of the measurement facilities on file. TUV's acceptance and approval is dated as December 5, 1993 in a letter received from the FCC.

The address of the test facility is:

TUV Product Service  
19035 Wild Mountain Road  
Taylors Falls, MN 55084-1758

Phone: 651-638-0297  
Contact: Joel Schneider  
Test Engineer in Charge

See Exhibit F, PDF file *test\_pho.pdf* for sketch of measurement setup

### §2.1033 Application for Certification

- a) Form 731 has been electronically filed on 6/26/03. Items that did not apply were left blank.
- b) This technical report contains the following information where applicable.
  - 1) Full name and mailing address of manufacturer and applicant for certification:  
GE Interlogix, Inc.  
2266 North Second Street  
North Saint Paul, MN 55109

|                                   |                    |              |
|-----------------------------------|--------------------|--------------|
| FCC_REPT.DOC<br>06/27/03 10:45 AM | FCC ID: B4Z-587-IR | Page 5 of 19 |
|-----------------------------------|--------------------|--------------|

## GE Interlogix, Inc

- 2) FCC Identifier:  
**B4Z-587-IR**
- 3) Copy of installation instructions:  
See Exhibit G, PDF file: *user\_man.pdf*
- 4) Brief Description of circuit functions and device operation:  
See Exhibit I, PDF file *op\_desc.pdf*  
See Exhibit D, PDF file *schemat.pdf* for schematics  
(page 1) and parts placement (pages 2 & 3) diagrams.
- 5) Block Diagram  
See Exhibit C, PDF file *block.pdf*.
- 6) Report of the measurements of radiation and conducted emissions:  
This document.
- 7) Photographs  
External:  
See Exhibit B, PDF file *extern.pdf*  
Internal:  
See Exhibit H, PDF file *intern.pdf*
- 8) Peripheral or Accessory devices:  
This is not applicable to device in this application.
- 9) Transition Rules  
This application is not pursuant to the transition rules of §15.37
- 10) Emergency Broadcast decoding:  
This is not applicable to device in this application.
- 11) Application for direct sequence spread spectrum devices...  
This is not applicable to device in this application.
- 12) Application for scanning receivers...  
This is not applicable to device in this application.
- c) Composite Systems  
This is not applicable to device in this application.

### 3. Lab Measurements Discussion / Test Notes


#### 3.1 Test Notes

3.1.1 Transmissions shall cease within 5 seconds of activation [ §15.231(a)(2) ]

Alarm transmissions consist of 3 packets. The packet duration is, at most, 30 mS, see **Duty Cycle Correction Factor** [§15.231(b)(2) and §15.35(c)]. The time between packets random between 100 mS and 450 mS so the length of the longest transmission is:

$$3*30\text{mS} + 2*450\text{mS} = 0.99 \text{ seconds.}$$

The following plot shows a 3-packet transmission that concludes in less than 5 seconds.

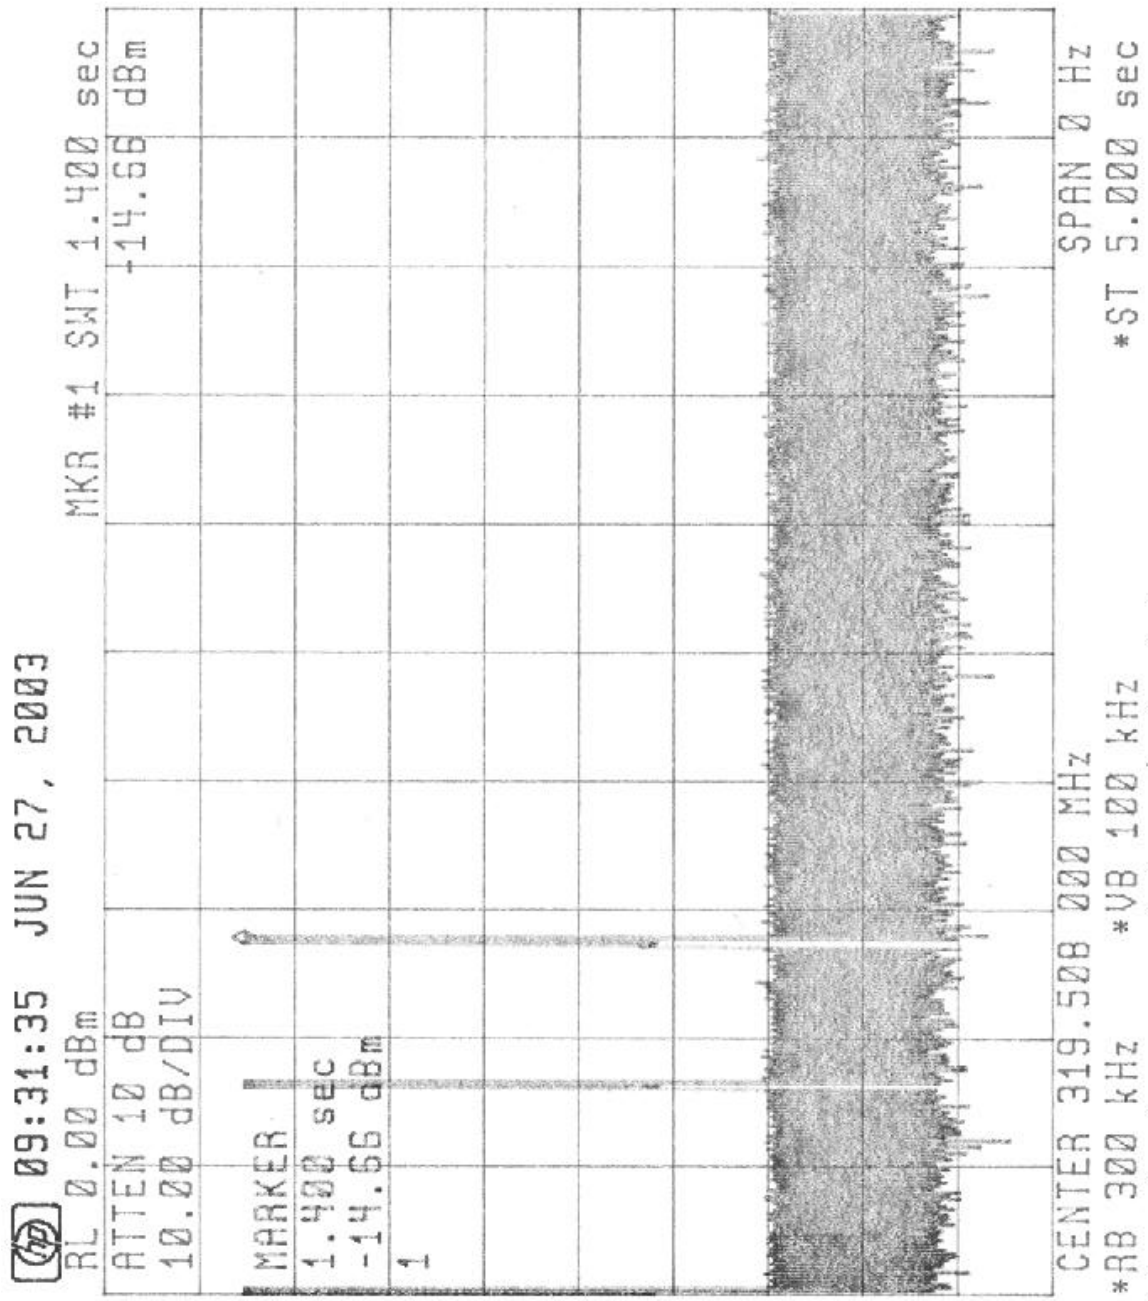

## GE Interlogix, Inc

### 3.1.2 Supervisory Calculation [ §15.231(a)(3) ]

As permitted, this device may transmit three packets for supervision purposes. The inter-packet delay is a random time between 100 mS and 450 mS. The packet itself may be as long as 30 ms depending on the data sent. The longest time to conclude a supervisory transmission is then:

$$3 * 30 \text{ mS} + 2 * 450 \text{ mS} = 990 \text{ mS}$$

### 3.1.3 Duty Cycle Correction Factor [§15.231(b)(2) and §15.35(c)]

The transmitter employs amplitude modulation and transmits 80 bits. Each bit has an “ON” time of 122  $\mu$ S. The total on time of a single packet is:

$$80 * 122 \mu\text{S} = 9.760 \text{ mS.}$$


Only one packet is sent in any given 100 mS window for a duty cycle correction factor of:

$$20 * \text{LOG}( 9.76/100) = -20.2 \text{ dB}$$


The maximum allowed correction factor is -20.0 dB.

The following plots show:

1. Single packet in 100 mS window.
2. Expanded view of a packet with a duration of 22.84 mS

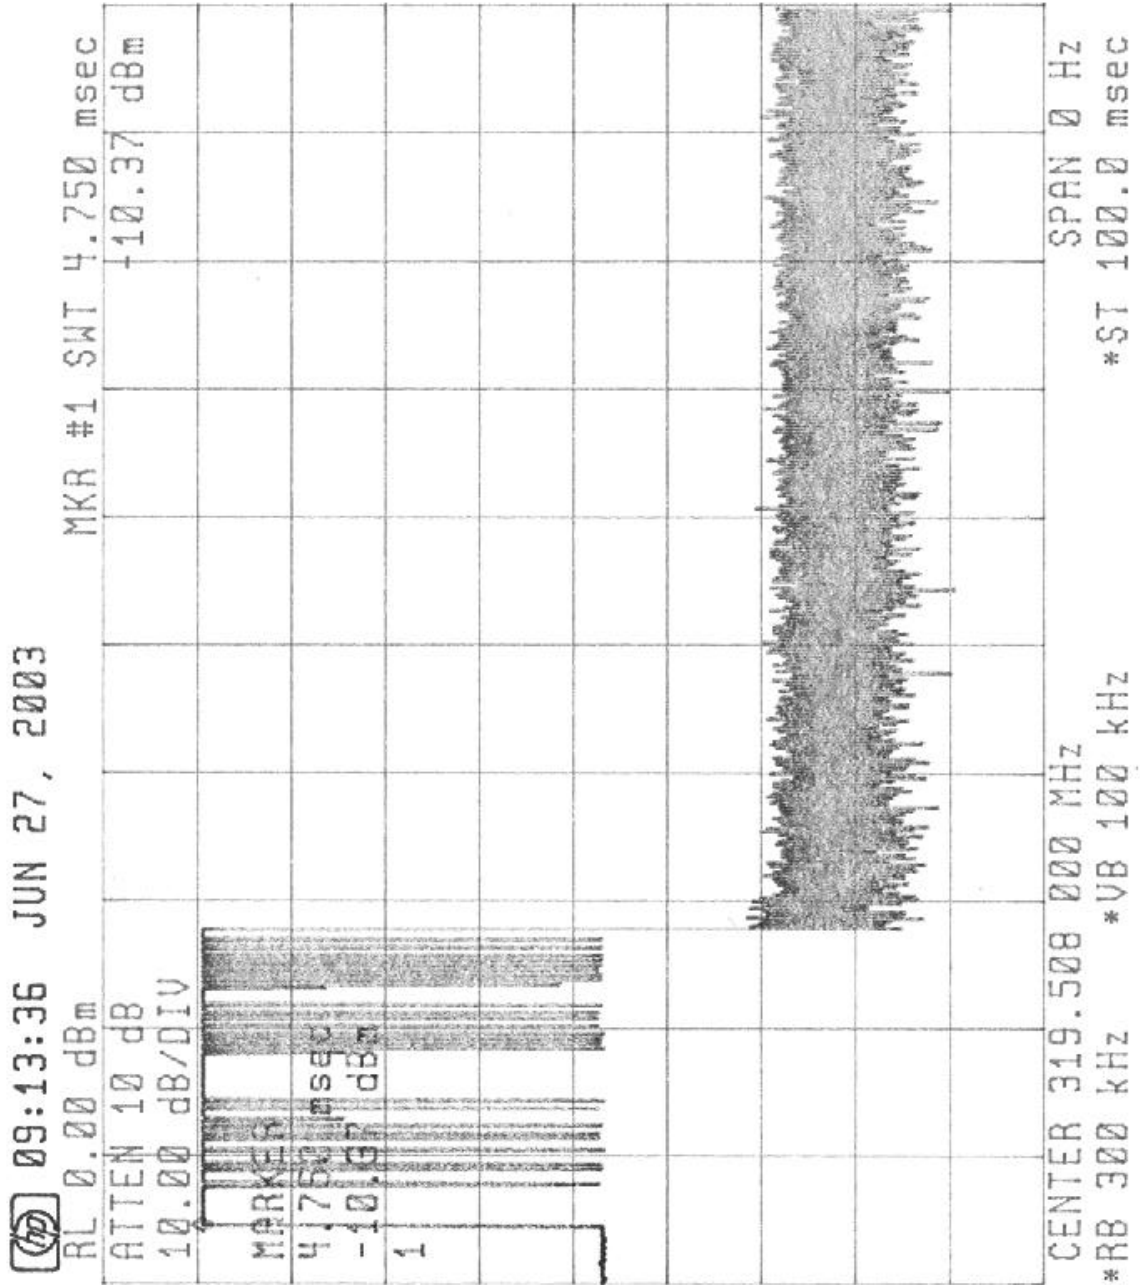

### 3.1.4

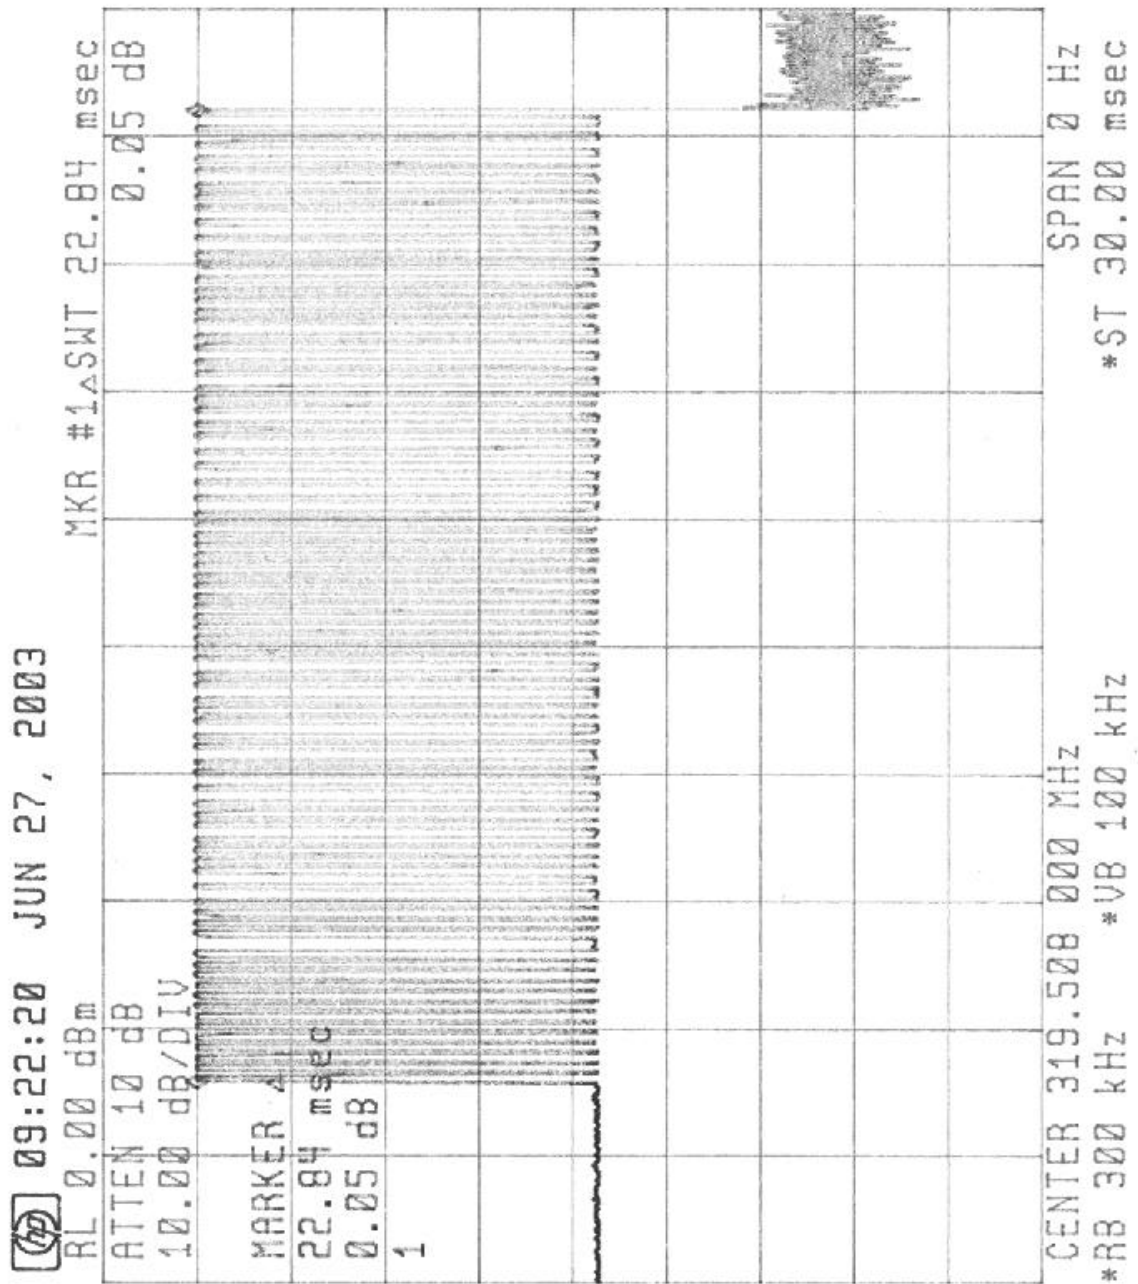

## GE Interlogix, Inc

Bandwidth Measurement [ §15.231(c) ]

Bandwidth Measurements were made in peak mode, using a Hewlett Packard Spectrum Analyzer, model number 70000.

The spectrum analyzer 20 dB skirt bandwidth is 1.8 KHz.


The allowed 20 dB bandwidth is 0.25% of center frequency.


Estimated signal bandwidth = Measured signal bandwidth - analyzer bandwidth.


| Center Frequency<br>MHz | Measured 20 dB<br>Bandwidth in<br>KHz | Estimated 20 dB<br>signal Bandwidth in<br>KHz | FCC allowed 20 dB<br>Bandwidth in<br>KHz |
|-------------------------|---------------------------------------|-----------------------------------------------|------------------------------------------|
| 319.508                 | 43.3                                  | 41.5                                          | 799                                      |

The following three plots show:

1. Bandwidth of carrier without modulation
2. Bandwidth of signal with modulation, 200 KHz span
3. Bandwidth of signal with modulation, 200 MHz span

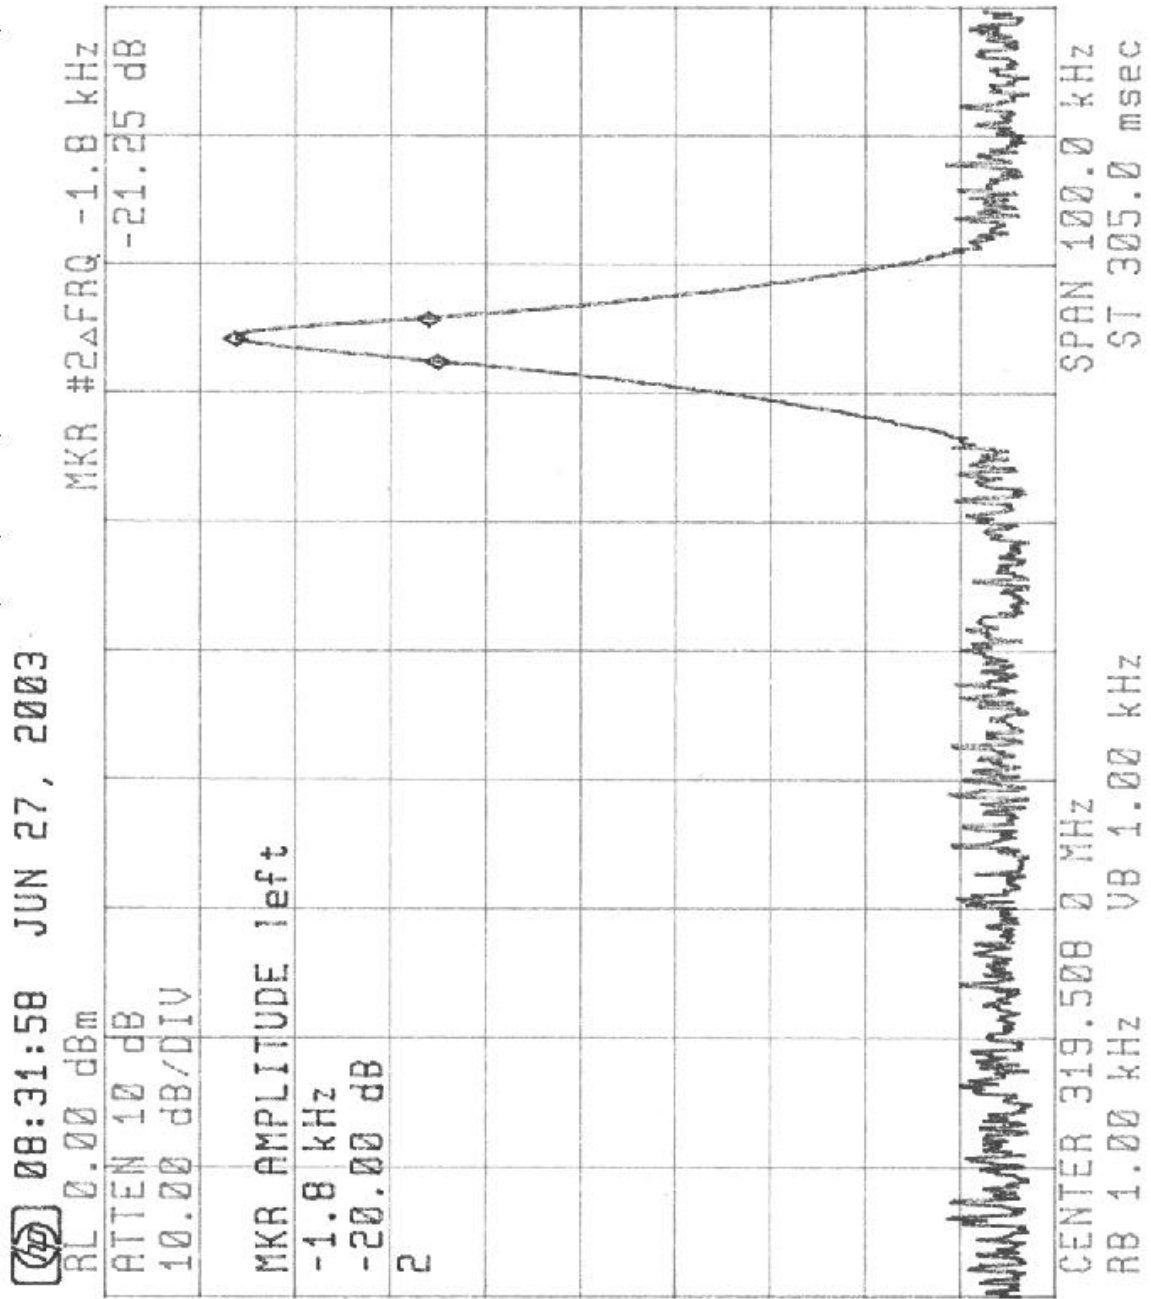

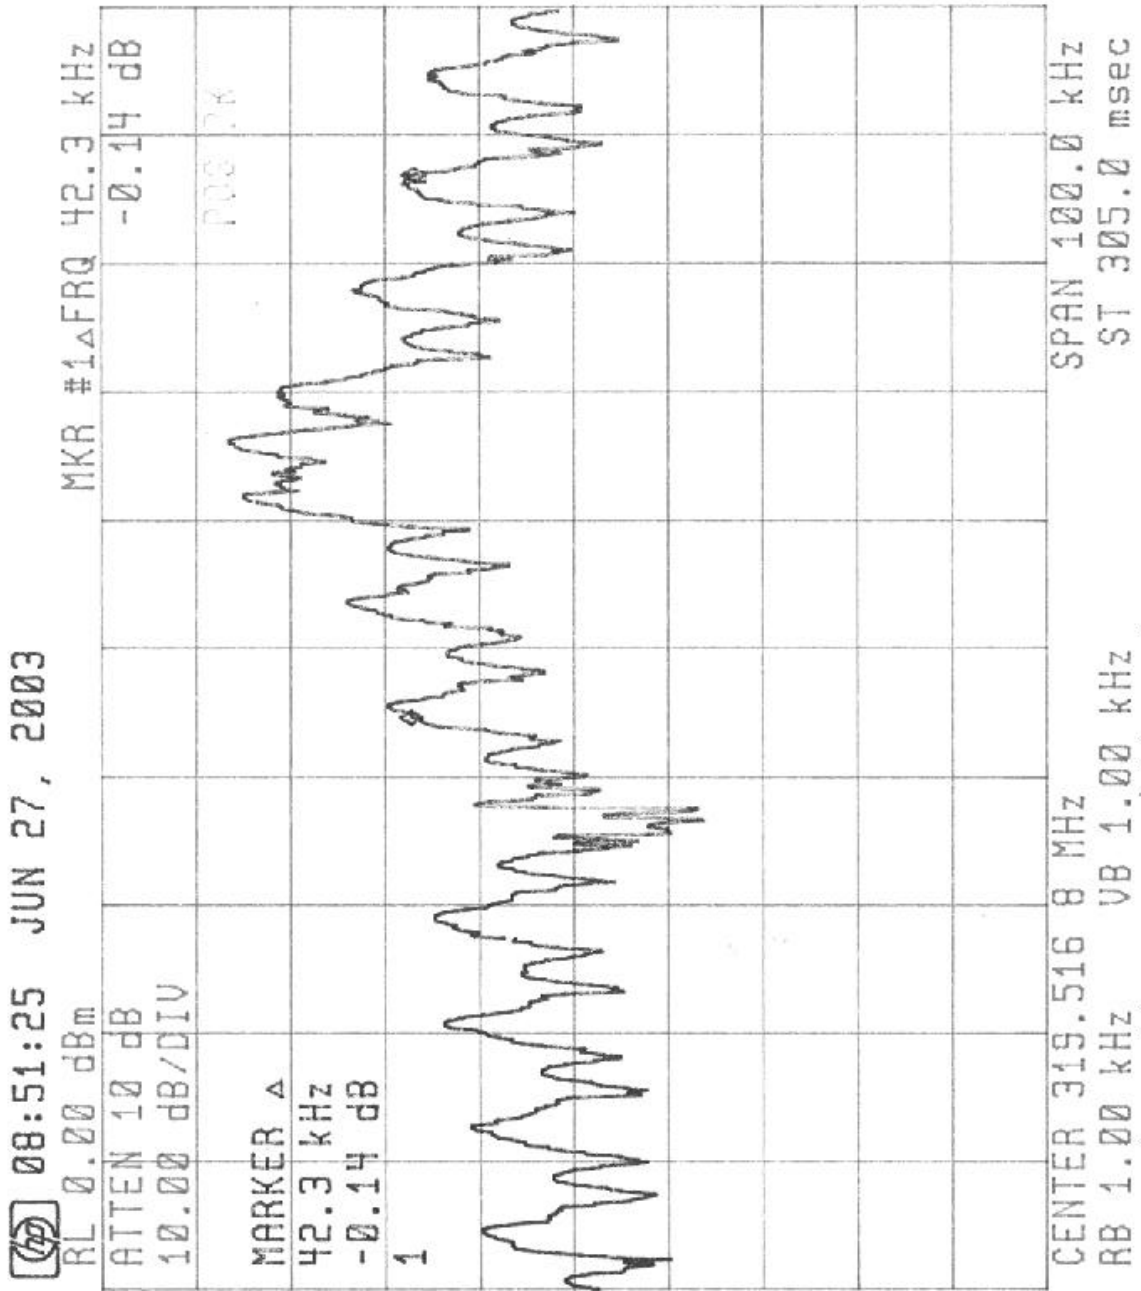

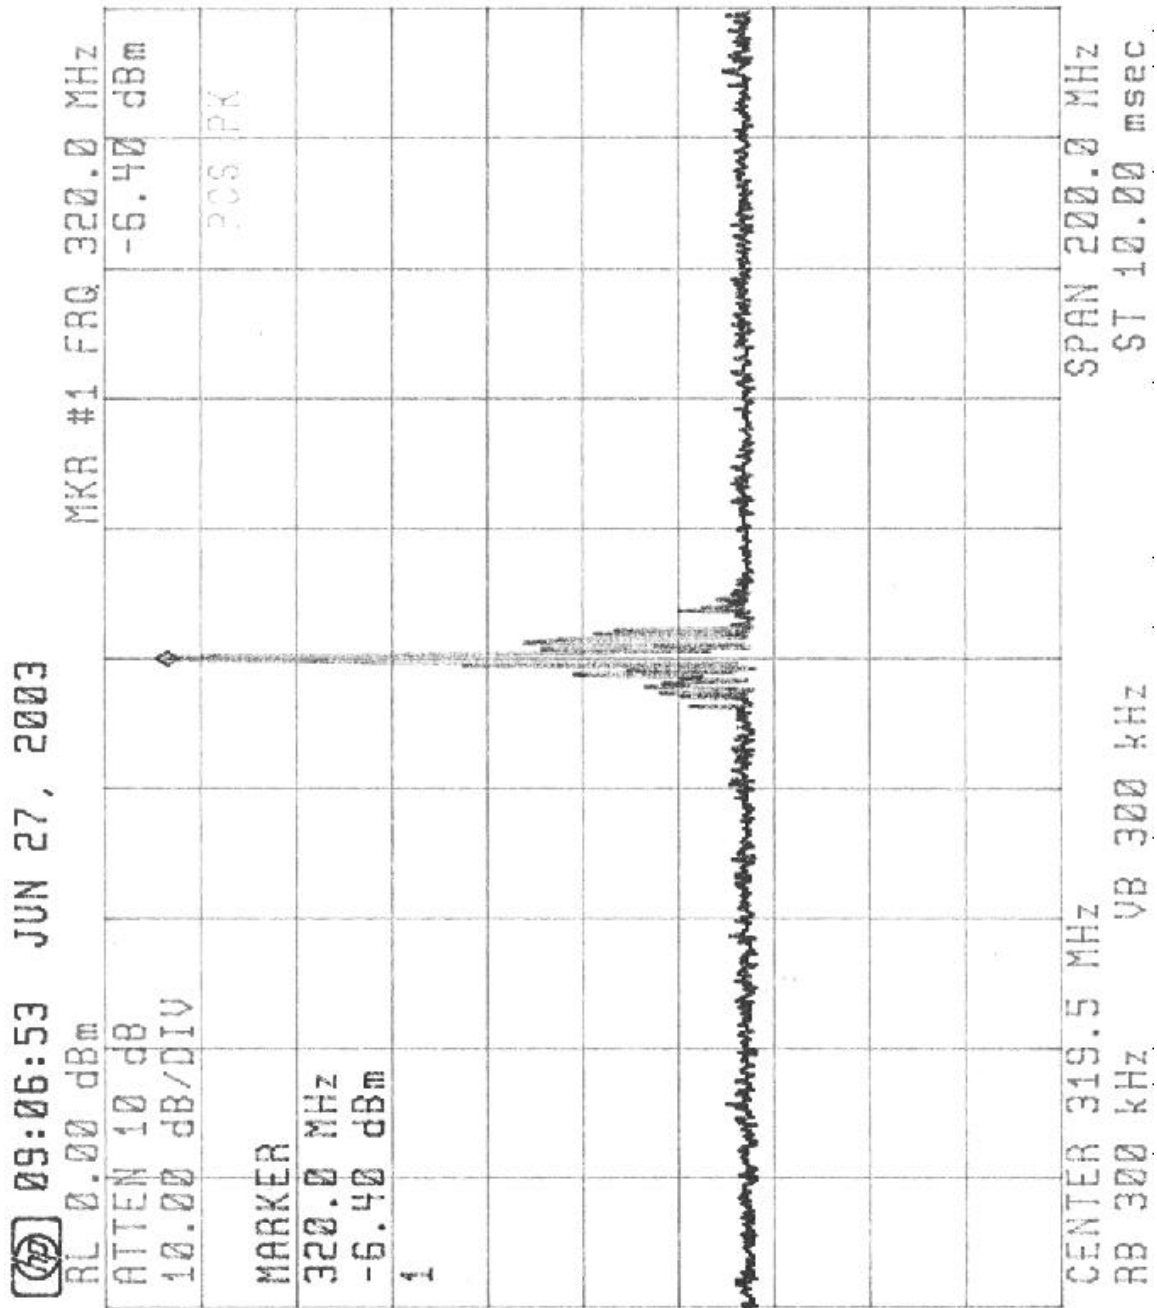

## GE Interlogix, Inc

### 3.1.5 Emissions Measurements

#### 3.1.5.1 Radiated Emissions Summary

The Wireless IR Sensor transmitter passes FCC Rules Part 15, Subpart C, Paragraph 15.231. The highest fundamental radiated emission was 1.53 dB below the FCC limit at 319.5 MHz. The highest spurious emission measurement was 6.79 dB below the FCC limit at 639 MHz. This highest forbidden band spur was 9.14 dB below the FCC limit at 2.236 GHz.

#### 3.1.5.2 FCC Emissions Calculation

##### 3.1.5.2.1 Terms

| Term                  | Abbreviation | Units      | Description                                                                                                                                                    |
|-----------------------|--------------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Analyzer Reading      | AR           | dB $\mu$ V | The power reading read directly from the analyzer without any correction for cabling or receive antenna.                                                       |
| Duty Cycle Correction | DC           | dB         | Correction for averaging measurement, see <b>Duty Cycle Correction Factor</b> [§15.231(b)(2) and §15.35(c)]                                                    |
| Antenna Factor        | AF           | dB         | Calibration factor for measurement antenna which converts from dB $\mu$ V measured with antenna to the field strength received by the antenna in dB $\mu$ V/M. |
| Cable Loss            | CL           | dB         | Amount of power lost in cable (and connectors, if any) between antenna and analyzer                                                                            |
| Pre-Amp               | PA           | dB         | Gain in pre-amp                                                                                                                                                |

## GE Interlogix, Inc

### 3.1.5.2.2 Example Calculation

AR = 99.3 dB $\mu$ V

AF = 13.9 dB

CL = 3.8 dB

DC = 20 dB

PA=26.2 dB

The field strength for comparison to FCC limits is found to be:

$$AR + AF + CL - DC - PA = 99.3 + 13.9 + 3.8 - 20 - 26.2 = 70.8 \text{ dB}\mu\text{V/M}$$

Alternatively, the AR + AF + CL - PA is compared to the FCC limit + DC. This number is often written to the right of measurement data on the test results. For example, the FCC limit for ITI transmitters at 319.5 MHz is approximately 95.9 dB $\mu$ V/M. The limit from §15.231(b) with linear interpolation yields a limit, without consideration for duty cycle, of approximately 75.9 dB $\mu$ V/M.

To convert to  $\mu$ V/M the following equation is used:

$$\mu\text{V/M} = \text{INVLOG}(\text{dB}\mu\text{V/M} / 20)$$

For the above example, 70.8 dB $\mu$ V/M is 3,467.369 $\mu$ V/M

### 3.1.5.3 Radiated Emissions

The highest fundamental emission along with the three highest spurious and restricted band emissions are listed below as per ANSI C63.4 paragraph 10.1.8.2. Emissions from 0.009 MHz to the tenth harmonic were measured as per FCC Rules Part 15, Subpart C, Paragraph 15.33(a). Emission limits were derived from §15.231(b).

| Frequency | Analyzer Reading | Duty Cycle Correction | Cable Loss | Antenna Factor | Pre-Amp | Field Strength | Field Strength | FCC Limit |
|-----------|------------------|-----------------------|------------|----------------|---------|----------------|----------------|-----------|
| MHz       | dB $\mu$ V       | dB                    | dB         | dB             | dB      | dB $\mu$ V/M   | $\mu$ V/M      | $\mu$ V/M |
|           |                  |                       |            |                |         |                |                |           |
| 319.5     | 77.80            | 20                    | 2.6        | 14.0           | 0       | 74.37          | 5,230          | 6,229     |
| 639       | 51.40            | 20                    | 3.79       | 19.9           | 0       | 55.11          | 570            | 1,250     |
| 2236      | 55.10            | 20                    | 7.61       | 30.0           | 27.81   | 44.87          | 175            | 500       |
| 2876      | 53.00            | 20                    | 8.6        | 31.1           | 28.47   | 44.26          | 163            | 500       |

## GE Interlogix, Inc

### 3.1.5.4 *Forbidden Bands*

Noise floor of spectrum analyzer with antenna factors and duty cycle correction converted to  $\mu\text{V/M}$  at approximately one meter.

All measurements were taken with an HP 8566B Spectrum Analyzer. The bandwidth was 100 KHz for measurements below 1000 MHz. The bandwidth was 1 MHz for measurements above 1000 MHz. The video filter was off.

The noise floor measurements are summarized in the table below. See also the test data included in this report.

|                                   |                           |               |
|-----------------------------------|---------------------------|---------------|
| FCC_REPT.DOC<br>06/27/03 10:45 AM | <b>FCC ID: B4Z-587-IR</b> | Page 18 of 19 |
|-----------------------------------|---------------------------|---------------|

# GE Interlogix, Inc

| Frequency Range |            |                     |                 |                |                |                |                |                  |  |
|-----------------|------------|---------------------|-----------------|----------------|----------------|----------------|----------------|------------------|--|
| Low Limit       | High Limit | Noise Floor Reading | Duty Cycle Corr | Field Strength | Field Strength | FCC Limit @ 3M | FCC Limit @ 1M |                  |  |
| MHz             | MHz        | dBuV                | dB              | dBuV/M         | uV/M           | uV/M           | uV/M           |                  |  |
| 0.09000         | 0.11000    | N/A                 | 20              | N/A            | N/A            | 2400/F         |                |                  |  |
| 0.49500         | 0.50500    | N/A                 | 20              | N/A            | N/A            | 2400/F         |                |                  |  |
| 2.13750         | 2.19050    | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 4.12500         | 4.12800    | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 4.17725         | 4.17775    | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 4.20725         | 4.20775    | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 6.21500         | 6.21800    | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 6.26775         | 6.26825    | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 6.31175         | 6.31225    | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 8.29100         | 8.29400    | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 8.36200         | 8.36600    | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 8.37625         | 8.38675    | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 8.41425         | 8.41475    | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 12.29000        | 12.29300   | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 12.51975        | 12.52025   | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 12.57675        | 12.57725   | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 13.36000        | 13.41000   | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 16.42000        | 16.42300   | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 16.69475        | 16.69525   | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 16.80425        | 16.80475   | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 25.50000        | 25.67000   | N/A                 | 20              | N/A            | N/A            | 30             | 90             |                  |  |
| 37.50000        | 38.25000   | 23.00               | 20              | 3.0            | 1.4            | 100            | 300            |                  |  |
| 73.00000        | 74.60000   | 17.20               | 20              | -2.8           | 0.7            | 100            | 300            |                  |  |
| 74.80000        | 75.20000   | 19.00               | 20              | -1.0           | 0.9            | 100            | 300            |                  |  |
| 108.00000       | 121.94000  | 14.50               | 20              | -5.5           | 0.5            | 150            | 450            |                  |  |
| 123.00000       | 138.00000  | 14.50               | 20              | -5.5           | 0.5            | 150            | 450            |                  |  |
| 149.90000       | 150.05000  | 14.50               | 20              | -5.5           | 0.5            | 150            | 450            |                  |  |
| 156.52475       | 156.52525  | 14.50               | 20              | -5.5           | 0.5            | 150            | 450            |                  |  |
| 156.70000       | 156.90000  | 14.50               | 20              | -5.5           | 0.5            | 150            | 450            |                  |  |
| 162.01250       | 167.17000  | 14.50               | 20              | -5.5           | 0.5            | 150            | 450            |                  |  |
| 167.72000       | 173.20000  | 14.50               | 20              | -5.5           | 0.5            | 150            | 450            |                  |  |
| 240.0           | 285.0      | 21.80               | 20              | 1.8            | 1.2            | 200            | 600            |                  |  |
| 322.0           | 335.4      | 21.80               | 20              | 1.8            | 1.2            | 200            | 600            |                  |  |
| 399.9           | 410.0      | 21.80               | 20              | 1.8            | 1.2            | 200            | 600            |                  |  |
| 608.0           | 614.0      | 21.80               | 20              | 1.8            | 1.2            | 200            | 600            |                  |  |
| 960.0           | 1240.0     | 21.80               | 20              | 1.8            | 1.2            | 500            | 1500           | 1065, 1171       |  |
| 1300.0          | 1427.0     | 36.80               | 20              | 16.8           | 6.9            | 500            | 1500           | 1384             |  |
| 1435.0          | 1626.5     | 38.00               | 20              | 18.0           | 7.9            | 500            | 1500           | 1491,1597        |  |
| 1645.5          | 1646.5     | 40.90               | 20              | 20.9           | 11.1           | 500            | 1500           |                  |  |
| 1660.0          | 1710.0     | 40.90               | 20              | 20.9           | 11.1           | 500            | 1500           | 1704             |  |
| 1718.8          | 1722.2     | 43.70               | 20              | 23.7           | 15.3           | 500            | 1500           |                  |  |
| 2200.0          | 2300.0     | 28.10               | 20              | 8.1            | 2.5            | 500            | 1500           | 2236             |  |
| 2310.0          | 2390.0     | 28.10               | 20              | 8.1            | 2.5            | 500            | 1500           | 2343             |  |
| 2483.5          | 2500.0     | 28.10               | 20              | 8.1            | 2.5            | 500            | 1500           |                  |  |
| 2655.0          | 2900.0     | 36.90               | 20              | 16.9           | 7.0            | 500            | 1500           | 2662, 2769, 2875 |  |
| 3260.0          | 3267.0     | 32.90               | 20              | 12.9           | 4.4            | 500            | 1500           |                  |  |
| 3332.0          | 3339.0     | 32.90               | 20              | 12.9           | 4.4            | 500            | 1500           |                  |  |
| 3345.8          | 3358.0     | 32.90               | 20              | 12.9           | 4.4            | 500            | 1500           |                  |  |
| 3600.0          | 4400.0     | 32.90               | 20              | 12.9           | 4.4            | 500            | 1500           |                  |  |

Test Data follows on the next two pages.