


Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 21.97 dBm VEW 1 MHz
30 dBm 2.40103808 GHz SWT 5 ms Unit dBm

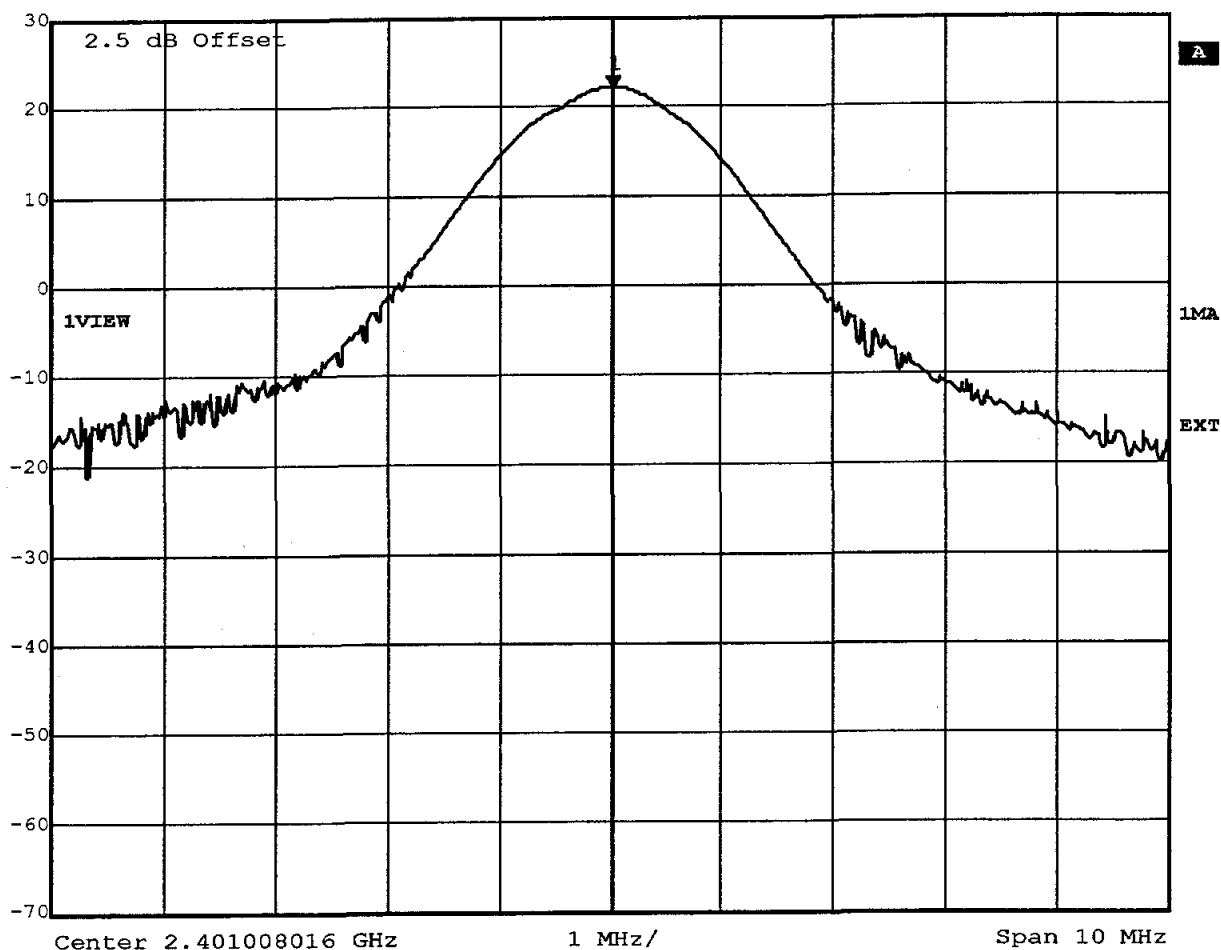

Title: Peak Output Power conducted Ch.: 0
Comment A: GnNetcom Wireless Headset 2G4 FCC Base
Date: 26.NOV.2002 11:03:01




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 22.44 dBm VBW 1 MHz
30 dBm 2.44166132 GHz SWT 5 ms Unit dBm

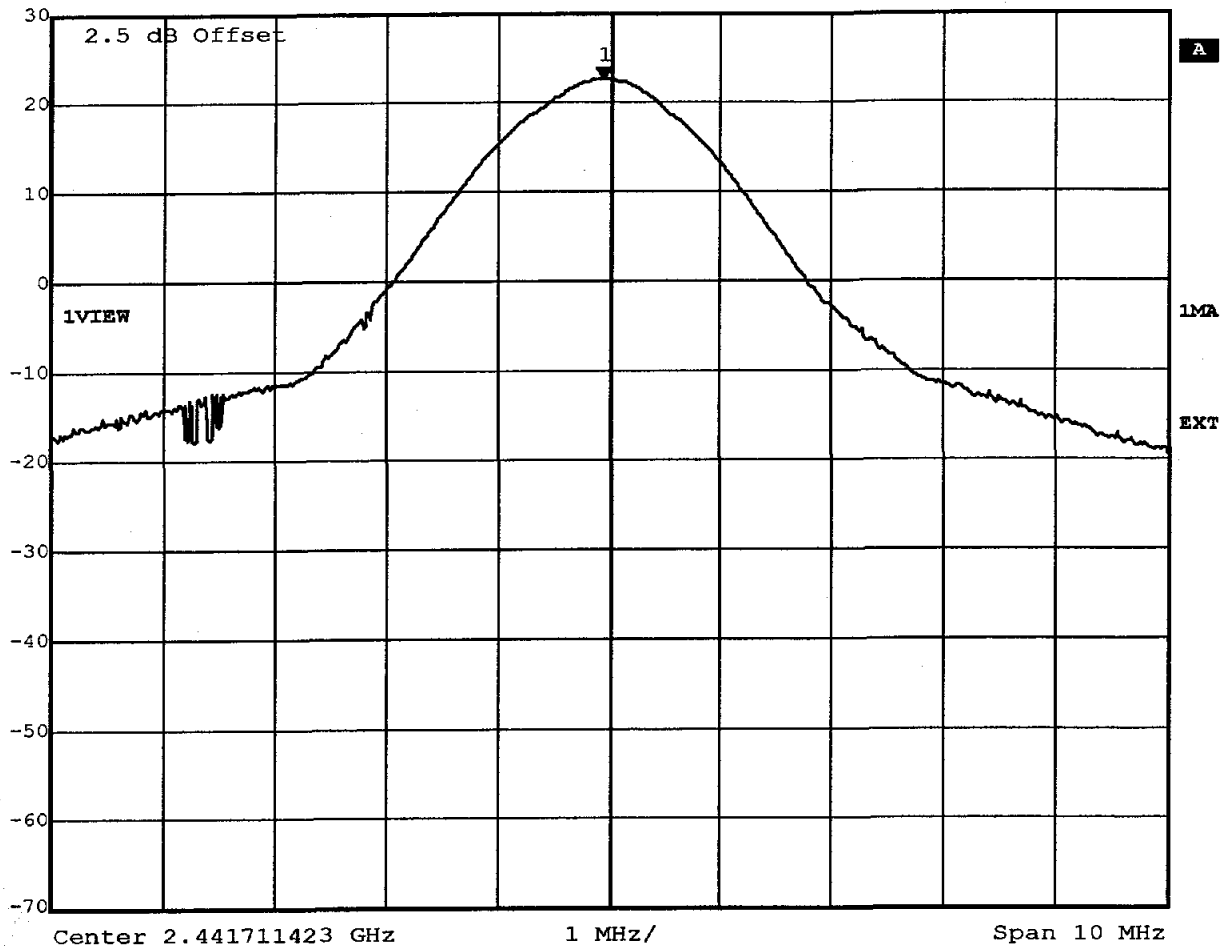

Title: Peak Output Power conducted Ch.: 47
Comment A: GnNetcom Wireless Headset 2G4 FCC Base
Date: 26.NOV.2002 11:21:13




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 22.78 dBm VBW 1 MHz
30 dBm 2.48226198 GHz SWT 5 ms Unit dBm

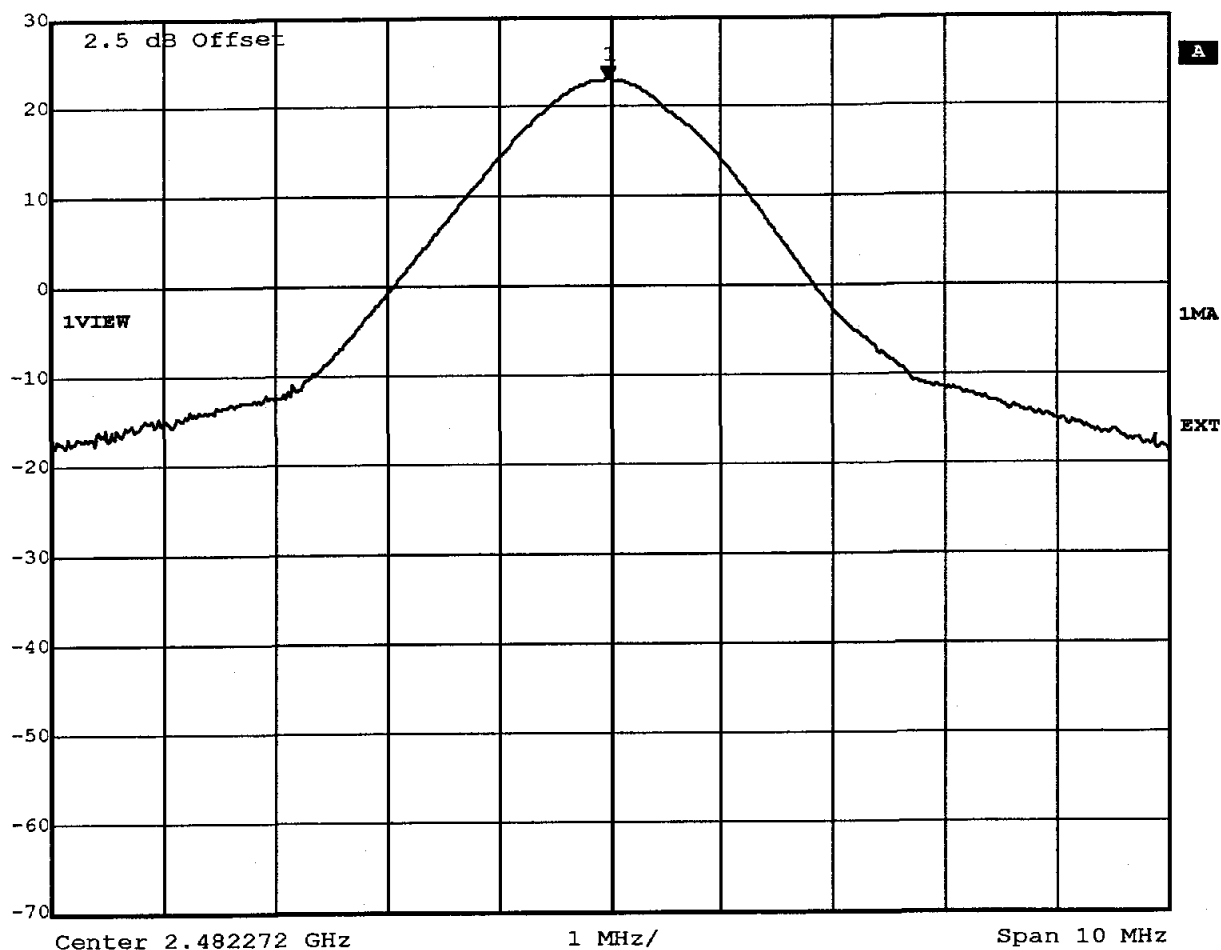

Title: Peak Output Power conducted Ch.: 94
Comment A: GnNetcom Wireless Headset 2G4 FCC Base
Date: 26.NOV.2002 11:11:02


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 17.45dBm, RBW: 5MHz

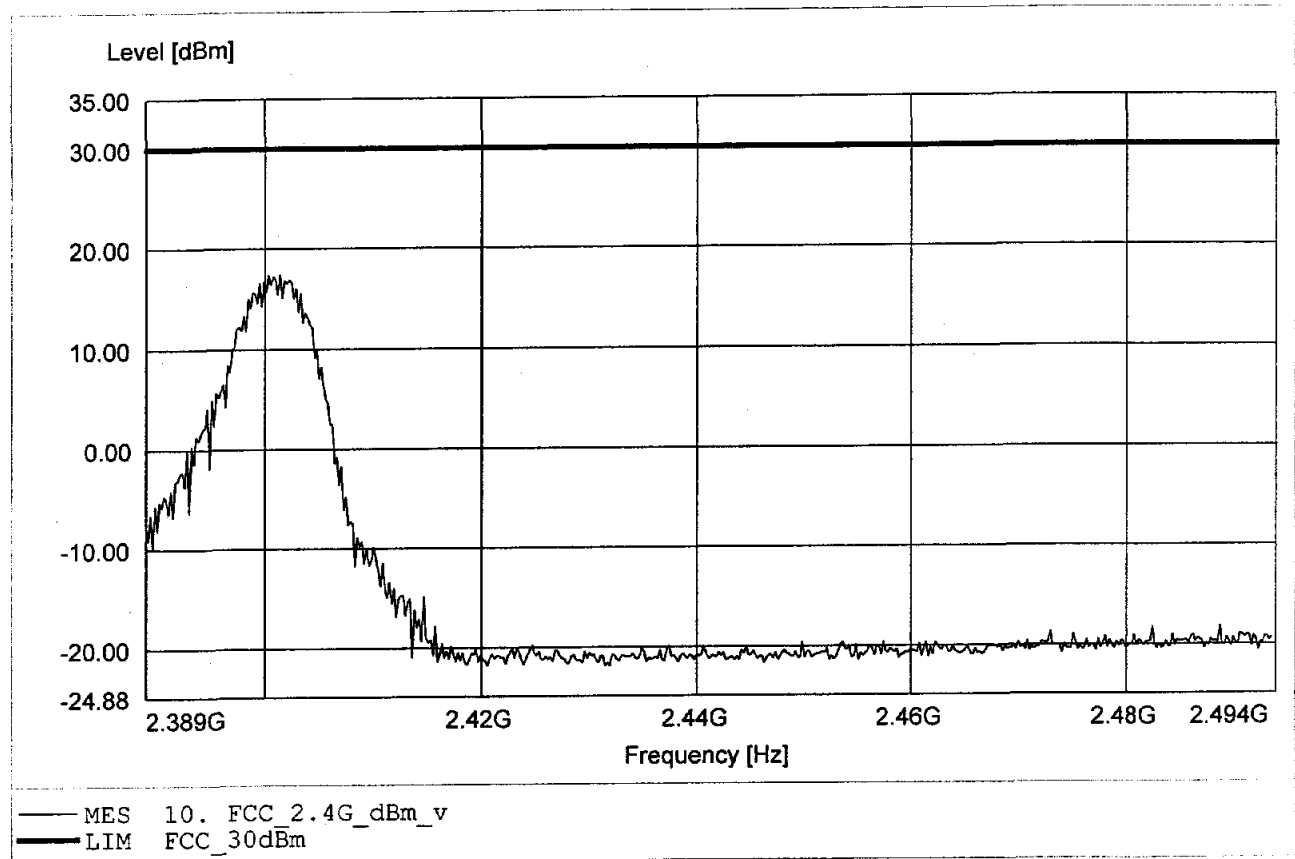


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 20.41dBm, RBW: 5MHz

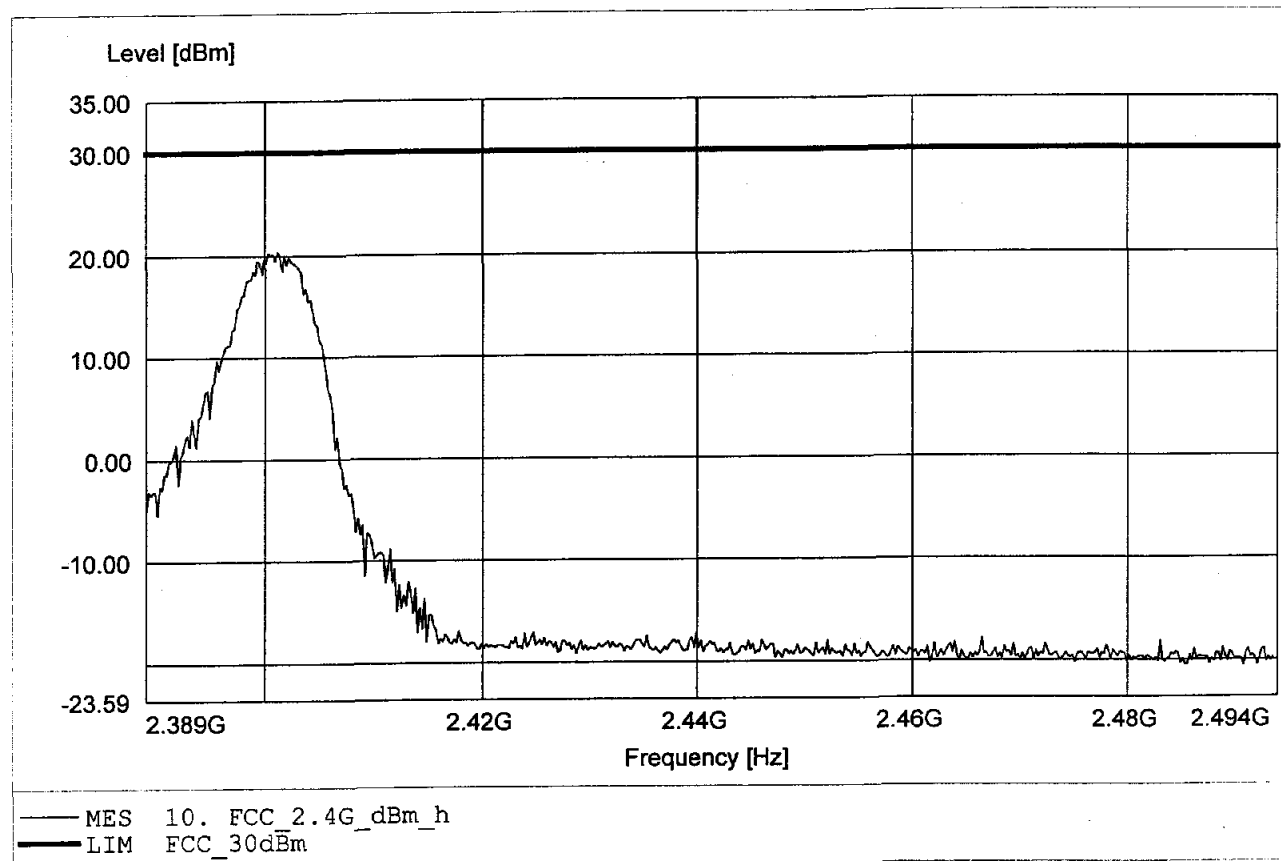


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC -15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 17.53dBm, RBW: 5MHz

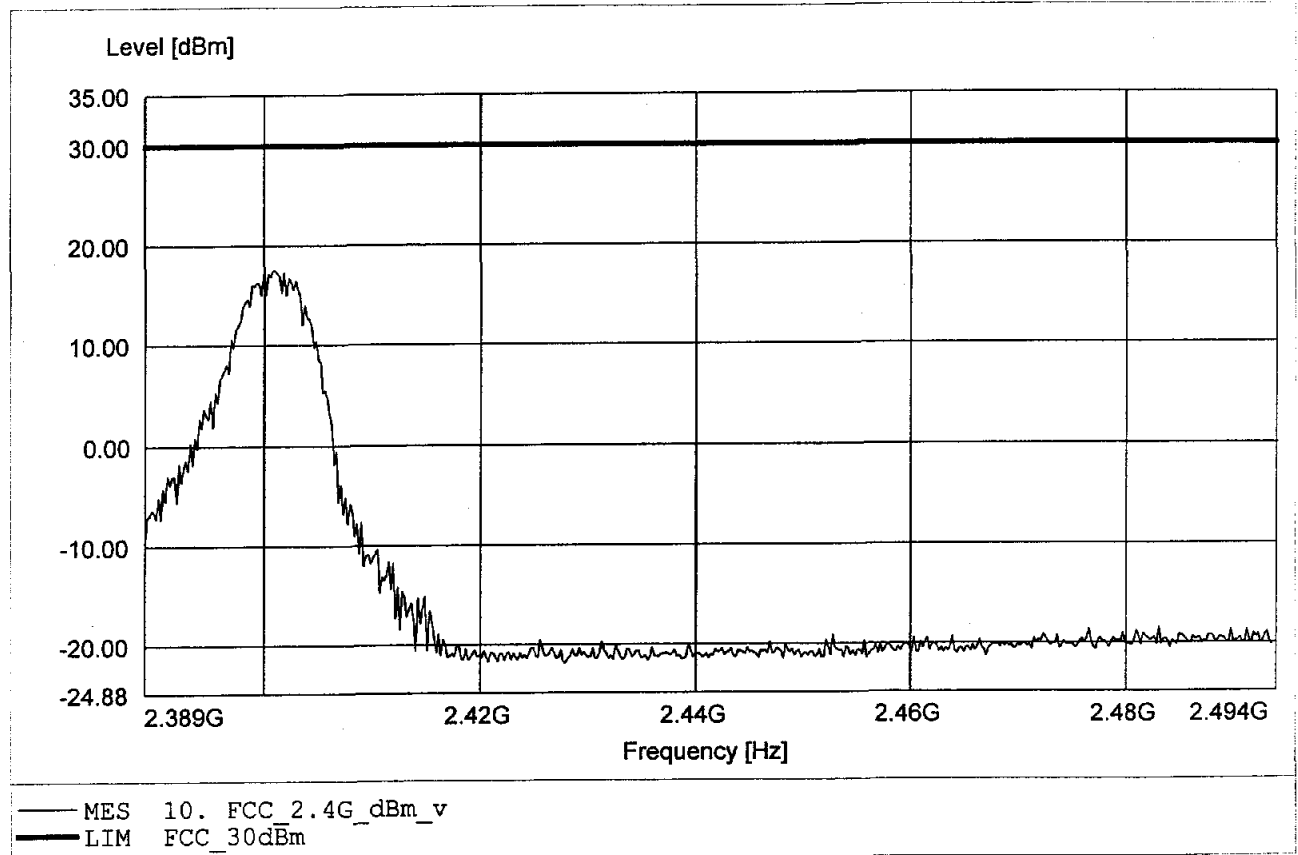


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC -15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 20.42dBm, RBW: 5MHz

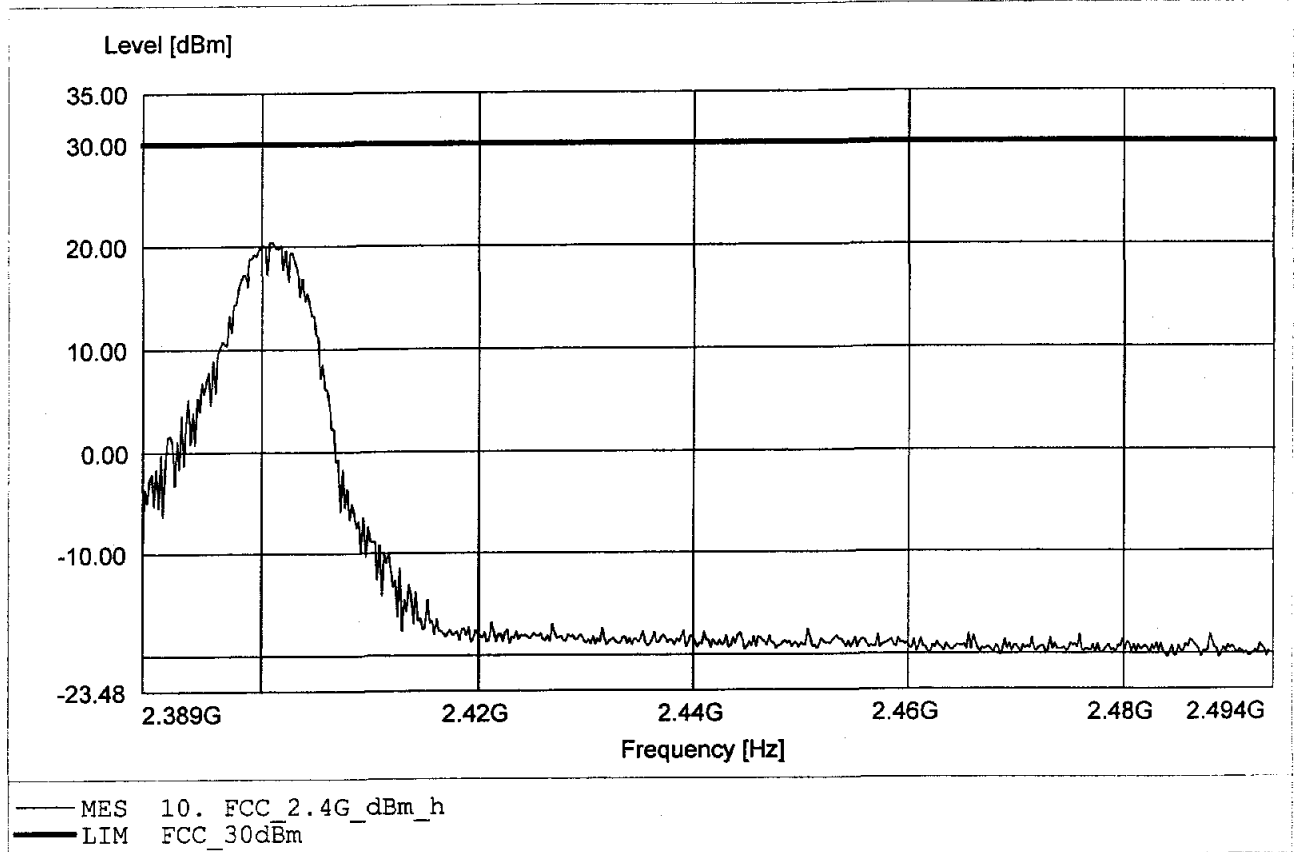


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC +15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 17.52dBm, RBW: 5MHz

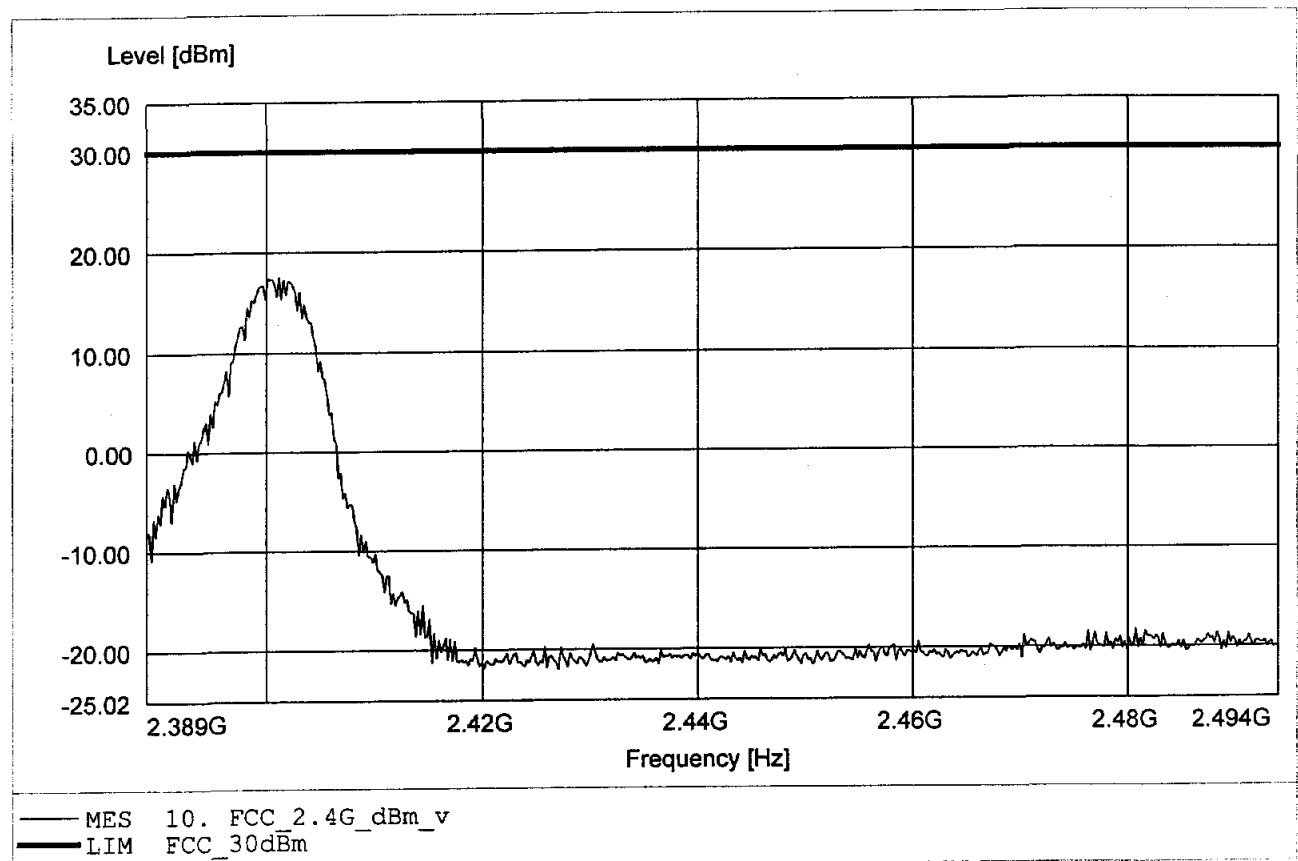


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC +15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Fmax: 20.36dBm, RBW: 5MHz

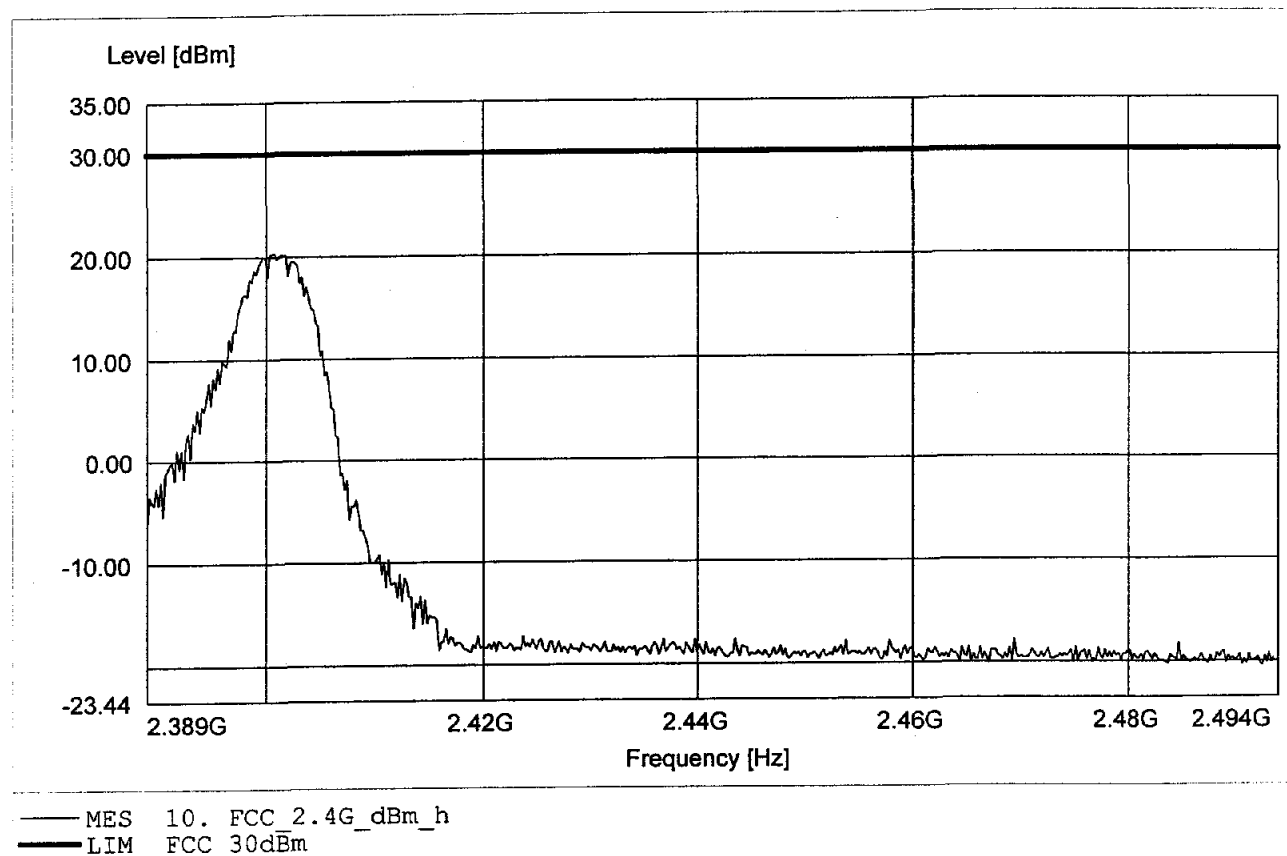


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 18.23dBm, RBW: 5MHz

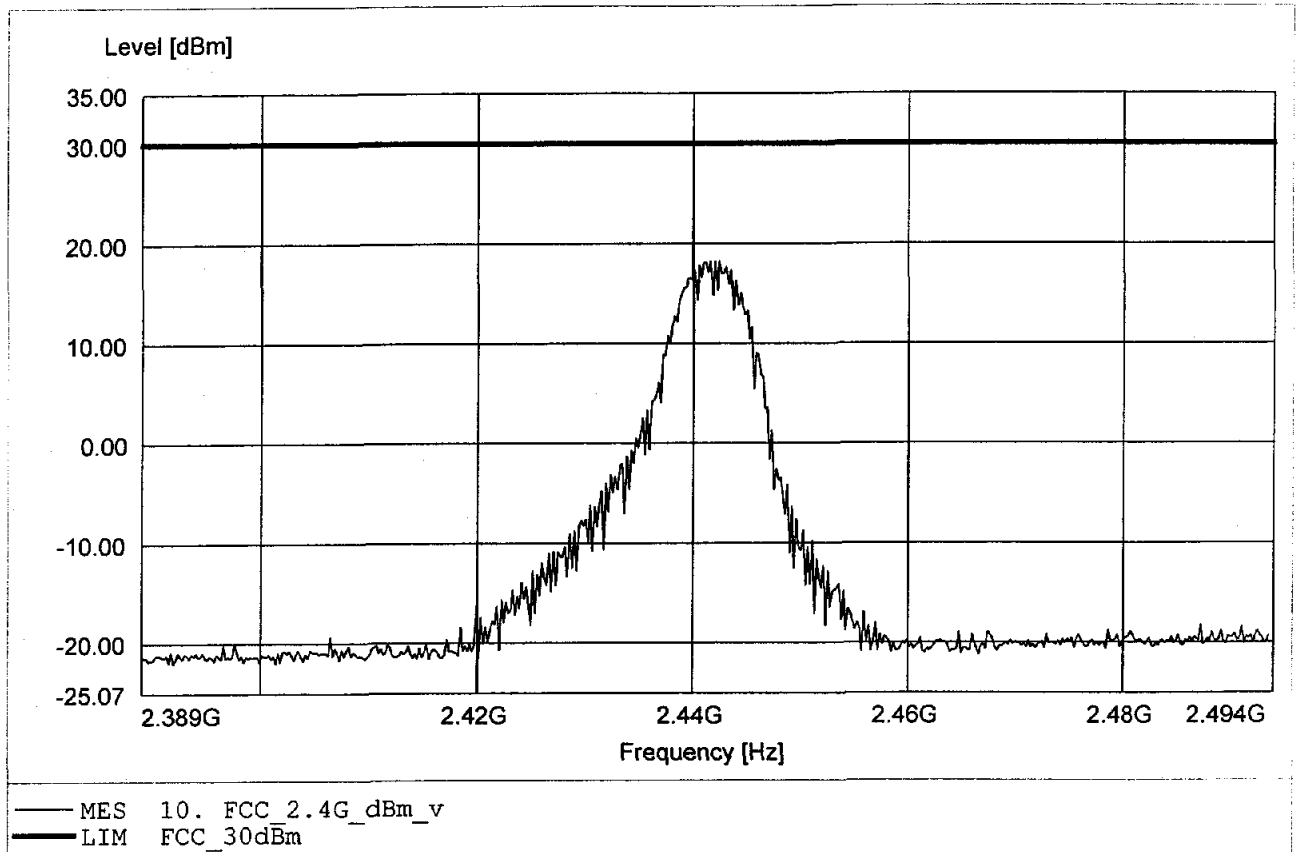


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 19.47dBm, RBW: 5MHz

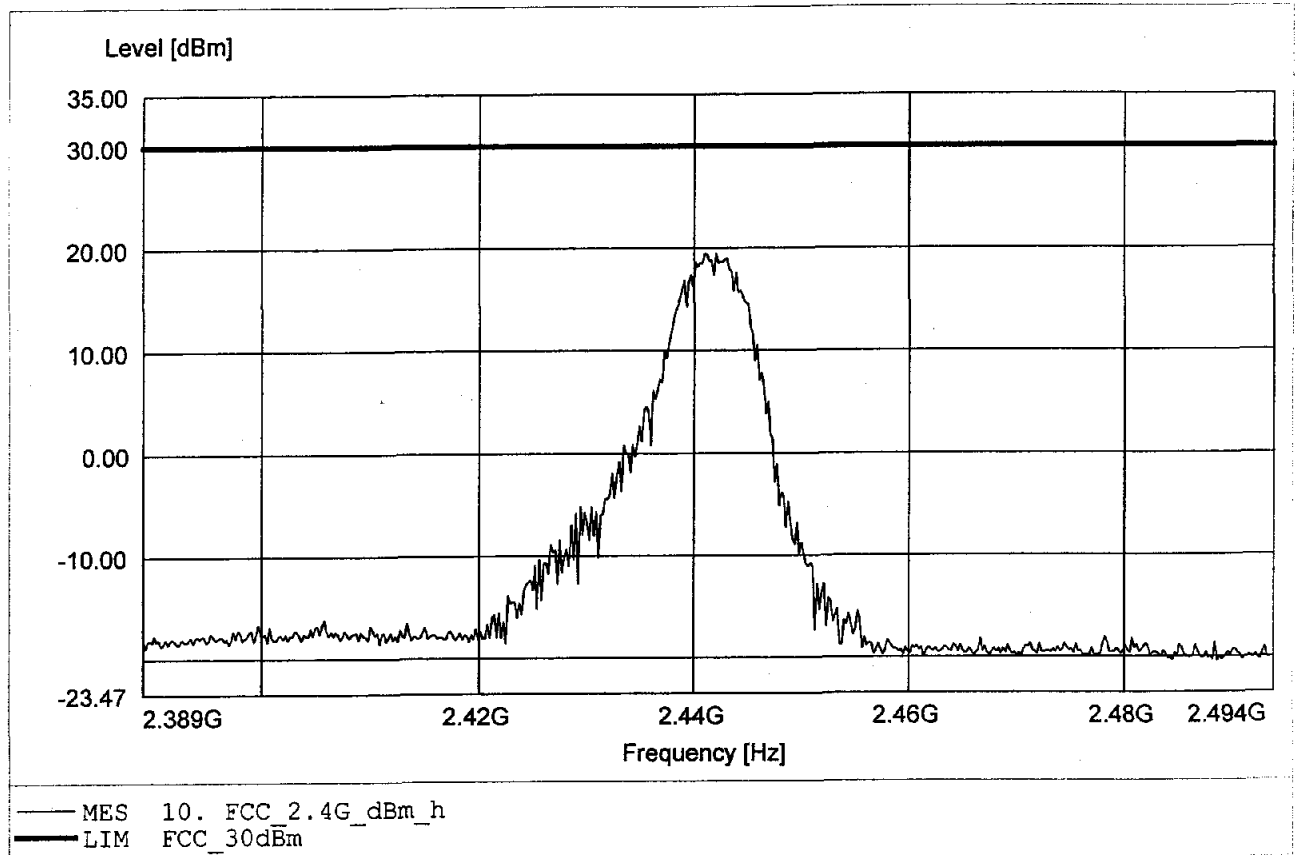


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC -15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 18.34dBm, RBW: 5MHz

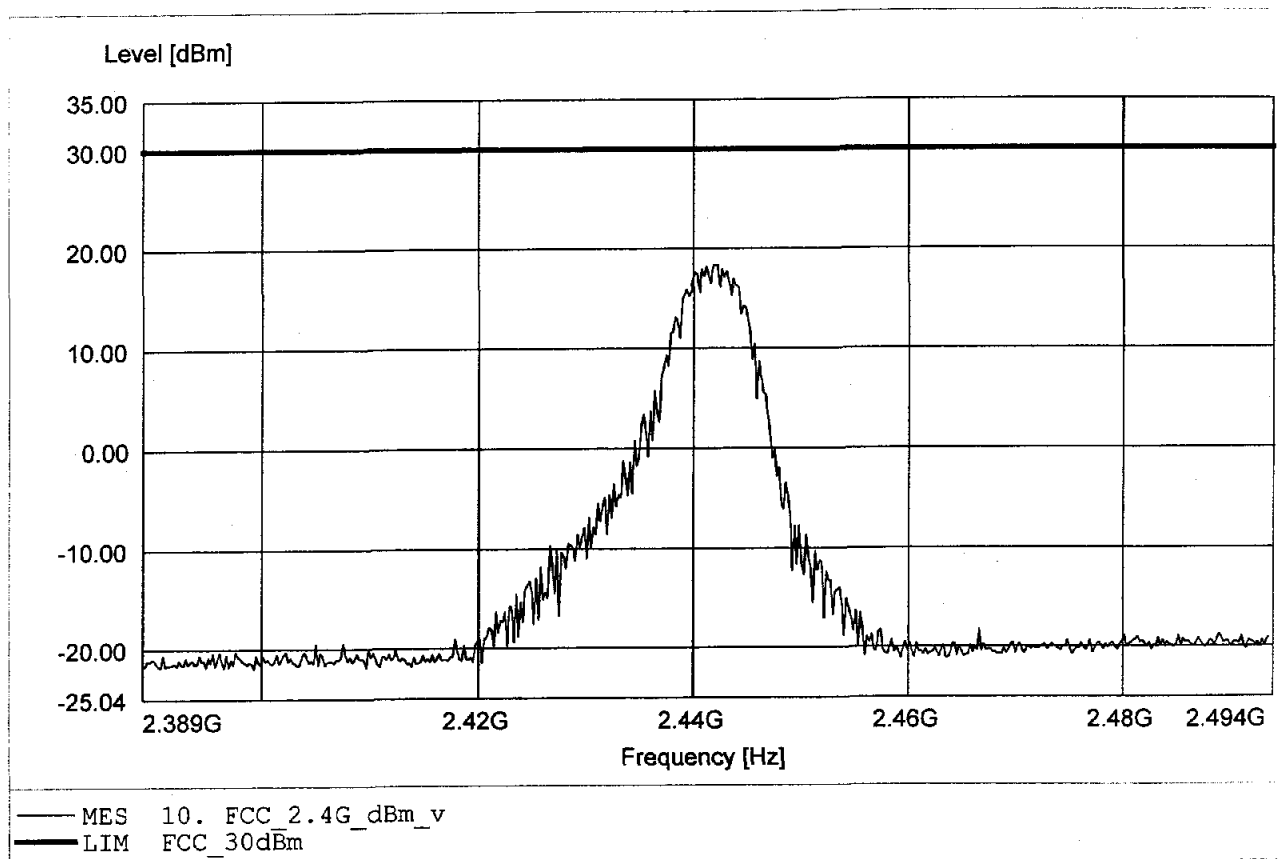


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC -15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 19.34dBm, RBW: 5MHz

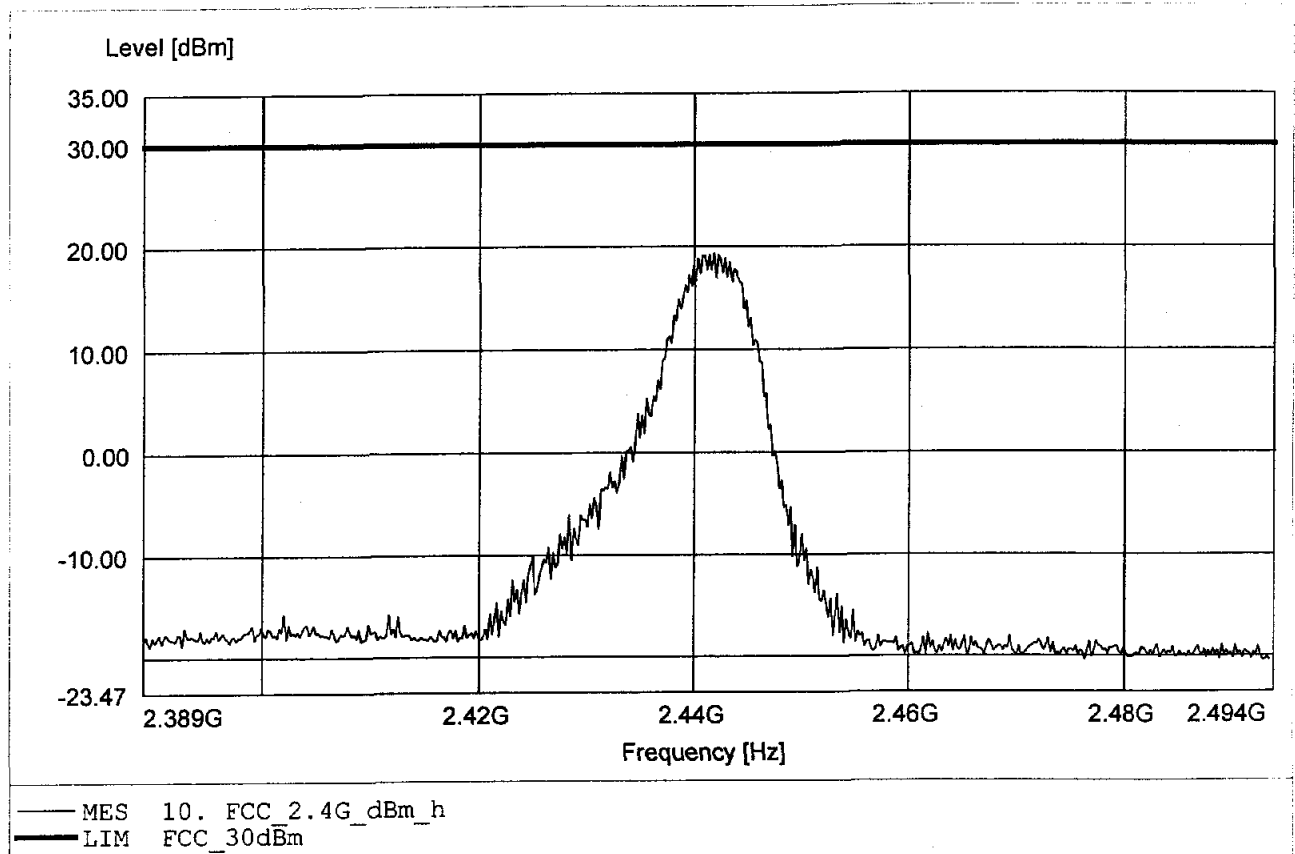


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC +15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 18.34dBm, RBW: 5MHz

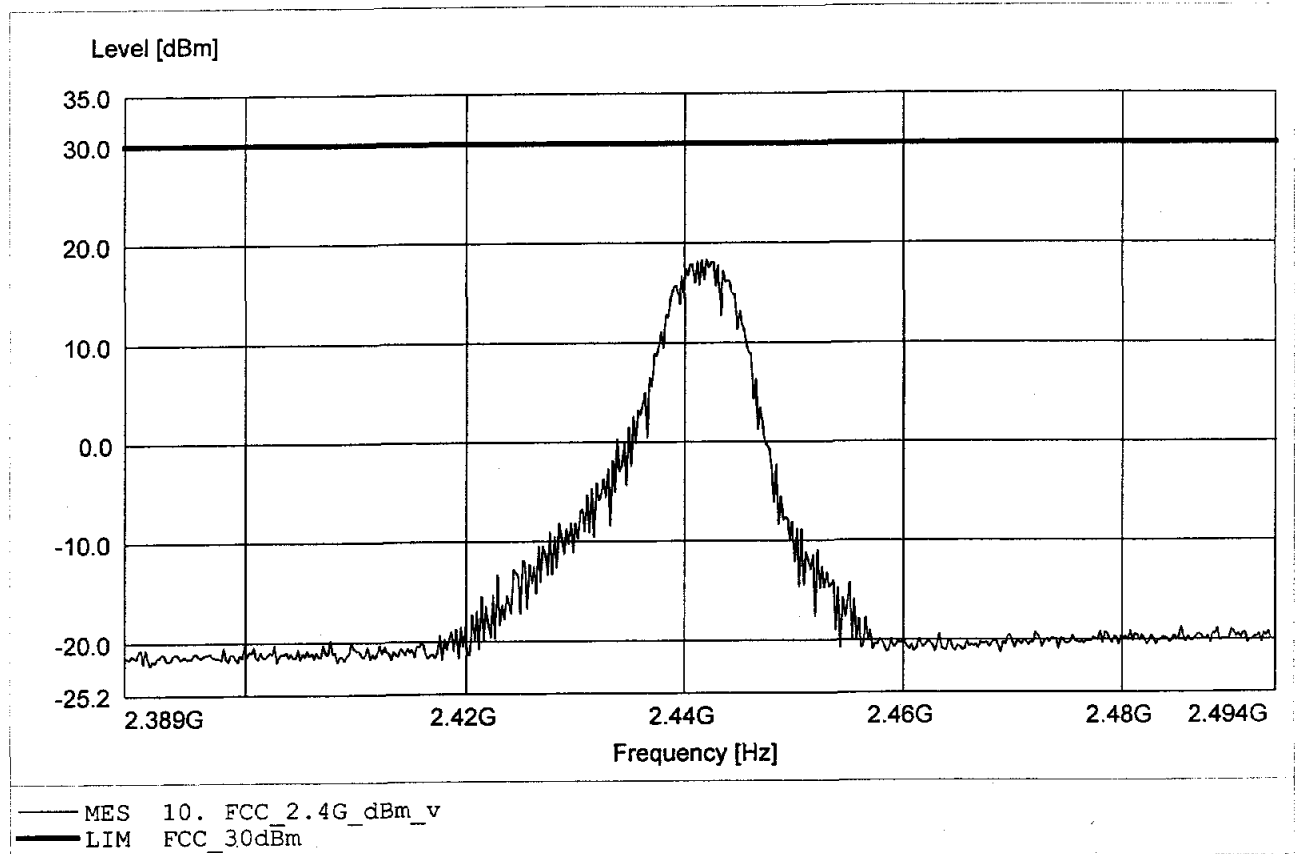


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC +15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 19.34dBm, RBW: 5MHz

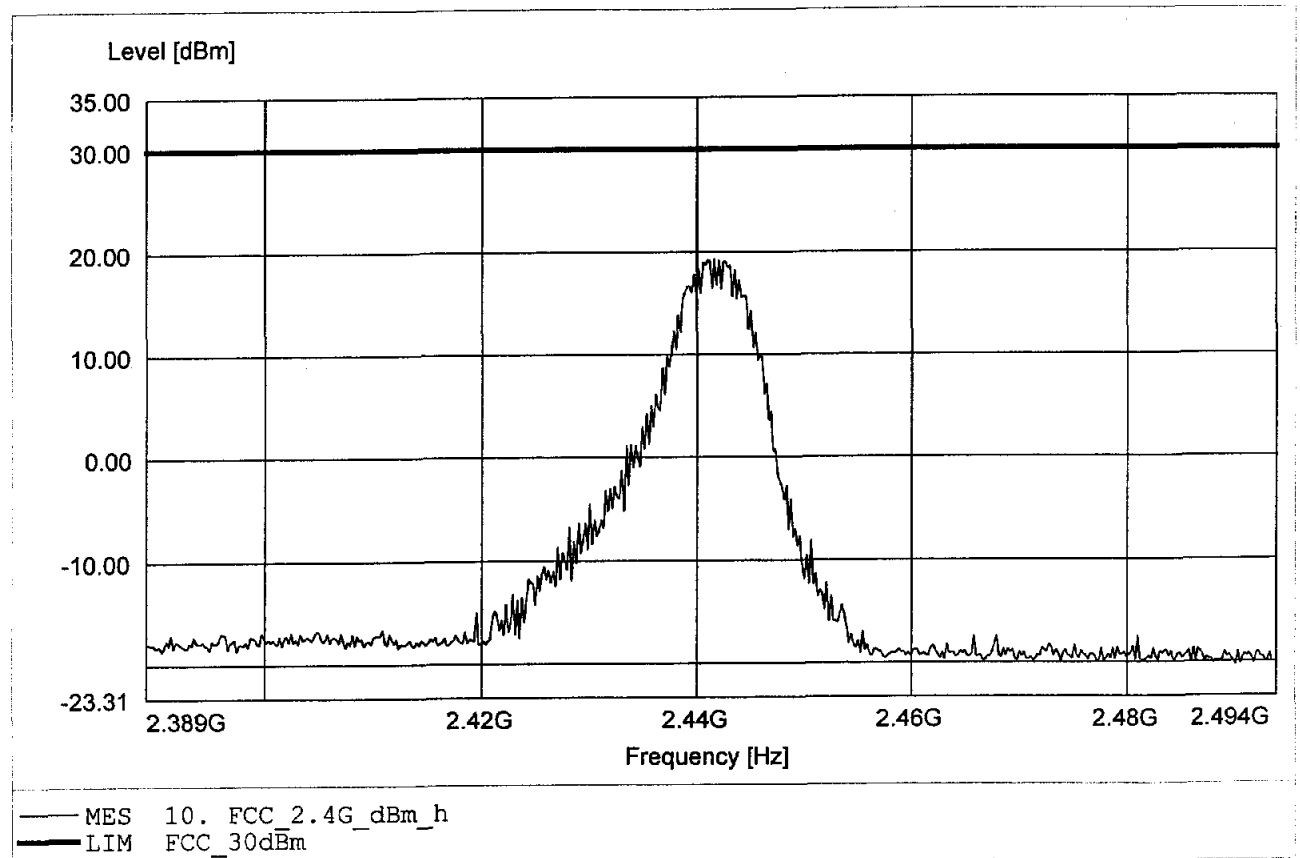


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.483GHz, Pmax: 21.64dBm, RBW: 5MHz

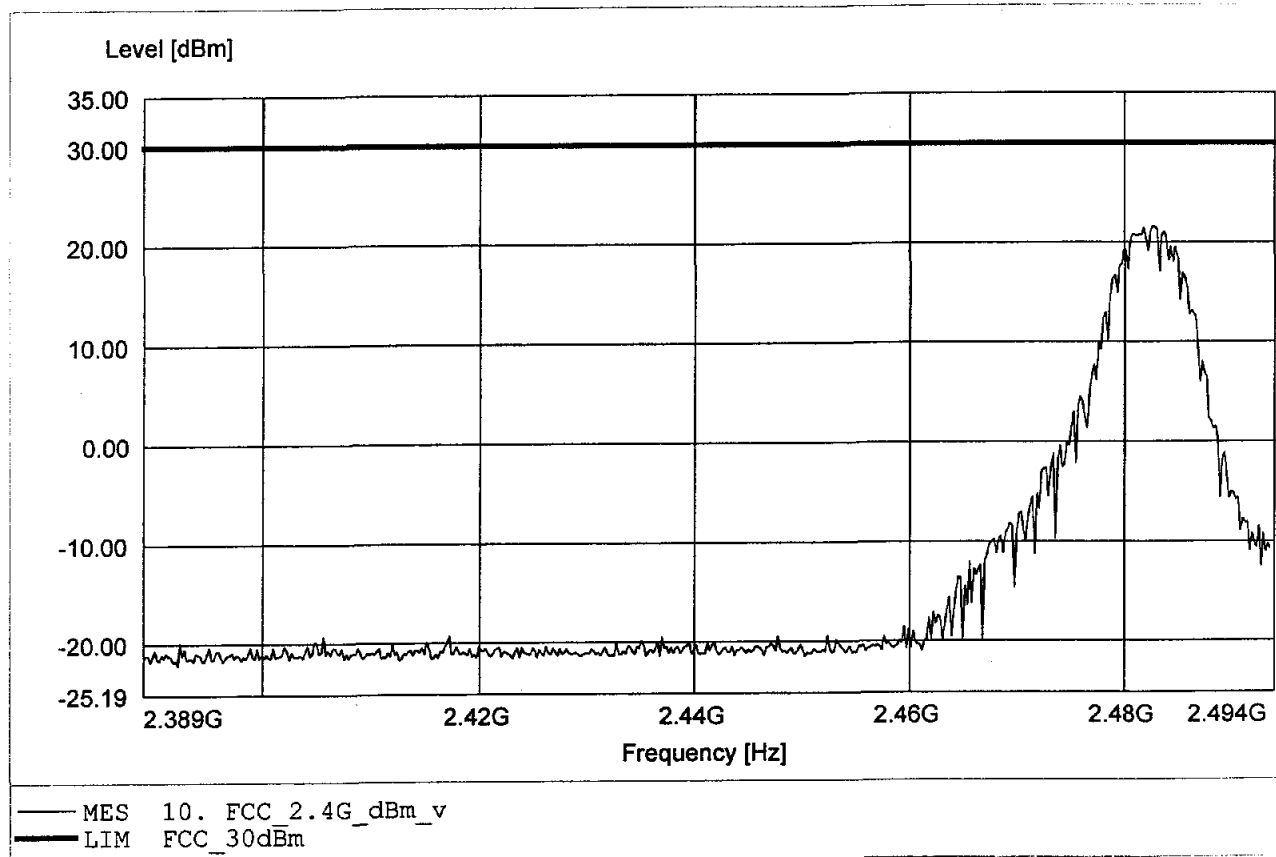


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.483GHz, Pmax: 18.27dBm, RBW: 5MHz

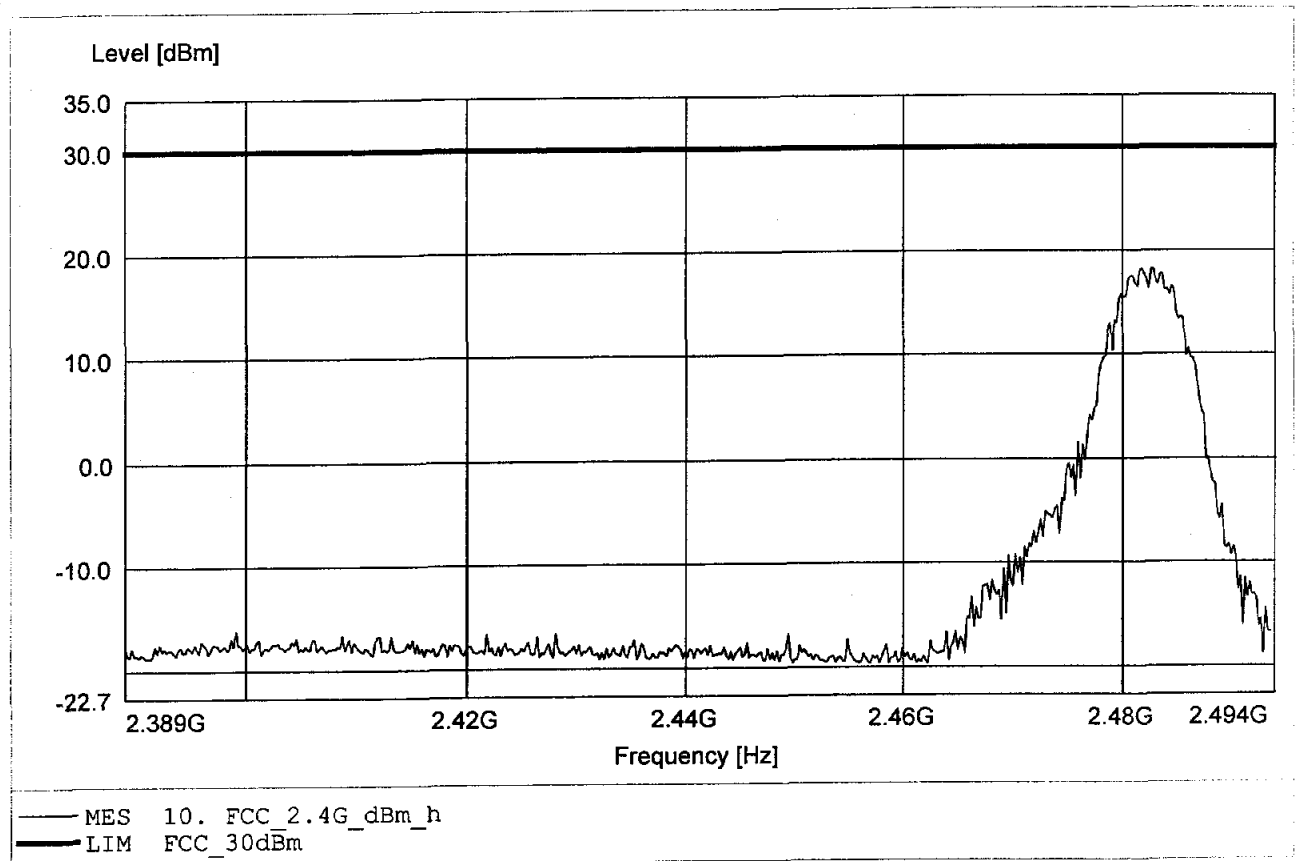


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC -15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.483GHz, Pmax: 21.54dBm, RBW: 5MHz

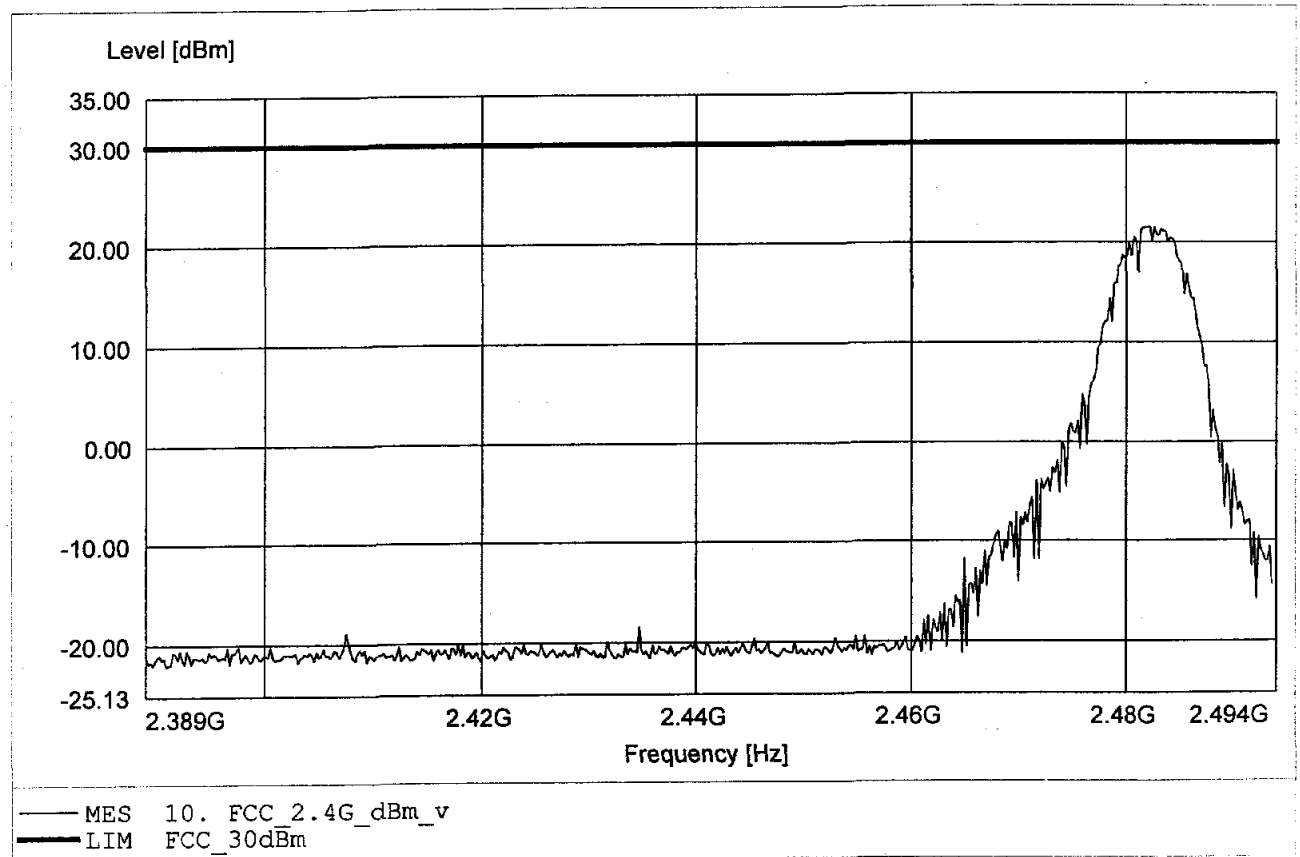


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC -15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 18.50dBm, RBW: 5MHz

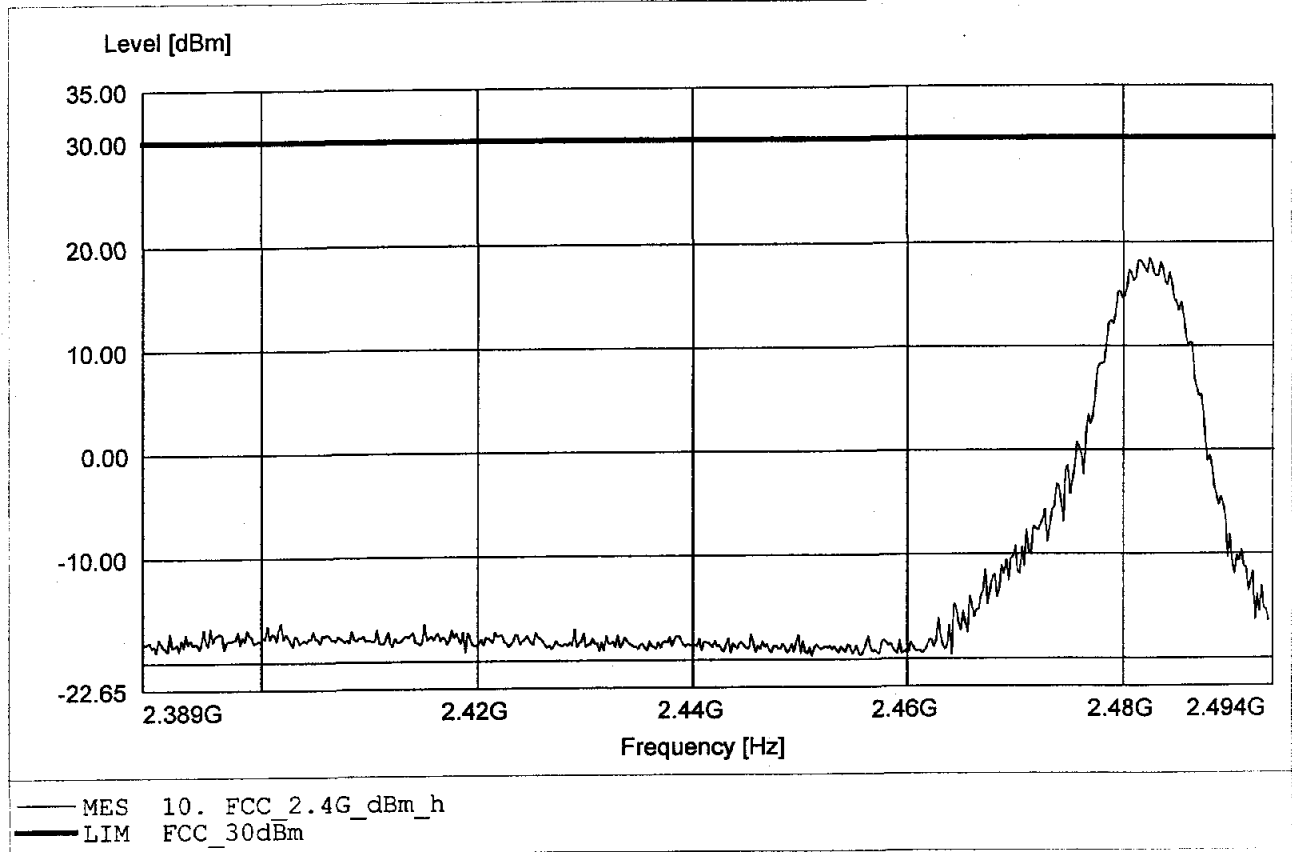


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC +15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.483GHz, Pmax: 21.58dBm, RBW: 5MHz

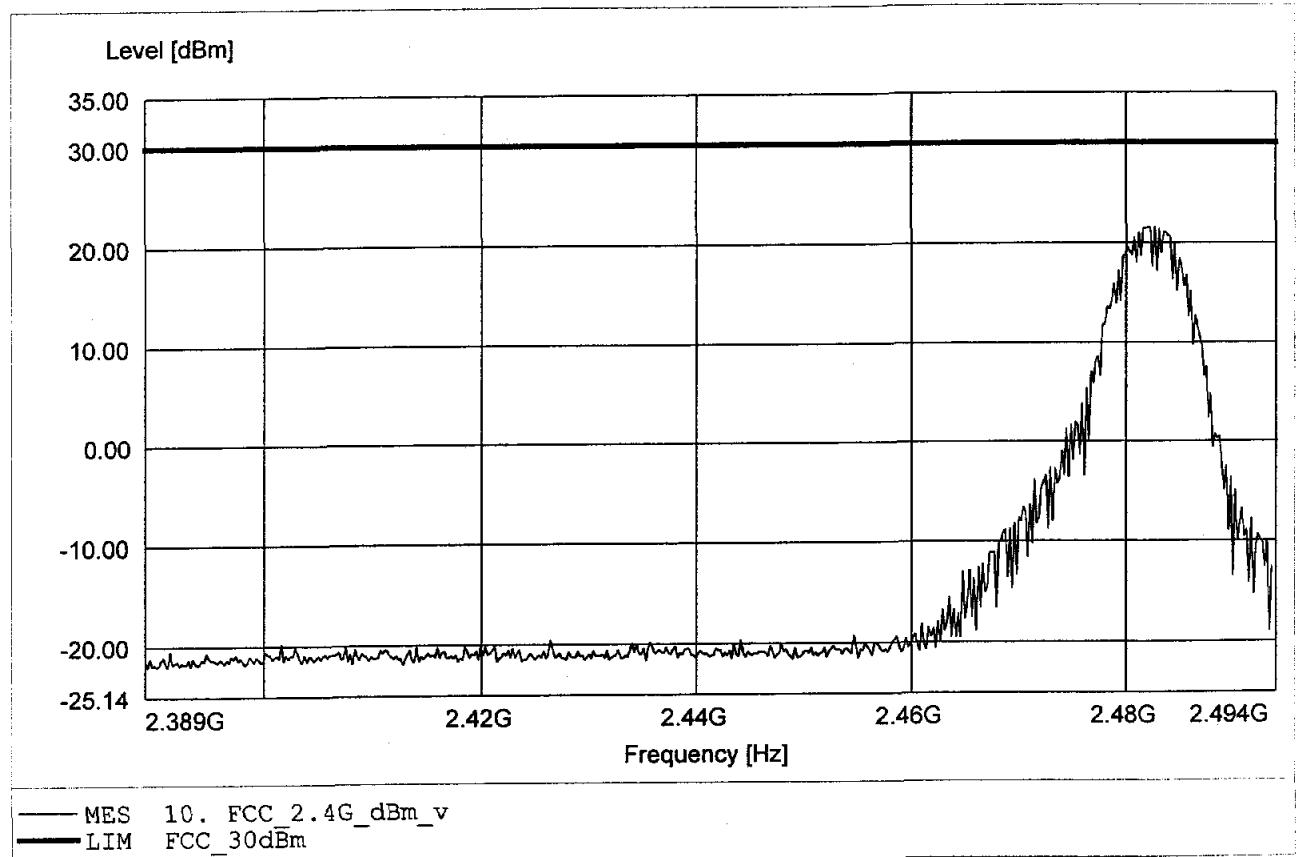


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC +15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 18.40dBm, RBW: 5MHz

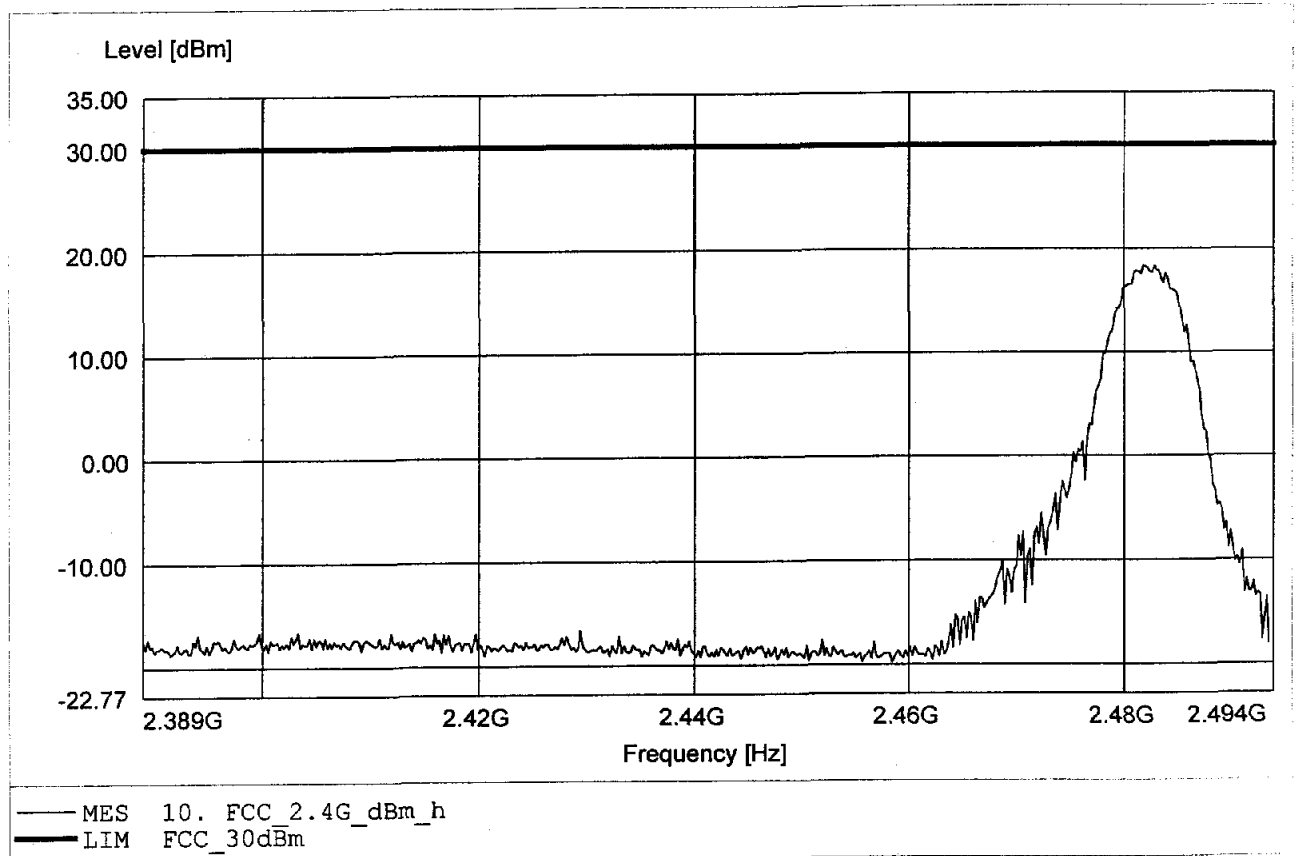


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 18.91dBm, RBW: 5MHz

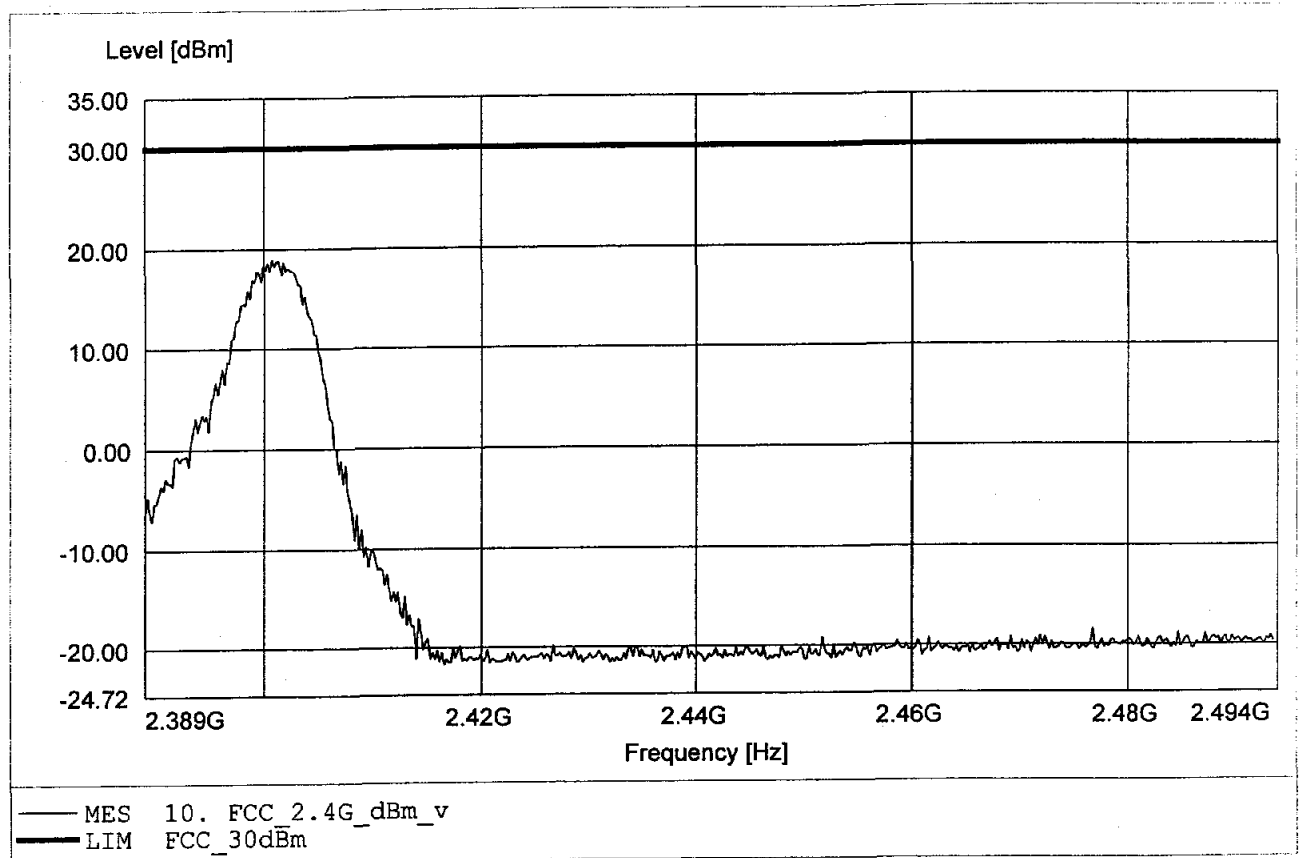


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 23.13dBm, RBW: 5MHz

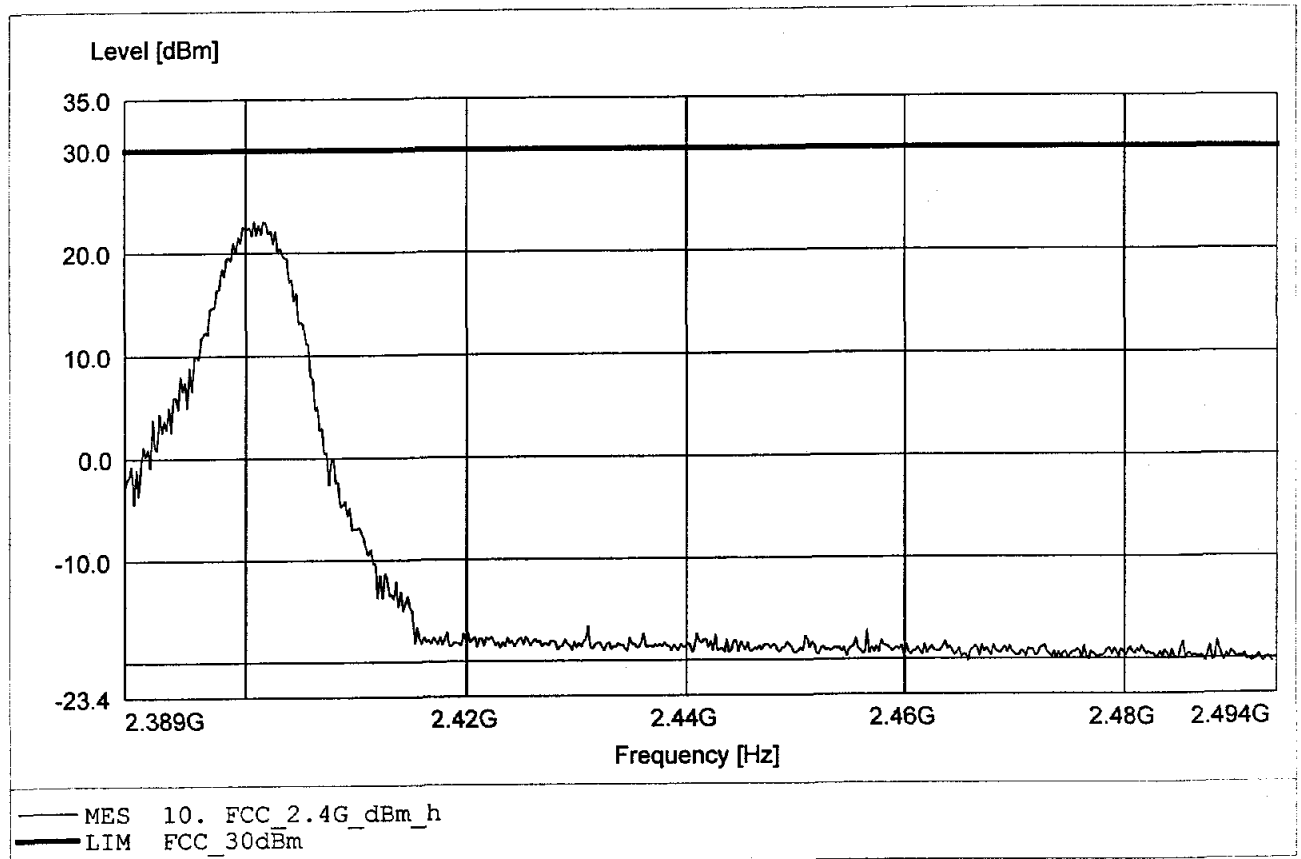


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC -15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 18.85dBm, RBW: 5MHz

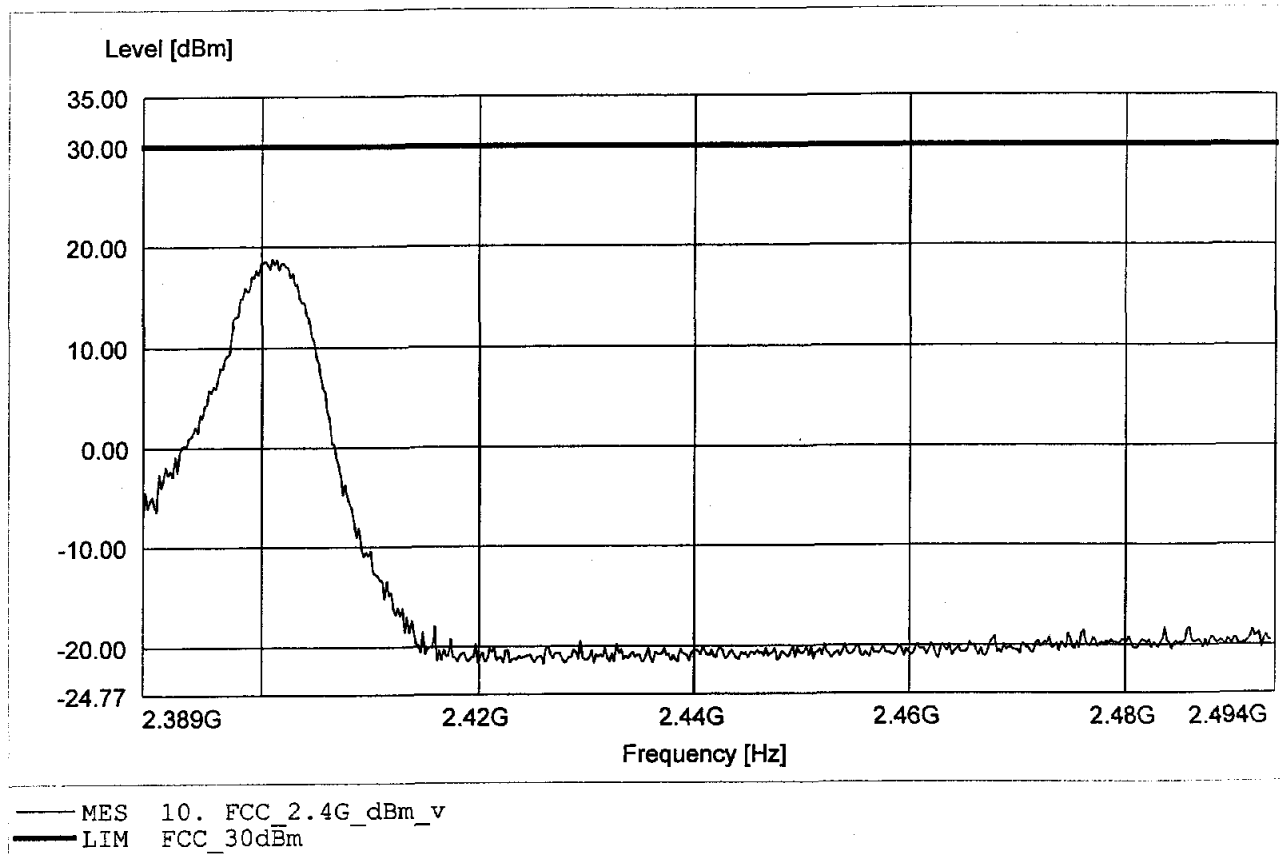


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC -15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 23.20dBm, RBW: 5MHz

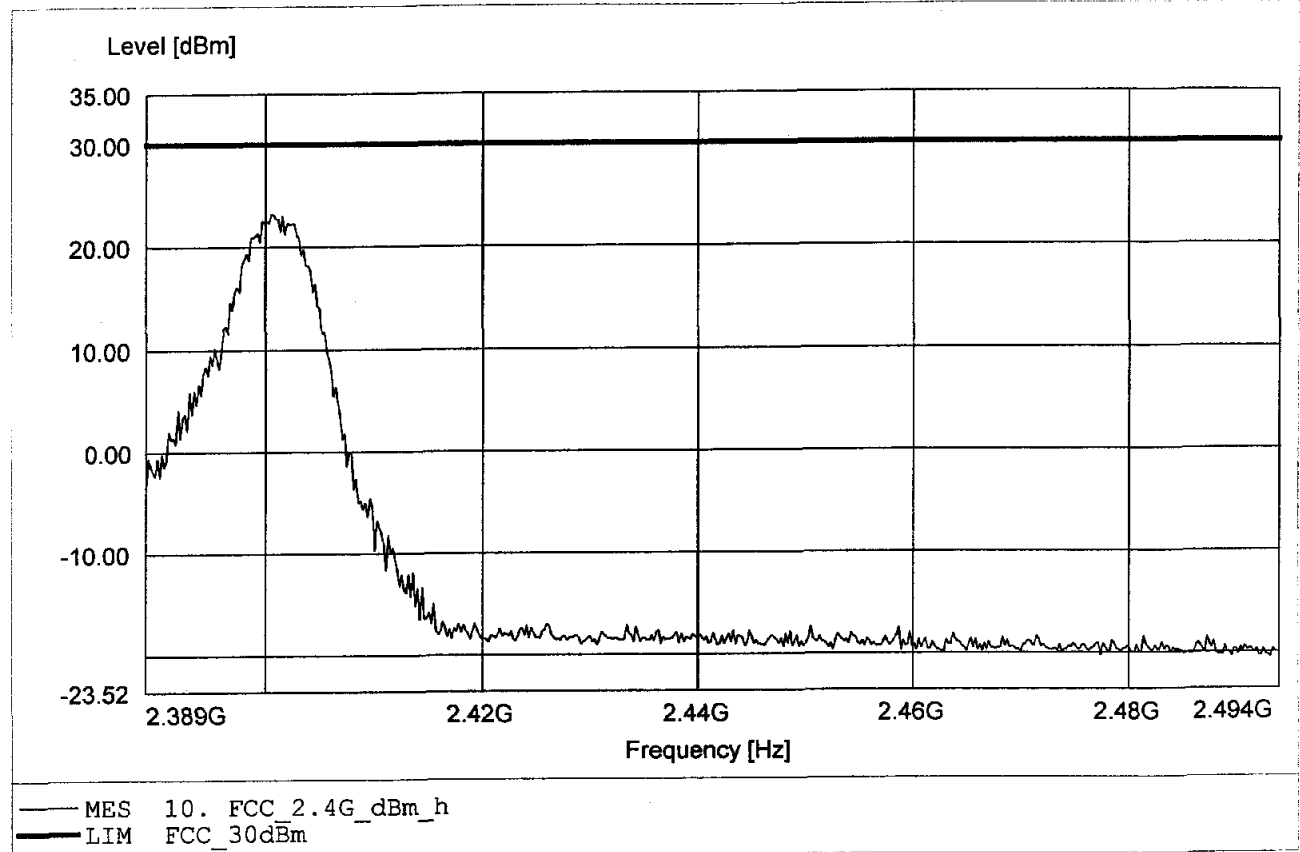


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC +15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 19.03dBm, RBW: 5MHz

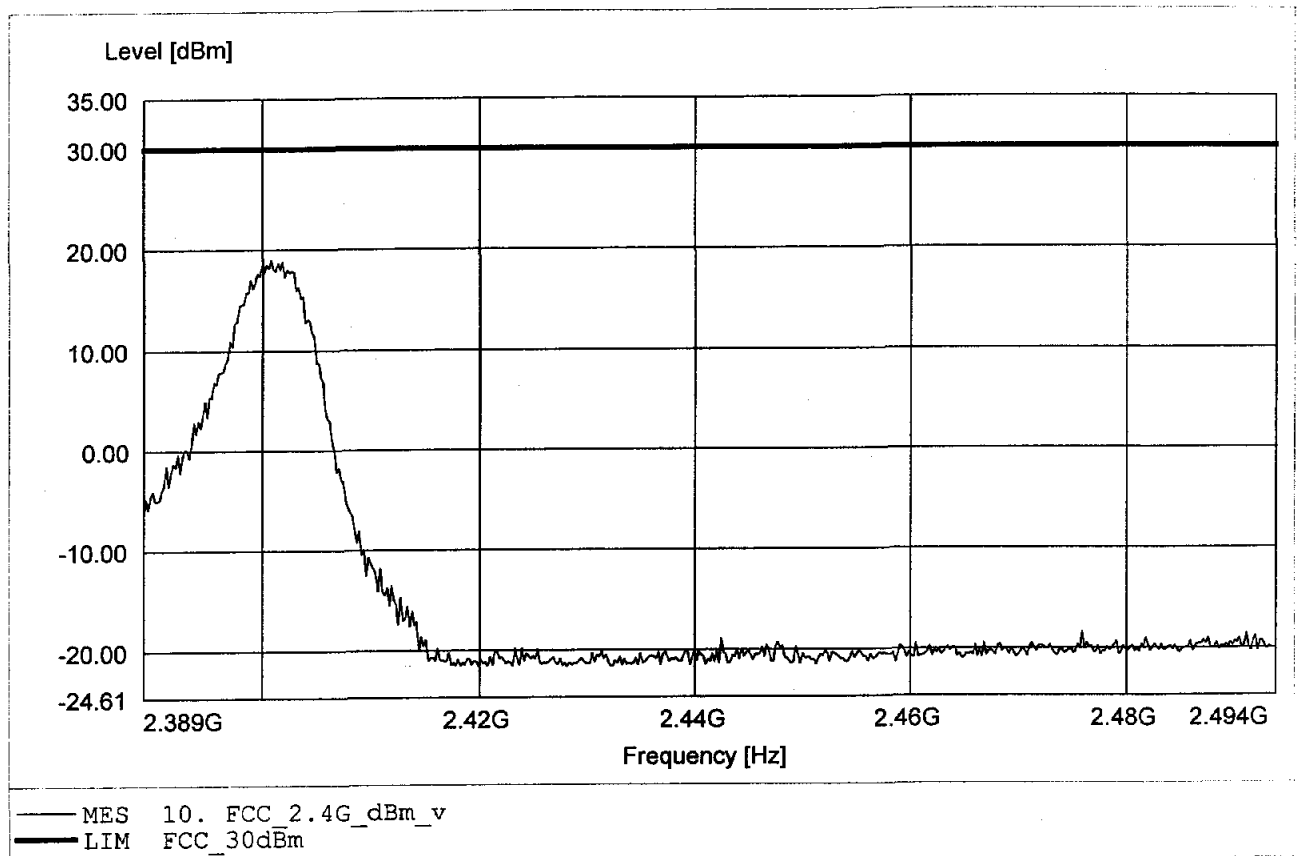


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC +15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 23.19dBm, RBW: 5MHz

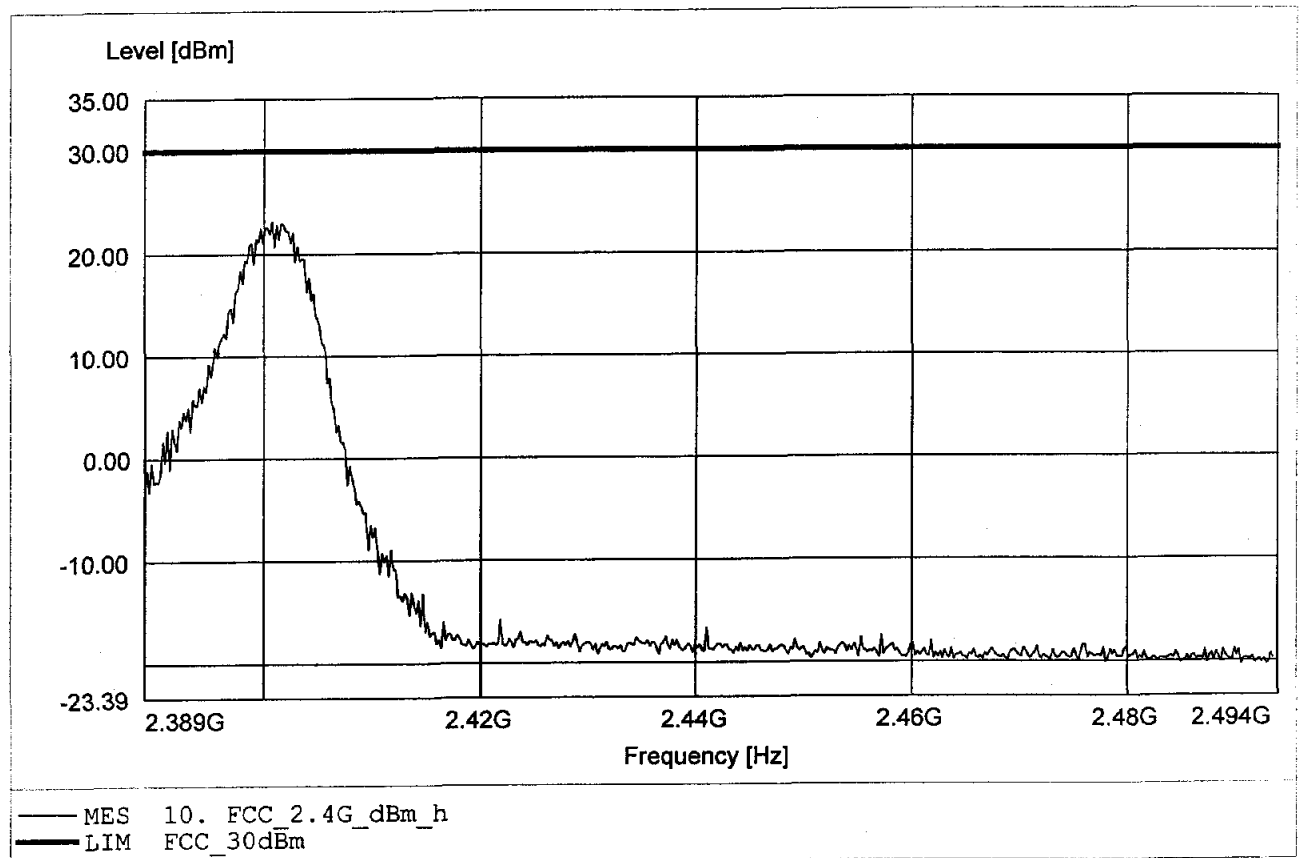


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 16.44dBm, RBW: 5MHz

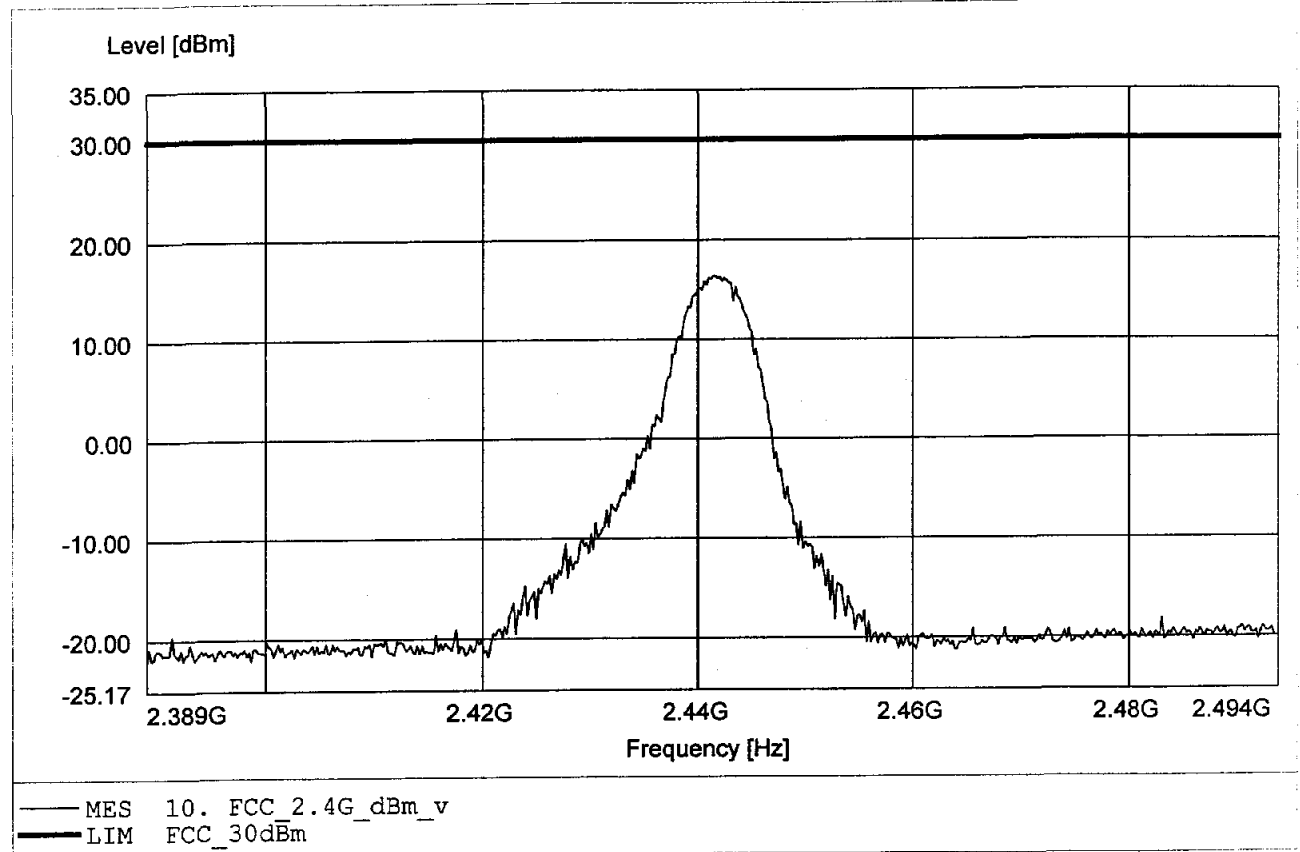


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 21.11dBm, RBW: 5MHz

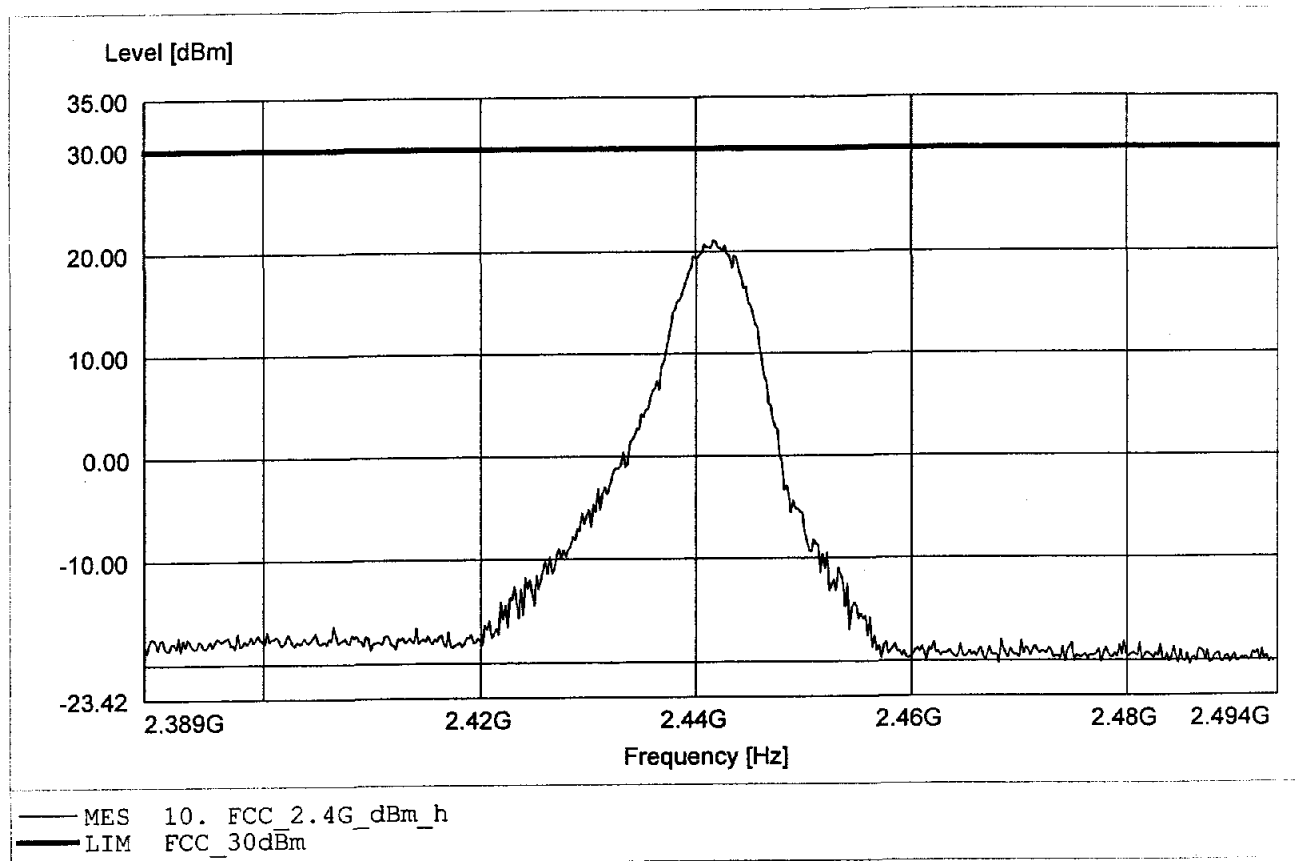


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC -15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 16.45dBm, RBW: 5MHz

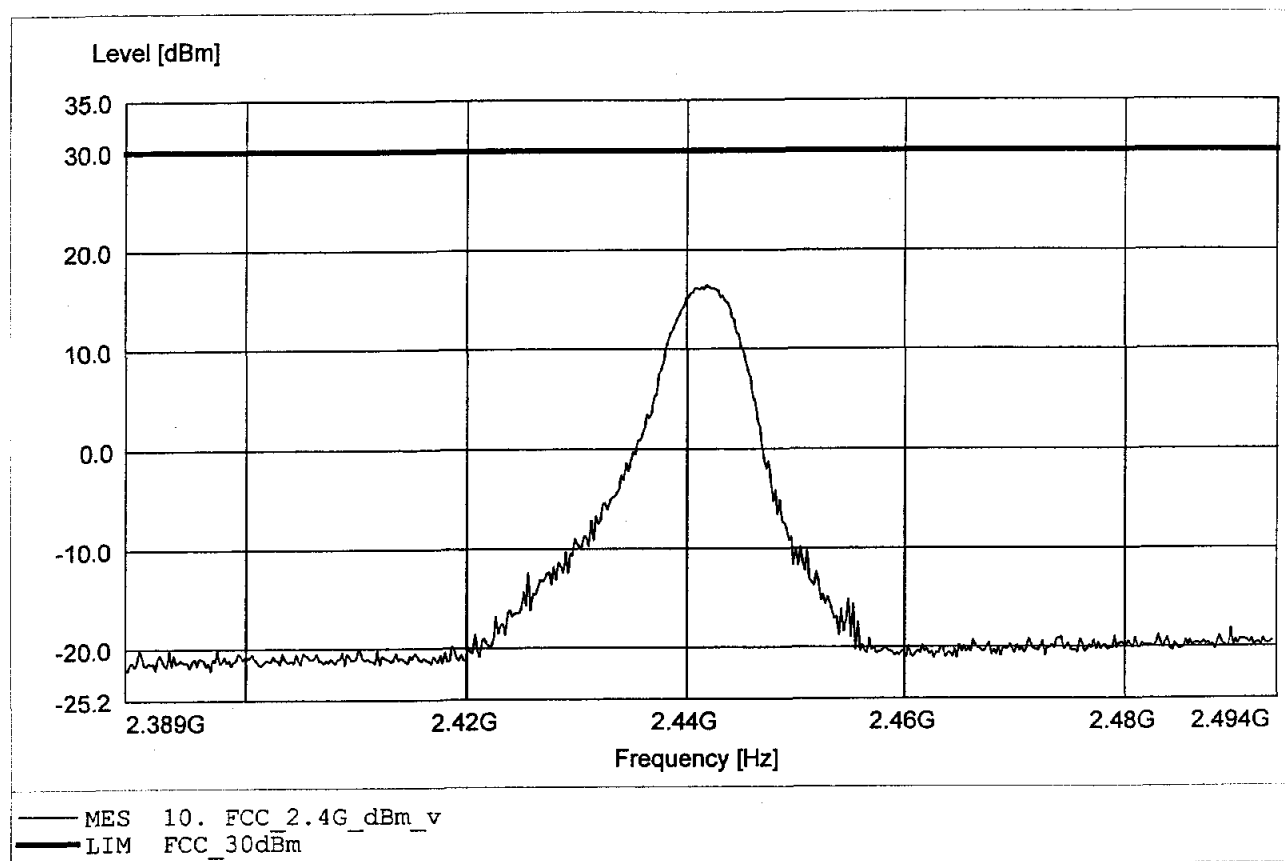


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC -15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 21.22dBm, RBW: 5MHz

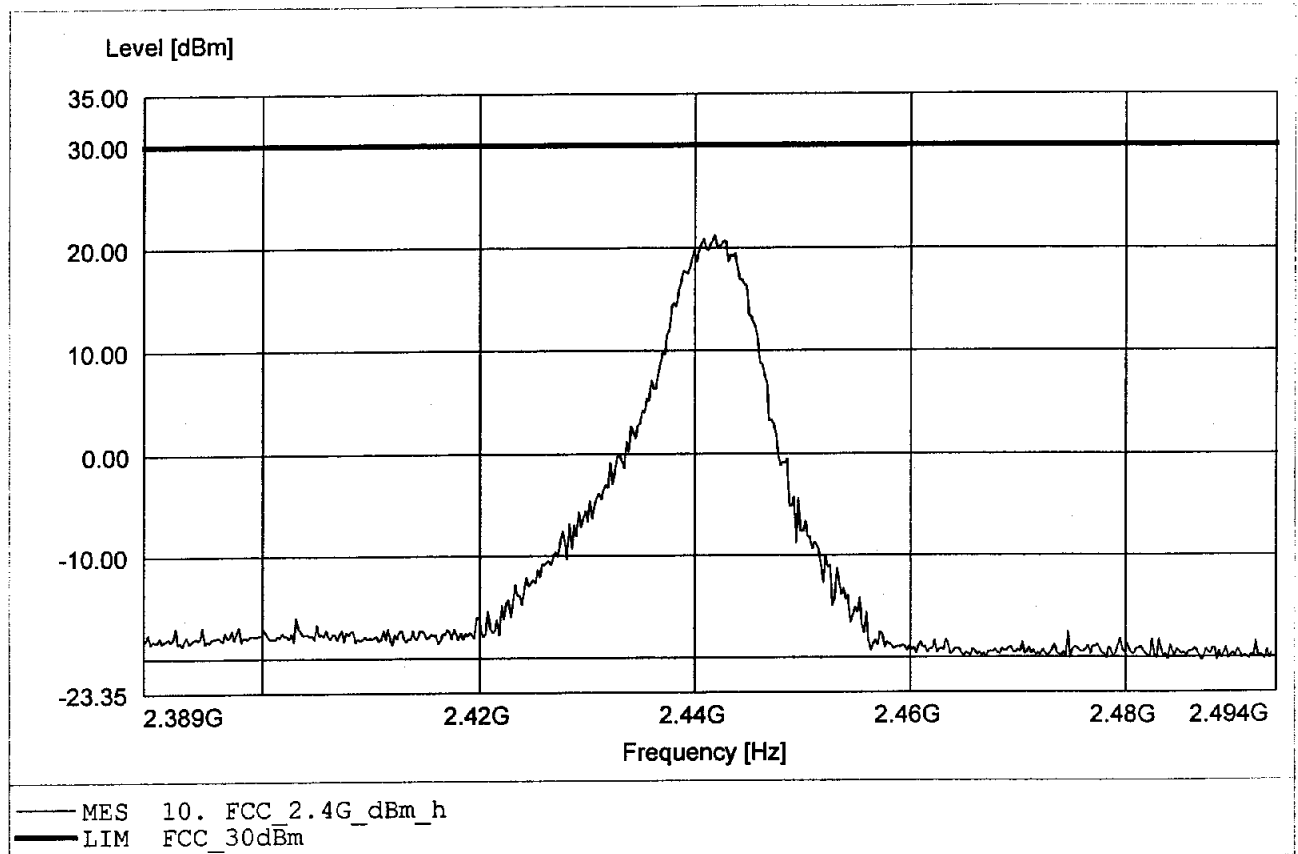


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC +15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 16.45dBm, RBW: 5MHz

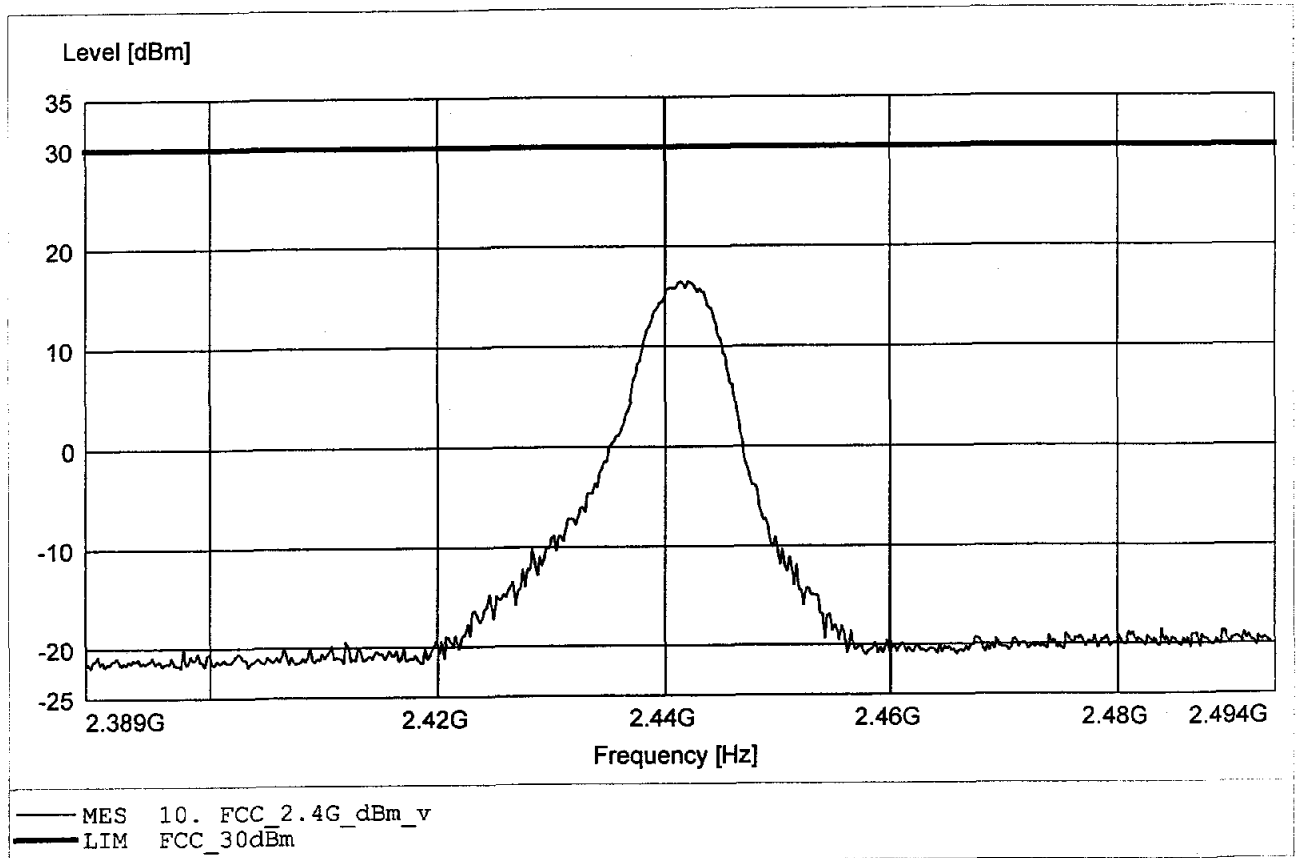


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC +15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 21.03dBm, RBW: 5MHz

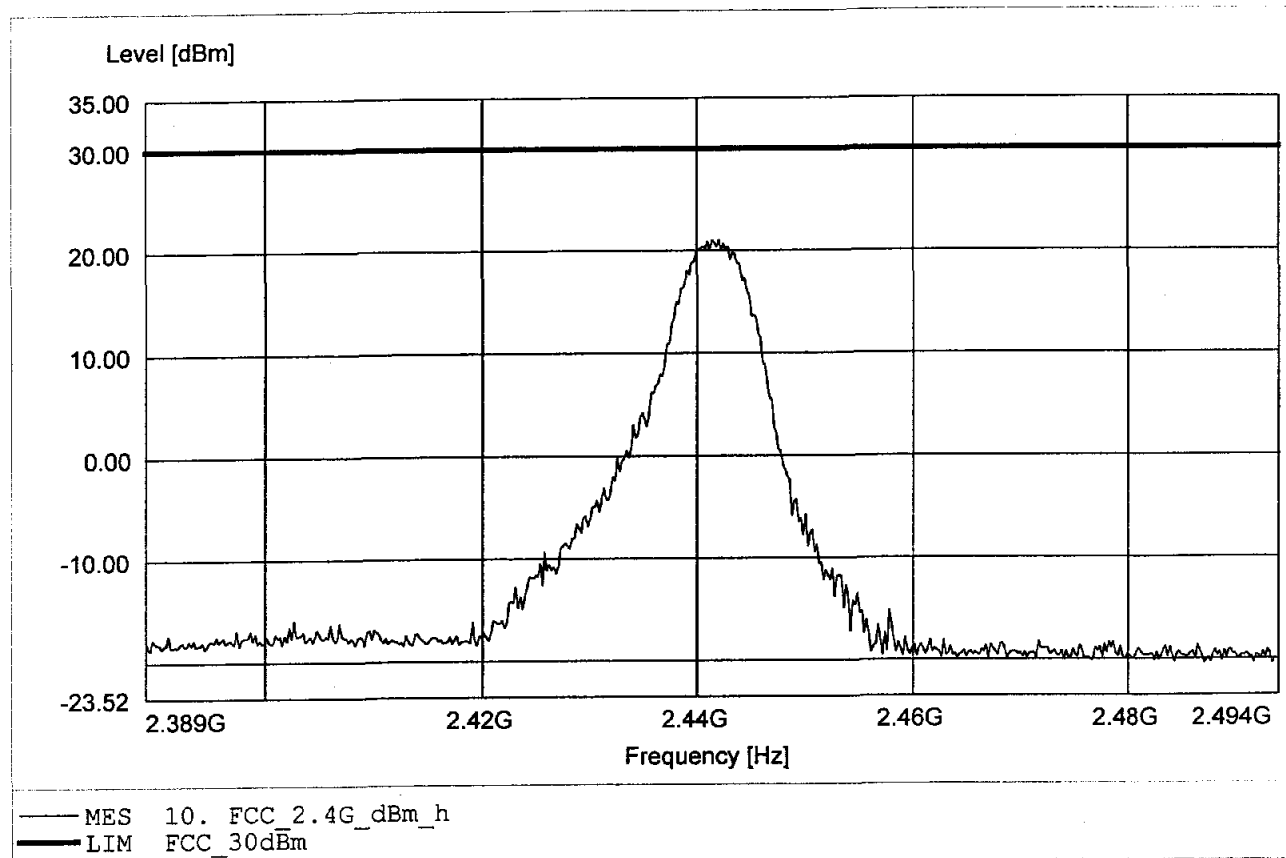


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 19.55dBm, RBW: 5MHz

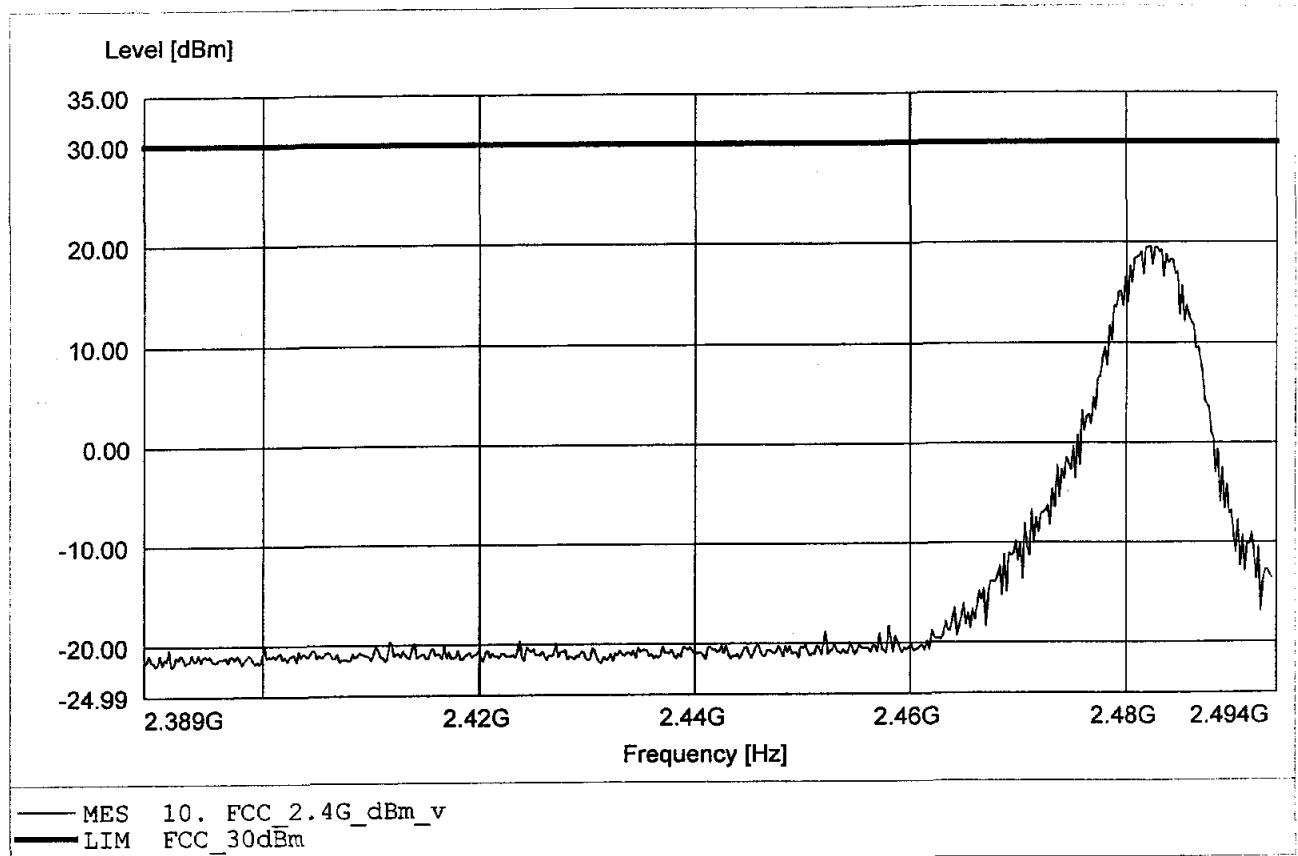


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.483GHz, Pmax: 20.02dBm, RBW: 5MHz

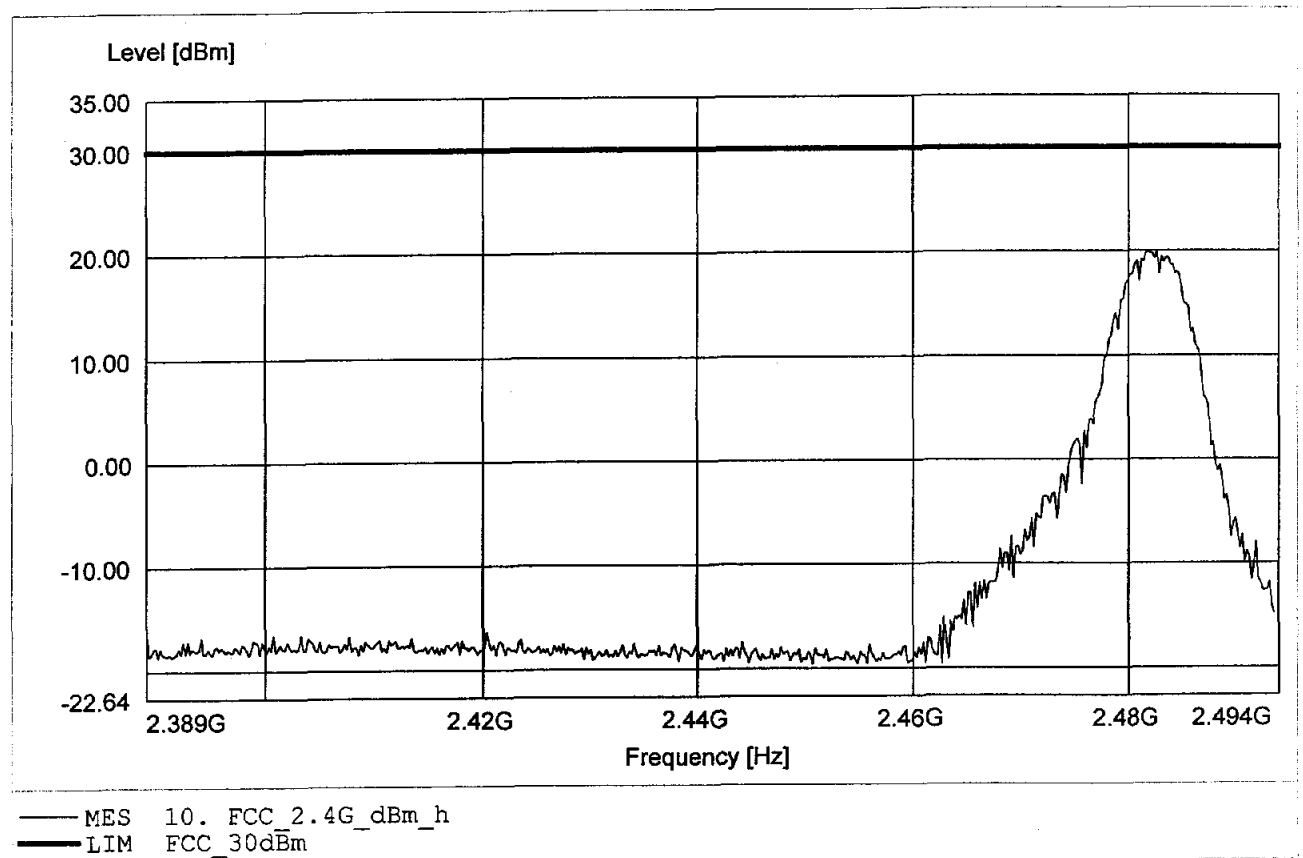


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC -15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 19.61dBm, RBW: 5MHz

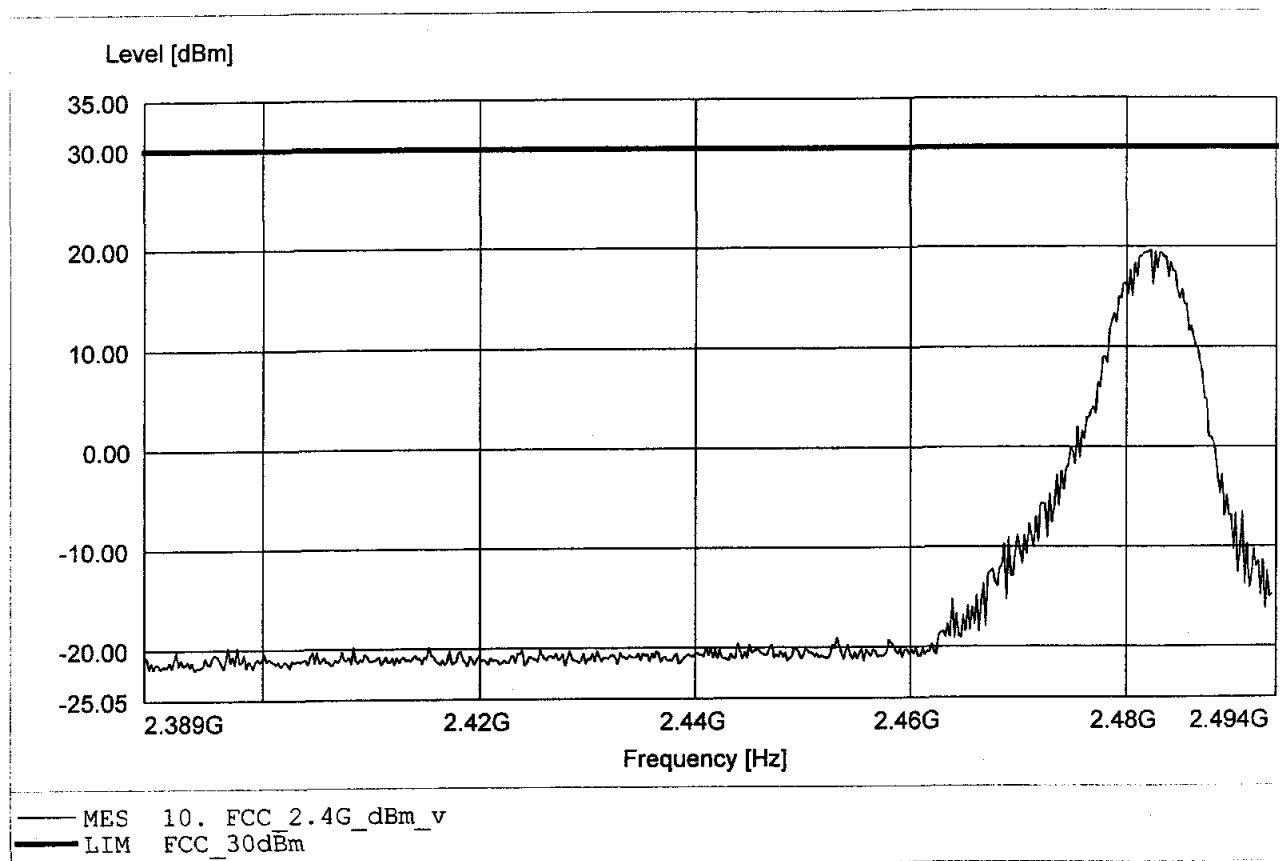


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC -15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 20.03dBm, RBW: 5MHz

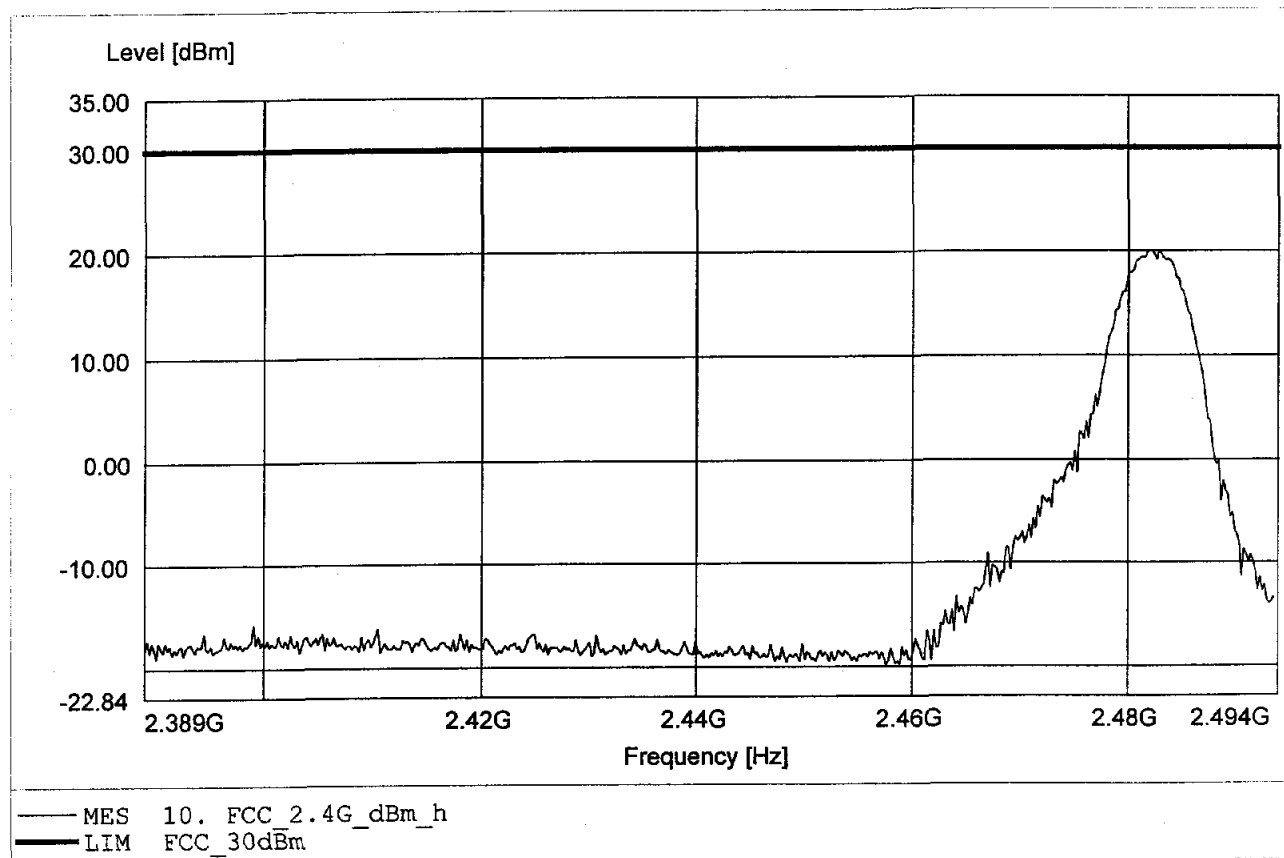


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC +15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 19.55dBm, RBW: 5MHz

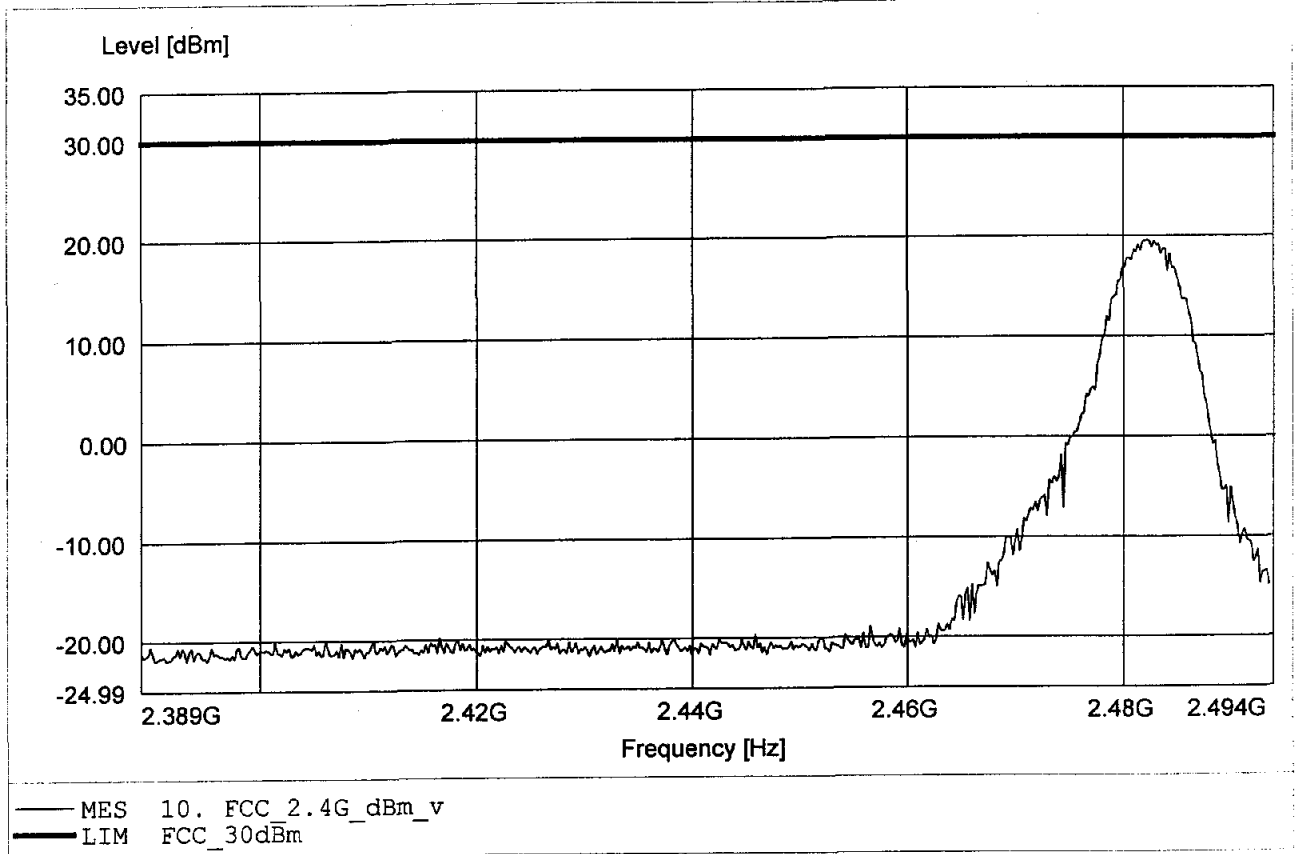

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 2 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC +15% (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 20.03dBm, RBW: 5MHz

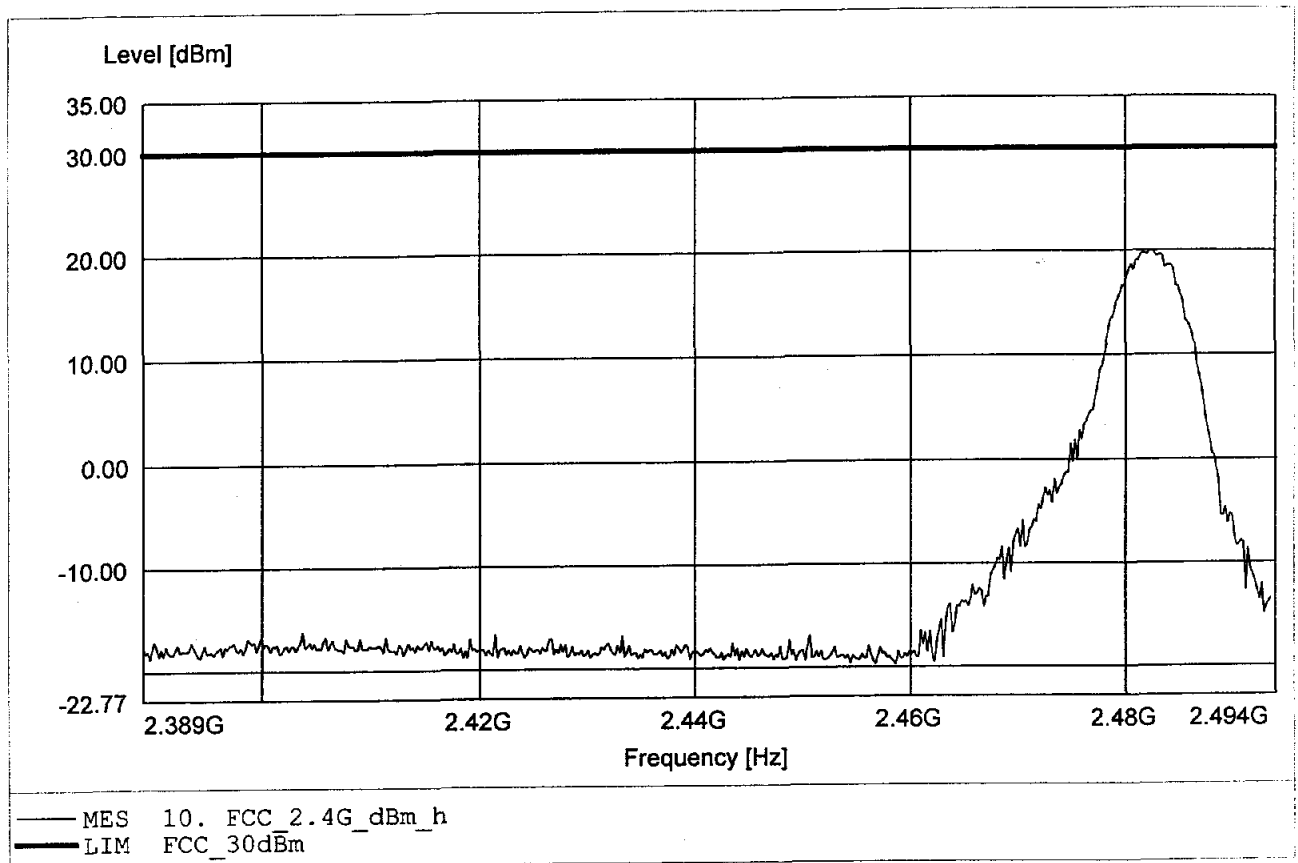


Appendix C

Spurious Emissions radiated - Transmitter operating


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 863.727MHz, Emax: 22.39dBµV/m, RBW: 100kHz

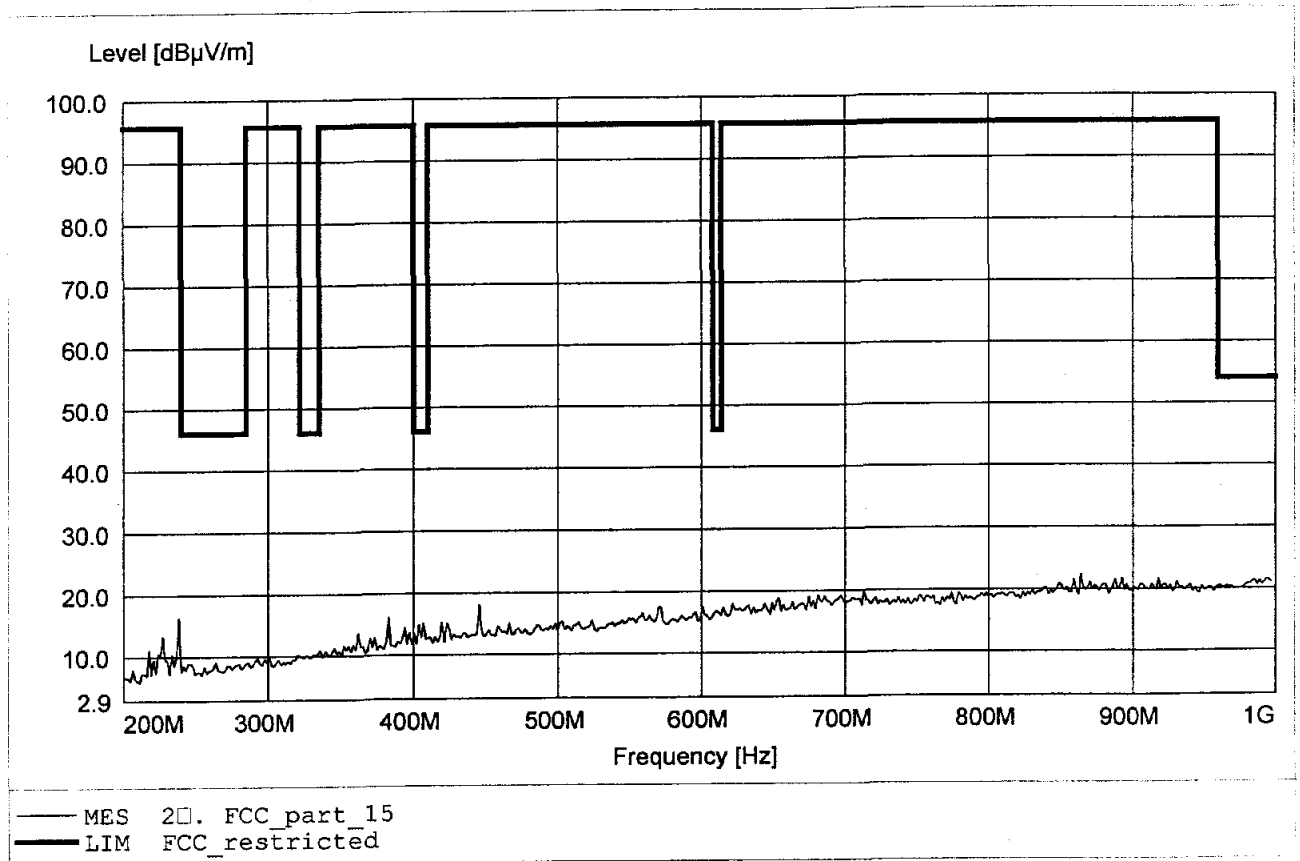


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 865.331MHz, Emax: 21.92dBµV/m, RBW: 100kHz

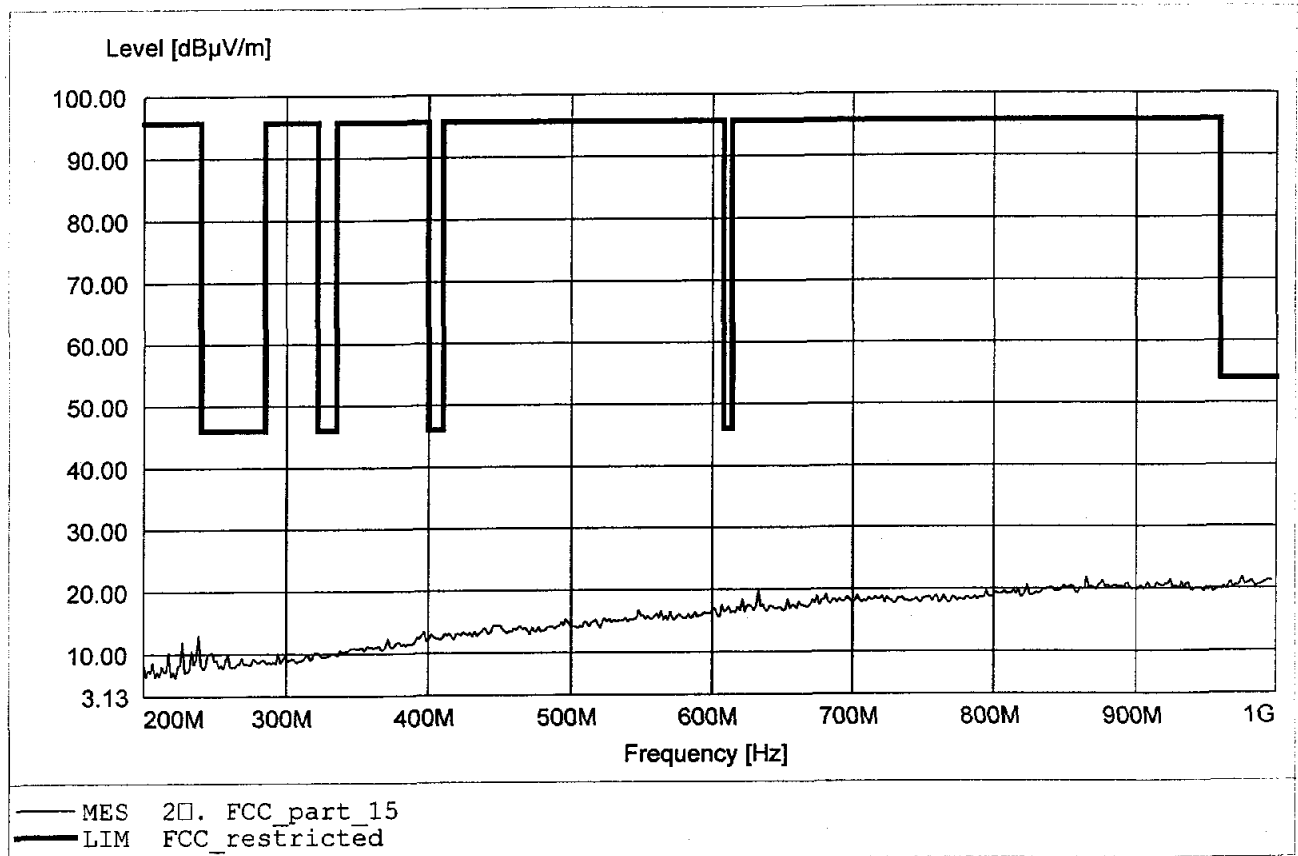


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 181.944MHz, Emax: 29.46dBµV/m, RBW: 100kHz

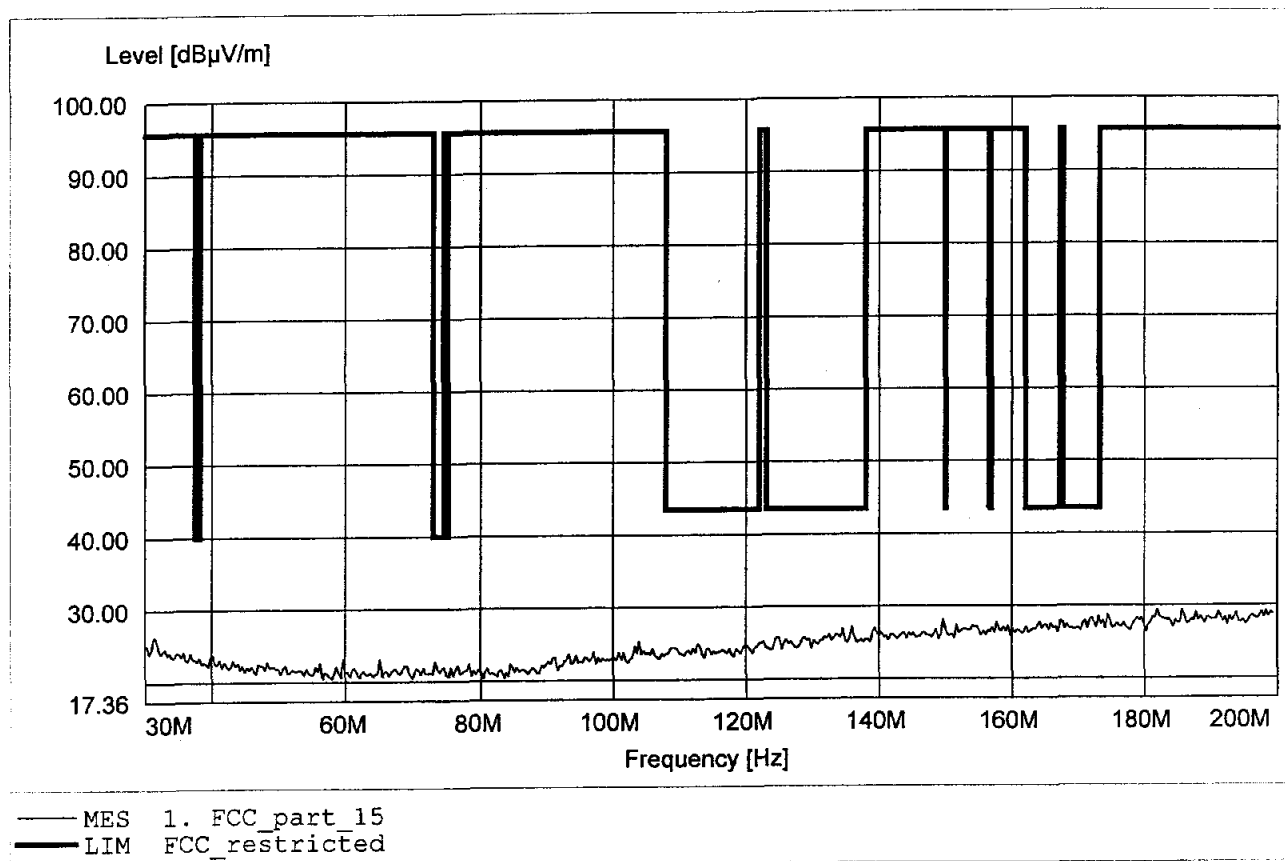


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 187.054MHz, Emax: 30.17dBµV/m, RBW: 100kHz

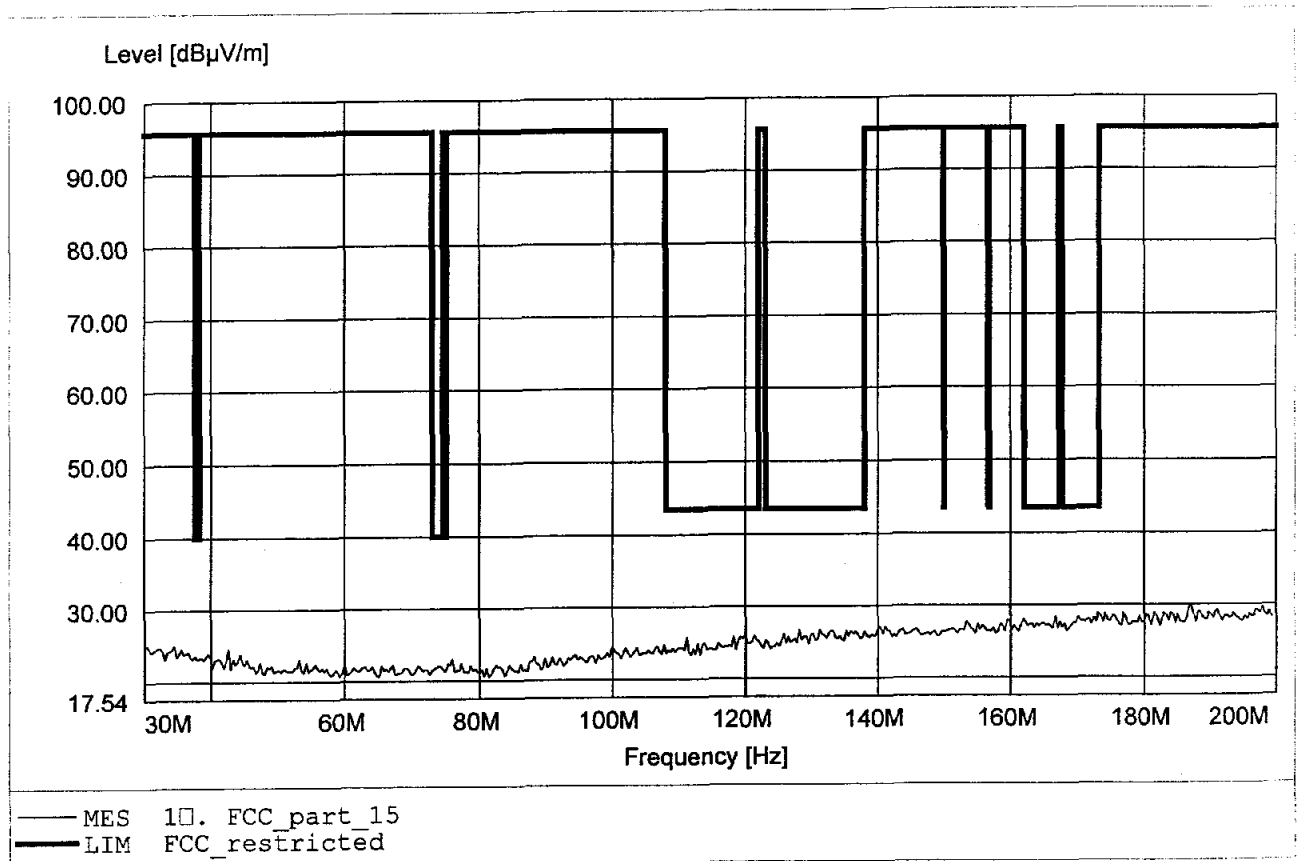


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 97.51dBµV/m, RBW: 1MHz

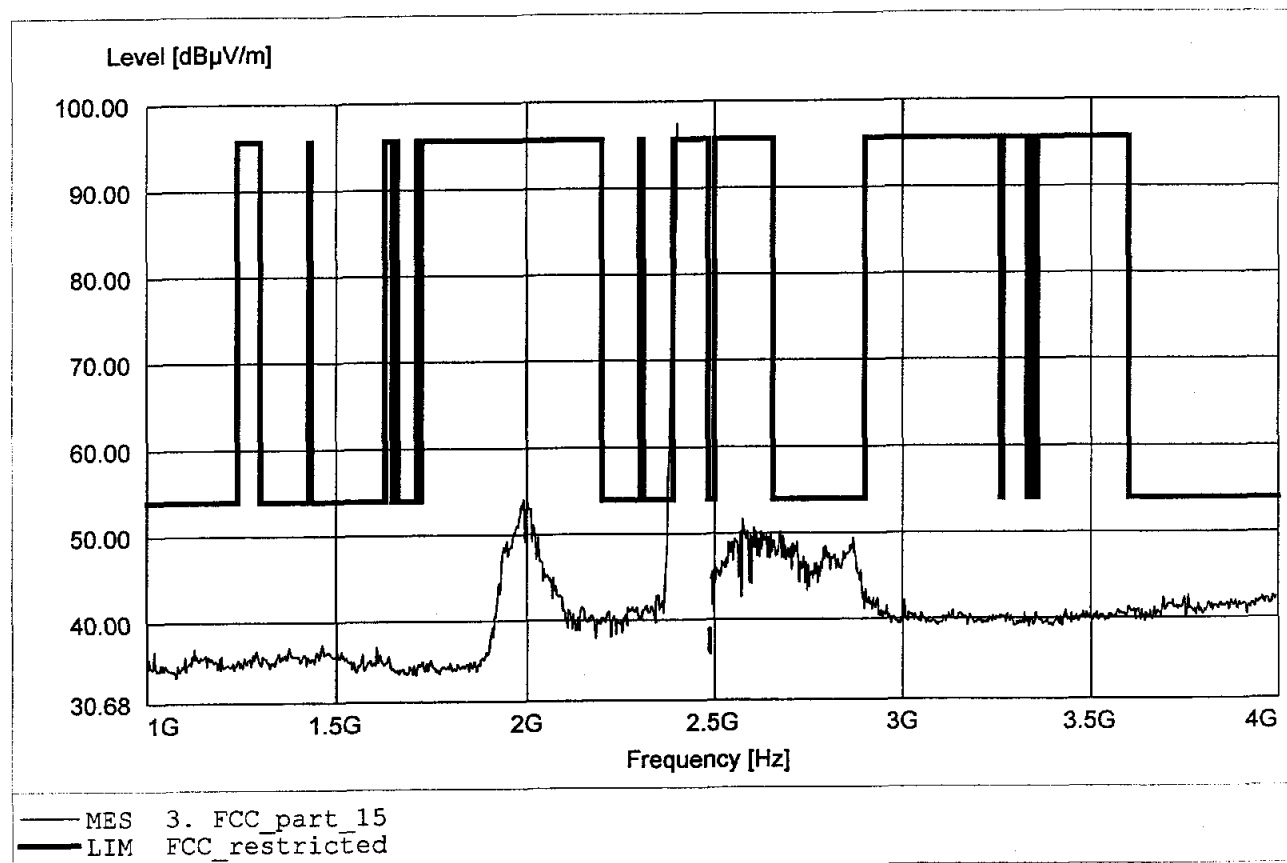


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 66.93dB μ V/m, RBW: 1MHz

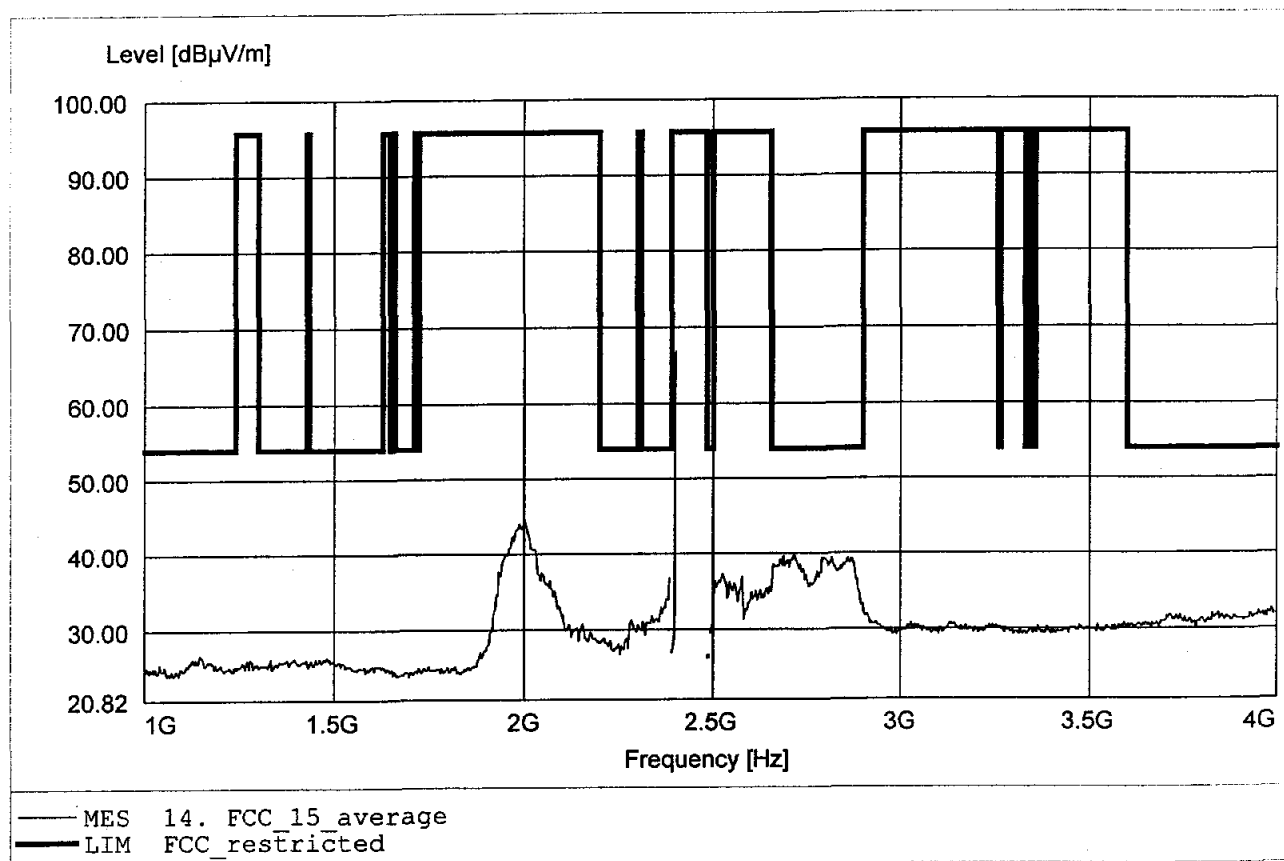


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 66.93dBµV/m, RBW: 1MHz

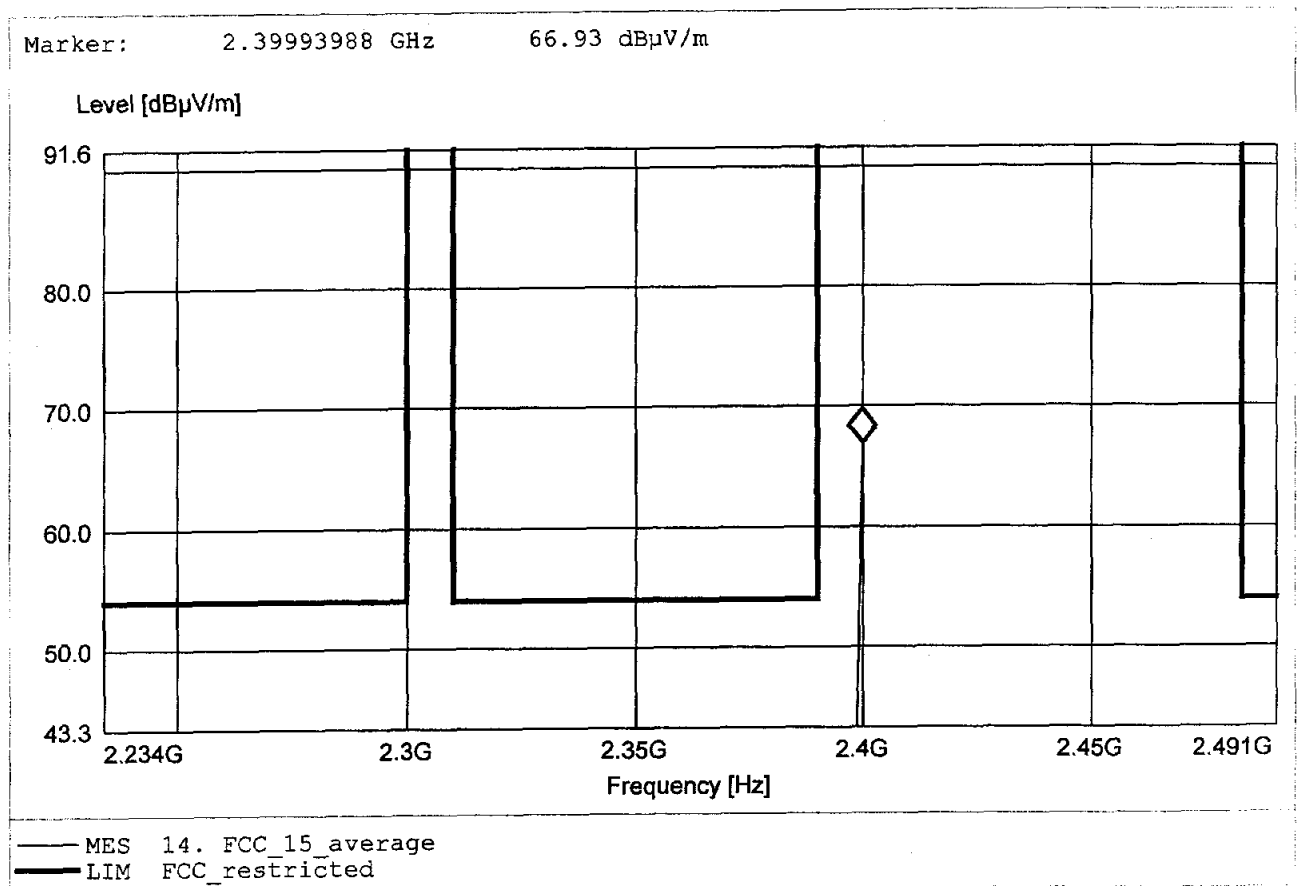


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 98.94dBμV/m, RBW: 1MHz

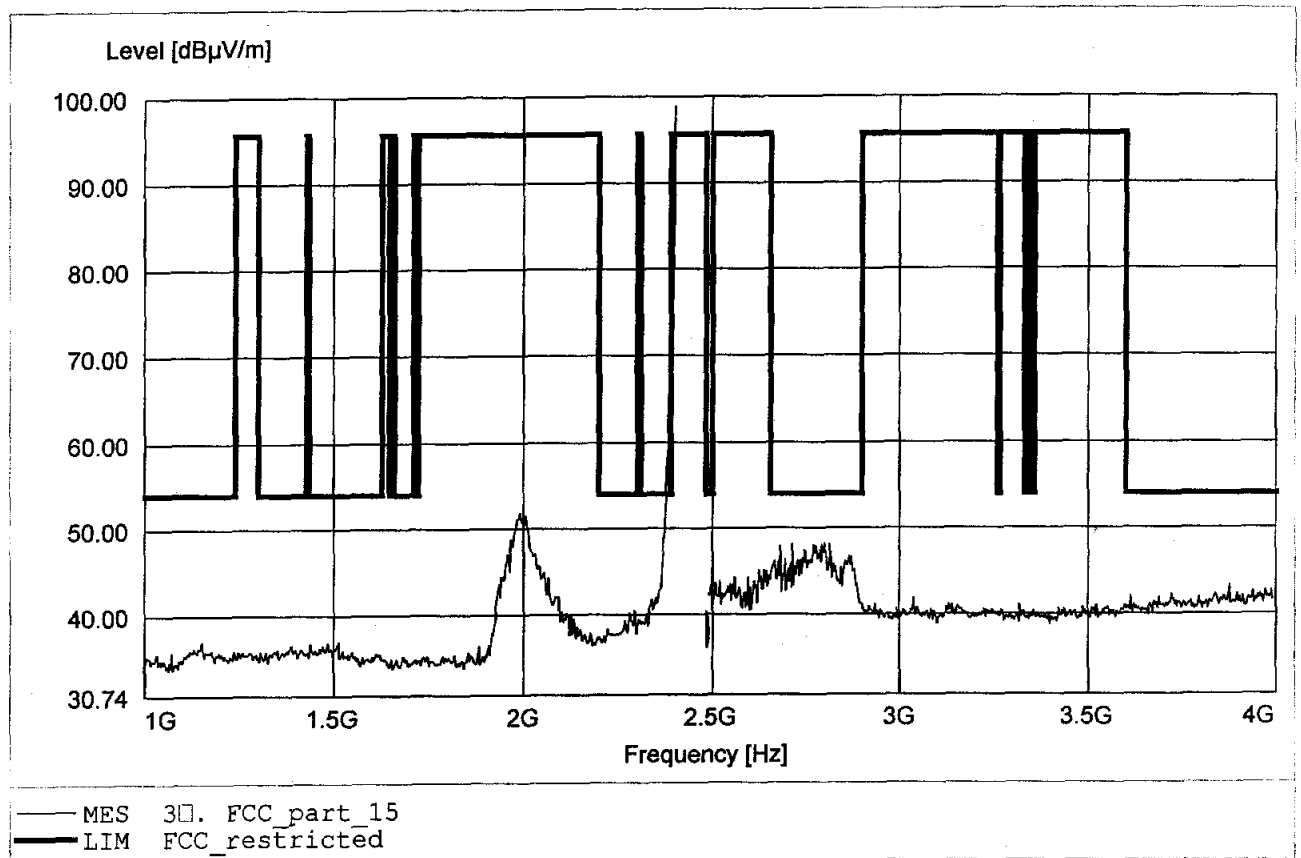


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 68.56dBμV/m, RBW: 1MHz

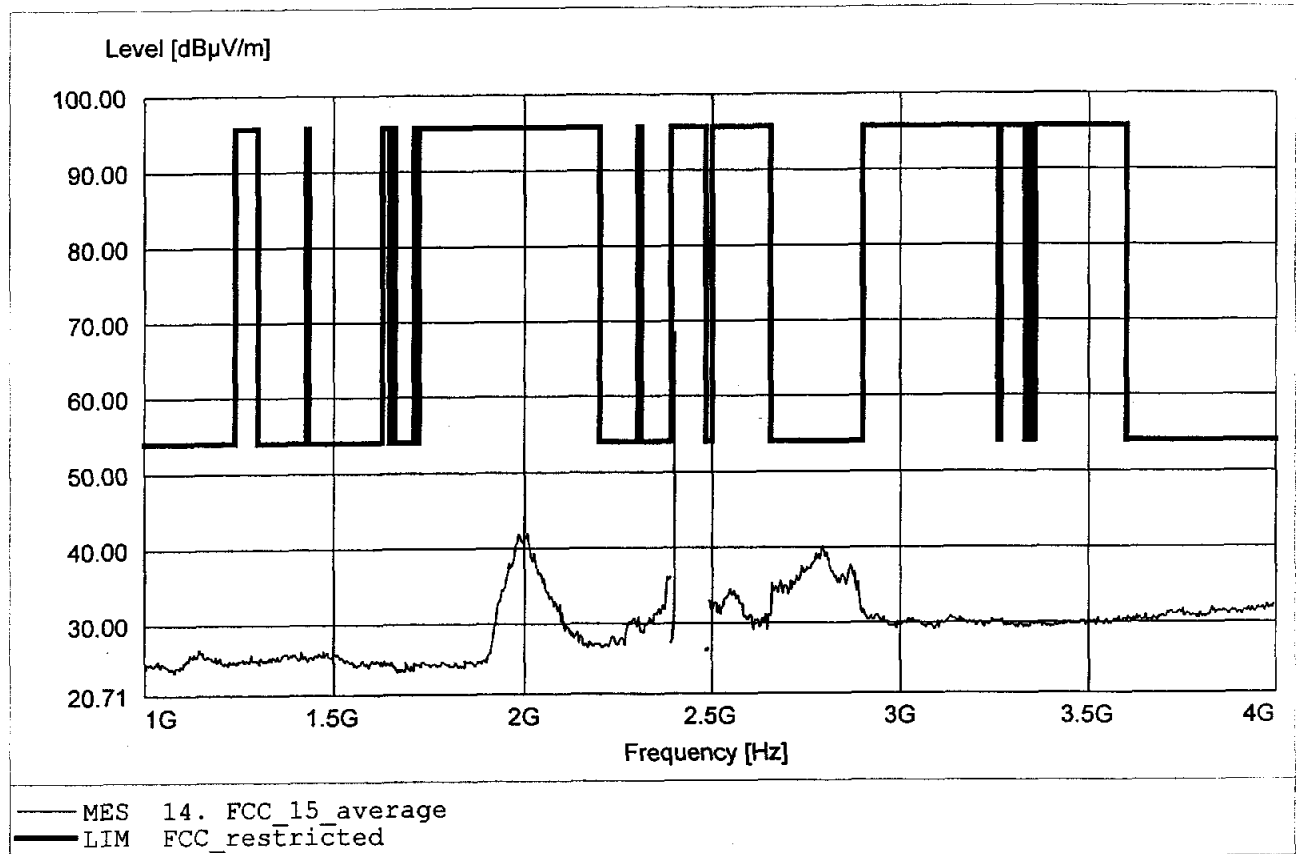


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 68.56dBµV/m, RBW: 1MHz

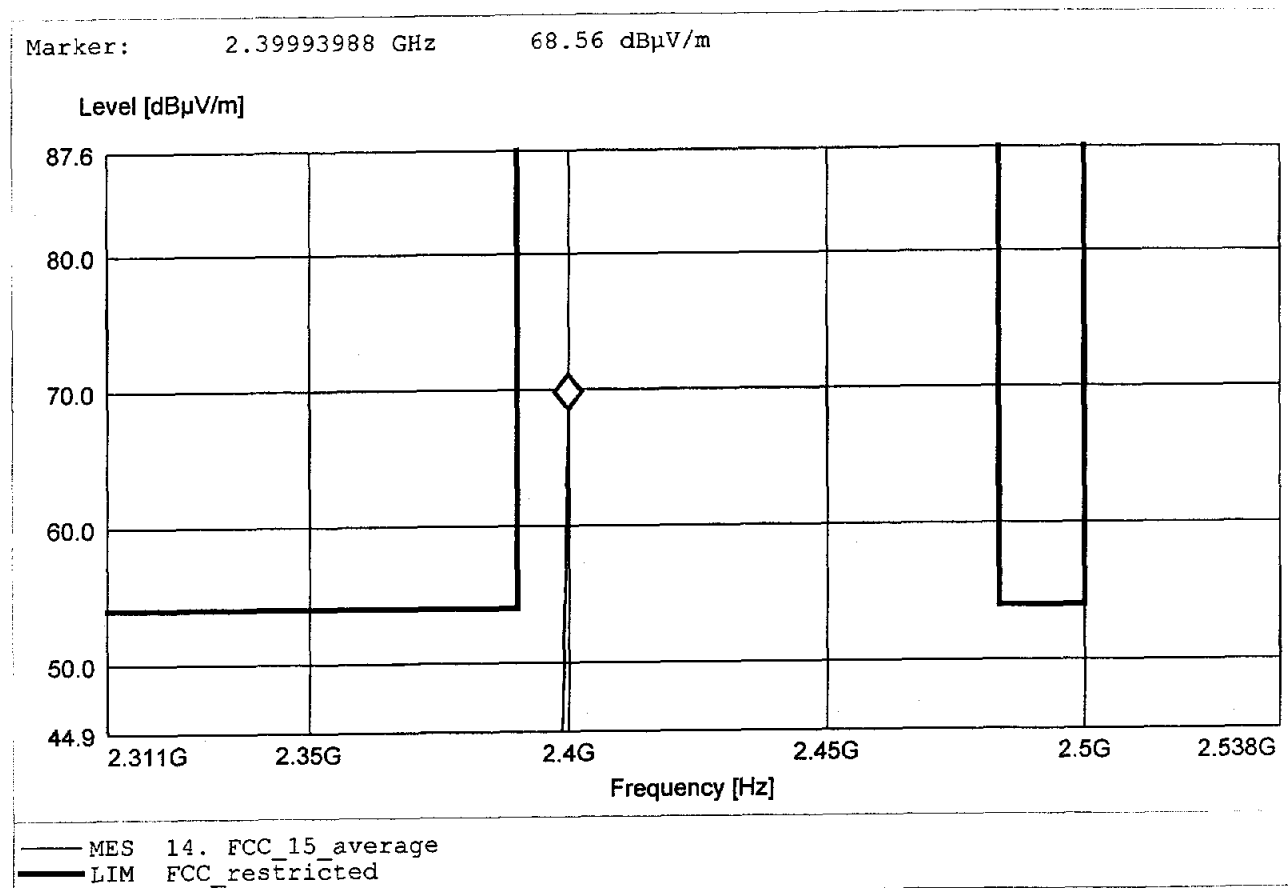


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 47.72dBμV/m, RBW: 1MHz

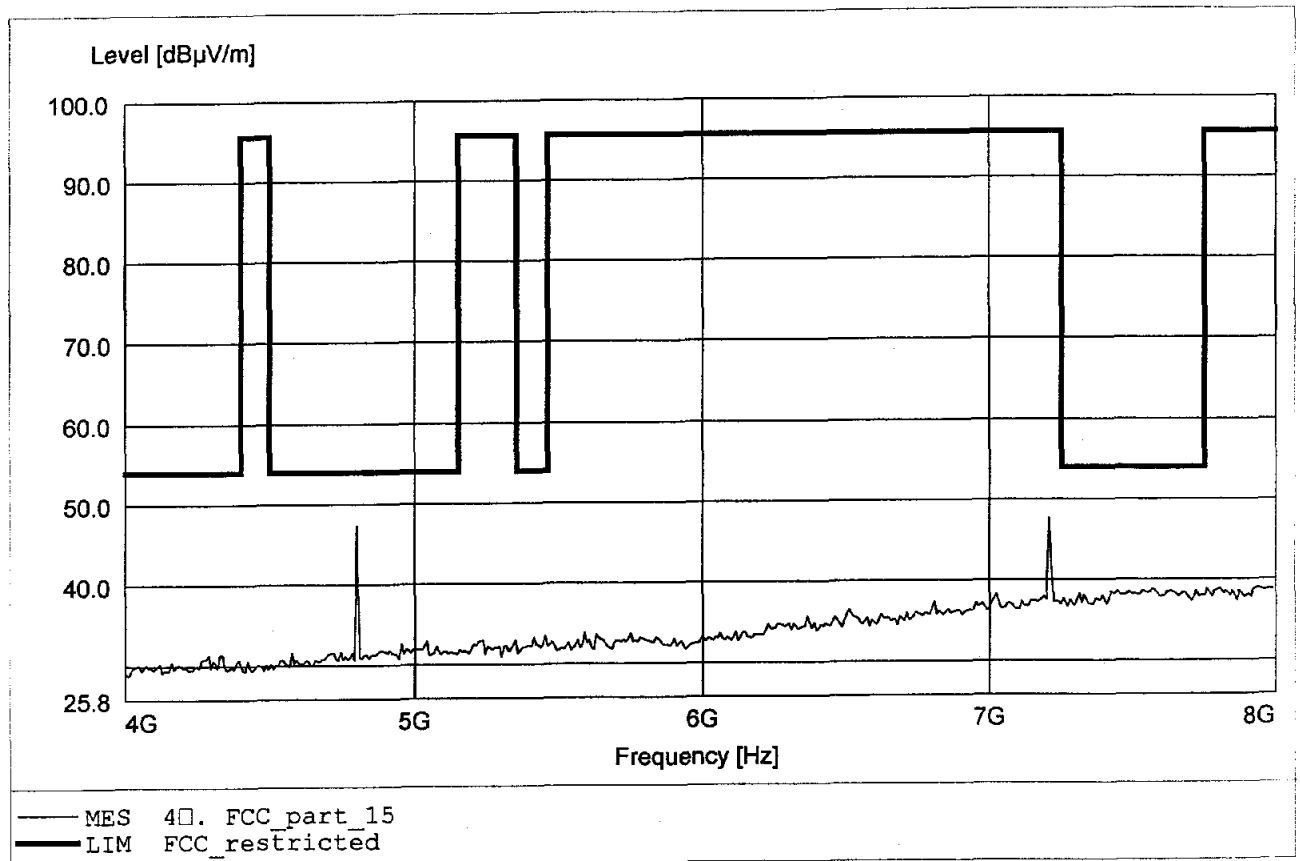


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 52.86dBμV/m, RBW: 1MHz

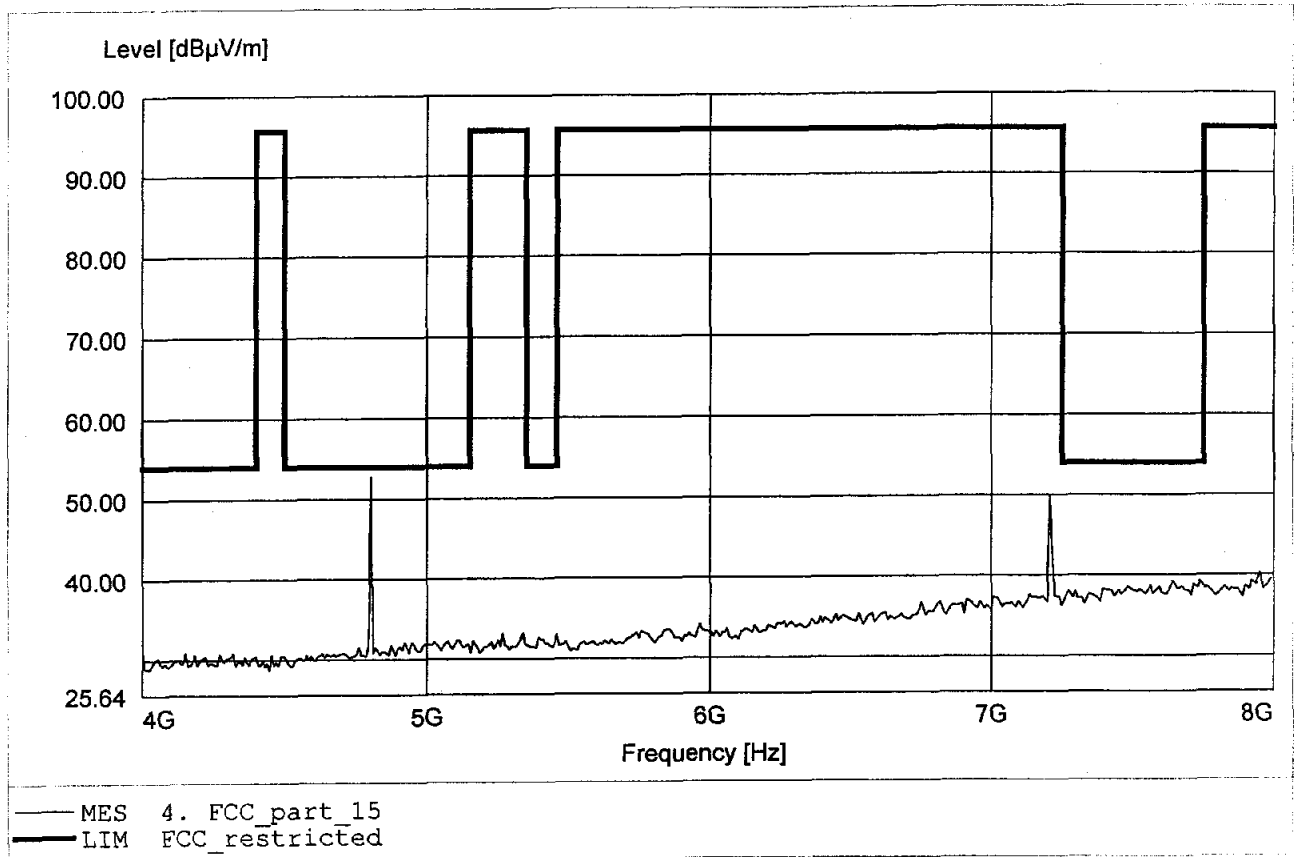


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 49.71dBμV/m, RBW: 1MHz

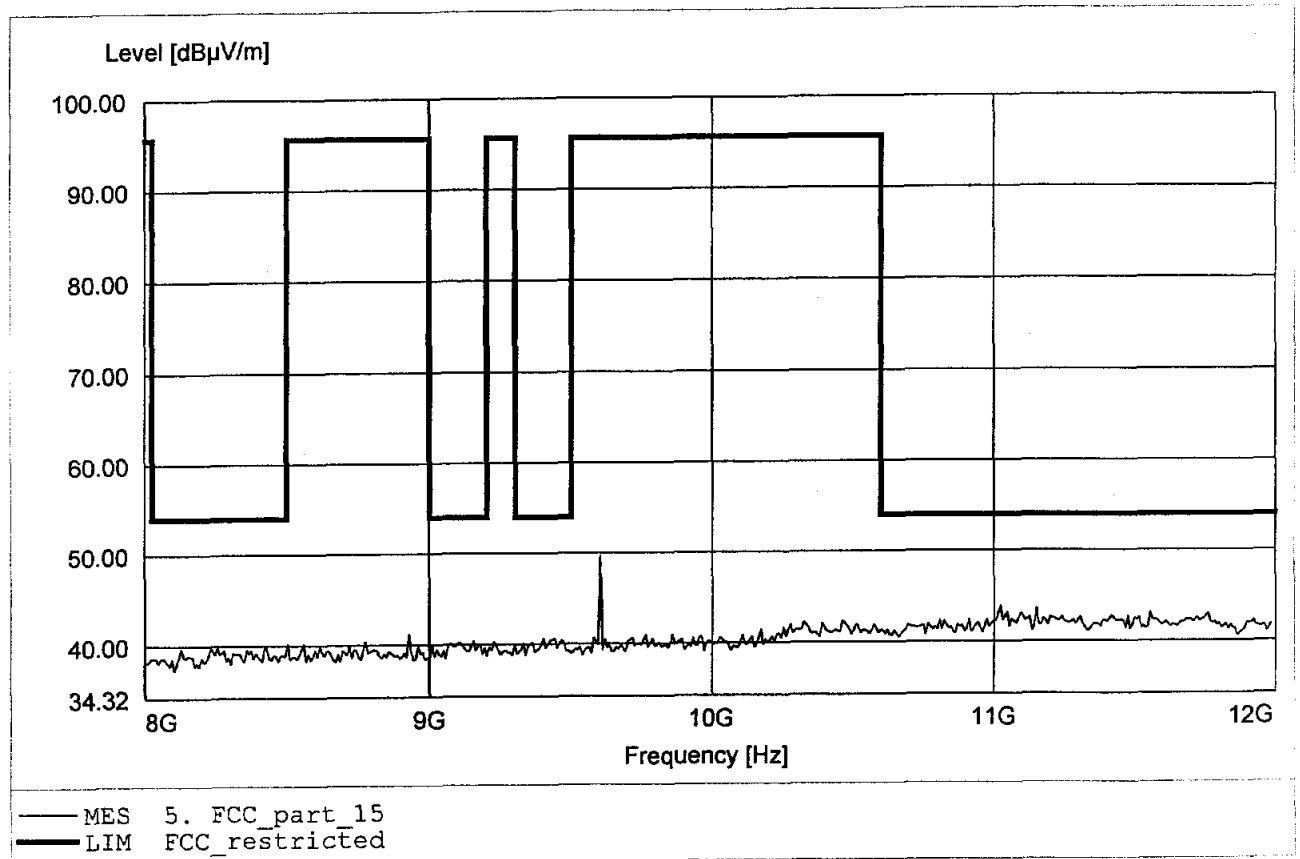


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 46.36dBμV/m, RBW: 1MHz

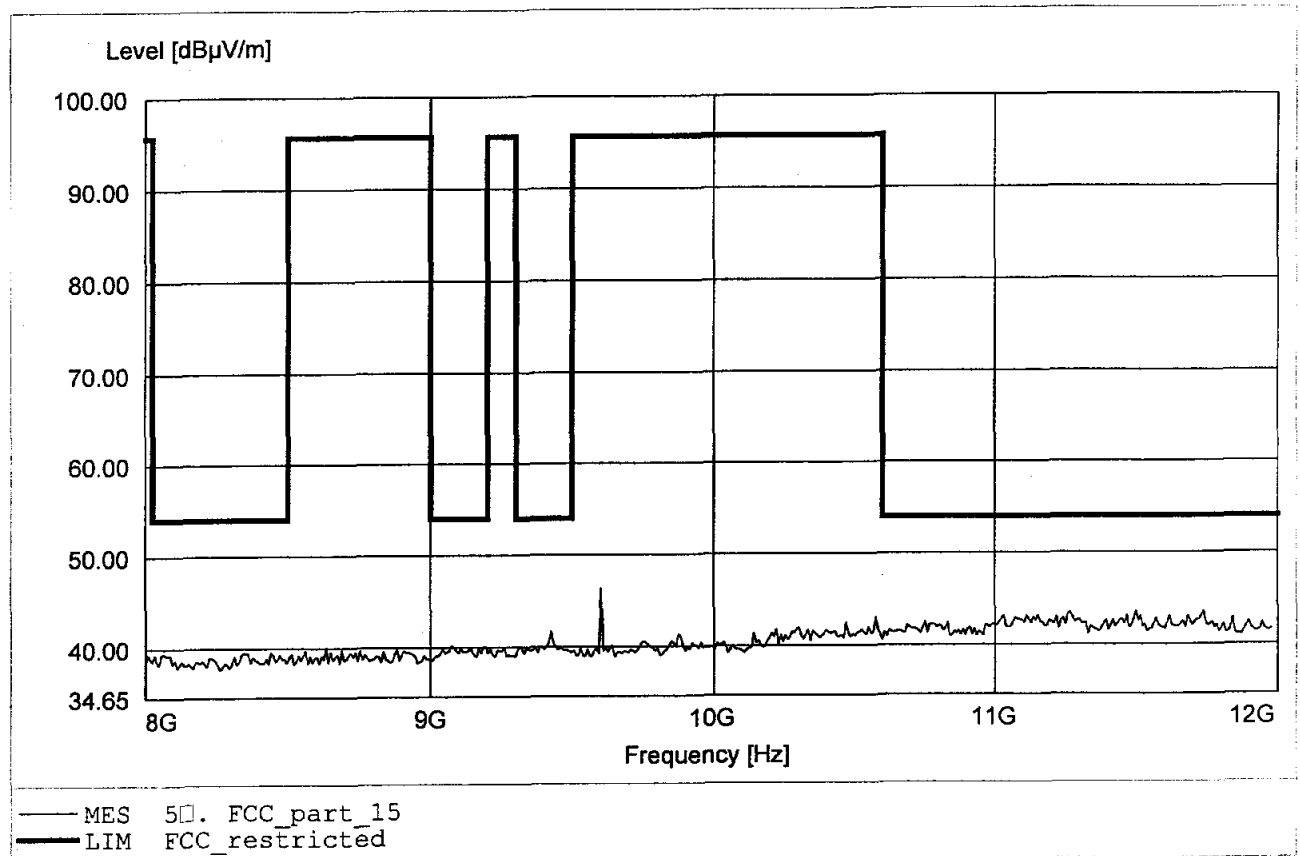


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 50.53dB μ V/m, RBW: 1MHz

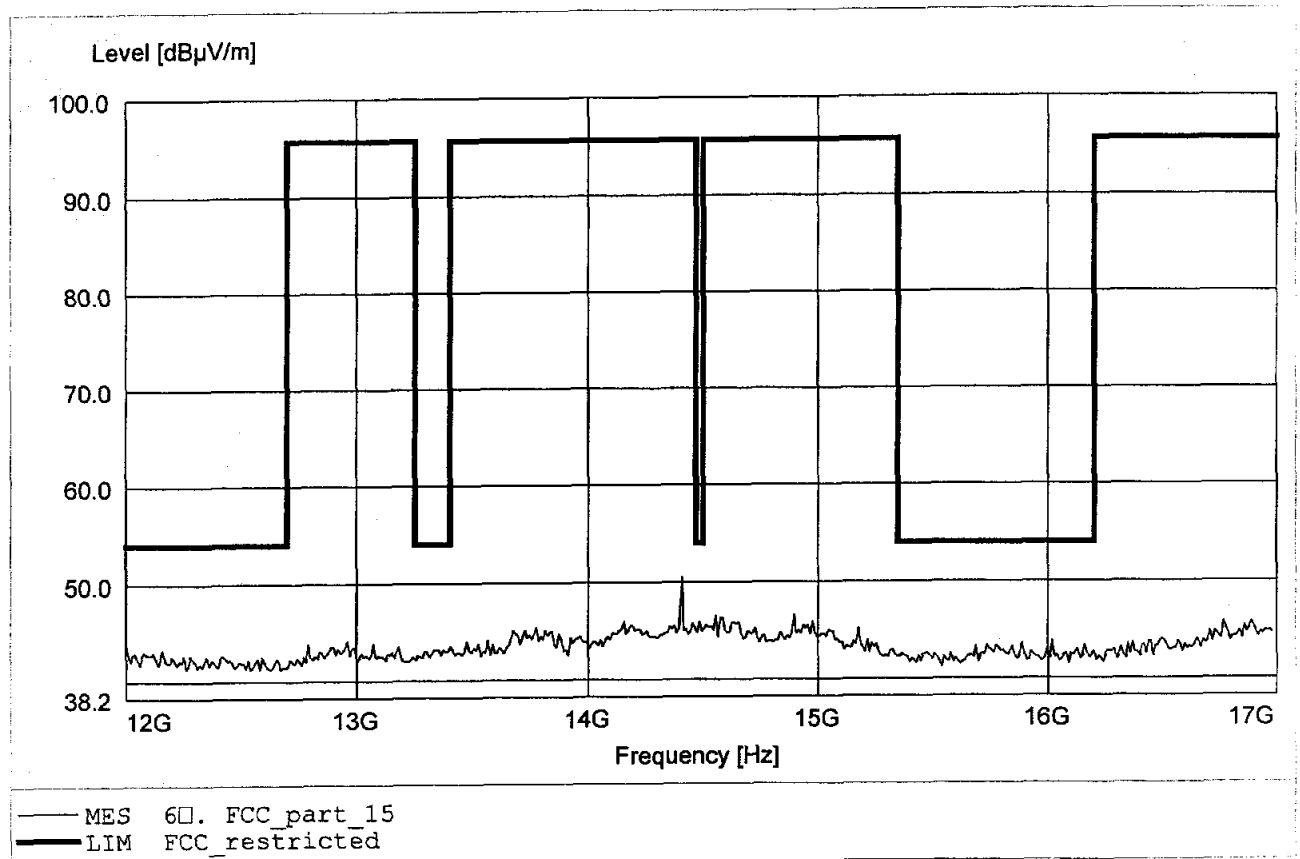


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 12.000GHz, Emax: 53.08dBµV/m, RBW: 1MHz

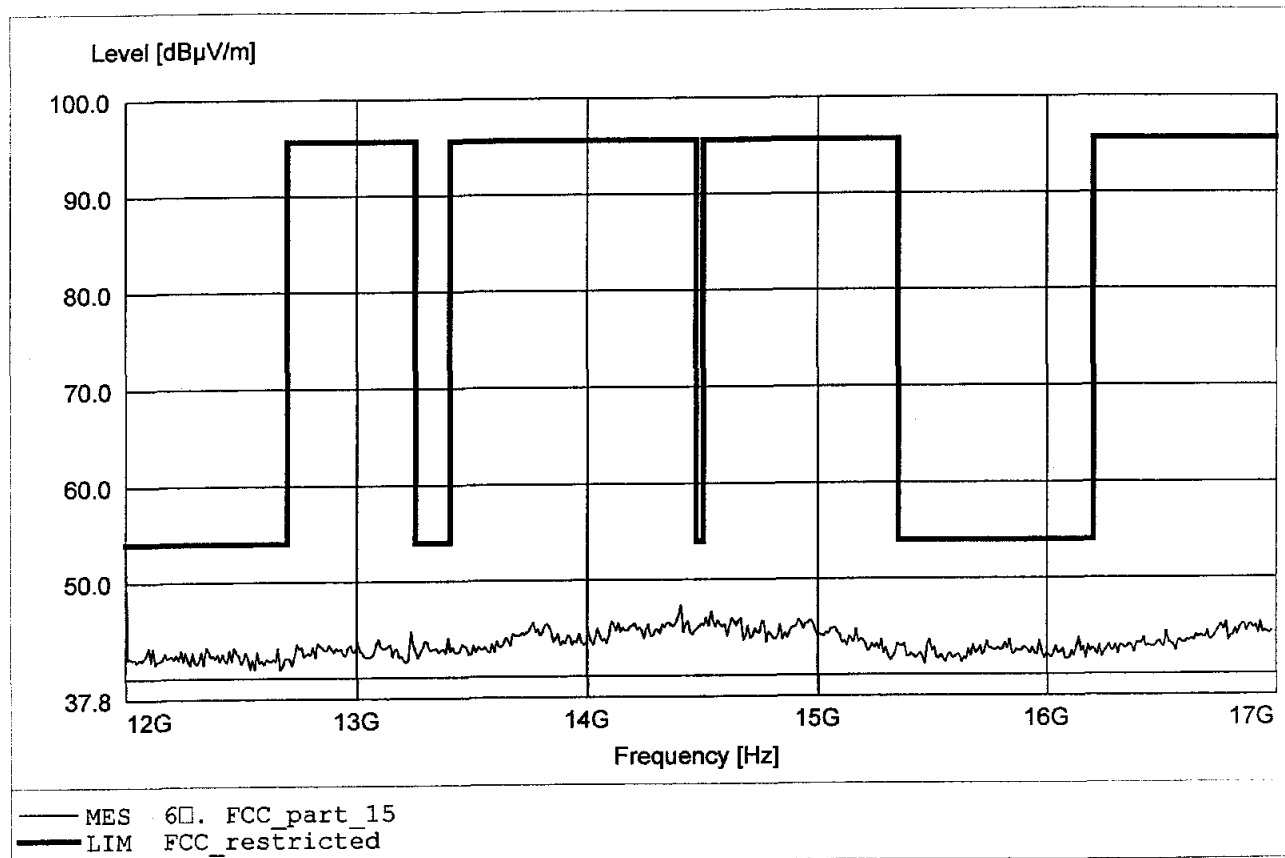


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 47.40dBµV/m, RBW: 1MHz

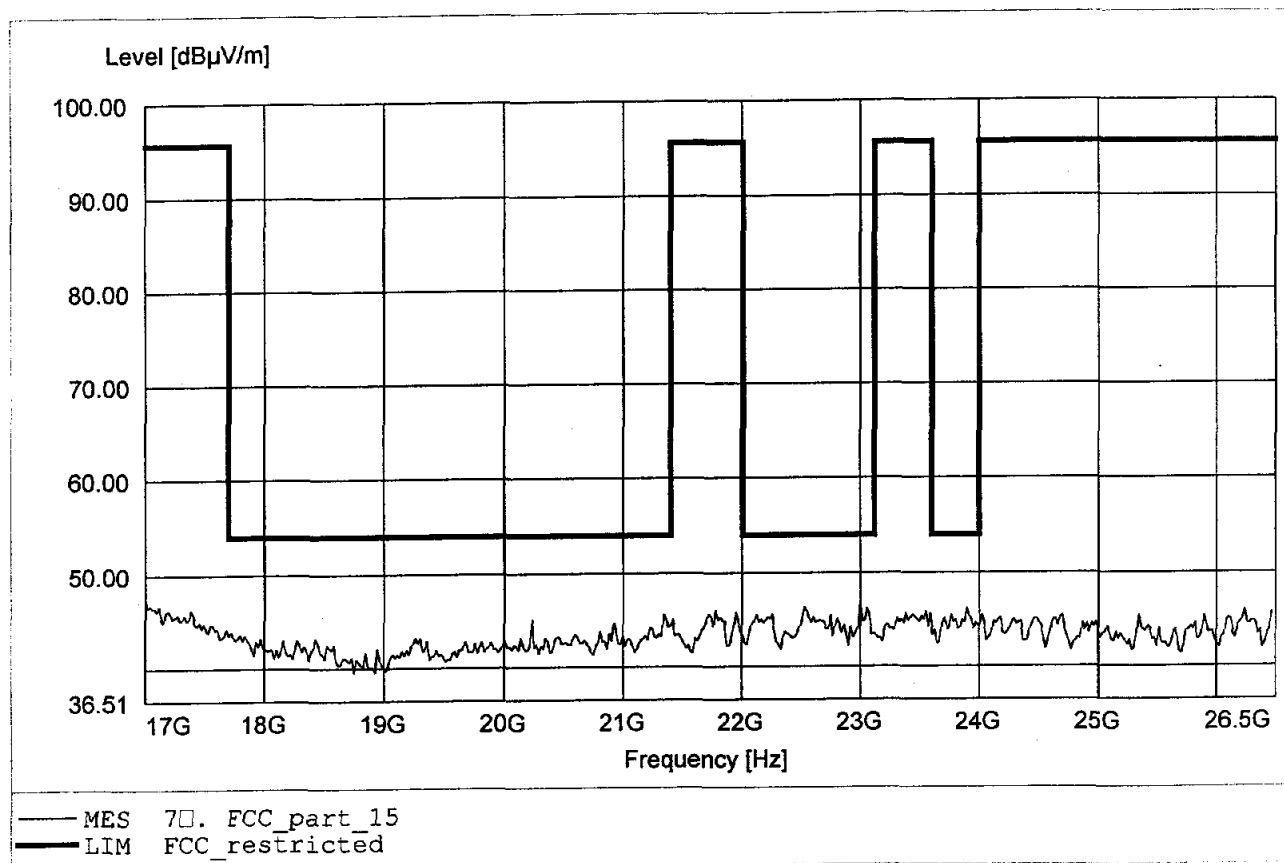


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 0
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 48.69dBµV/m, RBW: 1MHz

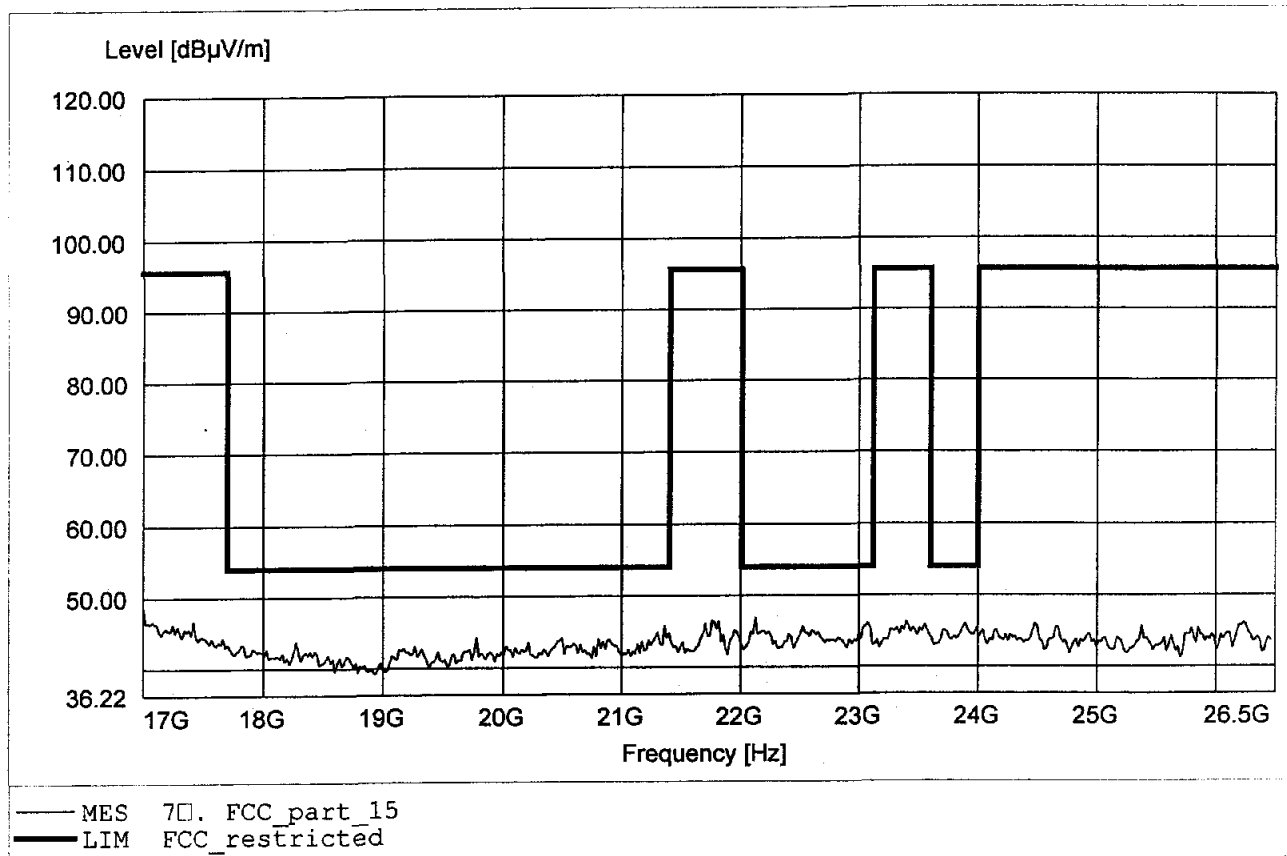


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.120MHz, Emax: 29.54dBµV/m, RBW: 100kHz

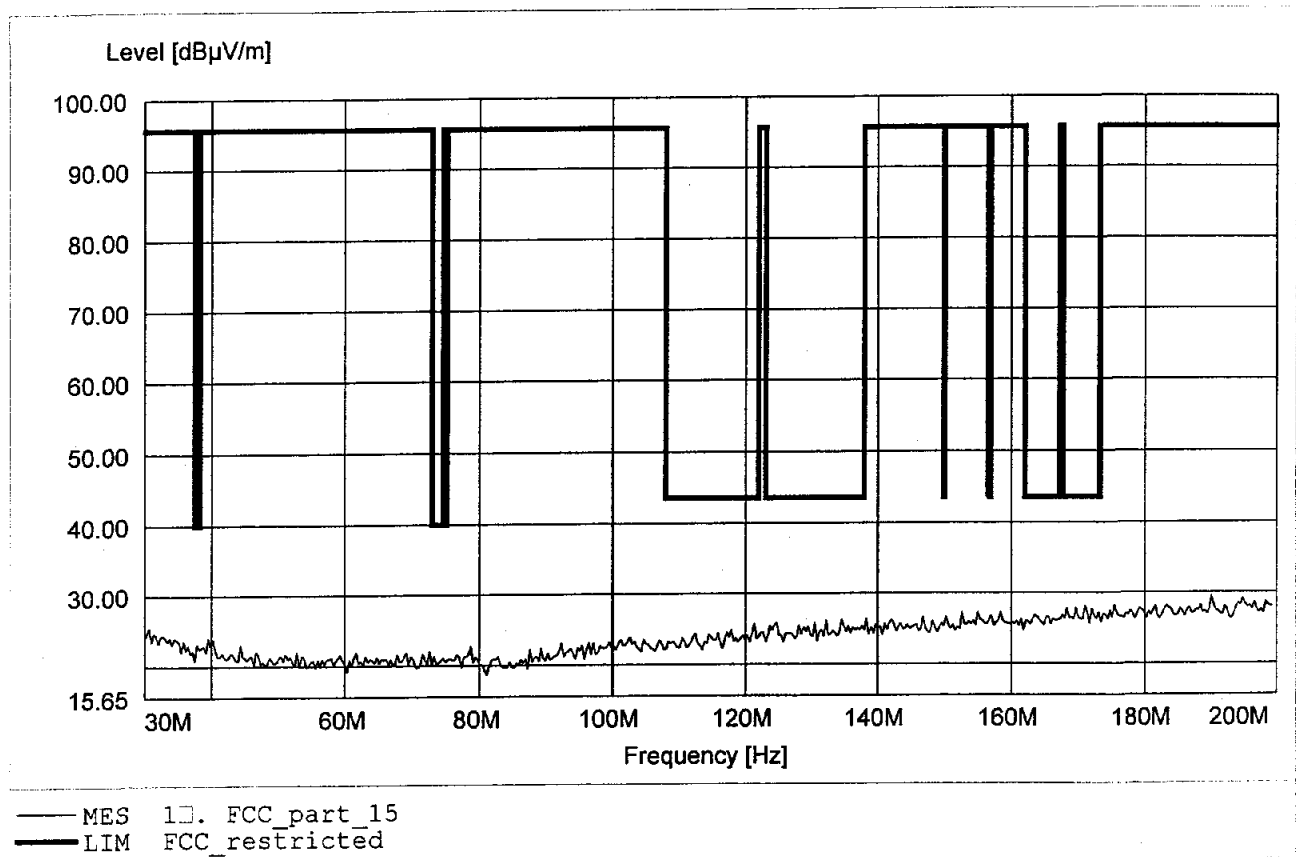


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.483MHz, Emax: 29.98dBµV/m, RBW: 100kHz

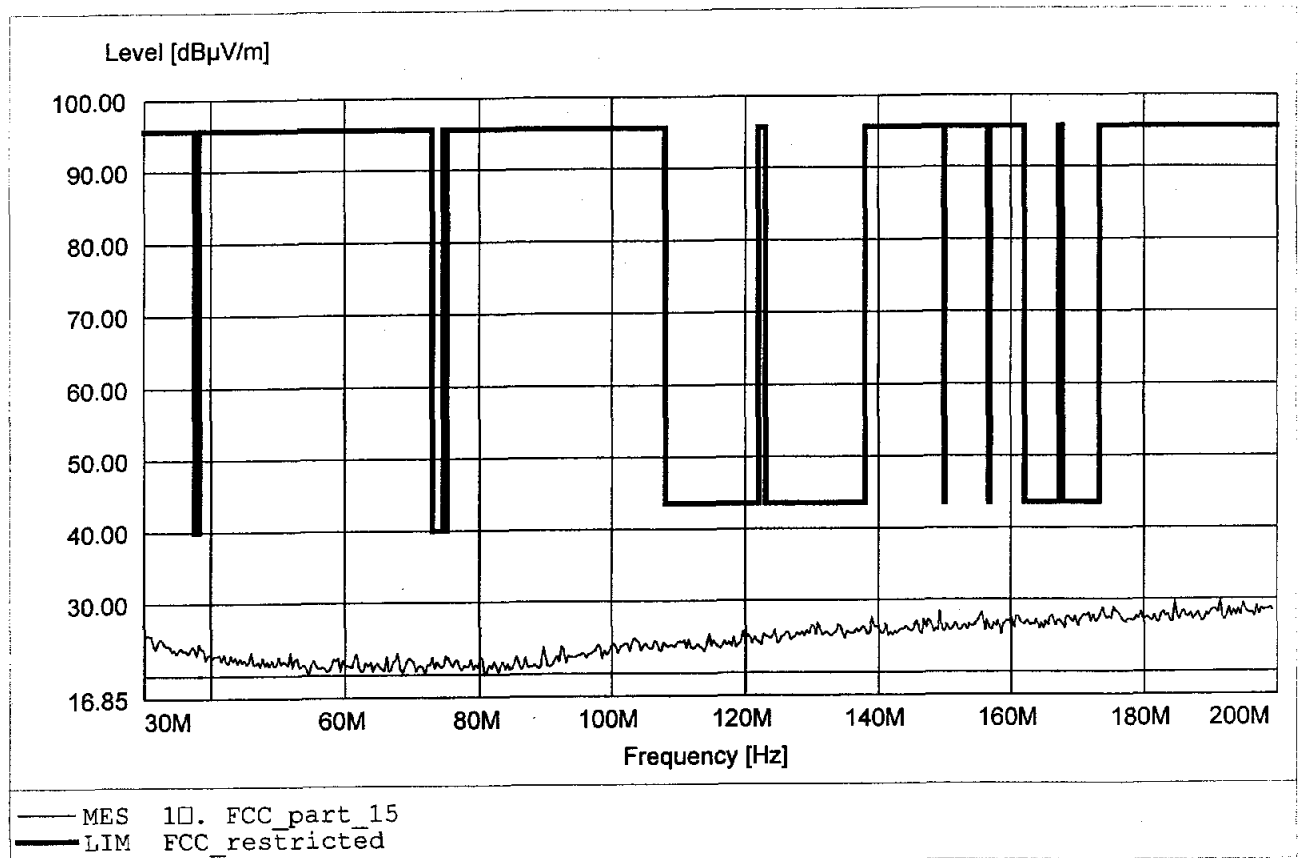


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 966.333MHz, Emax: 21.49dBμV/m, RBW: 100kHz

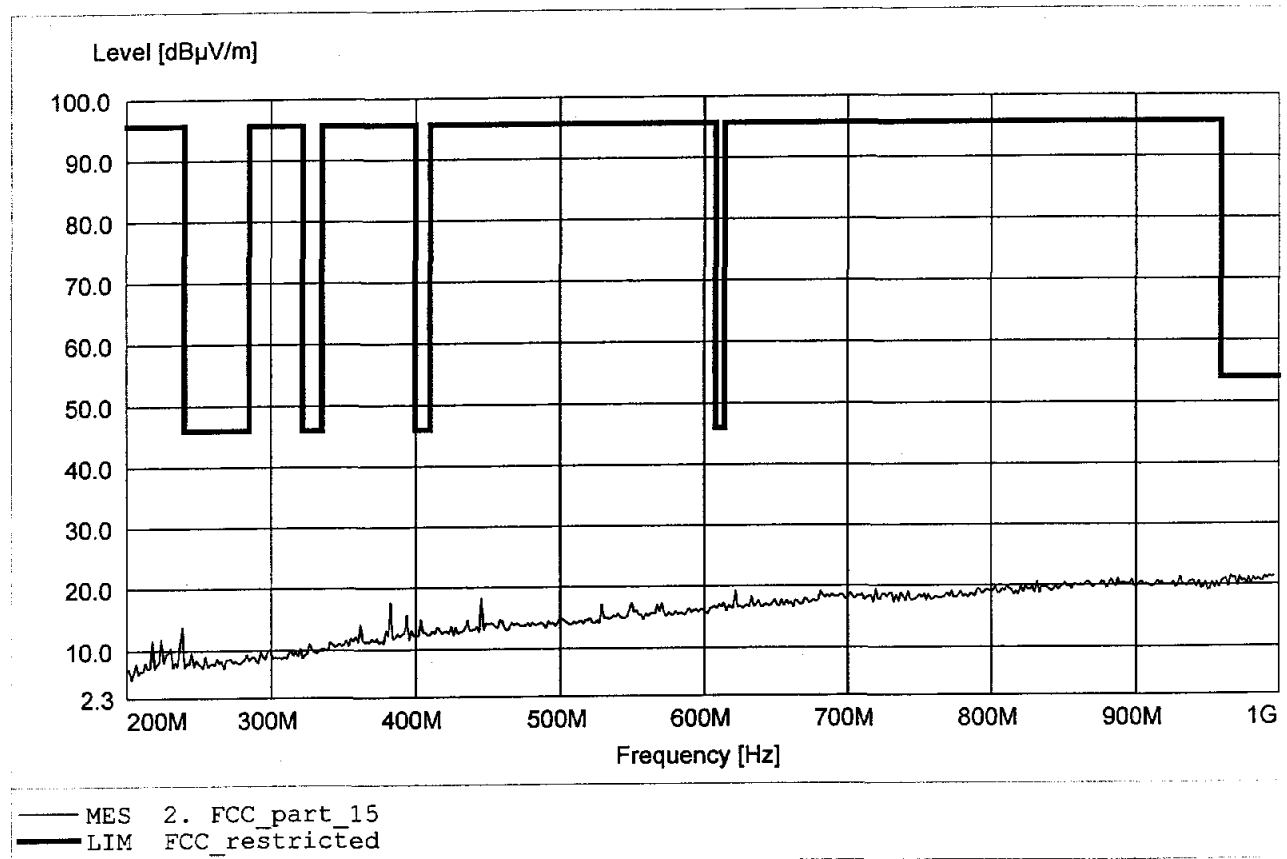


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 878.156MHz, Emax: 21.49dBµV/m, RBW: 100kHz

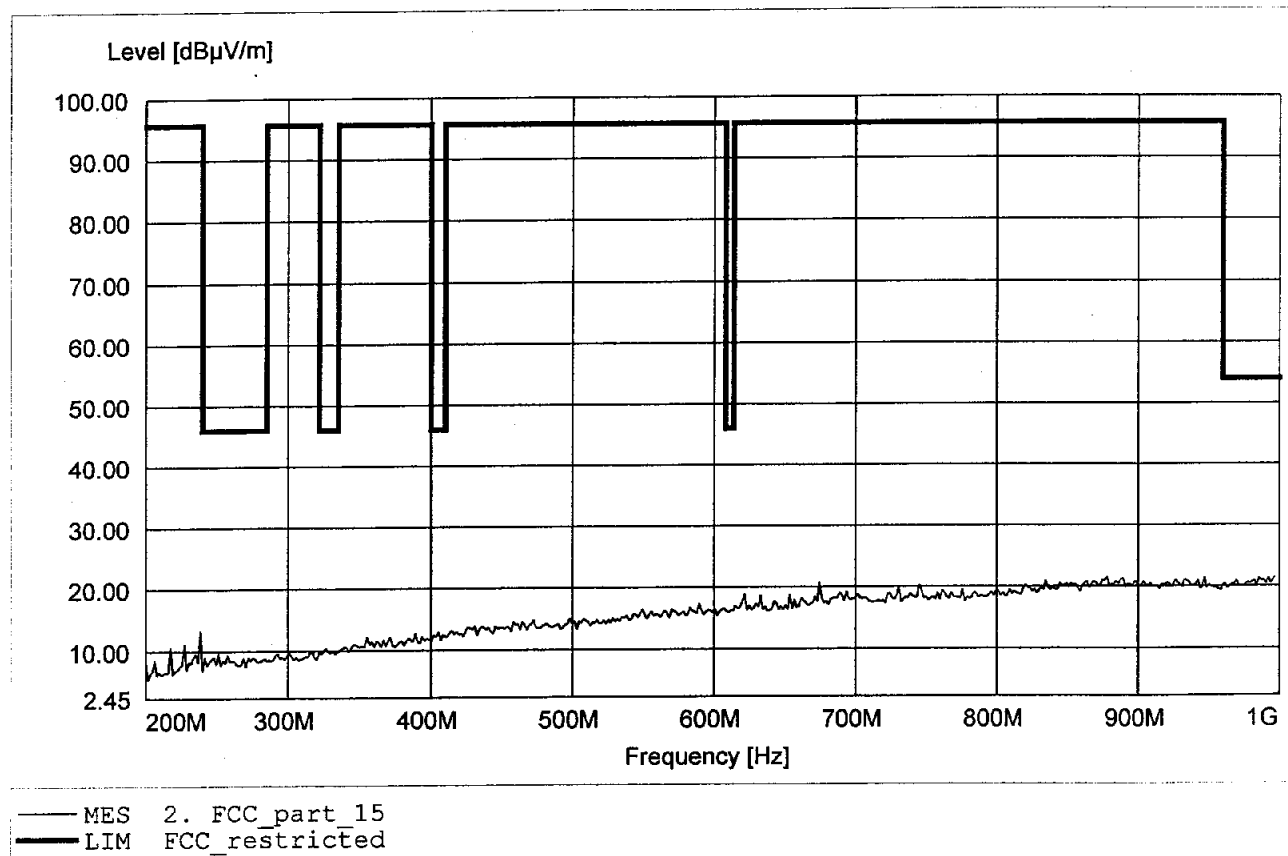


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 1.983GHz, Emax: 53.59dB μ V/m, RBW: 1MHz

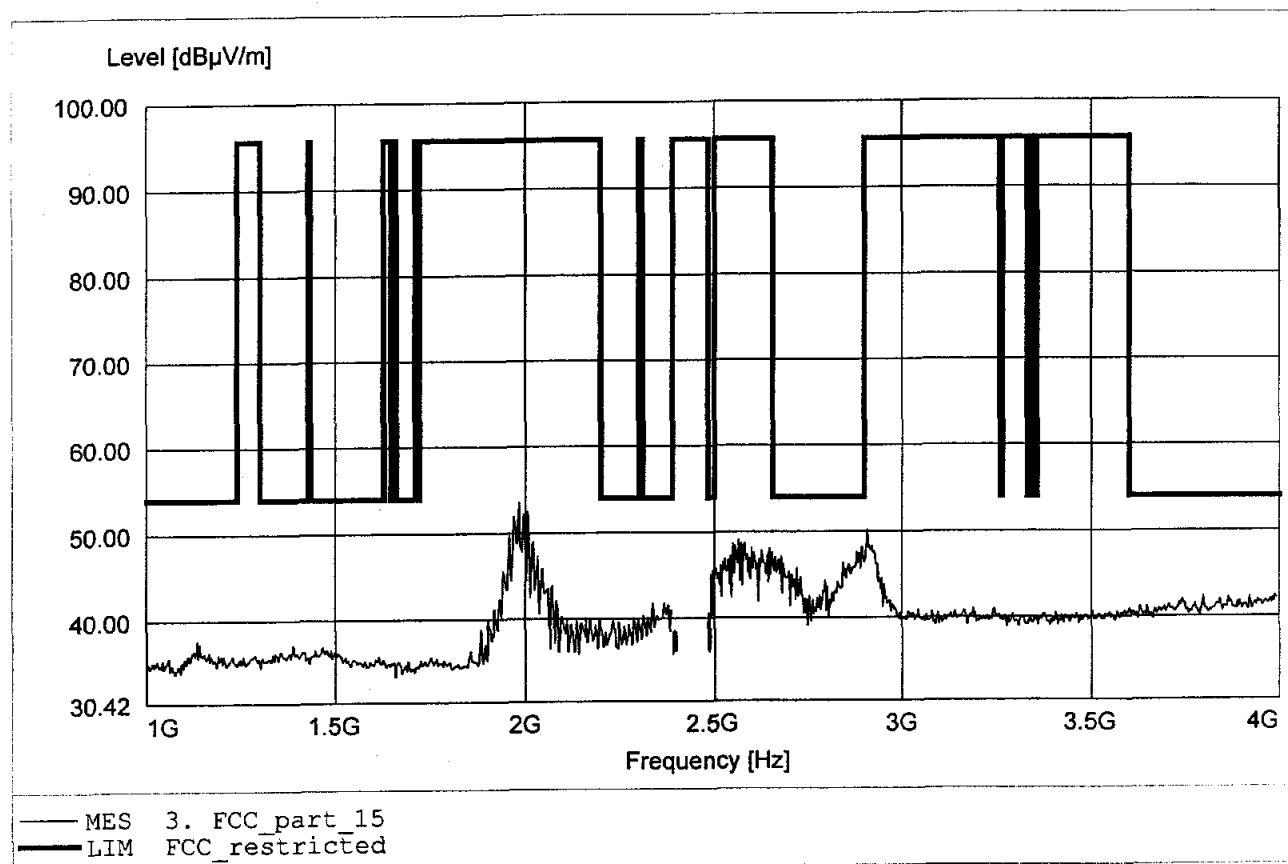


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.000GHz, Emax: 49.47dBuV/m, RBW: 1MHz

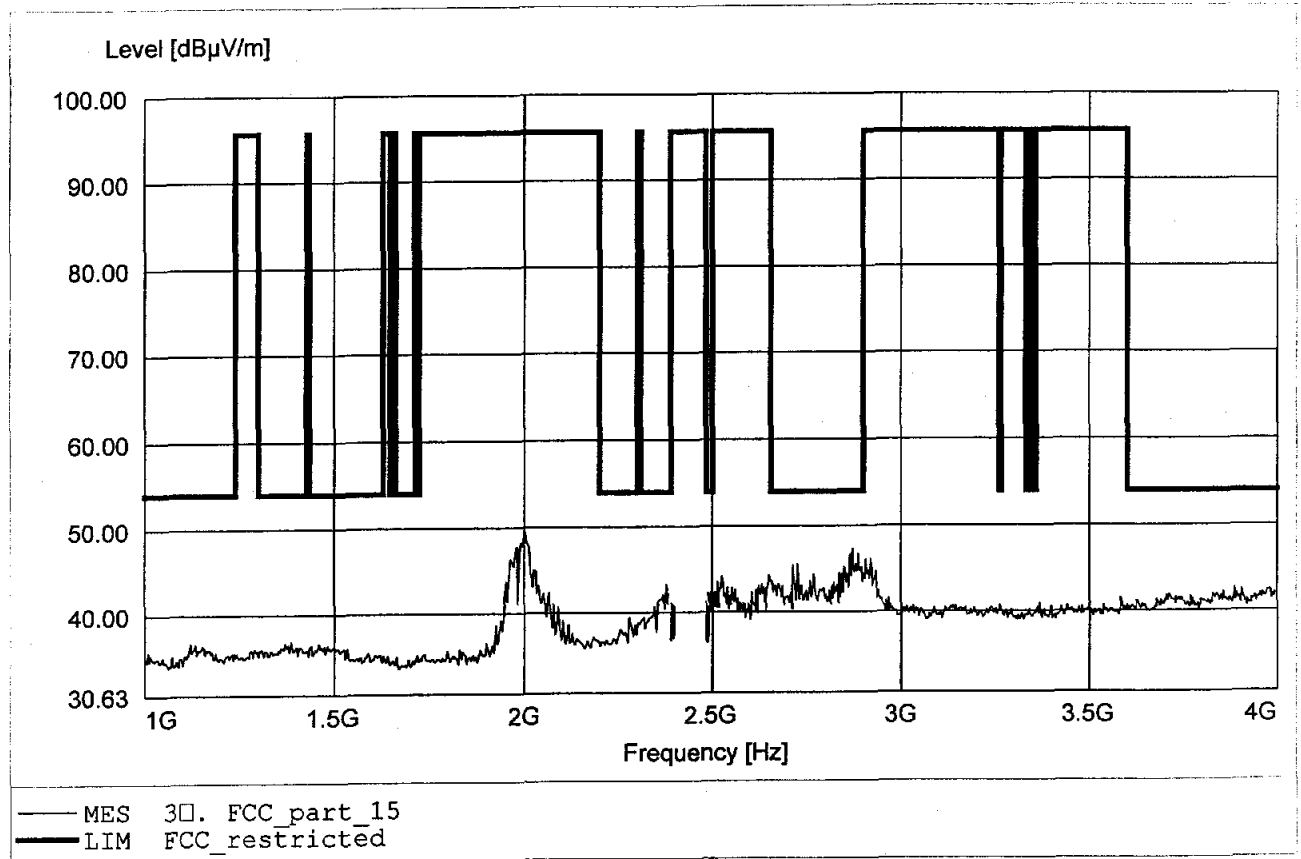


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 51.41dBμV/m, RBW: 1MHz

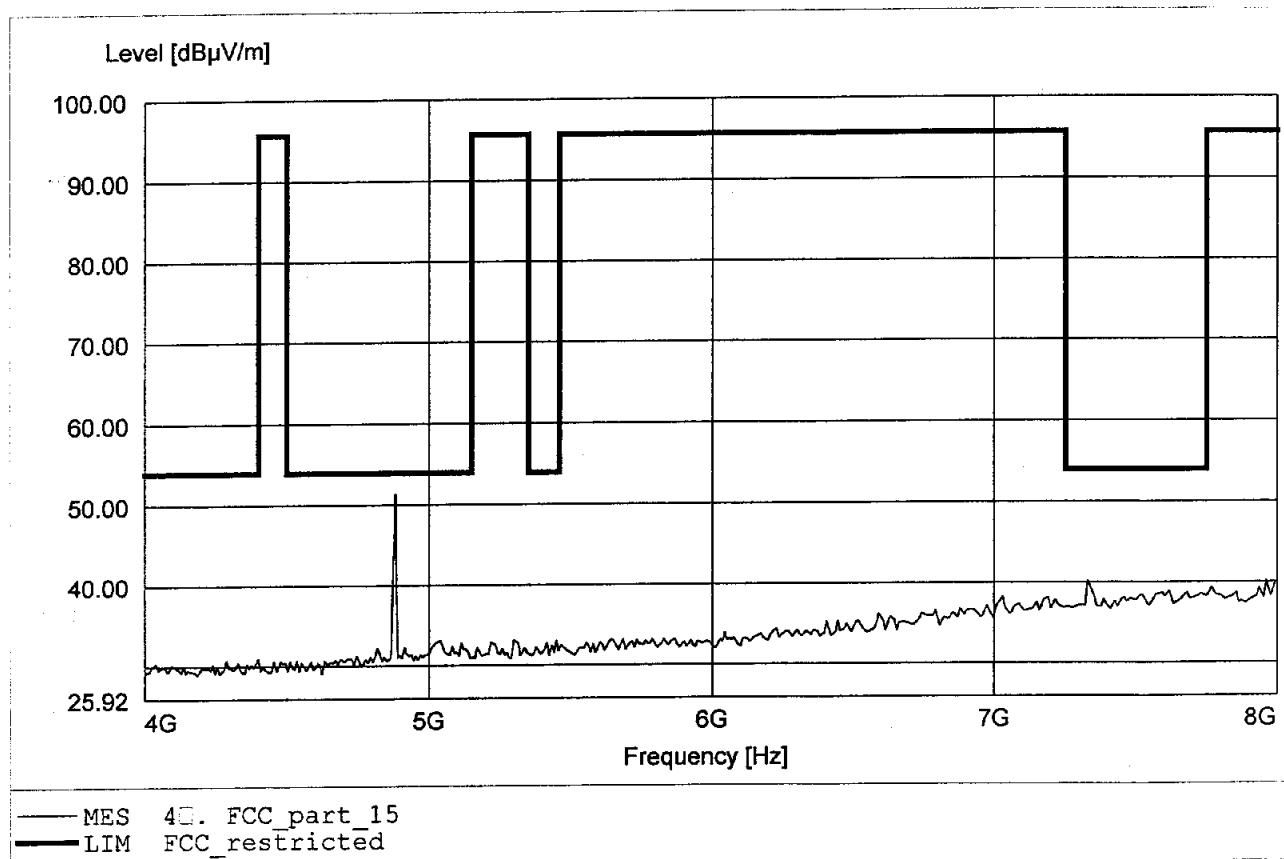


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 54.75dBµV/m, RBW: 1MHz

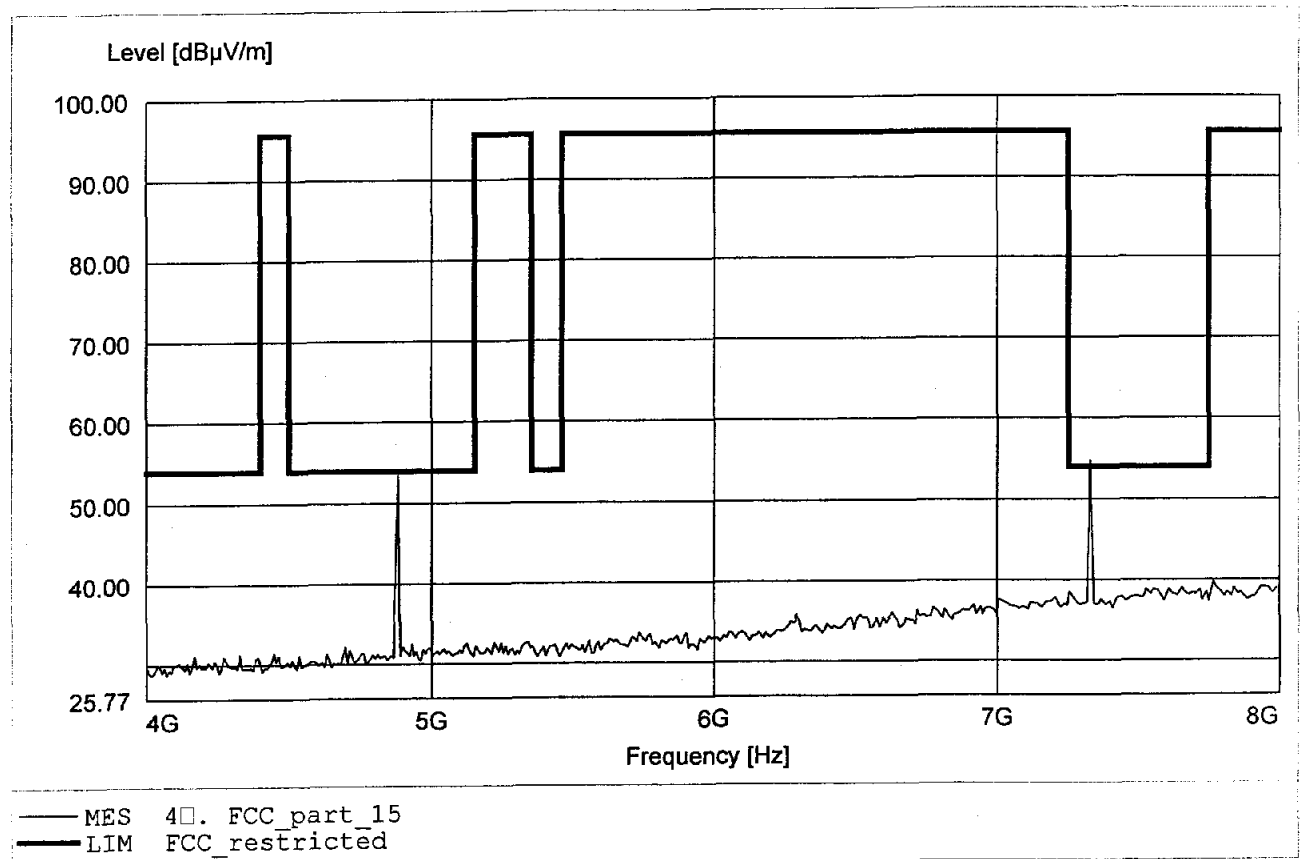


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 31.50dBµV/m, RBW: 1MHz

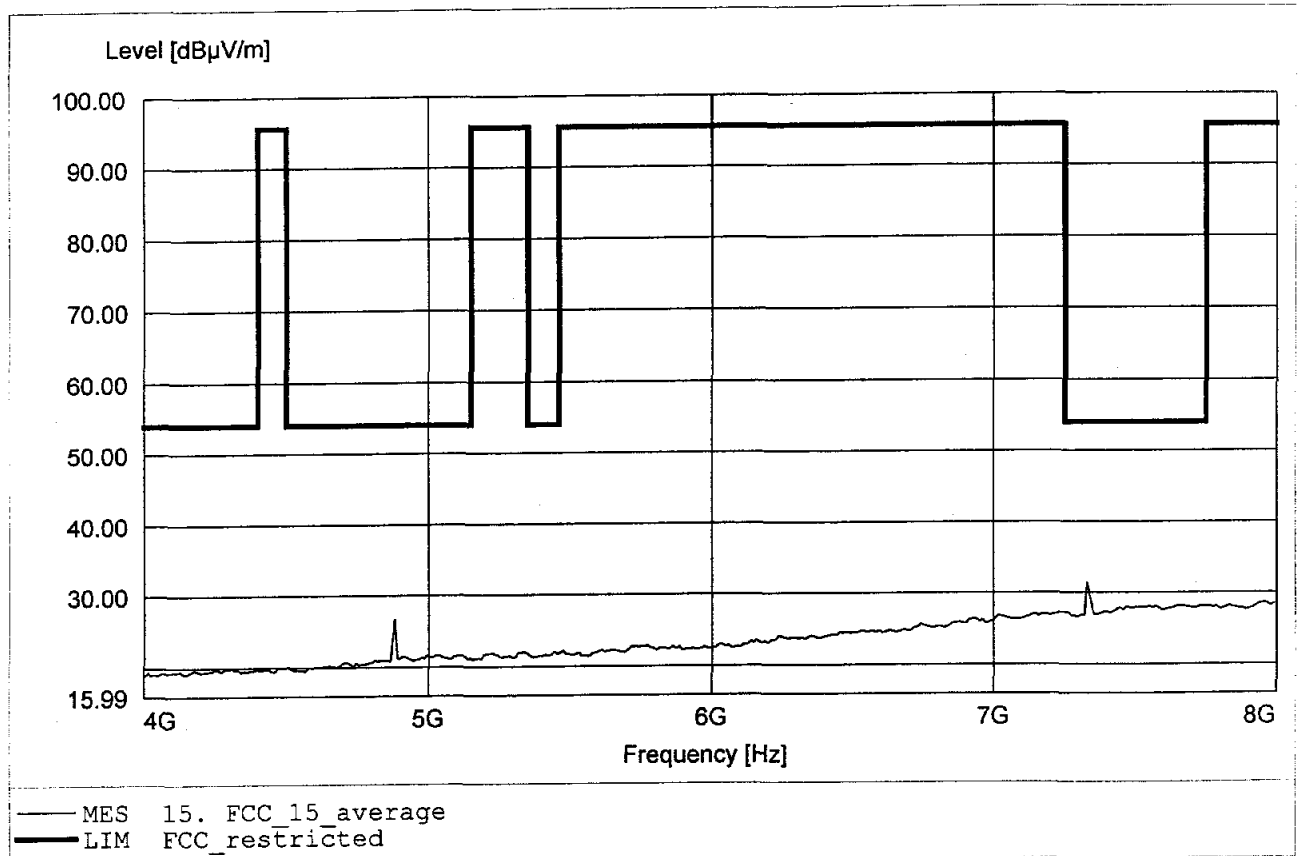


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 50.81dBμV/m, RBW: 1MHz

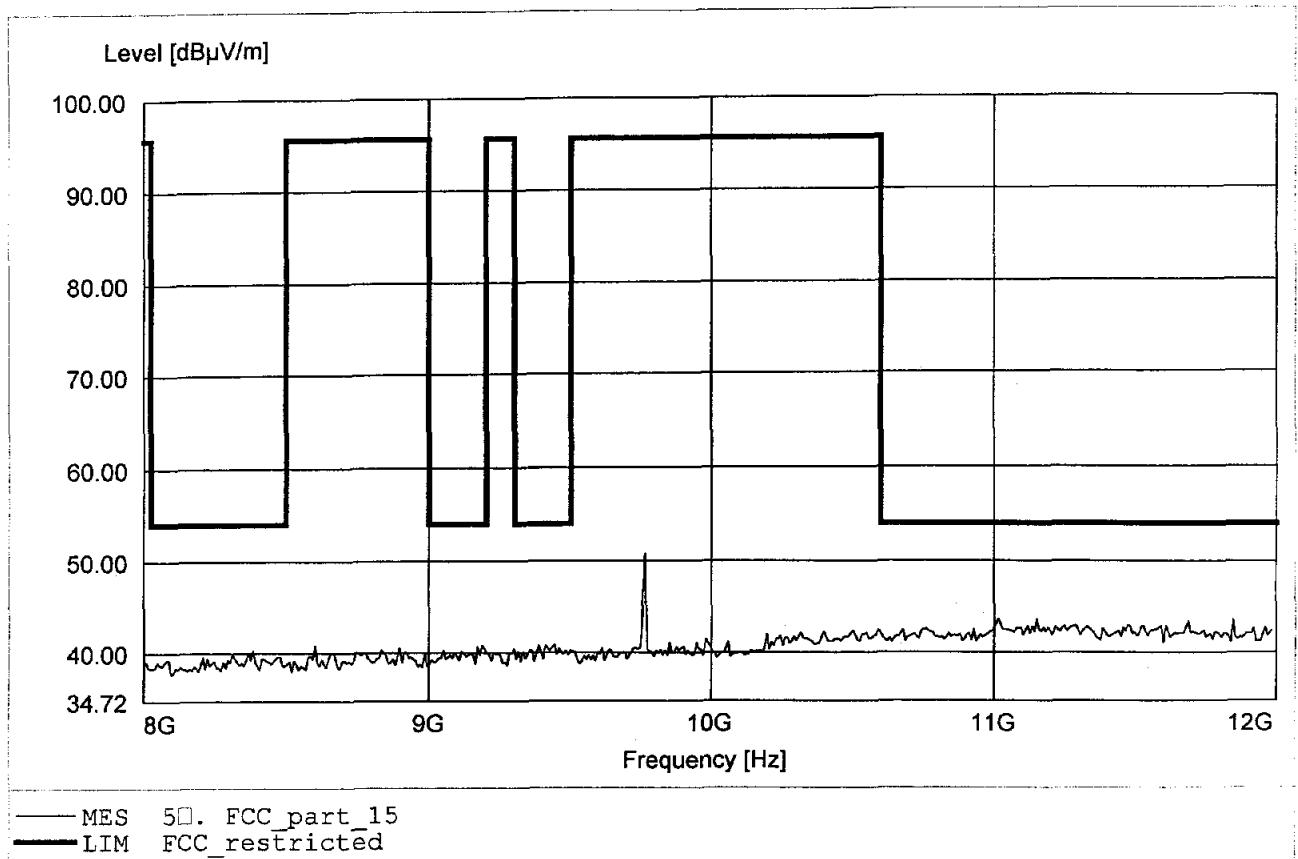


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT.: Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 55.77dBμV/m, RBW: 1MHz

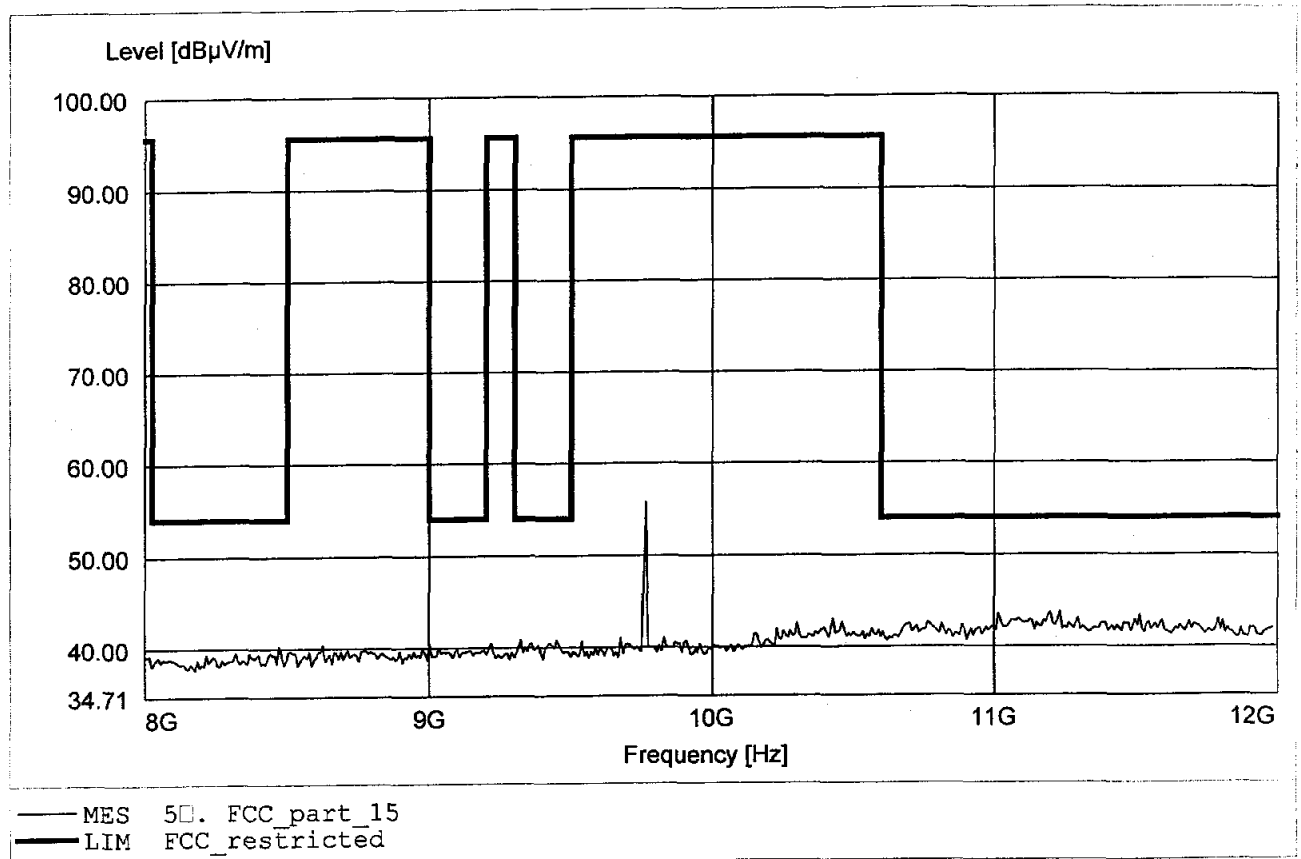


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.655GHz, Emax: 47.15dBµV/m, RBW: 1MHz

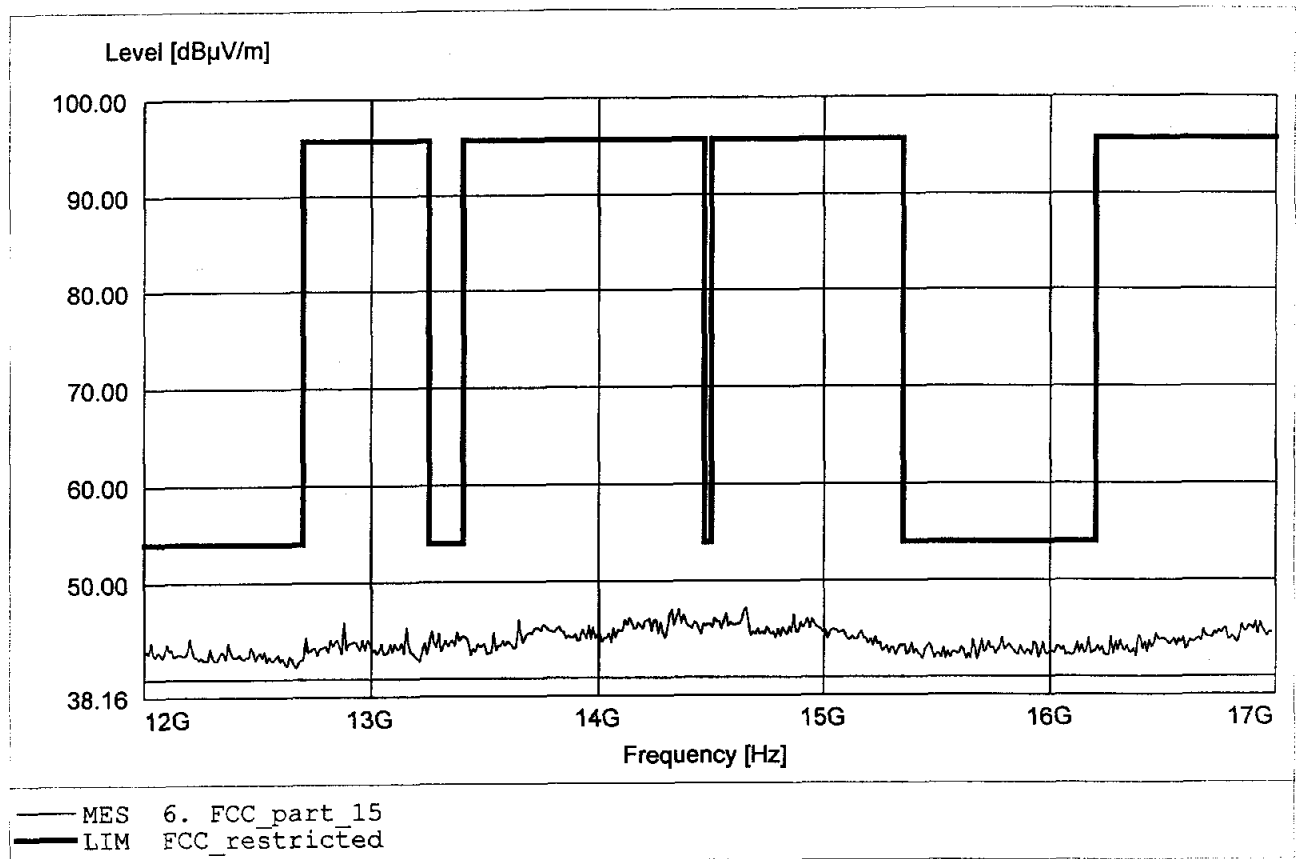


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 12.200GHz, Emax: 56.91dBµV/m, RBW: 1MHz

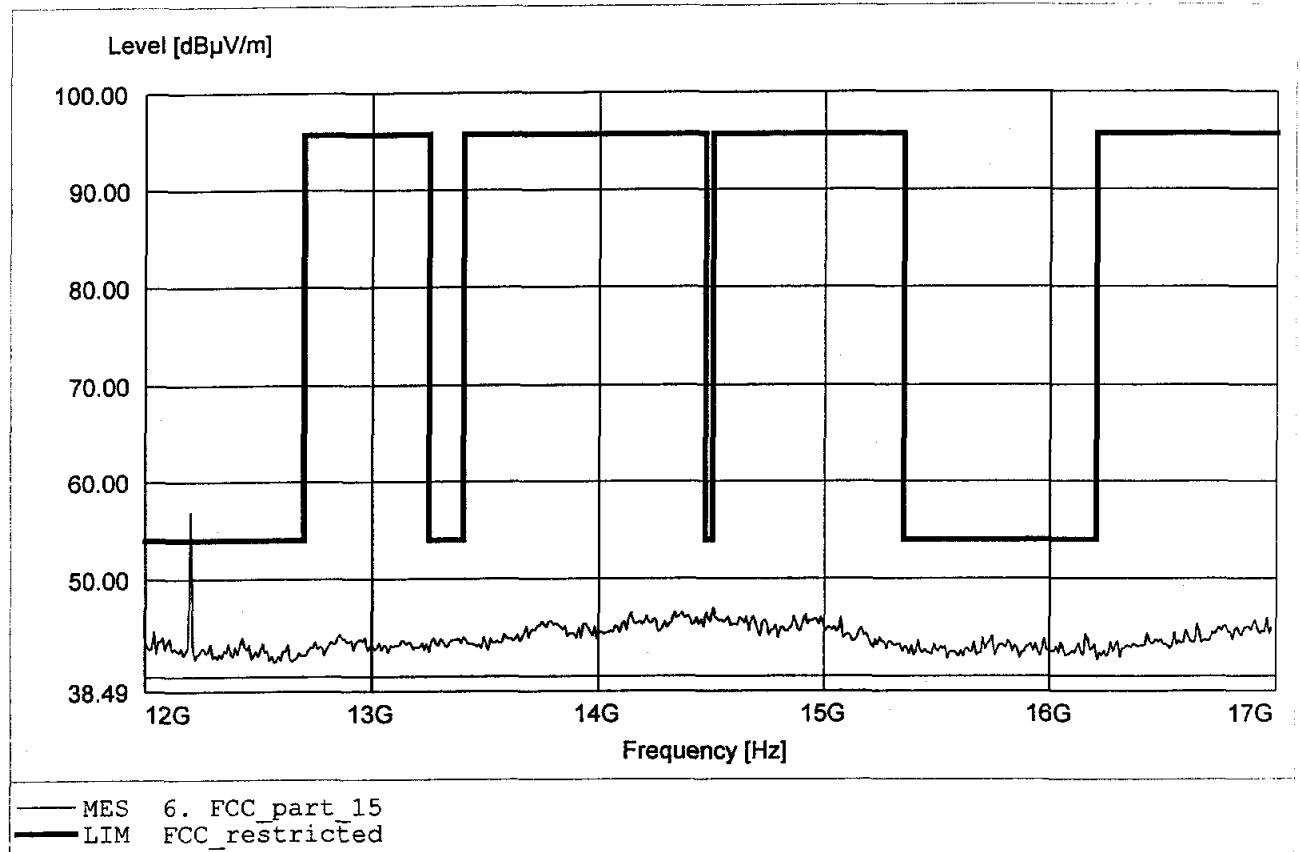


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.645GHz, Emax: 36.69dBµV/m, RBW: 1MHz

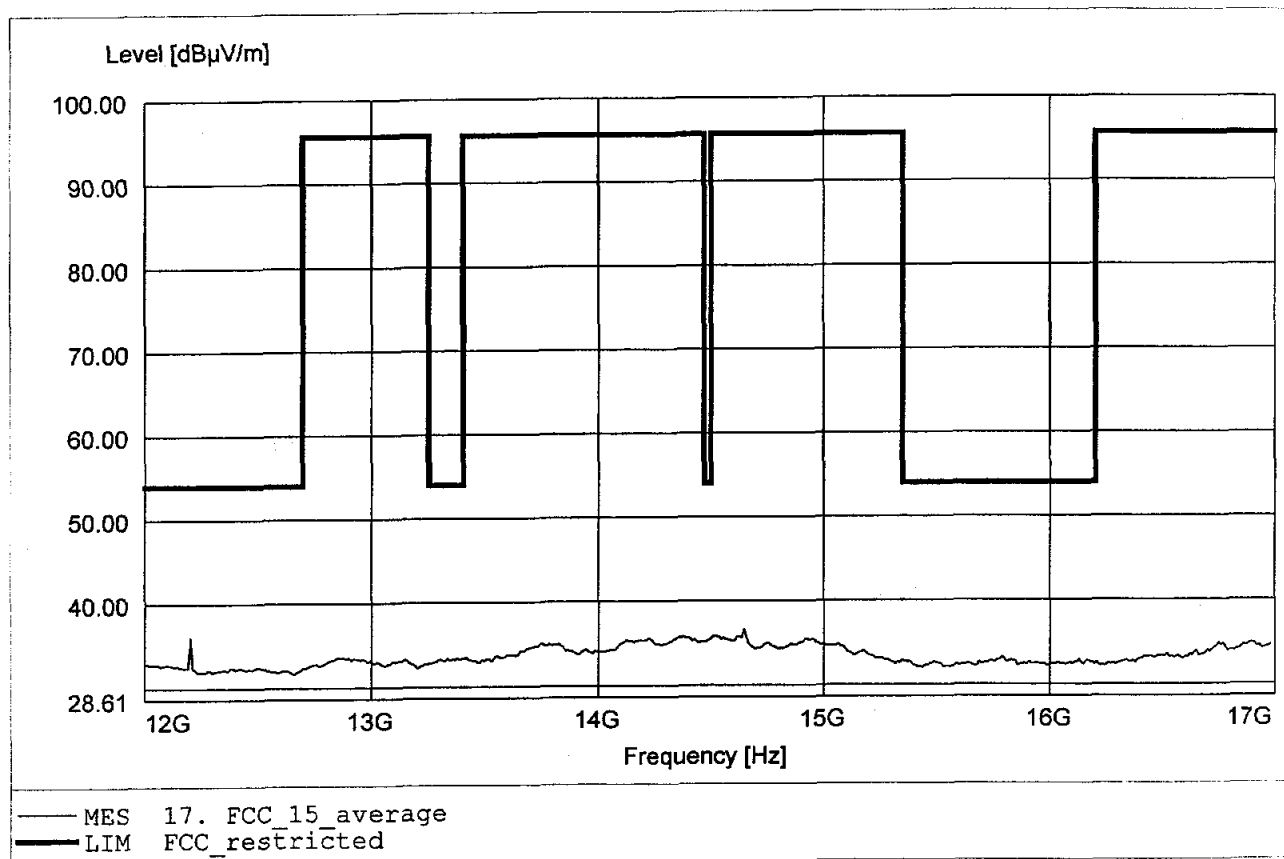


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 23.378GHz, Emax: 47.35dBµV/m, RBW: 1MHz

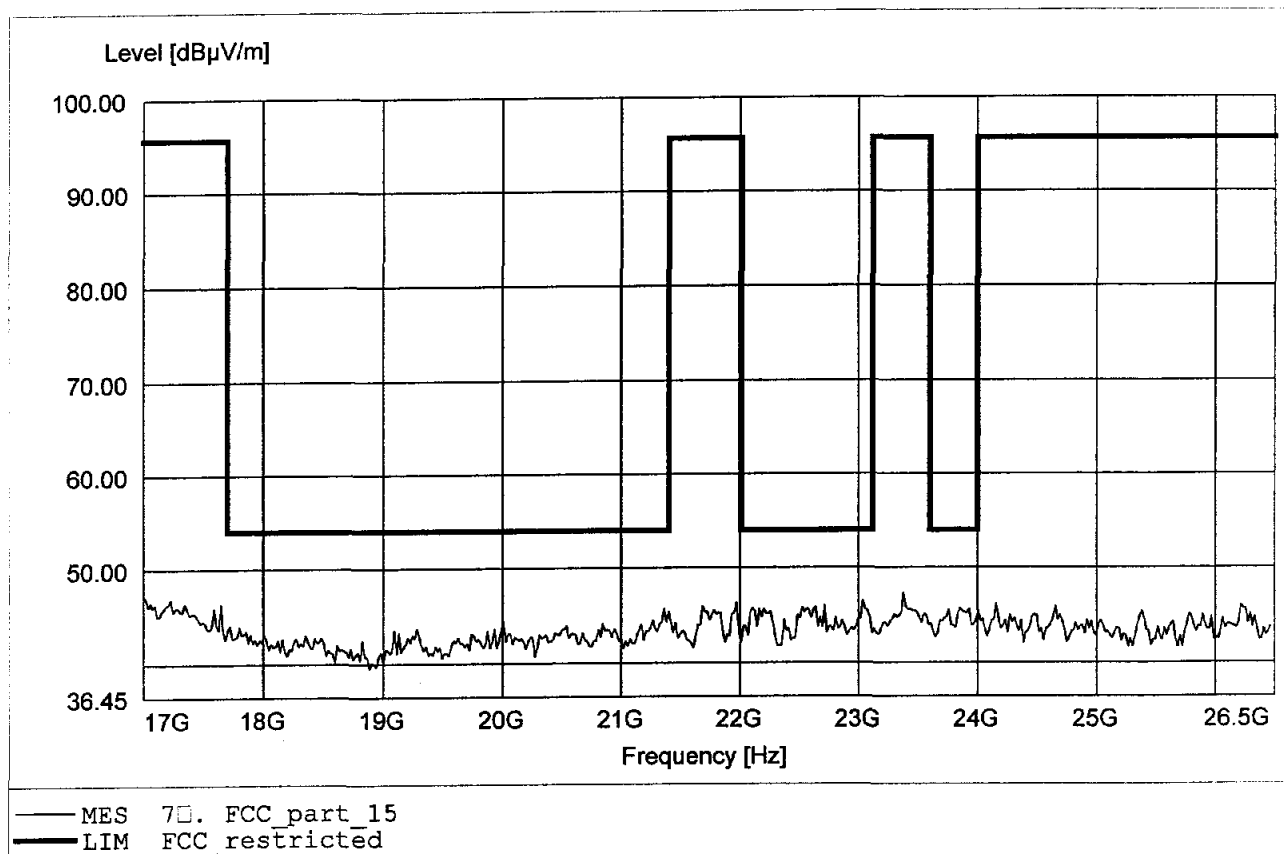


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 47
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 48.39dBµV/m, RBW: 1MHz

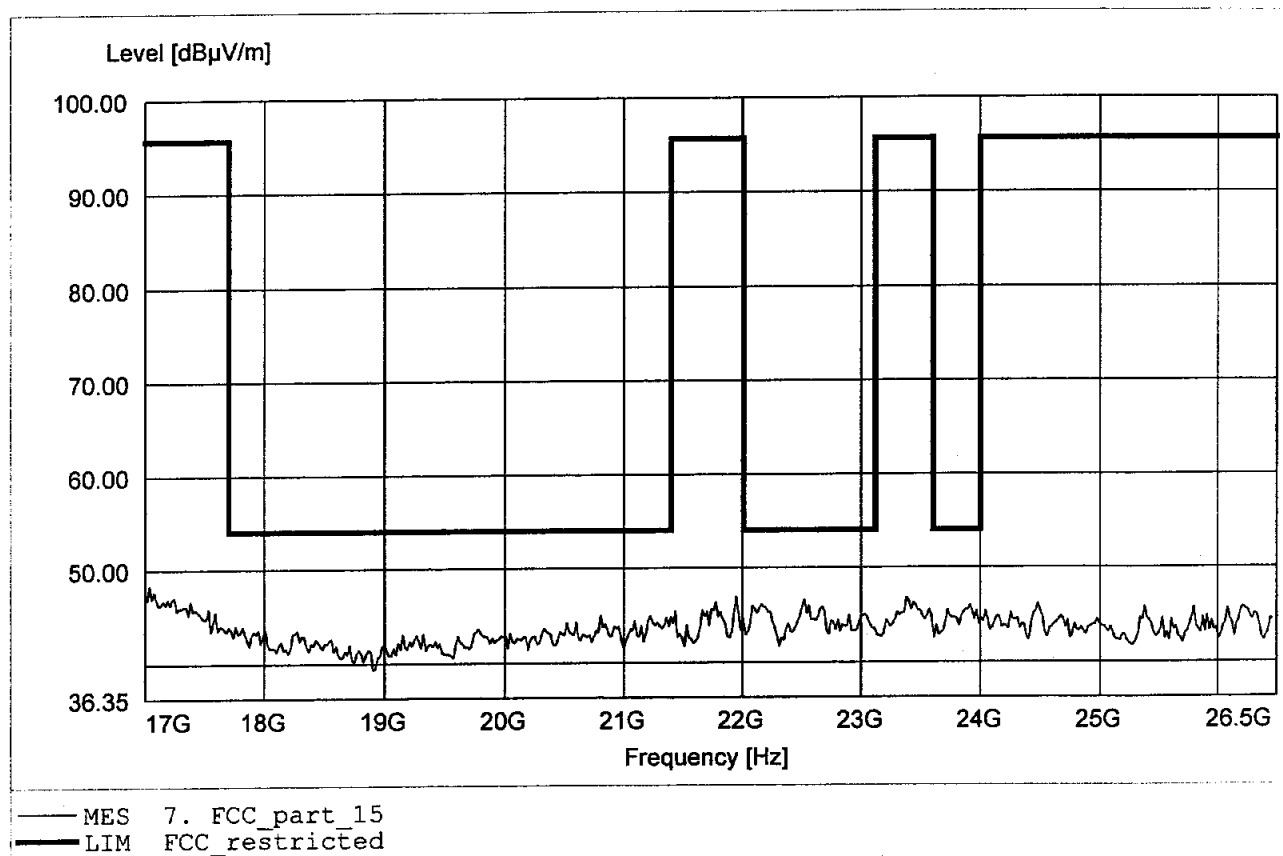


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.571MHz, Emax: 30.49dBμV/m, RBW: 100kHz

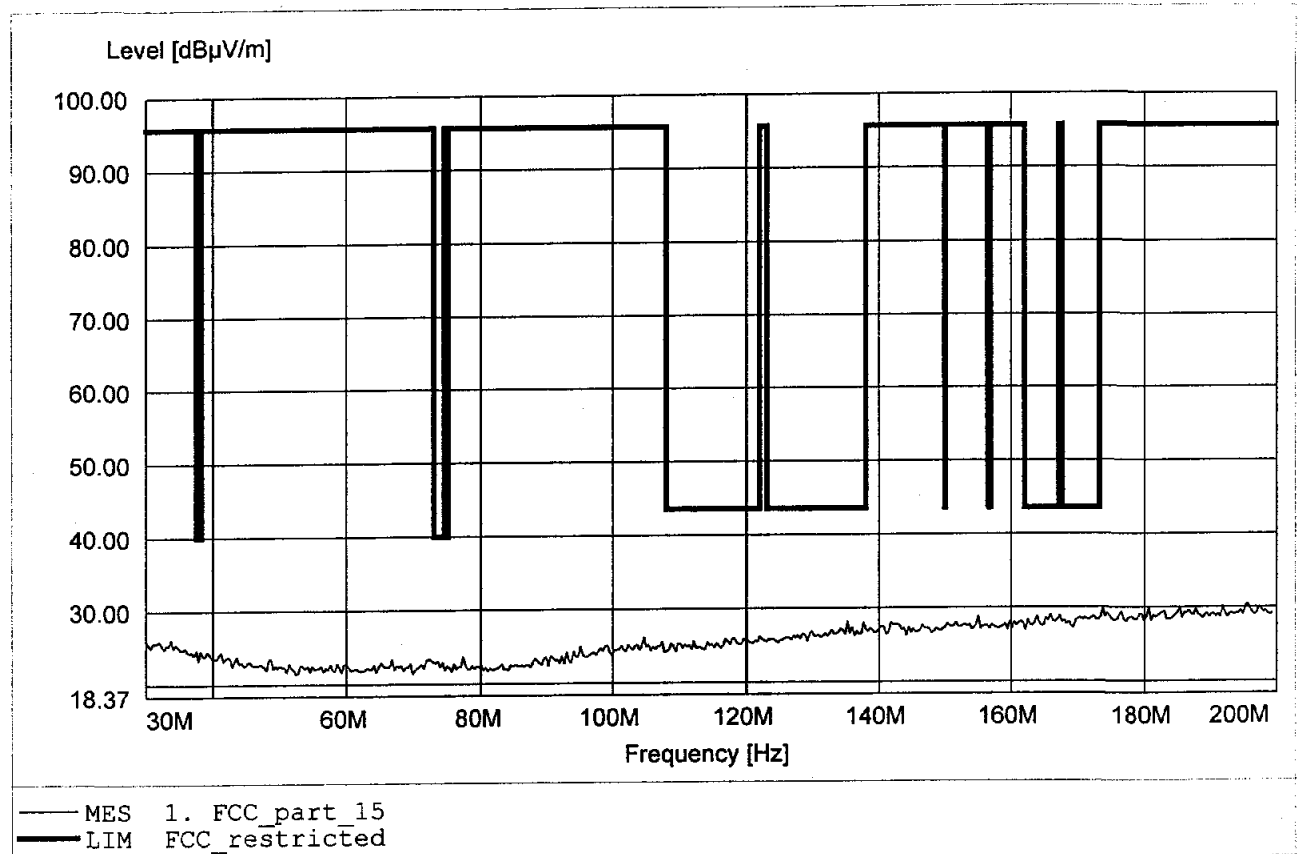


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
 Model: GN9120 2G4 FCC
 Approval Holder: GnNetcom
 Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247
 Comment 1: Dist.: 3m, Ant.: HK 116
 Comment 2: Freq: 195.230MHz, Emax: 31.26dBµV/m, RBW: 100kHz

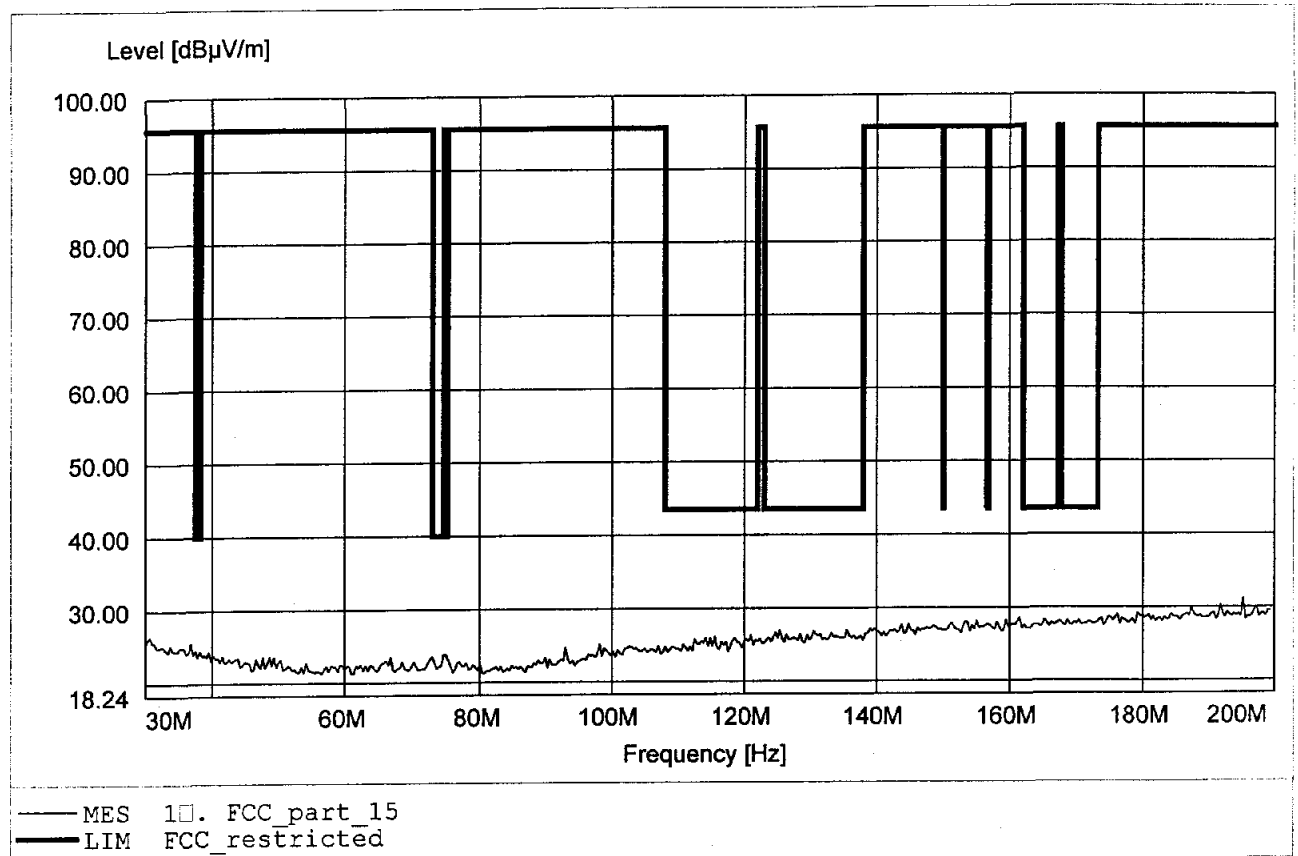


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 902.204MHz, Emax: 25.44dBμV/m, RBW: 100kHz

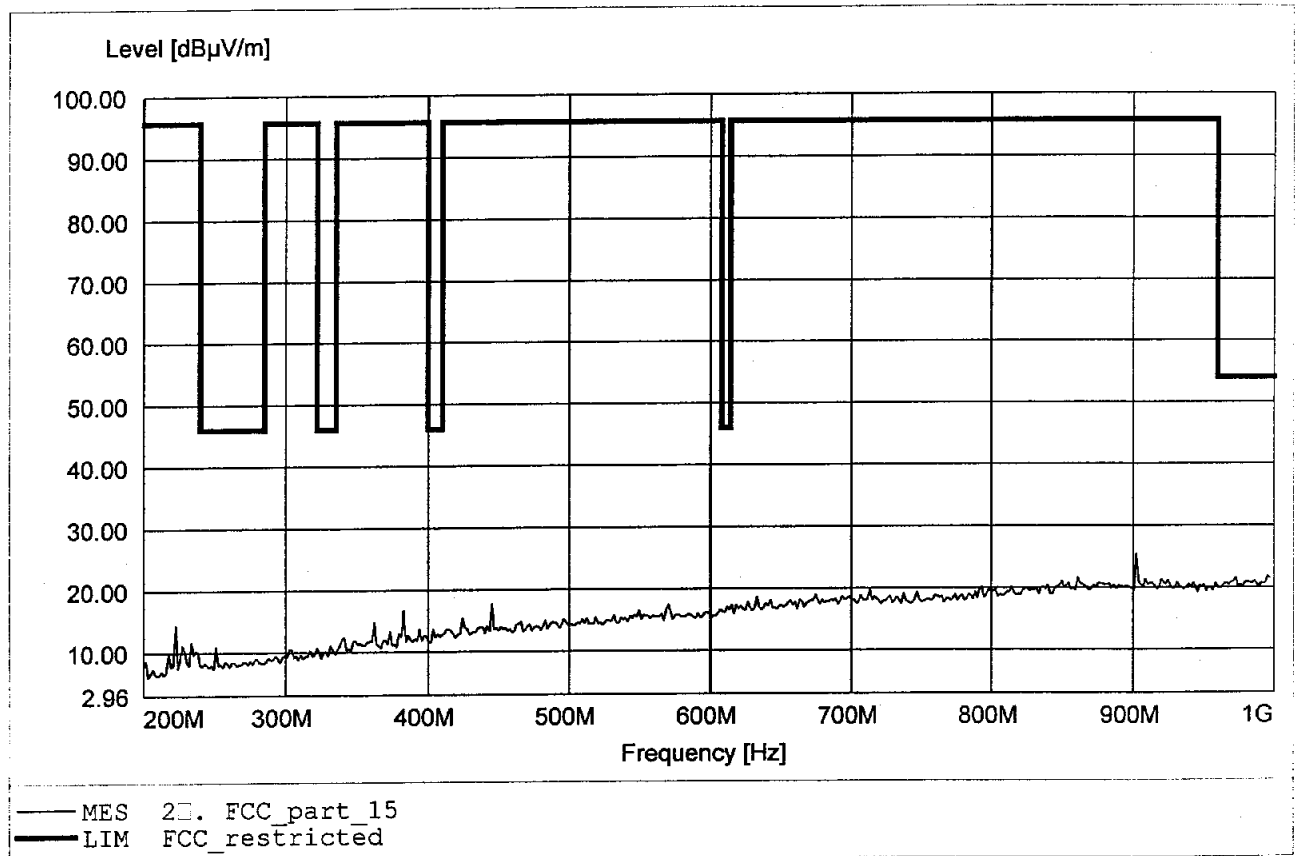


Spurious emissions Field Strength **FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
 Model: GN9120 2G4 FCC
 Approval Holder: GnNetcom
 Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to S15.247
 Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
 Comment 2: Freq: 879.760MHz, Emax: 22.85dBμV/m, RBW: 100kHz

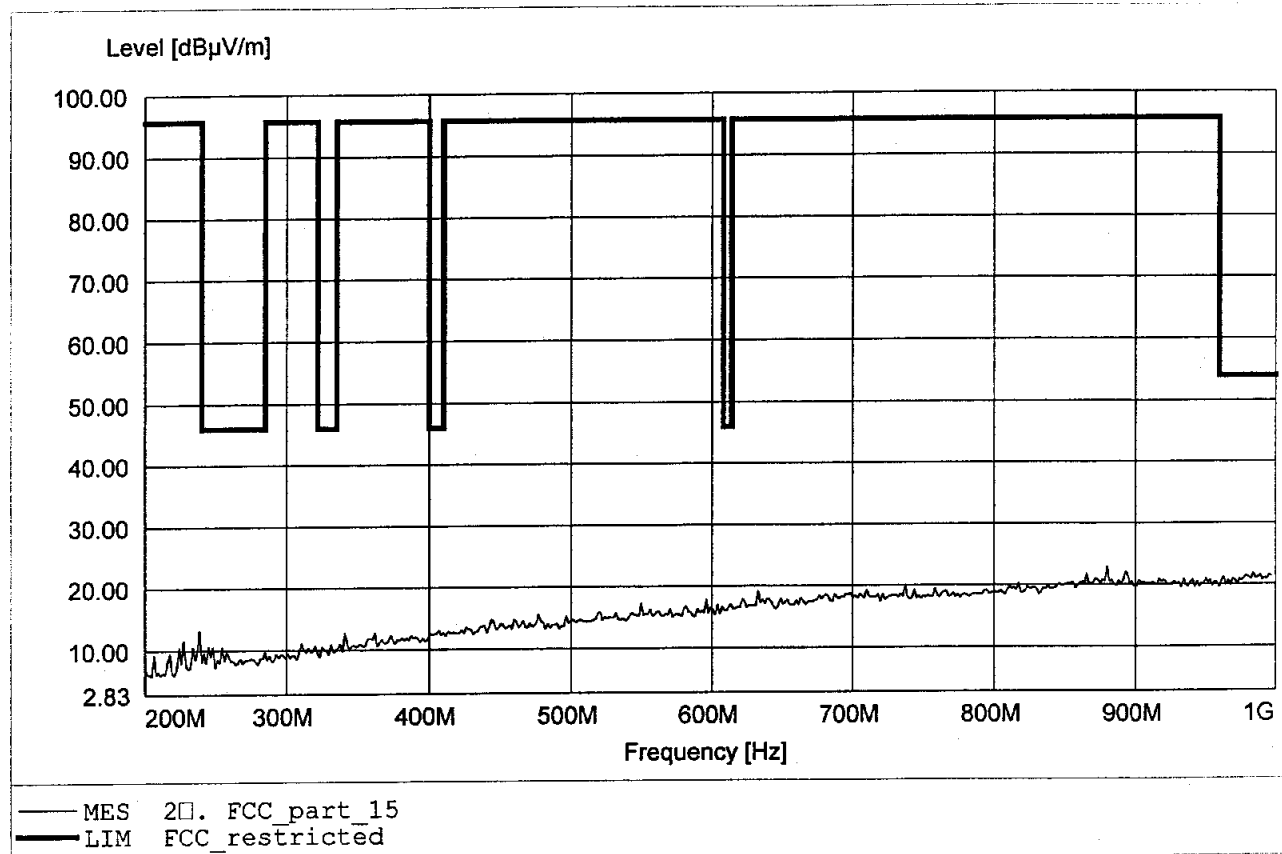


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 98.21dBµV/m, RBW: 1MHz

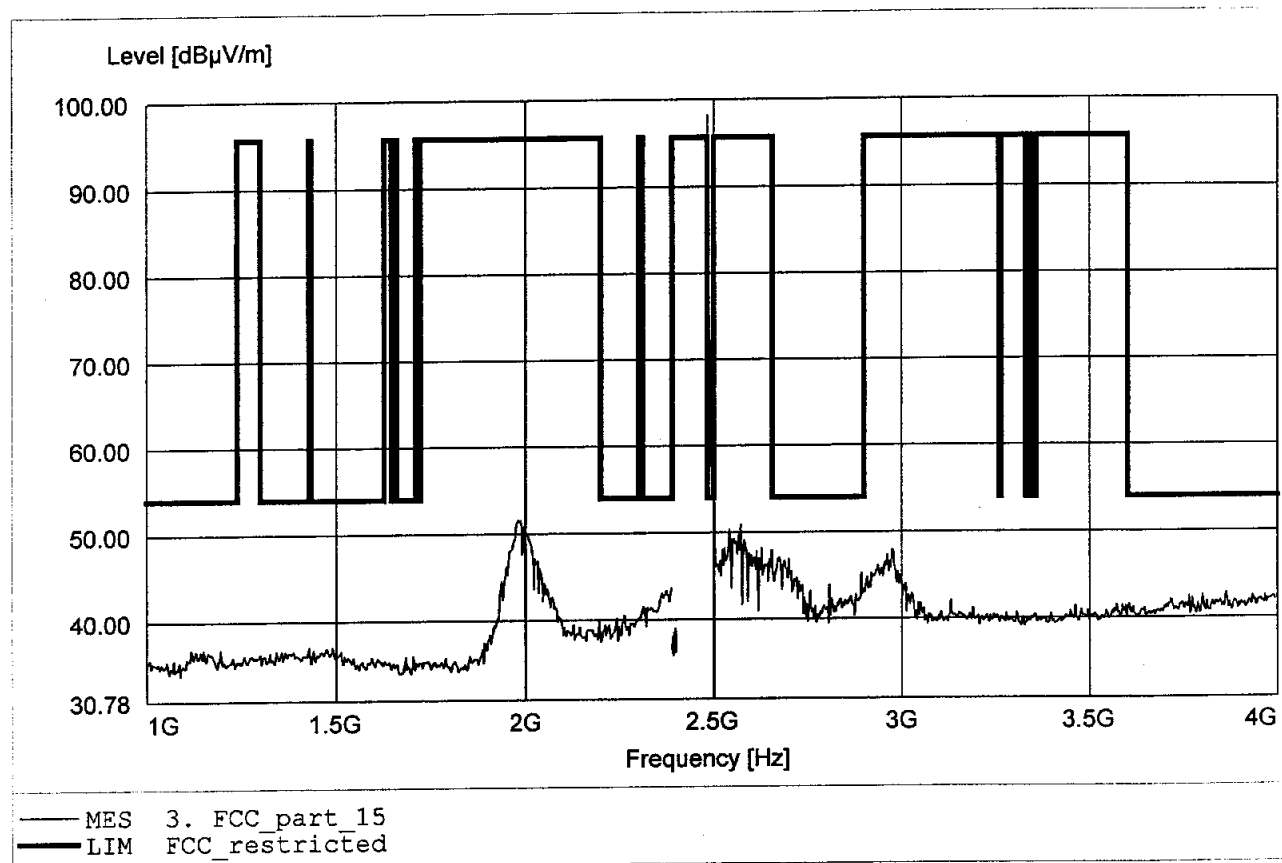


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 75.02dBμV/m, RBW: 1MHz

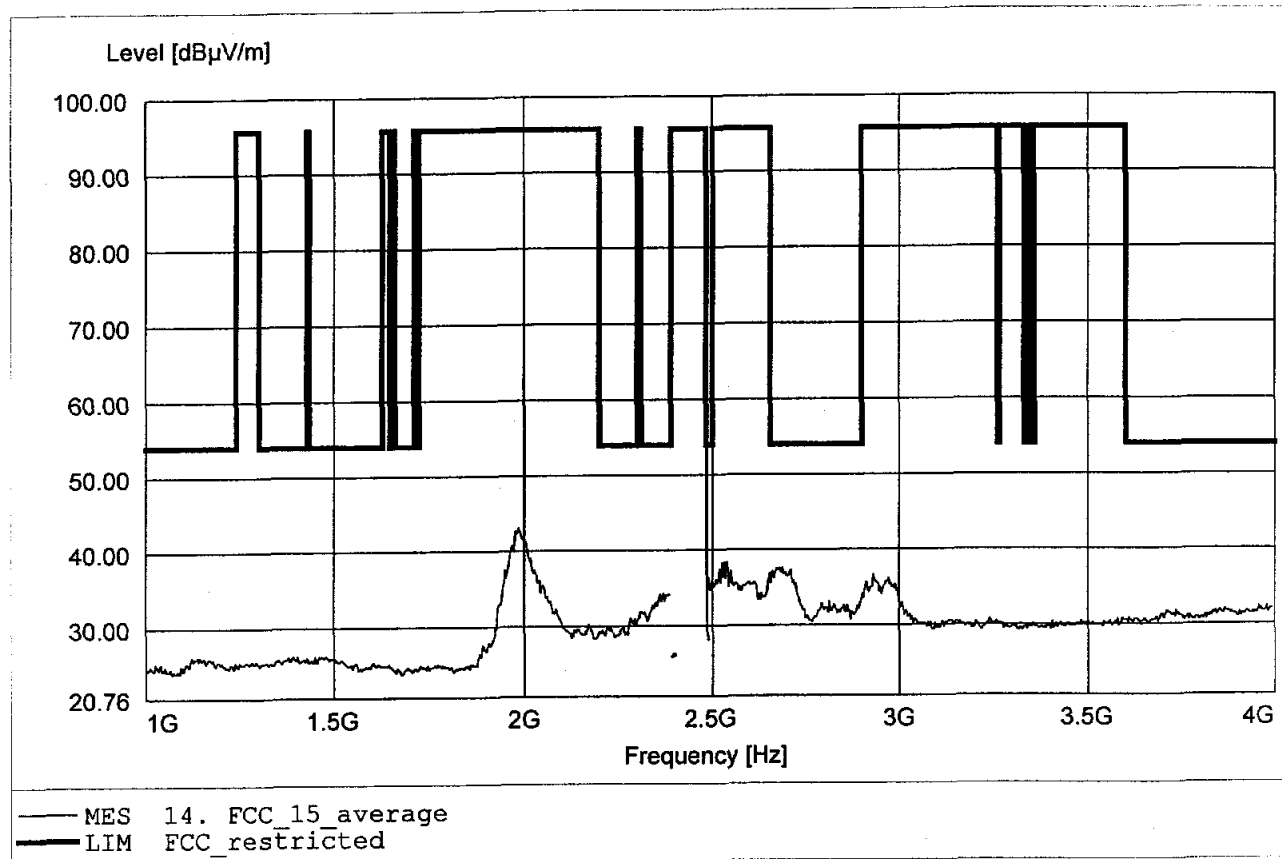

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 75.02dBµV/m, RBW: 1MHz

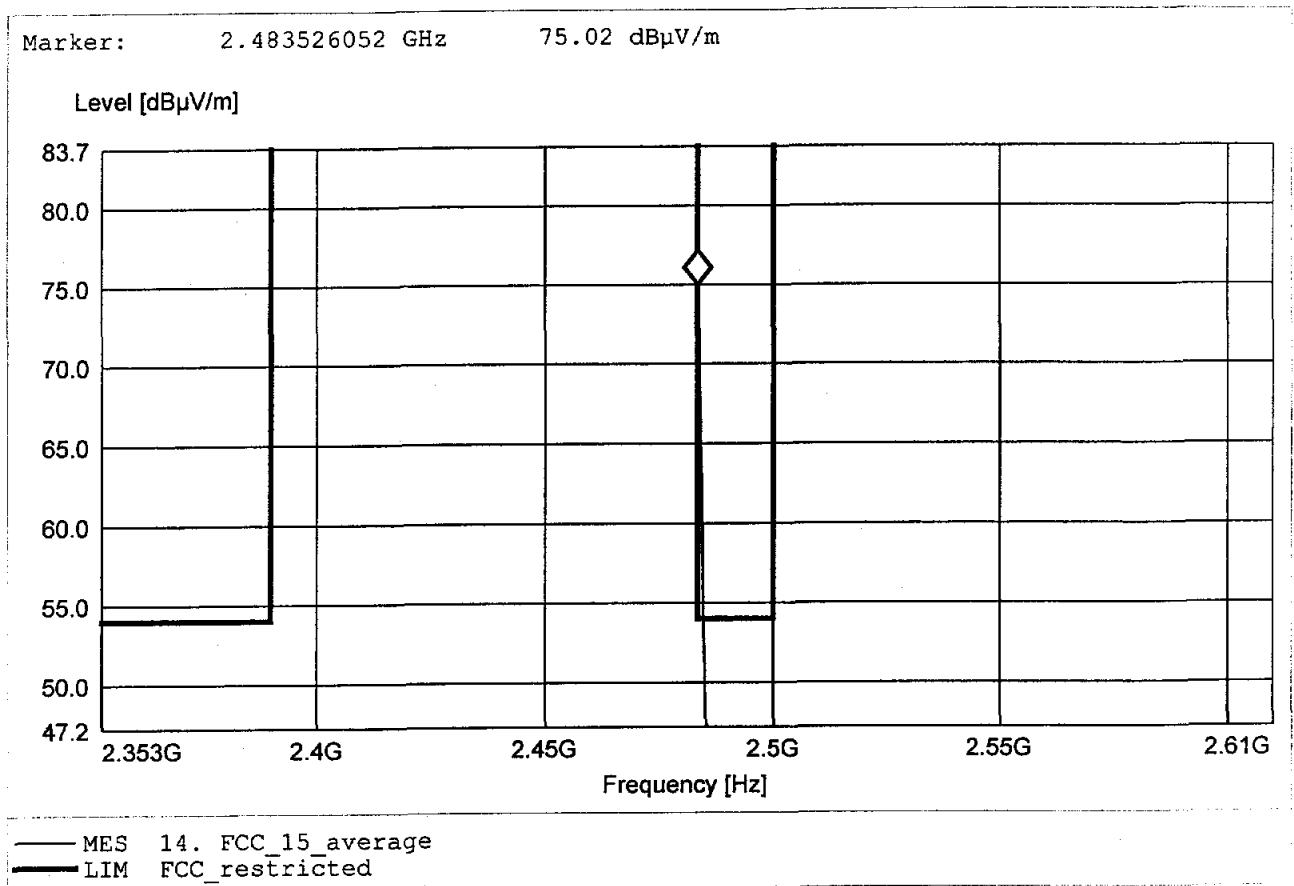

DA 00-705 / Marker-Delta-Method:

The value measured with average detector may be reduced by the "delta" value according to Marker-Delta Method.

Please see next page for Marker-Delta Method plot.


Calculation:

$75.02 \text{ dB}\mu\text{V/m} - 47.29 \text{ dB} = 27.73 \text{ dB}\mu\text{V/m}.$

=> test passed




Delta 1 [T1] RBW 30 kHz RF Att 40 dB
Ref Lvl -47.29 dB VBW 30 kHz
120 dBμV 1.24397866 MHz SWT 10.5 ms Unit dBμV

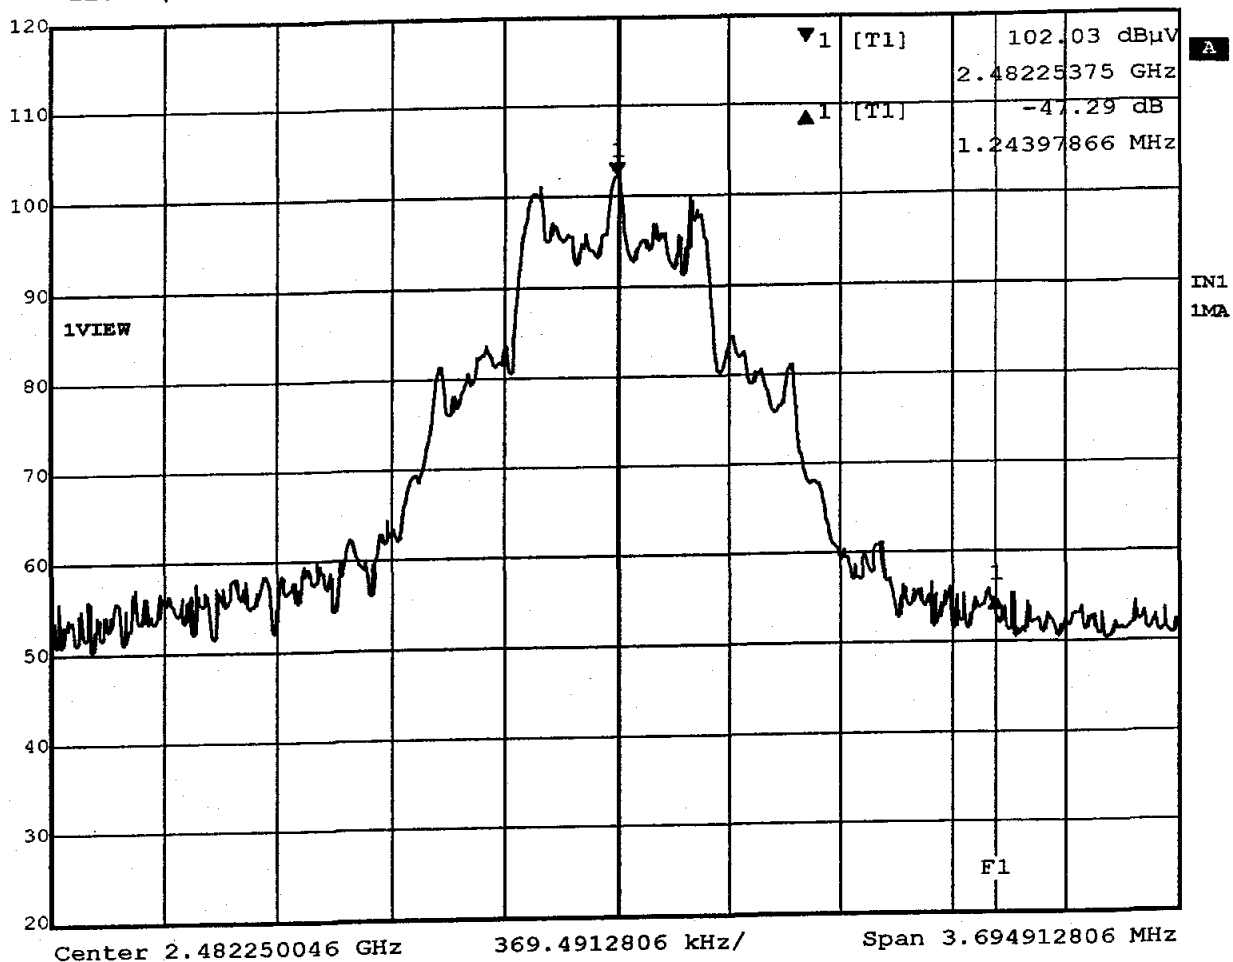

Title: Marker-Delta Method
Comment A: GnNetcom Wireless Haedset 2G4 FCC Base
Date: 28.NOV.2002 08:39:11


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 96.43dBuV/m, RBW: 1MHz

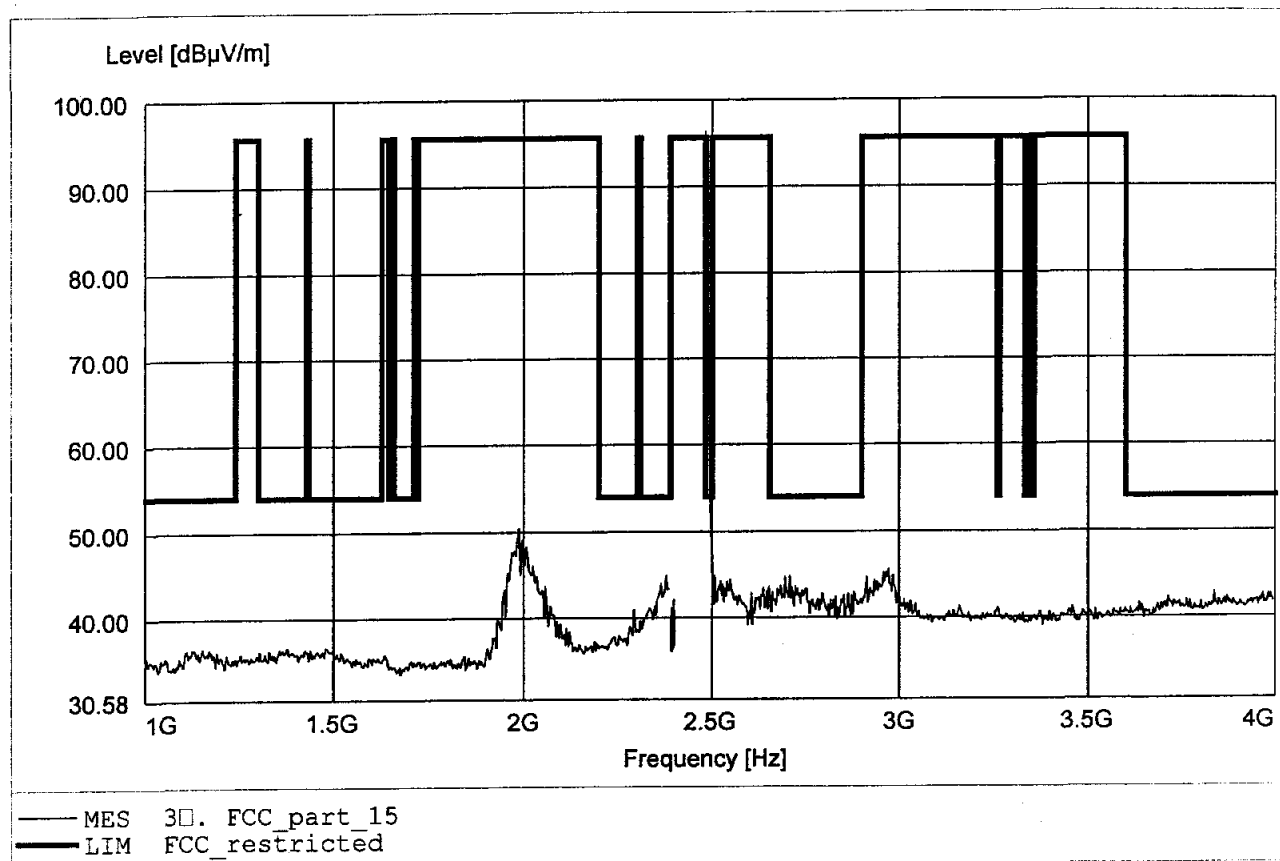


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
 Model: GN9120 2G4 FCC
 Approval Holder: GnNetcom
 Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to S15.247, average detector
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
 Comment 2: Freq: 2.484GHz, Emax: 73.81dBμV/m, RBW: 1MHz

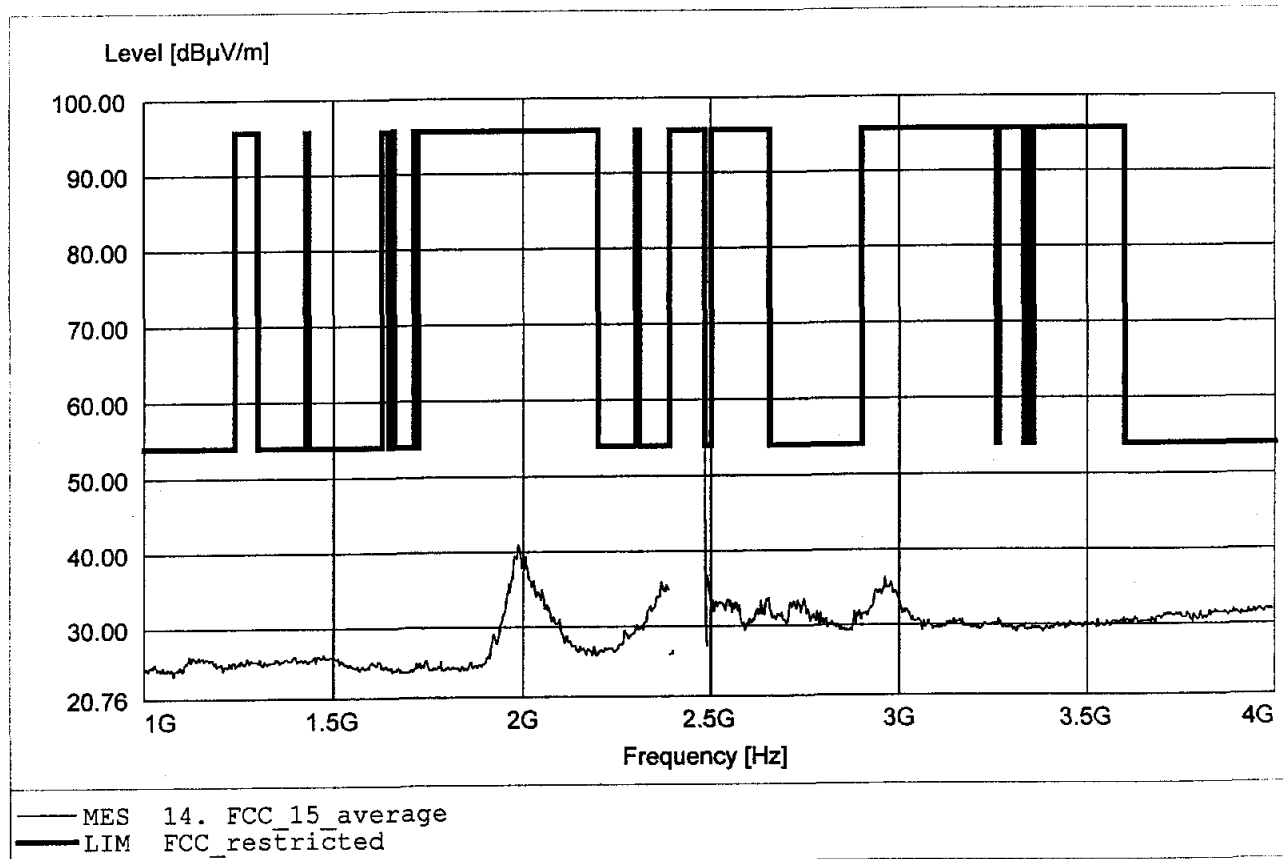

Spurious emissions Field Strength **FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
 Model: GN9120 2G4 FCC
 Approval Holder: GnNetcom
 Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to S15.247, average detector
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
 Comment 2: Freq: 2.484GHz, Emax: 73.81dBµV/m, RBW: 1MHz

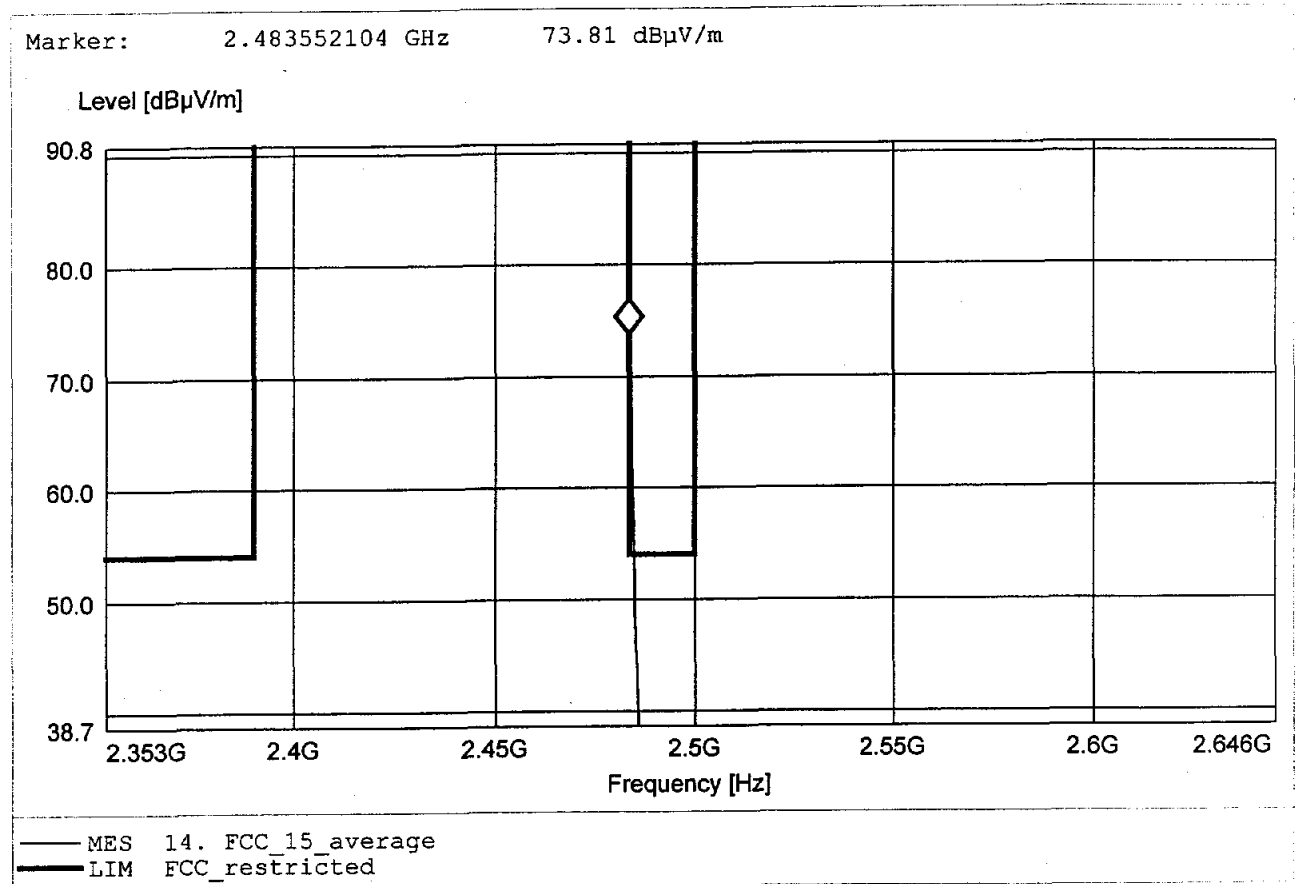

DA 00-705 / Marker-Delta-Method:

The value measured with average detector may be reduced by the "delta" value according to Marker-Delta Method.

Please see next page for Marker-Delta Method plot.


Calculation:

$73.01 \text{ dBµV/m} - 47.29 \text{ dB} = 25.72 \text{ dBµV/m}$.

=> test passed




Delta 1 [T1] RBW 30 kHz RF Att 40 dB
Ref Lvl -47.29 dB VBW 30 kHz
120 dBμV 1.24397866 MHz SWT 10.5 ms Unit dBμV

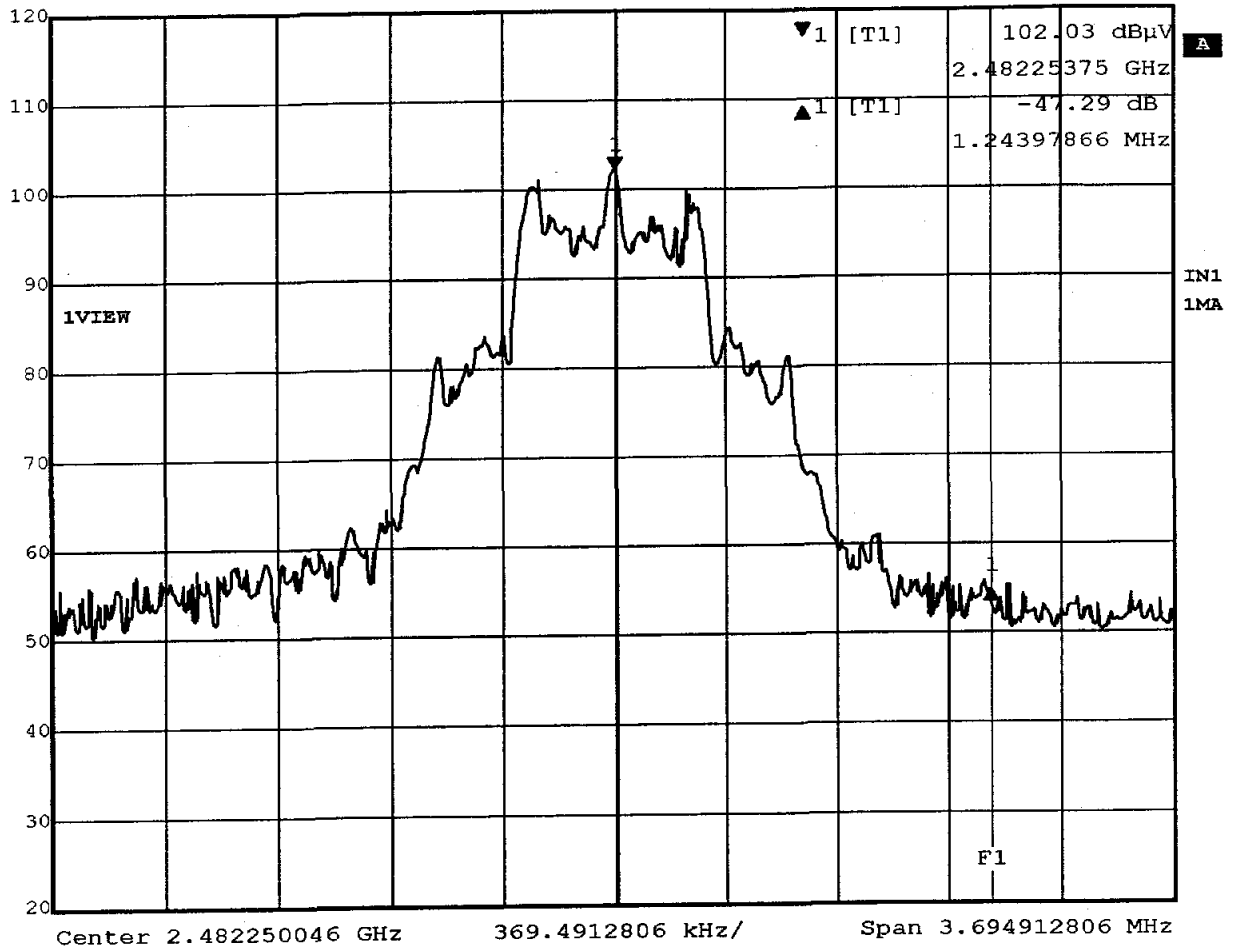

Title: Marker-Delta Method
Comment A: GnNetcom Wireless Haedset 2G4 FCC Base
Date: 28.NOV.2002 08:39:11


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 52.18dBμV/m, RBW: 1MHz

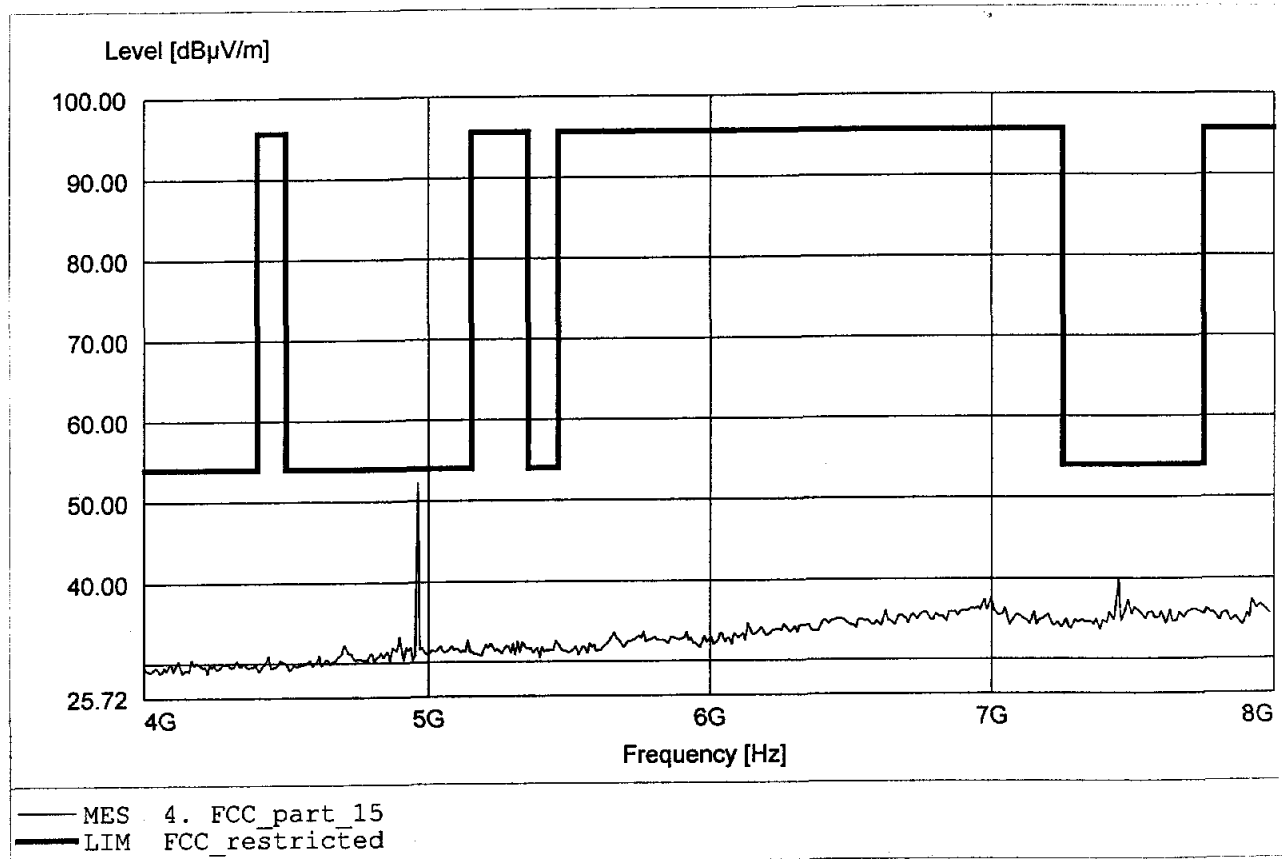


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 56.82dBμV/m, RBW: 1MHz

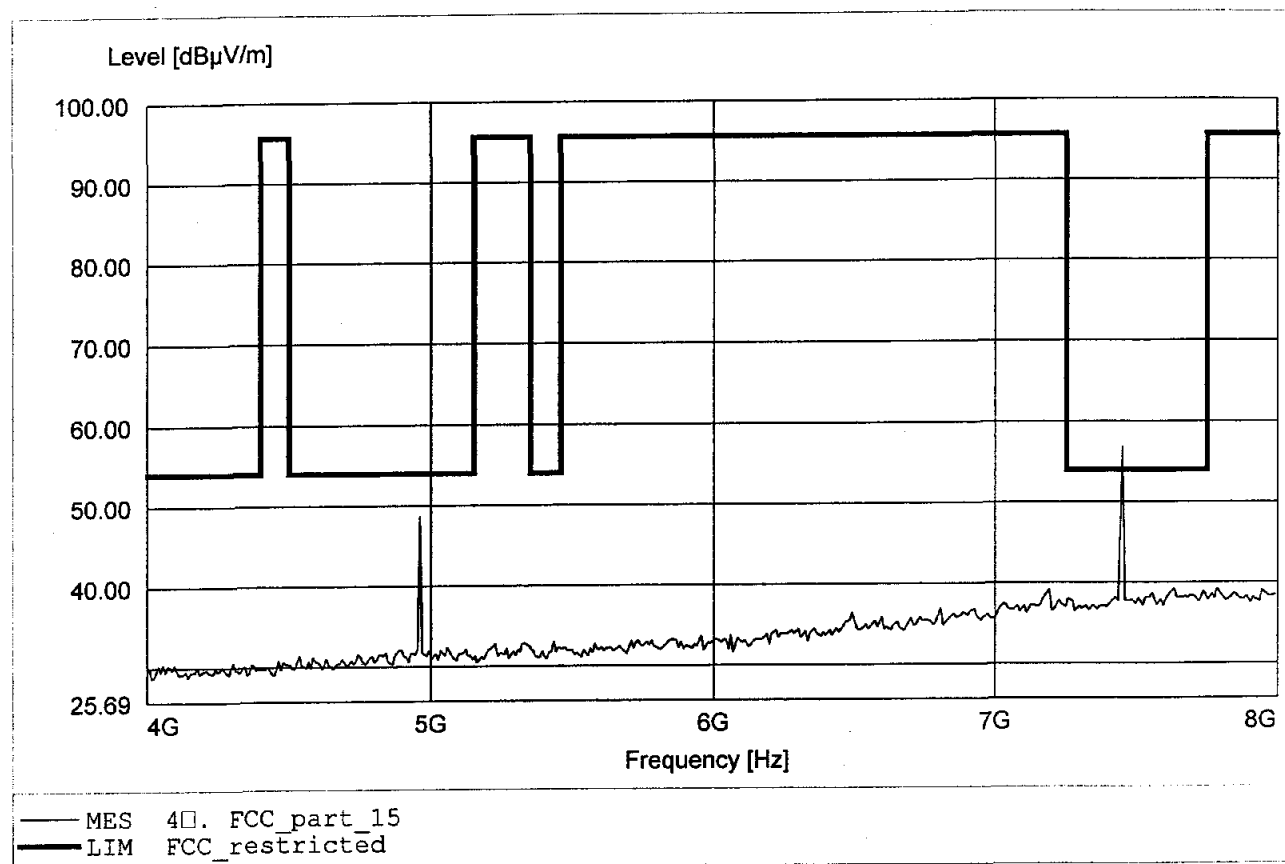


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 33.73dB μ V/m, RBW: 1MHz

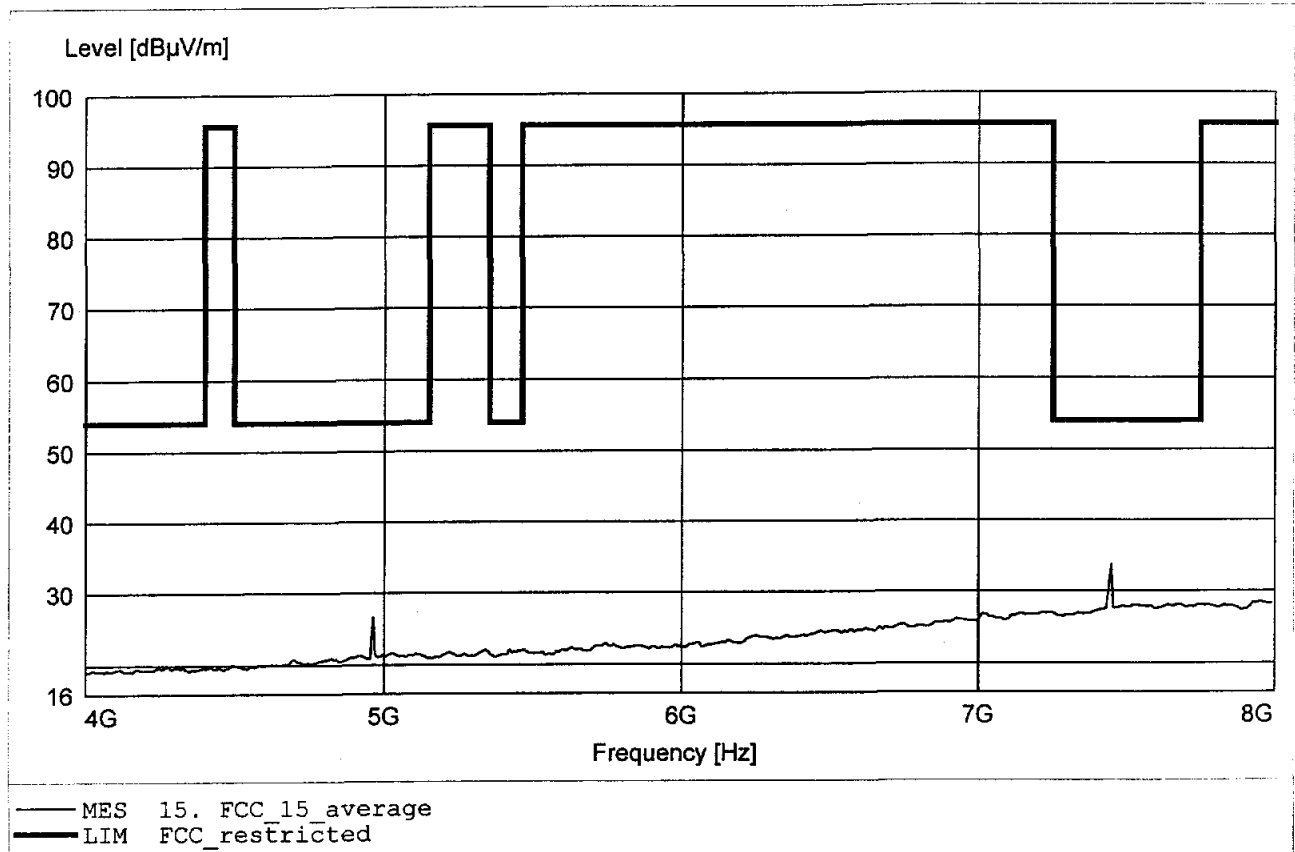


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
 Model: GN9120 2G4 FCC
 Approval Holder: GnNetcom
 Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to S15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
 Comment 2: Freq: 9.924GHz, Emax: 52.19dBμV/m, RBW: 1MHz

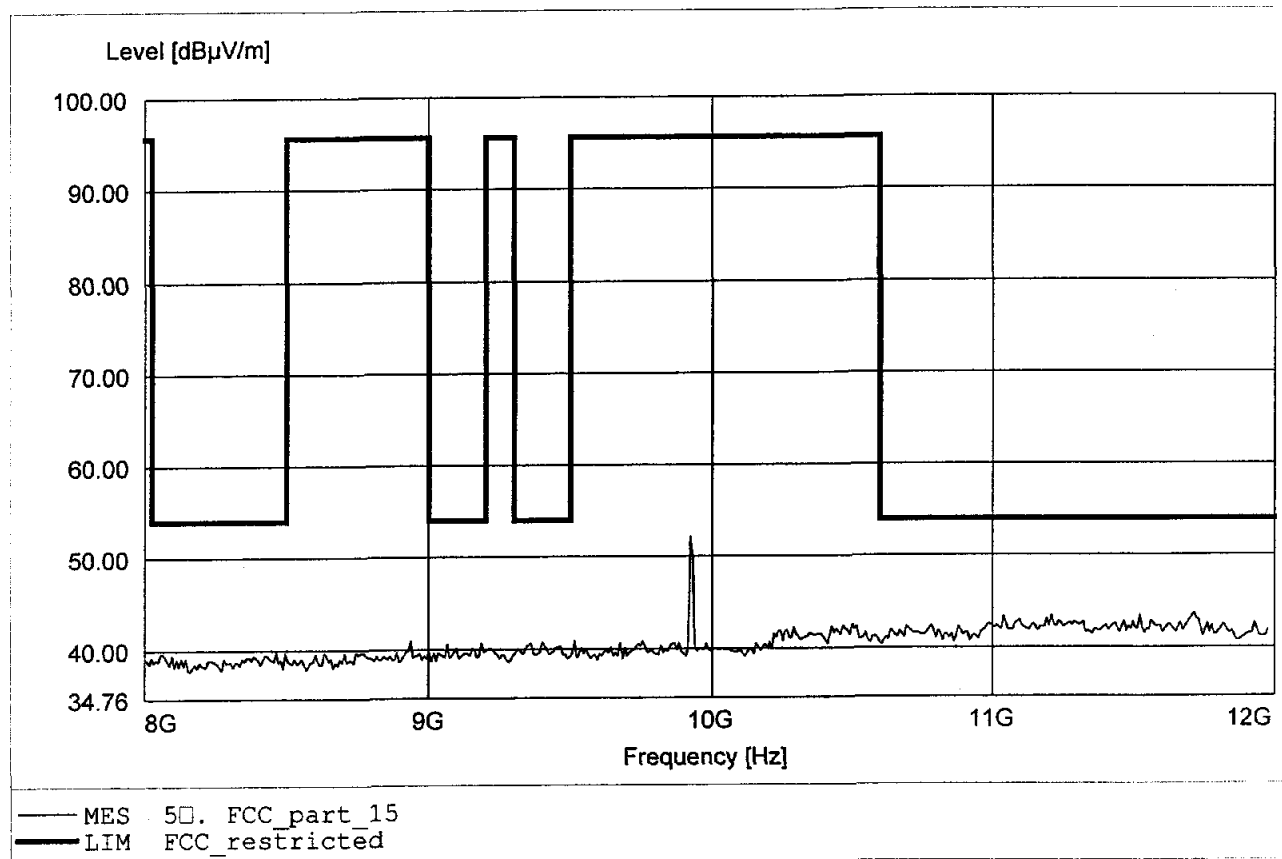


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 9.924GHz, Emax: 57.99dBµV/m, RBW: 1MHz

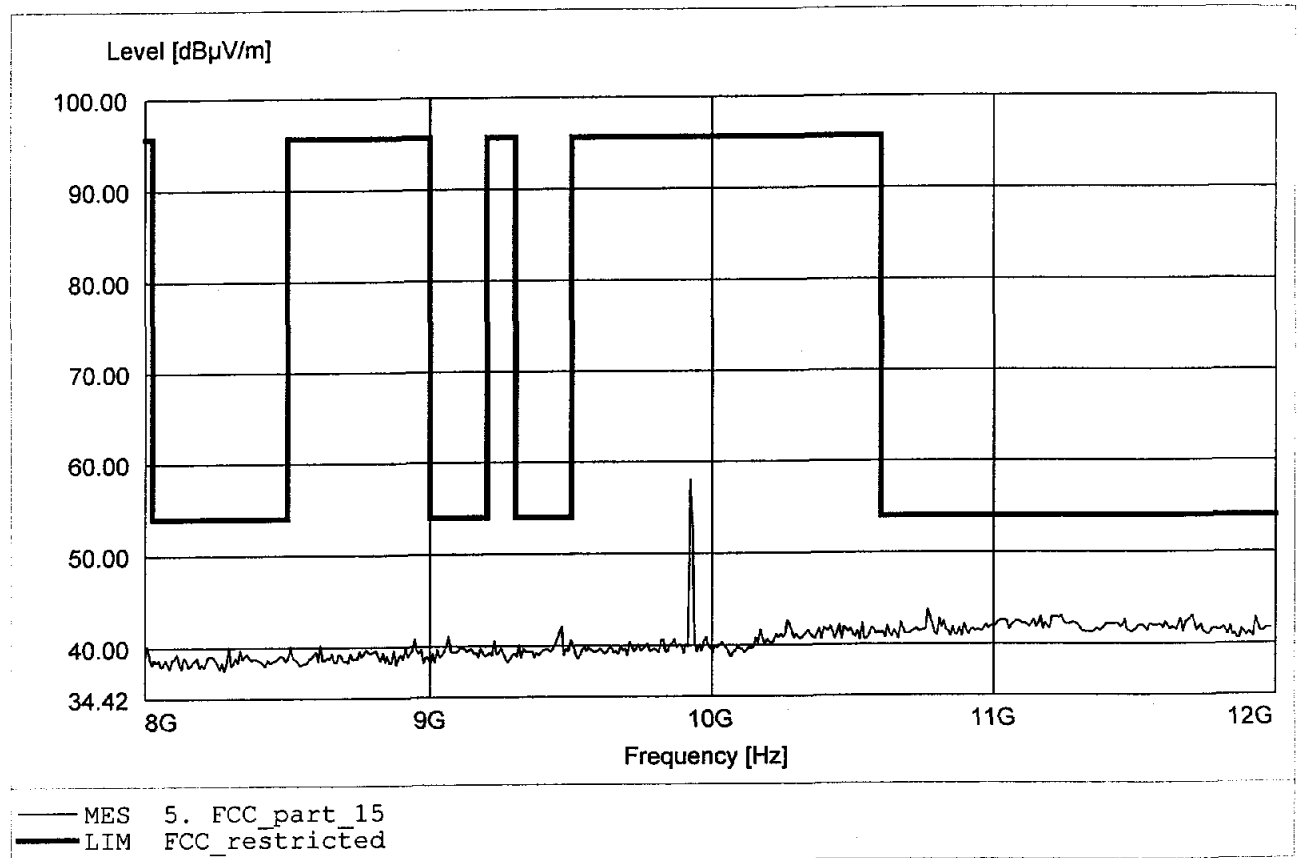


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 12.411GHz, Emax: 48.76dBμV/m, RBW: 1MHz

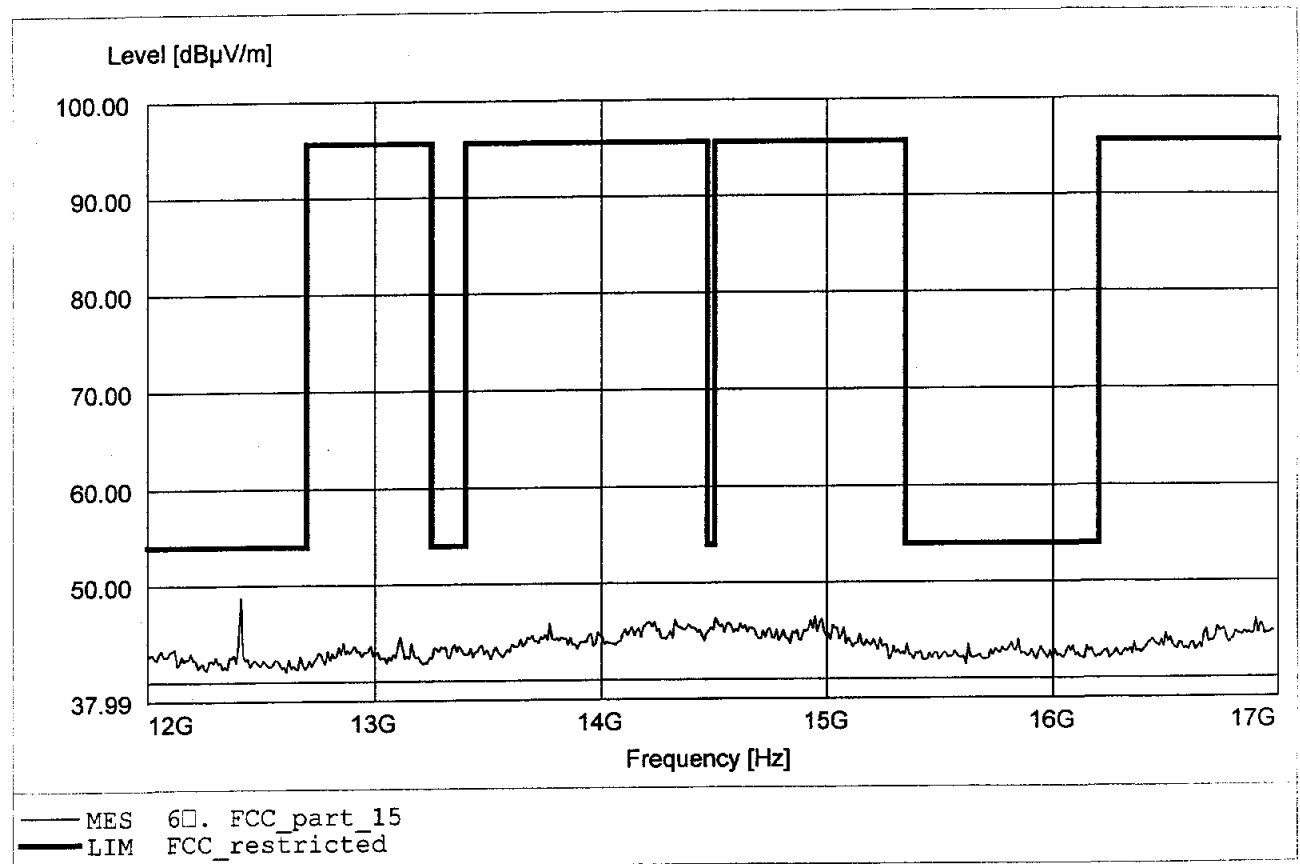


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 12.411GHz, Emax: 55.01dBμV/m, RBW: 1MHz

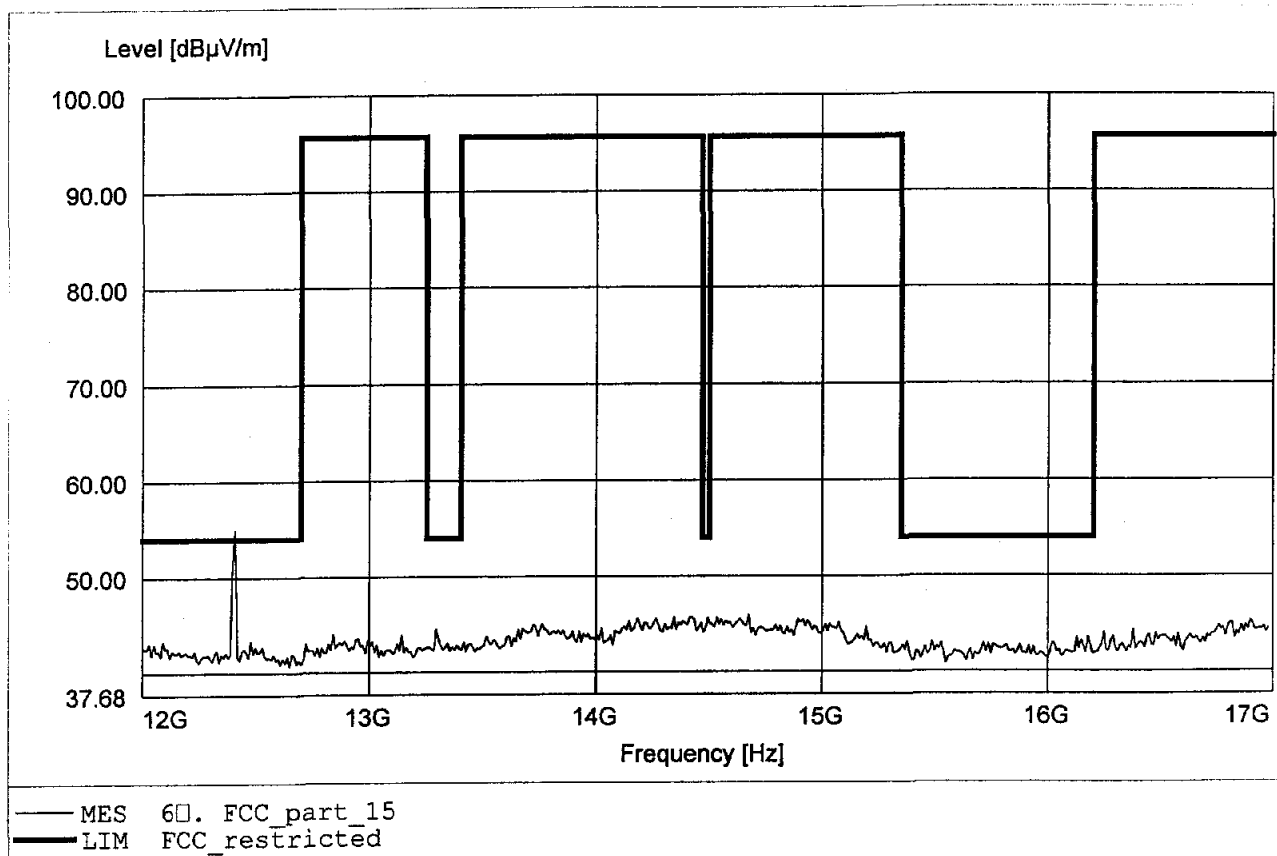


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 12.411GHz, Emax: 37.04dBμV/m, RBW: 1MHz

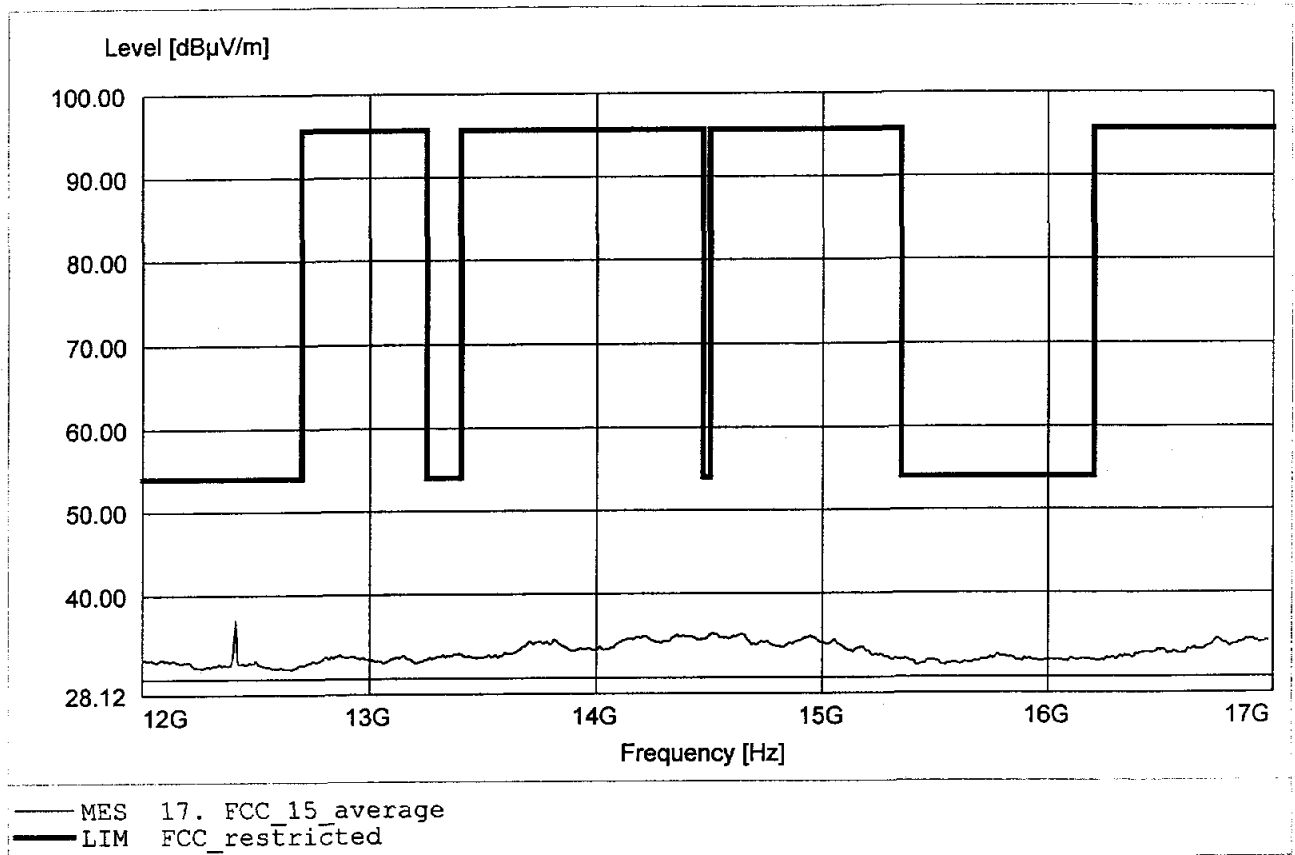

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 47.60dBpV/m, RBW: 1MHz

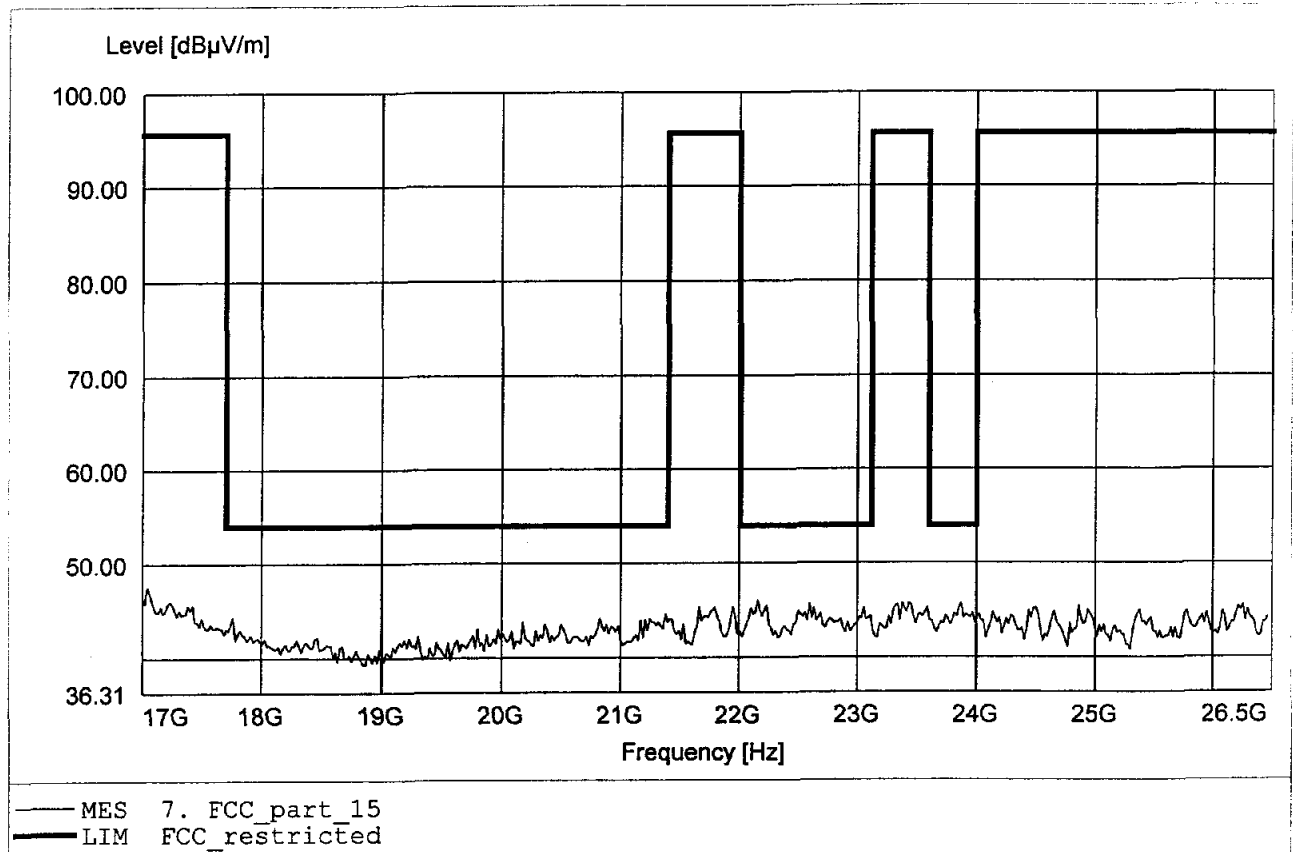

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Wireless Headset / Base / Ant.: 1 / Ch.: 94
Model: GN9120 2G4 FCC
Approval Holder: GnNetcom
Operating Condition: Tnom:23°C / Unom: 120 V AC (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 47.31dBμV/m, RBW: 1MHz

