

TEST REPORT

Report Number: 16064952-E38V2

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3447

Brand : APPLE

FCC ID : BCG-E9188A

EUT Description : SMARTPHONE

Test Standard : FCC CFR 47 PART 30

Date Of Issue:
2026-07-24

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2026-07-09	Initial Issue	GP Chin
V2	2026-07-24	Addressed TCB Feedback in Sections 6.1	Huahan Li

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	8
2. TEST RESULTS SUMMARY	9
3. TEST METHODOLOGY	10
4. FACILITIES AND ACCREDITATION	10
5. CALIBRATION AND UNCERTAINTY	10
5.1. METROLOGICAL TRACEABILITY	10
5.2. DECISION RULES	10
5.3. MEASUREMENT UNCERTAINTY	11
6. EQUIPMENT UNDER TEST	12
6.1. DESCRIPTION OF EUT	12
6.2. DESCRIPTION OF AVAILABLE ANTENNA	12
6.3. MAXIMUM OBW AND EIRP	13
6.4. SOFTWARE AND FIRMWARE	14
6.5. WORST CASE ORIENTATION	14
6.6. BEAM ID	15
6.7. DESCRIPTION OF TEST SETUP	15
7. TEST AND MEASUREMENT EQUIPMENT	21
8. APPLICABLE LIMITS AND TEST RESULTS	22
8.1. DUTY CYCLES	22
8.1.1. DUTY CYCLE n258 SB1	23
8.1.2. DUTY CYCLE n258 SB2	24
8.1.3. DUTY CYCLE n261	25
8.1.4. DUTY CYCLE n260	26
8.2. OCCUPIED BANDWIDTHS	27
8.2.1. OBW n258 SB1	28
8.2.2. OBW n258 SB2	30
8.2.3. OBW n261	33
8.2.4. OBW n260	39
8.3. EQUIVALENT ISOTROPIC RADIATED POWERS	42
8.3.1. EIRP n258 SB1 STATE A	44
8.3.2. EIRP n258 SB1 STATE B	46
8.3.3. EIRP n258 SB2 STATE A	48
8.3.4. EIRP n258 SB2 STATE B	53
8.3.5. EIRP n261 STATE A	58
8.3.6. EIRP n261 STATE B	66
8.3.7. EIRP n260 STATE A	74
8.3.8. EIRP n260 STATE B	79

8.4. BAND EDGE EMISSIONS	84
8.4.1. BAND EDGE n258 SB1 SISO-DUAL 1CC STATE A	86
8.4.2. BAND EDGE n258 SB1 SISO-DUAL 2CC STATE A	90
8.4.3. BAND EDGE n258 SB1 SISO-DUAL 1CC STATE B	94
8.4.4. BAND EDGE n258 SB1 SISO-DUAL 2CC STATE B	98
8.4.5. BAND EDGE n258 SB1 MIMO 1CC STATE A	102
8.4.6. BAND EDGE n258 SB1 MIMO 2CC STATE A	105
8.4.7. BAND EDGE n258 SB1 MIMO 1CC STATE B	108
8.4.8. BAND EDGE n258 SB1 MIMO 2CC STATE B	111
8.4.9. BAND EDGE n258 SB2 SISO-DUAL 1CC STATE A	114
8.4.10. BAND EDGE n258 SB2 SISO-DUAL 2CC STATE A	118
8.4.11. BAND EDGE n258 SB2 SISO-DUAL 3CC STATE A	122
8.4.12. BAND EDGE n258 SB2 SISO-DUAL 4CC STATE A	126
8.4.13. BAND EDGE n258 SB2 SISO-DUAL 1CC STATE B	130
8.4.14. BAND EDGE n258 SB2 SISO-DUAL 2CC STATE B	134
8.4.15. BAND EDGE n258 SB2 SISO-DUAL 3CC STATE B	138
8.4.16. BAND EDGE n258 SB2 SISO-DUAL 4CC STATE B	142
8.4.17. BAND EDGE n258 SB2 MIMO 1CC STATE A	146
8.4.18. BAND EDGE n258 SB2 MIMO 2CC STATE A	149
8.4.19. BAND EDGE n258 SB2 MIMO 3CC STATE A	152
8.4.20. BAND EDGE n258 SB2 MIMO 4CC STATE A	155
8.4.21. BAND EDGE n258 SB2 MIMO 1CC STATE B	158
8.4.22. BAND EDGE n258 SB2 MIMO 2CC STATE B	161
8.4.23. BAND EDGE n258 SB2 MIMO 3CC STATE B	164
8.4.24. BAND EDGE n258 SB2 MIMO 4CC STATE B	167
8.4.25. BAND EDGE n261 SISO-DUAL 1CC STATE A	170
8.4.26. BAND EDGE n261 SISO-DUAL 2CC STATE A	177
8.4.27. BAND EDGE n261 SISO-DUAL 3CC STATE A	183
8.4.28. BAND EDGE n261 SISO-DUAL 4CC STATE A	189
8.4.29. BAND EDGE n261 SISO-DUAL 1CC STATE B	195
8.4.30. BAND EDGE n261 SISO-DUAL 2CC STATE B	202
8.4.31. BAND EDGE n261 SISO-DUAL 3CC STATE B	208
8.4.32. BAND EDGE n261 SISO-DUAL 4CC STATE B	214
8.4.33. BAND EDGE n261 MIMO 1CC STATE A	220
8.4.34. BAND EDGE n261 MIMO 2CC STATE A	226
8.4.35. BAND EDGE n261 MIMO 3CC STATE A	232
8.4.36. BAND EDGE n261 MIMO 4CC STATE A	238
8.4.37. BAND EDGE n261 MIMO 1CC STATE B	244
8.4.38. BAND EDGE n261 MIMO 2CC STATE B	250
8.4.39. BAND EDGE n261 MIMO 3CC STATE B	256
8.4.40. BAND EDGE n261 MIMO 4CC STATE B	262
8.4.41. BAND EDGE n260 SISO-DUAL 1CC STATE A	268
8.4.42. BAND EDGE n260 SISO-DUAL 2CC STATE A	272
8.4.43. BAND EDGE n260 SISO-DUAL 3CC STATE A	276
8.4.44. BAND EDGE n260 SISO-DUAL 4CC STATE A	280
8.4.45. BAND EDGE n260 SISO-DUAL 1CC STATE B	284
8.4.46. BAND EDGE n260 SISO-DUAL 2CC STATE B	288
8.4.47. BAND EDGE n260 SISO-DUAL 3CC STATE B	292
8.4.48. BAND EDGE n260 SISO-DUAL 4CC STATE B	296
8.4.49. BAND EDGE n260 MIMO 1CC STATE A	300
8.4.50. BAND EDGE n260 MIMO 2CC STATE A	303
8.4.51. BAND EDGE n260 MIMO 3CC STATE A	306

8.4.52.	BAND EDGE n260 MIMO 4CC STATE A.....	309
8.4.53.	BAND EDGE n260 MIMO 1CC STATE B.....	312
8.4.54.	BAND EDGE n260 MIMO 2CC STATE B.....	315
8.4.55.	BAND EDGE n260 MIMO 3CC STATE B.....	318
8.4.56.	BAND EDGE n260 MIMO 4CC STATE B.....	321
8.5.	<i>RADIATED SPURIOUS EMISSIONS.....</i>	<i>324</i>
8.5.1.	RSE n258 SB1 30 – 1000 MHz STATE A.....	327
8.5.2.	RSE n258 SB1 30 – 1000 MHz STATE B.....	328
8.5.3.	RSE n258 SB1 1 - 18 GHz STATE A.....	329
8.5.4.	RSE n258 SB1 1 - 18 GHz STATE B.....	330
8.5.5.	RSE n258 SB1 18 - 23 GHz STATE A.....	331
8.5.6.	RSE n258 SB1 18 - 23 GHz STATE B.....	332
8.5.7.	RSE n258 SB1 23 - 24.25 GHz STATE A.....	333
8.5.8.	RSE n258 SB1 23 - 24.25 GHz STATE B.....	336
8.5.9.	RSE n258 SB1 24.45 - 25.5 GHz STATE A.....	339
8.5.10.	RSE n258 SB1 24.45 - 25.5 GHz STATE B.....	342
8.5.11.	RSE n258 SB1 25.5 - 26.5 GHz STATE A.....	345
8.5.12.	RSE n258 SB1 25.5 - 26.5 GHz STATE B.....	346
8.5.13.	RSE n258 SB1 26.5 - 40 GHz STATE A.....	347
8.5.14.	RSE n258 SB1 26.5 - 40 GHz STATE B.....	348
8.5.15.	RSE n258 SB1 40 - 50 GHz STATE A.....	349
8.5.16.	RSE n258 SB1 40 - 50 GHz STATE B.....	351
8.5.17.	RSE n258 SB1 50 - 75 GHz STATE A.....	353
8.5.18.	RSE n258 SB1 50 - 75 GHz STATE B.....	355
8.5.19.	RSE n258 SB1 75 - 100 GHz STATE A.....	357
8.5.20.	RSE n258 SB1 75 - 100 GHz STATE B.....	358
8.5.21.	RSE n258 SB2 30 – 1000 MHz STATE A.....	359
8.5.22.	RSE n258 SB2 30 – 1000 MHz STATE B.....	360
8.5.23.	RSE n258 SB2 1 - 18 GHz STATE A.....	361
8.5.24.	RSE n258 SB2 1 - 18 GHz STATE B.....	362
8.5.25.	RSE n258 SB2 18 – 23.6 GHz STATE A.....	363
8.5.26.	RSE n258 SB2 18 – 23.6 GHz STATE B.....	364
8.5.27.	RSE n258 SB2 23.6 – 24.75 GHz STATE A.....	365
8.5.28.	RSE n258 SB2 23.6 – 24.75 GHz STATE B.....	369
8.5.29.	RSE n258 SB2 25.25 - 26.5 GHz STATE A.....	373
8.5.30.	RSE n258 SB2 25.25 - 26.5 GHz STATE B.....	377
8.5.31.	RSE n258 SB2 26.5 - 40 GHz STATE A.....	381
8.5.32.	RSE n258 SB2 26.5 - 40 GHz STATE B.....	382
8.5.33.	RSE n258 SB2 40 - 50 GHz STATE A.....	383
8.5.34.	RSE n258 SB2 40 - 50 GHz STATE B.....	385
8.5.35.	RSE n258 SB2 50 - 75 GHz STATE A.....	387
8.5.36.	RSE n258 SB2 50 - 75 GHz STATE B.....	389
8.5.37.	RSE n258 SB2 75 - 100 GHz STATE A.....	391
8.5.38.	RSE n258 SB2 75 - 100 GHz STATE B.....	392
8.5.39.	RSE n261 30 – 1000 MHz STATE A.....	393
8.5.40.	RSE n261 30 – 1000 MHz STATE B.....	394
8.5.41.	RSE n261 1 - 18 GHz STATE A.....	395
8.5.42.	RSE n261 1 - 18 GHz STATE B.....	396
8.5.43.	RSE n261 18 - 26.5 GHz STATE A.....	397
8.5.44.	RSE n261 18 - 26.5 GHz STATE B.....	398
8.5.45.	RSE n261 26.5 - 27.5 GHz STATE A.....	399
8.5.46.	RSE n261 26.5 - 27.5 GHz STATE B.....	403

8.5.47.	RSE n261 28.35 - 29 GHz STATE A	407
8.5.48.	RSE n261 28.35 - 29 GHz STATE B	412
8.5.49.	RSE n261 29 - 40 GHz STATE A	417
8.5.50.	RSE n261 29 - 40 GHz STATE B	418
8.5.51.	RSE n261 40 - 50 GHz STATE A	419
8.5.52.	RSE n261 40 - 50 GHz STATE B	420
8.5.53.	RSE n261 50 - 75 GHz STATE A	421
8.5.54.	RSE n261 50 - 75 GHz STATE B	423
8.5.55.	RSE n261 75 - 100 GHz STATE A	425
8.5.56.	RSE n261 75 - 100 GHz STATE B	427
8.5.57.	RSE n260 30 – 1000 MHz STATE A	429
8.5.58.	RSE n260 30 – 1000 MHz STATE B	430
8.5.59.	RSE n260 1 - 18 GHz STATE A	431
8.5.60.	RSE n260 1 - 18 GHz STATE B	432
8.5.61.	RSE n260 18 - 26.5 GHz STATE A	433
8.5.62.	RSE n260 18 - 26.5 GHz STATE B	434
8.5.63.	RSE n260 26.5 - 36 GHz STATE A	435
8.5.64.	RSE n260 26.5 - 36 GHz STATE B	436
8.5.65.	RSE n260 36 – 37 GHz STATE A	437
8.5.66.	RSE n260 36 – 37 GHz STATE B	441
8.5.67.	RSE n260 40 – 41 GHz STATE A	445
8.5.68.	RSE n260 40 – 41 GHz STATE B	450
8.5.69.	RSE n260 41 – 50 GHz STATE A	455
8.5.70.	RSE n260 41 – 50 GHz STATE B	456
8.5.71.	RSE n260 50 - 75 GHz STATE A	457
8.5.72.	RSE n260 50 - 75 GHz STATE B	458
8.5.73.	RSE n260 75 - 110 GHz STATE A	459
8.5.74.	RSE n260 75 - 110 GHz STATE B	461
8.5.75.	RSE n260 110 - 170 GHz STATE A	463
8.5.76.	RSE n260 110 - 170 GHz STATE B	465
8.5.77.	RSE n260 170 - 200 GHz STATE A	467
8.5.78.	RSE n260 170 - 200 GHz STATE B	468
8.6.	<i>FREQUENCY STABILITY</i>	469
8.6.1.	FREQUENCY STABILITY n258 SB1	470
8.6.2.	FREQUENCY STABILITY n258 SB2	470
8.6.3.	FREQUENCY STABILITY n261	471
8.6.4.	FREQUENCY STABILITY n260	471
9.	SETUP PHOTOS	472
APPENDIX A		473
1.	50 - 75 GHz VDI WR15SAX-F	473
2.	75 - 110 GHz VDI WR10SAX-F	473
3.	110 - 170 GHz VDI WR6.5SAX-F	473
4.	170 - 260 GHz VDI WR4.3SAX-F	473
5.	33 - 50 GHz CMI HO22R HORN ANTENNA	475
6.	50 - 75 GHz CMI HO15R HORN ANTENNA	476
7.	75 - 110 GHz CMI HO10R HORN ANTENNA	477

8.	110 - 170 GHz CMI HO6R HORN ANTENNA	478
9.	170 - 260 GHz CMI HO4R HORN ANTENNA	479

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE INC. 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A.		
Model	A3447		
Brand	APPLE		
FCC ID	BCG-E9188A		
EUT Description	SMARTPHONE		
Serial Number	HJG4JX0N6Q, MG7LTJH6K0, JNLH6TX9FQ		
Sample Receipt Date	2026-05-11, 2026-06-04, 2026-06-18		
Date Tested	2026-05-12 to 2026-07-08		
Applicable Standards	FCC PART 30 Mobile Transmitter (5GM)		
Test Results	COMPLIES		
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.			
Approved & Released By:		Prepared & Reviewed By:	
			
Gia-Piao (GP) Chin Operations Leader UL Verification Services, Inc.		Kin Chung Wong Laboratory Engineer Associate UL Verification Services, Inc.	
Co-Reviewed By:			
			
Huahan (Ken) Li Laboratory Supervisor UL Verification Services, Inc.			

2. TEST RESULTS SUMMARY

Reequipment Description	Reequipment Clause Number (FCC)	Test Limit	Test Condition	Result
Occupied Bandwidth	2.1049	N/A	Radiated	Compliant
Equivalent Isotropic Radiated Power (EIRP)	2.1046 30.202(b)	+43 dBm	Radiated	Compliant
Out-of-Band Emissions at the Band Edge	2.1051 30.203(a)	-13 dBm/MHz for all out-of-band emissions. -5 dBm/MHz from the band edge up to 10% of the channel BW	Radiated	Compliant
Radiated Spurious Emissions	2.1051 2.957(f) 30.203(a)	-13 dBm/MHz for all out-of-band emissions	Radiated	Compliant
Radiated Spurious Emissions	30.203(d)(1) & (d)(2)	-29 dBW/200 MHz & -35 dBW/200 MHz in 23.6 - 24.0 GHz for 24.25 - 24.45 GHz & 24.75 - 25.25 GHz bands	Radiated	Compliant
Frequency Stability	2.1055	Fundamental emissions are contained within allocated frequency band	Radiated	Compliant

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with:

- FCC CFR 47 Part 2
- FCC CFR 47 Part 30
- ANSI C63.26-2015
- KDB 842590 D01 Upper Microwave Flexible Use Service v01r03
- KDB 971168 D01 Power Meas. License Digital Systems v03r01

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☐	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☐	Building 3: 843 Auburn Court, Fremont, CA 94538 USA			
☒	Building 4: 47658 Kato Rd, Fremont, CA 94538 USA			
☐	Building 5: 47670 Kato Rd, Fremont, CA 94538 USA			

5. CALIBRATION AND UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Worst Case Radiated Disturbance, 9 KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case TRP, 18000 to 26000 MHz	4.10 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB
Worst Case TRP, 26000 to 40000 MHz	4.95 dB
Worst Case Radiated Disturbance, >40000 MHz	2.89 dB
Worst Case TRP, >40000 MHz	2.94 dB
Temperature	±0.9 °C
Voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The EUT is a smartphone (foldable) with cellular GSM, GPRS, EGPRS, WCDMA, LTE, 5G NR1, 5G NR2, IEEE 802.11a/b/g/n/ac/ax/be, Bluetooth (BT), Ultra-Wideband (UWB), Global Positioning System (GPS), Near-Field Communication (NFC), Narrow-Band (NB) UNII, 802.15.4, 802.15.4ab- Narrow-Band (NB), Wireless Power Transfer (WPT RX only) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible.

The EUT is considered a “foldable smartphone” and can be operated in two unique operating states – phone “fully closed” (State A) and phone “fully open” (State B). The test results of both operating states are reported.

This test report addresses the TDD 5G NR operational mode on following frequency bands:

n258 (denoted as n258 SB1 in this report): 24.25 – 24.45 GHz

n258 (denoted as n258 SB2 in this report): 24.75 – 25.25 GHz

n261: 27.5 – 28.35 GHz

n260: 37 – 40 GHz

The EUT contains one set of 5G FR2 RFIC Chipset/Antenna radio, which supports SISO, SISO-Dual and MIMO modes with 120 kHz SCS and up to 4 component carriers (1CC to 4CC) for carrier aggregation techniques. All four FR2 frequency bands support UE channel bandwidth of 100 MHz and only n261 band supports UE channel bandwidth of 50 MHz.

The SISO mode operates with either the horizontal or vertical elements active. The SISO-Dual and MIMO modes operate with both horizontal and vertical elements active at similar power level per polarization. MIMO mode only supports CP-OFDM access scheme, but SISO-Dual supports both CP-OFDM and DFT-s-OFDM access schemes. DFT-s-OFDM operates at a higher power level than CP-OFDM.

QPSK, 16QAM and 64QAM modulation formats are used in all three SISO, SISO-Dual and MIMO modes. Pi/2 BPSK modulation format is only used in SISO and SISO-Dual modes.

6.2. DESCRIPTION OF AVAILABLE ANTENNA

The EUT utilizes one set of 1x4 elements integrated dual-polarized patch antenna array, named as Ant M1. The peak antenna gains of horizontal/vertical polarization and the nominal antenna gains of cross-polarization of the antenna, based on frequency bands and operating states, are listed in the following table.

Operating State	Frequency Band	Peak Gain (Horizontal/Vertical)	Cross-Polarization
		(dBi)	(dBi)
A	n258 SB1 & SB2	15.6	18.5
	n261	15.3	18.2
	n260	17.2	19.8
B	n258 SB1 & SB2	15.2	18
	n261	16.3	18.2
	n260	17.4	20.3

6.3. MAXIMUM OBW AND EIRP

Maximum Occupied Bandwidth based on frequency bands and operating states.

Frequency Band	Control System	CH BW (MHz)	CCs Active	OBW (MHz)	Emission Designator	Modulation	Operating State
n258 SB1	SISO-Dual	100	2	193.66	194MG7W	Pi/2 BPSK	A
	SISO-Dual	100	2	191.08	191MD7W	16QAM	B
n258 SB2	SISO-Dual	100	4	391.36	391MG7W	QPSK	A
	SISO-Dual	100	4	389.87	390MD7W	16QAM	B
n261	SISO-Dual	100	4	391.82	392MG7W	QPSK	B
	SISO-Dual	100	4	389.61	390MD7W	16QAM	B
n260	SISO-Dual	100	4	391.81	392MG7W	QPSK	A
	SISO-Dual	100	4	389.70	390MD7W	16QAM	B

Maximum Average EIRP based on frequency bands and operating states.

Frequency Band	Control System	CH BW (MHz)	CCs Active	Avg EIRP		Modulation	Operating State
n258 SB1	SISO-Dual	100	1	(dBm)	(W)	QPSK	B
	SISO-Dual	100	1	32.72	1.871	16QAM	B
n258 SB2	SISO-Dual	100	1	32.18	1.652	QPSK	B
	SISO-Dual	100	1	31.31	1.352	16QAM	B
n261	SISO-Dual	50	1	33.23	2.104	QPSK	B
	SISO-Dual	50	1	30.95	1.245	16QAM	B
n260	SISO-Dual	100	1	32.88	1.941	QPSK	B
	SISO-Dual	100	1	30.60	1.148	16QAM	A

6.4. SOFTWARE AND FIRMWARE


The Software/Firmware version used at test is 24A388.

6.5. WORST CASE ORIENTATION

For all 5G NR FR2 Bands, the worst-case scenario for all measurements is based on the EIRP measurement investigation results. EIRPs were measured on Pi/2 BPSK, QPSK, 16QAM and 64QAM modulations. It was found that QPSK results in SISO-Dual mode supporting DFT-s-OFDM were the worst case.

The fundamental and radiated spurious emission were investigated in three orthogonal planes, XY (azimuth), XZ (roll and elevation) and YZ (receive antenna polarization), where is applicable on all 3 antenna arrays.

In the exploratory scan, the EUT is placed on an open-air fixture, allowing no blockage of the signal as measured by the receive antenna. The positioners, one at a time, perform a sweep, taking EIRP reading using peak detection at small increments of step size. The positioner is then moved to its maximum EIRP orientation found during the sweep, and the next positioner will repeat the scan process. Once all positioners have been individually scanned, the positioners will execute an additional set of scans for increased accuracy to identify the final optimum position resulting in highest EIRP for the frequency or band under investigation.

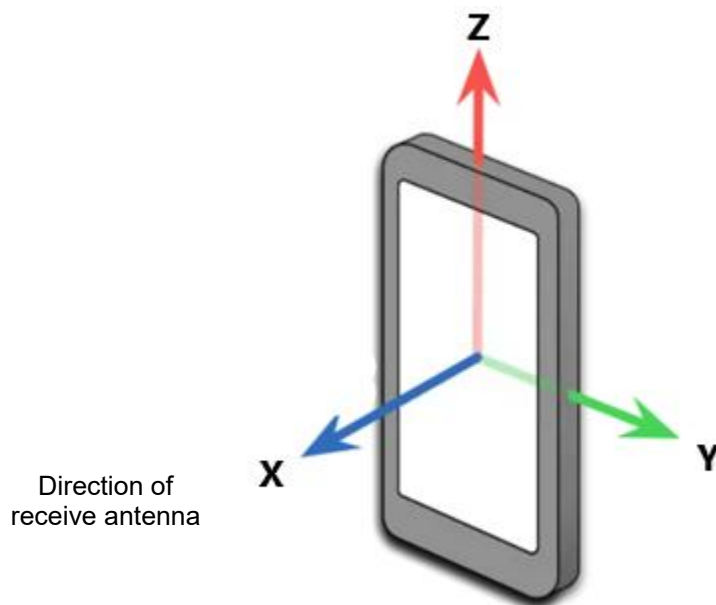

6.6. BEAM ID

In all tests, the following Peak Beam ID settings from the codebook of each frequency band on both operating states were applied for final measurements.

Frequency Band	Beam ID, State A	Beam ID, State B
n258 SB1	6	6
n258 SB2	6	6
n261	9	9
n260	2	2

6.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Peripheral Support Equipment List			
Description	Manufacturer	Model	Serial Number
Laptop + Adapter	Apple	MacBook Pro	HRP046790
Brisket Cable-USB Adapter	Apple	---	F2010M20000877
Laptop + Adapter	Apple	MacBook Pro	1PWR5000019-00303
Brisket Cable-USB Adapter	Apple	---	F2010M20000852
Laptop + Adapter	Apple	MacBook Pro	1PWR5000019
Brisket Cable-USB Adapter	Apple	---	F2010M20000890
Laptop + Adapter	Apple	MacBook Pro	FVFG319FQ05F
Brisket Cable-USB Adapter	Apple	---	F2010M20000859

I/O CABLES

I/O Cable List						
Cable No.	Port	No. of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Support Laptop Power	2	USB Type C	Shielded	1.8	--
2	Data	2	USB Type A	Shielded	7	--
3	Data + DC Power	2	USB Type C	Shielded	1	--
4	DC Power	2	USB Type A	Shielded	1	--
5	DC Power	1	Clip leads	Un-shielded	1	--
6	AC Line	1	3-prong	Un-shielded	1.8	--

TEST SETUP

Radiated spurious emission measurements from 30 MHz – 18 GHz were performed in a semi anechoic chamber (SAC) conforming to the normalized site attenuation requirements specified in ANSI C63.4 for below 1 GHz and the site validation criteria called out in CISPR 16-1-4:2019 over the frequency range 1 - 18 GHz.


Radiated power (EIRP) measurements of the fundamental signal and radiated spurious emissions (EIRP and TRP) measurements above 18 GHz were performed in four full anechoic chambers (FAC), 01-mmW-A, -B, -C & -D. In accordance with ANSI C63.26 and KDB publication 842590 D01 v01r03, the chambers meet the sVSWR validation requirements called out in CISPR 16-1-4:2019 over the frequency range 1 - 18 GHz. As required by ANSI C63.26, the reflection contributions are reduced to the extent possible to allow for measurements to be made up to 200 GHz in accordance with KDB 842590. The chamber absorber reflectivity fully supports chamber performance over this frequency range.

A roll-axis positioner was used to manipulate the EUT through the positions in space. The positioner was mounted on top of a turntable, bringing the EUT's antenna height on the test fixture to 1.5 m from the ground plate. The test procedures for exploratory scan and final measurement were described in Section 5.5.


In the search for the Beam ID transmitting the highest EIRP of each frequency band to use at final test, the Manufacturer provided 3 Beam IDs from the codebook yielding the highest EIRPs for investigation. These Beam IDs were selected from the simulated results based on EIRP Simulation tool.

All tests were performed in a non-signaling, stand-alone Factory Test Mode (FTM) of operation with 45% duty cycle. FTM software was used to configure EUT at continuous Tx operation in EN-DC mode. When implemented out in the field, the EUT will operate with a maximum uplink configuration.


SETUP DIAGRAM FOR TESTS

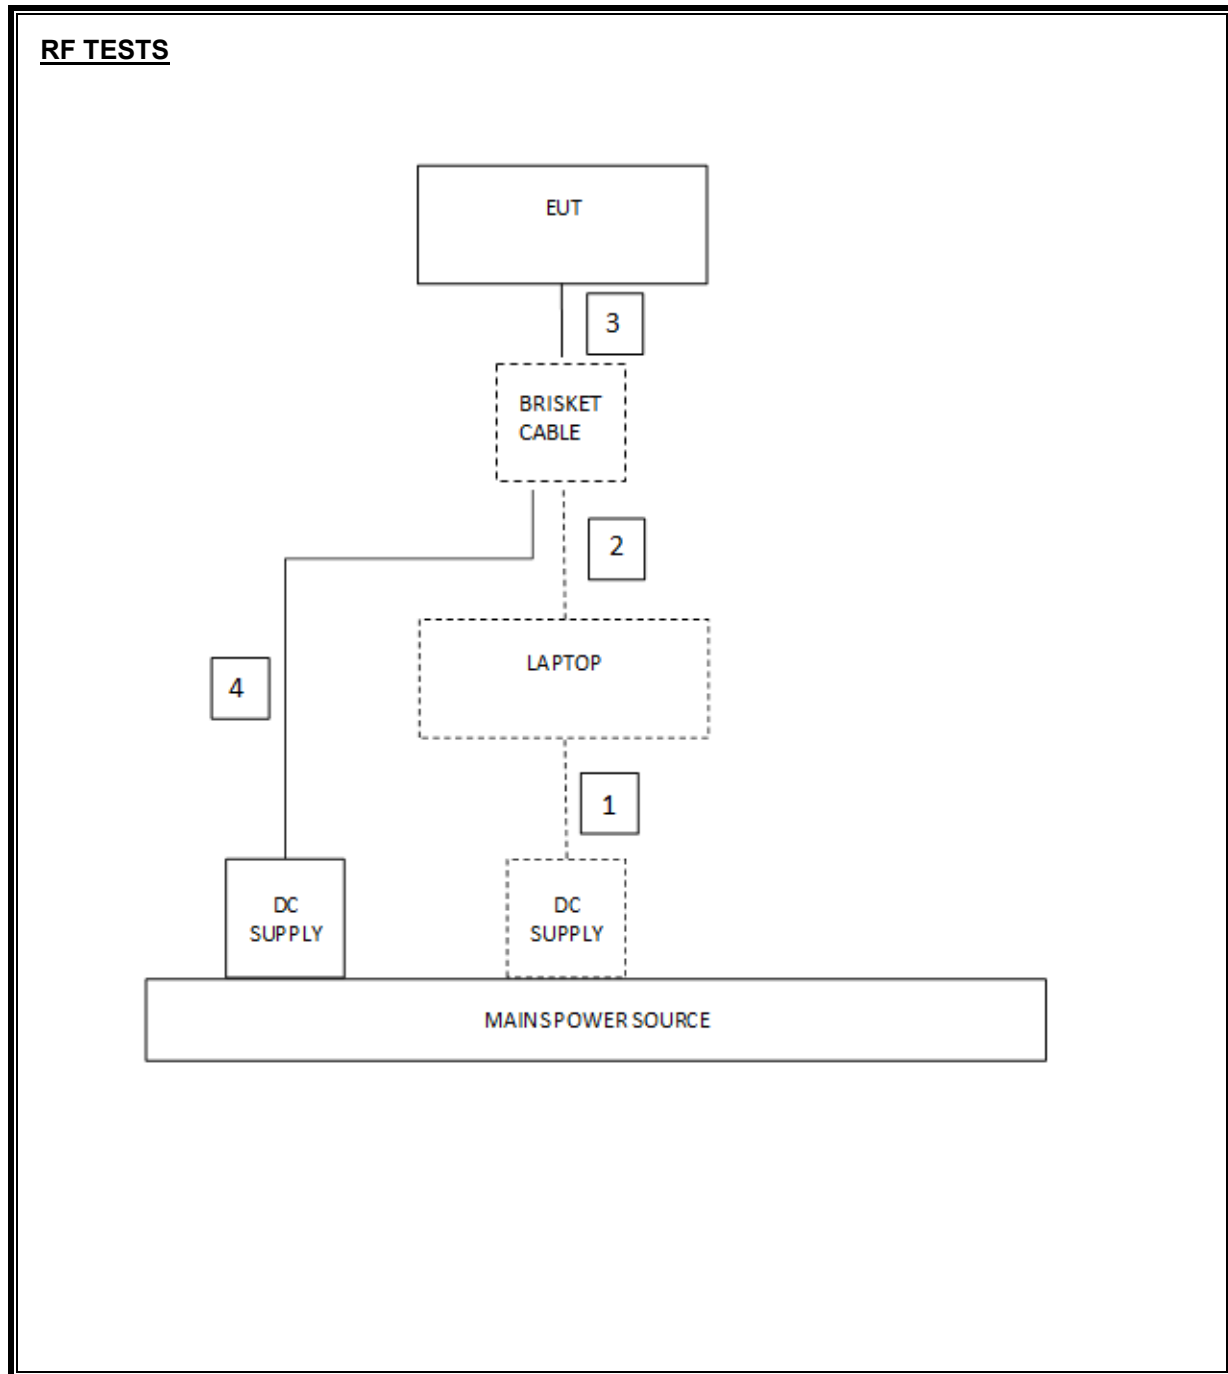


TEST SITE DIAGRAM – Below 1 GHz

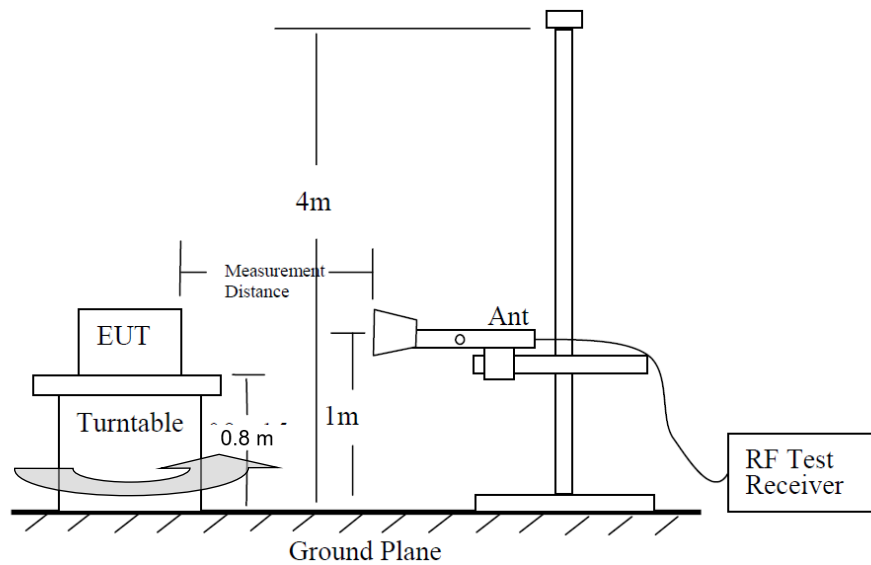


TEST SITE DIAGRAM – 1 - 18 GHz

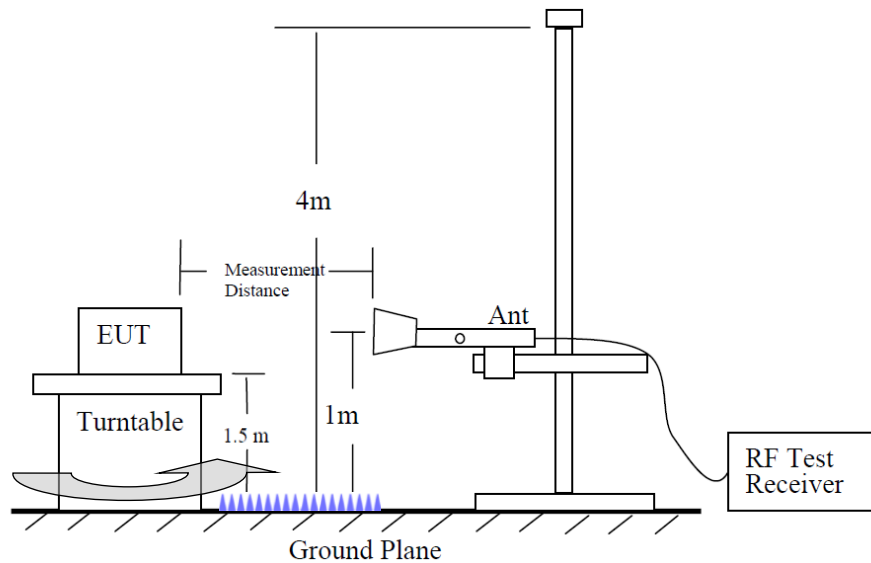

TEST SITE DIAGRAM – Above 18 GHz & mmWave

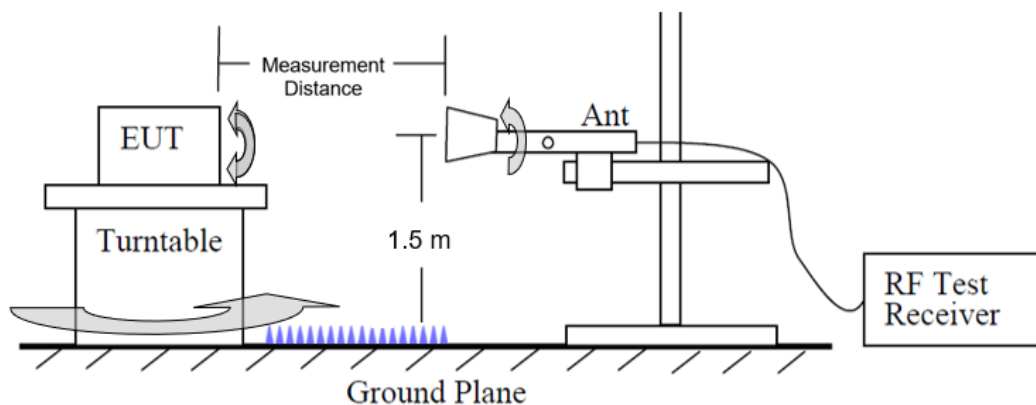

FREQUENCY STABILITY

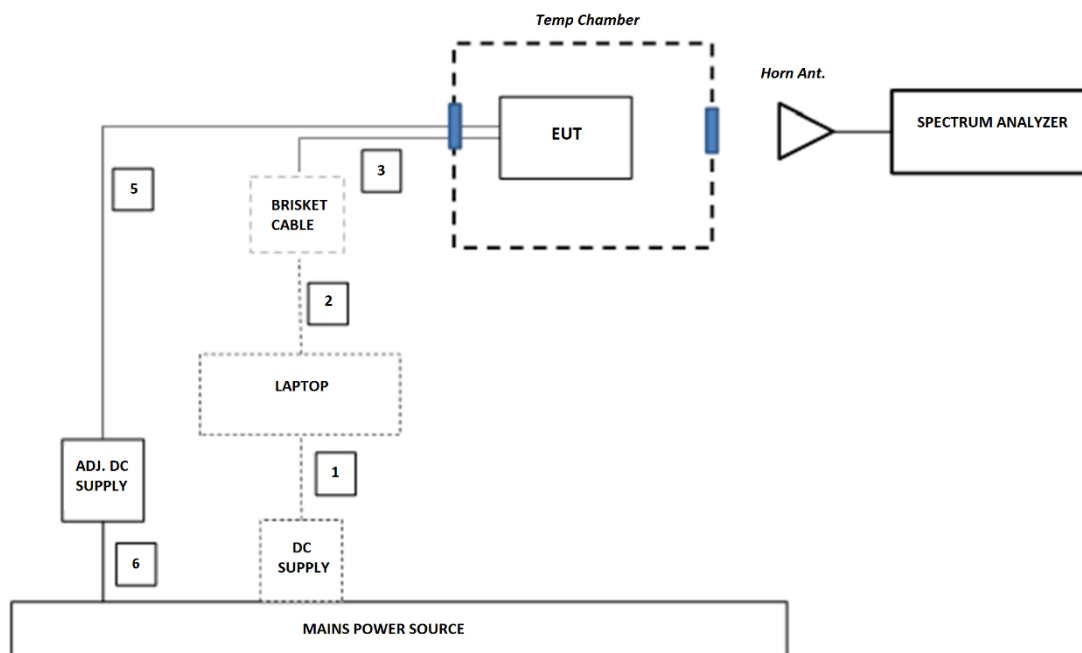

FAR-FIELD DISTANCE AND MEASUREMENT DISTANCE

The equipment under test was transmitting while connected to its integral antenna and placed on a turntable.

The measurement distance is in the far field per formula $2D^2/\lambda$ where D is the larger dimension of the antenna. For fundamental or band edge emissions, the largest far-field distance of either the EUT antenna or measurement antenna shall be used. For above 18 GHz spurious emissions, the far-field distance will be based on the measured antenna. In this case, the measurement antenna has the largest far-field distance. The EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest EIRP reading on the receive spectrum analyzer.

Frequency Range	Wavelength	Far Field Distance	Measurement Distance Used
(GHz)	(m)	(m)	(m)
18-26.5	0.0113	3.13	3.30
26.5-40	0.0075	2.61	3.00
40-50	0.0060	1.61	3.00
50-75	0.0040	1.05	3.00
75-110	0.0027	0.70	3.00
110-170	0.0018	0.46	1.00
170-200	0.0015	0.24	0.50

Radiated power levels are investigated while the receive antenna was rotated through all angles to determine the worst-case polarization/positioning.

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Local ID	Cal Due
Spectrum Analyzer, 2 Hz to 50 GHz	Rohde & Schwarz	FSW50	226791	2027-02-28
Spectrum Analyzer, 2 Hz to 50 GHz	Rohde & Schwarz	FSW50	195710	2027-02-28
Spectrum Analyzer, 2 Hz to 50 GHz	Rohde & Schwarz	FSW50	199181	2027-02-28
Spectrum Analyzer, 2 Hz to 50 GHz	Rohde & Schwarz	FSW50	215756	2027-02-28
EMI Test Receiver, 1 Hz to 44 GHz	Rohde & Schwarz	ESW44	191429	2027-02-28
EMI Test Receiver, 1 Hz to 44 GHz	Rohde & Schwarz	ESW44	191430	2027-02-28
Antenna, Horn 18-26.5 GHz	Com-Power	AH-826	222324	2027-09-30
Antenna, Horn 26.5-40 GHz	Com-Power	AH-640	222327	2027-08-31
Antenna, Horn 18-26.5 GHz	Com-Power	AH-826	222326	2027-08-31
Antenna, Horn 26.5-40 GHz	Com-Power	AH-640	222328	2027-09-30
Antenna, Horn 18-26.5 GHz	Com-Power	AH-826	220520	2027-08-31
Antenna, Horn 26.5-40 GHz	Com-Power	AH-640	222329	2027-08-31
Antenna, Double Ridge Guide Horn 1 to 18 GHz	ETS	3117	206807	2027-04-30
Amplifier, 9KHz to 1GHz	Sonoma Instrument	310N	230856	2026-07-31
Antenna, Broadband Hybrid, 30MHz to 2GHz	Sunol Sciences Corp.	JB1	80293	2027-05-31
RF Filter Box, 1-18GHz	UL-FR1	NA	171013	2026-07-31
Environmental Chamber	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	89097	2026-11-30
Digital Multimeter	Fluke	115	246585	2027-01-31
50V/3A Adj. DC Power Supply	Rigol	DP712	PRE0214721	CNR
Horn antenna, 33-50 GHz	CMI	HO22R	201518	2026-08-31
LNA, 40-50 GHz	Evarant	SBL-3335033040-2222-E1	199504	2026-08-31
Waveguide BandPass Filter, 40-50 GHz	Evarant	SWF-46308340-22-B1	222195	2026-08-31
Horn antenna, 33-50 GHz	CMI	HO22R	201517	2026-08-31
LNA, 40-50 GHz	Evarant	SBL-3335033040-2222-E1	215450	2026-08-31
Waveguide BandPass Filter, 40-50 GHz	Evarant	SWF-46308340-22-B1	222196	2026-08-31
50-75 GHz Horn	CMI	HO15R	210519	2026-08-31
LNA, 50-75 GHz	VIVA TECH	VTLNA-15-6018-FB	202496	2026-08-31
50 – 75 GHz Downconverter	VDI	WR15SAX-F	223772	2026-08-31
75-110 GHz Horn	CMI	HO10R	201522	2026-08-31
LNA, 75-110 GHz	Spacek Labs	SLW-22-5	202520	2026-08-31
75 – 110 GHz Downconverter	VDI	WR10SAX-F	223987	2026-08-31
110-170 GHz Horn	CMI	HO6R	201528	2026-08-31
LNA 110-170 GHz	SAGE Millimeter, Inc.	SBL-1141741860-0606-EI	199832	2026-08-31
110-170 GHz Downconverter	VDI	WR6.5SAX-F	223773	2026-08-31
170-260 GHz Horn	CMI	HO4R	201525	2026-08-31
170-260 GHz Downconverter	VDI	WR4.3SAX-F	223771	2026-08-31
UL EMC Radiated Software	Version	Rev.9.5.25 Aug 2025		
mmWave FR2 Automation Tool Software	Version	V2026.3.23		

*Equipment was used to perform tests prior to the calibration due date.

All horn antennas at and above the 33-50 GHz band are standard gain horns. In accordance with ANSI C63.26:2015, Clause 4.5.3 (a), Standard gain horns need not be periodically recalibrated, unless damage or deterioration is suspected or known to have occurred. The connector shall be checked periodically for damage. If a standard gain horn is not periodically recalibrated, its critical dimensions (see Annex A of IEEE Std 1309™-2013) shall be verified and documented on an annual basis.

UL measures the critical dimensions on an annual basis and checks for damage and deterioration before each test.

8. APPLICABLE LIMITS AND TEST RESULTS

8.1. DUTY CYCLES

LIMIT

For reporting purposes only.

TEST PROCEDURE

The zero-span mode on a spectrum analyzer if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- Set the center frequency of the instrument to the center frequency of the transmission.
- Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value.
- Set VBW $\geq$ RBW. Set detector = peak or average.

ANSI C63.10-2015 Clause 5.2.4.3.4


RESULTS

See the following pages.

Employee ID: 27780
Test Date: 2026-06-11
Test Location: 01-mmW-B


8.1.1. DUTY CYCLE n258 SB1

ON Time	Period	Duty Cycle	Duty Cycle
(usec)	(usec)	(linear)	(%)
4.50	10.01	0.45	45

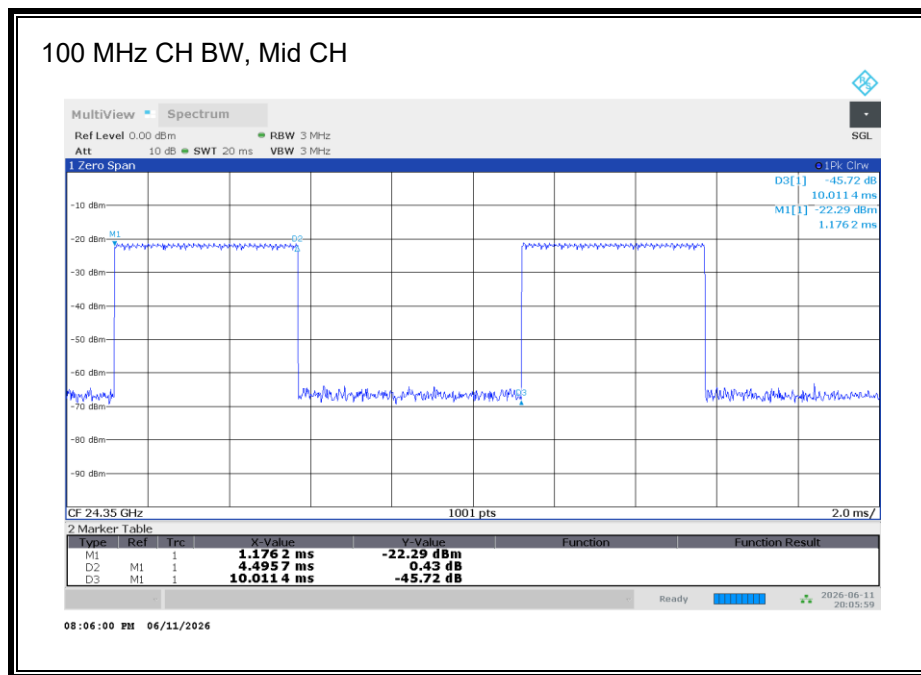

8.1.2. DUTY CYCLE n258 SB2


ON Time	Period	Duty Cycle	Duty Cycle
(usec)	(usec)	(linear)	(%)
4.48	9.97	0.45	45

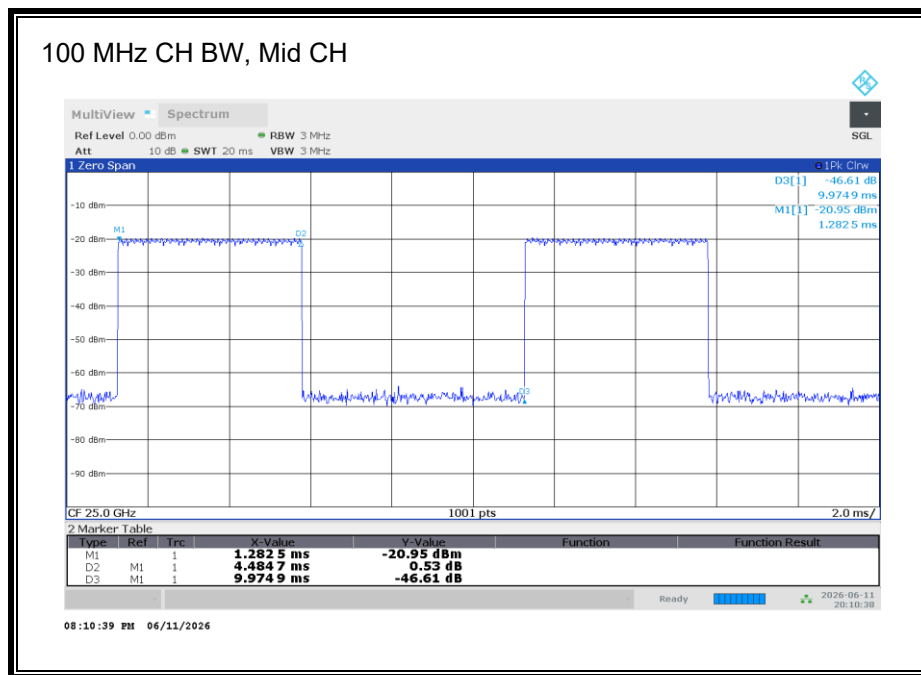


8.1.3. DUTY CYCLE n261

Channel	ON Time	Period	Duty Cycle	Duty Cycle
BW	(usec)	(usec)	(linear)	(%)
50 MHz	4.48	9.98	0.45	45
100 MHz	4.48	9.96	0.45	45

50 MHz CH BW, Mid CH

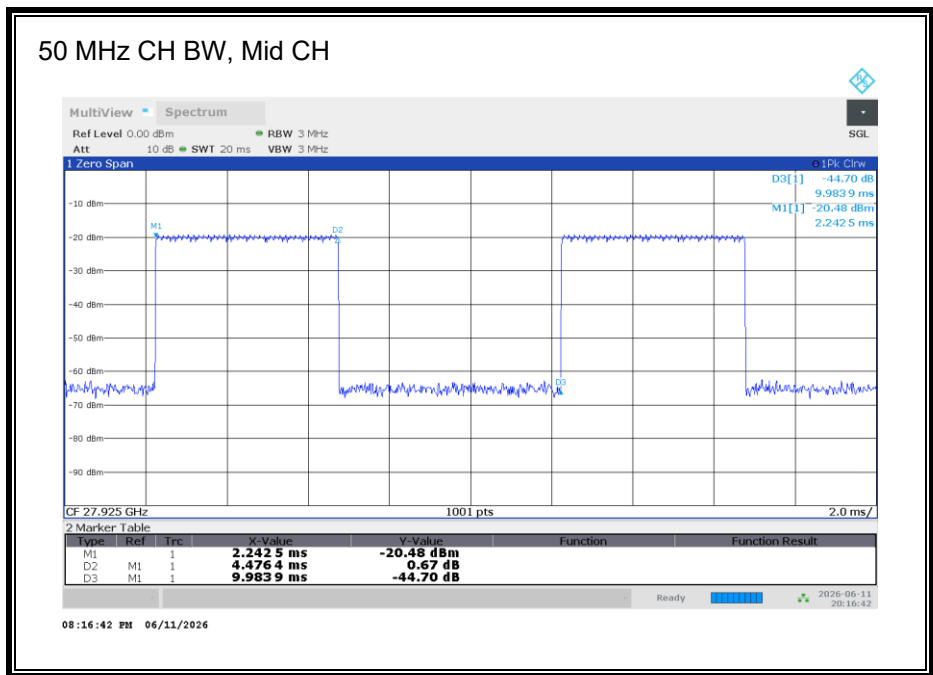


100 MHz CH BW, Mid CH

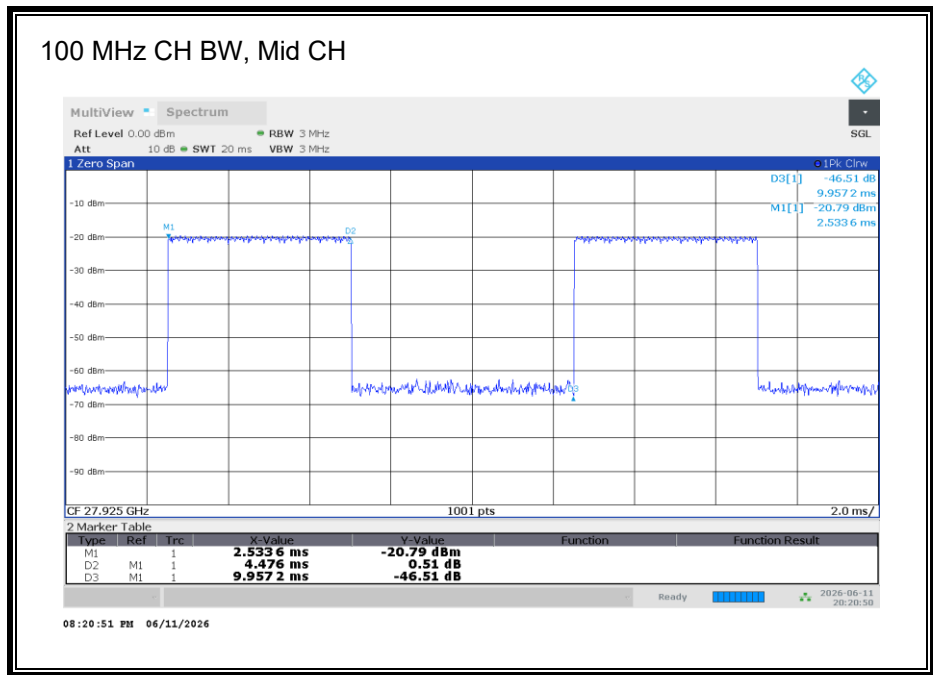

8.1.4. DUTY CYCLE n260

ON Time	Period	Duty Cycle	Duty Cycle
(usec)	(usec)	(linear)	(%)
4.49	9.98	0.45	45

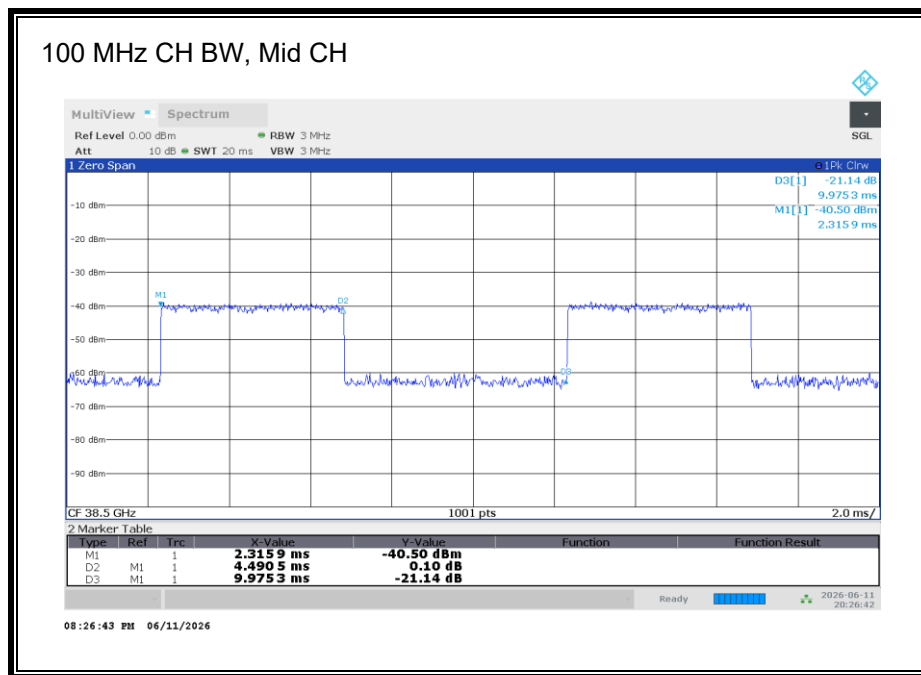

8.2. OCCUPIED BANDWIDTHS

RULE PART

FCC: §2.1049

LIMIT

For reporting purposes only.

TEST PROCEDURES

99% bandwidth measurement function of the signal analyzer was used to measure 99% occupied.

- RBW = 1 – 5% of OBW
- VBW $\geq 3 \times$ RBW
- Span = 1.5x of OBW, typical
- Detection = Peak
- Trace Mode = Max Hold
- Sweep = Auto Couple
- The trace was allowed to stabilize

KDB 842590 D01 Upper Microwave Flexible Use Service v01r03 Section 4.3
ANSI C63.26-2015 Clause 5.4.4

All modulations were investigated in SISO-Dual mode and only QPSK modulation in SISO and MIMO modes with Full RB allocation to determine worst case configuration. All modes of operation were investigated, and results are reported in this section.

To minimize report size, the 1CC to 4CC plots of Full RB, SISO-Dual, QPSK, Mid CH of both channel bandwidths from State A are provided to demonstrate the test parameter setting on signal analyzer. The tabular data includes data for the other combinations of test modes.

RESULTS

See the following pages.

Employee IDs: 19459, 24303, 27294, 27780, 31925, 32226, 103479
Test Dates: 2026-05-22 to 2026-06-25
Test Locations: 01-mmW-A, -B, -C & -D

8.2.1. OBW n258 SB1


RESULTS

n258 SB1, Full-RB


CCs Active	CH BW	Control System	Modulation	Channel	OBW, State A (MHz)	OBW, State B (MHz)
1	100	SISO-DUAL	Pi/2 BPSK	Mid	92.49	92.51
		SISO-DUAL	QPSK	Low	92.54	92.53
				Mid	92.51	92.52
				High	92.53	92.50
		MIMO		Mid	95.60	95.57
		SISO		Mid	92.51	92.56
		SISO-DUAL	16QAM	Mid	92.85	92.87
		SISO-DUAL	64QAM	Mid	92.97	92.98
2	100	SISO-DUAL	Pi/2 BPSK	Mid	191.04	191.02
		SISO-DUAL	QPSK	Low	190.61	190.61
				Mid	190.64	190.64
				High	190.87	190.83
		MIMO		Mid	193.66	193.65
		SISO		Mid	190.62	190.70
		SISO-DUAL	16QAM	Mid	191.06	191.08
		SISO-DUAL	64QAM	Mid	190.97	190.94

n258 SB1, Full-RB, SISO-Dual, QPSK, Mid-CH, State A

1CC, 100 MHz CH BW

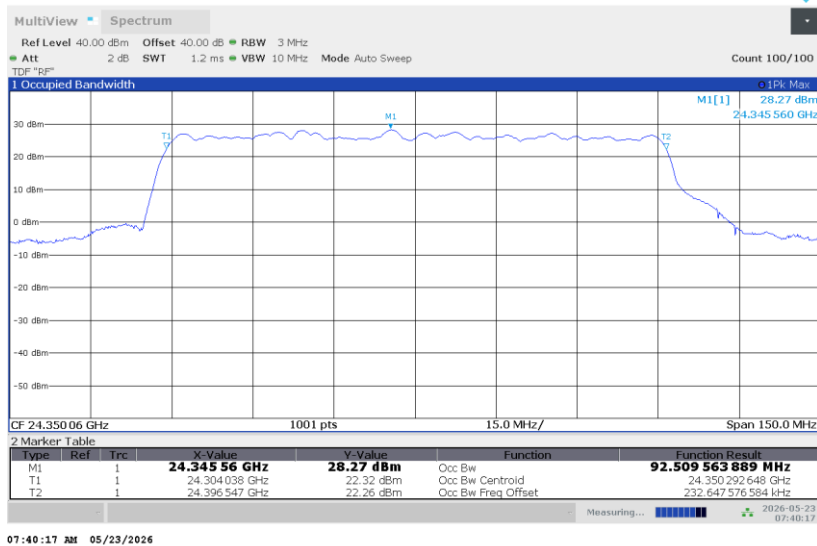

2CC, 100 MHz CH BW

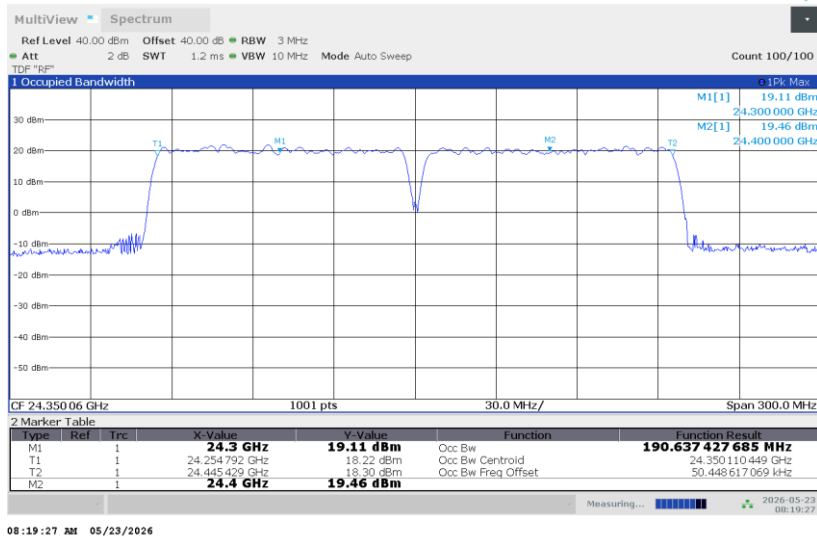

8.2.2. OBW n258 SB2

RESULTS

n258 SB2, Full-RB


CCs Active	CH BW	Control System	Modulation	Channel	OBW, State A (MHz)	OBW, State B (MHz)
1	100	SISO-DUAL	Pi/2 BPSK	Mid	92.50	92.51
		SISO-DUAL	QPSK	Low	92.52	92.58
				Mid	92.48	92.52
				High	92.42	92.39
		MIMO		Mid	95.65	95.62
		SISO		Mid	92.53	92.53
		SISO-DUAL	16QAM	Mid	92.86	92.88
		SISO-DUAL	64QAM	Mid	92.94	93.00
2	100	SISO-DUAL	Pi/2 BPSK	Mid	190.86	190.93
		SISO-DUAL	QPSK	Low	190.81	190.93
				Mid	190.42	190.49
				High	190.67	190.72
		MIMO		Mid	193.62	193.59
		SISO		Mid	190.53	190.45
		SISO-DUAL	16QAM	Mid	190.94	190.98
		SISO-DUAL	64QAM	Mid	190.76	190.82
3	100	SISO-DUAL	Pi/2 BPSK	Mid	290.64	290.83
		SISO-DUAL	QPSK	Low	290.38	290.44
				Mid	290.31	290.54
				High	290.72	291.03
		MIMO		Mid	293.03	292.90
		SISO		Mid	290.39	290.60
		SISO-DUAL	16QAM	Mid	290.32	290.74
		SISO-DUAL	64QAM	Mid	290.50	291.07
4	100	SISO-DUAL	Pi/2 BPSK	Mid	389.52	389.75
		SISO-DUAL	QPSK	Low	390.00	389.99
				Mid	389.70	389.92
				High	389.87	389.88
		MIMO		Mid	391.36	391.35
		SISO		Mid	389.60	389.82
		SISO-DUAL	16QAM	Mid	389.53	389.87
		SISO-DUAL	64QAM	Mid	388.61	389.01


n258 SB2, Full-RB, SISO-Dual, QPSK, Mid-CH, State A

1CC, 100 MHz CH BW



2CC, 100 MHz CH BW

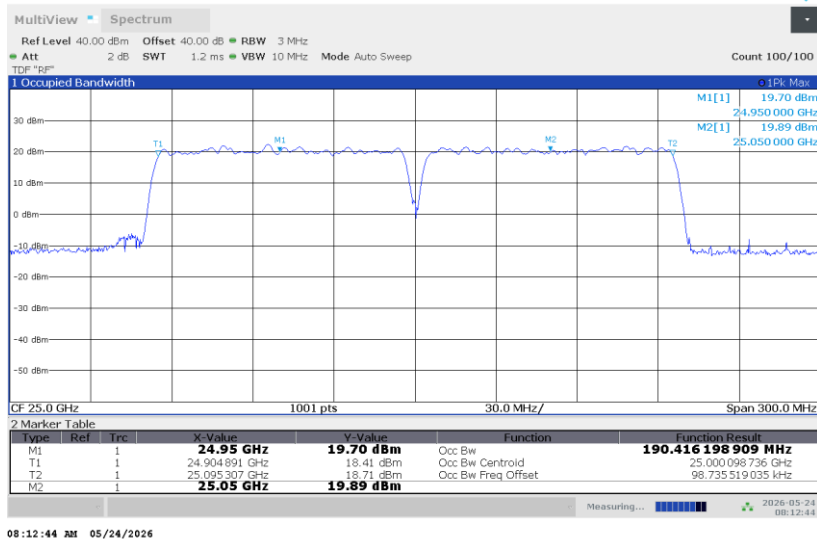

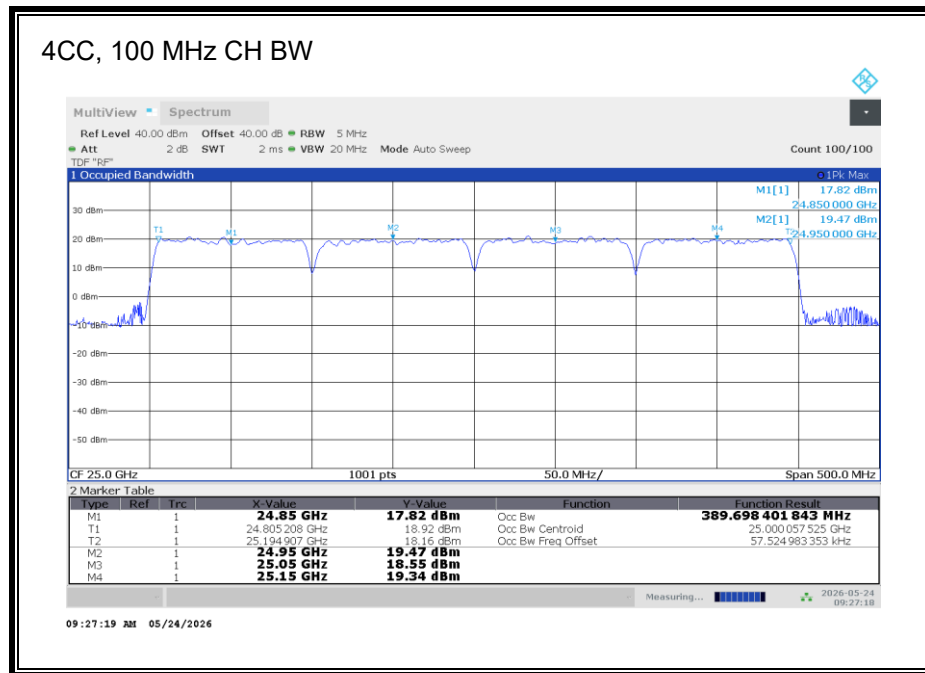

8.2.3. OBW n261

RESULTS



n261, Full-RB


CCs Active	CH BW	Control System	Modulation	Channel	OBW, State A (MHz)	OBW, State B (MHz)
1	50	SISO-DUAL	Pi/2 BPSK	Mid	46.12	46.11
		SISO-DUAL	QPSK	Low	45.95	45.95
				Mid	45.87	45.88
				High	45.91	45.91
				Mid	45.96	46.19
		MIMO		Mid	45.88	45.88
		SISO				
		SISO-DUAL	16QAM	Mid	46.04	46.03
	SISO-DUAL	64QAM	Mid	45.93	45.93	
	100	SISO-DUAL	Pi/2 BPSK	Mid	92.53	92.60
		SISO-DUAL	QPSK	Low	92.58	92.60
				Mid	92.52	92.58
				High	92.48	92.48
				Mid	95.73	95.57
		MIMO		Mid	92.53	92.63
		SISO				
SISO-DUAL		16QAM	Mid	92.83	92.89	
SISO-DUAL	64QAM	Mid	92.90	92.99		
2	50	SISO-DUAL	Pi/2 BPSK	Mid	97.34	97.41
		SISO-DUAL	QPSK	Low	96.63	96.68
				Mid	96.58	96.68
				High	96.50	96.59
				Mid	96.43	96.42
		MIMO		Mid	96.68	96.69
		SISO				
		SISO-DUAL	16QAM	Mid	96.65	96.70
	SISO-DUAL	64QAM	Mid	96.46	96.51	
	100	SISO-DUAL	Pi/2 BPSK	Mid	190.92	191.31
		SISO-DUAL	QPSK	Low	190.59	190.68
				Mid	190.55	190.84
				High	190.82	190.97
				Mid	193.76	193.99
		MIMO		Mid	190.62	190.92
		SISO				
SISO-DUAL		16QAM	Mid	190.99	191.33	
SISO-DUAL	64QAM	Mid	190.93	191.24		

n261, Full-RB

CCs Active	CH BW	Control System	Modulation	Channel	OBW, State A (MHz)	OBW, State B (MHz)
3	50	SISO-DUAL	Pi/2 BPSK	Mid	146.74	146.75
		SISO-DUAL	QPSK	Low	145.78	145.79
				Mid	145.78	145.96
				High	146.38	146.37
				Mid	145.47	145.65
		SISO		Mid	145.81	145.88
		SISO-DUAL		16QAM	Mid	146.02
		SISO-DUAL	64QAM	Mid	145.71	145.85
	100	SISO-DUAL	Pi/2 BPSK	Mid	290.34	290.95
		SISO-DUAL	QPSK	Low	290.37	290.74
				Mid	289.98	290.59
				High	290.87	290.91
				Mid	292.69	293.34
		SISO		Mid	290.10	290.90
		SISO-DUAL		16QAM	Mid	290.09
		SISO-DUAL	64QAM	Mid	290.35	291.10
4	50	SISO-DUAL	Pi/2 BPSK	Mid	195.32	195.58
		SISO-DUAL	QPSK	Low	194.91	194.99
				Mid	194.75	195.08
				High	195.29	195.35
				Mid	194.30	194.83
		SISO		Mid	194.86	194.96
		SISO-DUAL		16QAM	Mid	195.01
		SISO-DUAL	64QAM	Mid	194.51	194.74
	100	SISO-DUAL	Pi/2 BPSK	Mid	388.89	389.54
		SISO-DUAL	QPSK	Low	389.69	389.75
				Mid	389.16	389.58
				High	389.87	389.89
				Mid	391.06	391.82
		SISO		Mid	389.26	398.85
		SISO-DUAL		16QAM	Mid	389.04
		SISO-DUAL	64QAM	Mid	387.98	388.71

n261, Full-RB, SISO-Dual, QPSK, Mid-CH, State A

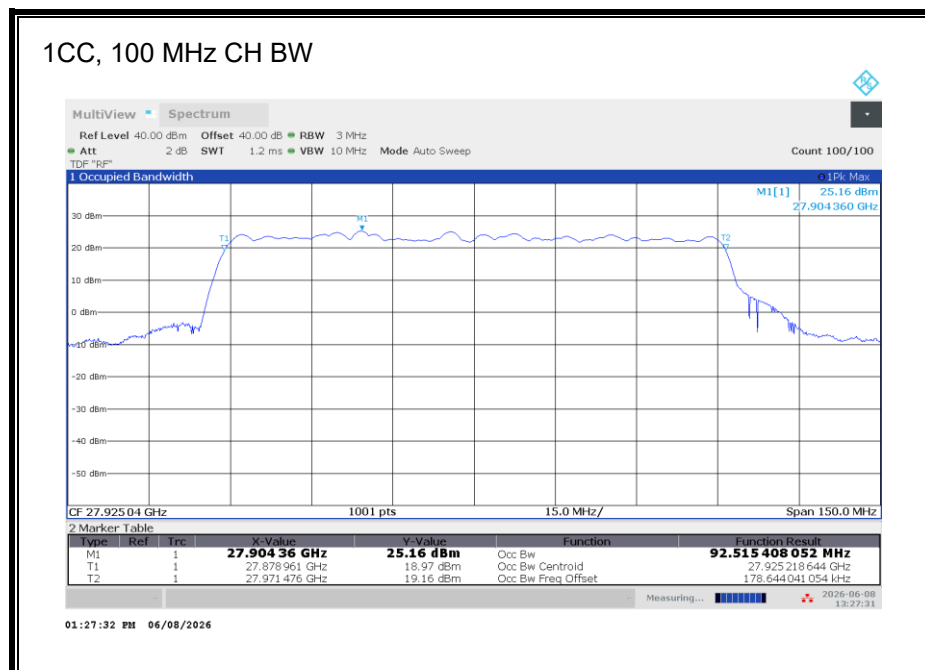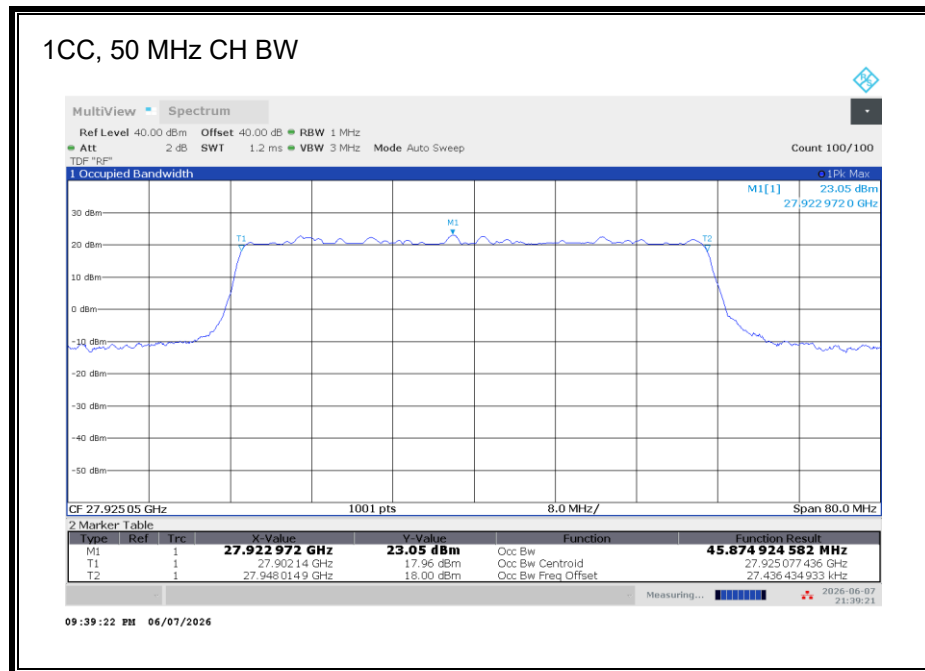

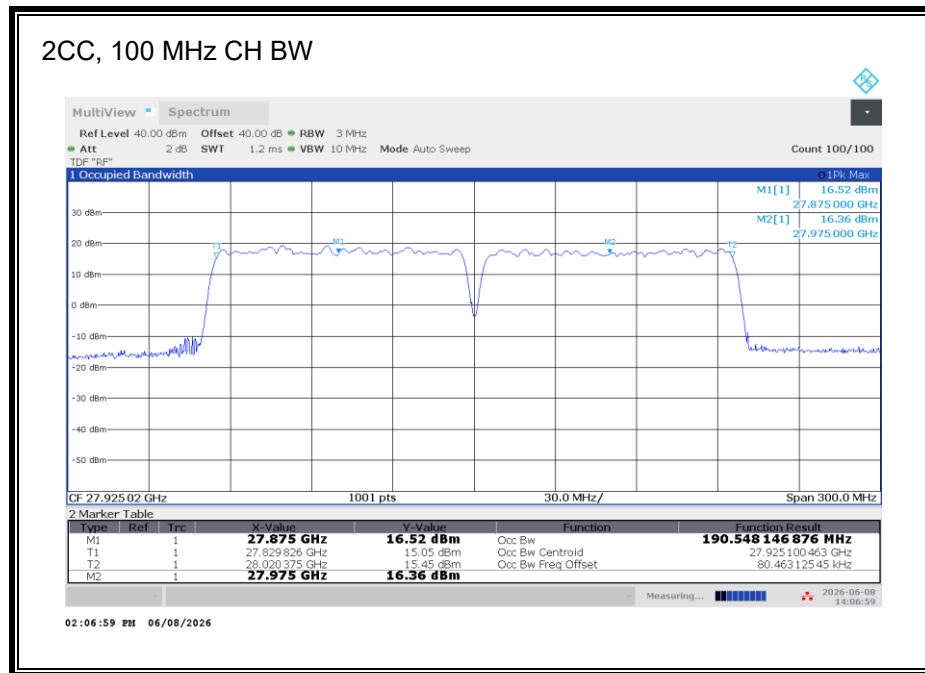

3CC, 50 MHz CH BW



3CC, 100 MHz CH BW



4CC, 50 MHz CH BW



4CC, 100 MHz CH BW



8.2.4. OBW n260


RESULTS

n260, Full-RB

CCs Active	CH BW	Control System	Modulation	Channel	OBW, StateA (MHz)	OBW, StateB (MHz)
1	100	SISO-DUAL	Pi/2 BPSK	Mid	92.54	92.57
		SISO-DUAL	QPSK	Low	92.59	92.55
				Mid	92.50	92.47
				High	92.51	92.56
		MIMO		Mid	95.18	95.28
		SISO		Mid	92.57	92.55
		SISO-DUAL	16QAM	Mid	92.88	92.86
		SISO-DUAL	64QAM	Mid	92.99	93.03
2	100	SISO-DUAL	Pi/2 BPSK	Mid	190.84	190.92
		SISO-DUAL	QPSK	Low	190.78	190.57
				Mid	190.52	190.49
				High	190.98	191.07
		MIMO		Mid	193.37	193.44
		SISO		Mid	190.70	190.65
		SISO-DUAL	16QAM	Mid	190.87	190.88
		SISO-DUAL	64QAM	Mid	190.87	190.88
3	100	SISO-DUAL	Pi/2 BPSK	Mid	290.41	290.43
		SISO-DUAL	QPSK	Low	290.62	290.35
				Mid	290.02	289.98
				High	291.11	291.10
		MIMO		Mid	292.61	292.67
		SISO		Mid	290.37	290.14
		SISO-DUAL	16QAM	Mid	290.10	290.26
		SISO-DUAL	64QAM	Mid	290.64	290.69
4	100	SISO-DUAL	Pi/2 BPSK	Mid	389.68	389.74
		SISO-DUAL	QPSK	Low	389.74	389.43
				Mid	389.58	389.63
				High	389.86	389.85
		MIMO		Mid	391.81	391.36
		SISO		Mid	389.92	389.74
		SISO-DUAL	16QAM	Mid	389.60	389.70
		SISO-DUAL	64QAM	Mid	388.70	388.85

n260, Full-RB, SISO-Dual, QPSK, Mid-CH, State A


1CC, 100 MHz CH BW

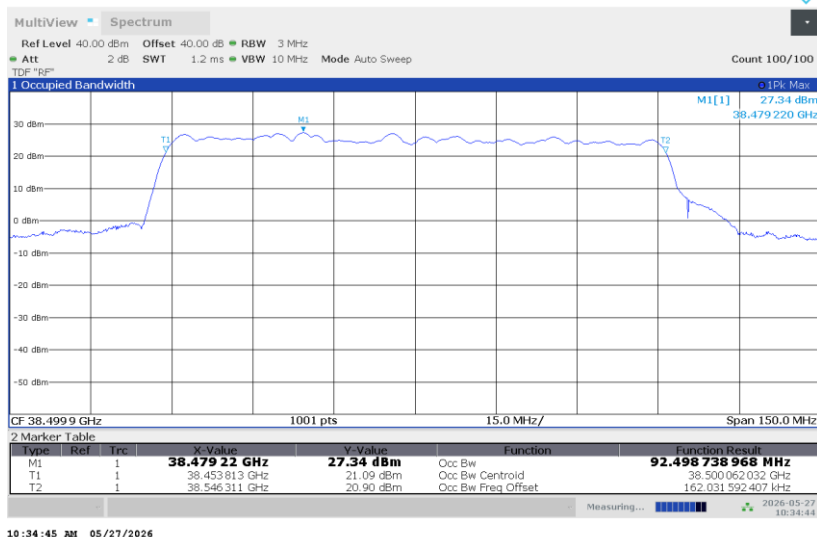

2CC, 100 MHz CH BW



3CC, 100 MHz CH BW

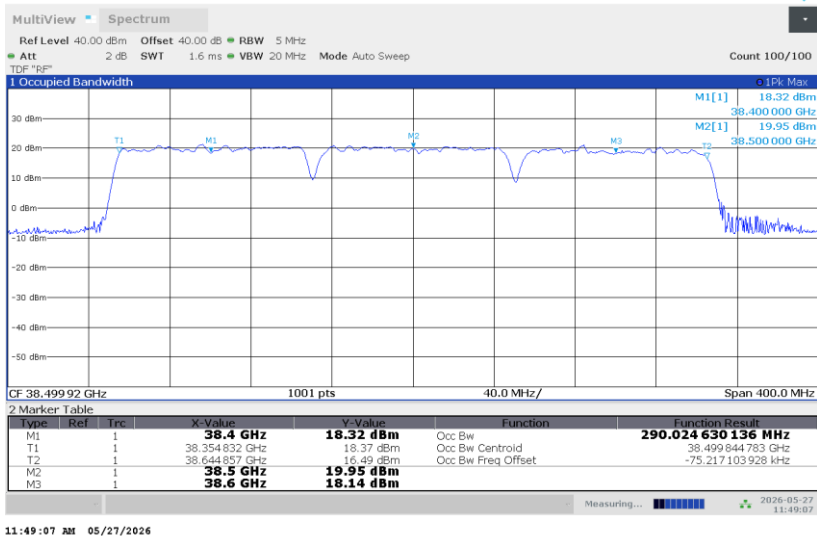

4CC, 100 MHz CH BW



8.3. EQUIVALENT ISOTROPIC RADIATED POWERS

RULE PART(S)

FCC: §2.1046, §30.202

LIMIT

30.202 (b) - For mobile stations, the average power of the sum of all antenna elements is limited to a maximum EIRP of +43 dBm.

TEST PROCEDURES

Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.

- Span = 2x to 3x of OBW
- RBW = 1 – 5% of OBW
- VBW ≥ 3 x RBW
- Number of measurement points in sweep ≥ 2 x span / RBW
- Sweep Time = transmission duration / 2 x number of measurement points
- Detection = power averaging (rms)
- Set sweep trigger to "free run."
- Trace Mode = max old
- Allow trace to fully stabilize

KDB 842590 D01 Upper Microwave Flexible Use Service v01r03 Section 4.2
ANSI C63.26-2015 Clause 5.2.4.4, Clause 5.5, Clause 6.4, and Annex C.5.2

EIRP measurements of variable frequency bands were performed at the far field test distance listed on Section 6.

EIRP was calculated using the equations on ANSI C63.26-2015 Annex C.5.2. The total correction factors of horn antenna gain, cable loss and far-field path loss were calculated using equations C.8 and C.9, and pre-loaded into spectrum analyzer.

Sample calculation of EIRP:

$$\begin{aligned}\text{Total Correction Factor} &= \text{Cable Loss (dB)} - \text{Horn Ant Gain (dBi)} + \text{Path Loss (dB)} \\ &= 4 - 23 + 71 \\ &= 52 \text{ dB}\end{aligned}$$

$$\text{EIRP} = P_{\text{measured}}(\text{dBm}), \text{ where Total Correction Factor preloaded.}$$

In order to properly display signal level on the plots, the pre-loaded correction factors were intentionally lowered by 40 dB and an offset factor of 40 dB was applied on spectrum analyzer to compensate the true correction factors across frequency range of measurement.

Radiated power levels are investigated while the receive antenna was rotated through all angles to determine the worst-case polarization/positioning.

The SISO mode operates with either the horizontal or vertical elements active. The SISO-Dual mode operates with both horizontal and vertical elements active at the same power per polarization as the SISO mode. Therefore, the SISO-Dual mode represents the highest total EIRP across both SISO and SISO-

Dual modes, only spot checks were performed on the SISO mode to confirm this. Single RB (highest power) and full RB allocations were measured.

Pi/2 BPSK, QPSK, 16QAM and 64QAM modulations were all investigated in SISO-Dual mode. The highest power mode is QPSK for the modulations with SISO-Dual mode. Spot checks in QPSK modulation were performed on the SISO and MIMO modes. Full data is provided for these combinations.

To minimize report size, the 1CC to 4CC plots of Full RB, SISO-Dual, QPSK, any of tested low/mid/high CH with both channel bandwidths are provided to demonstrate the test parameter setting on signal analyzer. The tabular data includes data for the other combinations of test modes.

RESULTS

See the following pages.

Employee IDs: 19459, 24303, 27294, 27780, 31925, 32226, 103479
Test Dates: 2026-05-12 to 2026-07-08
Test Locations: 01-mmW-A, -B, -C & -D

8.3.1. EIRP n258 SB1 STATE A

SISO

CCs Active	CH BW	Modulation	Channel	Frequency	Ant Pol	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)		(Size/Offset)	(dBm)	(dBm)	(dB)
1	100	QPSK	Mid	24.349	H	1/32	30.91	43	-12.09
2	100			24.299		1/32	23.97	43	-19.03



SISO-Dual

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
1	100	Pi/2 BPSK	Mid	24.349	1/32	32.63	43	-10.37
		QPSK	Low	24.253	1/0	31.38	43	-11.62
				24.299	1/32	32.00	43	-11.00
				24.299	64/0	32.20	43	-10.80
			Mid	24.349	1/32	32.65	43	-10.35
				24.350	64/1	32.27	43	-10.73
			High	24.399	1/32	31.91	43	-11.09
				24.447	1/65	31.17	43	-11.83
				24.401	64/2	32.27	43	-10.73
		16QAM	Mid	24.349	1/32	31.75	43	-11.25
		64QAM	Mid	24.349	1/32	29.88	43	-13.12
2	100	Pi/2 BPSK	Mid	24.300	64/1	29.11	43	-13.89
		QPSK	Low	24.253	1/0	27.38	43	-15.62
				24.299	64/0	28.13	43	-14.87
				24.253	1/0	27.30	43	-15.70
			Mid	24.299	1/32	27.19	43	-15.81
				24.347	1/65	27.26	43	-15.74
				24.300	64/1	29.13	43	-13.87
				24.347	1/65	27.17	43	-15.83
				24.301	64/2	28.68	43	-14.32
		16QAM	Mid	24.300	64/1	27.66	43	-15.34
		64QAM	Mid	24.300	64/1	24.97	43	-18.03

MIMO

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
1	100	QPSK	Low	24.300	66/0	28.12	43	-14.88
			Mid	24.351	1/33	28.46	43	-14.54
				24.350	66/0	27.93	43	-15.07
			High	24.400	66/0	28.21	43	-14.79
2	100	QPSK	Low	24.300	66/0	27.00	43	-16.00
			Mid	24.301	1/33	24.83	43	-18.17
				24.300	66/0	26.90	43	-16.10
			High	24.300	66/0	27.03	43	-15.97

n258 SB1, Full-RB, SISO-Dual, QPSK, Low CH

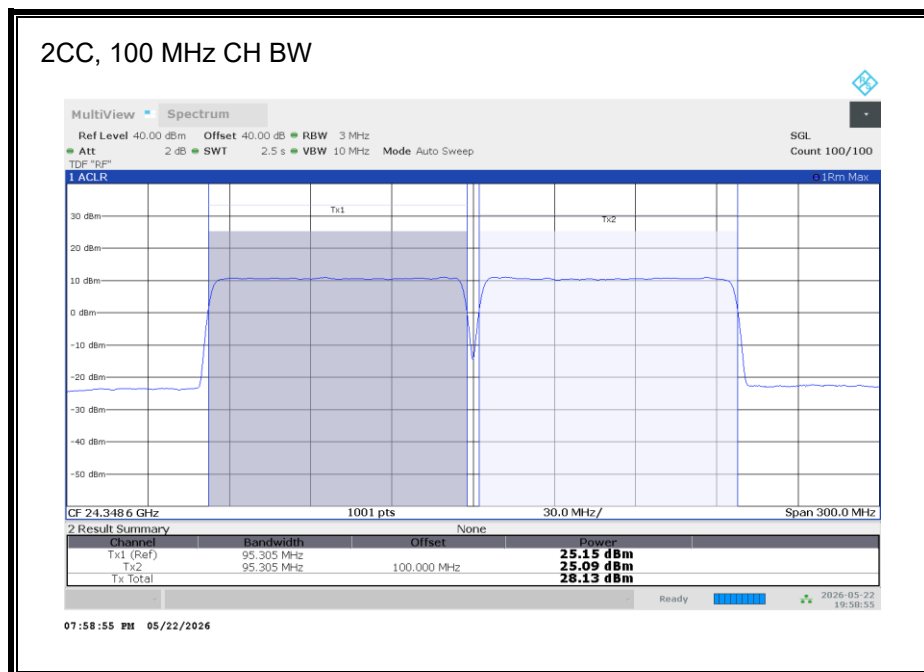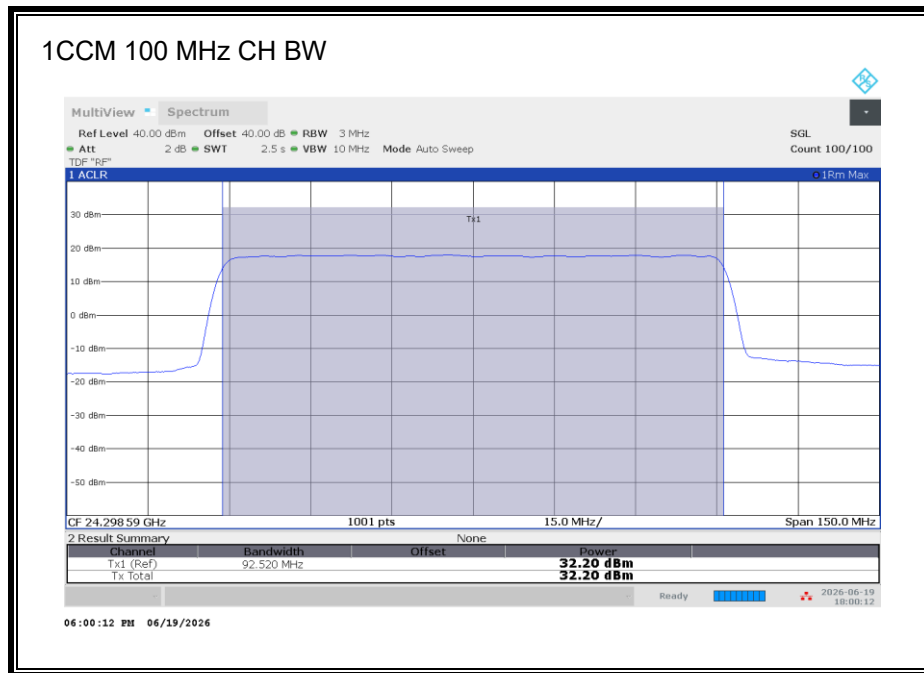

8.3.2. EIRP n258 SB1 STATE B

SISO

CCs Active	CH BW (MHz)	Modulation	Channel	Frequency (GHz)	Ant Pol	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
1	100	QPSK	Mid	24.349	H	1/32	31.20	43	-11.80
2	100			24.299		1/32	24.22	43	-18.78



SISO-Dual

CCs Active	CH BW (MHz)	Modulation	Channel	Frequency (GHz)	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
1	100	Pi/2 BPSK	Mid	24.349	1/32	32.61	43	-10.39
		QPSK	Low	24.253	1/0	31.37	43	-11.63
				24.299	1/32	32.44	43	-10.56
				24.299	64/0	32.72	43	-10.28
				24.349	1/32	32.72	43	-10.28
			Mid	24.350	64/1	32.69	43	-10.31
				24.399	1/32	32.17	43	-10.83
				24.447	1/65	31.74	43	-11.26
				24.401	64/2	32.63	43	-10.37
		16QAM	Mid	24.349	1/32	31.79	43	-11.21
		64QAM	Mid	24.349	1/32	29.92	43	-13.08
2	100	Pi/2 BPSK	Mid	24.300	64/1	29.84	43	-13.16
		QPSK	Low	24.253	1/0	27.53	43	-15.47
				24.299	64/0	29.66	43	-13.34
				24.253	1/0	27.95	43	-15.05
				24.299	1/32	27.99	43	-15.01
			Mid	24.347	1/65	27.94	43	-15.06
				24.300	64/1	29.81	43	-13.19
				24.347	1/65	27.82	43	-15.18
				24.301	64/2	29.90	43	-13.10
		16QAM	Mid	24.300	64/1	28.40	43	-14.60
		64QAM	Mid	24.300	64/1	25.85	43	-17.15

MIMO

CCs Active	CH BW (MHz)	Modulation	Channel	Frequency (GHz)	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
1	100	QPSK	Low	24.300	66/0	28.65	43	-14.35
			Mid	24.351	1/33	29.42	43	-13.58
				24.350	66/0	28.83	43	-14.17
			High	24.400	66/0	28.35	43	-14.65
2	100	QPSK	Low	24.300	66/0	27.60	43	-15.40
			Mid	24.301	1/33	25.75	43	-17.25
				24.300	66/0	27.80	43	-15.20
			High	24.300	66/0	27.31	43	-15.69

n258 SB1, Full-RB, SISO-Dual, QPSK, Low CH

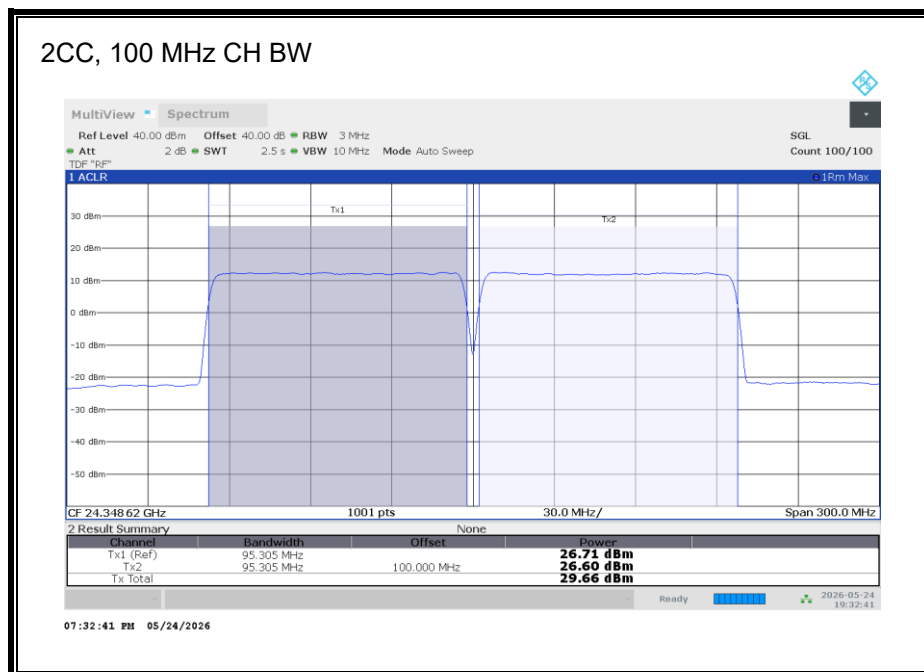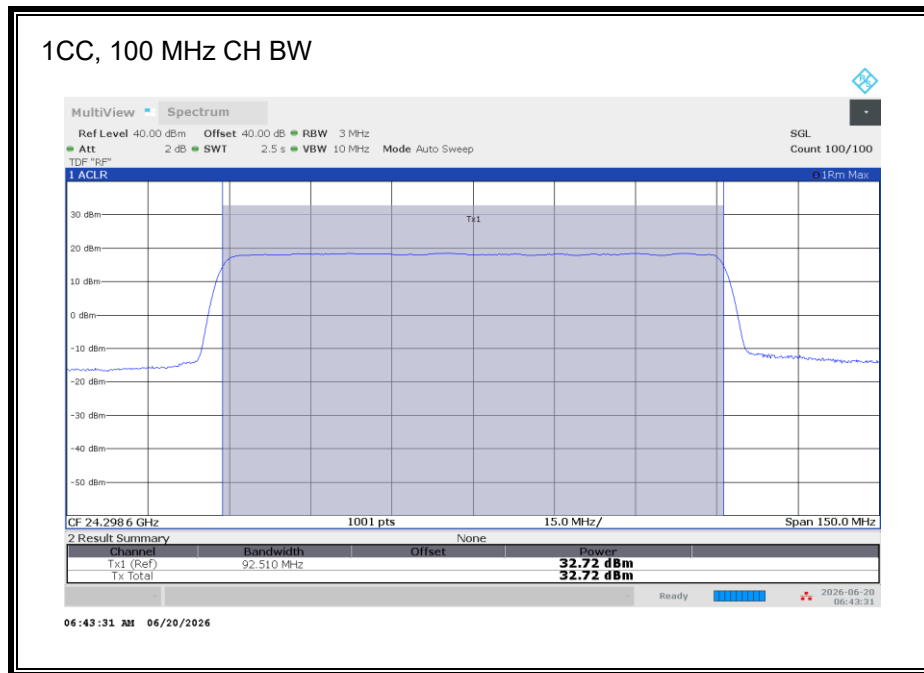

8.3.3. EIRP n258 SB2 STATE A

SISO

CCs Active	CH BW (MHz)	Modulation	Channel	Frequency (GHz)	Ant Pol	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
1	100	QPSK	Mid	24.999	H	1/32	31.14	43	-11.86
2	100			24.949		1/32	24.71	43	-18.29
3	100			24.899		1/32	24.49	43	-18.51
4	100			24.849		1/32	24.42	43	-18.58



SISO-Dual

CCs Active	CH BW (MHz)	Modulation	Channel	Frequency (GHz)	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
1	100	Pi/2 BPSK	Mid	24.999	1/32	31.69	43	-11.31
		QPSK	Low	24.753	1/0	31.41	43	-11.59
				24.799	1/32	31.65	43	-11.35
				24.799	64/0	31.94	43	-11.06
			Mid	24.999	1/32	31.82	43	-11.18
				25.000	64/1	31.89	43	-11.11
			High	25.199	1/32	31.50	43	-11.50
				25.247	1/65	31.68	43	-11.32
				25.201	64/2	31.82	43	-11.18
		16QAM	Mid	24.999	1/32	31.00	43	-12.00
		64QAM		24.999	1/32	29.09	43	-13.91
2	100	Pi/2 BPSK	Mid	24.950	64/1	29.32	43	-13.68
		QPSK	Low	24.753	1/0	27.43	43	-15.57
				24.799	64/0	28.89	43	-14.11
				24.903	1/0	27.13	43	-15.87
			Mid	24.949	1/32	27.34	43	-15.66
				24.997	1/65	27.08	43	-15.92
			High	25.147	1/65	27.39	43	-15.61
				25.101	64/2	29.58	43	-13.42
		16QAM	Mid	24.950	64/1	27.78	43	-15.22
		64QAM		24.950	64/1	25.38	43	-17.62
3	100	Pi/2 BPSK	Mid	24.900	64/1	29.24	43	-13.76
		QPSK	Low	24.753	1/0	27.60	43	-15.40
				24.799	64/0	28.88	43	-14.12
				24.853	1/0	27.22	43	-15.78
			Mid	24.899	1/32	27.31	43	-15.69
				24.947	1/65	27.17	43	-15.83
			High	25.047	1/65	27.29	43	-15.71
				25.001	64/2	29.48	43	-13.52
		16QAM	Mid	24.900	64/1	27.93	43	-15.07
		64QAM		24.900	64/1	25.32	43	-17.68
4	100	Pi/2 BPSK	Mid	24.850	64/1	29.07	43	-13.93
		QPSK	Low	24.753	1/0	27.39	43	-15.61
				24.799	64/0	28.65	43	-14.35
				24.803	1/0	27.04	43	-15.96
			Mid	24.849	1/32	27.20	43	-15.80
				24.897	1/65	26.96	43	-16.04
			High	24.947	1/65	27.25	43	-15.75
				24.901	64/2	29.23	43	-13.77
		16QAM	Mid	24.850	64/1	27.70	43	-15.30
		64QAM	Mid	24.850	64/1	25.24	43	-17.76


MIMO

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
1	100	QPSK	Low	24.800	66/0	28.64	43	-14.36
			Mid	25.001	1/33	28.72	43	-14.28
				25.000	66/0	28.43	43	-14.57
			High	25.200	66/0	28.65	43	-14.35
2	100	QPSK	Low	24.800	66/0	27.60	43	-15.40
			Mid	24.951	1/33	25.42	43	-17.58
				24.950	66/0	27.58	43	-15.42
			High	25.100	66/0	27.82	43	-15.18
3	100	QPSK	Low	24.800	66/0	27.59	43	-15.41
			Mid	24.901	1/33	25.37	43	-17.63
				24.900	66/0	27.55	43	-15.45
			High	25.000	66/0	27.61	43	-15.39
4	100	QPSK	Low	24.800	66/0	27.57	43	-15.43
			Mid	24.851	1/33	25.36	43	-17.64
				24.850	66/0	27.43	43	-15.57
			High	24.900	66/0	27.57	43	-15.43


n258 SB2, Full-RB, SISO-Dual, QPSK, Low CH

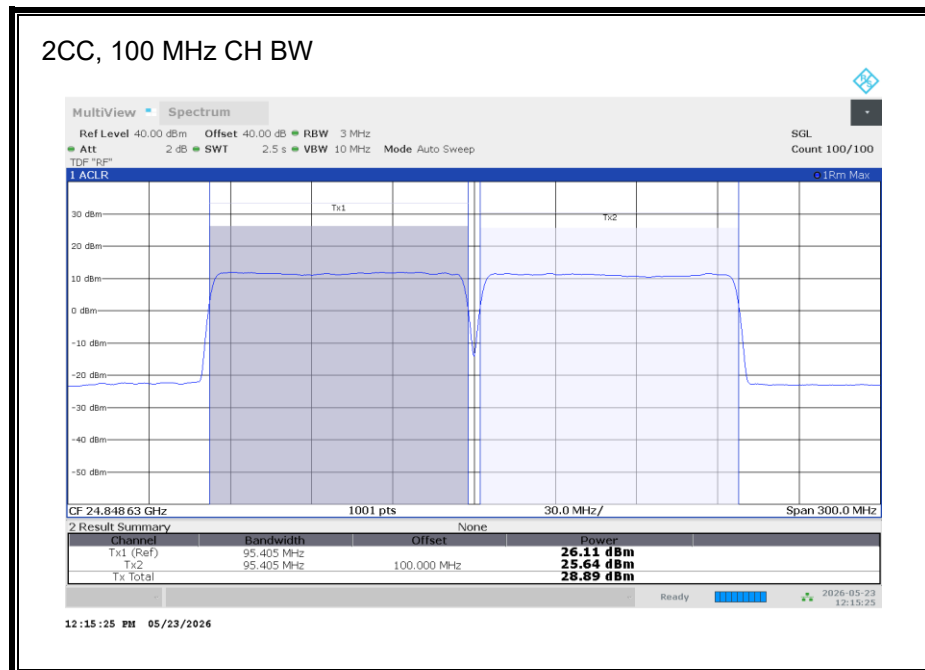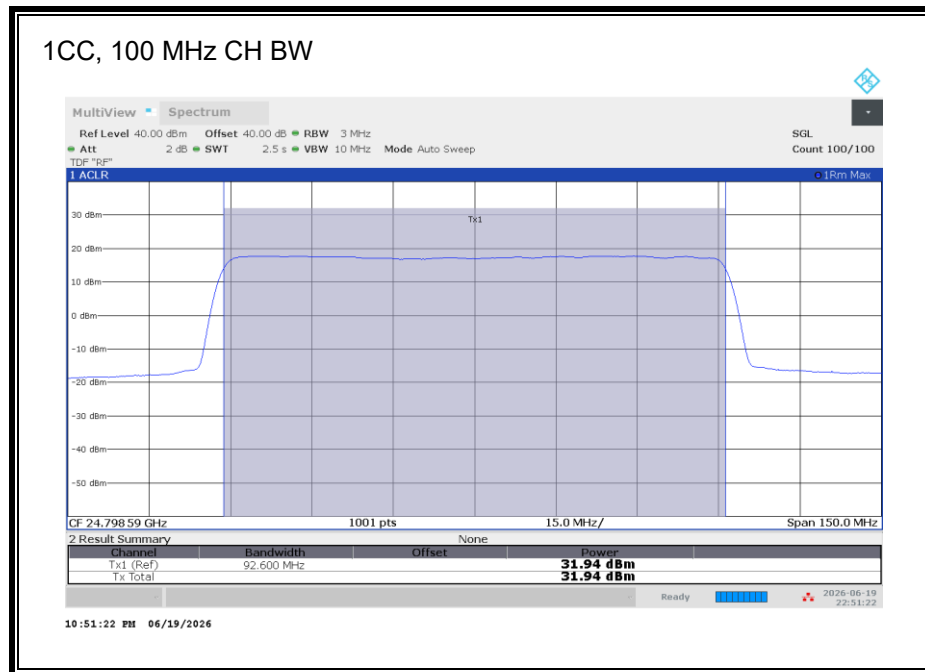

3CC, 100 MHz CH BW

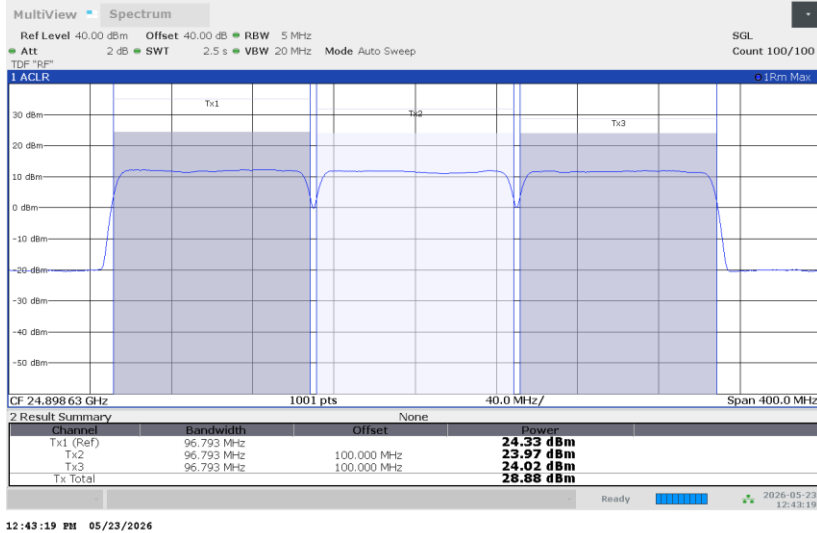

4CC, 100 MHz CH BW

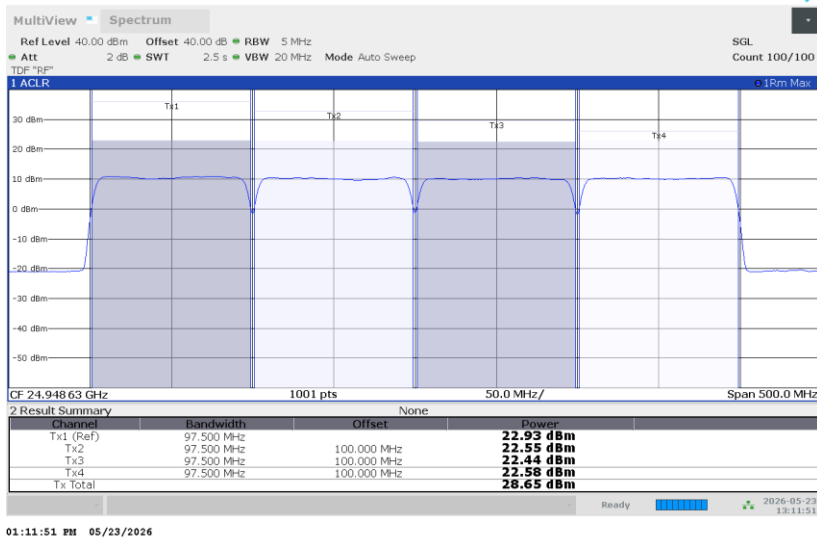

8.3.4. EIRP n258 SB2 STATE B

SISO

CCs Active	CH BW	Modulation	Channel	Frequency	Ant Pol	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)		(Size/Offset)	(dBm)	(dBm)	(dB)
1	100	QPSK	Mid	24.999	H	1/32	31.46	43	-11.54
2	100			24.949		1/32	24.92	43	-18.08
3	100			24.899		1/32	25.00	43	-18.00
4	100			24.849		1/32	24.76	43	-18.24



SISO-Dual

CCs Active	CH BW (MHz)	Modulation	Channel	Frequency (GHz)	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
1	100	Pi/2 BPSK	Mid	24.999	1/32	32.06	43	-10.94
		QPSK	Low	24.753	1/0	31.31	43	-11.69
				24.799	1/32	31.55	43	-11.45
				24.799	64/0	31.94	43	-11.06
				24.999	1/32	32.07	43	-10.93
			Mid	25.000	64/1	32.18	43	-10.82
				25.199	1/32	31.53	43	-11.47
				25.247	1/65	31.64	43	-11.36
				25.201	64/2	31.72	43	-11.28
		16QAM	Mid	24.999	1/32	31.31	43	-11.69
		64QAM		24.999	1/32	29.38	43	-13.62
2	100	Pi/2 BPSK	Mid	24.950	64/1	29.43	43	-13.57
		QPSK	Low	24.753	1/0	27.94	43	-15.06
				24.799	64/0	29.58	43	-13.42
				24.903	1/0	27.63	43	-15.37
				24.949	1/32	27.60	43	-15.40
			Mid	24.997	1/65	27.30	43	-15.70
				25.147	1/65	28.13	43	-14.87
				25.101	64/2	29.97	43	-13.03
				24.950	64/1	28.02	43	-14.98
		16QAM	Mid	24.950	64/1	25.57	43	-17.43
		64QAM		24.950	64/1	25.57	43	-17.43
3	100	Pi/2 BPSK	Mid	24.900	64/1	29.41	43	-13.59
		QPSK	Low	24.753	1/0	27.85	43	-15.15
				24.799	64/0	29.53	43	-13.47
				24.853	1/0	27.78	43	-15.22
				24.899	1/32	27.52	43	-15.48
			Mid	24.947	1/65	27.38	43	-15.62
				25.047	1/65	28.01	43	-14.99
				25.001	64/2	29.71	43	-13.29
				24.900	64/1	27.99	43	-15.01
		16QAM	Mid	24.900	64/1	25.50	43	-17.50
		64QAM		24.900	64/1	25.50	43	-17.50
4	100	Pi/2 BPSK	Mid	24.850	64/1	29.34	43	-13.66
		QPSK	Low	24.753	1/0	27.68	43	-15.32
				24.799	64/0	29.42	43	-13.58
				24.803	1/0	27.52	43	-15.48
				24.849	1/32	27.40	43	-15.60
			Mid	24.897	1/65	27.25	43	-15.75
				24.947	1/65	27.90	43	-15.10
				24.901	64/2	29.47	43	-13.53
				24.850	64/1	27.89	43	-15.11
		16QAM	Mid	24.850	64/1	25.50	43	-17.50
		64QAM	Mid	24.850	64/1	25.50	43	-17.50


MIMO

CCs Active	CH BW (MHz)	Modulation	Channel	Frequency (GHz)	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
1	100	QPSK	Low	24.800	66/0	29.17	43	-13.83
			Mid	25.001	1/33	28.95	43	-14.05
				25.000	66/0	28.79	43	-14.21
			High	25.200	66/0	28.95	43	-14.05
2	100	QPSK	Low	24.800	66/0	27.92	43	-15.08
			Mid	24.951	1/33	25.77	43	-17.23
				24.950	66/0	27.85	43	-15.15
			High	25.100	66/0	27.99	43	-15.01
3	100	QPSK	Low	24.800	66/0	27.96	43	-15.04
			Mid	24.901	1/33	25.68	43	-17.32
				24.900	66/0	27.76	43	-15.24
			High	25.000	66/0	27.82	43	-15.18
4	100	QPSK	Low	24.800	66/0	27.83	43	-15.17
			Mid	24.851	1/33	25.67	43	-17.33
				24.850	66/0	27.69	43	-15.31
			High	24.900	66/0	27.79	43	-15.21


n258 SB2, Full-RB, SISO-Dual, QPSK, Low CH

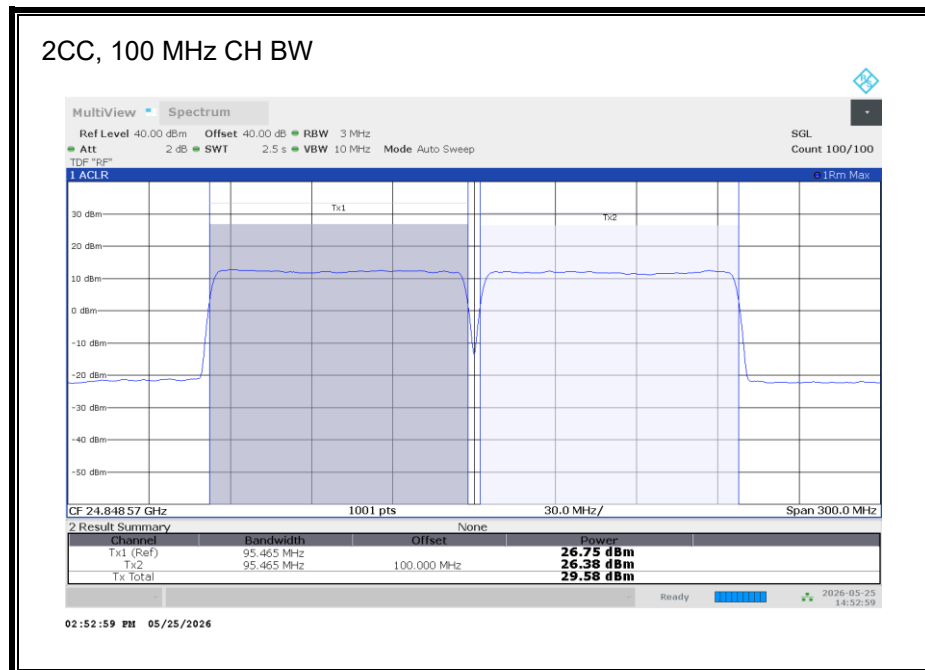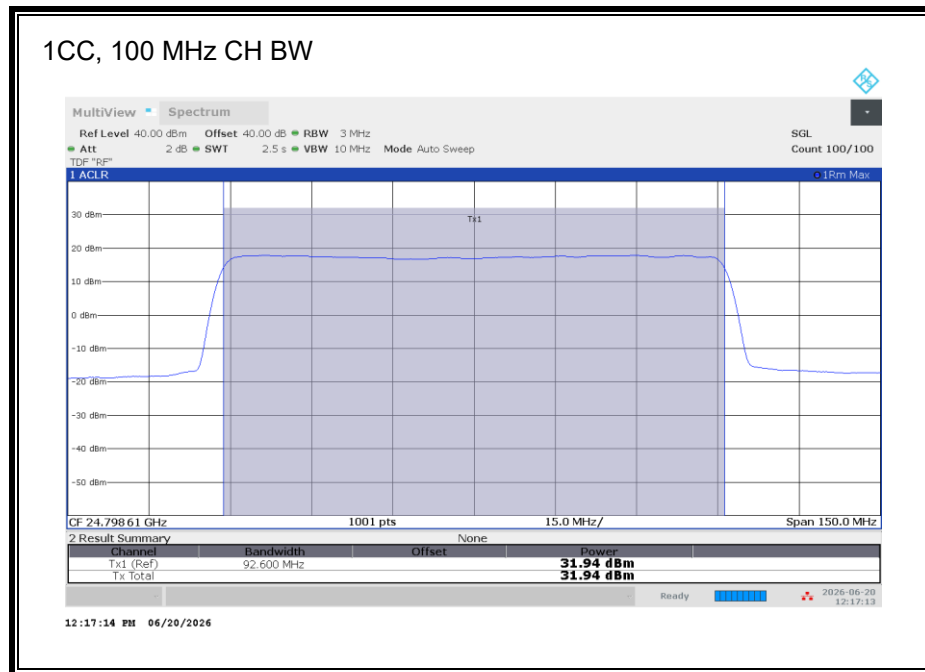

3CC, 100 MHz CH BW

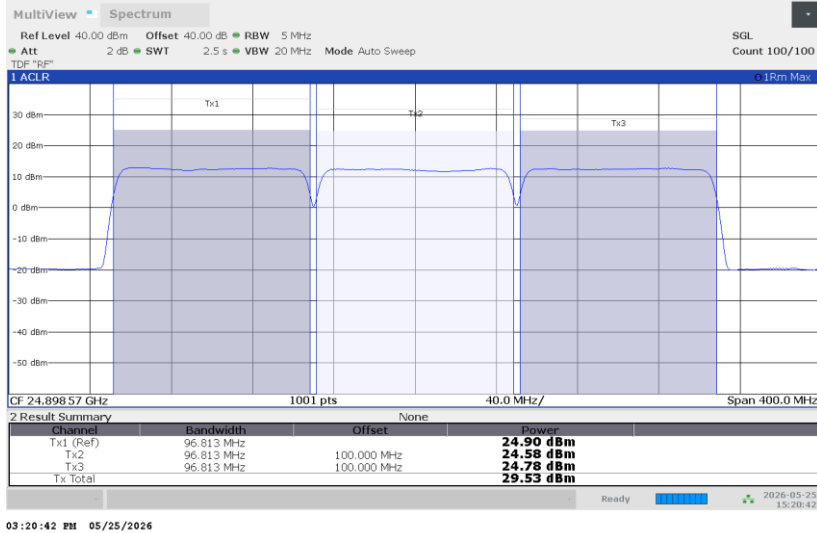

4CC, 100 MHz CH BW

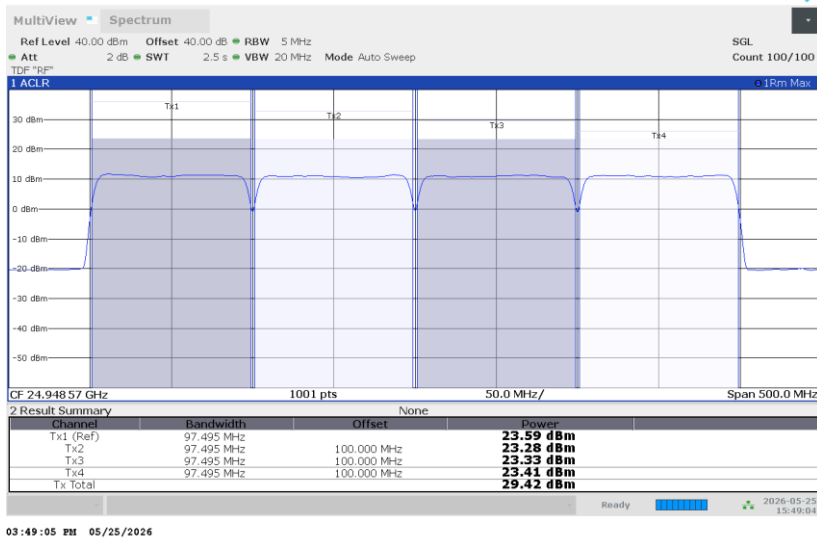

8.3.5. EIRP n261 STATE A

SISO

CCs Active	CH BW	Modulation	Channel	Frequency	Ant Pol	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)		(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	QPSK	Mid	27.924	H	1/15	28.88	43	-14.12
	100			27.924		1/32	28.70	43	-14.30
2	50			27.899		1/15	22.06	43	-20.94
	100			27.874		1/32	21.76	43	-21.24
3	50			27.874		1/15	21.94	43	-21.06
	100			27.824		1/32	21.84	43	-21.16
4	50			27.849		1/15	21.95	43	-21.05
	100			27.774		1/32	22.01	43	-20.99

SISO-Dual

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	Pi/2 BPSK	Mid	27.924	1/15	30.89	43	-12.11
		QPSK	Low	27.503	1/0	29.05	43	-13.95
				27.524	1/15	30.00	43	-13.00
				27.525	32/0	30.25	43	-12.75
				27.924	1/15	31.15	43	-11.85
			27.925	32/0	31.46	43	-11.54	
			High	28.324	1/15	31.78	43	-11.22
				28.347	1/31	31.90	43	-11.10
				28.325	32/0	32.07	43	-10.93
		16QAM	Mid	27.924	1/15	29.98	43	-13.02
	64QAM	Mid	27.924	1/15	28.05	43	-14.95	
	100	Pi/2 BPSK	Mid	27.924	1/32	30.89	43	-12.11
		QPSK	Low	27.503	1/0	29.29	43	-13.71
				27.549	1/32	30.32	43	-12.68
				27.549	64/0	30.41	43	-12.59
			Mid	27.924	1/32	31.13	43	-11.87
				28.299	1/32	32.11	43	-10.89
			High	28.347	1/65	31.74	43	-11.26
				28.301	64/2	32.25	43	-10.75
		16QAM	Mid	27.924	1/32	30.10	43	-12.90
		64QAM	Mid	27.924	1/32	28.15	43	-14.85
2	50	QPSK	Low	27.503	1/0	25.02	43	-17.98
				27.525	32/0	27.12	43	-15.88
			Mid	27.878	1/0	25.73	43	-17.27
				27.899	1/15	25.52	43	-17.48
				27.922	1/31	26.14	43	-16.86
				28.297	1/31	27.29	43	-15.71
			High	28.275	32/0	28.78	43	-14.22
				100	Pi/2 BPSK	Mid	27.875	64/1
	QPSK	Low	27.503		1/0	25.15	43	-17.85
			27.549		64/0	27.29	43	-15.71
			27.828		1/0	25.80	43	-17.20
		Mid	27.874		1/32	25.69	43	-17.31
			27.875		1/65	26.21	43	-16.79
			28.247		1/65	26.64	43	-16.36
			28.201		64/2	28.59	43	-14.41
	16QAM	Mid	27.875		64/1	26.72	43	-16.28
	64QAM	Mid	27.875	64/1	24.20	43	-18.80	



SISO-Dual

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
3	50	QPSK	Low	27.503	1/0	25.22	43	-17.78
				27.525	32/0	27.30	43	-15.70
			Mid	27.853	1/0	26.22	43	-16.78
				27.874	1/15	25.61	43	-17.39
				27.897	1/31	26.40	43	-16.60
			High	28.247	1/31	27.32	43	-15.68
				28.225	32/0	28.69	43	-14.31
	100	QPSK	Low	27.503	1/0	25.23	43	-17.77
				27.549	64/0	27.24	43	-15.76
			Mid	27.778	1/0	25.96	43	-17.04
				27.824	1/32	25.80	43	-17.20
				27.872	1/65	26.11	43	-16.89
			High	28.147	1/65	26.28	43	-16.72
				28.101	64/2	28.12	43	-14.88
4	50	QPSK	Low	27.503	1/0	25.30	43	-17.70
				27.525	32/0	27.30	43	-15.70
			Mid	27.828	1/0	25.92	43	-17.08
				27.849	1/15	25.72	43	-17.28
				27.872	1/31	26.28	43	-16.72
			High	28.197	1/31	26.93	43	-16.07
				28.175	32/0	28.77	43	-14.23
	100	Pi/2 BPSK	Mid	27.775	64/1	27.71	43	-15.29
		QPSK	Low	27.503	1/0	25.30	43	-17.70
				27.549	64/0	27.55	43	-15.45
			Mid	27.728	1/0	25.83	43	-17.17
				27.774	1/32	25.66	43	-17.34
				27.822	1/65	25.92	43	-17.08
			High	28.047	1/65	25.95	43	-17.05
				28.001	64/2	27.93	43	-15.07
		16QAM	Mid	27.775	64/1	26.12	43	-16.88
		64QAM	Mid	27.775	64/1	23.74	43	-19.26

MIMO


CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	QPSK	Low	27.525	32/0	27.14	43	-15.86
			Mid	27.924	1/15	27.01	43	-15.99
				27.925	32/0	26.59	43	-16.41
			High	28.325	32/0	27.63	43	-15.37
	100		Low	27.550	66/0	26.59	43	-16.41
			Mid	27.926	1/33	26.85	43	-16.15
				27.925	66/0	26.34	43	-16.66
			High	28.300	66/0	27.57	43	-15.43
2	50	QPSK	Low	27.525	32/0	26.35	43	-16.65
			Mid	27.899	1/15	22.81	43	-20.19
				27.900	32/0	25.22	43	-17.78
			High	28.275	32/0	26.34	43	-16.66
	100		Low	27.550	66/0	24.01	43	-18.99
			Mid	27.876	1/33	22.80	43	-20.20
				27.875	66/0	24.91	43	-18.09
			High	28.200	66/0	25.78	43	-17.22
3	50	QPSK	Low	27.525	32/0	26.32	43	-16.68
			Mid	27.874	1/15	22.89	43	-20.11
				27.875	32/0	25.15	43	-17.85
			High	28.225	32/0	26.21	43	-16.79
	100		Low	27.550	66/0	24.19	43	-18.81
			Mid	27.826	1/33	22.80	43	-20.20
				27.825	66/0	24.60	43	-18.40
			High	28.100	66/0	25.39	43	-17.61
4	50	QPSK	Low	27.525	32/0	26.13	43	-16.87
			Mid	27.849	1/15	23.32	43	-19.68
				27.850	32/0	25.11	43	-17.89
			High	28.175	32/0	26.17	43	-16.83
	100		Low	27.550	66/0	24.13	43	-18.87
			Mid	27.776	1/33	22.55	43	-20.45
				27.775	66/0	24.56	43	-18.44
			High	28.000	66/0	25.22	43	-17.78

n261, Full-RB, SISO-Dual, QPSK, Low-CH

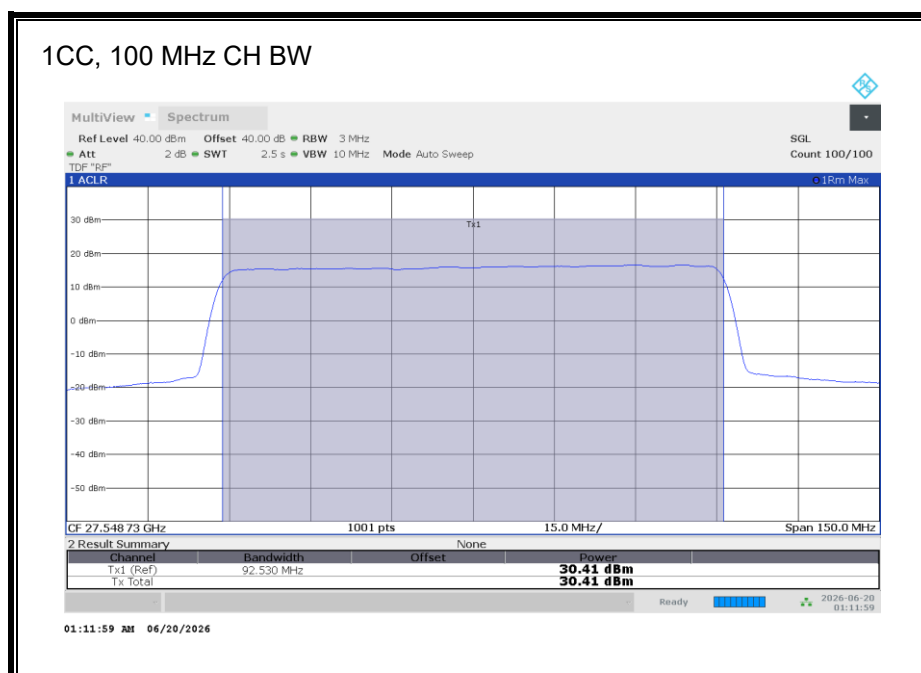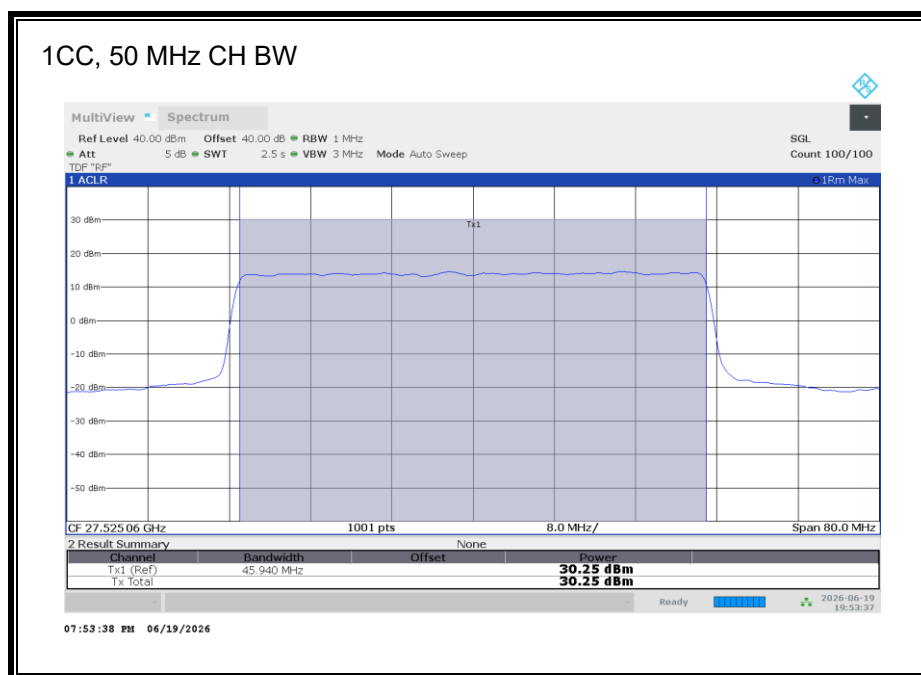


n261, Full-RB, SISO-Dual, QPSK, Low-CH



2CC, 50 MHz CH BW

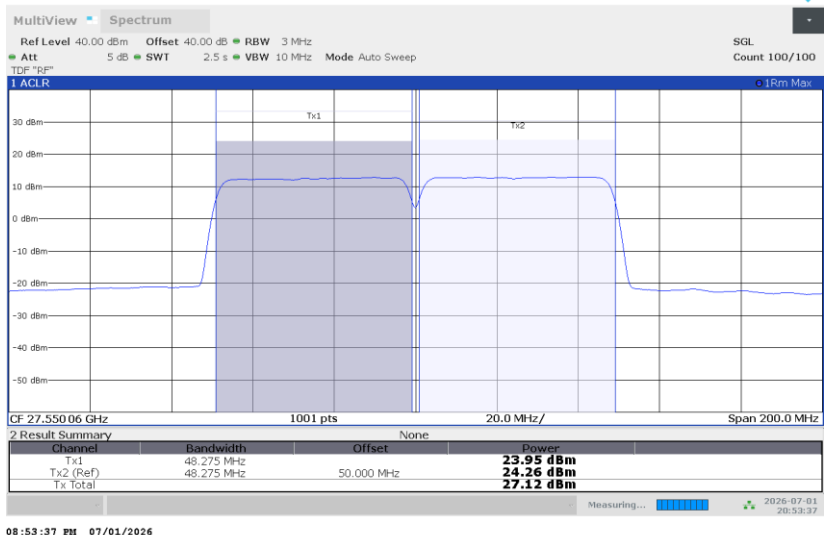



2CC, 100 MHz CH BW

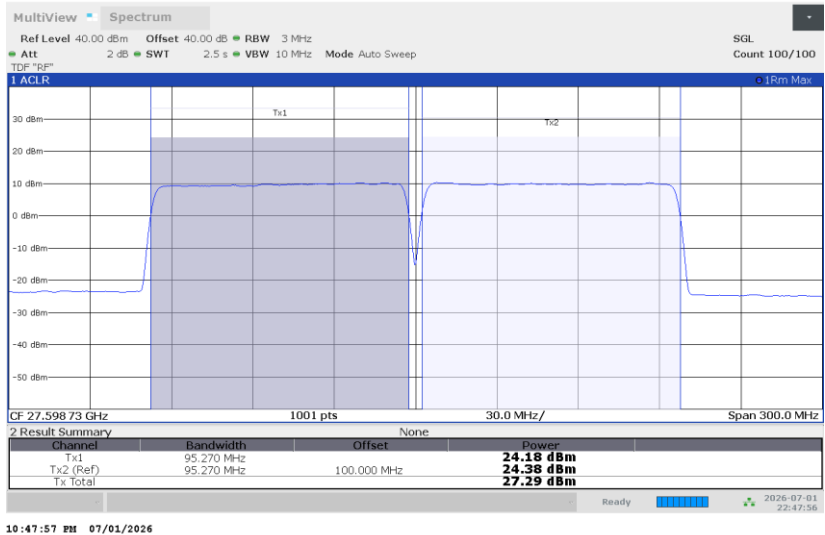

n261, Full-RB, SISO-Dual, QPSK, Low-CH

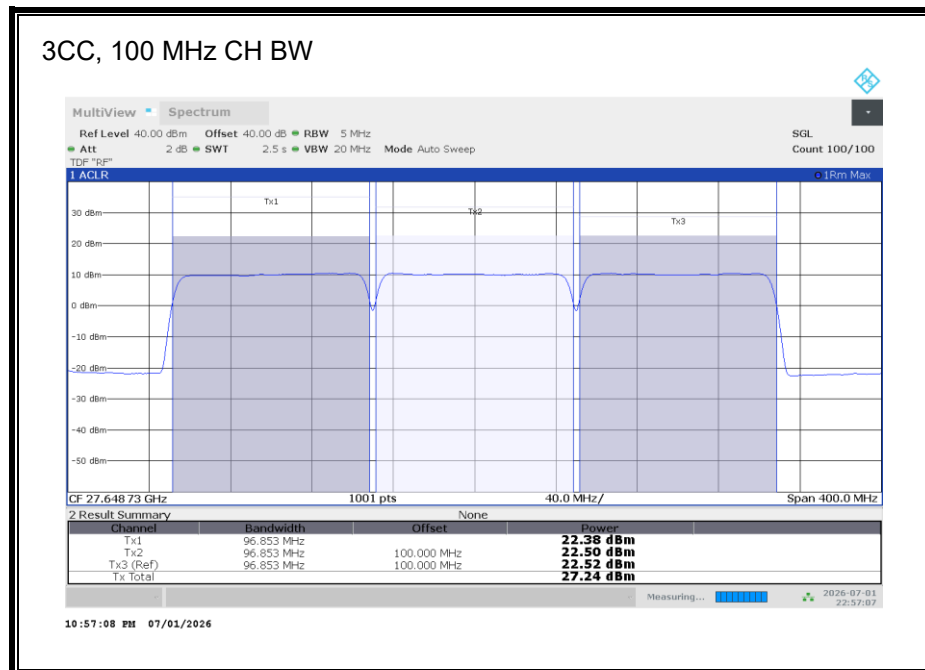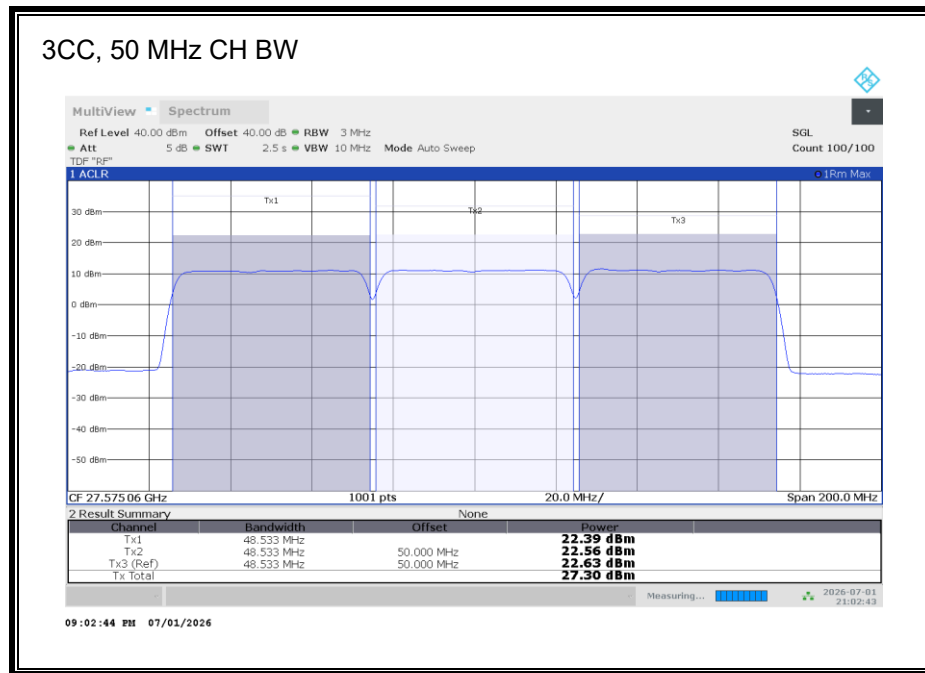

n261, Full-RB, SISO-Dual, QPSK, Low-CH

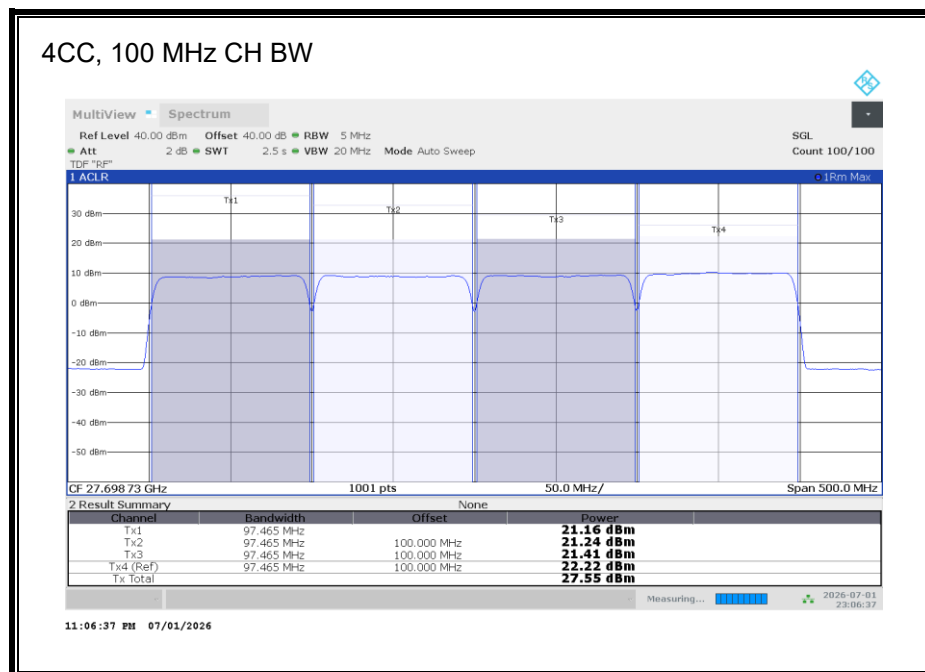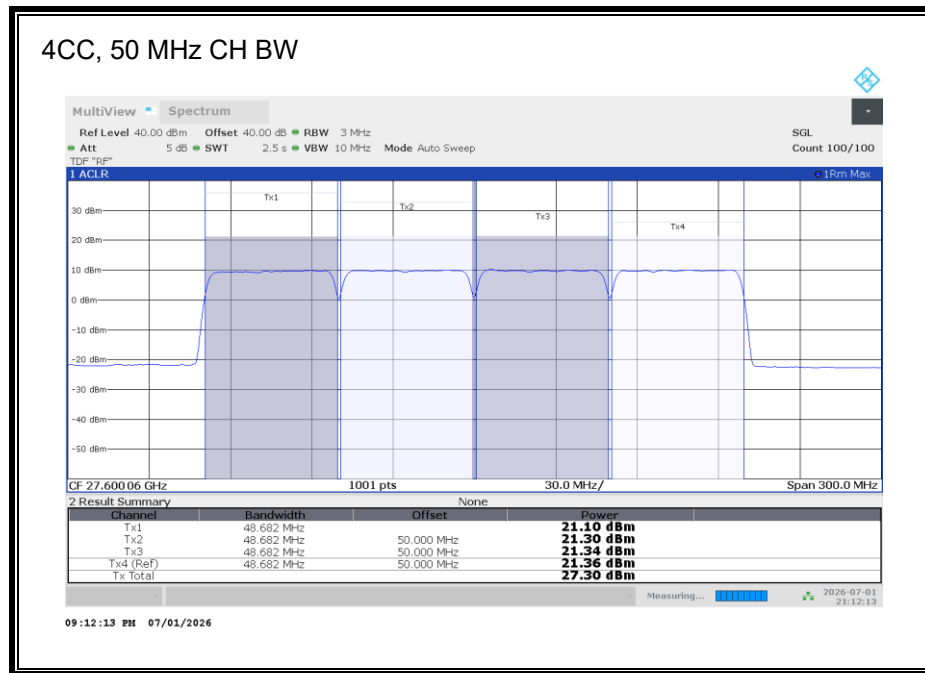

8.3.6. EIRP n261 STATE B

SISO

CCs Active	CH BW	Modulation	Channel	Frequency	Ant Pol	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)		(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	QPSK	Mid	27.924	H	1/15	28.93	43	-14.07
	100			27.924		1/32	28.70	43	-14.30
2	50			27.899		1/15	22.24	43	-20.76
	100			27.874		1/32	22.59	43	-20.41
3	50			27.874		1/15	22.50	43	-20.50
	100			27.824		1/32	22.69	43	-20.31
4	50			27.849		1/15	22.52	43	-20.48
	100			27.774		1/32	22.54	43	-20.46

SISO-Dual

CCs Active	CH BW (MHz)	Modulation	Channel	Frequency (GHz)	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
1	50	Pi/2 BPSK	Mid	27.924	1/15	31.67	43	-11.33
		QPSK	Low	27.503	1/0	29.05	43	-13.95
				27.524	1/15	29.98	43	-13.02
				27.525	32/0	30.25	43	-12.75
				27.924	1/15	31.88	43	-11.12
			Mid	27.925	32/0	32.31	43	-10.69
				28.324	1/15	32.95	43	-10.05
				28.347	1/31	32.67	43	-10.33
				28.325	32/0	33.23	43	-9.77
		16QAM	Mid	27.924	1/15	30.95	43	-12.05
		64QAM	Mid	27.924	1/15	28.91	43	-14.09
	100	Pi/2 BPSK	Mid	27.924	1/32	31.56	43	-11.44
		QPSK	Low	27.503	1/0	29.43	43	-13.57
				27.549	1/32	30.14	43	-12.86
				27.549	64/0	30.29	43	-12.71
			Mid	27.924	1/32	31.78	43	-11.22
				28.299	1/32	32.96	43	-10.04
				28.347	1/65	32.59	43	-10.41
				28.301	64/2	32.65	43	-10.35
		16QAM	Mid	27.924	1/32	30.74	43	-12.26
		64QAM	Mid	27.924	1/32	28.80	43	-14.20
2	50	QPSK	Low	27.503	1/0	25.25	43	-17.75
				27.525	32/0	27.35	43	-15.65
			Mid	27.878	1/0	26.26	43	-16.74
				27.899	1/15	26.62	43	-16.38
				27.922	1/31	26.58	43	-16.42
				28.297	1/31	27.86	43	-15.14
			High	28.275	32/0	29.47	43	-13.53
		Pi/2 BPSK	Mid	27.875	64/1	27.15	43	-15.85
	100	QPSK	Low	27.503	1/0	24.84	43	-18.16
				27.549	64/0	26.97	43	-16.03
			Mid	27.828	1/0	24.44	43	-18.56
				27.874	1/32	25.57	43	-17.43
				27.875	1/65	26.04	43	-16.96
				28.247	1/65	26.43	43	-16.57
			High	28.201	64/2	29.51	43	-13.49
		16QAM	Mid	27.875	64/1	25.74	43	-17.26
		64QAM	Mid	27.875	64/1	23.44	43	-19.56



SISO-Dual

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
3	50	QPSK	Low	27.503	1/0	25.22	43	-17.78
				27.525	32/0	27.38	43	-15.62
			Mid	27.853	1/0	26.24	43	-16.76
				27.874	1/15	26.59	43	-16.41
				27.897	1/31	26.55	43	-16.45
			High	28.247	1/31	27.96	43	-15.04
				28.225	32/0	29.51	43	-13.49
	100	QPSK	Low	27.503	1/0	24.89	43	-18.11
				27.549	64/0	26.92	43	-16.08
			Mid	27.778	1/0	24.28	43	-18.72
				27.824	1/32	25.58	43	-17.42
				27.872	1/65	26.16	43	-16.84
			High	28.147	1/65	26.41	43	-16.59
				28.101	64/2	29.22	43	-13.78
4	50	QPSK	Low	27.503	1/0	26.12	43	-16.88
				27.525	32/0	27.39	43	-15.61
			Mid	27.828	1/0	26.20	43	-16.80
				27.849	1/15	26.57	43	-16.43
				27.872	1/31	26.57	43	-16.43
			High	28.197	1/31	27.93	43	-15.07
				28.175	32/0	29.58	43	-13.42
	100	Pi/2 BPSK	Mid	27.775	64/1	27.10	43	-15.90
		QPSK	Low	27.503	1/0	24.91	43	-18.09
				27.549	64/0	27.19	43	-15.81
			Mid	27.728	1/0	24.22	43	-18.78
				27.774	1/32	25.48	43	-17.52
				27.822	1/65	26.21	43	-16.79
			High	28.047	1/65	26.30	43	-16.70
				28.001	64/2	29.03	43	-13.97
		16QAM	Mid	27.775	64/1	25.67	43	-17.33
		64QAM	Mid	27.775	64/1	23.29	43	-19.71



MIMO

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
1	50	QPSK	Low	27.525	32/0	25.13	43	-17.87
			Mid	27.924	1/15	27.16	43	-15.84
				27.925	32/0	26.67	43	-16.33
			High	28.325	32/0	27.17	43	-15.83
	100		Low	27.550	66/0	25.56	43	-17.44
			Mid	27.926	1/33	27.17	43	-15.83
				27.925	66/0	26.51	43	-16.49
			High	28.300	66/0	27.32	43	-15.68
2	50	QPSK	Low	27.525	32/0	24.08	43	-18.92
			Mid	27.899	1/15	23.39	43	-19.61
				27.900	32/0	24.95	43	-18.05
			High	28.275	32/0	25.43	43	-17.57
	100		Low	27.550	66/0	24.58	43	-18.42
			Mid	27.876	1/33	22.33	43	-20.67
				27.875	66/0	24.04	43	-18.96
			High	28.200	66/0	25.35	43	-17.65
3	50	QPSK	Low	27.525	32/0	23.97	43	-19.03
			Mid	27.874	1/15	23.48	43	-19.52
				27.875	32/0	24.81	43	-18.19
			High	28.225	32/0	25.19	43	-17.81
	100		Low	27.550	66/0	24.54	43	-18.46
			Mid	27.826	1/33	22.38	43	-20.62
				27.825	66/0	24.09	43	-18.91
			High	28.100	66/0	25.13	43	-17.87
4	50	QPSK	Low	27.525	32/0	23.81	43	-19.19
			Mid	27.849	1/15	23.48	43	-19.52
				27.850	32/0	24.98	43	-18.02
			High	28.175	32/0	25.26	43	-17.74
	100		Low	27.550	66/0	24.73	43	-18.27
			Mid	27.776	1/33	22.36	43	-20.64
				27.775	66/0	24.04	43	-18.96
			High	28.000	66/0	24.94	43	-18.06



n261, Full-RB, SISO-Dual, QPSK, Low-CH

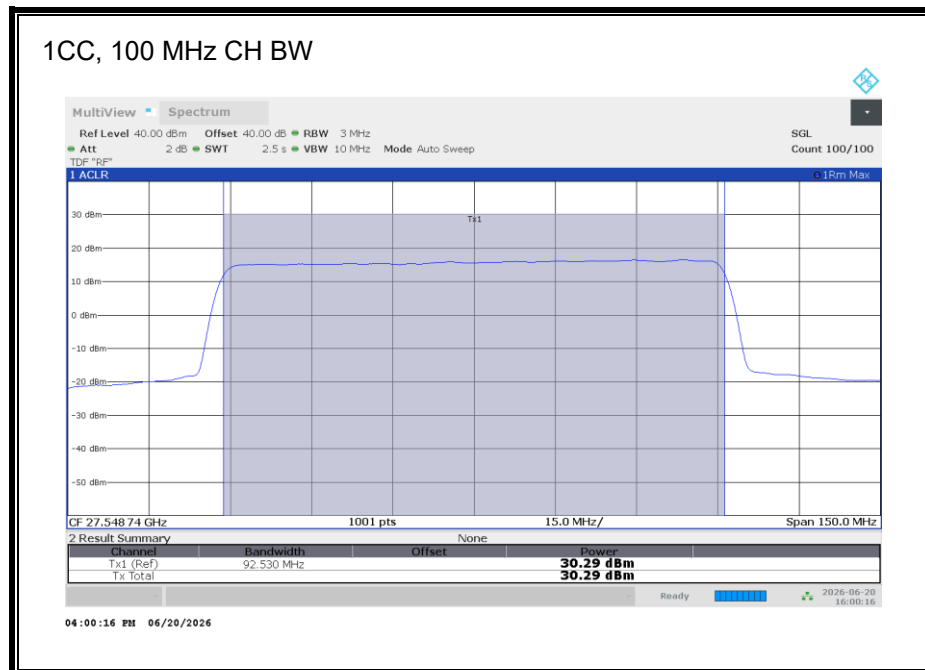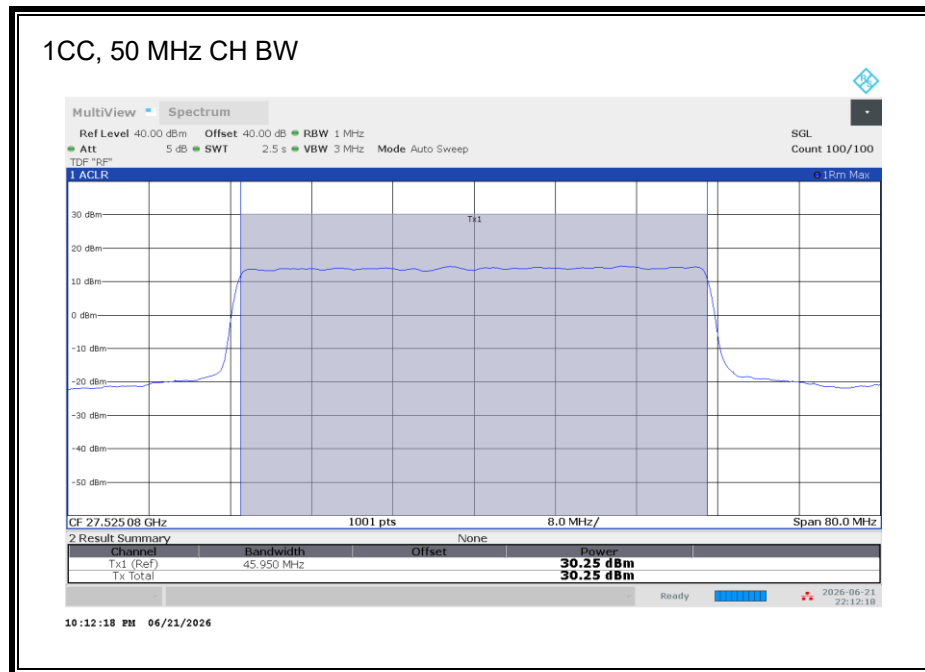



261, Full-RB, SISO-Dual, QPSK, Low-CH

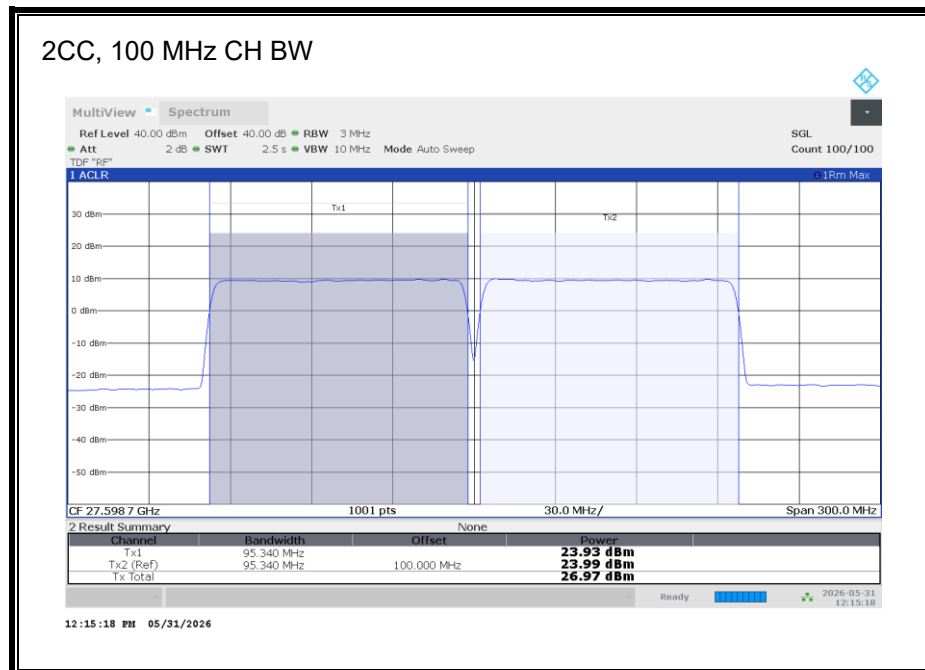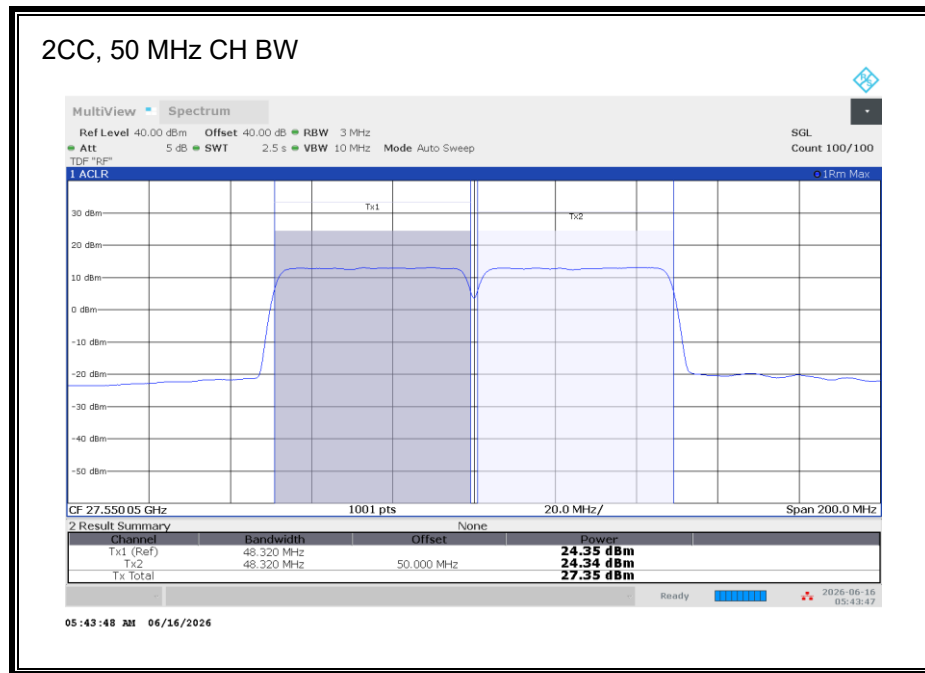

n261, Full-RB, SISO-Dual, QPSK, Low-CH

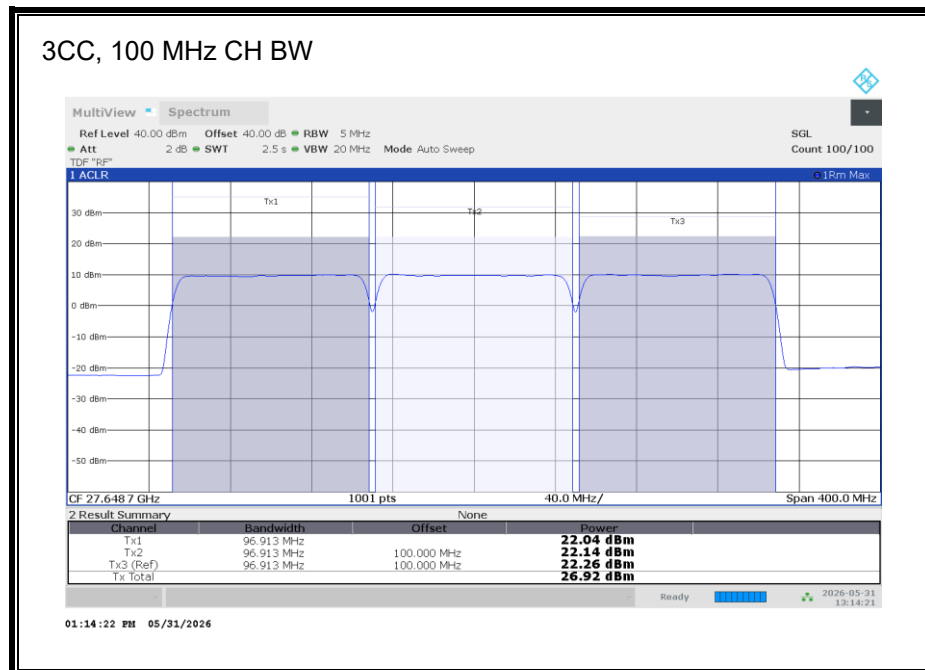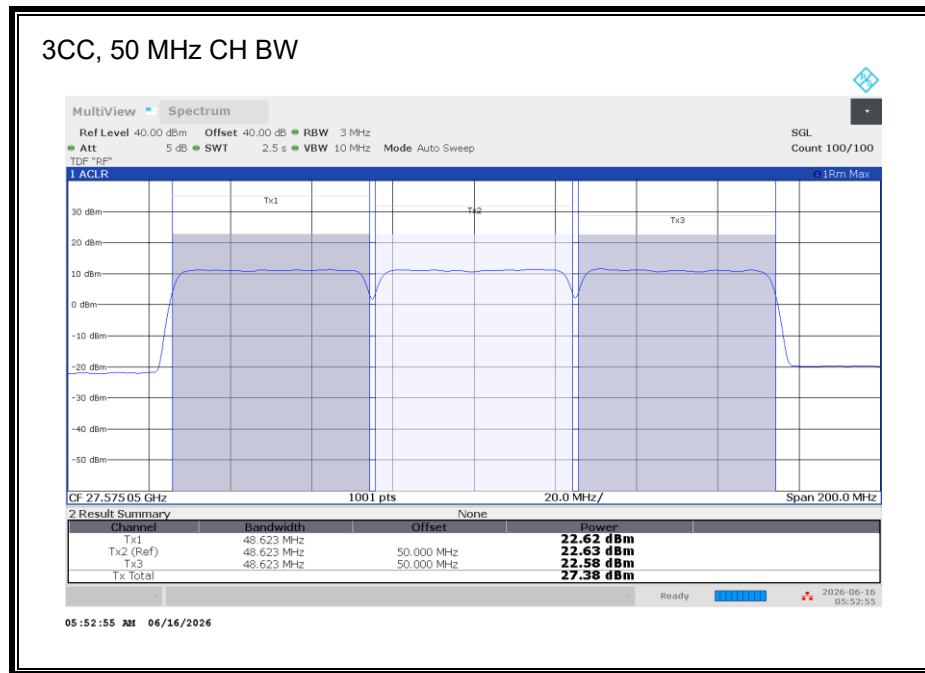

n261, Full-RB, SISO-Dual, QPSK, Low-CH

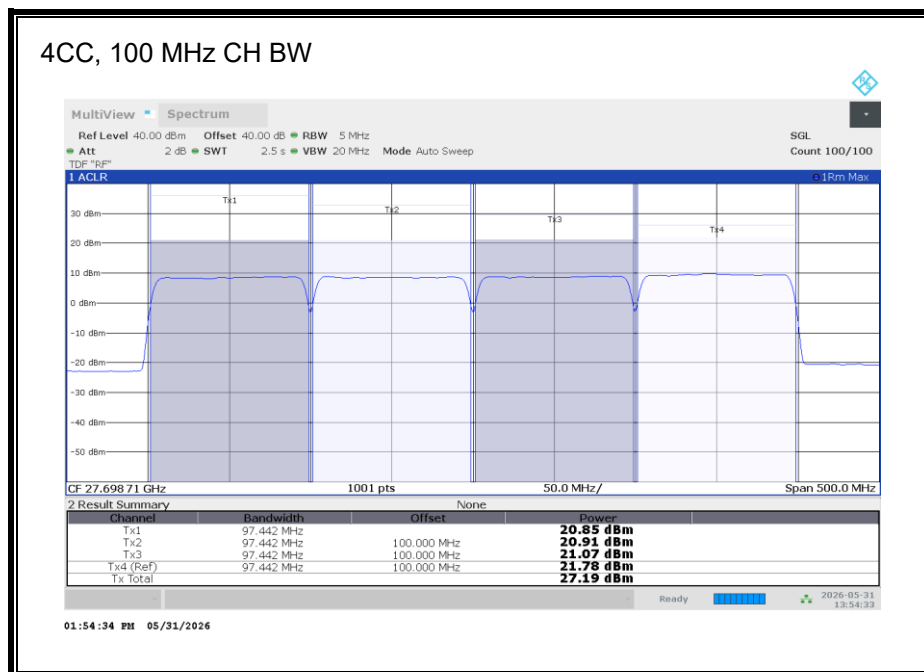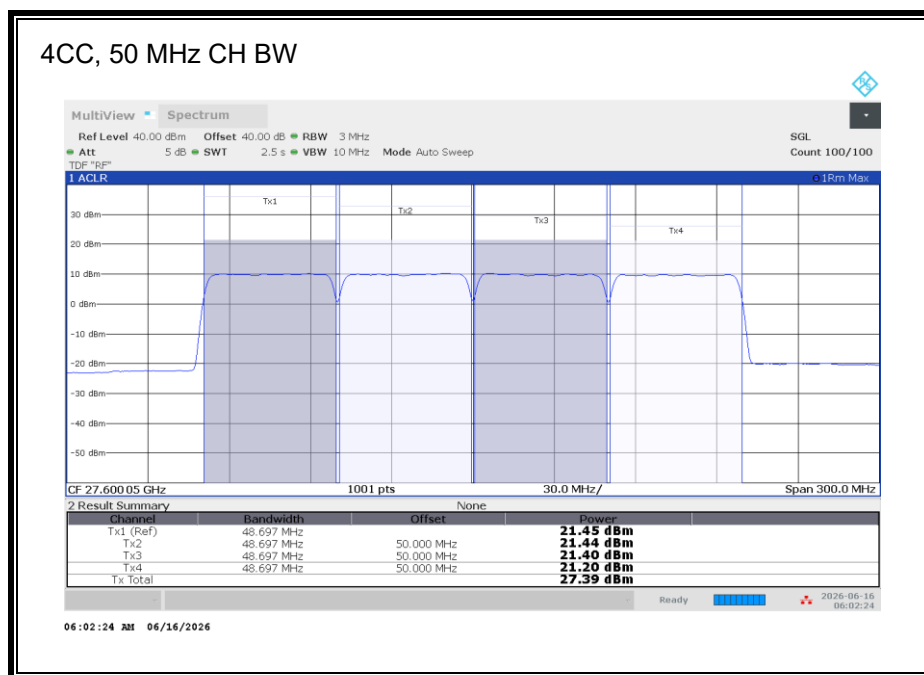

8.3.7. EIRP n260 STATE A

SISO

CCs Active	CH BW	Modulation	Channel	Frequency	Ant Pol	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)		(Size/Offset)	(dBm)	(dBm)	(dB)
1	100	QPSK	Mid	38.499	V	1/32	29.39	43	-13.61
2	100			38.449		1/32	22.72	43	-20.28
3	100			38.399		1/32	22.52	43	-20.48
4	100			38.349		1/32	22.38	43	-20.62



SISO-Dual

CCs Active	CH BW (MHz)	Modulation	Channel	Frequency (GHz)	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
1	100	Pi/2 BPSK	Mid	38.499	1/32	31.48	43	-11.52
		QPSK	Low	37.003	1/0	29.71	43	-13.29
				37.049	1/32	29.64	43	-13.36
			Mid	37.049	64/0	29.74	43	-13.26
				38.499	1/32	31.76	43	-11.24
			High	38.500	64/1	32.05	43	-10.95
				39.949	1/32	32.68	43	-10.32
				39.997	1/65	32.27	43	-10.73
				39.951	64/2	32.50	43	-10.50
		16QAM	Mid	38.499	1/32	30.60	43	-12.40
		64QAM		38.499	1/32	28.60	43	-14.40
2	100	Pi/2 BPSK	Mid	38.450	64/1	28.42	43	-14.58
		QPSK	Low	37.003	1/0	24.91	43	-18.09
				37.049	64/0	26.91	43	-16.09
			Mid	38.403	1/0	26.20	43	-16.80
				38.449	1/32	26.44	43	-16.56
			High	38.497	1/65	26.47	43	-16.53
				39.897	1/65	27.61	43	-15.39
				39.851	64/2	29.24	43	-13.76
				38.450	64/1	27.01	43	-15.99
		16QAM	Mid	38.450	64/1	24.33	43	-18.67
		64QAM		38.450	64/1	24.33	43	-18.67
3	100	Pi/2 BPSK	Mid	38.400	64/1	28.15	43	-14.85
		QPSK	Low	37.003	1/0	24.88	43	-18.12
				37.049	64/0	27.14	43	-15.86
			Mid	38.353	1/0	25.33	43	-17.67
				38.399	1/32	26.23	43	-16.77
			High	38.447	1/65	26.28	43	-16.72
				39.797	1/65	27.20	43	-15.80
				39.751	64/2	28.91	43	-14.09
				38.400	64/1	26.71	43	-16.29
		16QAM	Mid	38.400	64/1	24.00	43	-19.00
		64QAM	Mid	38.400	64/1	24.00	43	-19.00
4	100	Pi/2 BPSK	Mid	38.350	64/1	28.05	43	-14.95
		QPSK	Low	37.003	1/0	25.28	43	-17.72
				37.049	64/0	27.43	43	-15.57
			Mid	38.303	1/0	26.10	43	-16.90
				38.349	1/32	26.07	43	-16.93
			High	38.397	1/65	26.28	43	-16.72
				39.697	1/65	26.86	43	-16.14
				39.651	64/2	28.72	43	-14.28
				38.350	64/1	26.62	43	-16.38
		16QAM	Mid	38.350	64/1	23.96	43	-19.04
		64QAM	Mid	38.350	64/1	23.96	43	-19.04



MIMO

CCs Active	CH BW (MHz)	Modulation	Channel	Frequency (GHz)	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
1	100	QPSK	Low	37.050	66/0	27.11	43	-15.89
			Mid	38.501	1/33	27.21	43	-15.79
				38.500	66/0	26.94	43	-16.06
			High	39.950	66/0	27.69	43	-15.31
2	100	QPSK	Low	37.050	66/0	26.18	43	-16.82
			Mid	38.451	1/33	24.00	43	-19.00
				38.450	66/0	24.99	43	-18.01
			High	39.850	66/0	26.94	43	-16.06
3	100	QPSK	Low	37.050	66/0	26.43	43	-16.57
			Mid	38.401	1/33	23.91	43	-19.09
				38.400	66/0	24.67	43	-18.33
			High	39.750	66/0	26.83	43	-16.17
4	100	QPSK	Low	37.050	66/0	26.48	43	-16.52
			Mid	38.351	1/33	23.61	43	-19.39
				38.350	66/0	24.58	43	-18.42
			High	39.650	66/0	26.80	43	-16.20

n260, Full-RB, SISO-Dual, QPSK, Low-CH

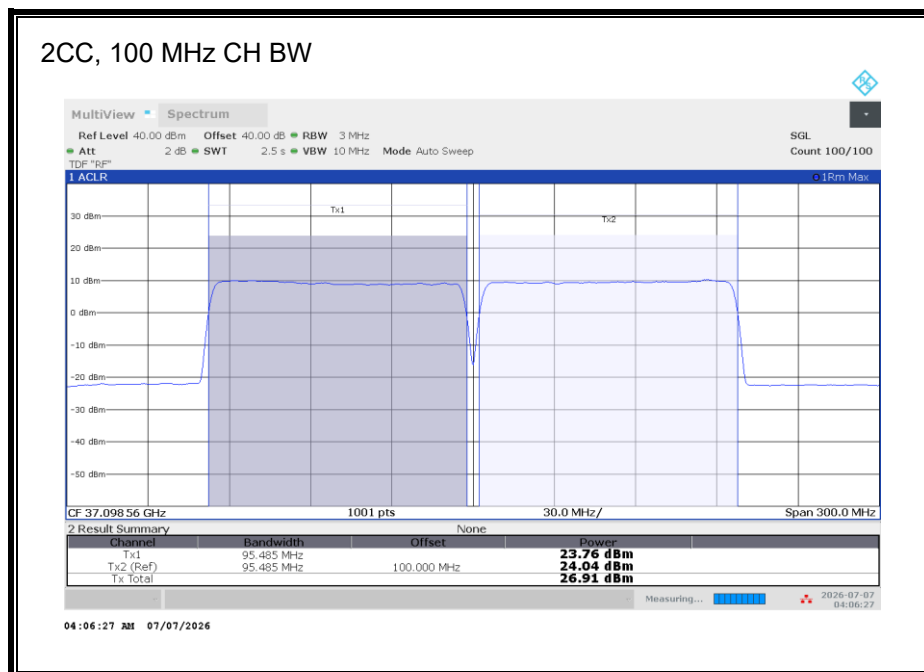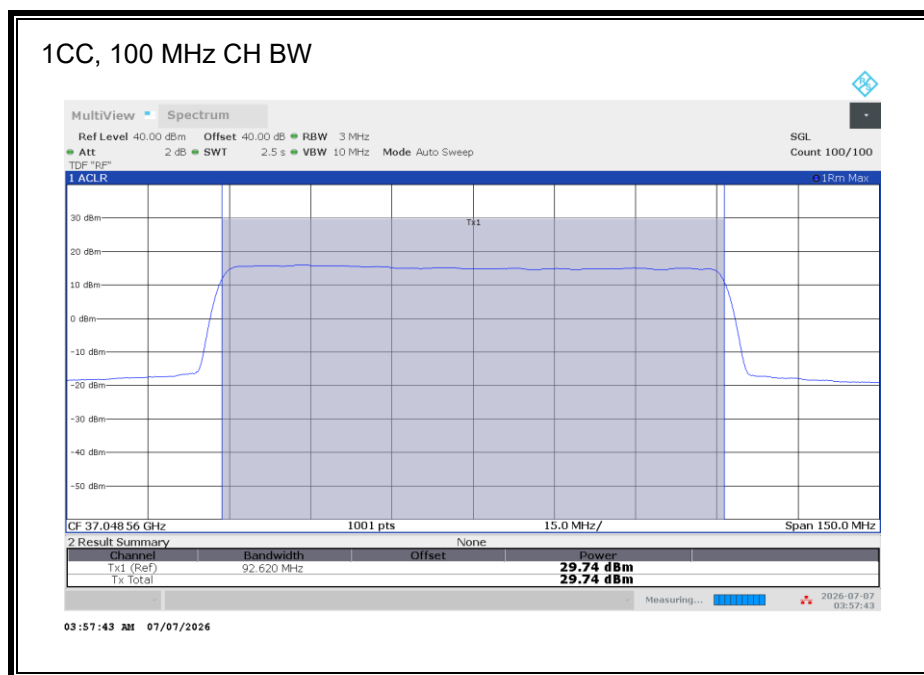

n260, Full-RB, SISO-Dual, QPSK, Low-CH

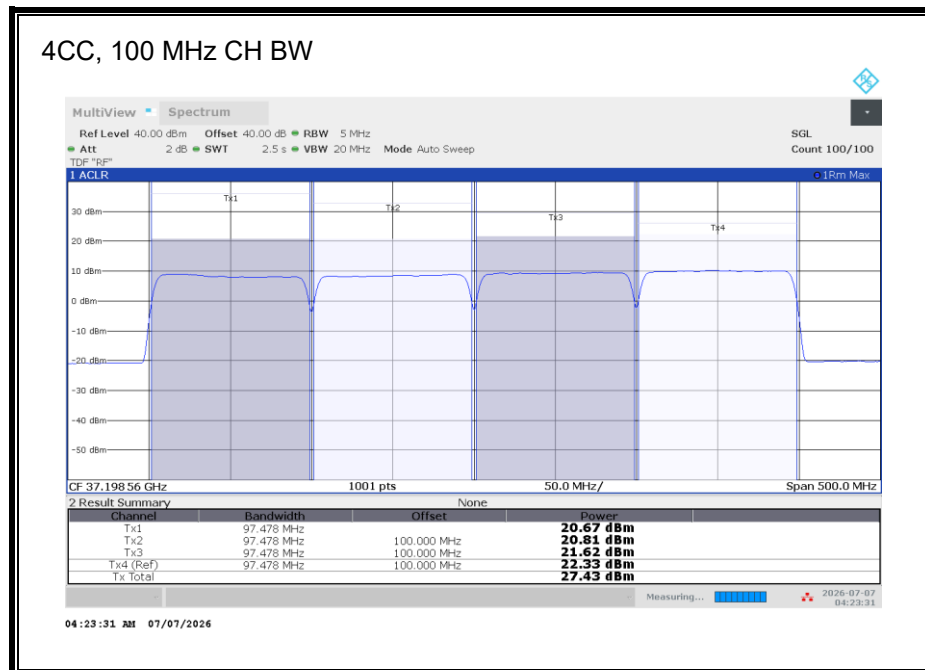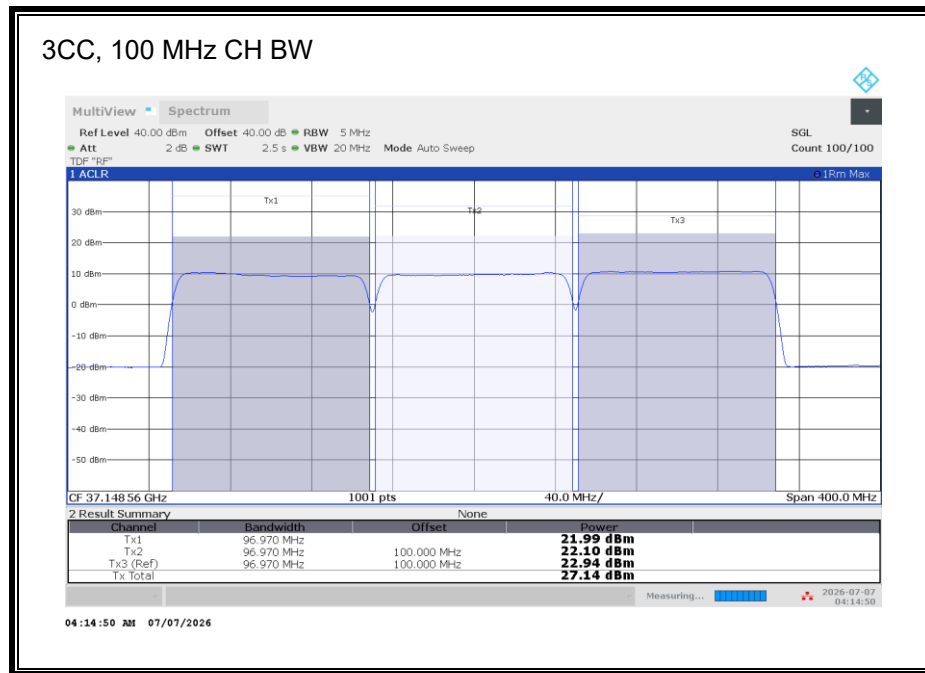

8.3.8. EIRP n260 STATE B

SISO

CCs Active	CH BW	Modulation	Channel	Frequency	Ant Pol	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)		(Size/Offset)	(dBm)	(dBm)	(dB)
1	100	QPSK	Mid	38.499	V	1/32	31.03	43	-11.97
2	100			38.449		1/32	24.52	43	-18.48
3	100			38.399		1/32	24.36	43	-18.64
4	100			38.349		1/32	24.16	43	-18.84



SISO-Dual

CCs Active	CH BW (MHz)	Modulation	Channel	Frequency (GHz)	RB (Size/Offset)	Avg EIRP (dBm)	Limit (dBm)	Margin (dB)
1	100	Pi/2 BPSK	Mid	38.499	1/32	31.02	43	-11.98
		QPSK	Low	37.003	1/0	30.51	43	-12.49
				37.049	1/32	30.22	43	-12.78
			Mid	37.049	64/0	30.35	43	-12.65
				38.499	1/32	31.05	43	-11.95
			High	38.500	64/1	31.16	43	-11.84
				39.949	1/32	32.88	43	-10.12
				39.997	1/65	32.41	43	-10.59
				39.951	64/2	32.86	43	-10.14
		16QAM	Mid	38.499	1/32	30.31	43	-12.69
		64QAM		38.499	1/32	28.39	43	-14.61
2	100	Pi/2 BPSK	Mid	38.450	64/1	28.81	43	-14.19
		QPSK	Low	37.003	1/0	25.63	43	-17.37
				37.049	64/0	27.49	43	-15.51
			Mid	38.403	1/0	26.74	43	-16.26
				38.449	1/32	27.44	43	-15.56
				38.497	1/65	26.17	43	-16.83
			High	39.897	1/65	27.74	43	-15.26
				39.851	64/2	29.64	43	-13.36
		16QAM	Mid	38.450	64/1	27.49	43	-15.51
		64QAM		38.450	64/1	24.74	43	-18.26
3	100	Pi/2 BPSK	Mid	38.400	64/1	28.56	43	-14.44
		QPSK	Low	37.003	1/0	25.62	43	-17.38
				37.049	64/0	27.60	43	-15.40
			Mid	38.353	1/0	26.63	43	-16.37
				38.399	1/32	27.17	43	-15.83
				38.447	1/65	26.16	43	-16.84
			High	39.797	1/65	27.50	43	-15.50
				39.751	64/2	29.40	43	-13.60
		16QAM	Mid	38.400	64/1	27.23	43	-15.77
		64QAM	Mid	38.400	64/1	24.46	43	-18.54
4	100	Pi/2 BPSK	Mid	38.350	64/1	28.47	43	-14.53
		QPSK	Low	37.003	1/0	25.86	43	-17.14
				37.049	64/0	27.79	43	-15.21
			Mid	38.303	1/0	26.54	43	-16.46
				38.349	1/32	27.04	43	-15.96
				38.397	1/65	26.26	43	-16.74
			High	39.697	1/65	27.06	43	-15.94
				39.651	64/2	29.24	43	-13.76
		16QAM	Mid	38.350	64/1	27.12	43	-15.88
		64QAM	Mid	38.350	64/1	24.38	43	-18.62



MIMO

CCs Active	CH BW	Modulation	Channel	Frequency	RB	Avg EIRP	Limit	Margin
	(MHz)			(GHz)	(Size/Offset)	(dBm)	(dBm)	(dB)
1	100	QPSK	Low	37.050	66/0	28.11	43	-14.89
			Mid	38.501	1/33	27.87	43	-15.13
				38.500	66/0	27.25	43	-15.75
			High	39.950	66/0	26.81	43	-16.19
2	100	QPSK	Low	37.050	66/0	27.24	43	-15.76
			Mid	38.451	1/33	24.49	43	-18.51
				38.450	66/0	26.31	43	-16.69
			High	39.850	66/0	26.06	43	-16.94
3	100	QPSK	Low	37.050	66/0	27.13	43	-15.87
			Mid	38.401	1/33	24.27	43	-18.73
				38.400	66/0	26.03	43	-16.97
			High	39.750	66/0	26.00	43	-17.00
4	100	QPSK	Low	37.050	66/0	27.23	43	-15.77
			Mid	38.351	1/33	23.97	43	-19.03
				38.350	66/0	25.95	43	-17.05
			High	39.650	66/0	25.99	43	-17.01

n260, Full-RB, SISO-Dual, QPSK, Low-CH

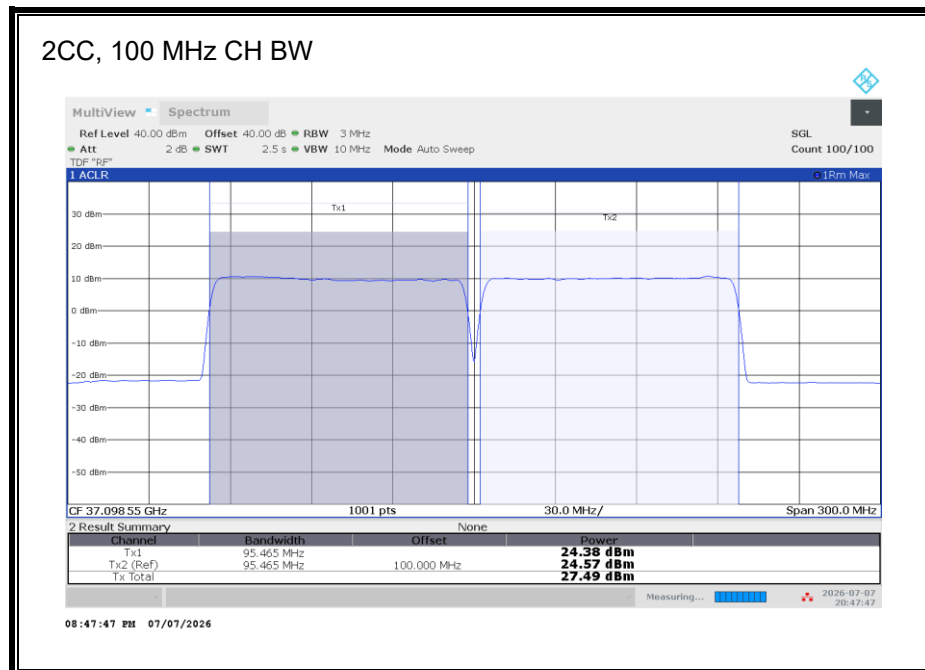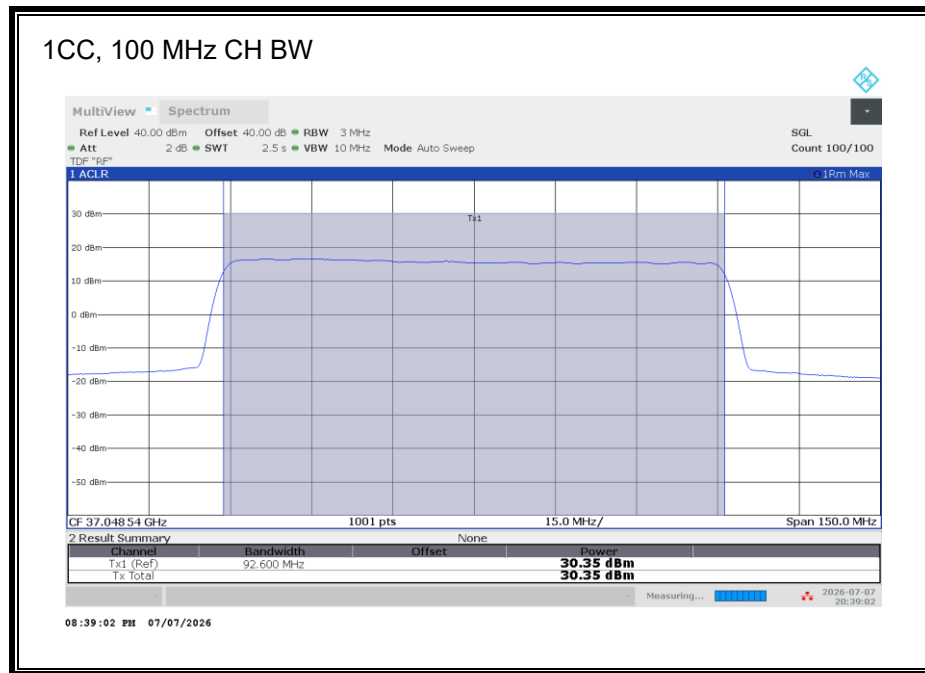

n260, Full-RB, SISO-Dual, QPSK, Low-CH

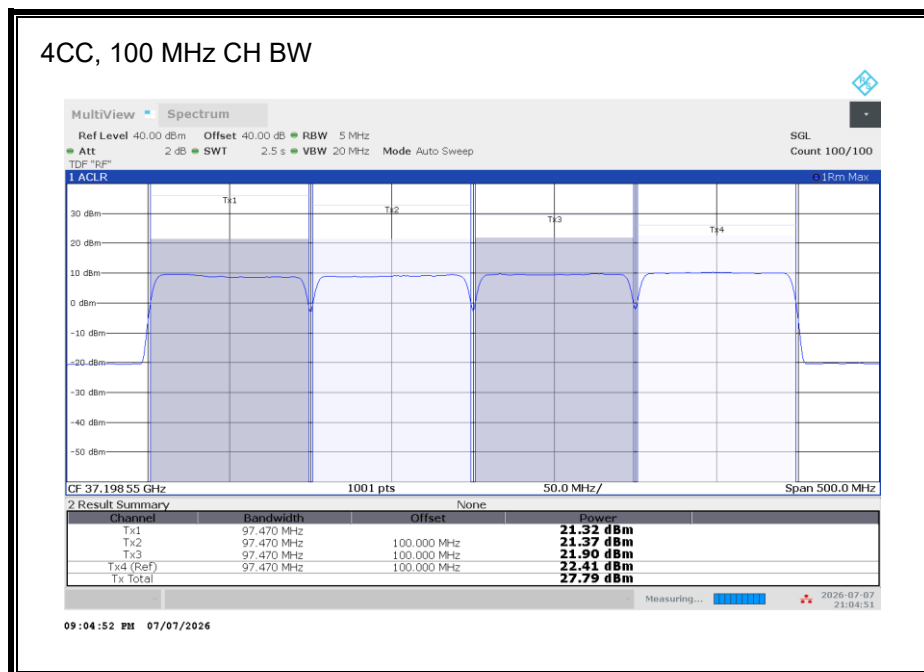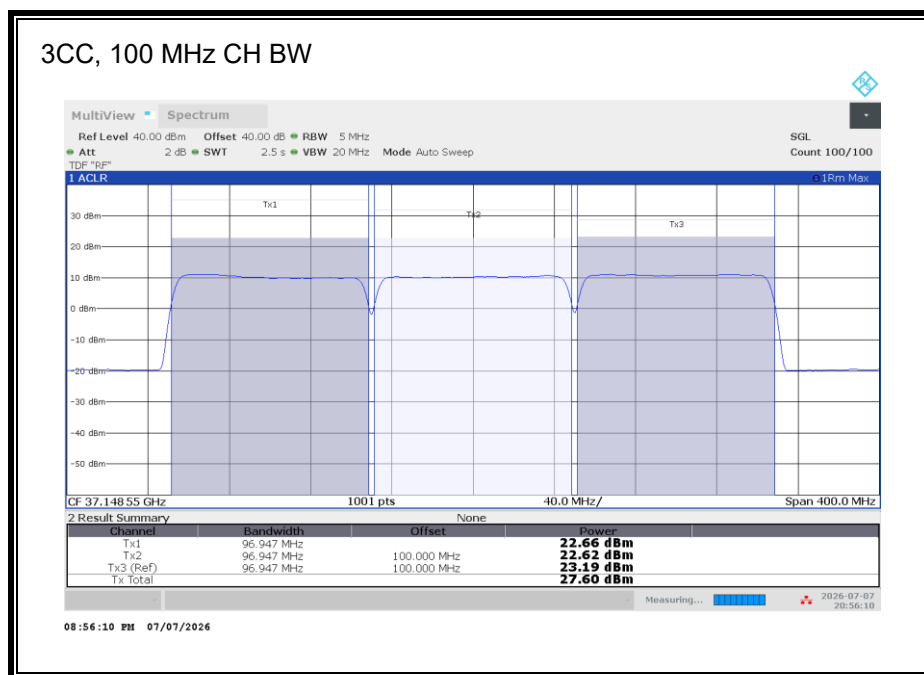

8.4. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §2.1051, §30.203

LIMITS

30.203 (a) - The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

TEST PROCEDURE

- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Number of measurement points in sweep $\geq 2 \times$ span / RBW
- Sweep Time = transmission duration / $2 \times$ number of measurement points
- Detection = power averaging (rms)
- Set sweep trigger to "free run."
- Trace Mode = max old
- Allow trace to fully stabilize

KDB 842590 D01 Upper Microwave Flexible Use Service v01r03 Section 4.4.2
ANSI C63.26-2015 Clause 5.2, Clause 5.5, Clause 6.4, and Annex C.5.2

All Band Edge emissions were measured as EIRP compared with the §30.203 TRP limits to demonstrate compliance.

Band Edge measurements of variable frequency bands were performed at the far field test distance listed on Section 5.

EIRP was calculated using the equations on ANSI C63.26-2015 Annex C.5.2. The total correction factors of horn antenna gain, cable loss and far-field path loss were calculated using equations C.8 and C.9, and pre-loaded into spectrum analyzer. The tabulated data factors in the EUT antenna gain to calculate the Final Adjusted EIRP of BE emissions.

Sample calculation of EIRP:

$$\begin{aligned}\text{Total Correction Factor} &= \text{Cable Loss (dB)} - \text{Horn Ant Gain (dBi)} + \text{Path Loss (dB)} \\ &= 4 - 23 + 71 \\ &= 52 \text{ dB}\end{aligned}$$

EIRP on Display Plot = P_{measured} (dBm), where Correction Factor preloaded.

In order to properly display the signal level on the plots, the pre-loaded correction factors were intentionally lowered by 40 dB and an offset factor of 40 dB was applied on spectrum analyzer to compensate for the true correction factors across the frequency range of measurement.

Pi/2 BPSK, QPSK, 16QAM and 64QAM modulations were all investigated in SISO-Dual mode, since the highest band edge emissions were for the SISO-Dual antenna configuration, consistent with this configuration also having the highest EIRP. The SISO-Dual mode was, therefore, used for the final band-edge measurements to represent worse case of both SISO-Dual and SISO modes. Additional

measurements were made with QPSK modulation on the MIMO mode as it has a wider bandwidth than the SISO-Dual mode. Both Single RB (highest power) and Full RB allocations were measured.

Band edge measurements for multi-carrier (2CC - 4CC) QPSK modulated operations Single RB and Full RB allocations were investigated in each carrier in the (50 MHz + 50 MHz) and (100 MHz + 100 MHz) modes. Note that inter-modulation products which can be seen in the band edge plots are evaluated as part of the radiated spurious emission measurements.

The 1CC to 4CC plots of worst-case SISO-Dual and MIMO, QPSK of both channel bandwidths are provided to demonstrate the test parameter setting on signal analyzer. The tabular data includes the final adjusted EIRP results of the QPSK, Pi/2 BPSK, 16QAM and 64QAM modulations.

RESULTS

See the following pages.


Employee IDs: 19459, 24303, 27294, 27780, 31925, 32226, 103479

Test Dates: 2026-05-22 to 2026-06-21

Test Locations: 01-mmW-A, -B, -C & -D


8.4.1. BAND EDGE n258 SB1 SISO-DUAL 1CC STATE A

100 MHz, SISO-DUAL, 1CC, QPSK

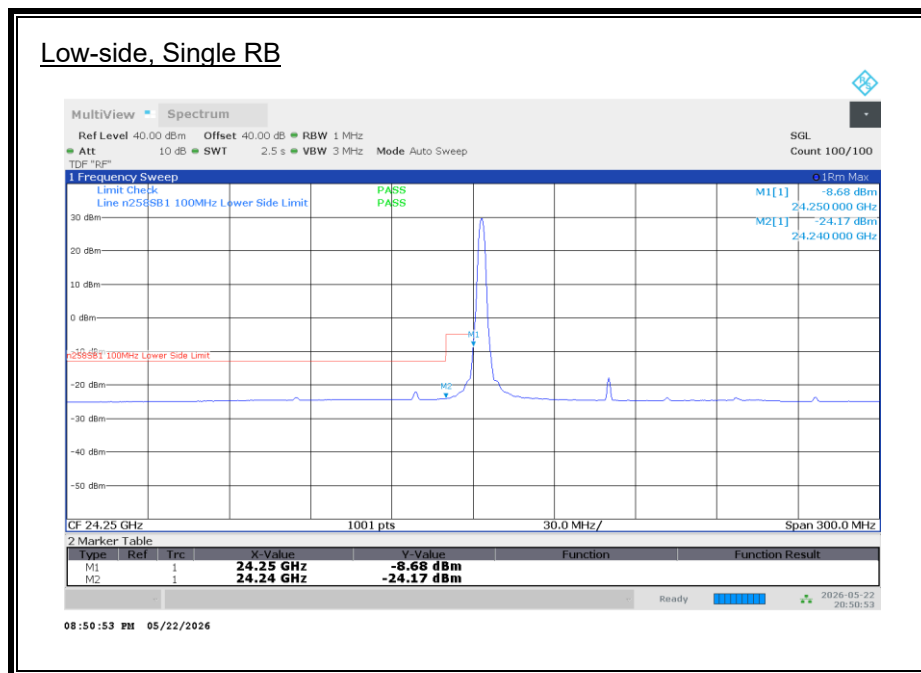


100 MHz, SISO-DUAL, 1CC, QPSK

High-side, Single RB

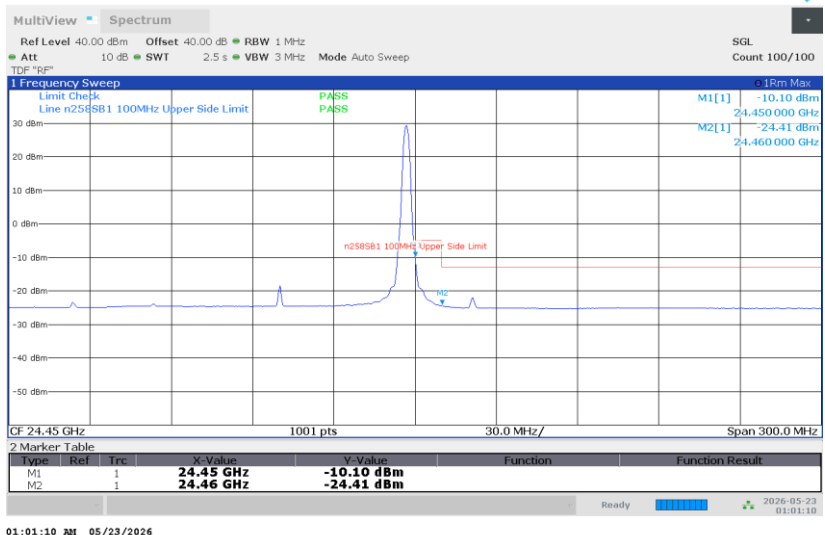

High-side, Full RB

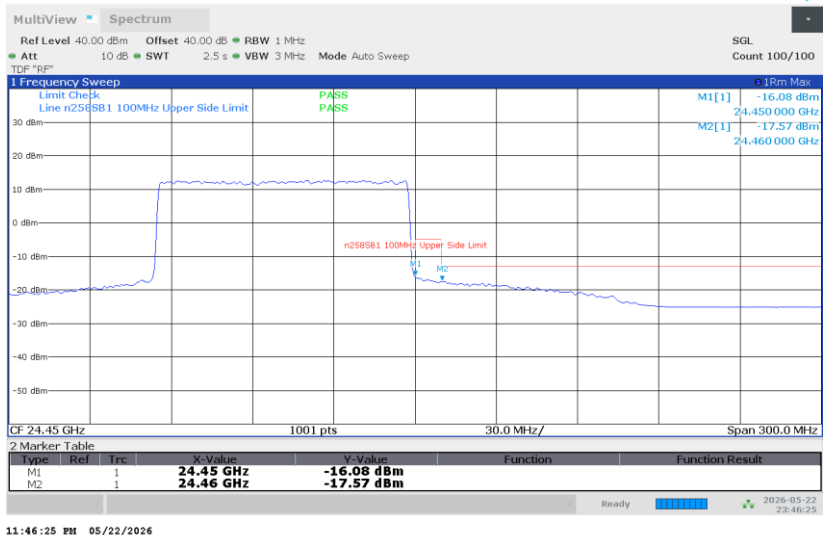

100 MHz, SISO-DUAL, 1CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-8.68	-5.00	-3.68
			24.24	-24.17	-13.00	-11.17
	L	64/0	24.25	-17.95	-5.00	-12.95
			24.24	-19.51	-13.00	-6.51
	H	1/65	24.45	-10.10	-5.00	-5.10
			24.46	-24.41	-13.00	-11.41
	H	64/2	24.45	-16.08	-5.00	-11.08
			24.46	-17.57	-13.00	-4.57

100 MHz, SISO-DUAL, 1CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-9.65	-5.00	-4.65
			24.24	-24.01	-13.00	-11.01
	L	64/0	24.25	-19.51	-5.00	-14.51
			24.24	-22.06	-13.00	-9.06
	H	1/65	24.45	-10.45	-5.00	-5.45
			24.46	-24.54	-13.00	-11.54
	H	64/2	24.45	-17.85	-5.00	-12.85
			24.46	-20.45	-13.00	-7.45

100 MHz, SISO-DUAL, 1CC, 16QAM

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-9.92	-5.00	-4.92
			24.24	-24.20	-13.00	-11.20
	L	64/0	24.25	-20.36	-5.00	-15.36
			24.24	-21.24	-13.00	-8.24
	H	1/65	24.45	-11.31	-5.00	-6.31
			24.46	-24.59	-13.00	-11.59
	H	64/2	24.45	-18.59	-5.00	-13.59
			24.46	-19.28	-13.00	-6.28

100 MHz, SISO-DUAL, 1CC, 64QAM

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-12.15	-5.00	-7.15
			24.24	-24.32	-13.00	-11.32
	L	64/0	24.25	-22.63	-5.00	-17.63
			24.24	-23.67	-13.00	-10.67
	H	1/65	24.45	-12.02	-5.00	-7.02
			24.46	-24.79	-13.00	-11.79
	H	64/2	24.45	-22.48	-5.00	-17.48
			24.46	-23.93	-13.00	-10.93


8.4.2. BAND EDGE n258 SB1 SISO-DUAL 2CC STATE A

100 MHz, SISO-DUAL, 2CC, QPSK




100 MHz, SISO-DUAL, 2CC, QPSK

High-side, Single RB

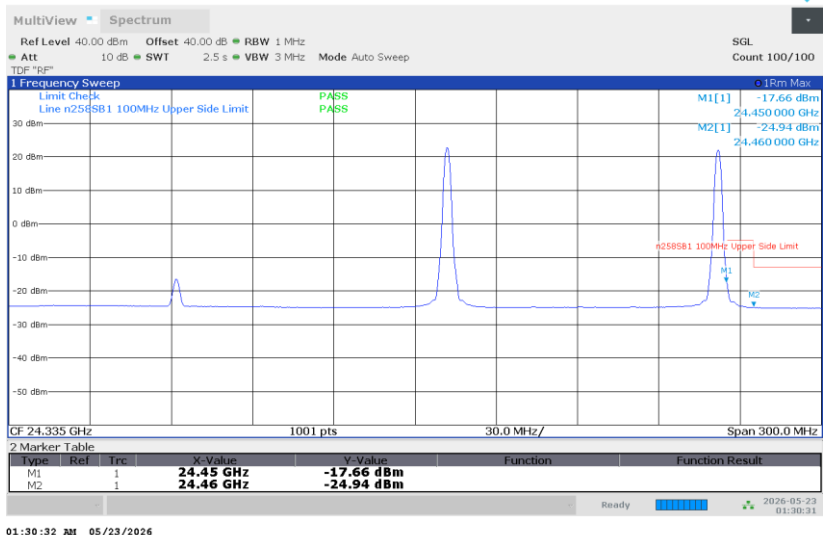

High-side, Full RB

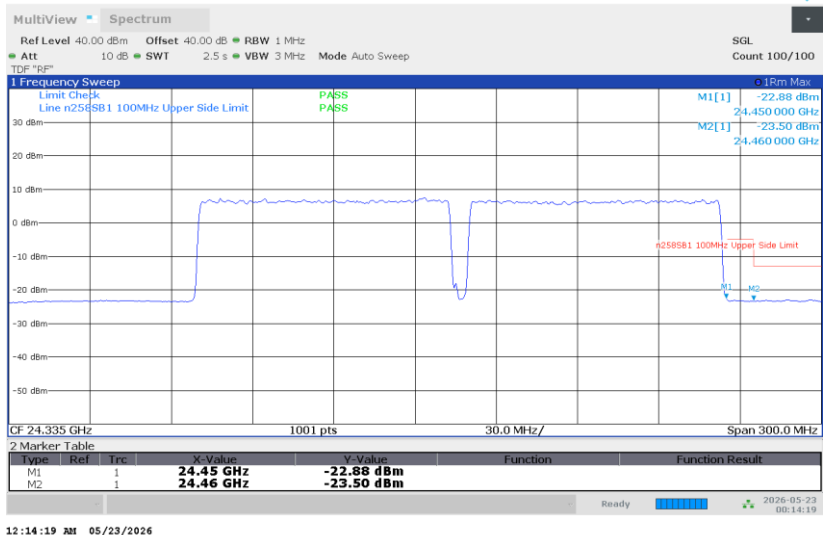

100 MHz, SISO-DUAL, 2CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-16.51	-5.00	-11.51
			24.24	-24.51	-13.00	-11.51
	L	64/0	24.25	-23.42	-5.00	-18.42
			24.24	-23.85	-13.00	-10.85
	H	1/65	24.45	-17.66	-5.00	-12.66
			24.46	-24.94	-13.00	-11.94
	H	64/2	24.45	-22.88	-5.00	-17.88
			24.46	-23.50	-13.00	-10.50

100 MHz, SISO-DUAL, 2CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-17.08	-5.00	-12.08
			24.24	-24.51	-13.00	-11.51
	L	64/0	24.25	-23.56	-5.00	-18.56
			24.24	-24.06	-13.00	-11.06
	H	1/65	24.45	-17.81	-5.00	-12.81
			24.46	-25.03	-13.00	-12.03
	H	64/2	24.45	-23.24	-5.00	-18.24
			24.46	-24.03	-13.00	-11.03

100 MHz, SISO-DUAL, 2CC, 16QAM

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-17.23	-5.00	-12.23
			24.24	-24.47	-13.00	-11.47
	L	64/0	24.25	-23.80	-5.00	-18.80
			24.24	-24.08	-13.00	-11.08
	H	1/65	24.45	-17.88	-5.00	-12.88
			24.46	-25.03	-13.00	-12.03
	H	64/2	24.45	-23.82	-5.00	-18.82
			24.46	-24.48	-13.00	-11.48


100 MHz, SISO-DUAL, 2CC, 64QAM

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-18.66	-5.00	-13.66
			24.24	-24.53	-13.00	-11.53
	L	64/0	24.25	-24.26	-5.00	-19.26
			24.24	-24.41	-13.00	-11.41
	H	1/65	24.45	-18.61	-5.00	-13.61
			24.46	-25.05	-13.00	-12.05
	H	64/2	24.45	-24.52	-5.00	-19.52
			24.46	-24.94	-13.00	-11.94


8.4.3. BAND EDGE n258 SB1 SISO-DUAL 1CC STATE B

100 MHz, SISO-DUAL, 1CC, QPSK

Low-side, Single RB

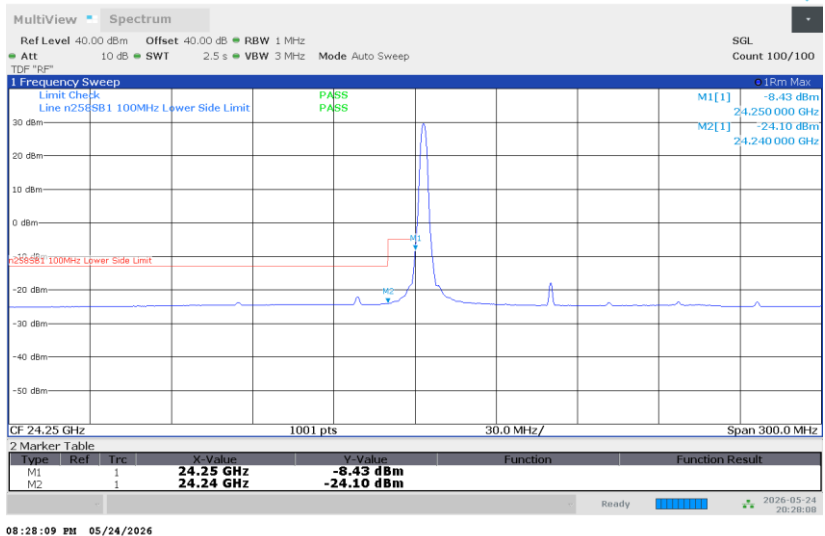


Low-side, Full RB

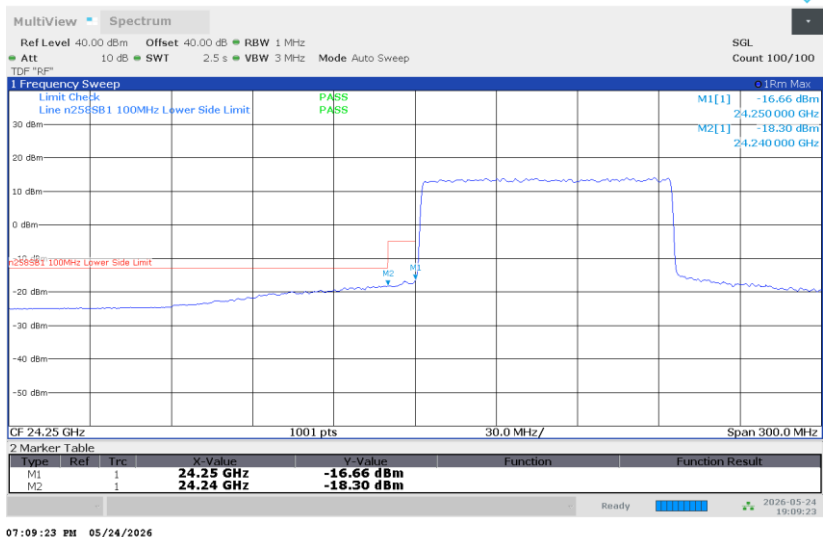


100 MHz, SISO-DUAL, 1CC, QPSK

High-side, Single RB

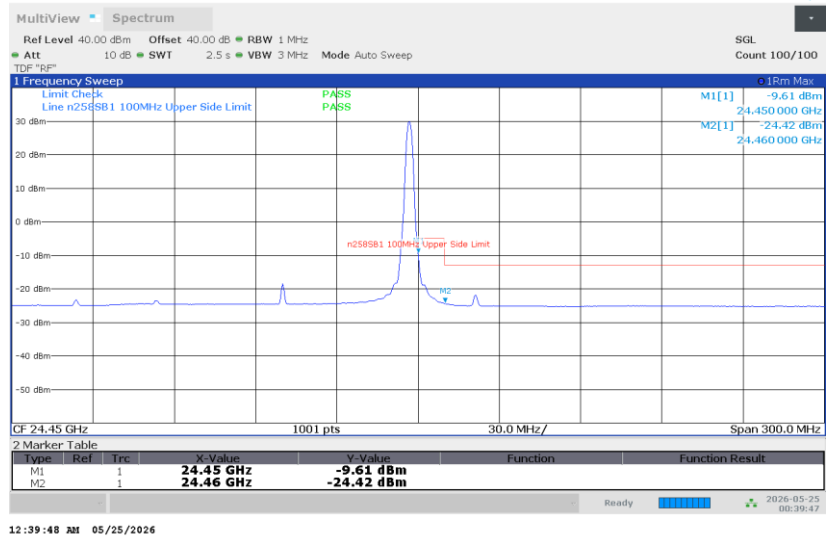

High-side, Full RB

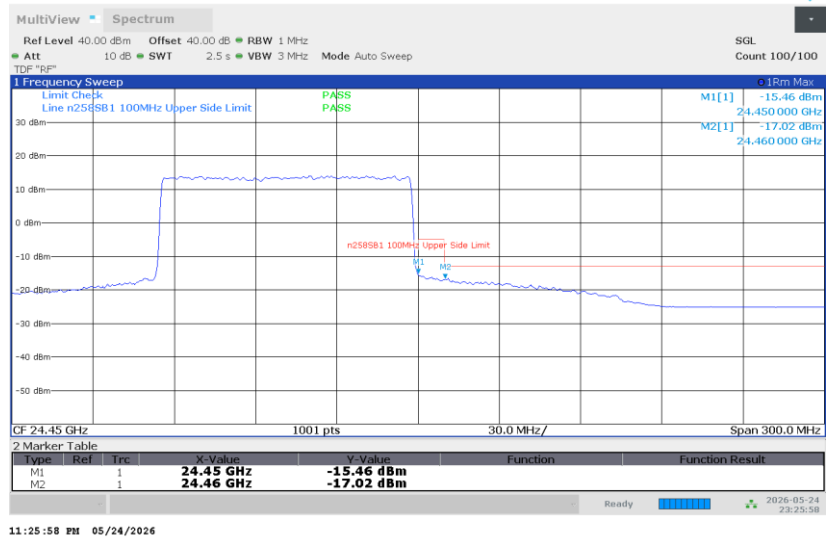

100 MHz, SISO-DUAL, 1CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-8.43	-5.00	-3.43
			24.24	-24.10	-13.00	-11.10
	L	64/0	24.25	-16.66	-5.00	-11.66
			24.24	-18.30	-13.00	-5.30
	H	1/65	24.45	-9.61	-5.00	-4.61
			24.46	-24.42	-13.00	-11.42
	H	64/2	24.45	-15.46	-5.00	-10.46
			24.46	-17.02	-13.00	-4.02

100 MHz, SISO-DUAL, 1CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-9.61	-5.00	-4.61
			24.24	-23.99	-13.00	-10.99
	L	64/0	24.25	-18.30	-5.00	-13.30
			24.24	-21.29	-13.00	-8.29
	H	1/65	24.45	-9.71	-5.00	-4.71
			24.46	-24.50	-13.00	-11.50
	H	64/2	24.45	-17.41	-5.00	-12.41
			24.46	-20.42	-13.00	-7.42

100 MHz, SISO-DUAL, 1CC, 16QAM

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-9.86	-5.00	-4.86
			24.24	-24.17	-13.00	-11.17
	L	64/0	24.25	-19.28	-5.00	-14.28
			24.24	-20.41	-13.00	-7.41
	H	1/65	24.45	-10.70	-5.00	-5.70
			24.46	-24.44	-13.00	-11.44
	H	64/2	24.45	-18.25	-5.00	-13.25
			24.46	-19.37	-13.00	-6.37


100 MHz, SISO-DUAL, 1CC, 64QAM

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-12.06	-5.00	-7.06
			24.24	-24.30	-13.00	-11.30
	L	64/0	24.25	-21.97	-5.00	-16.97
			24.24	-23.26	-13.00	-10.26
	H	1/65	24.45	-11.29	-5.00	-6.29
			24.46	-24.68	-13.00	-11.68
	H	64/2	24.45	-22.07	-5.00	-17.07
			24.46	-23.84	-13.00	-10.84

8.4.4. BAND EDGE n258 SB1 SISO-DUAL 2CC STATE B

100 MHz, SISO-DUAL, 2CC, QPSK

Low-side, Single RB

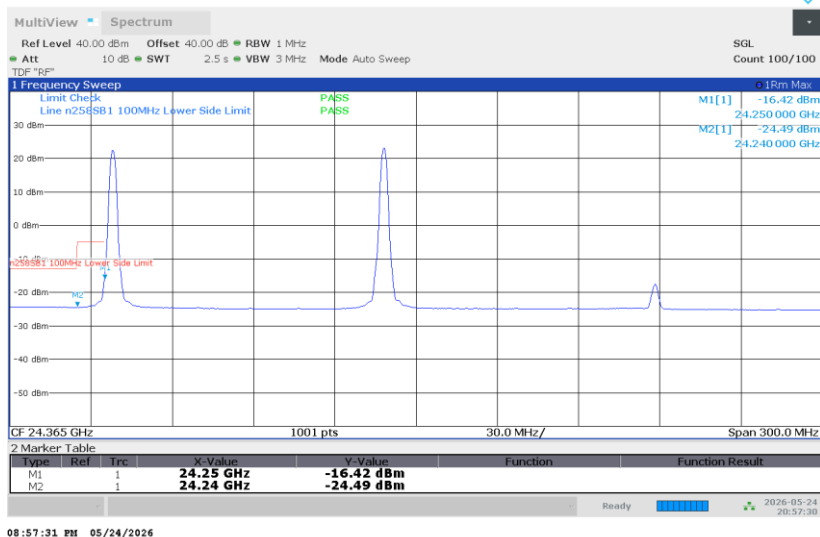


Low-side, Full RB




100 MHz, SISO-DUAL, 2CC, QPSK

High-side, Single RB

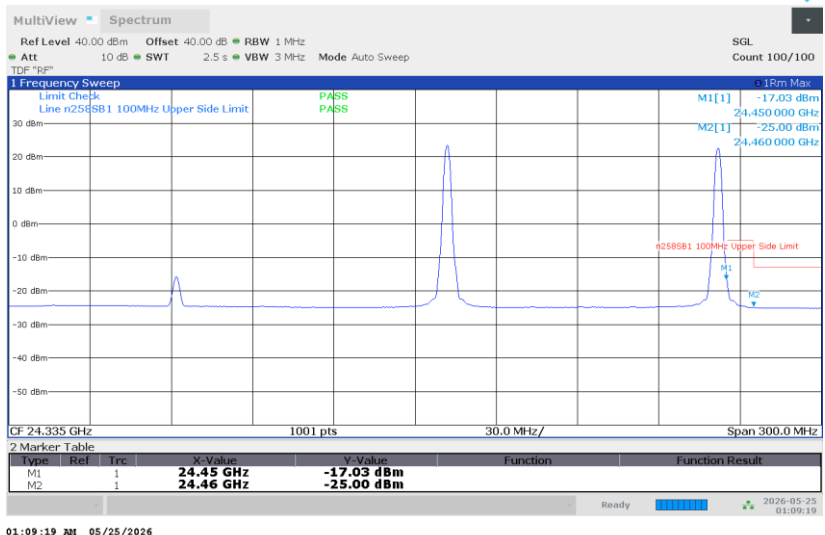

High-side, Full RB

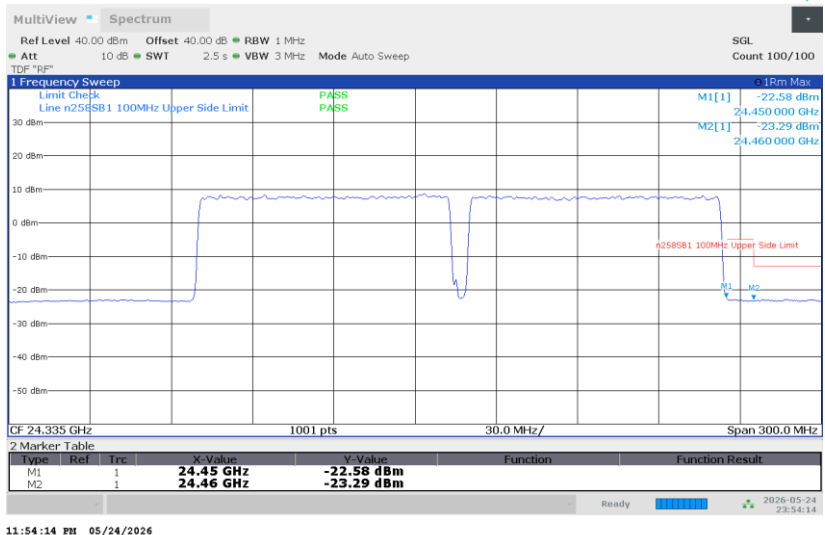

100 MHz, SISO-DUAL, 2CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-16.42	-5.00	-11.42
			24.24	-24.49	-13.00	-11.49
	L	64/0	24.25	-22.80	-5.00	-17.80
			24.24	-23.50	-13.00	-10.50
	H	1/65	24.45	-17.03	-5.00	-12.03
			24.46	-25.00	-13.00	-12.00
	H	64/2	24.45	-22.58	-5.00	-17.58
			24.46	-23.29	-13.00	-10.29

100 MHz, SISO-DUAL, 2CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-17.01	-5.00	-12.01
			24.24	-24.48	-13.00	-11.48
	L	64/0	24.25	-23.08	-5.00	-18.08
			24.24	-23.74	-13.00	-10.74
	H	1/65	24.45	-17.35	-5.00	-12.35
			24.46	-24.97	-13.00	-11.97
	H	64/2	24.45	-22.82	-5.00	-17.82
			24.46	-23.90	-13.00	-10.90

100 MHz, SISO-DUAL, 2CC, 16QAM



BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-17.13	-5.00	-12.13
			24.24	-24.50	-13.00	-11.50
	L	64/0	24.25	-23.43	-5.00	-18.43
			24.24	-23.85	-13.00	-10.85
	H	1/65	24.45	-17.45	-5.00	-12.45
			24.46	-24.91	-13.00	-11.91
	H	64/2	24.45	-23.65	-5.00	-18.65
			24.46	-24.33	-13.00	-11.33

100 MHz, SISO-DUAL, 2CC, 64QAM

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-18.57	-5.00	-13.57
			24.24	-24.54	-13.00	-11.54
	L	64/0	24.25	-24.04	-5.00	-19.04
			24.24	-24.26	-13.00	-11.26
	H	1/65	24.45	-18.10	-5.00	-13.10
			24.46	-25.04	-13.00	-12.04
	H	64/2	24.45	-24.38	-5.00	-19.38
			24.46	-24.93	-13.00	-11.93


8.4.5. BAND EDGE n258 SB1 MIMO 1CC STATE A

100 MHz, MIMO, 1CC, QPSK

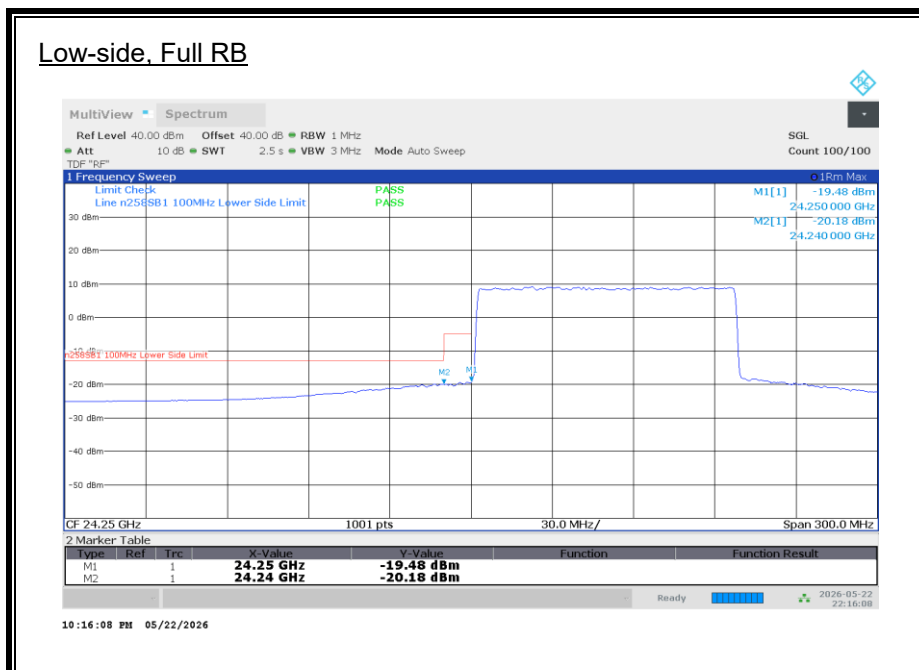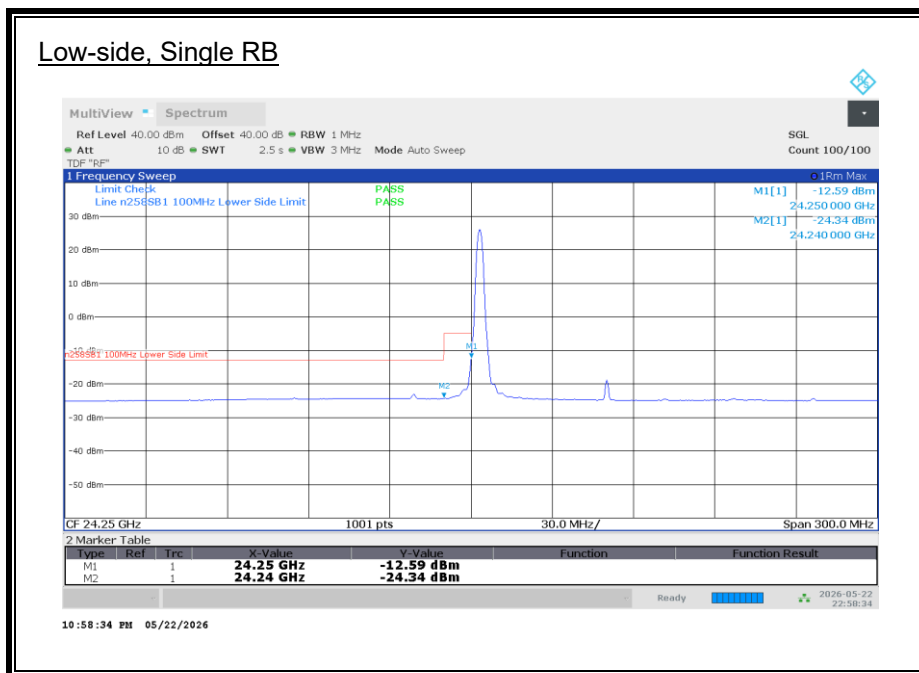


100 MHz, MIMO, 1CC, QPSK

High-side, Single RB

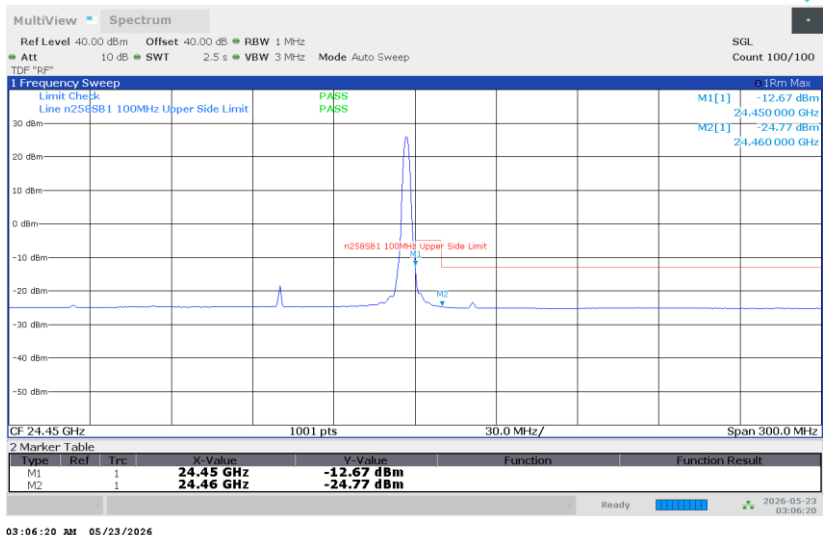

High-side, Full RB

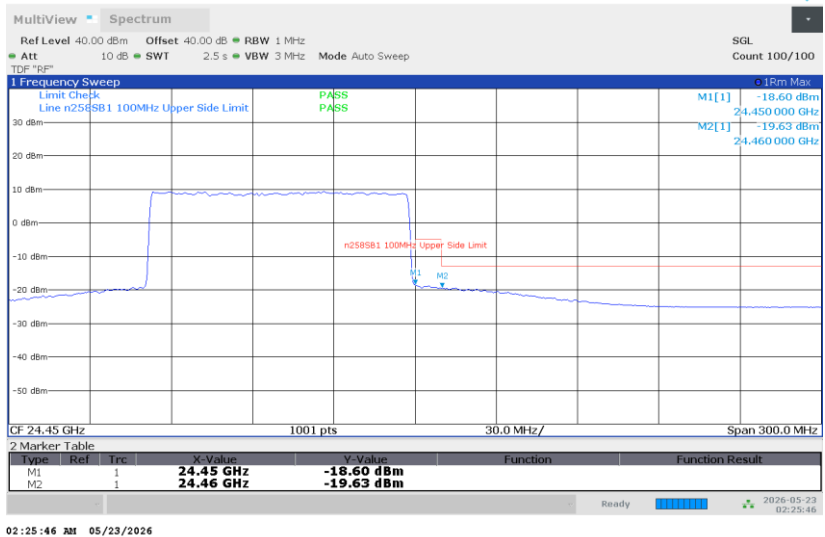


100 MHz, MIMO, 1CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-12.59	-5.00	-7.59
			24.24	-24.34	-13.00	-11.34
	L	66/0	24.25	-19.48	-5.00	-14.48
			24.24	-20.18	-13.00	-7.18
	H	1/65	24.45	-12.67	-5.00	-7.67
			24.46	-24.77	-13.00	-11.77
	H	66/0	24.45	-18.60	-5.00	-13.60
			24.46	-19.63	-13.00	-6.63


8.4.6. BAND EDGE n258 SB1 MIMO 2CC STATE A

100 MHz, MIMO, 2CC, QPSK

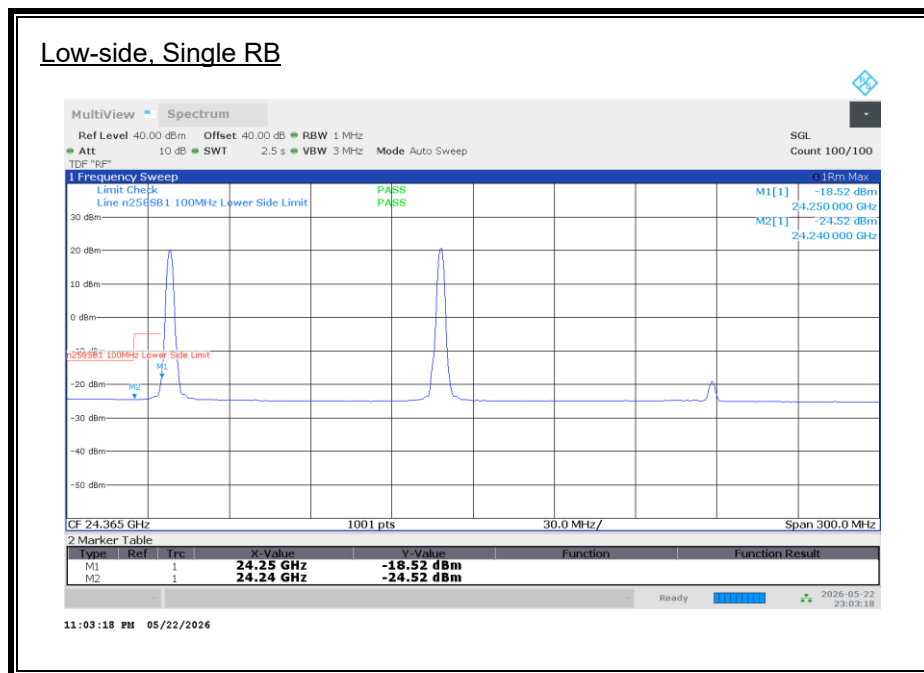

100 MHz, MIMO, 2CC, QPSK

High-side, Single RB

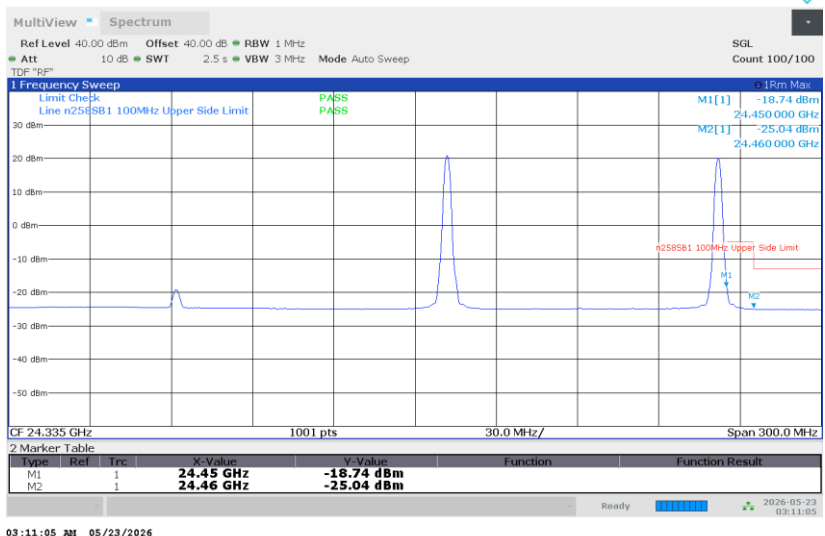

High-side, Full RB





100 MHz, MIMO, 2CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-18.52	-5.00	-13.52
			24.24	-24.52	-13.00	-11.52
	L	66/0	24.25	-22.92	-5.00	-17.92
			24.24	-23.17	-13.00	-10.17
	H	1/65	24.45	-18.74	-5.00	-13.74
			24.46	-25.04	-13.00	-12.04
	H	66/0	24.45	-22.46	-5.00	-17.46
			24.46	-22.84	-13.00	-9.84


8.4.7. BAND EDGE n258 SB1 MIMO 1CC STATE B

100 MHz, MIMO, 1CC, QPSK

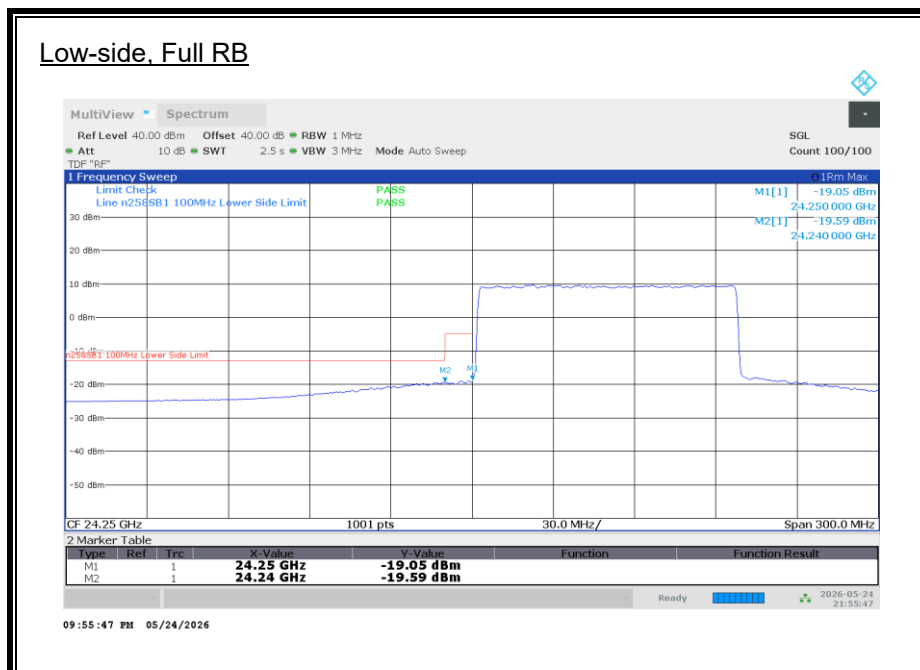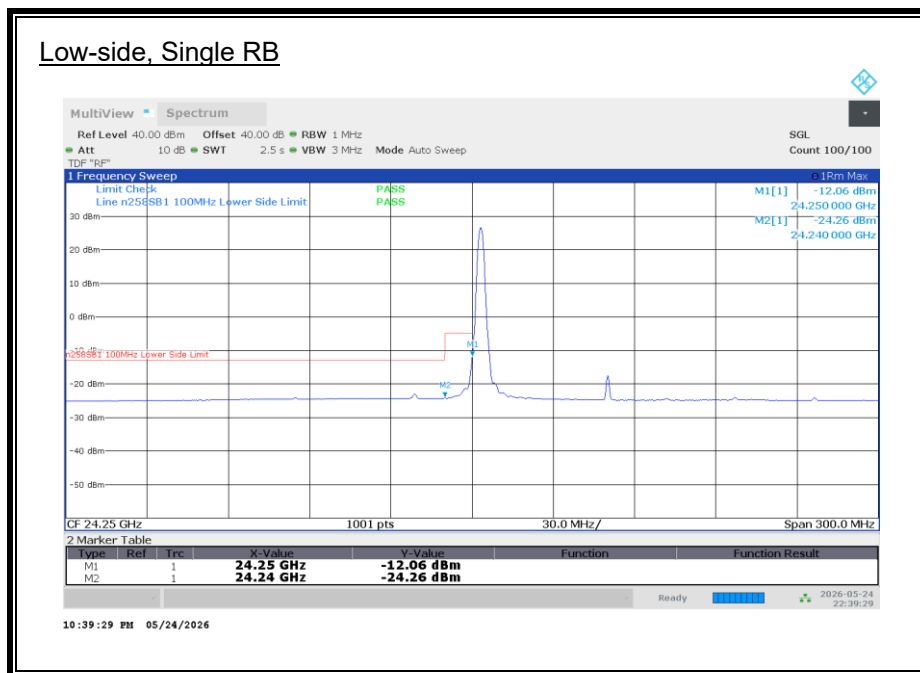


100 MHz, MIMO, 1CC, QPSK

High-side, Single RB

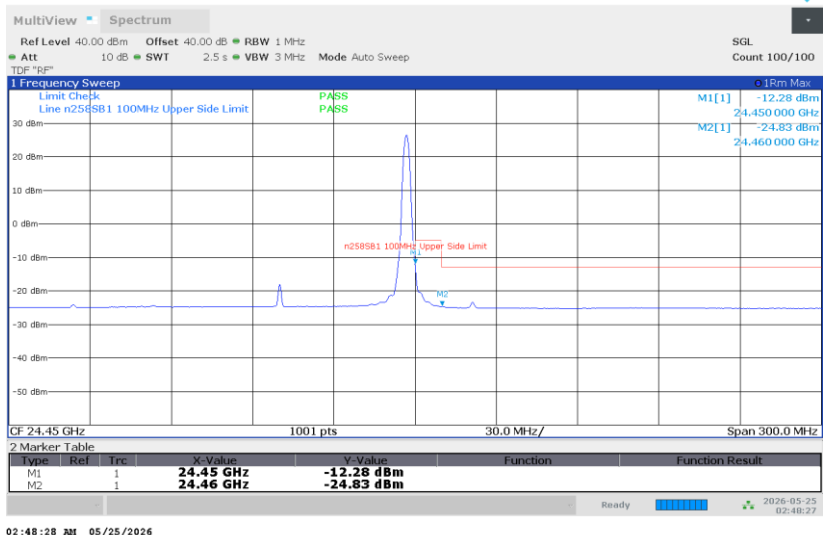

High-side, Full RB

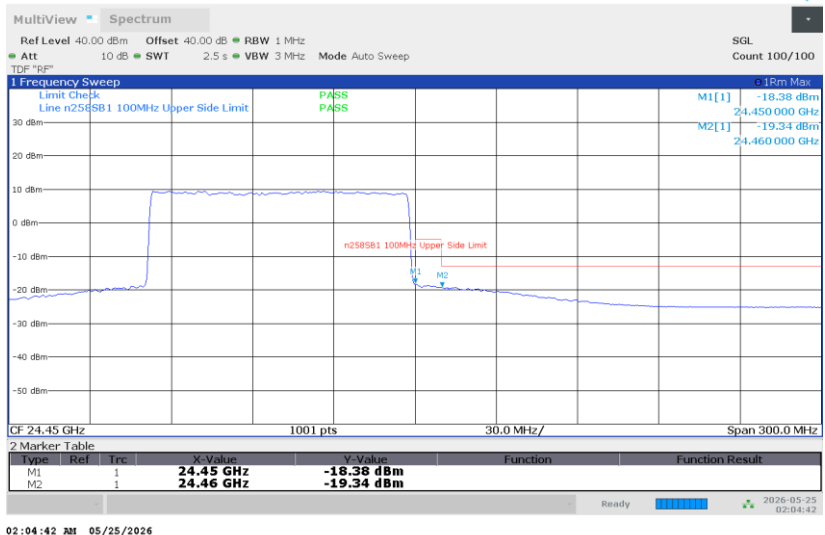


100 MHz, MIMO, 1CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-12.06	-5.00	-7.06
			24.24	-24.26	-13.00	-11.26
	L	66/0	24.25	-19.05	-5.00	-14.05
			24.24	-19.59	-13.00	-6.59
	H	1/65	24.45	-12.28	-5.00	-7.28
			24.46	-24.83	-13.00	-11.83
	H	66/0	24.45	-18.38	-5.00	-13.38
			24.46	-19.34	-13.00	-6.34


8.4.8. BAND EDGE n258 SB1 MIMO 2CC STATE B

100 MHz, MIMO, 2CC, QPSK

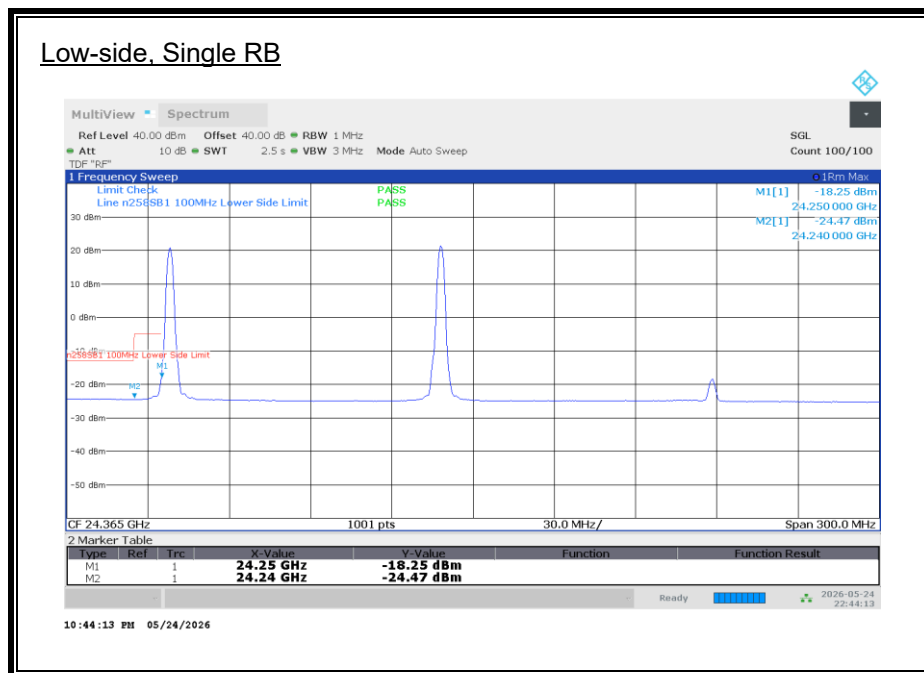

100 MHz, MIMO, 2CC, QPSK

High-side, Single RB

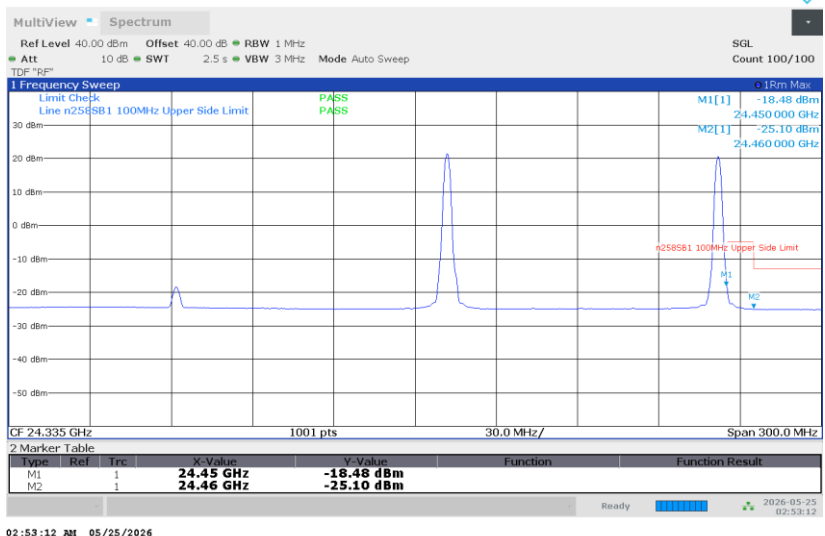

High-side, Full RB




100 MHz, MIMO, 2CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.25	-18.25	-5.00	-13.25
			24.24	-24.47	-13.00	-11.47
	L	66/0	24.25	-22.69	-5.00	-17.69
			24.24	-22.81	-13.00	-9.81
	H	1/65	24.45	-18.48	-5.00	-13.48
			24.46	-25.10	-13.00	-12.10
	H	66/0	24.45	-22.37	-5.00	-17.37
			24.46	-22.71	-13.00	-9.71


8.4.9. BAND EDGE n258 SB2 SISO-DUAL 1CC STATE A

100 MHz, SISO-DUAL, 1CC, QPSK

Low-side, Single RB

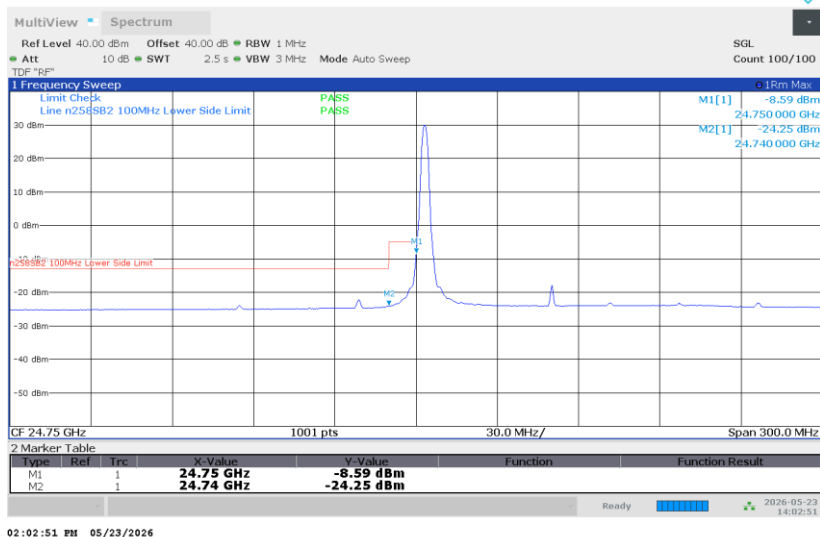


Low-side, Full RB

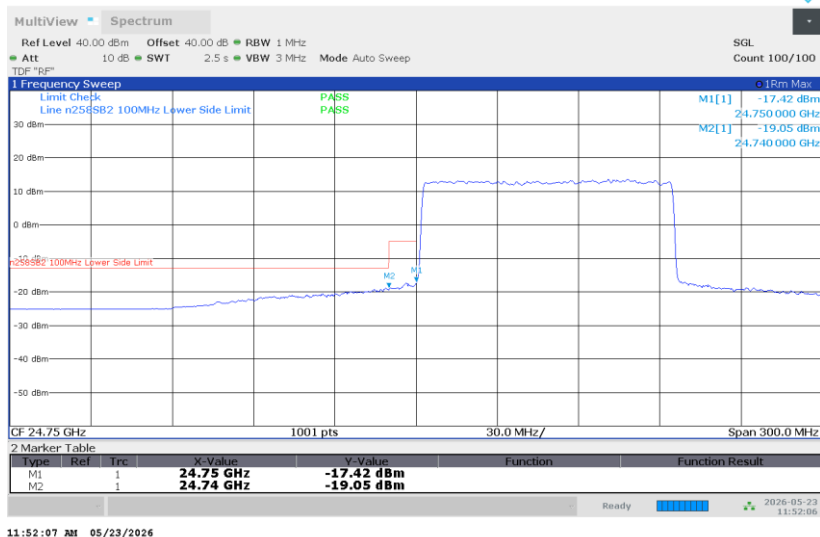


100 MHz, SISO-DUAL, 1CC, QPSK

High-side, Single RB

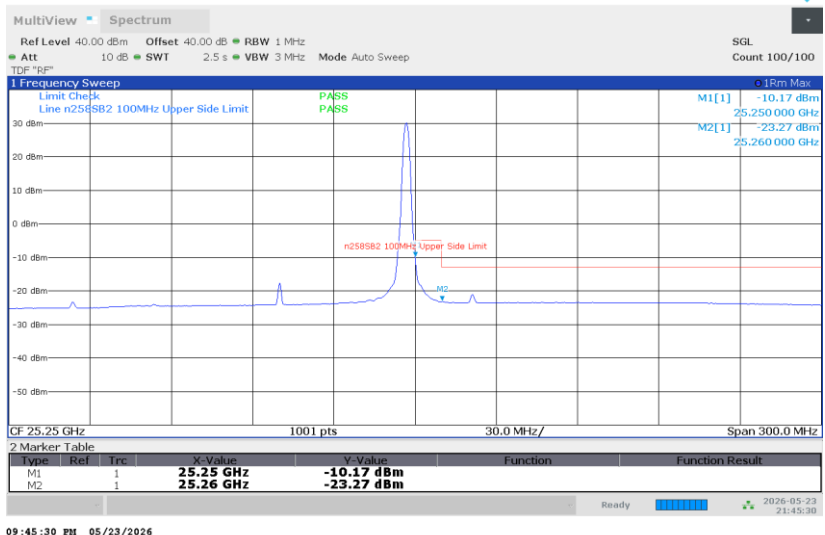

High-side, Full RB

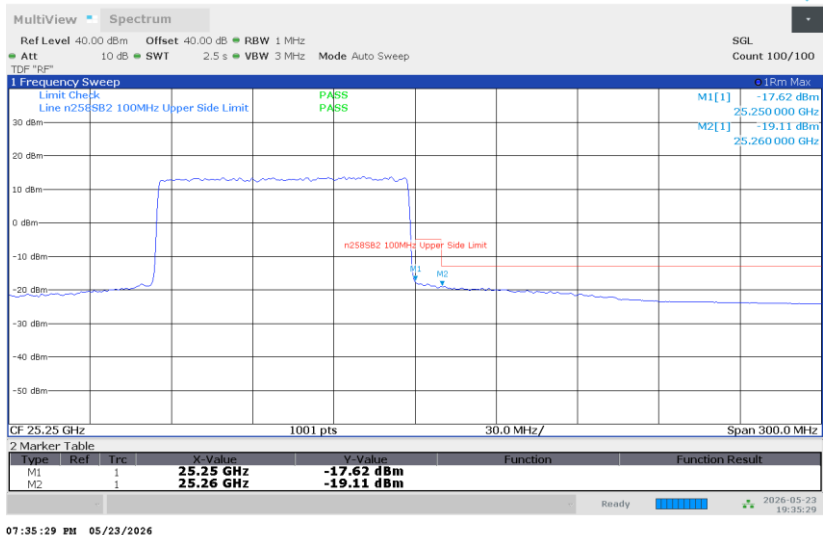

100 MHz, SISO-DUAL, 1CC, QPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.75	-8.59	-5.00	-3.59
			24.74	-24.25	-13.00	-11.25
	L	64/0	24.75	-17.42	-5.00	-12.42
			24.74	-19.05	-13.00	-6.05
	H	1/65	25.25	-10.17	-5.00	-5.17
			25.26	-23.27	-13.00	-10.27
	H	64/2	25.25	-17.62	-5.00	-12.62
			25.26	-19.11	-13.00	-6.11

100 MHz, SISO-DUAL, 1CC, Pi/2 BPSK

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.75	-9.71	-5.00	-4.71
			24.74	-24.22	-13.00	-11.22
	L	64/0	24.75	-18.44	-5.00	-13.44
			24.74	-21.69	-13.00	-8.69
	H	1/65	25.25	-10.27	-5.00	-5.27
			25.26	-23.32	-13.00	-10.32
	H	64/2	25.25	-18.20	-5.00	-13.20
			25.26	-21.09	-13.00	-8.09

100 MHz, SISO-DUAL, 1CC, 16QAM

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.75	-9.90	-5.00	-4.90
			24.74	-24.25	-13.00	-11.25
	L	64/0	24.75	-19.73	-5.00	-14.73
			24.74	-20.88	-13.00	-7.88
	H	1/65	25.25	-10.51	-5.00	-5.51
			25.26	-23.35	-13.00	-10.35
	H	64/2	25.25	-19.27	-5.00	-14.27
			25.26	-20.16	-13.00	-7.16

100 MHz, SISO-DUAL, 1CC, 64QAM

BW	Channel	RB	Freq.	Avg EIRP	Avg TRP Limit	Margin
(MHz)		(Size Offset)	(GHz)	(dBm)	(dBm)	(dB)
100	L	1/0	24.75	-12.04	-5.00	-7.04
			24.74	-24.34	-13.00	-11.34
	L	64/0	24.75	-21.81	-5.00	-16.81
			24.74	-23.28	-13.00	-10.28
	H	1/65	25.25	-11.51	-5.00	-6.51
			25.26	-23.54	-13.00	-10.54
	H	64/2	25.25	-21.56	-5.00	-16.56
			25.26	-22.82	-13.00	-9.82

8.4.10. BAND EDGE n258 SB2 SISO-DUAL 2CC STATE A

100 MHz, SISO-DUAL, 2CC, QPSK

