



Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2422MHz
Channel: 3

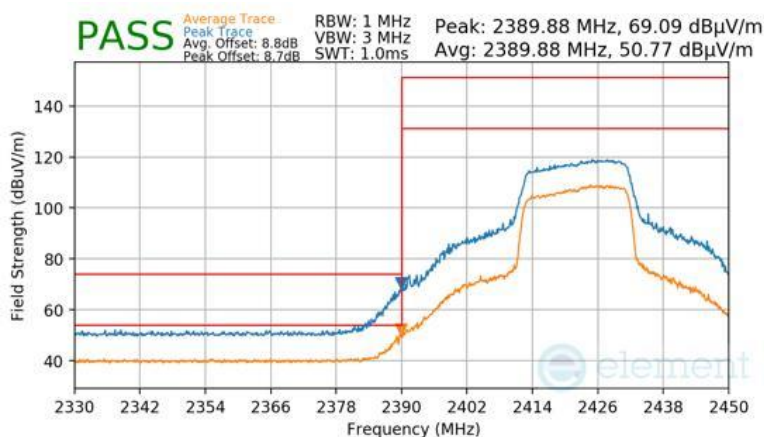

Plot 7-106 Radiated Restricted Lower Band Edge Measurement Antenna 4a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2427MHz
Channel: 4

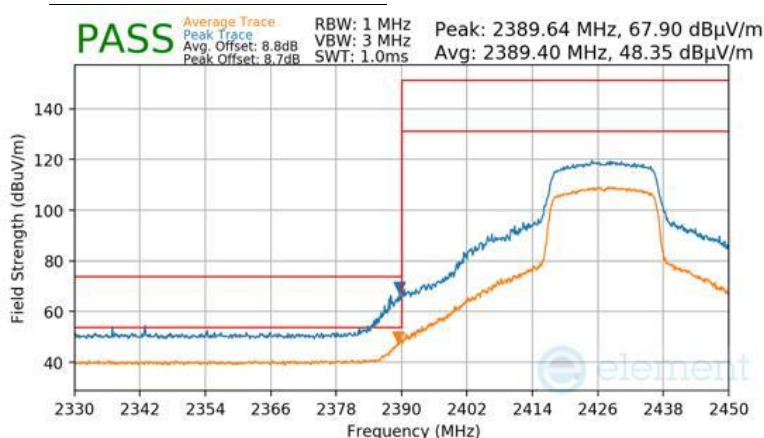

Plot 7-107 Radiated Restricted Lower Band Edge Measurement Antenna 4a (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 95 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2432MHz
Channel: 5

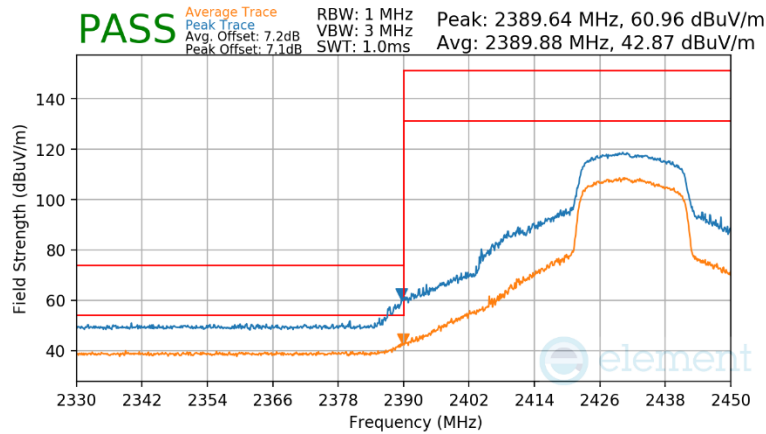

Plot 7-108 Radiated Restricted Lower Band Edge Measurement Antenna 4a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6 Low

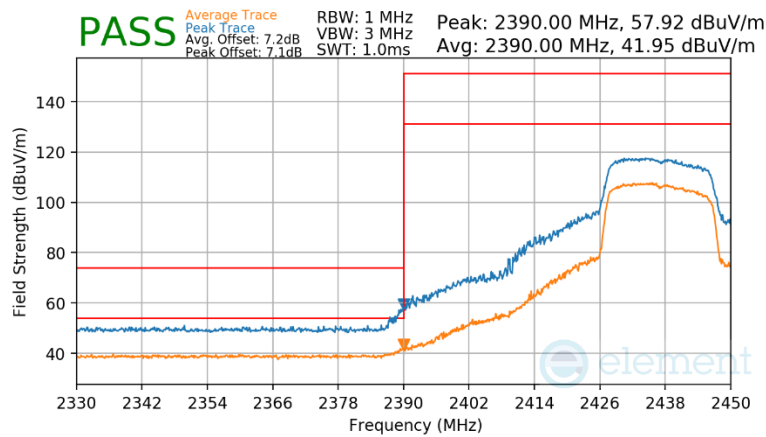

Plot 7-109 Radiated Restricted Lower Band Edge Measurement Antenna 4a (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 96 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6 High

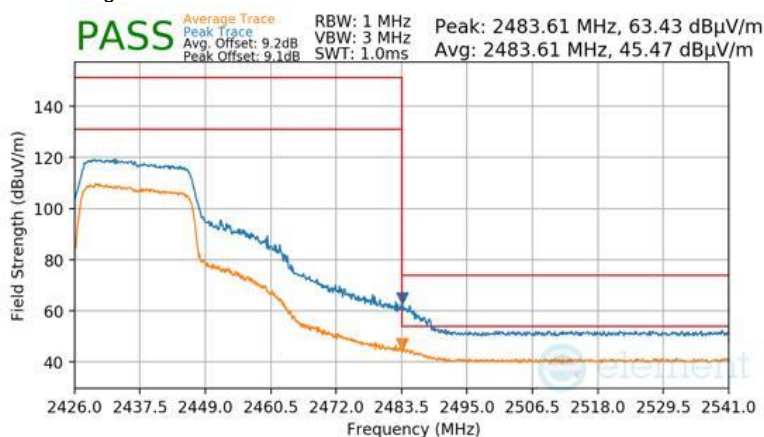

Plot 7-110 Radiated Restricted Upper Band Edge Measurement Antenna 4a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2442MHz
Channel: 7

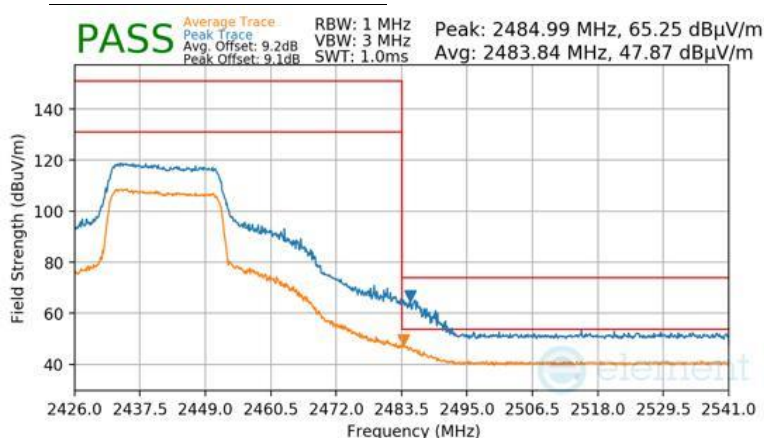

Plot 7-111 Radiated Restricted Upper Band Edge Measurement Antenna 4a (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 97 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2447MHz
Channel: 8

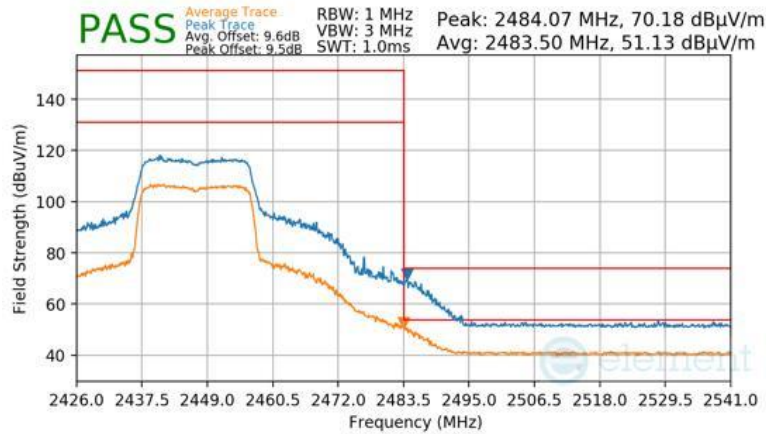

Plot 7-112 Radiated Restricted Upper Band Edge Measurement Antenna 4a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

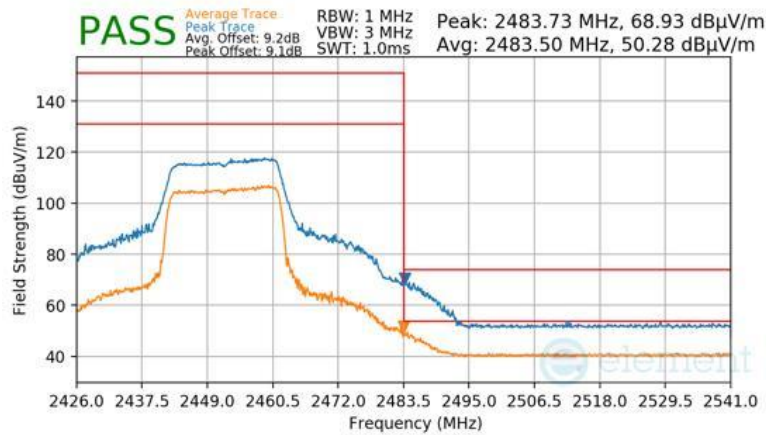

Plot 7-113 Radiated Restricted Upper Band Edge Measurement Antenna 4a (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 98 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

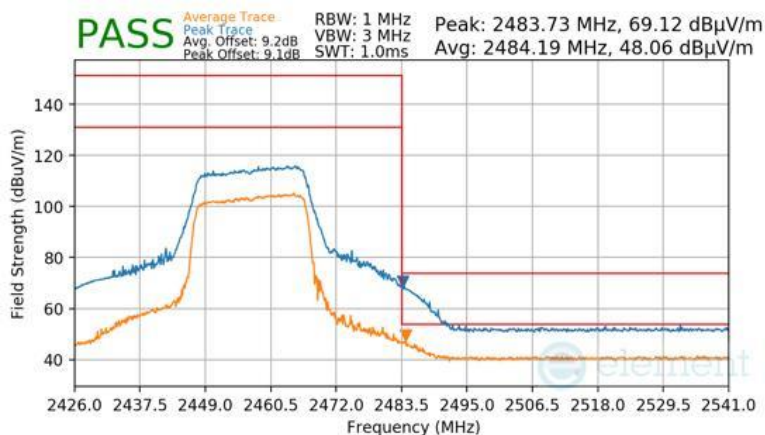

Plot 7-114 Radiated Restricted Upper Band Edge Measurement Antenna 4a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

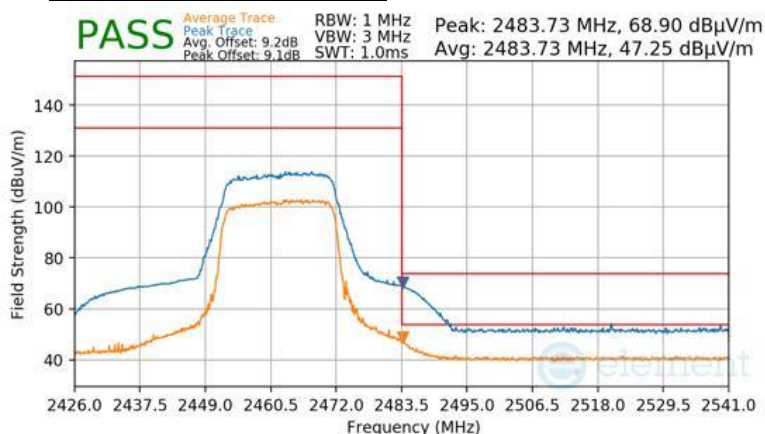

Plot 7-115 Radiated Restricted Upper Band Edge Measurement Antenna 4a (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 99 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

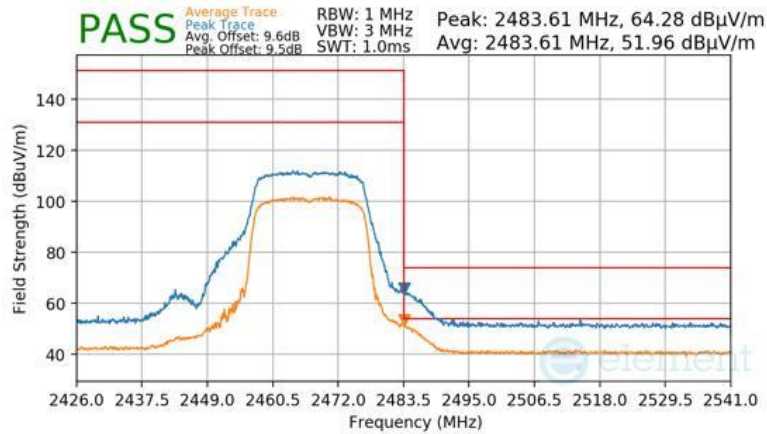

Plot 7-116 Radiated Restricted Upper Band Edge Measurement Antenna 4a (Peak & Average – RU242)

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

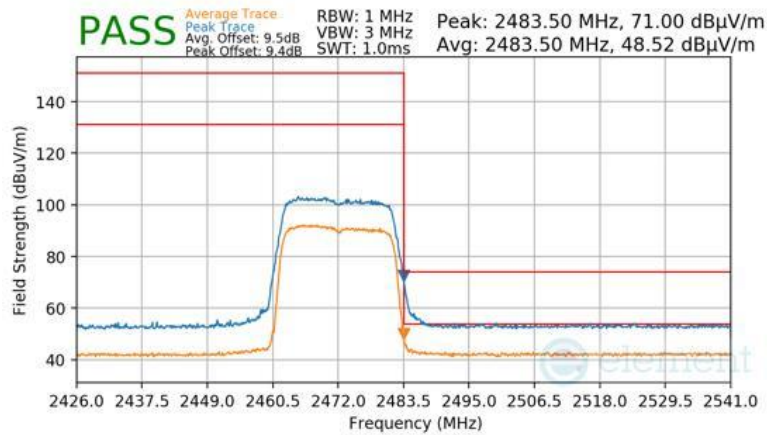

Plot 7-117 Radiated Restricted Upper Band Edge Measurement Antenna 4a (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 100 of 141

7.7.3 Antenna 2a Radiated Restricted Band Edge Measurements

\$15.205 \$15.209; RSS-Gen [8.9]


RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

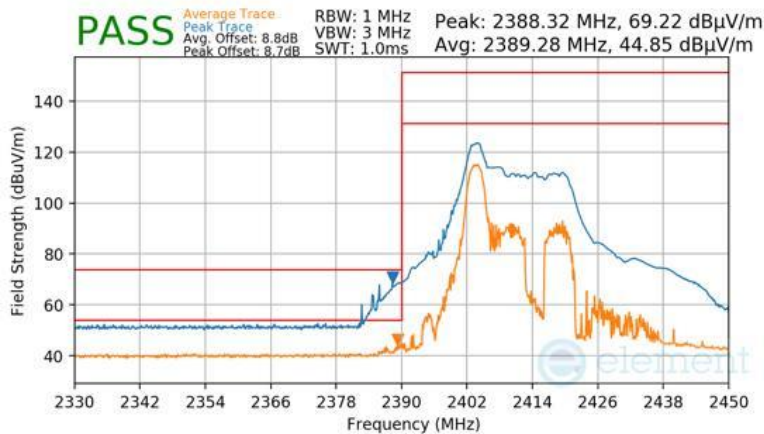

Plot 7-118 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 8
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

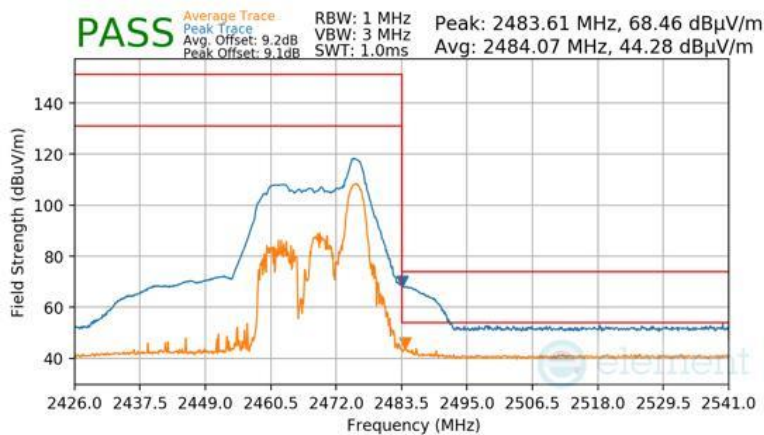

Plot 7-119 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU26)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 101 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 8
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

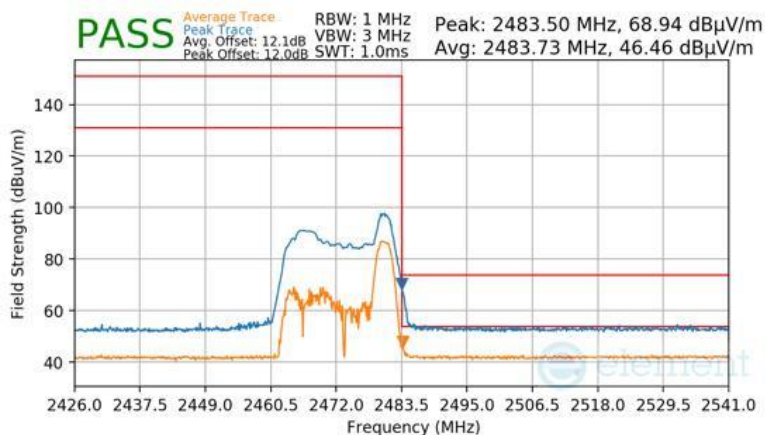


Plot 7-120 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU26)

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 102 of 141


V 11.0 5/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

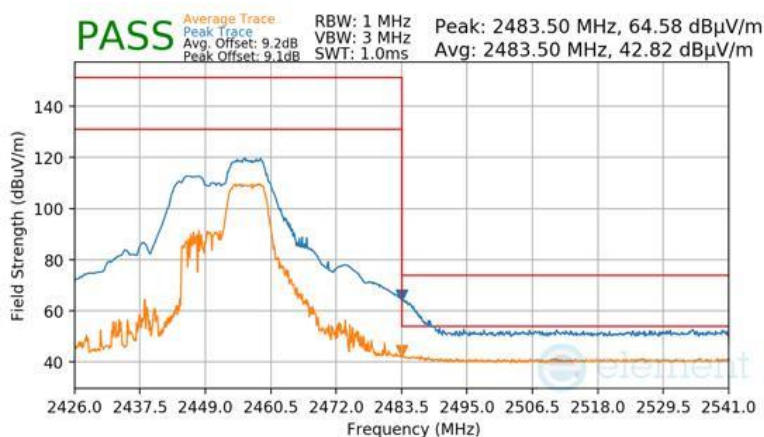

Plot 7-123 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

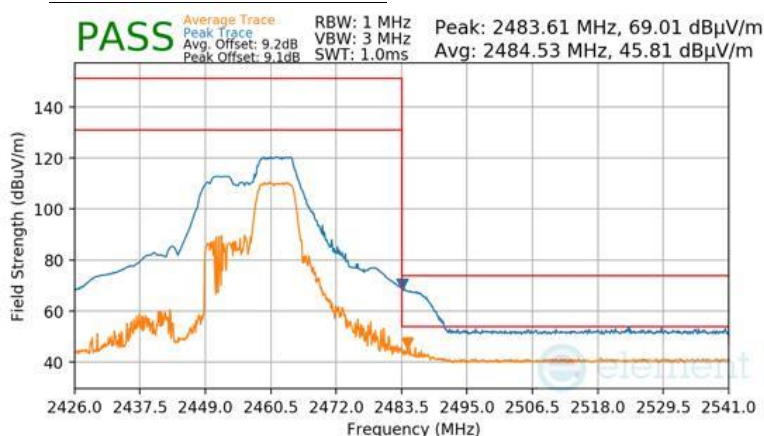

Plot 7-124 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 104 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

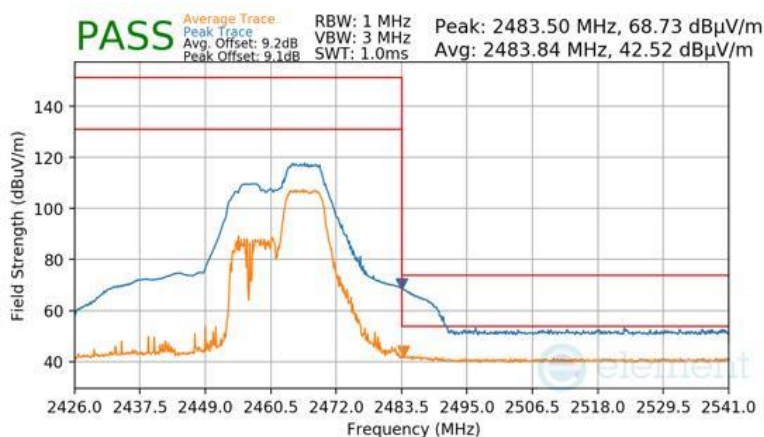

Plot 7-125 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

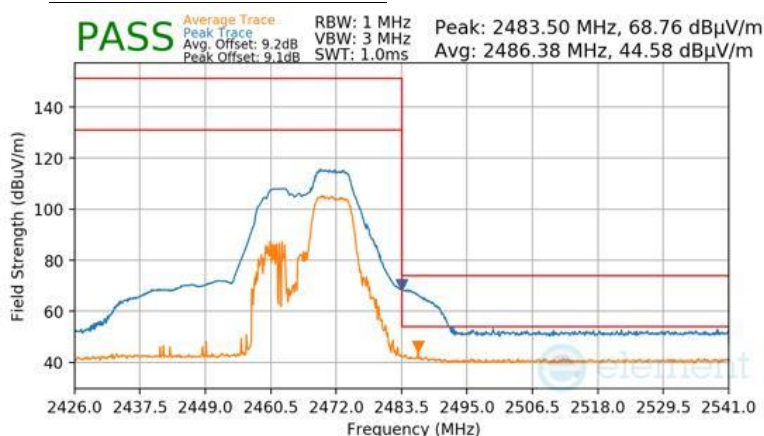

Plot 7-126 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 105 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

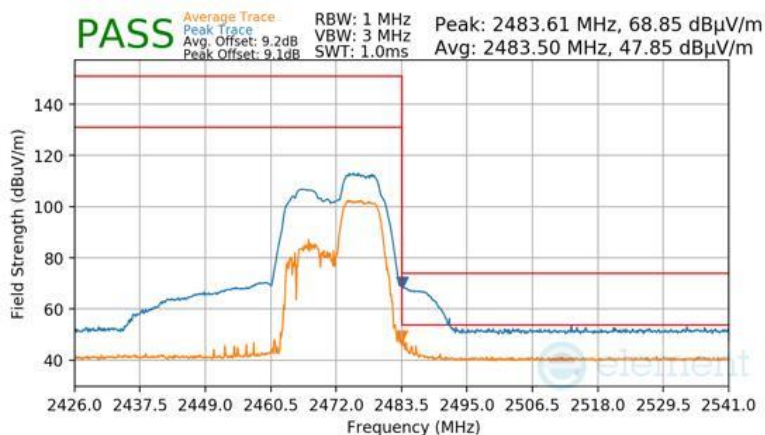


Plot 7-127 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU52+26)

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 106 of 141

V 11.0 5/2025


RU242

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

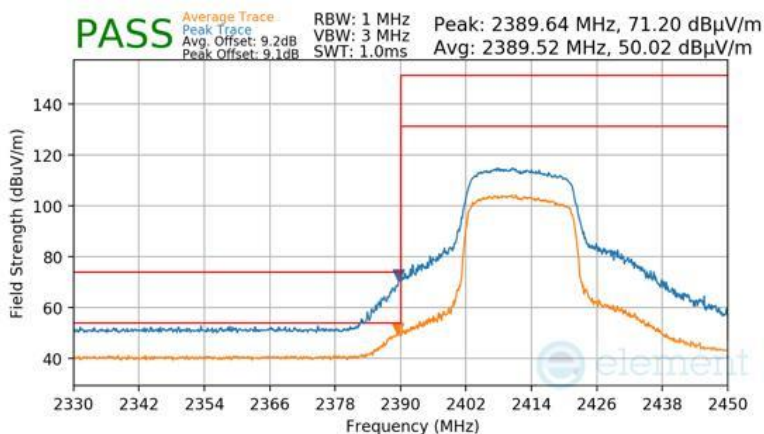

Plot 7-128 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU242)

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2417MHz
Channel: 2

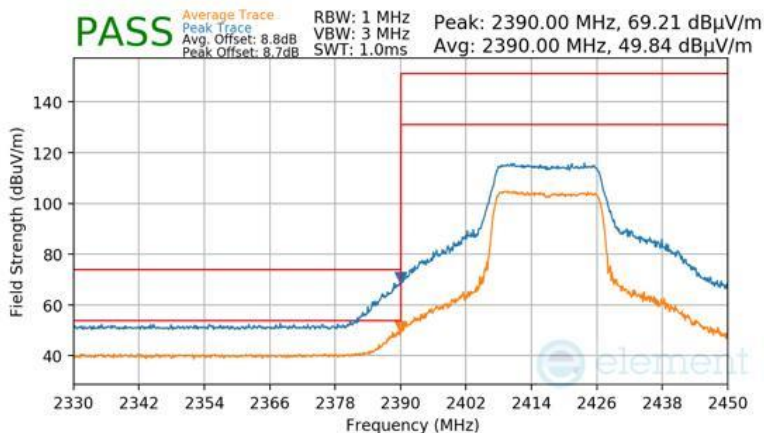


Plot 7-129 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU242)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 107 of 141


V 11.0 5/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2422MHz
Channel: 3

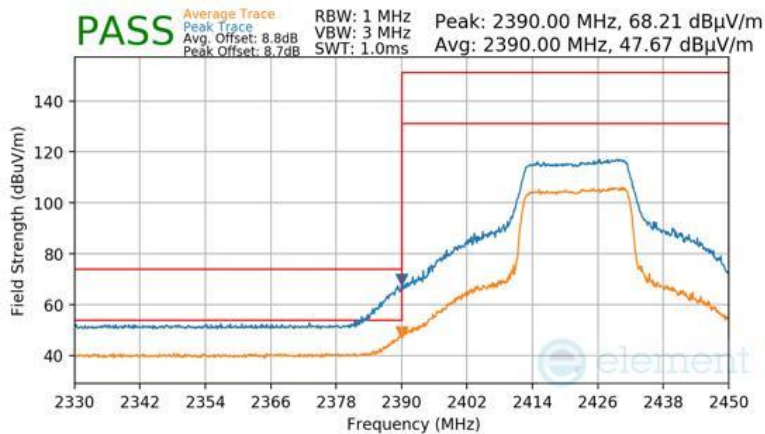

Plot 7-130 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2427MHz
Channel: 4

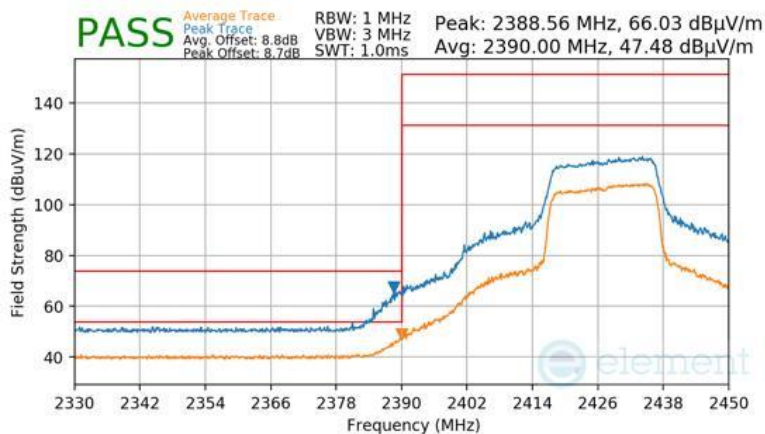

Plot 7-131 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 108 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2432MHz
Channel: 5

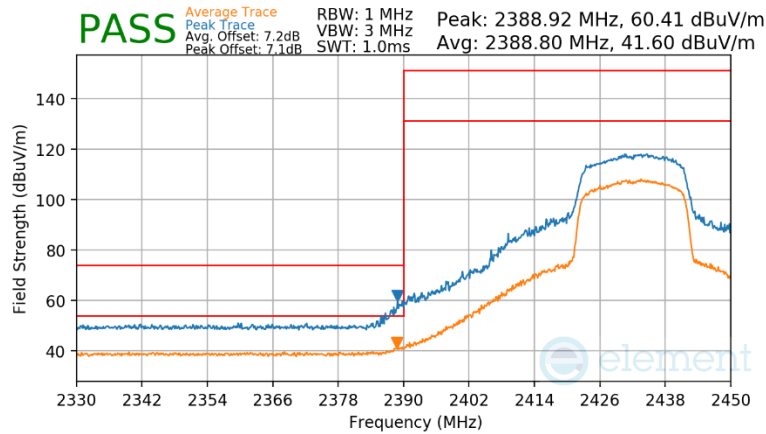

Plot 7-132 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6 Low

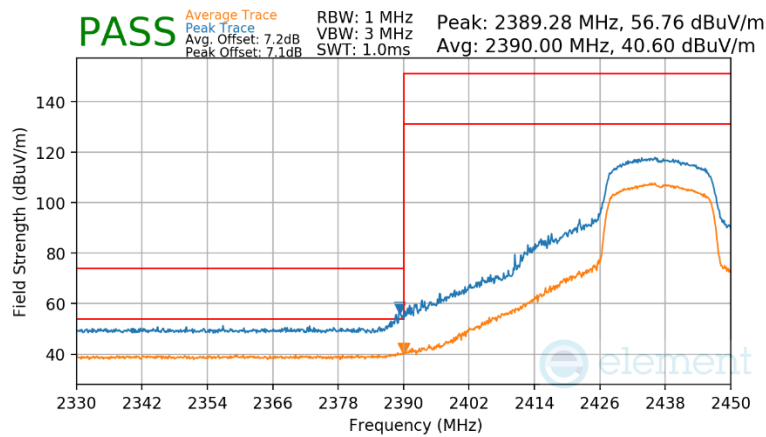

Plot 7-133 Radiated Restricted Lower Band Edge Measurement Antenna 2a (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 109 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6 High

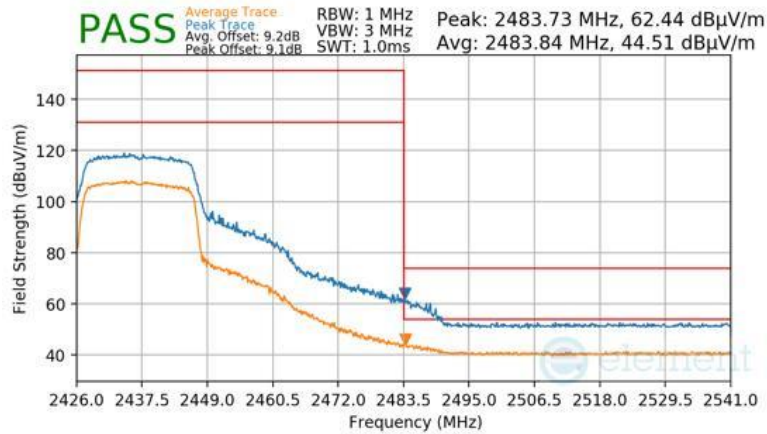

Plot 7-134 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2442MHz
Channel: 7

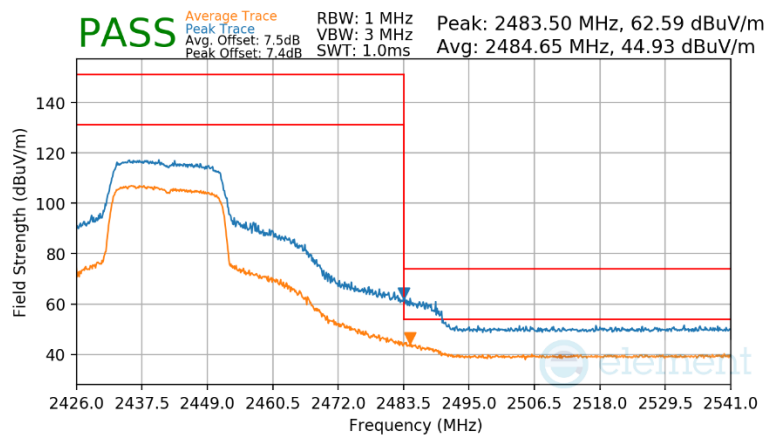

Plot 7-135 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 110 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2447MHz
Channel: 8

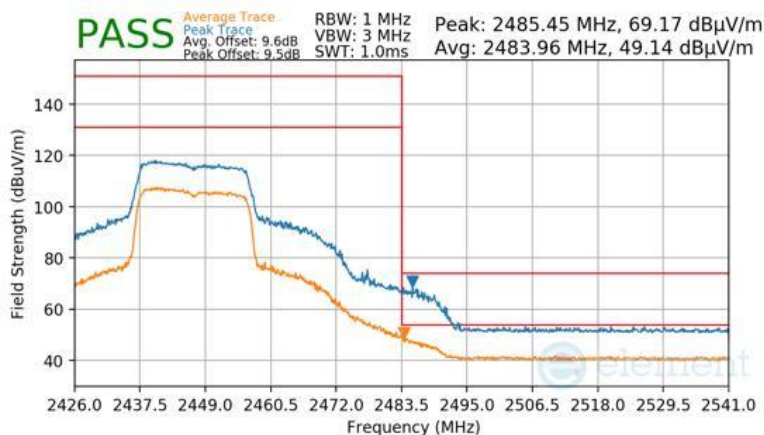

Plot 7-136 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

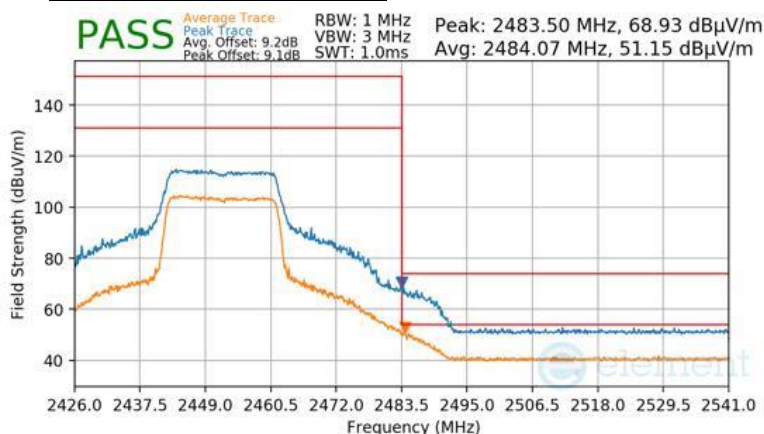

Plot 7-137 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 111 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

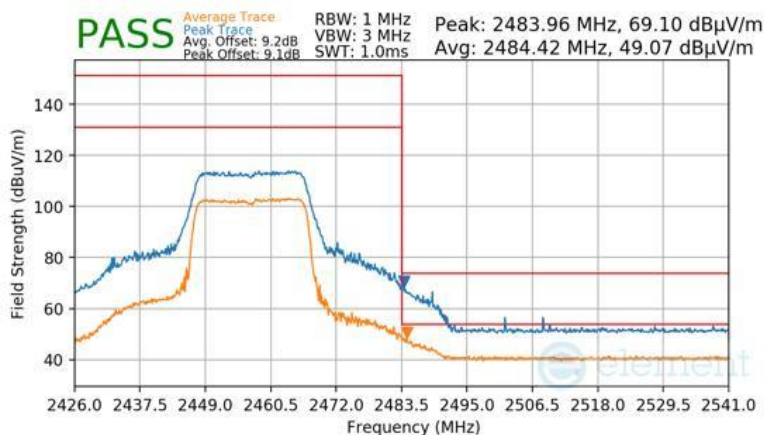

Plot 7-138 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

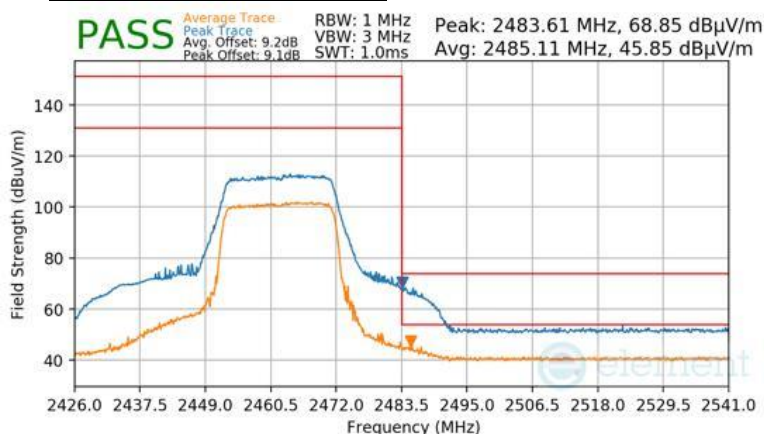

Plot 7-139 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 112 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

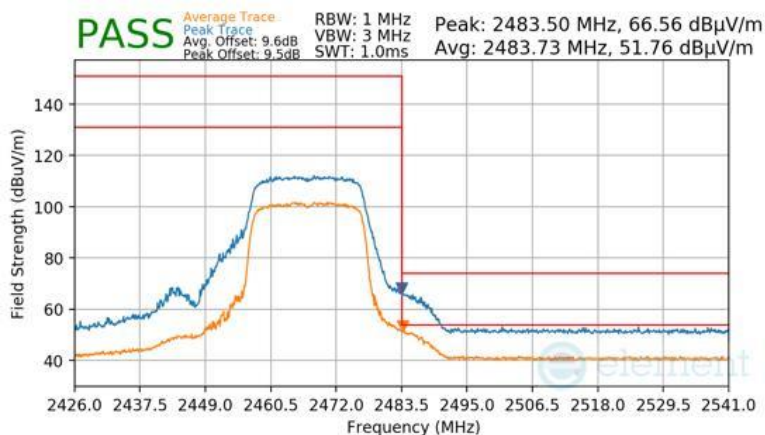

Plot 7-140 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

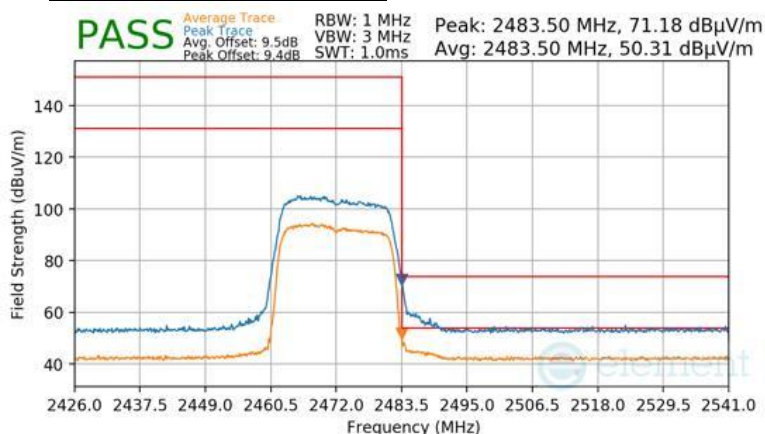

Plot 7-141 Radiated Restricted Upper Band Edge Measurement Antenna 2a (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 113 of 141

7.7.4 CDD Primary Radiated Restricted Band Edge Measurements

\$15.205 \$15.209; RSS-Gen [8.9]


RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

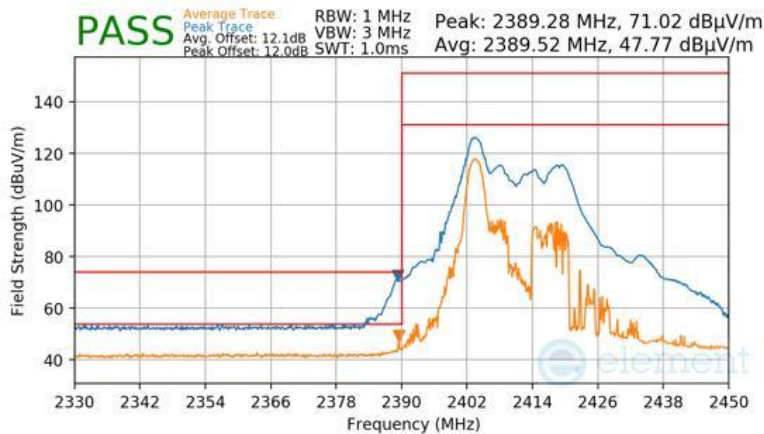

Plot 7-142 Radiated Restricted Lower Band Edge Measurement CDD Primary (Peak & Average – RU26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 8
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

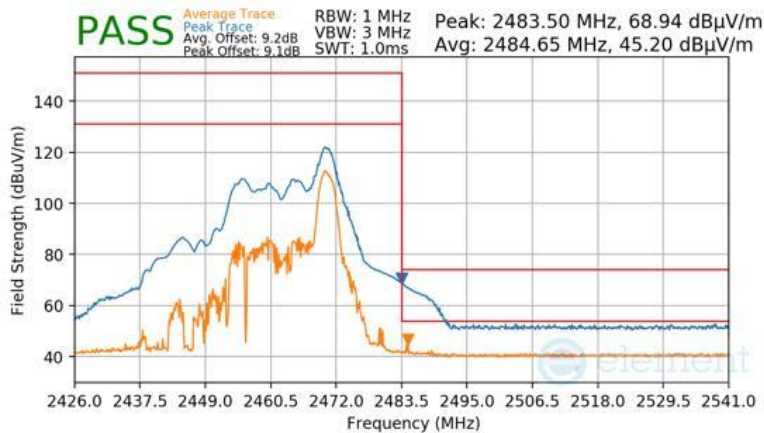

Plot 7-143 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU26)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 114 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 8
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

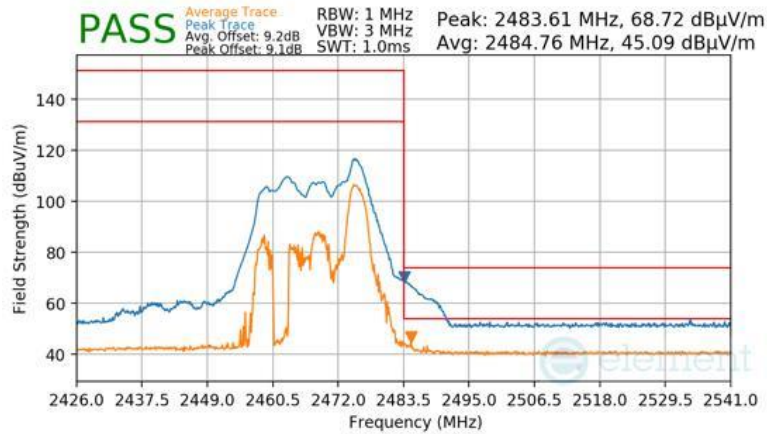

Plot 7-144 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU26)

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 8
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

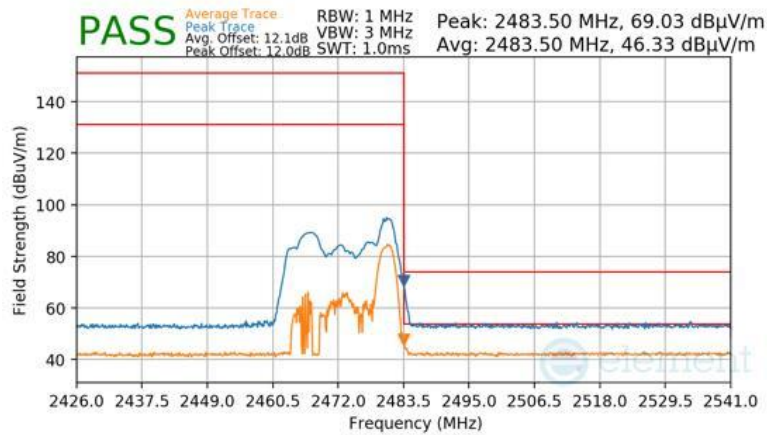


Plot 7-145 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU26)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 115 of 141


MRU

Mode:	802.11be OFDMA
Transfer Rate:	MCS9
RU Index:	70
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

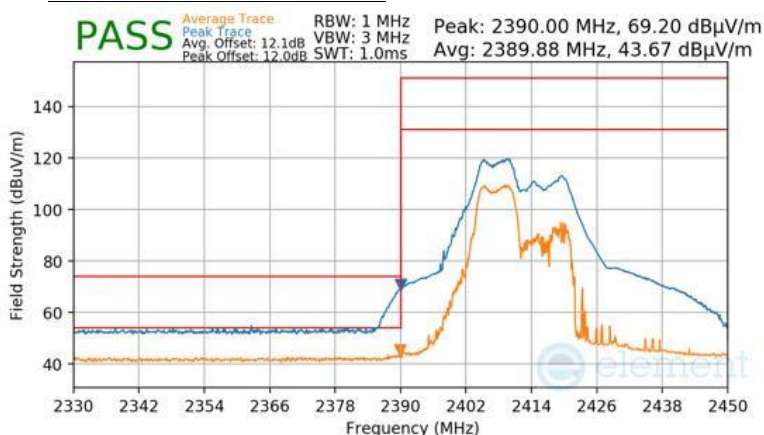

Plot 7-146 Radiated Restricted Lower Band Edge Measurement CDD Primary (Peak & Average – RU52+26)


Mode:	802.11be OFDMA
Transfer Rate:	MCS9
RU Index:	70
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

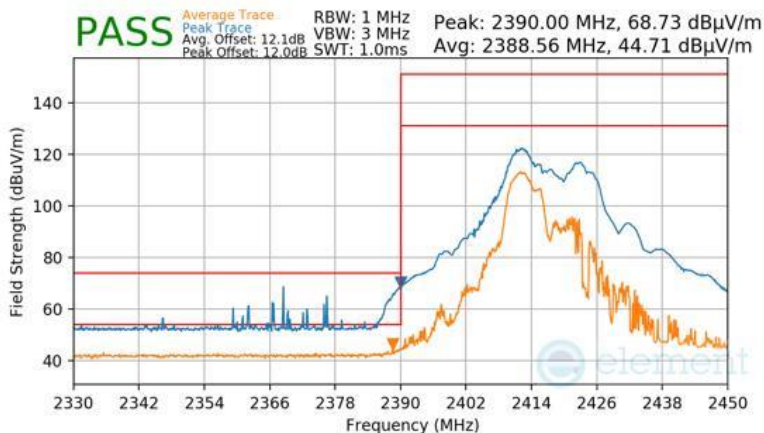

Plot 7-147 Radiated Restricted Lower Band Edge Measurement CDD Primary (Peak & Average – RU52+26)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 116 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 2422MHz
Channel: 3

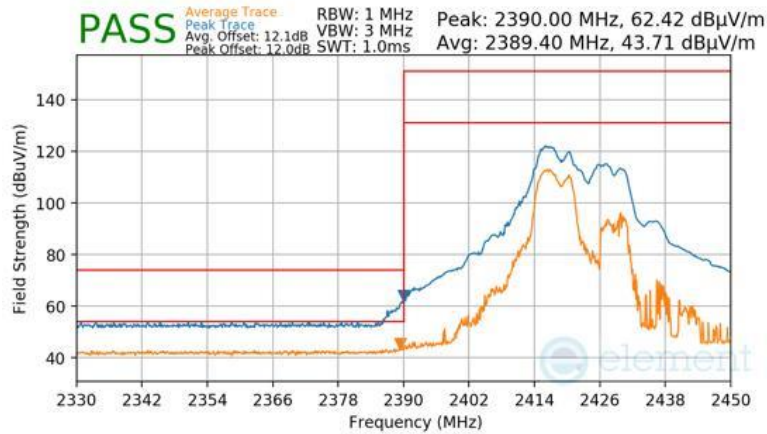

Plot 7-148 Radiated Restricted Lower Band Edge Measurement CDD Primary (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

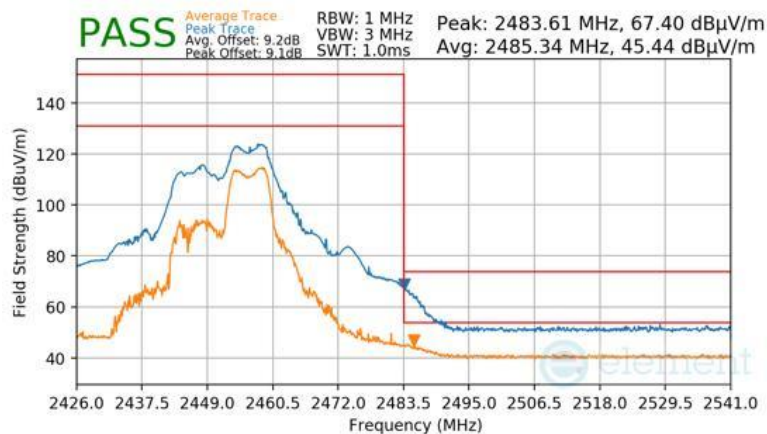

Plot 7-149 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU52+26)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 117 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

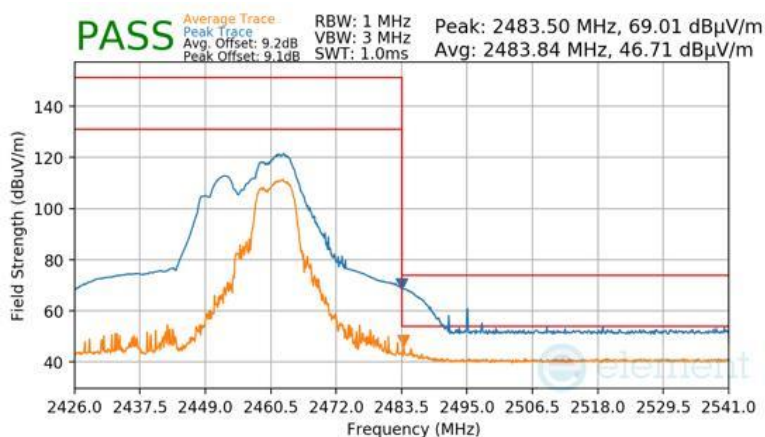

Plot 7-150 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU52+26)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

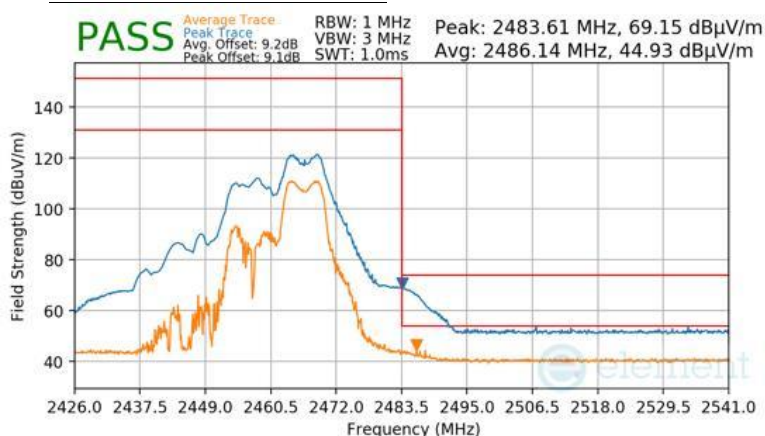

Plot 7-151 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU52+26)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 118 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

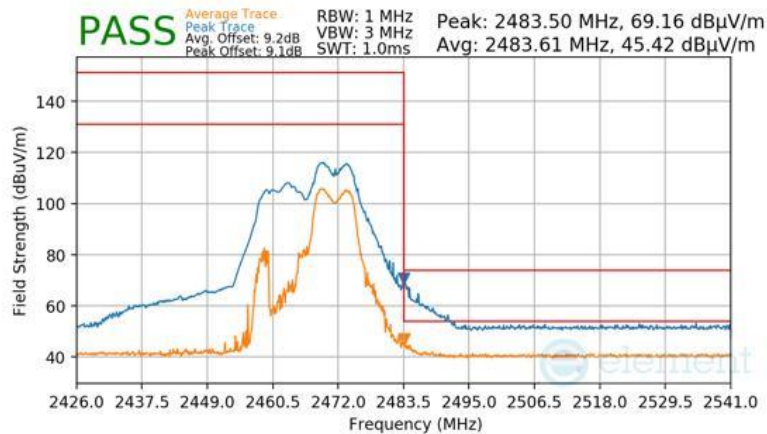

Plot 7-152 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU52+26)

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

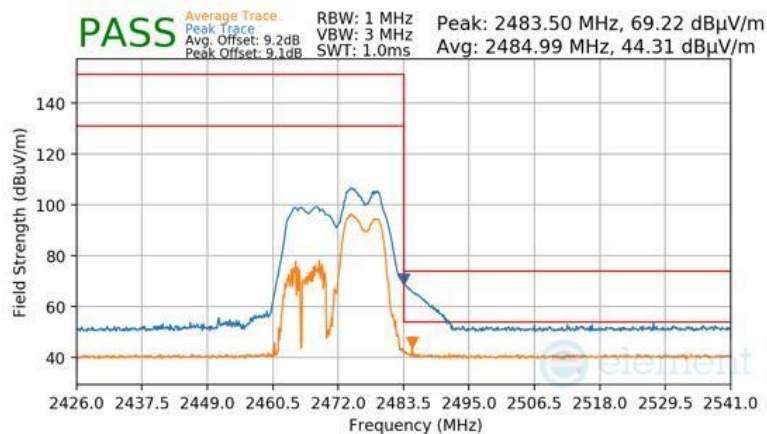


Plot 7-153 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU52+26)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 119 of 141


RU242

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

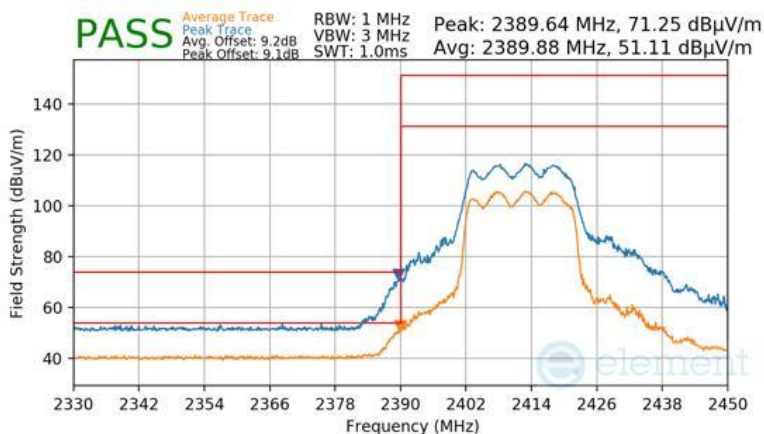

Plot 7-154 Radiated Restricted Lower Band Edge Measurement CDD Primary (Peak & Average – RU242)

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2417MHz
Channel: 2

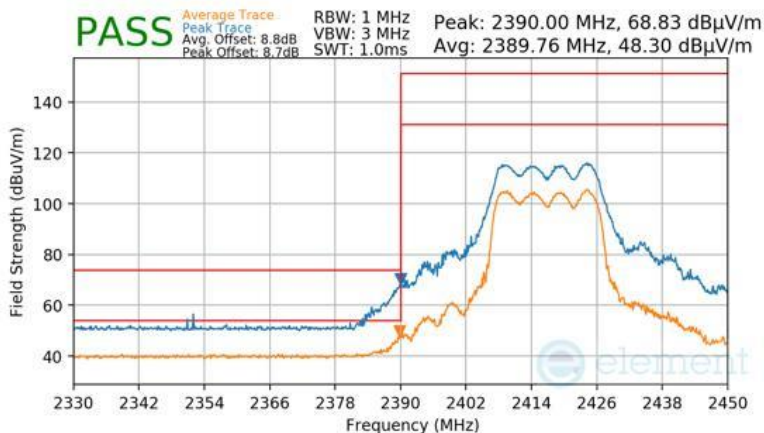


Plot 7-155 Radiated Restricted Lower Band Edge Measurement CDD Primary (Peak & Average – RU242)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 120 of 141

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2422MHz
Channel: 3

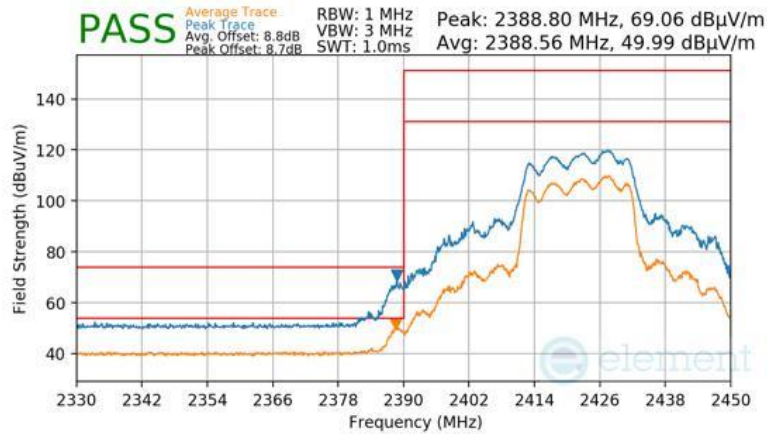

Plot 7-156 Radiated Restricted Lower Band Edge Measurement CDD Primary (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2427MHz
Channel: 4



Plot 7-157 Radiated Restricted Lower Band Edge Measurement CDD Primary (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 121 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2432MHz
Channel: 5

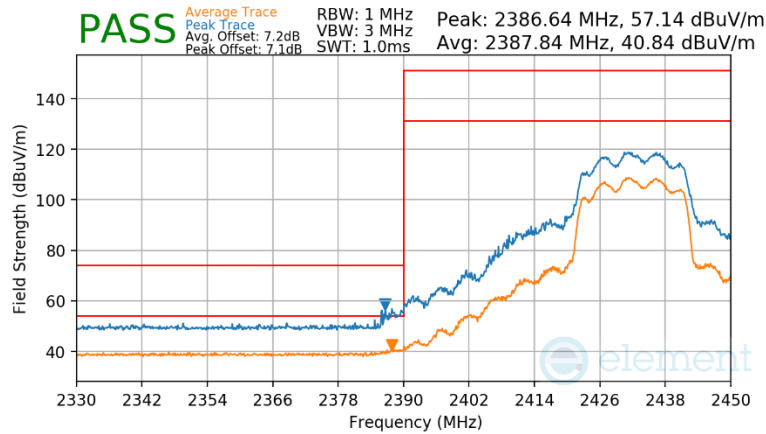

Plot 7-158 Radiated Restricted Lower Band Edge Measurement CDD Primary (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6 Low

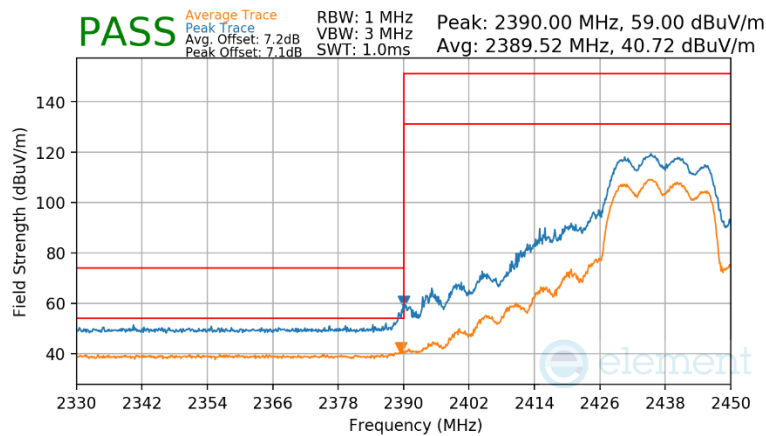

Plot 7-159 Radiated Restricted Lower Band Edge Measurement CDD Primary (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 122 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6 High

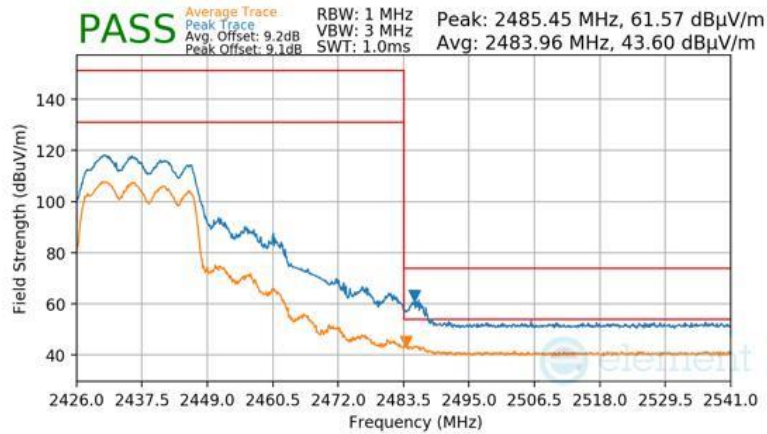

Plot 7-160 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2442MHz
Channel: 7

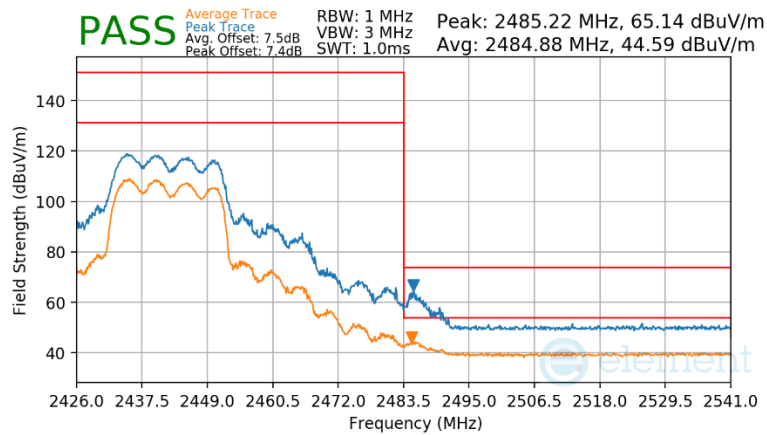

Plot 7-161 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 123 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2447MHz
Channel: 8

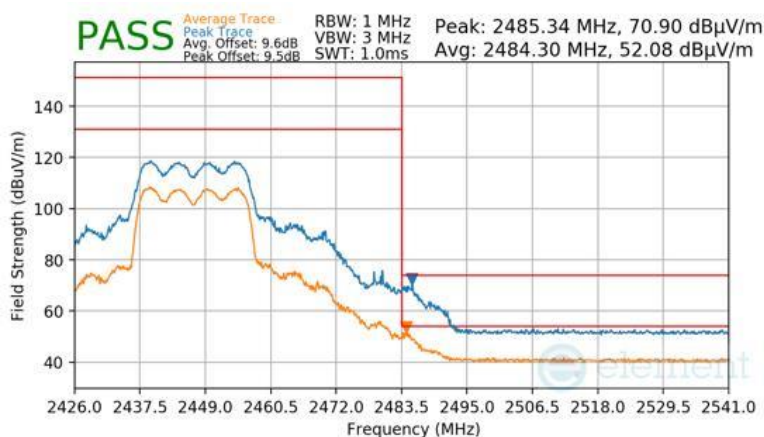

Plot 7-162 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

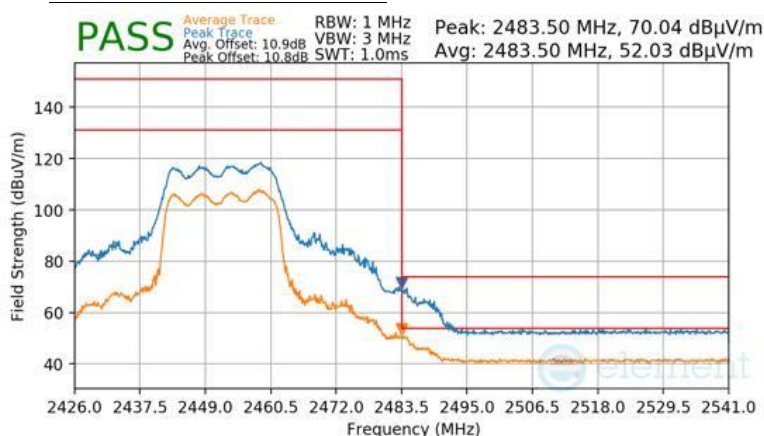

Plot 7-163 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 124 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

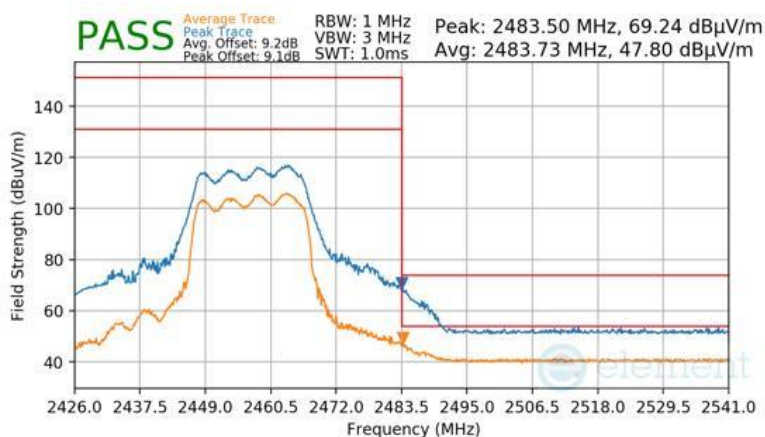

Plot 7-164 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU242)


Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

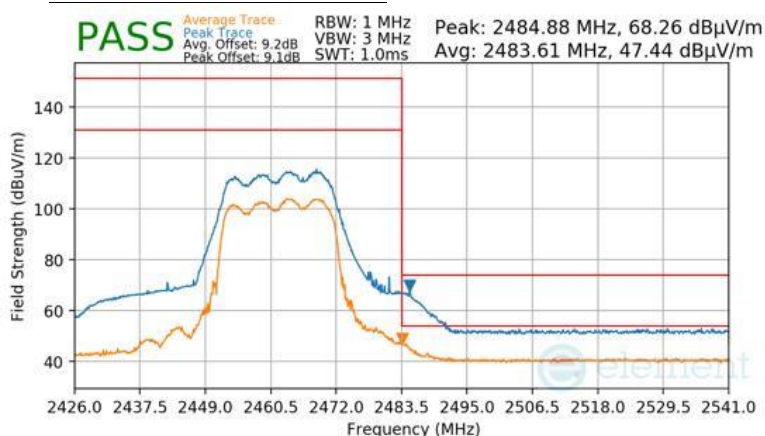

Plot 7-165 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU242)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 125 of 141

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

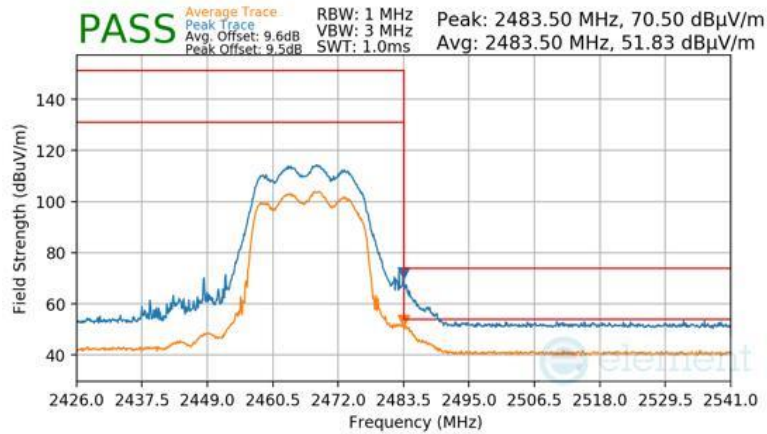

Plot 7-166 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU242)

Mode: 802.11be OFDMA
Transfer Rate: MCS9
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

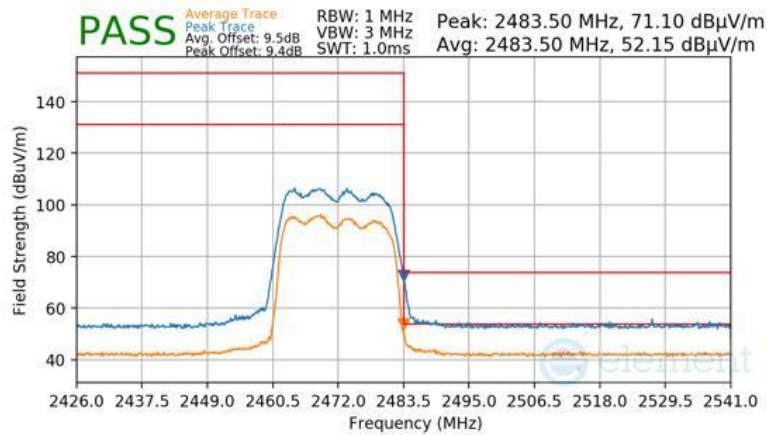

Plot 7-167 Radiated Restricted Upper Band Edge Measurement CDD Primary (Peak & Average – RU242)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 126 of 141

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-41 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-41. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 127 of 141

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

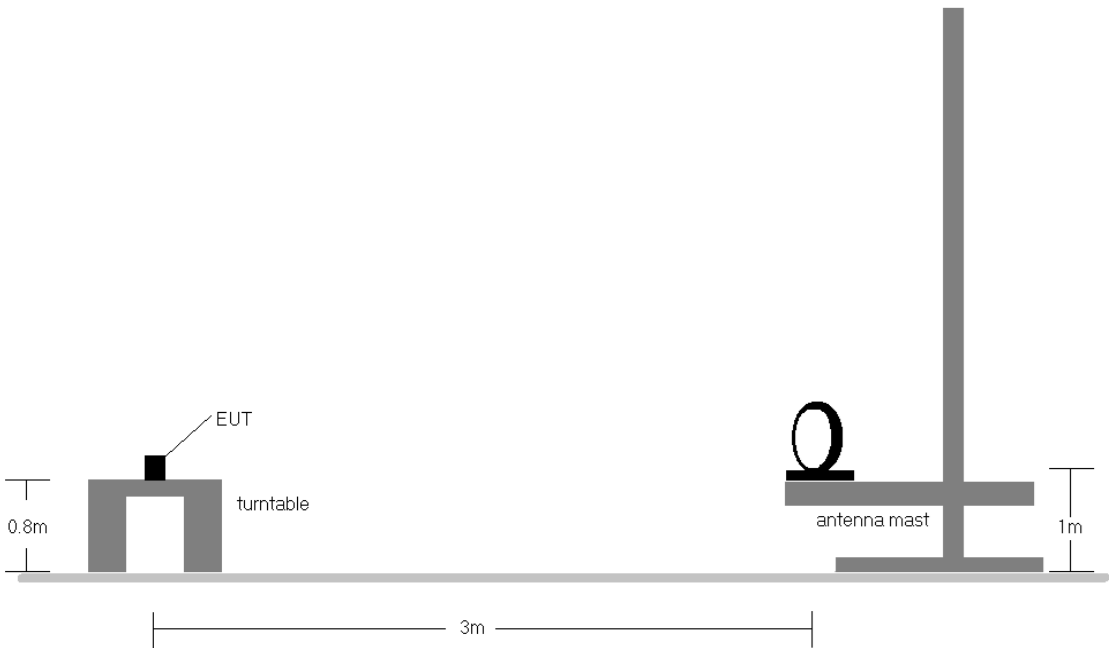


Figure 7-7. Radiated Test Setup < 30MHz

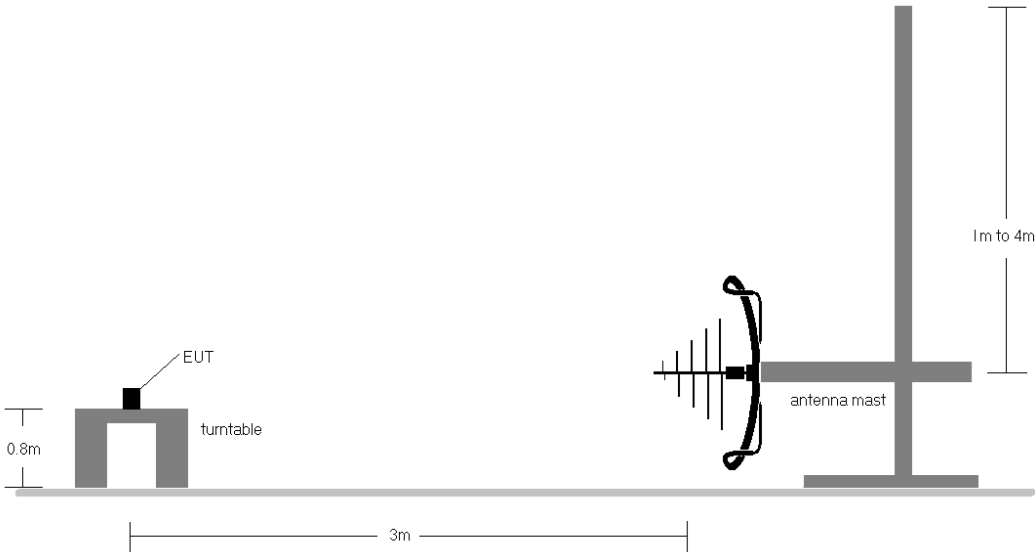


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 128 of 141

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-41.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All antenna configurations and data rates were investigated and only the worst case are reported.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.
11. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamplifier Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 129 of 141

CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

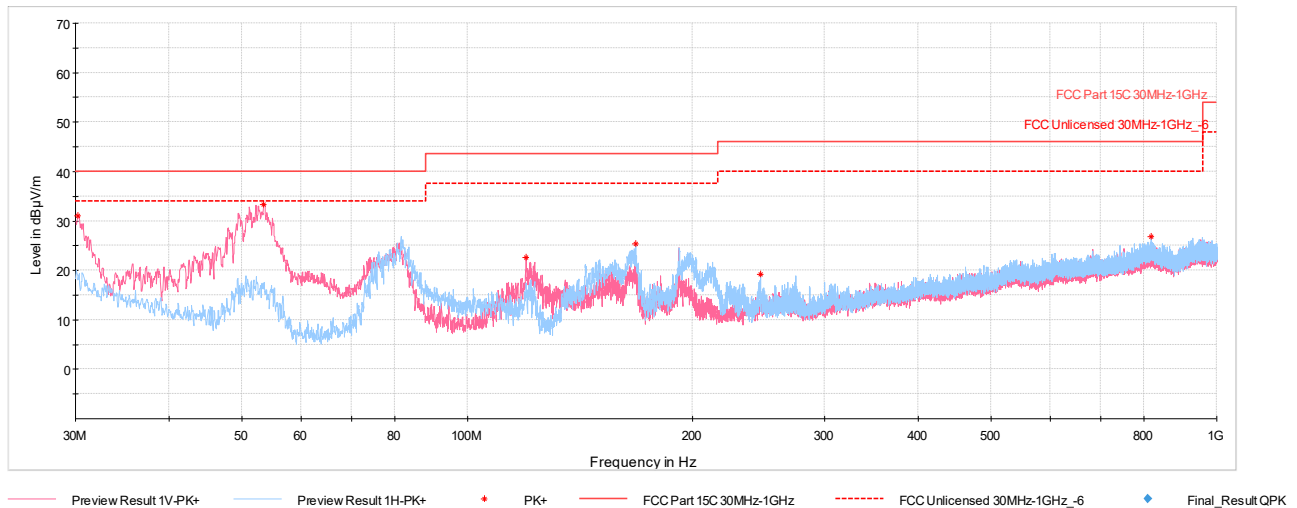


Plot 7-168. Radiated Spurious Emissions below 1GHz 802.11be CDD Ch.6 (RU26), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
30.19	Max Peak	V	100	0	-61.09	-14.80	31.11	40.00	-8.89
53.52	Max Peak	V	100	322	-51.39	-22.28	33.33	40.00	-6.67
119.77	Max Peak	V	100	112	-62.53	-21.89	22.58	43.52	-20.94
167.79	Max Peak	H	200	0	-62.35	-19.28	25.37	43.52	-18.15
246.31	Max Peak	H	100	256	-71.61	-16.11	19.28	46.02	-26.74
818.13	Max Peak	H	100	57	-76.82	-3.27	26.91	46.02	-19.11

Table 7-42. Radiated Spurious Emissions below 1GHz 802.11be CDD Ch.6 (RU26), with AC/DC Adapter


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 130 of 141

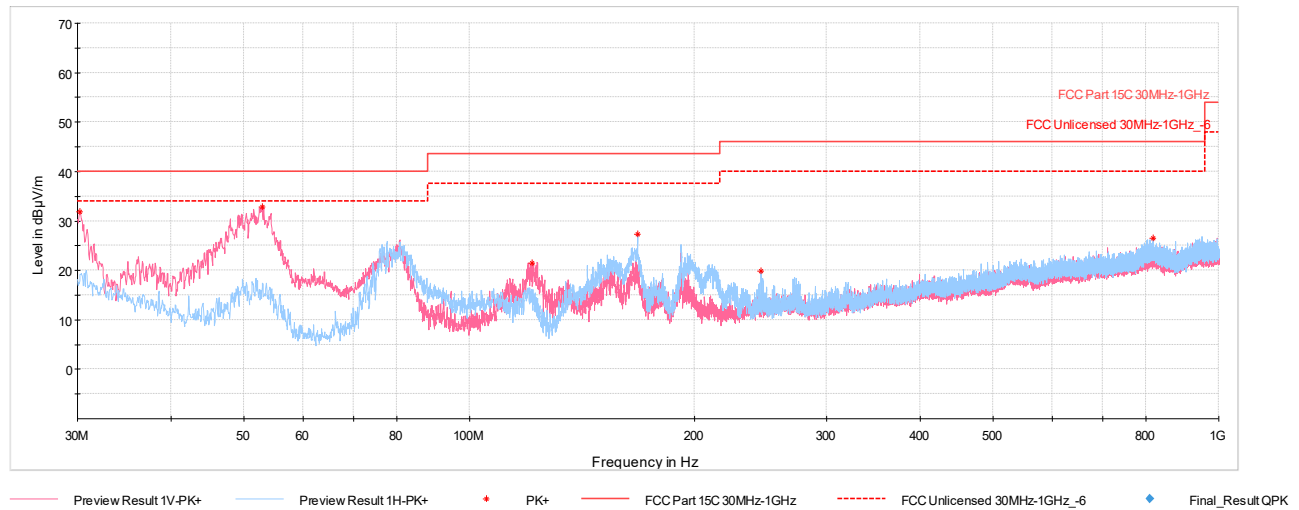

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
30.19	Max Peak	V	100	345	-60.30	-14.80	31.90	40.00	-8.10
52.94	Max Peak	V	100	327	-51.68	-22.51	32.81	40.00	-7.19
121.23	Max Peak	V	100	155	-63.41	-22.11	21.48	43.52	-22.04
167.64	Max Peak	H	200	4	-60.38	-19.28	27.34	43.52	-16.18
244.86	Max Peak	H	100	253	-71.02	-16.20	19.78	46.02	-26.24
816.48	Max Peak	H	100	168	-77.18	-3.31	26.51	46.02	-19.51

Table 7-43. Radiated Spurious Emissions below 1GHz 802.11be CDD Ch.6 (RU242), with AC/DC Adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 131 of 141

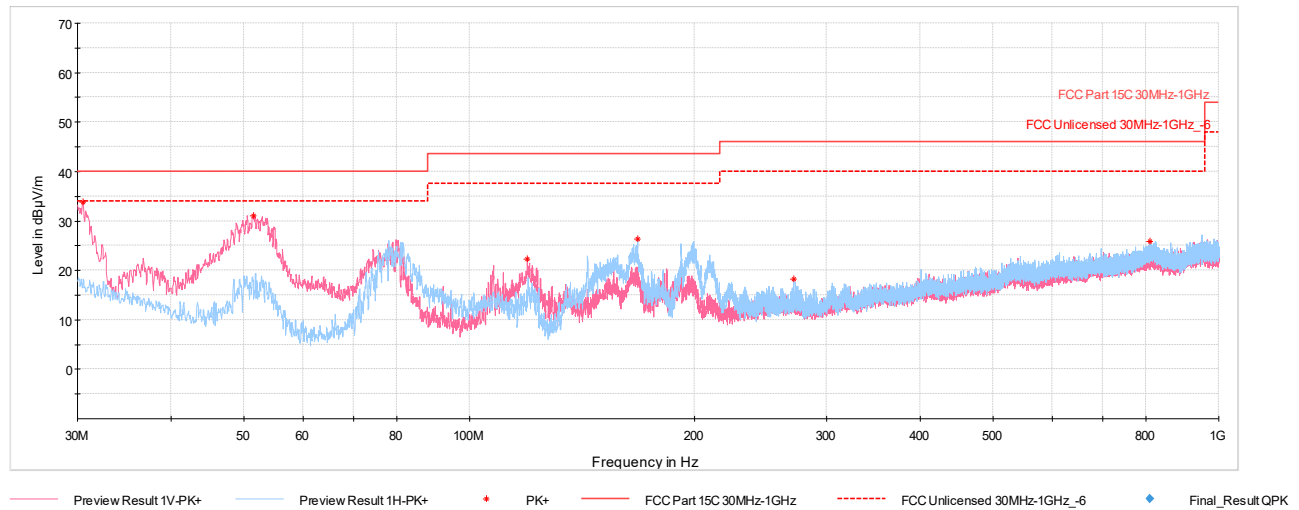

Plot 7-170. Radiated Spurious Emissions below 1GHz 802.11be CDD Ch.6 (RU52+26), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
30.49	Max Peak	V	100	169	-57.91	-15.23	33.86	40.00	-6.14
51.58	Max Peak	V	100	265	-53.08	-22.93	30.99	40.00	-9.01
119.53	Max Peak	V	100	188	-62.90	-21.85	22.25	43.52	-21.27
167.69	Max Peak	H	200	0	-61.32	-19.28	26.40	43.52	-17.12
271.19	Max Peak	H	100	110	-73.75	-14.99	18.26	46.02	-27.76
809.59	Max Peak	H	300	197	-77.83	-3.31	25.86	46.02	-20.16

Table 7-44. Radiated Spurious Emissions below 1GHz 802.11be CDD Ch.6 (RU52+26), with AC/DC Adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 132 of 141

7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-45. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 133 of 141

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

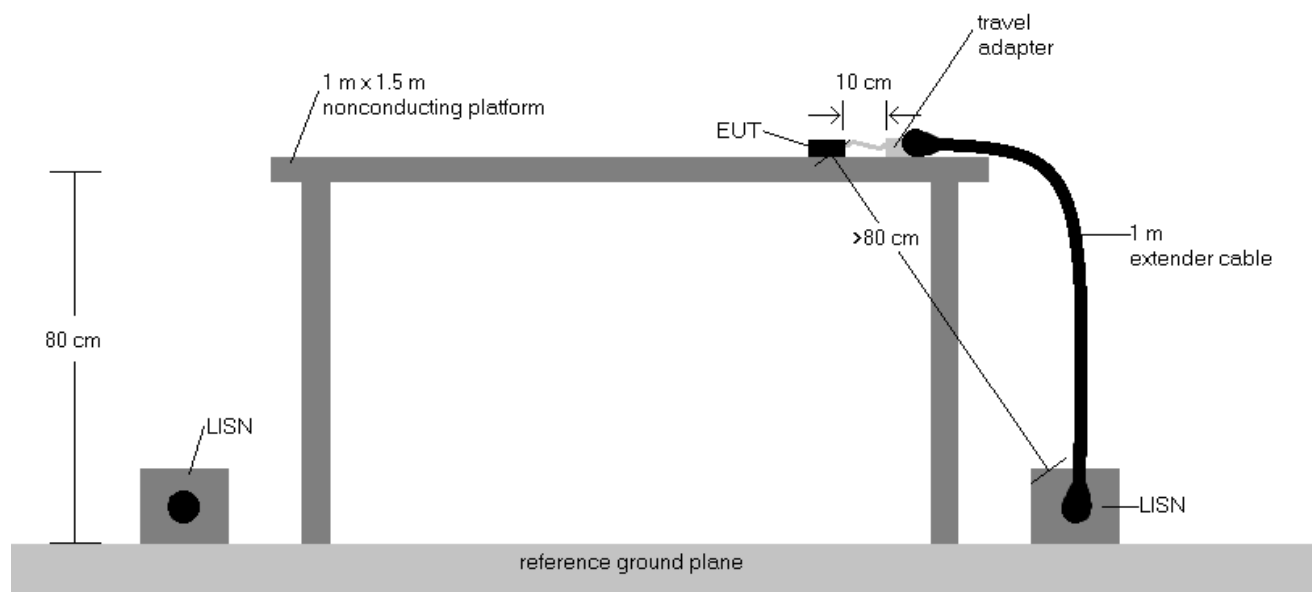


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plot are made using quasi peak and average detectors.
- Deviations to the Specifications: None.
- All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 134 of 141

V 11.0 5/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

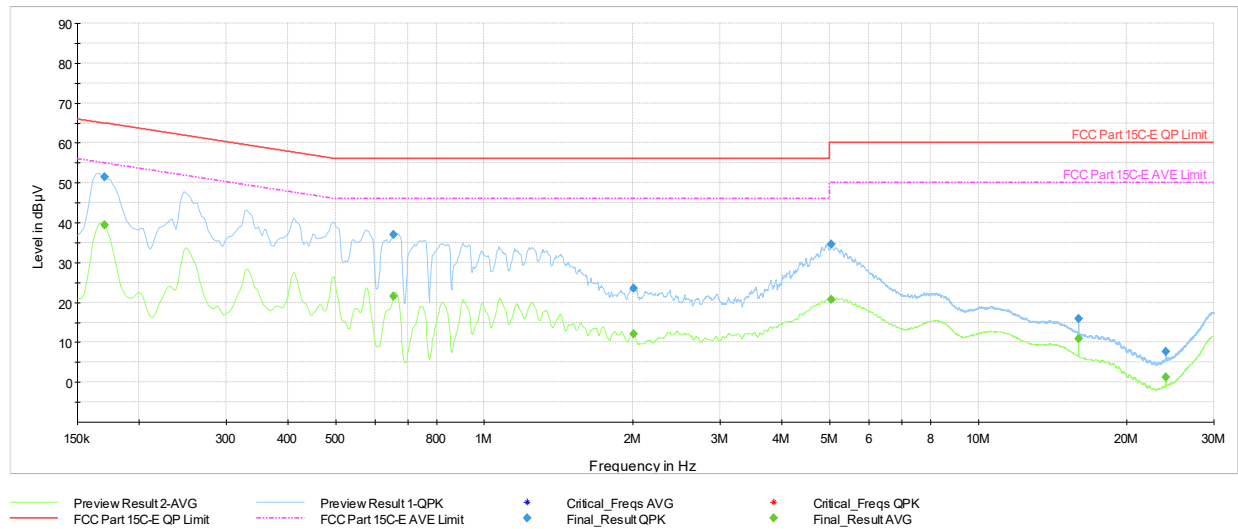

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	39.50	54.95	-15.45	L1	GND
0.17	FINAL	51.38	---	64.95	-13.57	L1	GND
0.65	FINAL	---	21.43	46.00	-24.57	L1	GND
0.65	FINAL	36.95	---	56.00	-19.05	L1	GND
2.01	FINAL	---	12.05	46.00	-33.95	L1	GND
2.01	FINAL	23.56	---	56.00	-32.44	L1	GND
5.04	FINAL	34.60	---	60.00	-25.40	L1	GND
5.04	FINAL	---	20.82	50.00	-29.18	L1	GND
15.97	FINAL	15.90	---	60.00	-44.10	L1	GND
15.97	FINAL	---	10.90	50.00	-39.10	L1	GND
23.95	FINAL	7.60	---	60.00	-52.40	L1	GND
23.96	FINAL	---	1.28	50.00	-48.72	L1	GND

Table 7-46. AC Line Conducted Data with 802.11be (RU26) Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 135 of 141

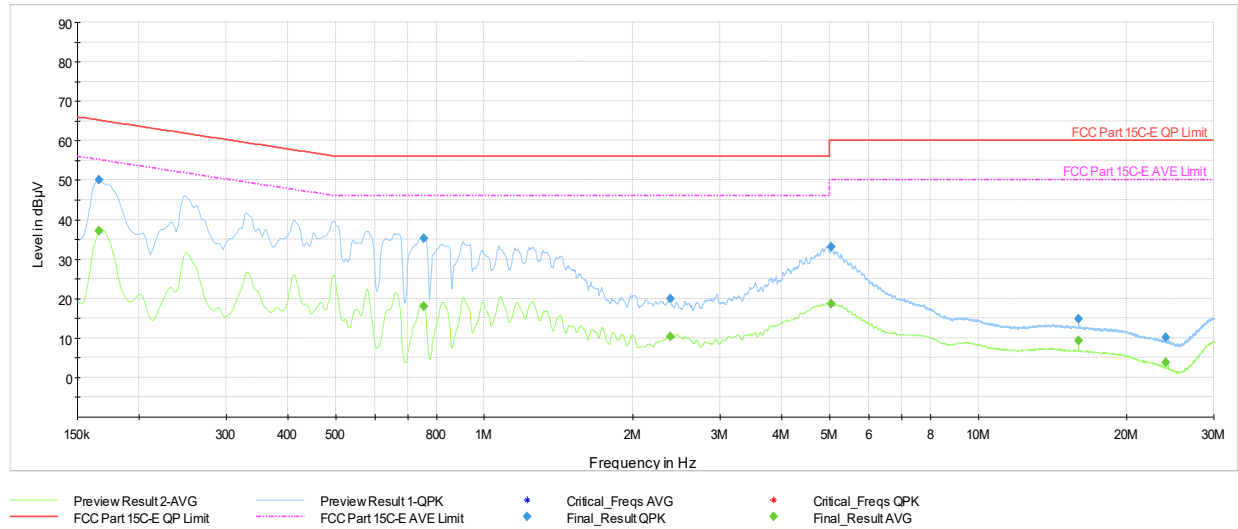


Plot 7-172. AC Line Conducted Emissions with 802.11be (RU26) Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	37.04	55.17	-18.13	N	GND
0.17	FINAL	50.12	---	65.17	-15.05	N	GND
0.76	FINAL	---	18.11	46.00	-27.89	N	GND
0.76	FINAL	35.25	---	56.00	-20.75	N	GND
2.38	FINAL	---	10.38	46.00	-35.62	N	GND
2.38	FINAL	19.88	---	56.00	-36.12	N	GND
5.05	FINAL	33.10	---	60.00	-26.90	N	GND
5.05	FINAL	---	18.65	50.00	-31.35	N	GND
15.98	FINAL	14.80	---	60.00	-45.20	N	GND
15.98	FINAL	---	9.22	50.00	-40.78	N	GND
23.96	FINAL	---	3.76	50.00	-46.24	N	GND
23.96	FINAL	10.13	---	60.00	-49.87	N	GND

Table 7-47. AC Line Conducted Data with 802.11be (RU26) Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 136 of 141

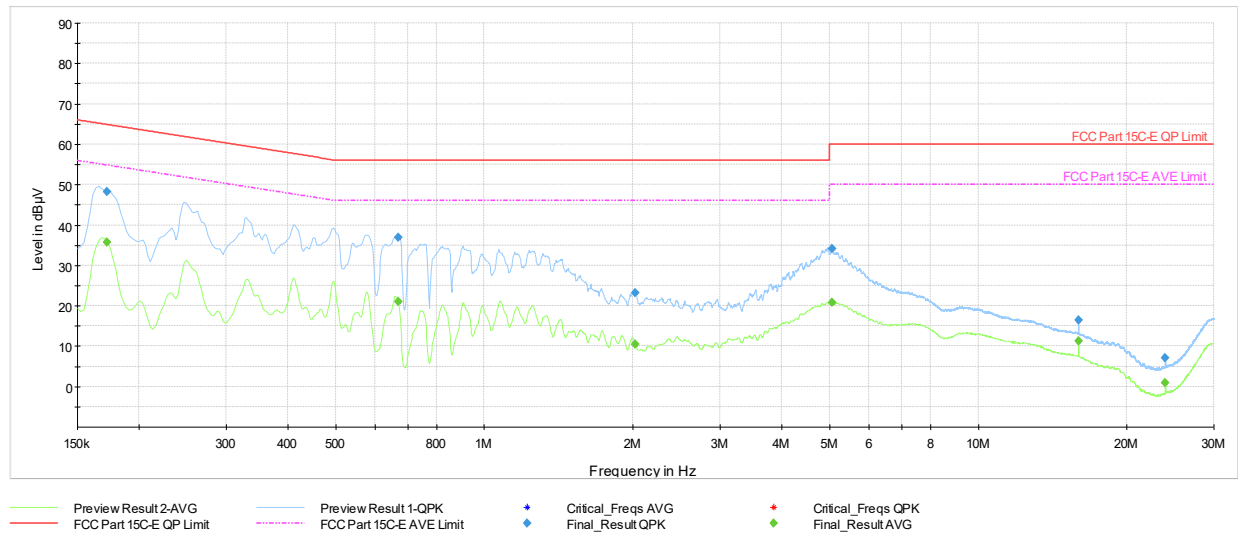


Plot 7-173. AC Line Conducted Emissions with 802.11be (RU242) Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	35.65	54.84	-19.19	L1	GND
0.17	FINAL	48.33	---	64.84	-16.51	L1	GND
0.67	FINAL	---	20.95	46.00	-25.05	L1	GND
0.67	FINAL	36.97	---	56.00	-19.03	L1	GND
2.02	FINAL	---	10.43	46.00	-35.57	L1	GND
2.02	FINAL	23.26	---	56.00	-32.74	L1	GND
5.06	FINAL	34.04	---	60.00	-25.96	L1	GND
5.06	FINAL	---	20.80	50.00	-29.20	L1	GND
15.96	FINAL	16.36	---	60.00	-43.64	L1	GND
15.96	FINAL	---	11.27	50.00	-38.73	L1	GND
23.94	FINAL	---	1.03	50.00	-48.97	L1	GND
23.94	FINAL	7.15	---	60.00	-52.85	L1	GND

Table 7-48. AC Line Conducted Data with 802.11be (RU242) Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 137 of 141

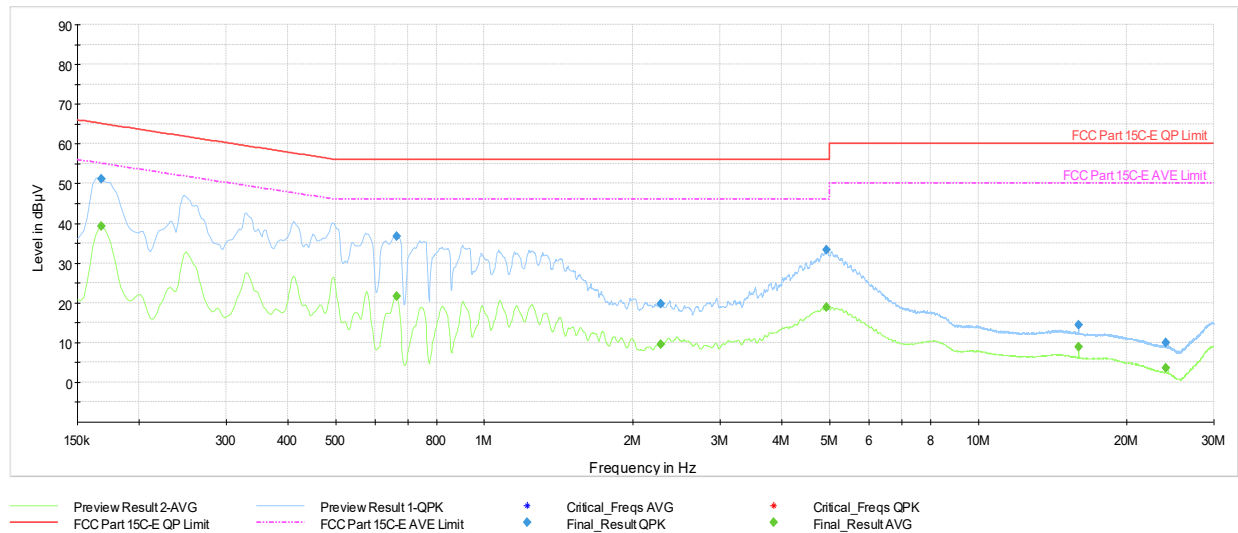


Plot 7-174. AC Line Conducted Emissions with 802.11be (RU242) Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	39.16	55.06	-15.90	N	GND
0.17	FINAL	51.10	---	65.06	-13.96	N	GND
0.67	FINAL	---	21.55	46.00	-24.45	N	GND
0.67	FINAL	36.65	---	56.00	-19.35	N	GND
2.27	FINAL	---	9.57	46.00	-36.43	N	GND
2.27	FINAL	19.71	---	56.00	-36.29	N	GND
4.94	FINAL	33.30	---	56.00	-22.70	N	GND
4.94	FINAL	---	18.82	46.00	-27.18	N	GND
15.96	FINAL	14.38	---	60.00	-45.62	N	GND
15.96	FINAL	---	8.91	50.00	-41.09	N	GND
23.94	FINAL	---	3.69	50.00	-46.31	N	GND
23.94	FINAL	10.03	---	60.00	-49.97	N	GND

Table 7-49. AC Line Conducted Data with 802.11be (RU242) Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 138 of 141

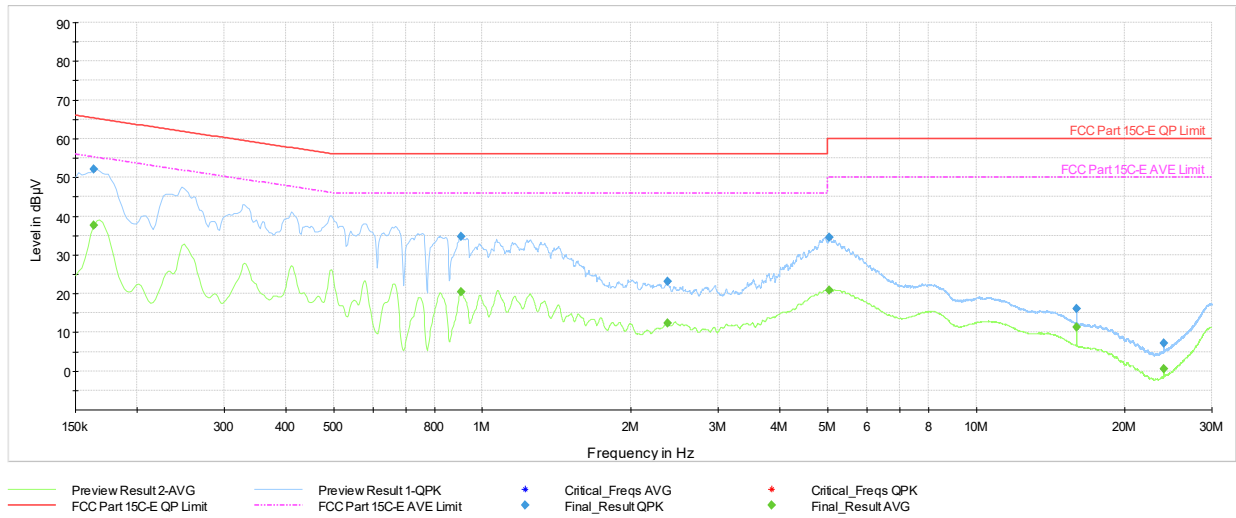


Plot 7-175. AC Line Conducted Emissions with 802.11be (RU52+26) Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.16	FINAL	---	37.53	55.28	-17.75	L1	GND
0.16	FINAL	52.05	---	65.28	-13.23	L1	GND
0.91	FINAL	---	20.50	46.00	-25.50	L1	GND
0.91	FINAL	34.63	---	56.00	-21.37	L1	GND
2.37	FINAL	---	12.32	46.00	-33.68	L1	GND
2.37	FINAL	23.03	---	56.00	-32.97	L1	GND
5.05	FINAL	34.43	---	60.00	-25.57	L1	GND
5.05	FINAL	---	20.94	50.00	-29.06	L1	GND
15.97	FINAL	16.00	---	60.00	-44.00	L1	GND
15.97	FINAL	---	11.29	50.00	-38.71	L1	GND
23.95	FINAL	---	0.64	50.00	-49.36	L1	GND
23.96	FINAL	7.16	---	60.00	-52.84	L1	GND

Table 7-50. AC Line Conducted Data with 802.11be (RU52+26) Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 139 of 141

V 11.0 5/2025

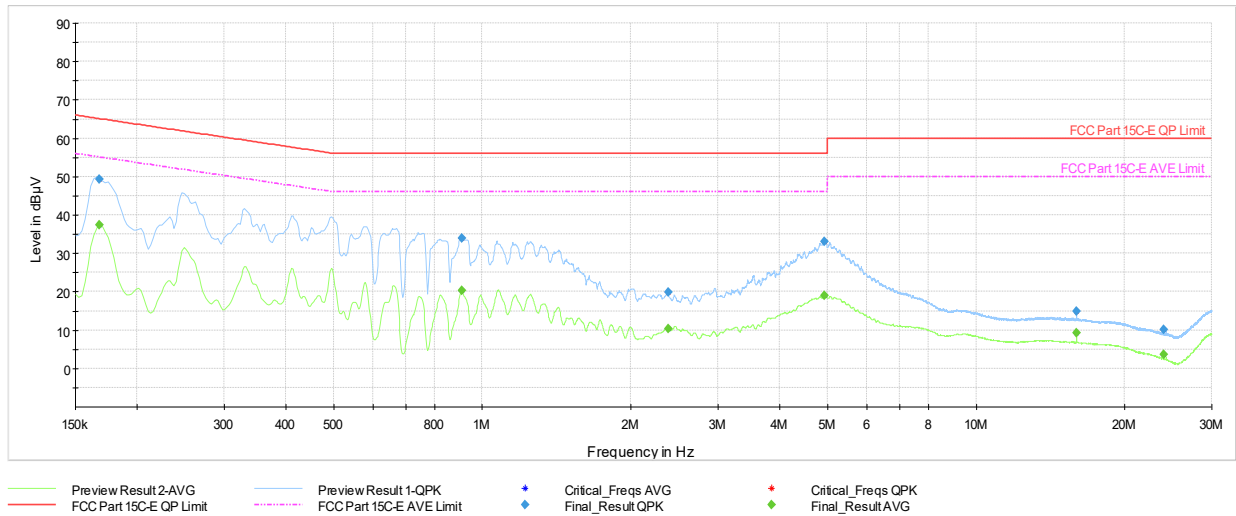

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	37.31	55.06	-17.75	N	GND
0.17	FINAL	49.36	---	65.06	-15.70	N	GND
0.91	FINAL	---	20.29	46.00	-25.71	N	GND
0.91	FINAL	34.00	---	56.00	-22.00	N	GND
2.38	FINAL	---	10.40	46.00	-35.60	N	GND
2.38	FINAL	19.79	---	56.00	-36.21	N	GND
4.94	FINAL	33.12	---	56.00	-22.88	N	GND
4.94	FINAL	---	18.93	46.00	-27.07	N	GND
15.97	FINAL	14.82	---	60.00	-45.18	N	GND
15.97	FINAL	---	9.18	50.00	-40.82	N	GND
23.96	FINAL	---	3.59	50.00	-46.41	N	GND
23.96	FINAL	10.08	---	60.00	-49.92	N	GND

Table 7-51. AC Line Conducted Data with 802.11be (RU52+26) Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 140 of 141

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3361, IC: 579C-A3361** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-15.BCG	Test Dates: 05/12/2025 - 08/05/2025	EUT Type: Tablet Device	Page 141 of 141

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.